


Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC20_5700	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 17:26:19

Test Graph

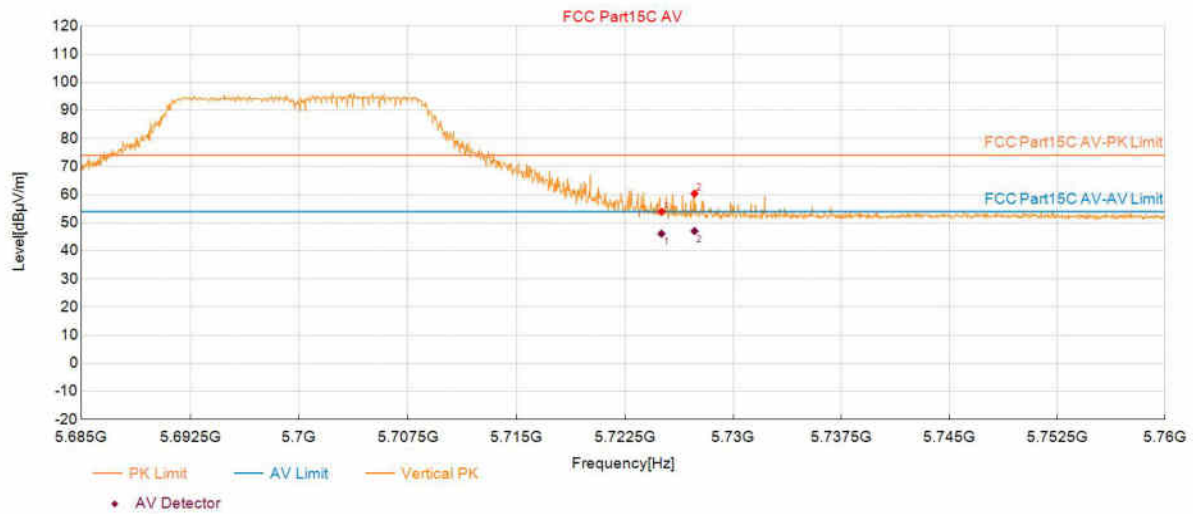

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	53.92	19.93	74.00	20.08	150	296	Vertical
2	5727.3212	60.36	19.94	74.00	13.64	150	188	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	46.10	54.00	7.90	150	296	Vertical
2	5727.3212	47.03	54.00	6.97	150	188	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC40_5190	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 17:31:05

Test Graph

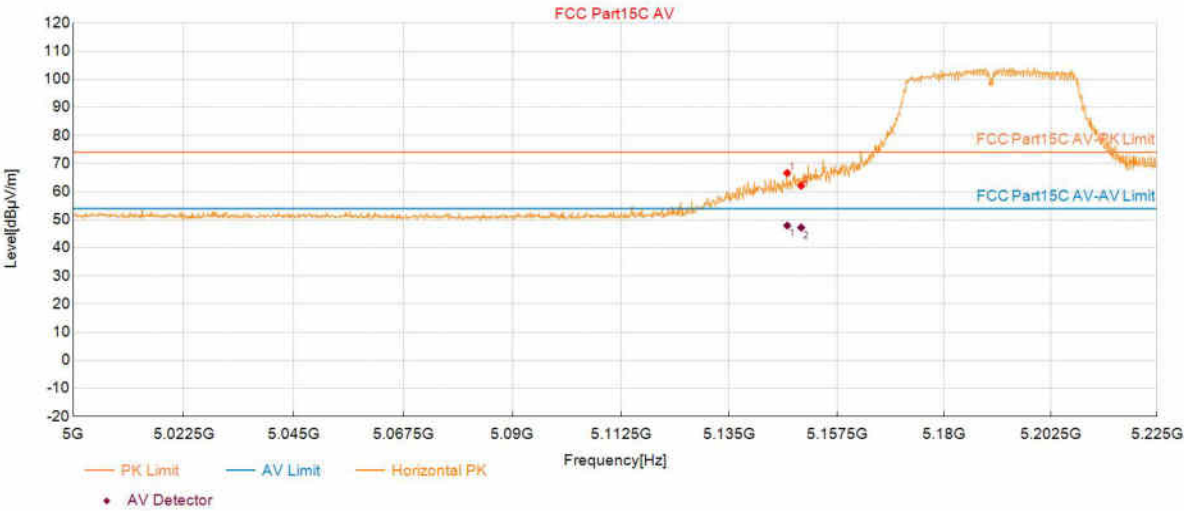

Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.1111	66.62	17.80	74.00	7.38	150	277	Horizontal
2	5150.0375	62.10	17.79	74.00	11.90	150	288	Horizontal


PK Final Data List							
NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5147.1111	47.92	54.00	6.08	150	277	Horizontal
2	5150.0375	47.22	54.00	6.78	150	288	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC40_5190	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 17:31:44

Test Graph

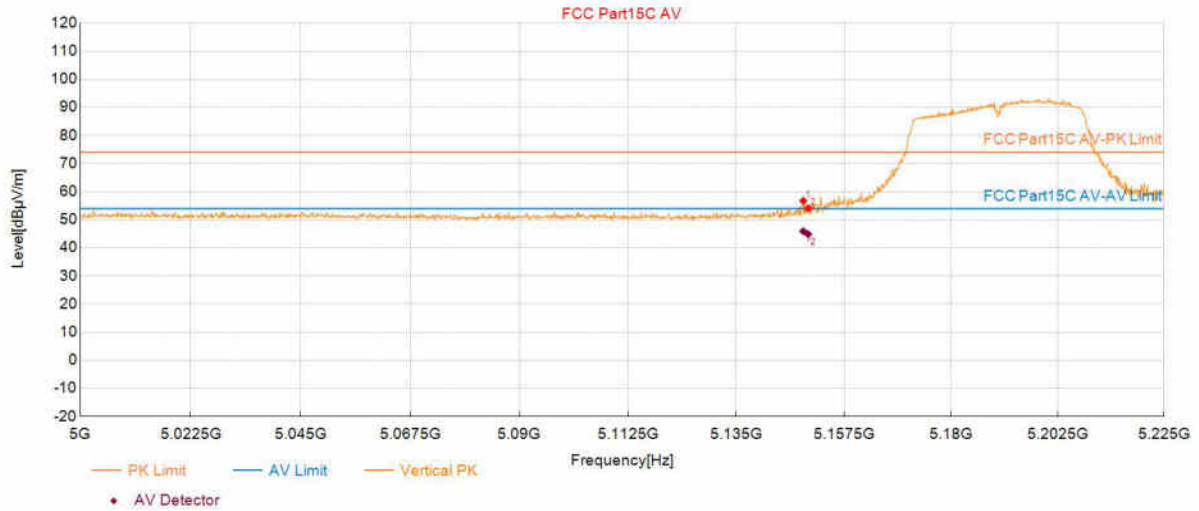

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.0245	56.72	17.80	74.00	17.28	150	359	Vertical
2	5150.0375	54.04	17.79	74.00	19.96	150	359	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.0245	45.91	54.00	8.09	150	359	Vertical
2	5150.0375	44.86	54.00	9.14	150	359	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC40_5310	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 18		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 17:35:00

Test Graph

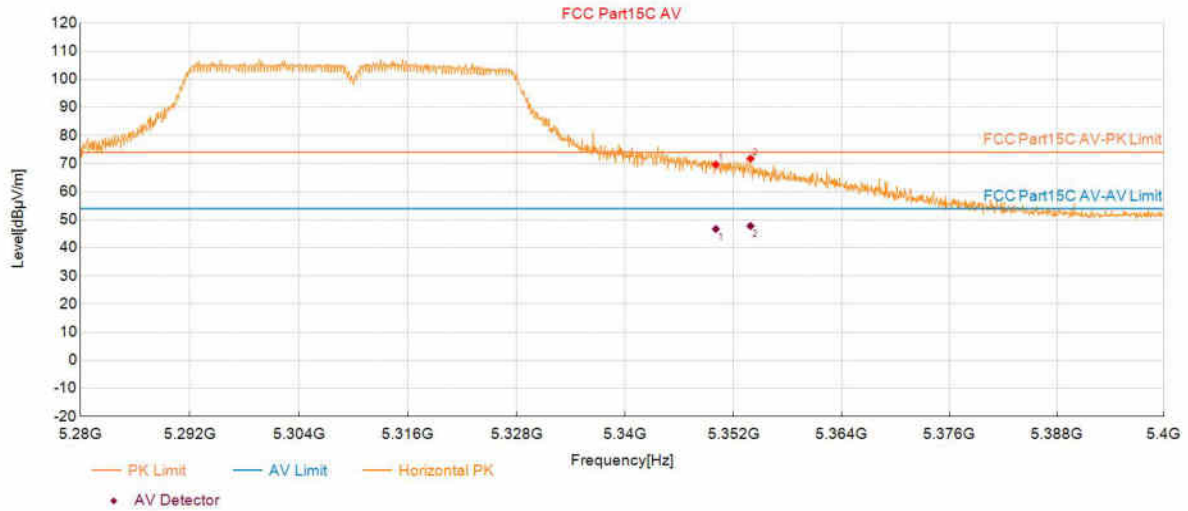

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0550	69.62	18.34	74.00	4.38	150	286	Horizontal
2	5353.8969	71.72	18.36	74.00	2.28	150	286	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0550	46.70	54.00	7.30	150	286	Horizontal
2	5353.8969	47.77	54.00	6.23	150	286	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC40_5310	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 18		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 17:35:39

Test Graph

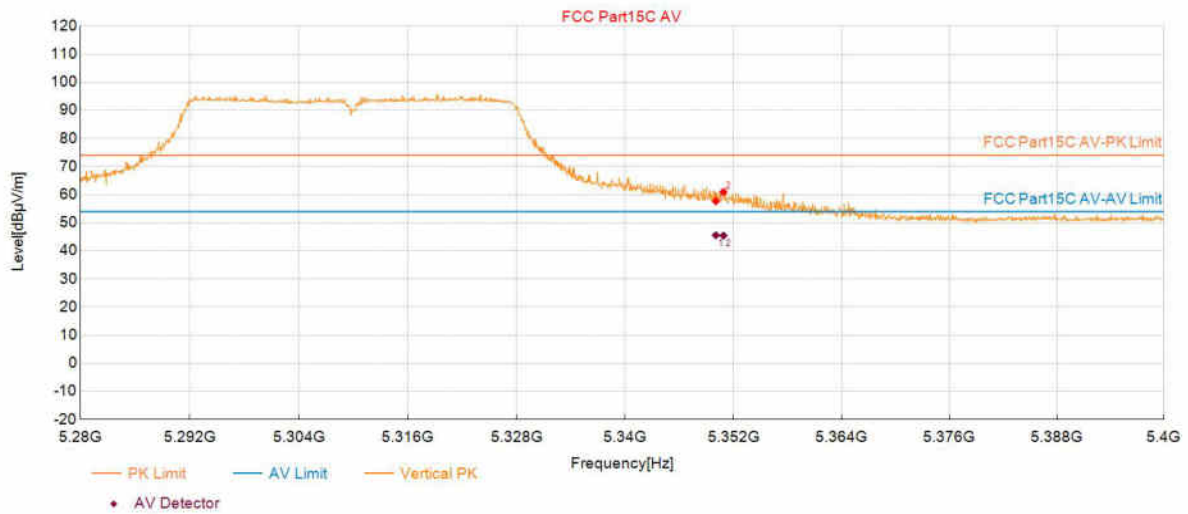

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0550	57.70	18.34	74.00	16.30	150	346	Vertical
2	5350.8954	60.93	18.34	74.00	13.07	150	359	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0550	45.56	54.00	8.44	150	346	Vertical
2	5350.8954	45.43	54.00	8.57	150	359	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC40_5510	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 17:41:07

Test Graph

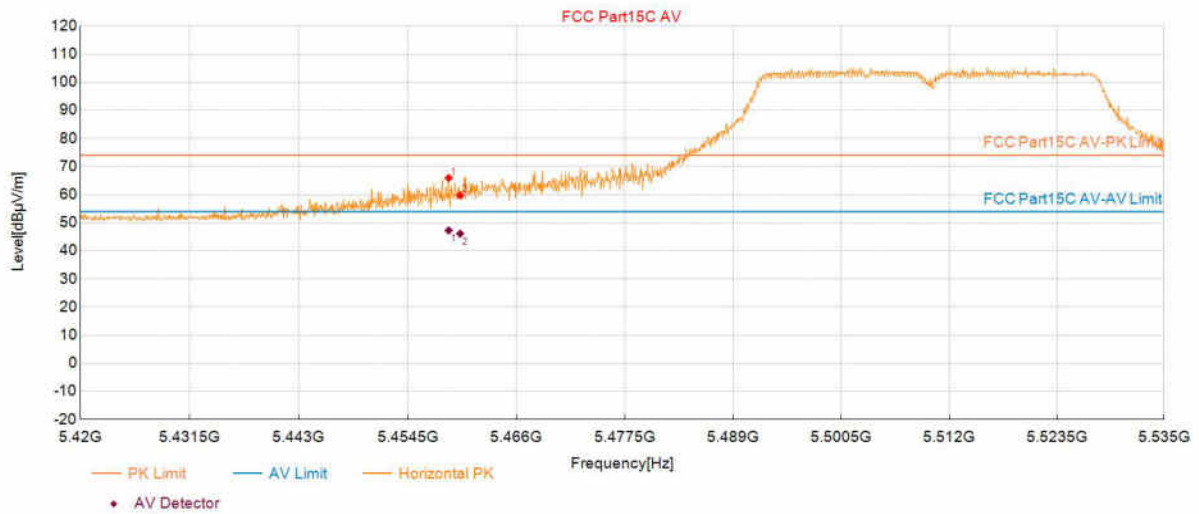

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.8319	65.91	18.72	74.00	8.09	150	101	Horizontal
2	5460.0400	59.73	18.72	74.00	14.27	150	96	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5458.8319	47.27	54.00	6.73	150	101	Horizontal
2	5460.0400	46.13	54.00	7.87	150	96	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC40_5510	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 17:41:50

Test Graph

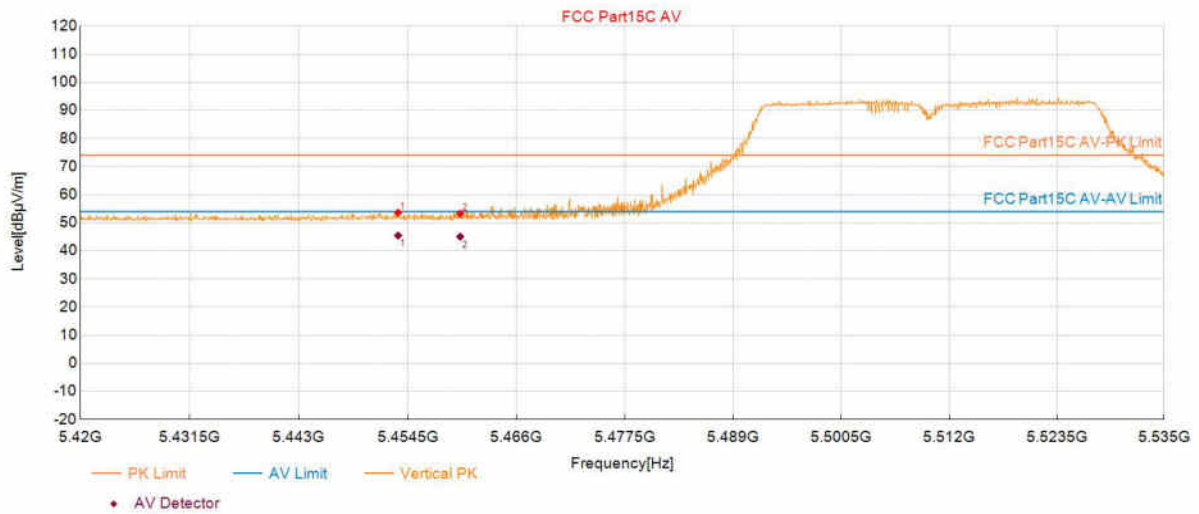

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5453.4817	53.57	18.71	74.00	20.43	150	204	Vertical
2	5460.0400	53.21	18.72	74.00	20.79	150	189	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5453.4817	45.45	54.00	8.55	150	204	Vertical
2	5460.0400	45.05	54.00	8.95	150	189	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC40_5670	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 17:48:34

Test Graph

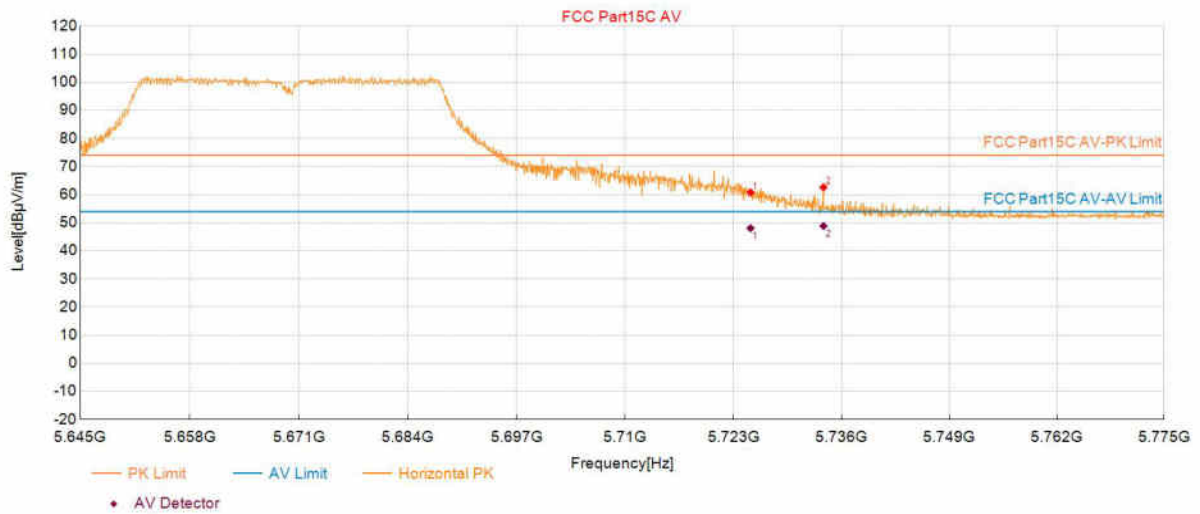

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0550	60.78	19.93	74.00	13.22	150	270	Horizontal
2	5733.8344	62.61	19.97	74.00	11.39	150	279	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0550	48.07	54.00	5.93	150	270	Horizontal
2	5733.8344	48.85	54.00	5.15	150	279	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC40_5670	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 17:49:16

Test Graph

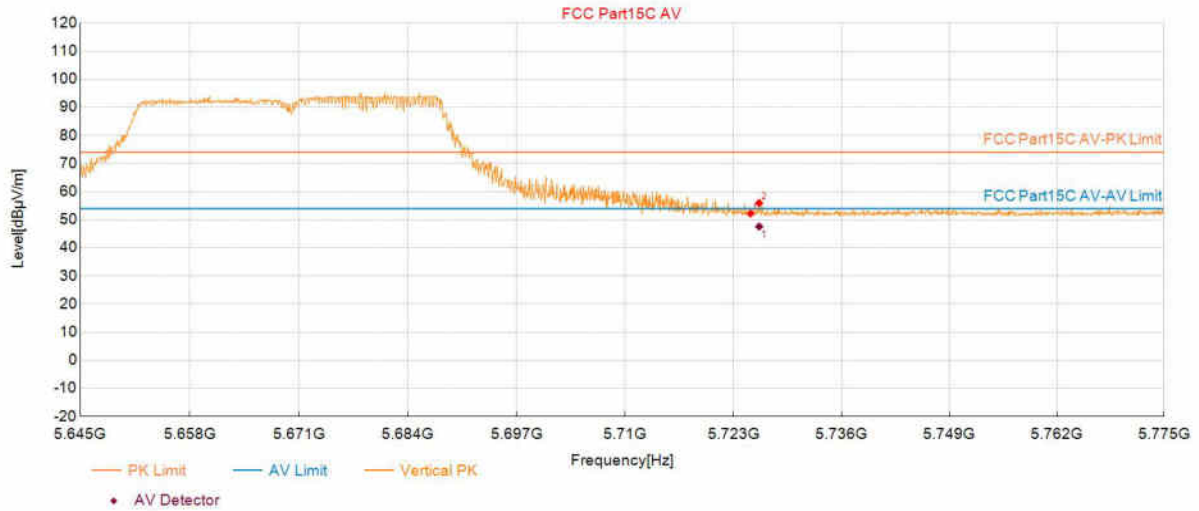

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0550	52.17	19.93	74.00	21.83	150	188	Vertical
2	5726.0955	55.97	19.93	74.00	18.03	150	177	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5726.0955	47.57	54.00	6.43	150	177	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC80_5210	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 18:08:05

Test Graph

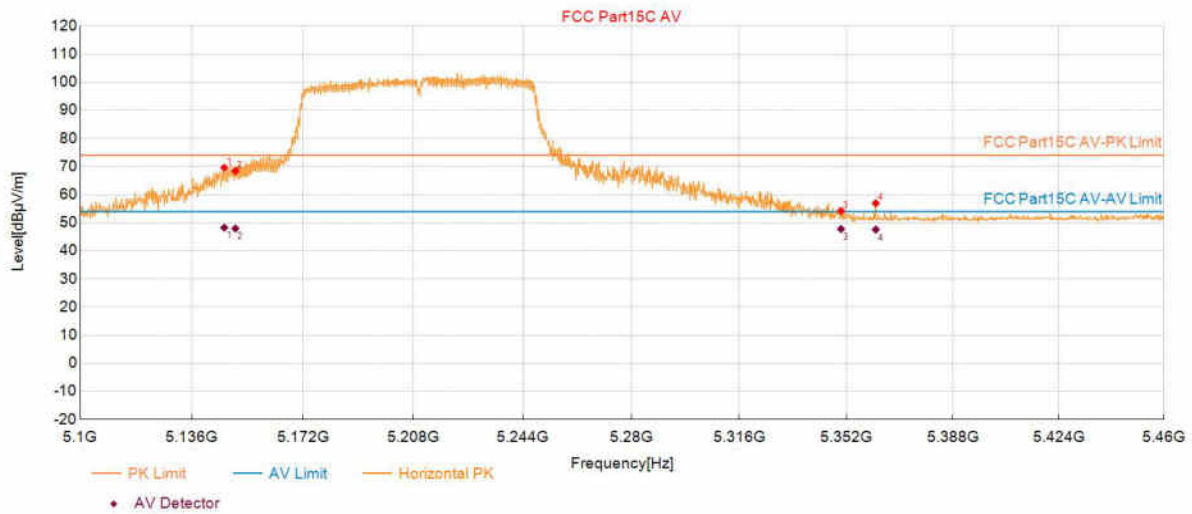

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5146.4632	69.59	17.80	74.00	4.41	150	282	Horizontal
2	5150.0650	68.40	17.79	74.00	5.60	150	78	Horizontal
3	5350.1451	54.25	18.34	74.00	19.75	150	63	Horizontal
4	5361.8509	56.94	18.40	74.00	17.06	150	287	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5146.4632	48.24	54.00	5.76	150	282	Horizontal
2	5150.0650	47.94	54.00	6.06	150	78	Horizontal
3	5350.1451	47.78	54.00	6.22	150	63	Horizontal
4	5361.8509	47.58	54.00	6.42	150	287	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC80_5210	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 18:08:45

Test Graph

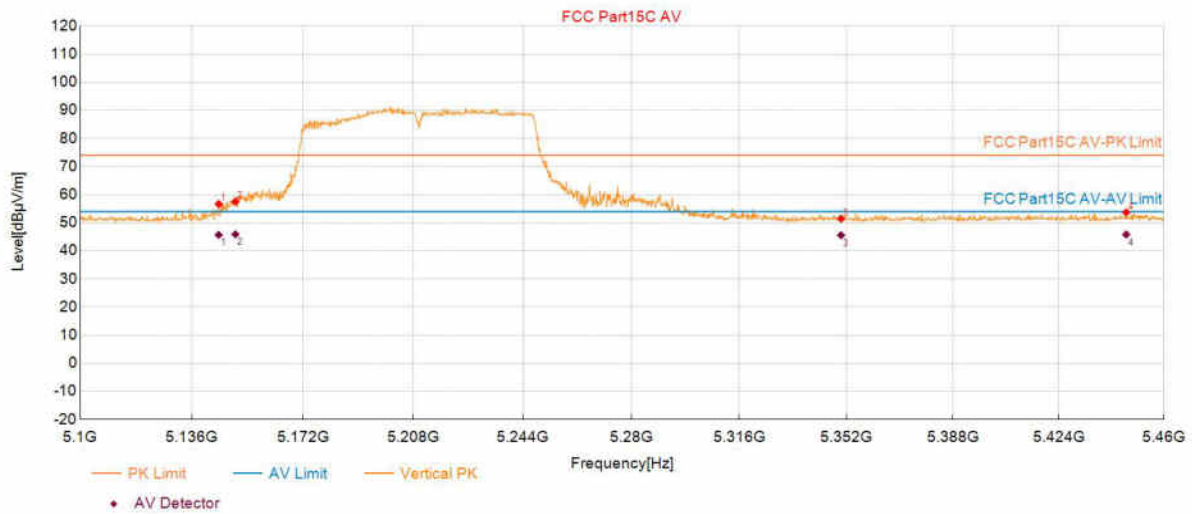

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5144.6623	56.69	17.80	74.00	17.31	150	357	Vertical
2	5150.0650	57.55	17.79	74.00	16.45	150	3	Vertical
3	5350.1451	51.42	18.34	74.00	22.58	150	324	Vertical
4	5447.0335	53.66	18.70	74.00	20.34	150	211	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5144.6623	45.68	54.00	8.32	150	357	Vertical
2	5150.0650	45.91	54.00	8.09	150	3	Vertical
3	5350.1451	45.56	54.00	8.44	150	324	Vertical
4	5447.0335	45.83	54.00	8.17	150	211	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC80_5290	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 18:18:00

Test Graph

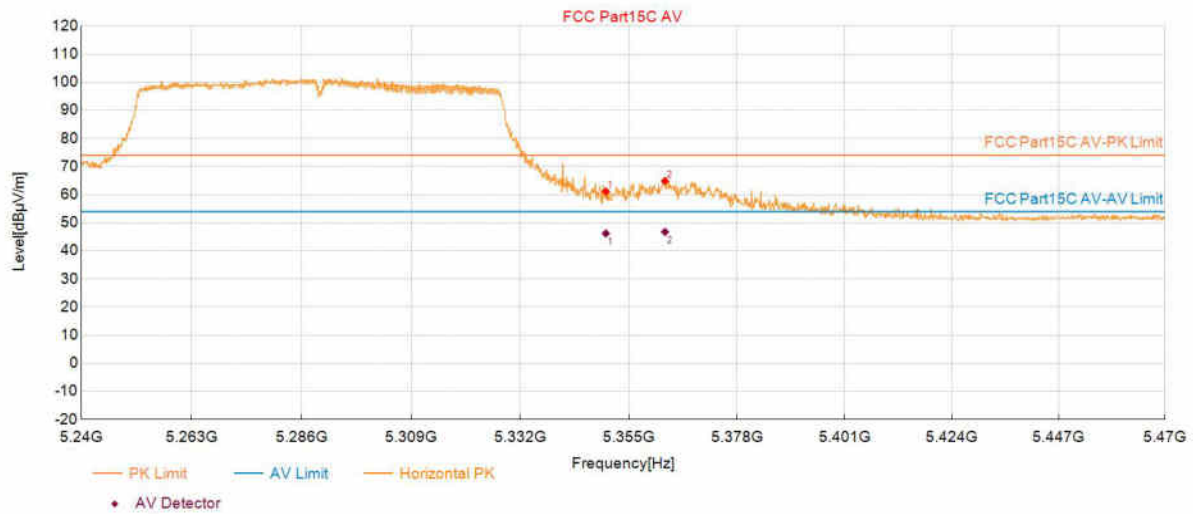

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.1101	61.15	18.34	74.00	12.85	150	293	Horizontal
2	5362.6513	64.86	18.40	74.00	9.14	150	293	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.1101	46.19	54.00	7.81	150	293	Horizontal
2	5362.6513	46.73	54.00	7.27	150	293	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC80_5290	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 18:18:42

Test Graph

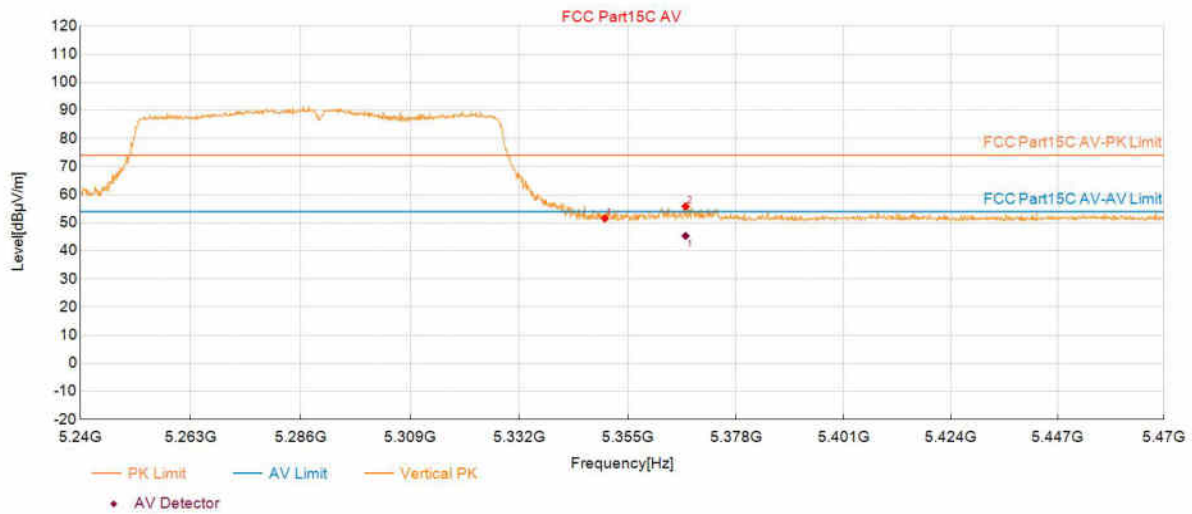

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.1101	51.52	18.34	74.00	22.48	150	305	Vertical
2	5367.2536	55.85	18.43	74.00	18.15	150	0	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5367.2536	45.33	54.00	8.67	150	0	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC80_5530	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 18:37:47

Test Graph

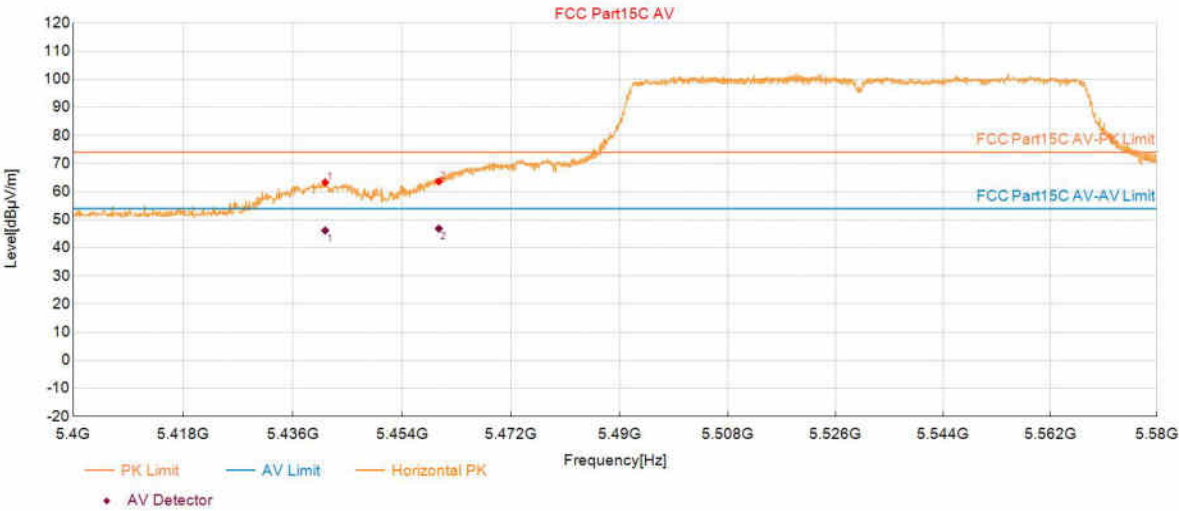

Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5441.3307	63.31	18.69	74.00	10.69	150	92	Horizontal
2	5460.0600	63.61	18.72	74.00	10.39	150	100	Horizontal


PK Final Data List							
NO.	Frequency (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5441.3307	46.18	54.00	7.82	150	92	Horizontal
2	5460.0600	46.83	54.00	7.17	150	100	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC80_5530	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 18:38:30

Test Graph

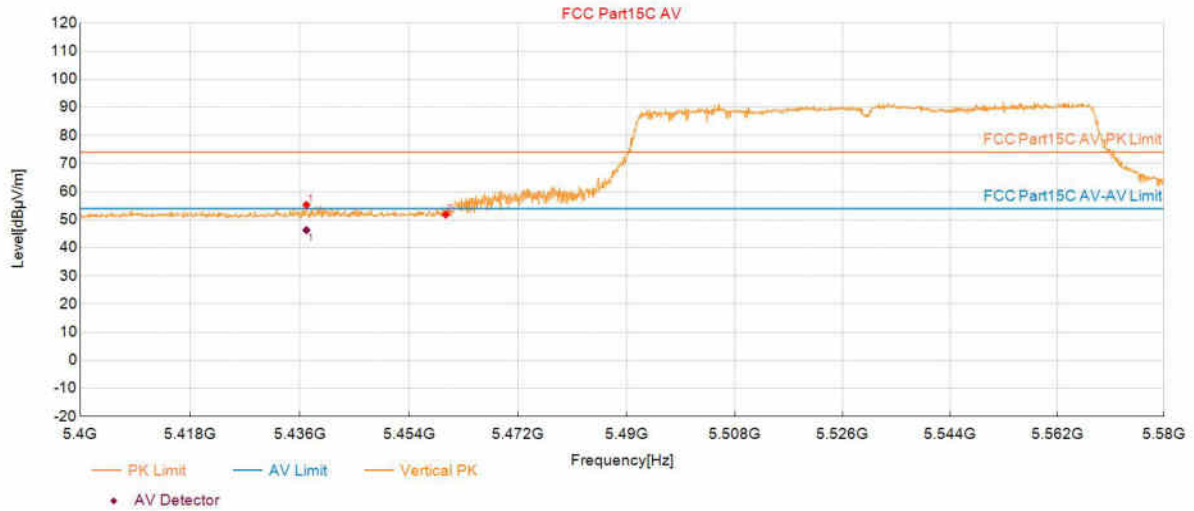

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5437.0985	55.29	18.69	74.00	18.71	150	183	Vertical
2	5460.0600	51.84	18.72	74.00	22.16	150	174	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5437.0985	46.30	54.00	7.70	150	183	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC80_5610	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 18:44:04

Test Graph

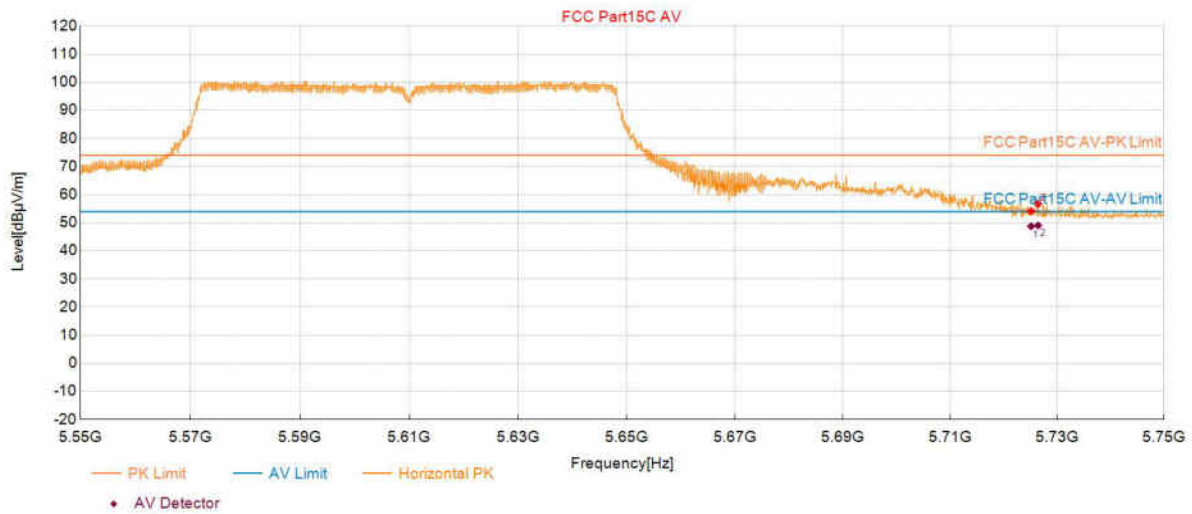

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0875	54.08	19.93	74.00	19.92	150	287	Horizontal
2	5726.3882	56.72	19.93	74.00	17.28	150	296	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0875	48.73	54.00	5.27	150	287	Horizontal
2	5726.3882	49.04	54.00	4.96	150	296	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AC80_5610	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 1 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 18:44:46

Test Graph

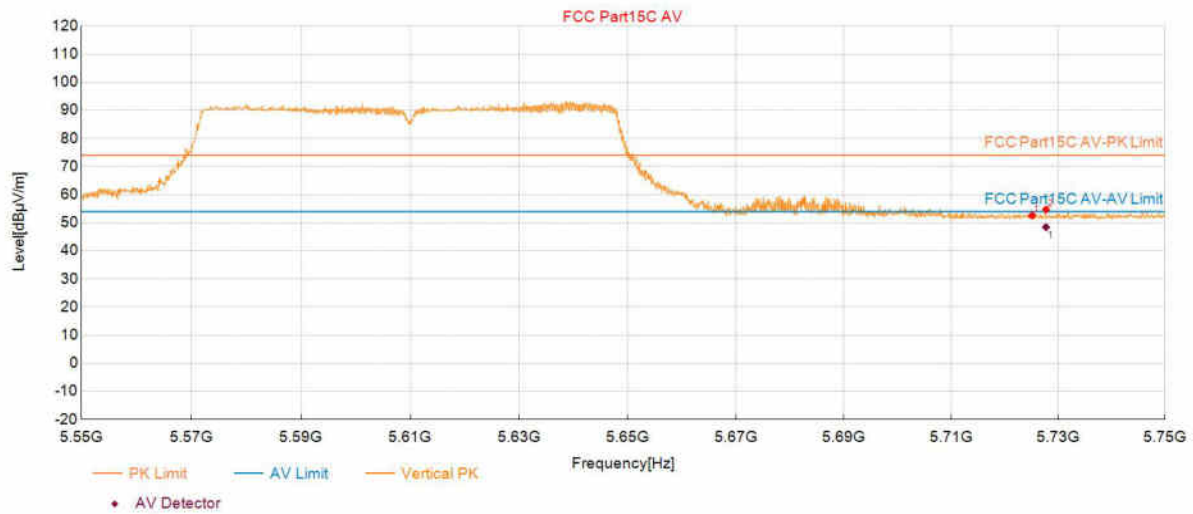

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0875	52.61	19.93	74.00	21.39	150	7	Vertical
2	5727.6888	54.70	19.94	74.00	19.30	150	305	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5727.6888	48.43	54.00	5.57	150	305	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX20_5180	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:02:06

Test Graph

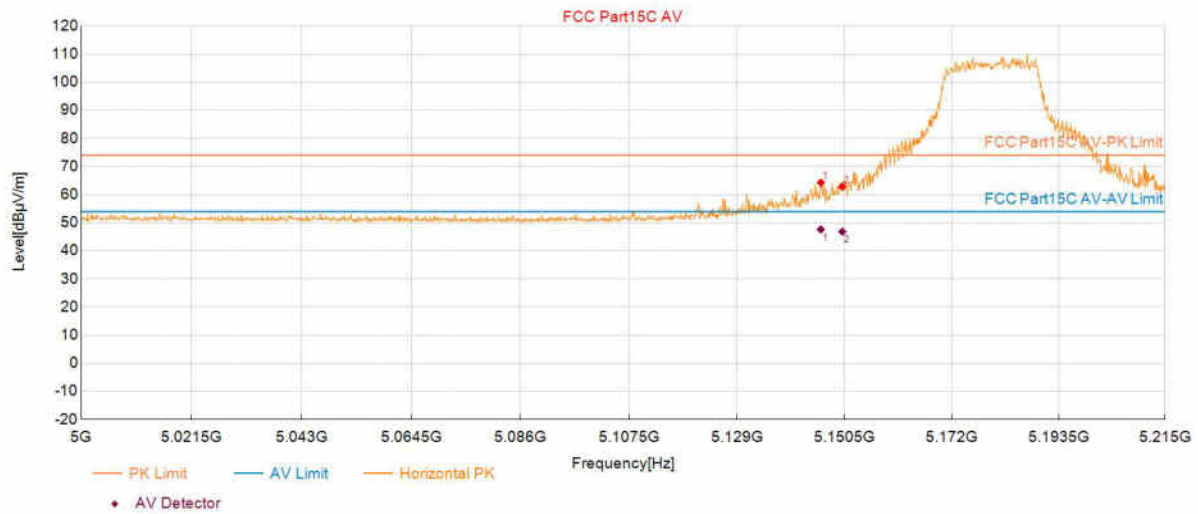

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5145.7354	64.27	17.80	74.00	9.73	150	75	Horizontal
2	5150.0375	62.81	17.79	74.00	11.19	150	294	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5145.7354	47.60	54.00	6.40	150	75	Horizontal
2	5150.0375	46.82	54.00	7.18	150	294	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX20_5180	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:02:48

Test Graph

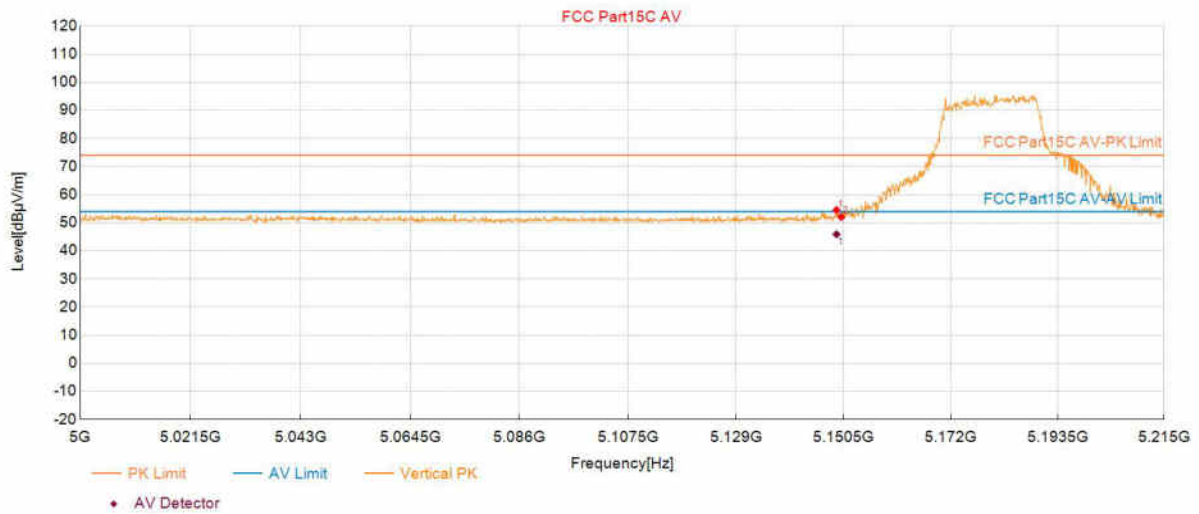

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.0695	54.52	17.80	74.00	19.48	150	170	Vertical
2	5150.0375	52.04	17.79	74.00	21.96	150	357	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5149.0695	45.91	54.00	8.09	150	170	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX20_5320	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 18		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:06:51

Test Graph

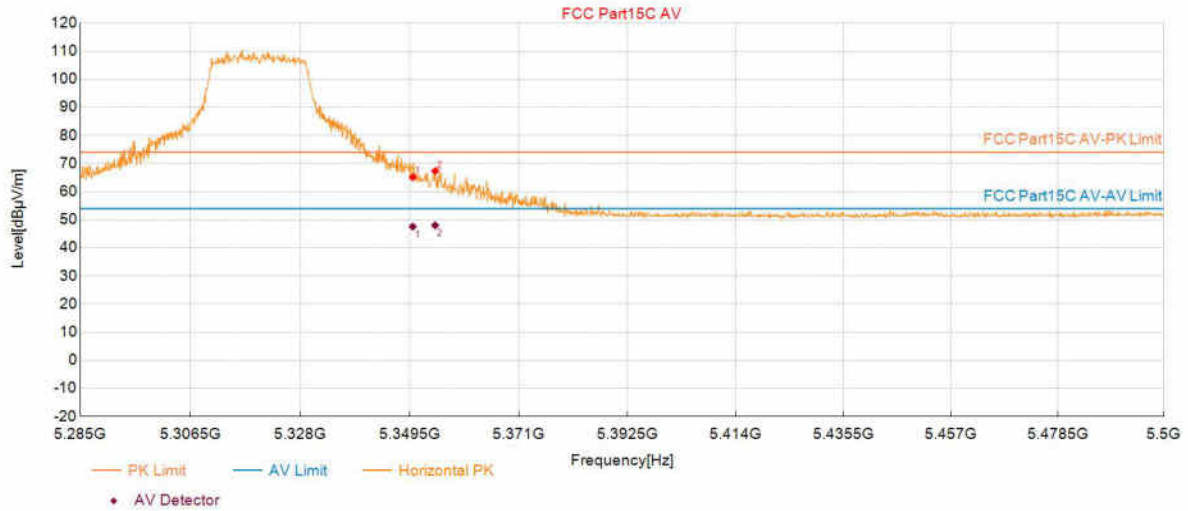

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0700	65.15	18.34	74.00	8.85	150	91	Horizontal
2	5354.4797	67.33	18.36	74.00	6.67	150	292	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0700	47.55	54.00	6.45	150	91	Horizontal
2	5354.4797	48.01	54.00	5.99	150	292	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX20_5320	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 18		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:07:34

Test Graph

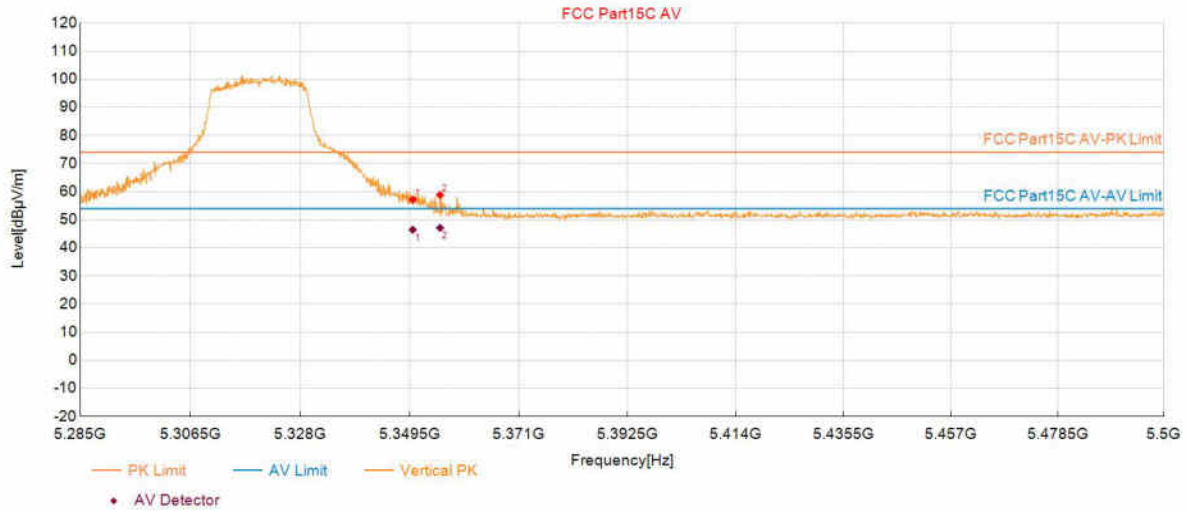

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0700	57.17	18.34	74.00	16.83	150	184	Vertical
2	5355.4477	58.85	18.36	74.00	15.15	150	3	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0700	46.44	54.00	7.56	150	184	Vertical
2	5355.4477	47.10	54.00	6.90	150	3	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX20_5500	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:22:27

Test Graph

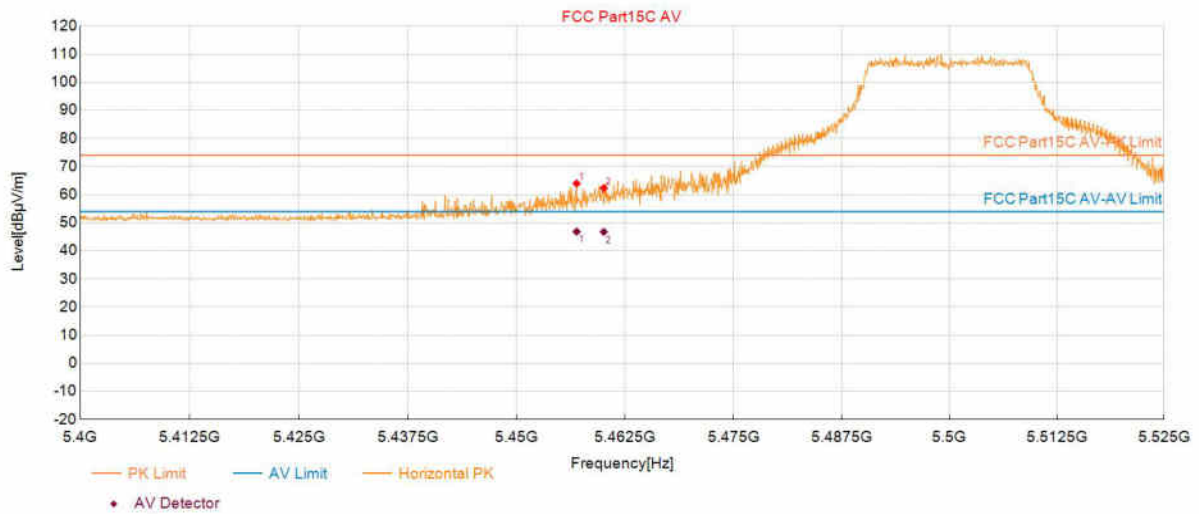

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5456.9035	63.97	18.72	74.00	10.03	150	102	Horizontal
2	5460.0300	62.33	18.72	74.00	11.67	150	278	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5456.9035	46.83	54.00	7.17	150	102	Horizontal
2	5460.0300	46.75	54.00	7.25	150	278	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX20_5500	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:23:10

Test Graph

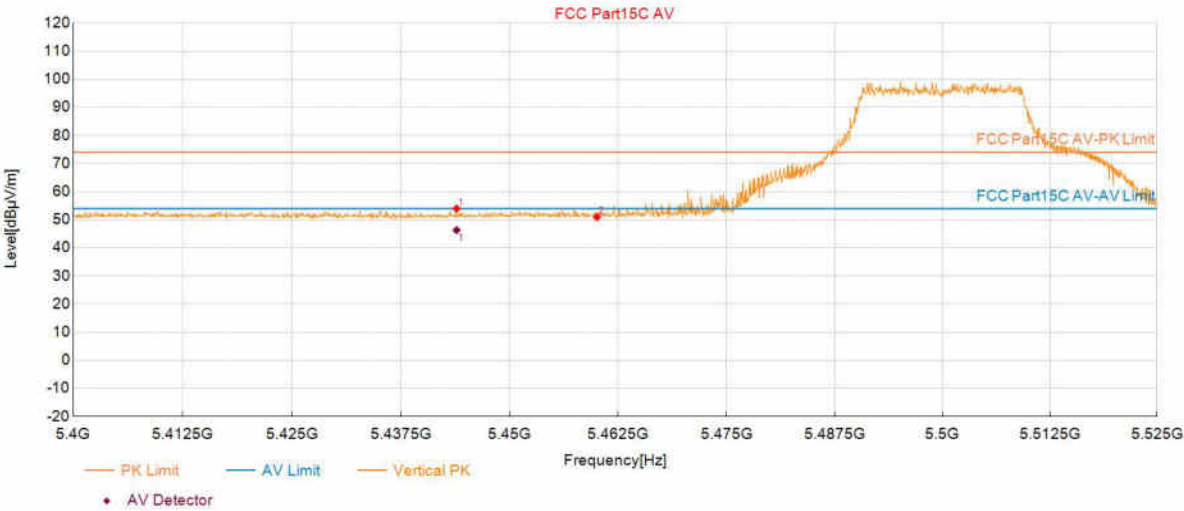

Suspected Data List								
NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5443.8969	53.96	18.69	74.00	20.04	150	179	Vertical
2	5460.0300	50.93	18.72	74.00	23.07	150	1	Vertical


PK Final Data List							
NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5443.8969	46.29	54.00	7.71	150	179	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX20_5700	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:31:00

Test Graph

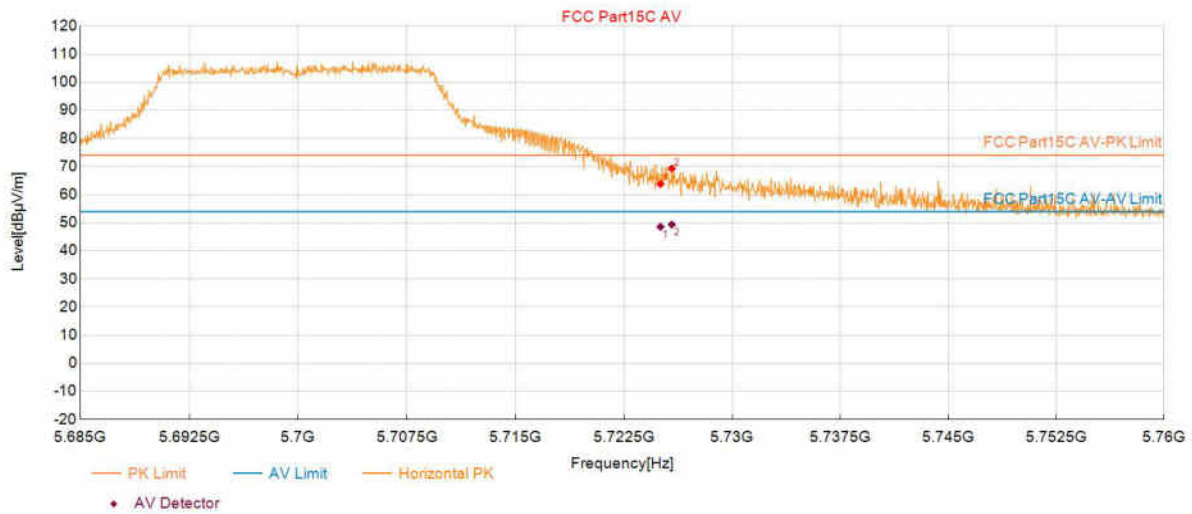

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	63.80	19.93	74.00	10.20	150	294	Horizontal
2	5725.8204	69.30	19.93	74.00	4.70	150	294	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	48.56	54.00	5.44	150	294	Horizontal
2	5725.8204	49.36	54.00	4.64	150	294	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX20_5700	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:31:42

Test Graph

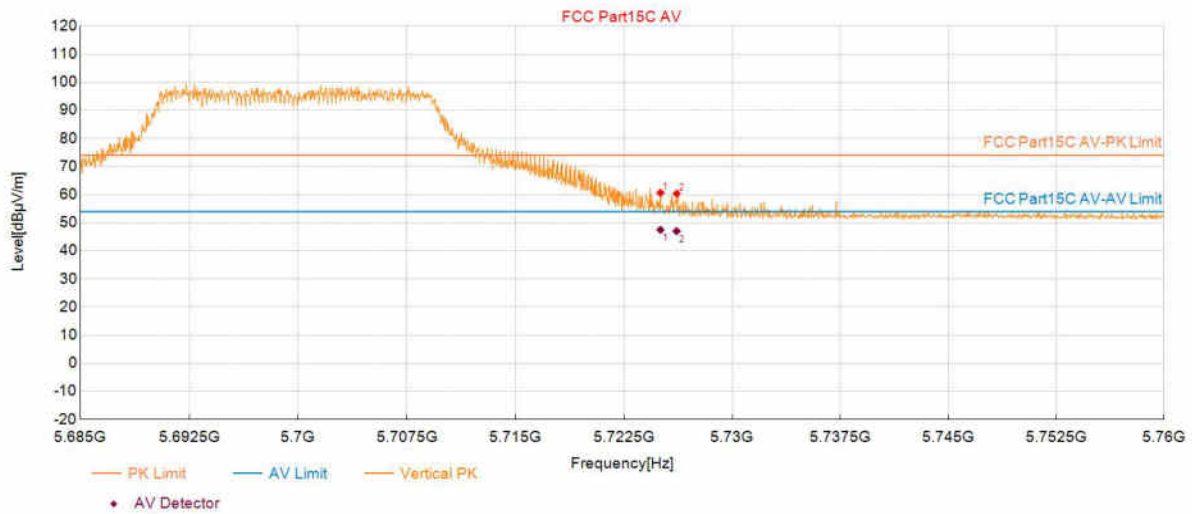

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	60.66	19.93	74.00	13.34	150	181	Vertical
2	5726.1581	60.37	19.93	74.00	13.63	150	187	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0325	47.48	54.00	6.52	150	181	Vertical
2	5726.1581	47.02	54.00	6.98	150	187	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX40_5190	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:34:51

Test Graph

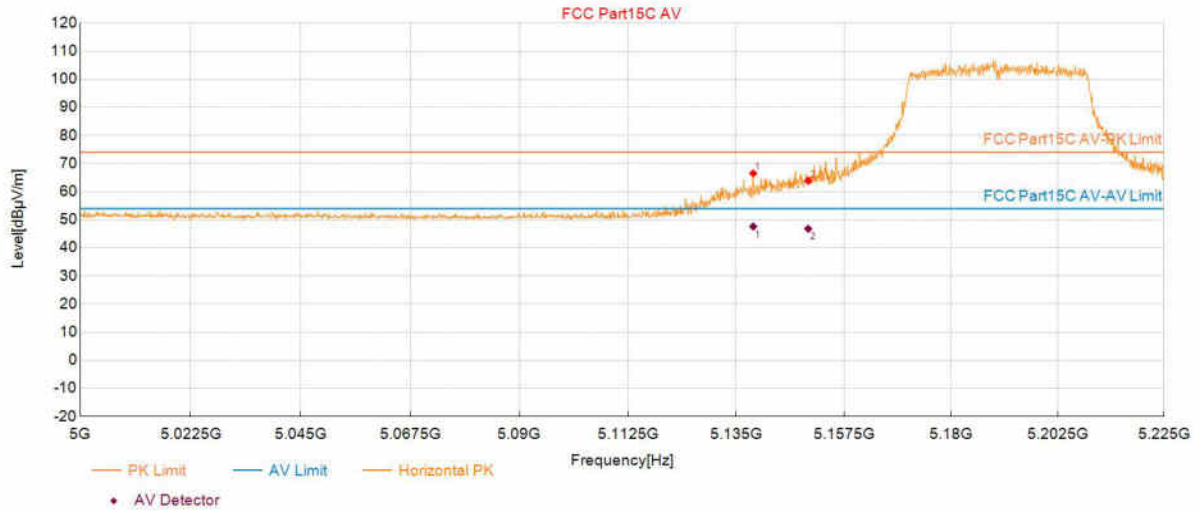

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5138.5568	66.49	17.80	74.00	7.51	150	294	Horizontal
2	5150.0375	63.88	17.79	74.00	10.12	150	80	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5138.5568	47.60	54.00	6.40	150	294	Horizontal
2	5150.0375	46.78	54.00	7.22	150	80	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX40_5190	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:35:33

Test Graph

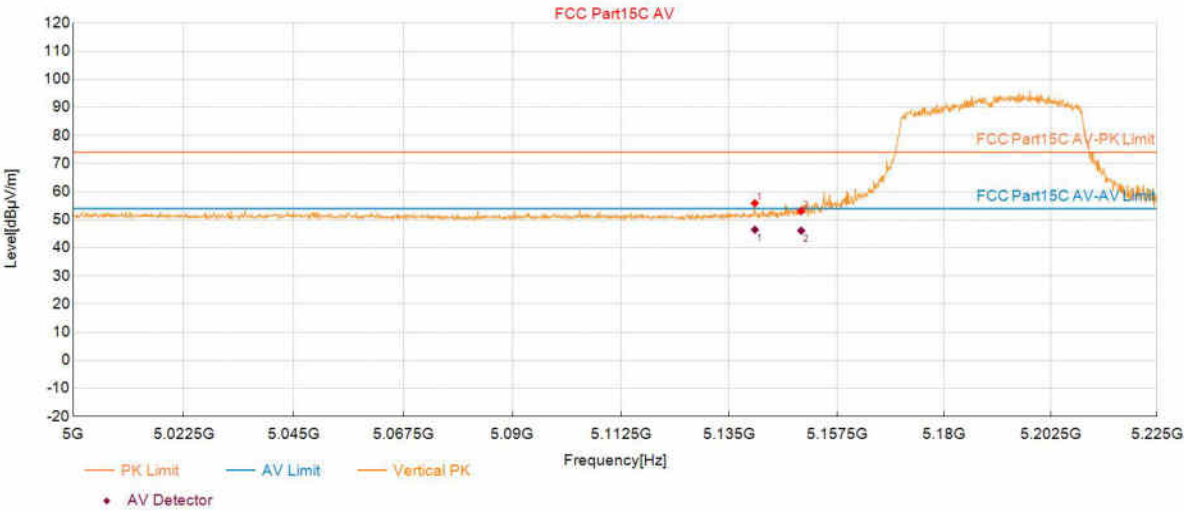

Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5140.3577	55.88	17.80	74.00	18.12	150	184	Vertical
2	5150.0375	53.07	17.79	74.00	20.93	150	357	Vertical


PK Final Data List							
NO.	Frequency (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5140.3577	46.44	54.00	7.56	150	184	Vertical
2	5150.0375	46.12	54.00	7.88	150	357	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX40_5310	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:39:03

Test Graph

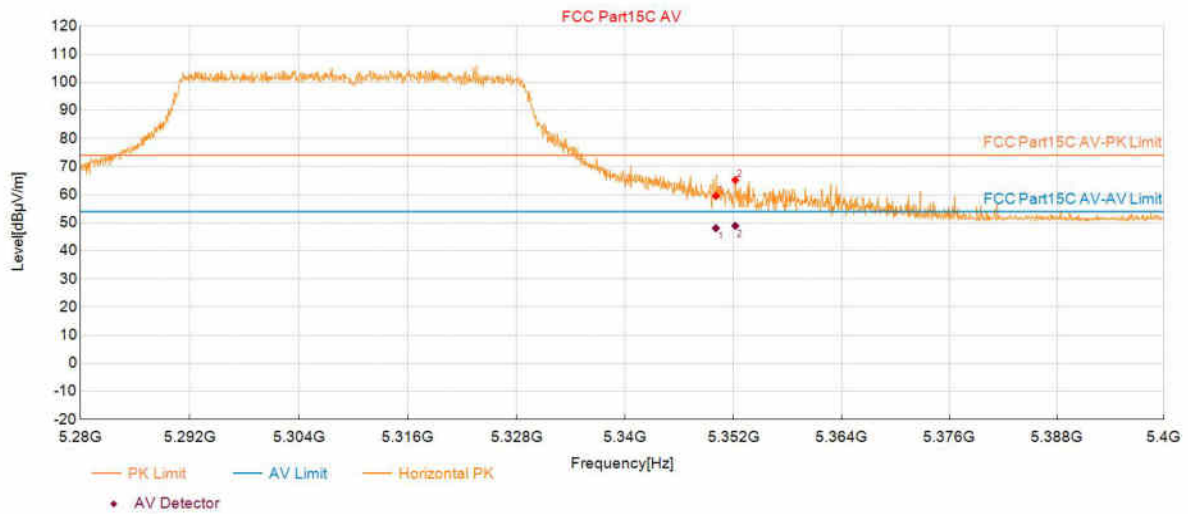

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0550	59.51	18.34	74.00	14.49	150	290	Horizontal
2	5352.2161	65.18	18.35	74.00	8.82	150	290	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0550	48.07	54.00	5.93	150	290	Horizontal
2	5352.2161	48.90	54.00	5.10	150	290	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX40_5310	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:39:45

Test Graph

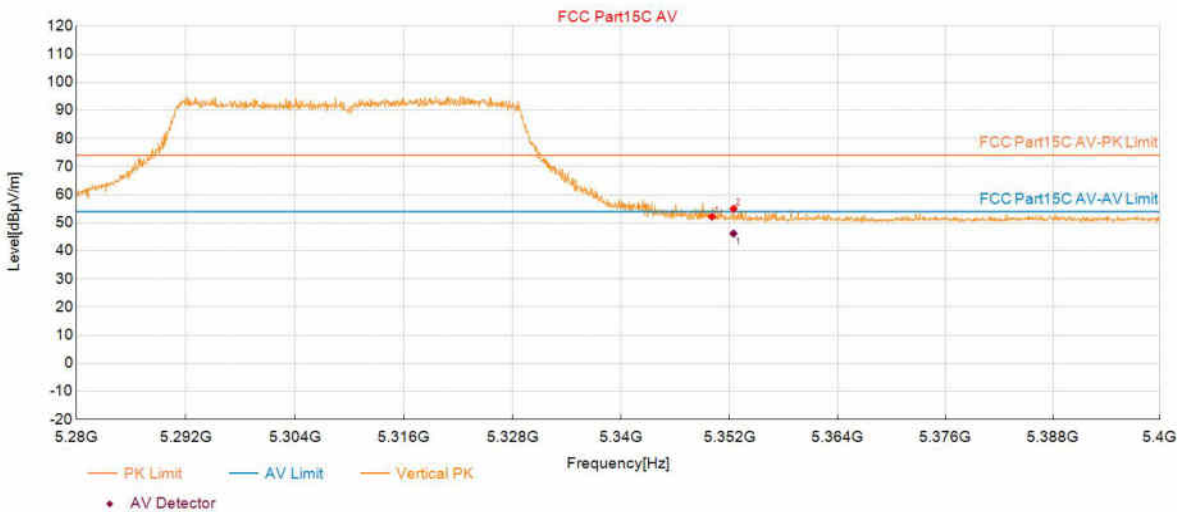

Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.0550	52.15	18.34	74.00	21.85	150	4	Vertical
2	5352.4562	54.97	18.35	74.00	19.03	150	1	Vertical


PK Final Data List						
NO.	Frequency (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Polarity
1	5352.4562	46.15	54.00	7.85	150	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX40_5510	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:44:55

Test Graph

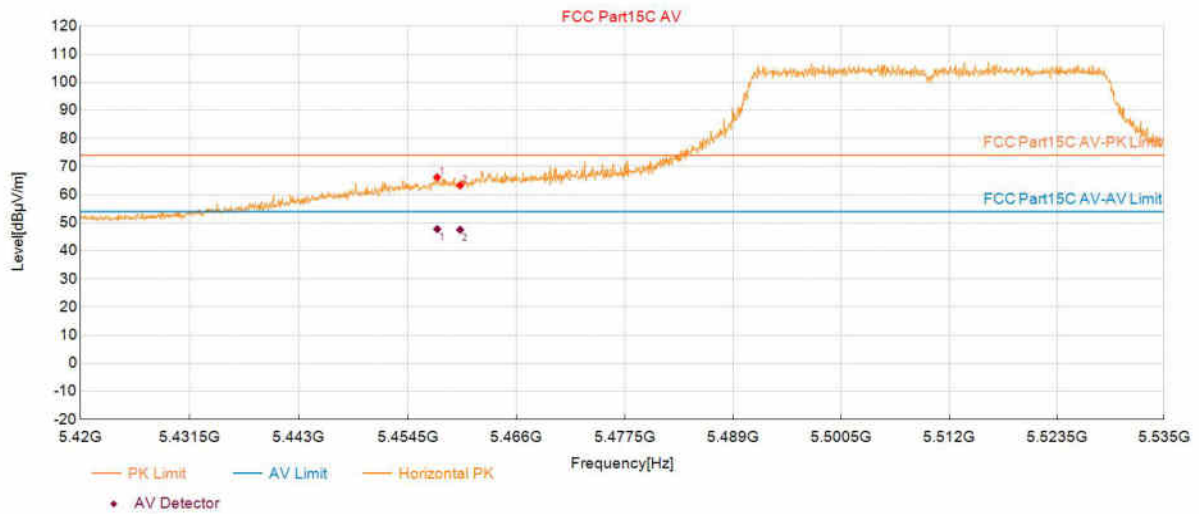

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.6238	66.19	18.72	74.00	7.81	150	278	Horizontal
2	5460.0400	63.28	18.72	74.00	10.72	150	91	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.6238	47.74	54.00	6.26	150	278	Horizontal
2	5460.0400	47.49	54.00	6.51	150	91	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX40_5510	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:45:38

Test Graph

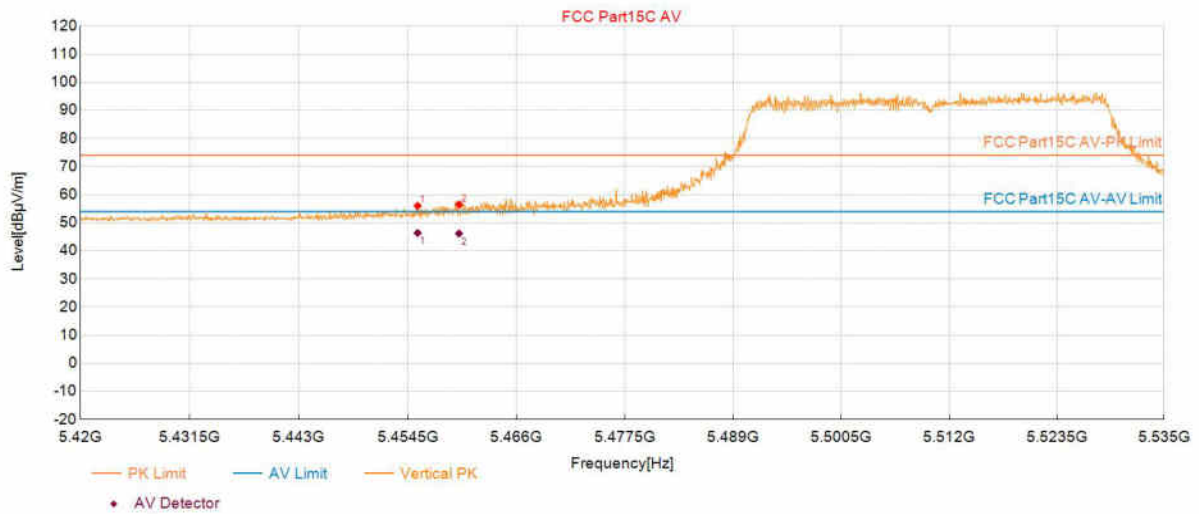

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5455.5528	56.03	18.72	74.00	17.97	150	190	Vertical
2	5459.9250	56.52	18.72	74.00	17.48	150	182	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5455.5528	46.35	54.00	7.65	150	190	Vertical
2	5459.9250	46.16	54.00	7.84	150	182	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX40_5670	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:48:40

Test Graph

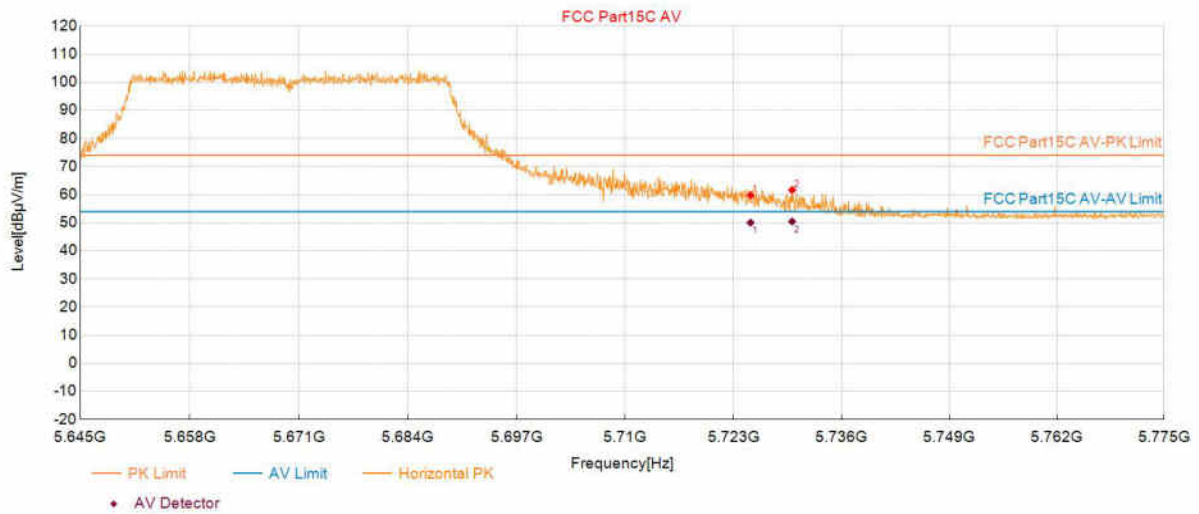

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0550	59.79	19.93	74.00	14.21	150	283	Horizontal
2	5730.0625	61.65	19.95	74.00	12.35	150	87	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0550	50.04	54.00	3.96	150	283	Horizontal
2	5730.0625	50.45	54.00	3.55	150	87	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX40_5670	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:49:23

Test Graph

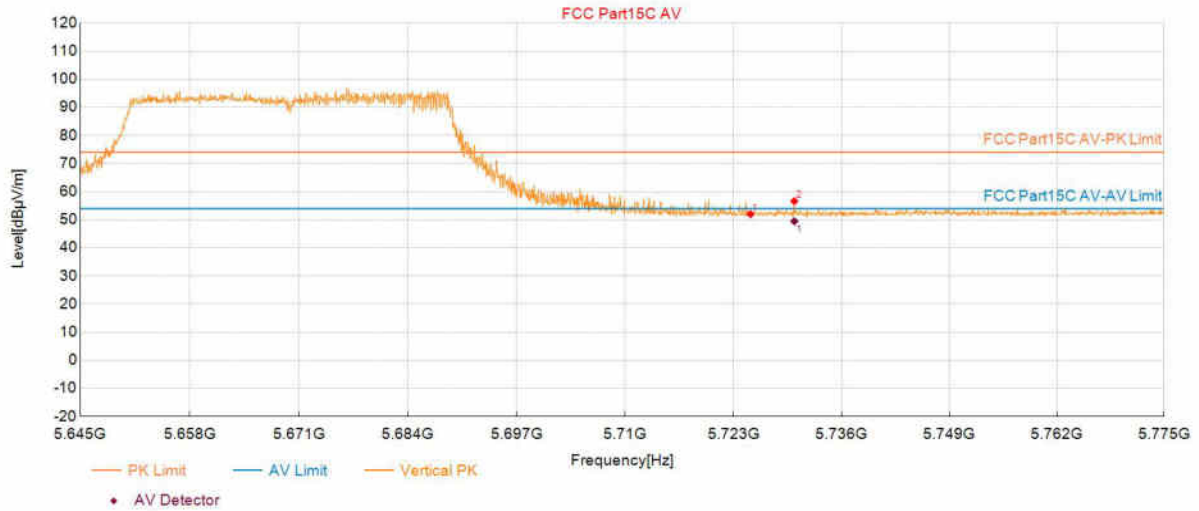

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0550	51.97	19.93	74.00	22.03	150	357	Vertical
2	5730.3227	56.62	19.95	74.00	17.38	150	182	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5730.3227	49.46	54.00	4.54	150	182	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX80_5210	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:52:58

Test Graph

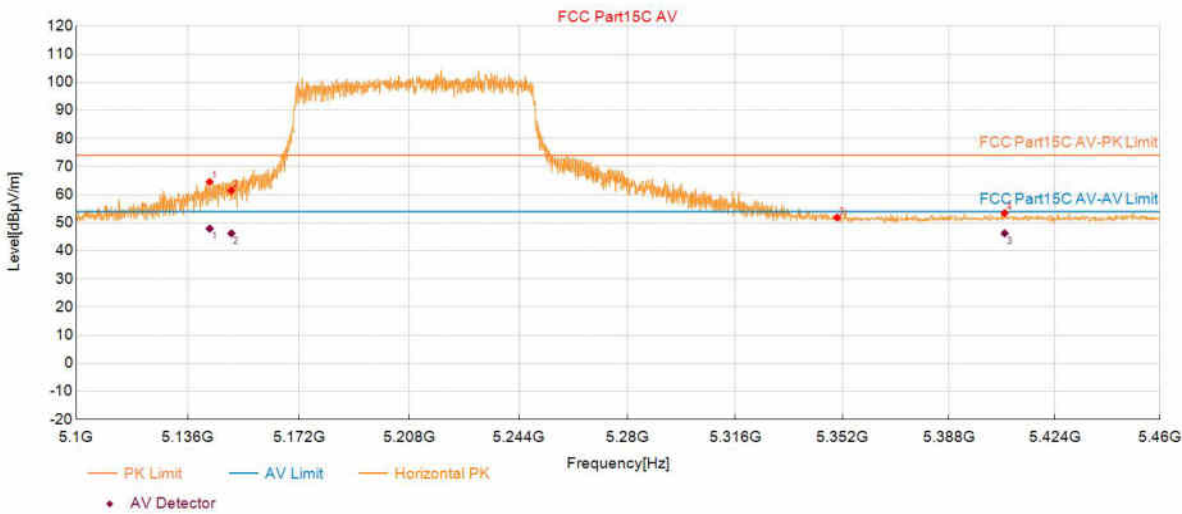

Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5143.0415	64.54	17.80	74.00	9.46	150	294	Horizontal
2	5150.0650	61.48	17.79	74.00	12.52	150	309	Horizontal
3	5350.1451	51.83	18.34	74.00	22.17	150	277	Horizontal
4	5406.8734	53.42	18.64	74.00	20.58	150	299	Horizontal


PK Final Data List							
NO.	Frequency (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5143.0415	47.91	54.00	6.09	150	294	Horizontal
2	5150.0650	46.20	54.00	7.80	150	309	Horizontal
3	5406.8734	46.24	54.00	7.76	150	299	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX80_5210	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:53:40

Test Graph

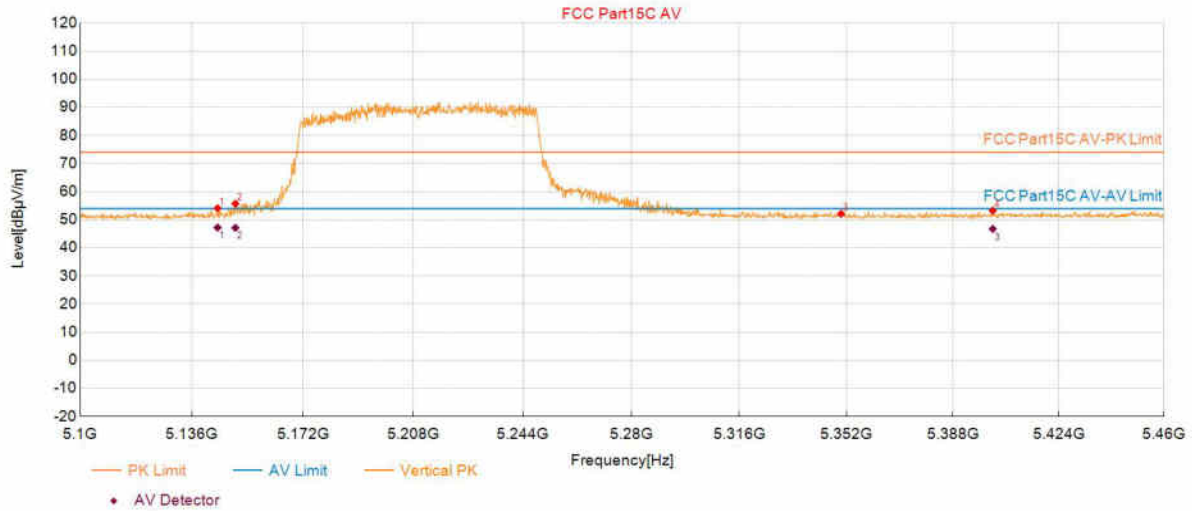

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5144.3022	54.08	17.80	74.00	19.92	150	185	Vertical
2	5150.0650	55.71	17.79	74.00	18.29	150	0	Vertical
3	5350.1451	52.11	18.34	74.00	21.89	150	2	Vertical
4	5401.4707	53.26	18.63	74.00	20.74	150	5	Vertical

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5144.3022	47.21	54.00	6.79	150	185	Vertical
2	5150.0650	47.12	54.00	6.88	150	0	Vertical
3	5401.4707	46.73	54.00	7.27	150	5	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX80_5290	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:59:07

Test Graph

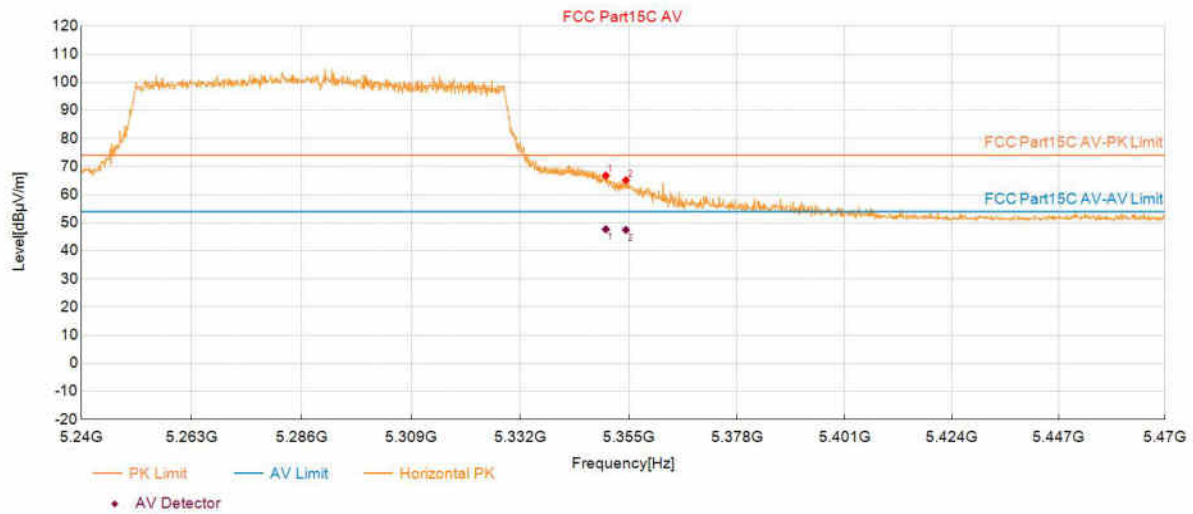

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.1101	66.82	18.34	74.00	7.18	150	292	Horizontal
2	5354.3672	65.15	18.36	74.00	8.85	150	292	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.1101	47.68	54.00	6.32	150	292	Horizontal
2	5354.3672	47.45	54.00	6.55	150	292	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX80_5290	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 19:59:50

Test Graph

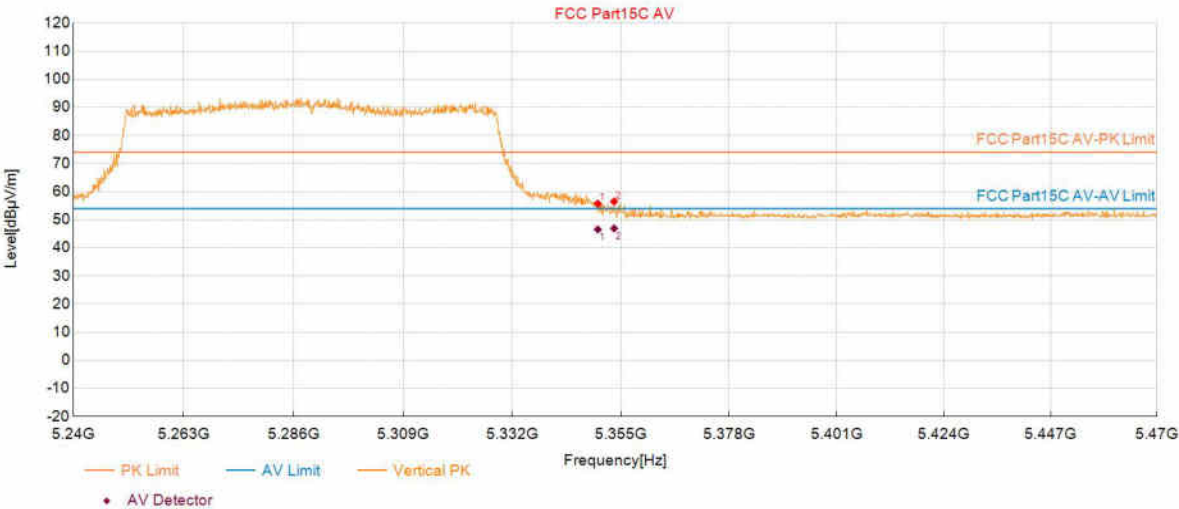

Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.1101	55.70	18.34	74.00	18.30	150	2	Vertical
2	5353.5618	56.50	18.35	74.00	17.50	150	181	Vertical


PK Final Data List							
NO.	Frequency (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5350.1101	46.53	54.00	7.47	150	2	Vertical
2	5353.5618	46.89	54.00	7.11	150	181	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX80_5530	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 20:02:39

Test Graph

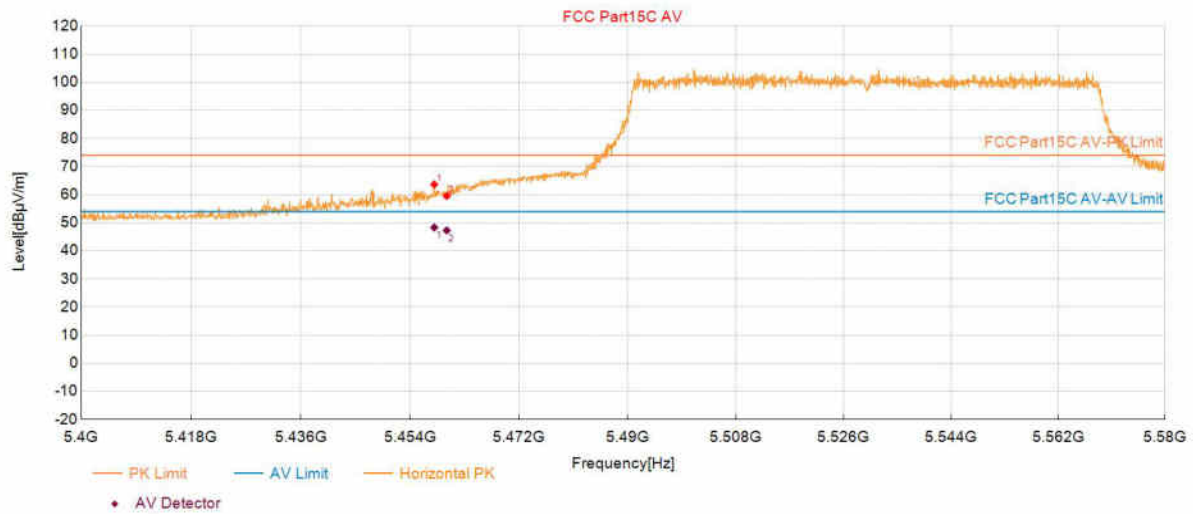

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.9890	63.61	18.72	74.00	10.39	150	276	Horizontal
2	5460.0600	59.52	18.72	74.00	14.48	150	85	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.9890	48.32	54.00	5.68	150	276	Horizontal
2	5460.0600	47.27	54.00	6.73	150	85	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX80_5530	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 20:03:21

Test Graph

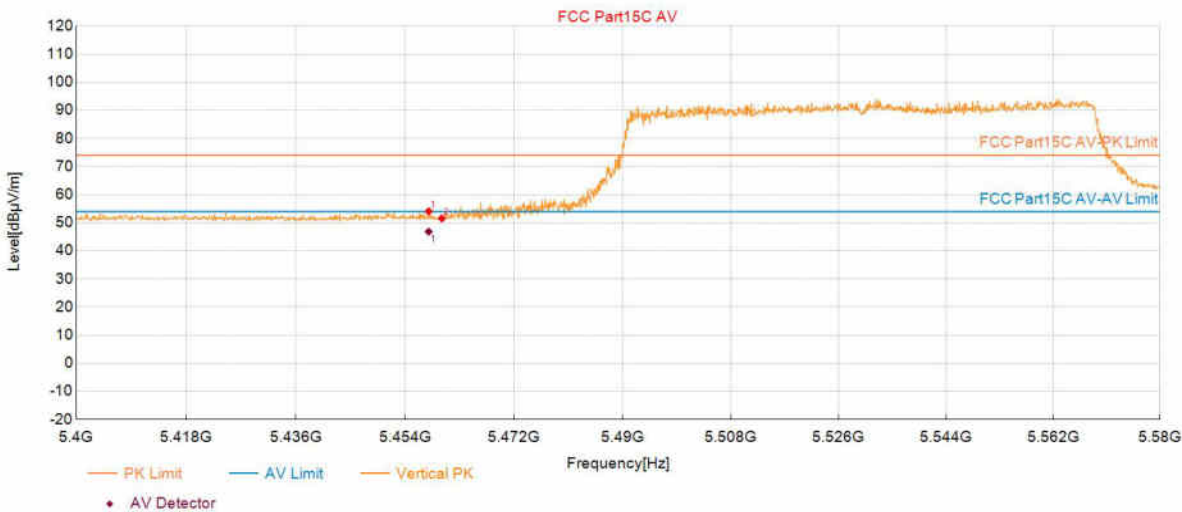

Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.8990	54.05	18.72	74.00	19.95	150	181	Vertical
2	5460.0600	51.54	18.72	74.00	22.46	150	48	Vertical


PK Final Data List							
NO.	Frequency (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5457.8990	46.83	54.00	7.17	150	181	Vertical

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX80_5610	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 20:06:12

Test Graph

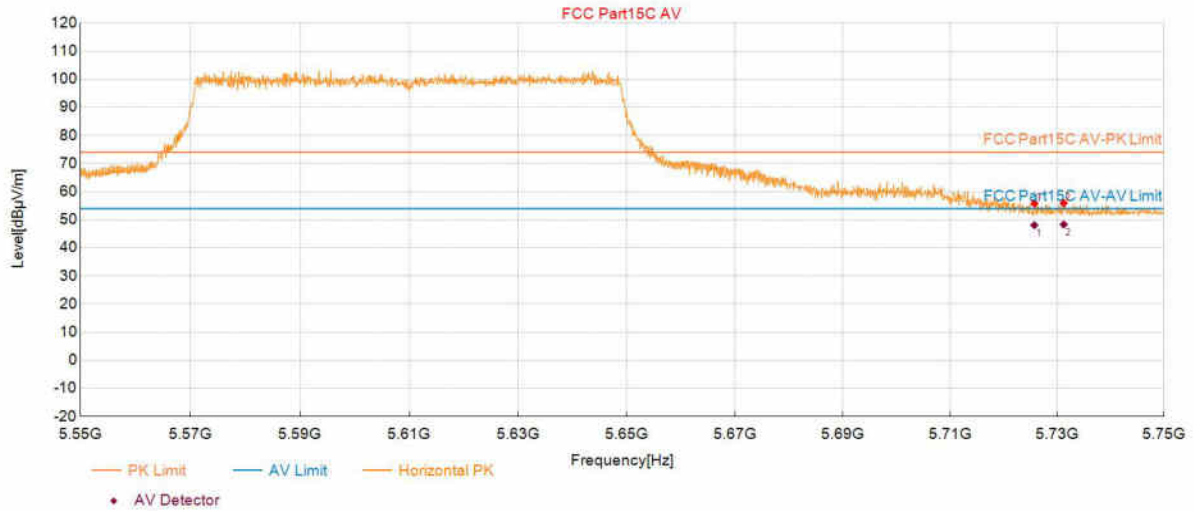

Suspected Data List

NO.	Frequency (MHz)	Level (dBμV/m)	Factor (dB)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.6878	55.82	19.93	74.00	18.18	150	87	Horizontal
2	5731.1906	55.91	19.96	74.00	18.09	150	95	Horizontal

PK Final Data List


NO.	Frequency (MHz)	AV Value (dBμV/m)	AV Limit (dBμV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.6878	48.06	54.00	5.94	150	87	Horizontal
2	5731.1906	48.32	54.00	5.68	150	95	Horizontal

Test Report

Project Information			
Customer:			
EUT:	GX-V4 Plus BT/BLE/WiFi 6 Radio Module		
Model:	SKI.WB800D80U.5	SN:	
Mode:	11AX80_5610	Voltage:	5V 1A
Environment:	Temp: 25℃; Humi:60%	Engineer:	Soho Liu
Remark:	Power Set:2 2 0 15		
Test Standard: FCC Part15C AV			

Start of Test:2025-02-08 20:06:54

Test Graph

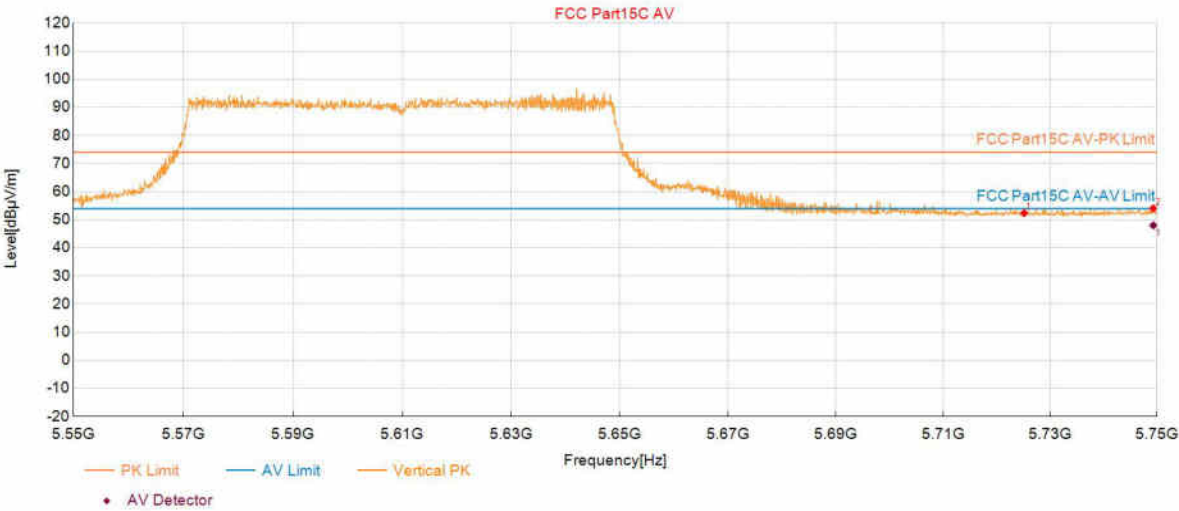

Suspected Data List								
NO.	Frequency (MHz)	Level (dBµV/m)	Factor (dB)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5725.0875	52.33	19.93	74.00	21.67	150	0	Vertical
2	5749.2997	54.03	20.05	74.00	19.97	150	150	Vertical

PK Final Data List							
NO.	Frequency (MHz)	AV Value (dBµV/m)	AV Limit (dBµV/m)	AV Margin (dB)	Height (cm)	Angle (°)	Polarity
1	5749.2997	48.00	54.00	6.00	150	150	Vertical


Conducted Emission Measurement

File :SRSMUSNCWIFI01

Data :#3

Date: 2025/2/26

Time: 20:50:58

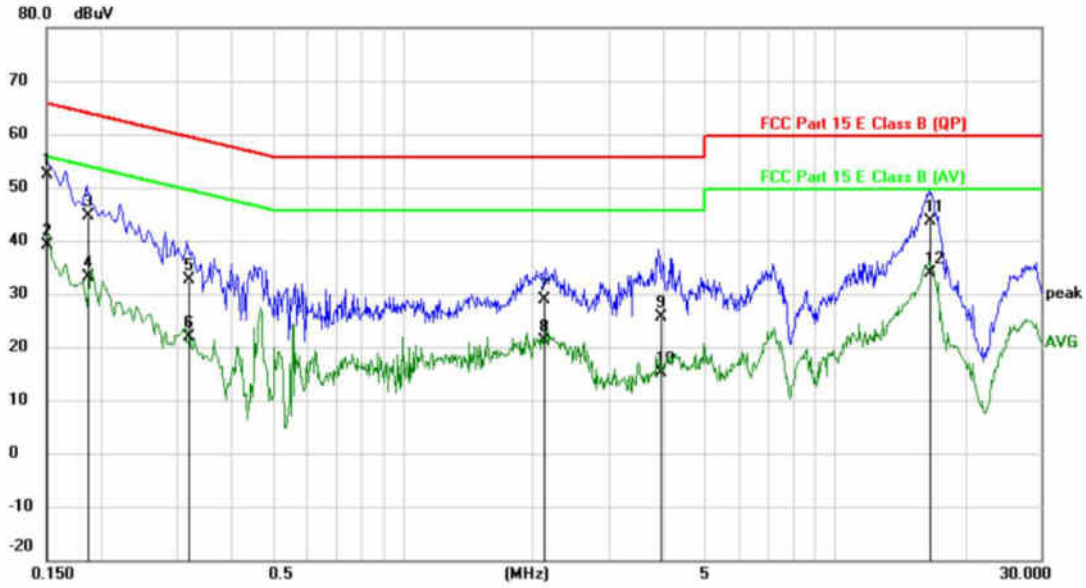

Site

Phase:

N

Temperature:

26

Limit: FCC Part 15 E Class B (QP)

Power: AC 120V/60Hz

Humidity:

60 %

EUT: GX-V4 Plus BT/BLE/WiFi 6 Radio Module

M/N: SKI.WB800D80U.5

Mode: 5G WIFI

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over		
		MHz	Level	Factor	ment			Detector	Comment
			dBuV	dB	dBuV	dBuV	dB		
1	*	0.1507	42.75	9.53	52.28	65.96	-13.68	QP	
2		0.1507	29.52	9.53	39.05	55.96	-16.91	AVG	
3		0.1865	35.06	9.54	44.60	64.19	-19.59	QP	
4		0.1865	23.47	9.54	33.01	54.19	-21.18	AVG	
5		0.3192	23.15	9.57	32.72	59.73	-27.01	QP	
6		0.3192	12.26	9.57	21.83	49.73	-27.90	AVG	
7		2.1111	19.23	9.66	28.89	56.00	-27.11	QP	
8		2.1111	11.37	9.66	21.03	46.00	-24.97	AVG	
9		3.9462	15.91	9.74	25.65	56.00	-30.35	QP	
10		3.9462	5.40	9.74	15.14	46.00	-30.86	AVG	
11		16.5611	33.55	10.12	43.67	60.00	-16.33	QP	
12		16.5611	23.68	10.12	33.80	50.00	-16.20	AVG	

END OF REPORT