

TEST REPORT FROM RFI GLOBAL SERVICES LTD

Test of: GN Otometrics A/S
SPEECHLINK 100 (Transceiver)

To: FCC Part 15.247: 2004 (Subpart C)

Test Report Serial No:
RFI\MPTE2\RP47584JD04A

Supersedes Test Report Serial No:
RFI\MPTE1\RP47584JD04A

**This Test Report Is Issued Under The Authority
Of Andrew Brown, Operations Manager:**




Tested By: Fara Razally



pp

Checked By: Steven Wong



Report Copy No: PDF01

Issue Date: 25 July 2006

Test Dates: 26 October 2005 to 24 January 2006

The *Bluetooth*® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by RFI Global Services Ltd. is under license. Other trademarks and trade names are those of their respective owners.

This report is issued in Adobe Acrobat portable document format (PDF). It is only a valid copy of the report if it is being viewed in PDF format with the following security options not allowed: Changing the document, Selecting text and graphics, Adding or changing notes and form fields.

This report may be copied in full. The results in this report apply only to the sample(s) tested.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

This page has been left intentionally blank.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

Table of Contents

1. Client Information	4
2. Equipment Under Test (EUT)	5
3. Test Results.....	7
4. Deviations from the Test Specification.....	8
5. Operation of the EUT during Testing	9
6. Summary of Test Results.....	10
7. Measurements, Examinations and Derived Results	11
8. Measurement Uncertainty	40
9. Measurement Methods	41
Appendix 1. Test Equipment Used	50
Appendix 2. Test Configuration Drawings.....	52

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

1. Client Information

Company Name:	GN Otometrics A/S
Address:	Dybendalsvaenget 2 PO Box 119 Taastrup Denmark DK-2630
Contact Name:	Mr P. Thomsen

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

2. Equipment Under Test (EUT)

The following information (with the exception of the Date of Receipt) has been supplied by the client:

2.1. Identification of Equipment Under Test (EUT)

Brand Name:	GN Otometrics
Model Name or Number:	SPEECHLINK 100
Unique Type Identification:	Type 1053
Serial Number:	P10
Hardware Version:	1.0
Software Version:	1.0
FCC ID Number:	QCN-1053
Country of Manufacture:	Denmark
Date of Receipt:	06 October 2005

2.2. Description of EUT

The equipment under test is a medical *Bluetooth* device that provides a wireless link for transfer of data to/from a PC. SPEECHLINK 100 is used to improve the process of hearing instrument fitting.

2.3. Modifications Incorporated in EUT

During the course of testing the EUT was not modified.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

2.4. Additional Information Related to Testing

Power Supply Requirement:	Internal battery supply of 1.2V		
Intended Operating Environment:	Within <i>Bluetooth Coverage</i> .		
Equipment Category:	Short Range (Low Power)		
Type of Unit:	Portable (Standalone battery powered device)		
Transmit Frequency Range:	2402 MHz to 2480 MHz		
Transmit Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	1	2402
	Middle	40	2441
	Top	79	2480
Receive Frequency Range:	2402 MHz to 2480 MHz		
Receive Channels Tested:	Channel ID	Channel Number	Channel Frequency (MHz)
	Bottom	1	2402
	Middle	40	2441
	Top	79	2480
Maximum Power Output (ERP)	-5.3 dBm EIRP		

2.5. Port Identification

Port	Description
1	AC Charger Port
2	Optical Port

2.6. Support Equipment

No support equipment was used to exercise the EUT during testing.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

3. Test Results

Reference:	FCC Part 15.247: 2004 Subpart C
Title:	Code of Federal Regulations, Part 15.247 (47CFR22) (Intentional Radiators operating within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz)

3.1. Methods and Procedures

The methods and procedures used were as detailed in:

ANSI/TIA-603-B-2003

Land Mobile Communications Equipment, Measurements and performance Standards

ANSI C63.2 (1987)

Title: American National Standard for Instrumentation - Electromagnetic noise and field strength.

ANSI C63.4 (2003)

Title: American National Standard Methods of Measurement of Electromagnetic Emissions from Low Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

ANSI C63.5 (1988)

Title: American National Standard for the Calibration of antennas used for Radiated Emission measurements in Electromagnetic Interference (EMI) control.

ANSI C63.7 (1988)

Title: American National Standard Guide for Construction of Open Area Test Sites for performing Radiated Emission Measurements.

CISPR 16-1: (1999)

Title: Specification For Radio Disturbance and Immunity Measuring Apparatus and Methods. Part 1: Radio Disturbance and Immunity Measuring Apparatus.

DA00-705 (2000)

Title: Filing and Frequency Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

3.2. Definition of Measurement Equipment

The measurement equipment used complied with the requirements of the standards referenced in the methods & procedures section above. Appendix 1 contains a list of the test equipment used.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

4. Deviations from the Test Specification

None.

Test of: GN Otometrics A/S
SPEECHLINK 100 (Transceiver)
To: FCC Part 15.247: 2004 (Subpart C)

5. Operation of the EUT during Testing

5.1. Operating Modes

The EUT was tested in the following operating modes, unless otherwise stated.

For all transmit mode measurements the *Bluetooth* test mode was active and set to transmit on top, middle, bottom and hopping on all channels as necessary with the longest data packet size.

Receive mode measurements were performed with the EUT in *Bluetooth* mode and in its normal search mode.

5.2. Configuration and Peripherals

The EUT was tested in the following configuration:

AC mains conducted emissions was performed with EUT configured with the battery charger connected and power via the 110VAC mains supply. All other testing was performed with EUT as standalone.

(Note: the two optical ports were left unconnected during testing, as these are not electrical ports and have no electrical elements. Therefore, it would not effect the measurements).

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

6. Summary of Test Results

Range of Measurements	Specification Reference	Port Type	Compliance Status
Idle Mode AC Conducted Emissions (150 kHz to 30 MHz)	C.F.R. 47 FCC Part 15: 2004 Section 15.107	AC Mains	Complied
Idle Mode Radiated Spurious Emissions	C.F.R. 47 FCC Part 15: 2004 Section 15.109	Antenna	Complied
Transmitter AC Conducted Emissions (150 kHz to 30 MHz)	C.F.R. 47 FCC Part 15: 2004 Section 15.207	AC Mains	Complied
Transmitter 20 dB Bandwidth	C.F.R. 47 FCC Part 15: 2004 Section 15.247(a)(1)	Antenna	Complied
Transmitter Carrier Frequency Separation	C.F.R. 47 FCC Part 15: 2004 Section 15.247(a)(1)	Antenna	Complied
Transmitter Average Time of Occupancy	C.F.R. 47 FCC Part 15: 2004 Section 15.247(a)(1)(iii)	Antenna	Complied
Transmitter Maximum Peak Output Power	C.F.R. 47 FCC Part 15: 2004 Section 15.247(b)(1)	Antenna	Complied
Transmitter Radiated Emissions	C.F.R. 47 FCC Part 15: 2004 Sections 15.247(d) & 15.209(a)	Antenna	Complied
Transmitter Band Edge Radiated Emissions	C.F.R. 47 FCC Part 15: 2004 Sections 15.247(d) & 15.209(a)	Antenna	Complied

6.1. Location of Tests

All the measurements described in this report were performed at the premises of RFI Global Services Ltd, Ewhurst Park, Ramsdell, Basingstoke, Hampshire, RG26 5RQ, England.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

7. Measurements, Examinations and Derived Results

7.1. General Comments

This section contains test results only.

Measurement uncertainties are evaluated in accordance with current best practice. Our reported expanded uncertainties are based on standard uncertainties, which are multiplied by an appropriate coverage factor to provide a statistical confidence level of approximately 95%. Please refer to section 8 for details of measurement uncertainties.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

7.2. Test Results

7.2.1. Idle Mode AC Conducted Spurious Emissions: Section 15.107

The EUT was configured as for ac conducted emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum emission levels present on the ac mains line of the EUT.

Results:

Quasi-Peak Detector Measurements on Live and Neutral Lines


Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.19463	Neutral	47.98	63.84	15.86	Complied
0.25888	Neutral	43.96	61.47	17.51	Complied
0.59535	Neutral	41.27	56.00	14.73	Complied
0.65320	Neutral	41.10	56.00	14.90	Complied
0.76634	Live	39.06	56.00	16.94	Complied
2.41926	Live	27.47	56.00	26.53	Complied

Average Detector Measurements on Live and Neutral Lines

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.19463	Neutral	38.10	53.84	15.74	Complied
0.25888	Neutral	36.85	51.47	14.62	Complied
0.59535	Neutral	32.66	46.00	13.34	Complied
0.65320	Neutral	33.22	46.00	12.78	Complied
0.76634	Live	27.36	46.00	18.64	Complied
2.41926	Live	19.08	46.00	26.92	Complied

Test of: GN Otometrics A/S
SPEECHLINK 100 (Transceiver)
To: FCC Part 15.247: 2004 (Subpart C)

Idle Mode AC Conducted Spurious Emissions: Section 15.107 (Continued)

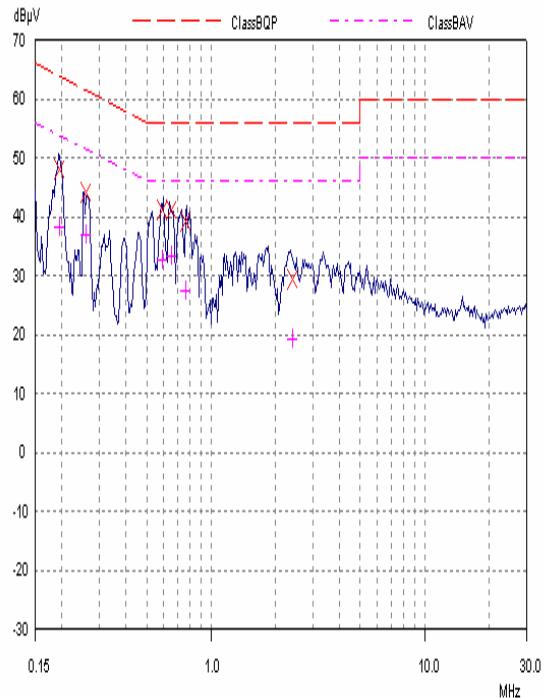

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: GN Otometrics A/S
SPEECHLINK 100 (Transceiver)
To: FCC Part 15.247: 2004 (Subpart C)

7.2.2. Idle Mode Radiated Spurious Emissions: Section 15.109 - Electric Field Strength Measurements (Frequency Range: 30 to 1000 MHz)

The EUT was configured as for radiated emission testing as described in section 9 of this report.


Tests were performed to identify the maximum receiver or standby radiated emission levels.

Results:

Frequency (MHz)	Antenna Polarity	Q-P Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
109.800	Vertical	12.5	43.5	31.0	Complied
182.990	Horizontal	22.7	43.5	20.8	Complied
210.374	Horizontal	31.0	43.5	12.5	Complied
235.134	Horizontal	36.9	46.0	9.1	Complied
329.405	Horizontal	23.3	46.0	22.7	Complied
439.149	Vertical	36.6	46.0	9.4	Complied
585.427	Horizontal	41.7	46.0	4.3	Complied
731.944	Horizontal	42.2	46.0	3.8	Complied
891.099	Horizontal	39.9	46.0	6.1	Complied

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

Idle Mode Radiated Spurious Emissions: Section 15.109 - Electric Field Strength
Measurements (Frequency Range: 30 to 1000 MHz) (Continued)

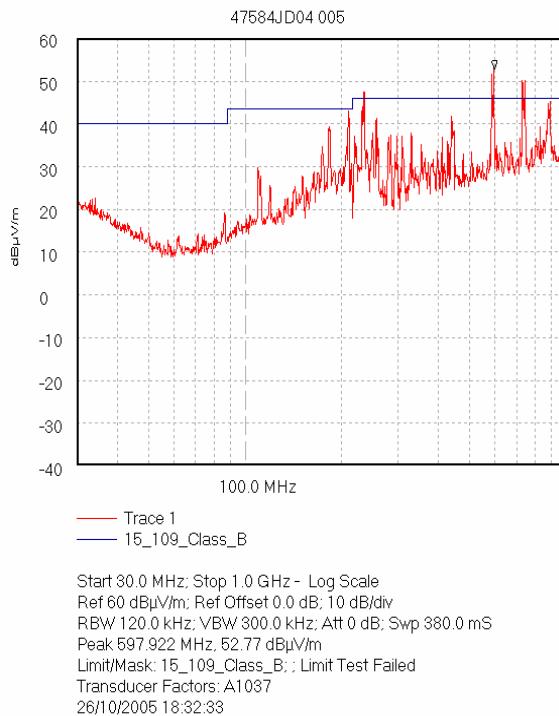

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: GN Otometrics A/S
 SPEECHLINK 100 (Transceiver)
 To: FCC Part 15.247: 2004 (Subpart C)

7.2.3. Idle Mode Radiated Spurious Emissions: Section 15.109 - Electric Field Strength Measurements (Frequency Range: 1 to 12.5 GHz)

Results:

Highest Peak Level:

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1039.244	Vertical	32.7	22.0	54.7	74.0	19.3	Complied

Highest Average Level:


Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1039.244	Vertical	12.0	22.0	34.0	54.0	20.0	Complied

Note(s):


1. *The transducer factor incorporates the antenna factor and cable loss of the equipment used to perform the above measurements.*

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**


Idle Mode Radiated Spurious Emissions: Section 15.109 - Electric Field Strength Measurements (Frequency Range: 1 to 12.5 GHz) (Continued)

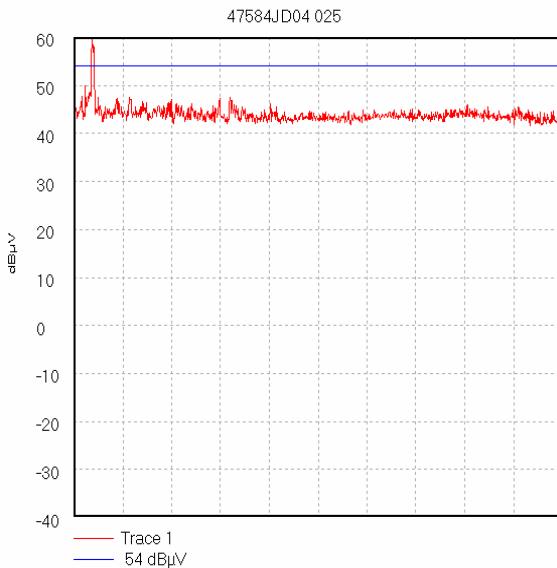


Start 1.0 GHz; Stop 2.0 GHz
Ref 60 dB μ V; Ref Offset 0.0 dB; 10 dB/div
RBW 1000.0 kHz; VBW 3.0 MHz; Att 0 dB; Swp 20.0 mS
Peak 1.037778 GHz, 59.65 dB μ V
Display Line: 54 dB μ V; ; Limit Test Failed
26/10/2005 19:42:44

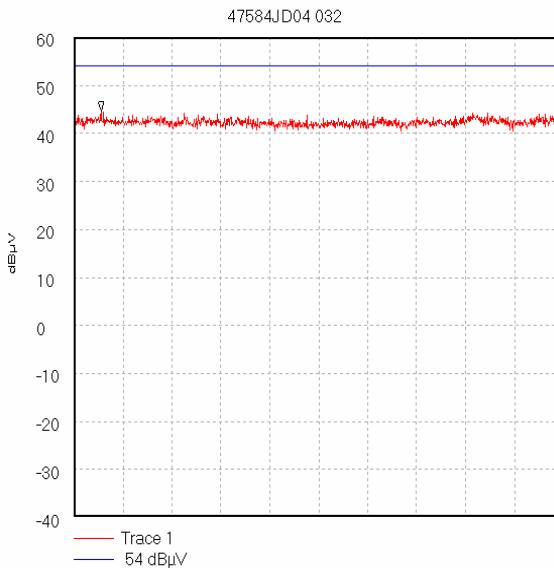

Start 2.0 GHz; Stop 4.0 GHz
Ref 60 dB μ V; Ref Offset 0.0 dB; 10 dB/div
RBW 1000.0 kHz; VBW 3.0 MHz; Att 0 dB; Swp 20.0 mS
Peak 2.111111 GHz, 44.74 dB μ V
Display Line: 54 dB μ V; ; Limit Test Passed
26/10/2005 19:55:17

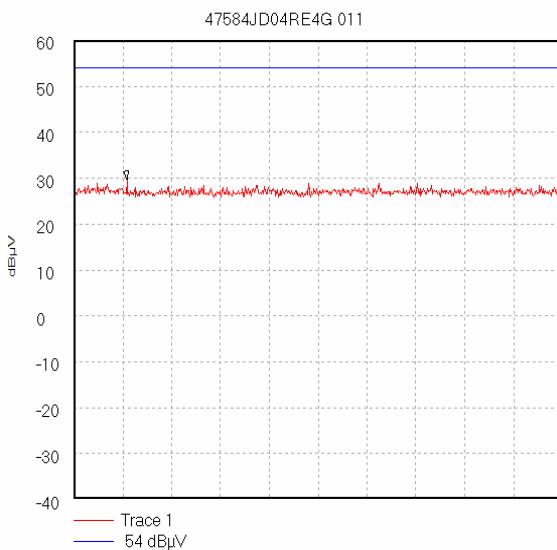

Start 4.0 GHz; Stop 6.0 GHz
Ref 60 dB μ V; Ref Offset 0.0 dB; 10 dB/div
RBW 1.0 MHz; VBW 3.0 MHz; Att 10 dB; Swp 50.0 mS
Peak 4.216667 GHz, 29.67 dB μ V
Display Line: 54 dB μ V;
Transducer Factors: 4G-6G_Horn(@1m,3m_cable,A1534)
01/11/2005 14:27:58

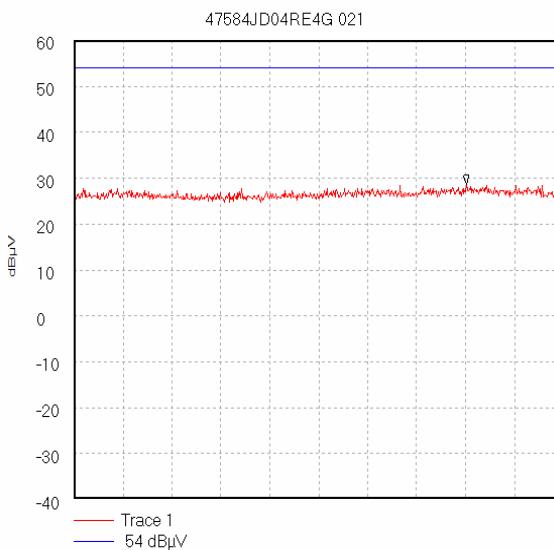


Start 6.0 GHz; Stop 8.0 GHz
Ref 60 dB μ V; Ref Offset 0.0 dB; 10 dB/div
RBW 1.0 MHz; VBW 3.0 MHz; Att 10 dB; Swp 50.0 mS
Peak 7.603333 GHz, 28.67 dB μ V
Display Line: 54 dB μ V;
Transducer Factors: 6G-8G_Horn(@0.7m,3m_cable,A1534)
01/11/2005 14:42:50

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

Idle Mode Radiated Spurious Emissions: Section 15.109 - Electric Field Strength Measurements (Frequency Range: 1 to 12.5 GHz) (Continued)

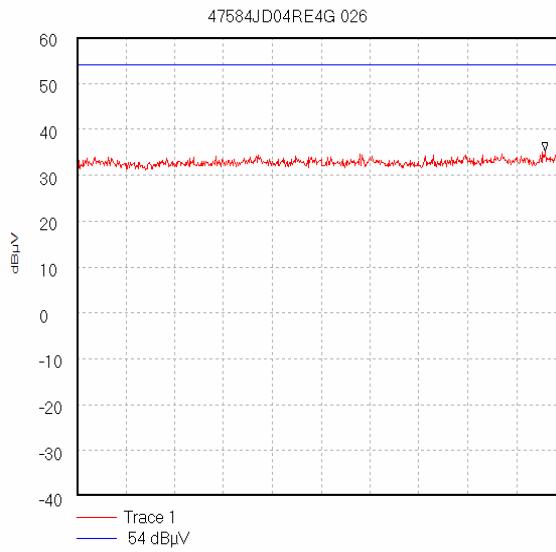

Start 8.0 GHz; Stop 12.5 GHz
Ref 60 dB μ V; Ref Offset 0.0 dB; 10 dB/div
RBW 1.0 MHz; VBW 3.0 MHz; Att 10 dB; Swp 90.0 mS
Peak 12.3125 GHz, 35.17 dB μ V
Display Line: 54 dB μ V;
Transducer Factors: 8G-12.5G_Horn(@1m,3m_cable,A1534)
01/11/2005 15:28:31

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

7.2.4. Transmitter AC Conducted Spurious Emissions: Section 15.207

The EUT was configured for ac conducted emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum emission levels present on the ac mains line of the EUT.

Results: Top Channel

Quasi-Peak Detector Measurements on Live and Neutral Lines


Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.18404	Neutral	44.52	64.30	19.78	Complied
0.20724	Neutral	44.17	63.32	19.15	Complied
0.25689	Neutral	44.50	61.53	17.03	Complied
0.66061	Neutral	40.44	56.00	15.56	Complied
0.77089	Live	40.54	56.00	15.46	Complied
1.81898	Live	32.06	56.00	23.94	Complied

Average Detector Measurements on Live and Neutral Lines

Frequency (MHz)	Line	Level (dB μ V)	Limit (dB μ V)	Margin (dB)	Result
0.18404	Neutral	35.41	54.30	18.89	Complied
0.20724	Neutral	36.65	53.32	16.67	Complied
0.25689	Neutral	36.42	51.53	15.11	Complied
0.66061	Neutral	31.50	46.00	14.50	Complied
0.77089	Live	30.40	46.00	15.60	Complied
1.81898	Live	20.55	46.00	25.45	Complied

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

Transmitter AC Conducted Spurious Emissions: Section 15.207 (Continued)

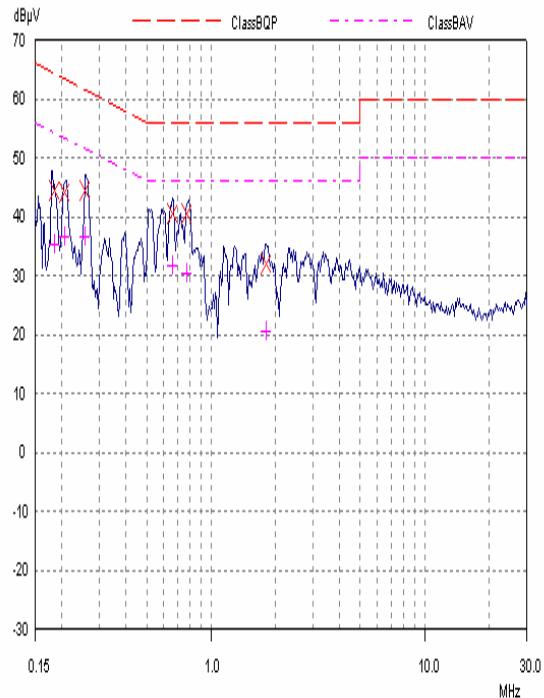

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.


Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

7.2.5. Transmitter 20 dB Bandwidth: Section 15.247(a)(1)

The EUT was configured for 20 dB bandwidth measurements as described in section 9 of this report. Tests were performed to identify the 20 dB bandwidth.

Results:

Transmitter 20 dB Bandwidth (kHz)	Limit (kHz)
883.768	None specified

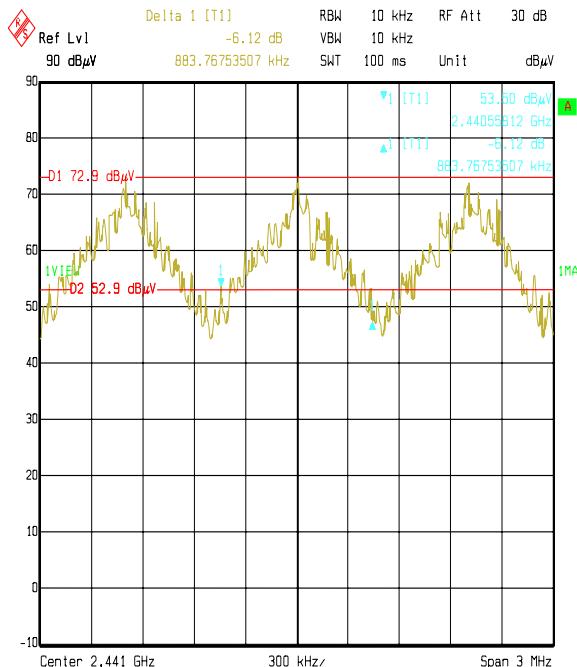

Title: 47584JD04 GN Otometrics EUT: SpeechLink 100
 Comment A: 20dB Bandwidth. Hopping on all channels.
 Date: 24.JAN.2006 15:51:06

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**


7.2.6. Transmitter Carrier Frequency Separation: Section 15.247(a)(1)

The EUT was configured for carrier frequency separation measurements as described in section 9 of this report.

Tests were performed to identify the carrier frequency separation.

Results:

Transmitter Carrier Frequency Separation (kHz)	Limit (> 20 dB BW) (kHz)	Margin (kHz)	Result
1022.044	883.768	138.276	Complied

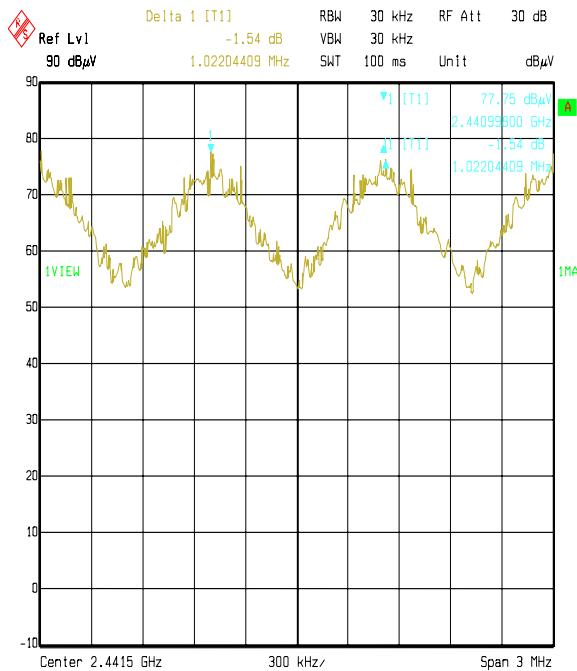

Title: 47584JD04 GN Otometrics EUT: SpeechLink 100
Comment A: Carrier Separation. Hopping on all channels.
Date: 24.JAN.2006 15:46:00

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

7.2.7. Transmitter Average Time of Occupancy: Section 15.247(a)(1)(iii)

The EUT was configured for average time of occupancy measurements as described in section 9 of this report.


Tests were performed to identify the average time of occupancy in number of channels (79) x 0.4 seconds. The calculated period is 31.6 seconds.

Results:


Emission Width (μs)	Number of Hops in 31.6 Seconds	Average Time of Occupancy (s)	Limit (s)	Margin (s)	Result
2955.914	80	0.236	0.4	0.164	Complied

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**


Transmitter Average Time of Occupancy: Section 15.247(a)(1)(iii) (Continued)

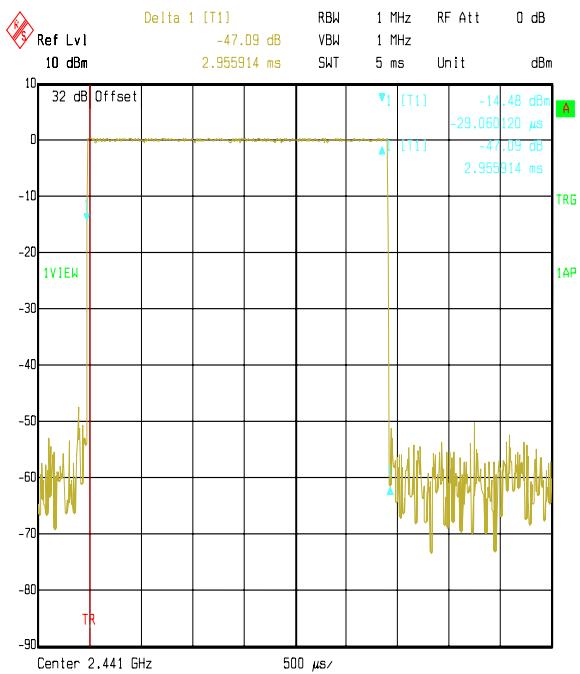

Title: 47584JD04 GN Otometrics EUT: SpeechLink 100
Comment A: Emission Width, Centre of Hopping Channel.
Date: 24.JAN.2006 16:03:07

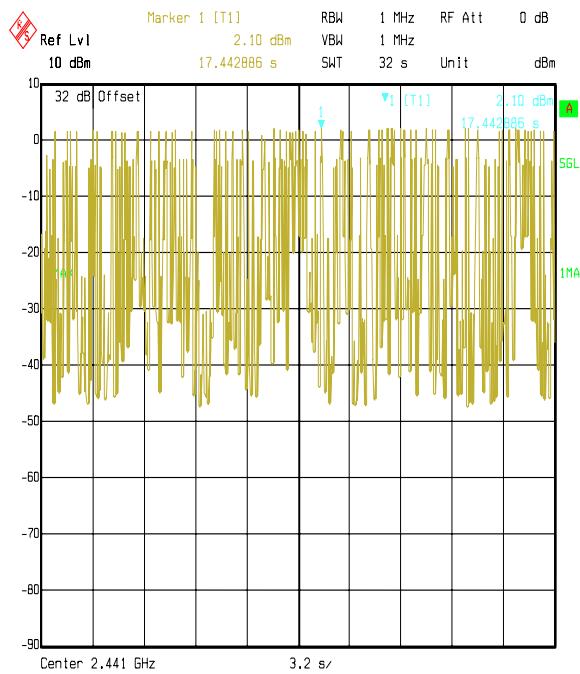

Title: 47584JD04 GN Otometrics EUT: SpeechLink 100
Comment A: 31.6s hops. Centre of Hopping Channel.
Date: 24.JAN.2006 16:08:06

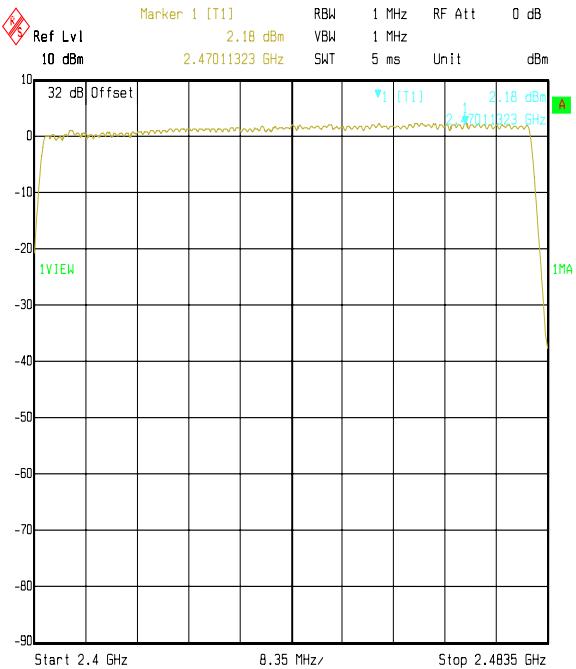

Title: 47584JD04 GN Otometrics EUT: SpeechLink 100
Comment A: No of Channels. Hopping on all channels.
Date: 24.JAN.2006 16:12:50

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

7.2.8. Transmitter Maximum Peak Output Power: (EIRP) Section 15.247(b)(1)

The EUT was configured for transmitter peak output power measurements as described in Section 9 of this report.

Tests were performed to identify the transmitter maximum peak output power (EIRP) of the EUT.

Results:**Battery Powered Devices**


Channel	EIRP (dBm)	Limit (dBm)	Margin (dB)	Result
Bottom	-5.3	30.0	35.3	Complied
Middle	-5.6	30.0	35.6	Complied
Top	-6.0	30.0	36.0	Complied

Note(s):


1. *These tests were performed radiated; therefore the EUT antenna gain is encompassed in the final result and not measurable.*

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**


Transmitter Maximum Peak Output Power: (EIRP) Section 15.247(b)(1) (Continued)

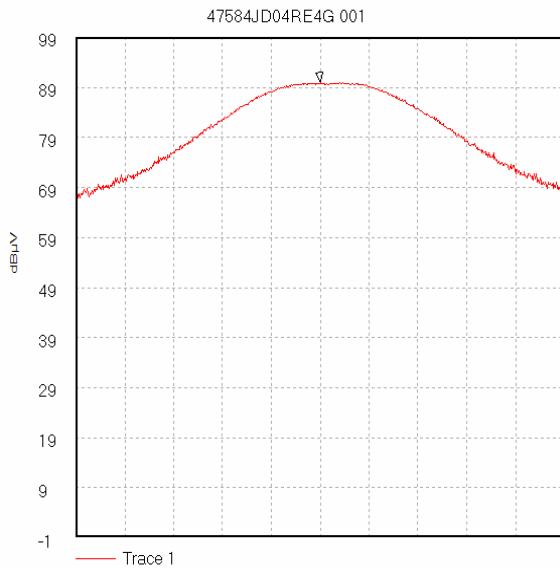

Start 2.3995 GHz; Stop 2.4045 GHz
Ref 99 dB μ V; Ref Offset 2.0 dB; 10 dB/div
RBW 1.0 MHz; VBW 3.0 MHz; Att 10 dB; Swp 50.0 mS
Peak 2.402 GHz, 90.0 dB μ V
Transducer Factors: A031_2to4
01/11/2005 12:11:56

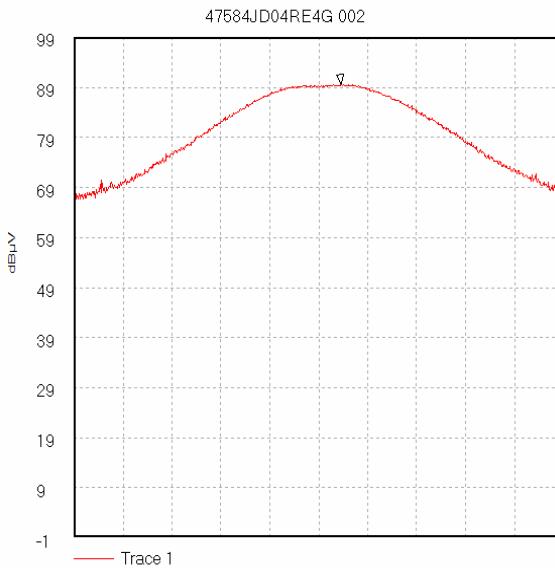

Start 2.4385 GHz; Stop 2.4435 GHz
Ref 99 dB μ V; Ref Offset 2.0 dB; 10 dB/div
RBW 1.0 MHz; VBW 3.0 MHz; Att 10 dB; Swp 50.0 mS
Peak 2.441225 GHz, 89.67 dB μ V
Transducer Factors: A031_2to4
01/11/2005 12:16:17

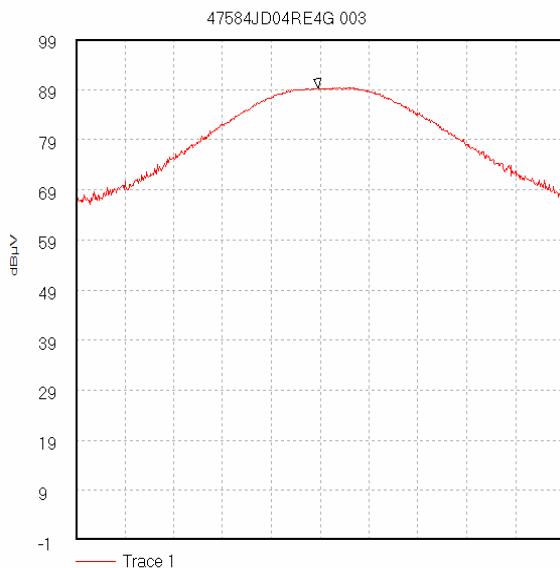

Start 2.4775 GHz; Stop 2.4825 GHz
Ref 99 dB μ V; Ref Offset 2.0 dB; 10 dB/div
RBW 1.0 MHz; VBW 3.0 MHz; Att 10 dB; Swp 50.0 mS
Peak 2.479975 GHz, 89.33 dB μ V
Transducer Factors: A031_2to4
01/11/2005 12:18:33

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: GN Otometrics A/S
SPEECHLINK 100 (Transceiver)
To: FCC Part 15.247: 2004 (Subpart C)

7.2.9. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) - Electric Field Strength Measurements: 30 to 1000 MHz (emissions occurring in the restricted bands)

The EUT was configured for radiated emission testing as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

Results:

Top Channel

Frequency (MHz)	Antenna Polarity	Q-P Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
109.800	Vertical	12.5	43.5	31.0	Complied
256.207	Horizontal	32.9	46.0	13.1	Complied
329.405	Horizontal	23.3	46.0	22.7	Complied

Note(s):

1. *The preliminary scans showed similar emission levels for each mode below 1 GHz, therefore final radiated emissions measurements were performed with the EUT set to the top channel only.*

Test of: GN Otometrics A/S
SPEECHLINK 100 (Transceiver)
To: FCC Part 15.247: 2004 (Subpart C)

7.2.10. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) - Electric Field Strength Measurements: 30 to 1000 MHz (emissions outside the restricted bands)

The EUT was configured for radiated emission testing as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

Results:

Top Channel


Frequency (MHz)	Antenna Polarity	Peak Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Result
585.427	Horizontal	41.7	69.5	27.8	Complied
731.944	Horizontal	42.2	69.5	27.3	Complied

Note(s):

1. *The preliminary scans showed similar emission levels for each mode below 1 GHz, therefore final radiated emissions measurements were performed with the EUT set to the top channel only.*

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) - Electric Field Strength
Measurements: 30 to 1000 MHz (emissions outside the restricted bands) (Continued)

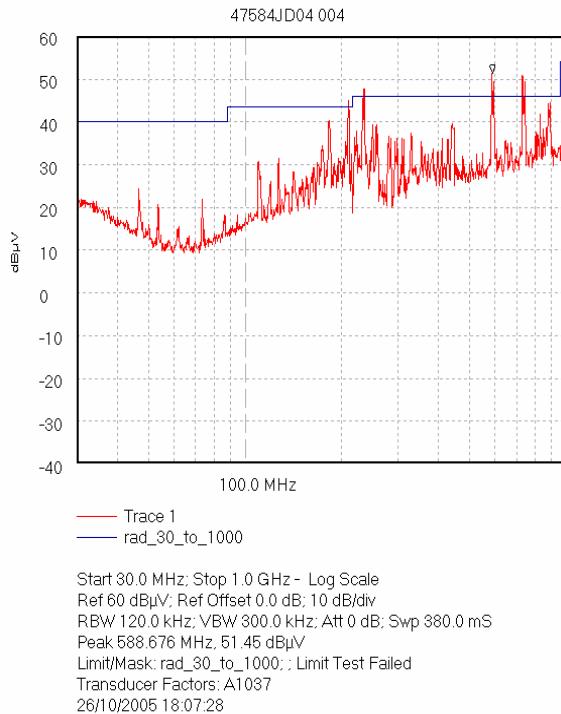

Note: This plot is a pre-scan and for indication purposes only. For final measurements, see accompanying tables.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

7.2.11. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) - Electric Field Strength Measurements (Frequency Range: 1 to 25.0 GHz) (emissions occurring in the restricted bands)

The EUT was configured for radiated emission testing as described in section 9 of this report. Tests were performed to identify the maximum transmitter radiated emission levels.

Results:

Highest Peak Level: Bottom Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1.039244	Vertical	32.7	22.0	54.7	74.0	19.3	Complied
1.334669	Vertical	25.1	22.1	47.2	74.0	26.8	Complied
4.803567	Horizontal	24.2	25.5	49.7	74.0	24.3	Complied

Highest Average Level: Bottom Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1.039244	Vertical	12.0	22.0	34.0	54.0	20.0	Complied
1.334669	Vertical	7.6	22.1	29.7	54.0	24.3	Complied
4.803567	Horizontal	16.5	25.5	42.0	54.0	12.0	Complied

Highest Peak Level: Middle Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1.039244	Vertical	32.7	22.0	54.7	74.0	19.3	Complied
1.334669	Vertical	25.1	22.1	47.2	74.0	26.8	Complied
4.881933	Horizontal	23.5	25.5	49.0	74.0	25.0	Complied
7.322669	Horizontal	10.0	28.5	38.5	74.0	35.5	Complied

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) - Electric Field Strength Measurements (Frequency Range: 1 to 25.0 GHz) (emissions occurring in the restricted bands) (Continued)

Highest Average Level: Middle Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1.039244	Vertical	12.0	22.0	34.0	54.0	20.0	Complied
1.334669	Vertical	7.6	22.1	29.7	54.0	24.3	Complied
4.881933	Horizontal	14.3	25.5	39.8	54.0	14.2	Complied
7.322669	Horizontal	1.7	28.5	30.2	54.0	23.8	Complied

Highest Peak Level: Top Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1.039244	Vertical	32.7	22.0	54.7	74.0	19.3	Complied
1.334669	Vertical	25.1	22.1	47.2	74.0	26.8	Complied
4.959725	Horizontal	24.8	25.5	50.3	74.0	23.7	Complied
7.439608	Horizontal	11.0	28.5	39.5	74.0	34.5	Complied

Highest Average Level: Top Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1.039244	Vertical	12.0	22.0	34.0	54.0	20.0	Complied
0.334669	Vertical	7.6	22.1	29.7	54.0	24.3	Complied
4.959725	Horizontal	17.0	25.5	42.5	54.0	11.5	Complied
7.439608	Horizontal	2.7	28.5	31.2	54.0	22.8	Complied

Highest Peak Level: Hopping Mode

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1.039244	Vertical	32.7	22.0	54.7	74.0	19.3	Complied
1.334669	Vertical	25.1	22.1	47.2	74.0	26.8	Complied
4.955775	Horizontal	24.7	25.5	50.2	74.0	23.8	Complied

Test of: GN Otometrics A/S
SPEECHLINK 100 (Transceiver)
To: FCC Part 15.247: 2004 (Subpart C)

Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) - Electric Field Strength Measurements (Frequency Range: 1 to 25.0 GHz) (emissions occurring in the restricted bands) (Continued)

Highest Average Level: Hopping Mode

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
1.039244	Vertical	12.0	22.0	34.0	54.0	20.0	Complied
1.334669	Vertical	7.6	22.1	29.7	54.0	24.3	Complied
4.955775	Horizontal	17.0	25.5	42.5	54.0	11.5	Complied

Note(s):

1. *The transducer factor incorporates the antenna factor and cable loss of the equipment used to perform the above measurements.*

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

7.2.12. Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) - Electric Field Strength Measurements (Frequency Range: 1 to 25.0 GHz) (emissions outside the restricted bands)

The EUT was configured for radiated emission testing as described in section 9 of this report.

Tests were performed to identify the maximum transmitter radiated emission levels.

Results:

Highest Peak Level: Bottom Channel

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Result
7.025483	Horizontal	14.3	28.5	42.8	69.3	26.5	Complied

Highest Peak Level: Hopping Mode





Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	-20 dBc Limit (dB μ V/m)	Margin (dB)	Result
7.205708	Horizontal	14.0	28.5	42.5	69.5	27.0	Complied

Note(s):

1. *The transducer factor incorporates the antenna factor and cable loss of the equipment used to perform the above measurements.*

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**


Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) - Electric Field Strength Measurements (Frequency Range: 1 to 25.0 GHz) (emissions outside the restricted bands) (Continued)

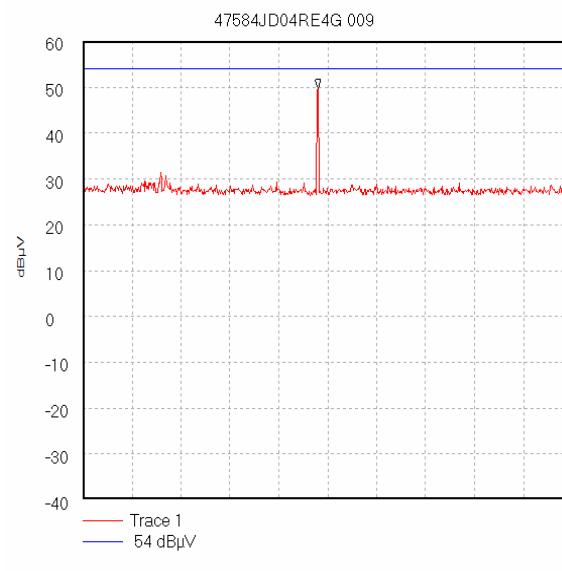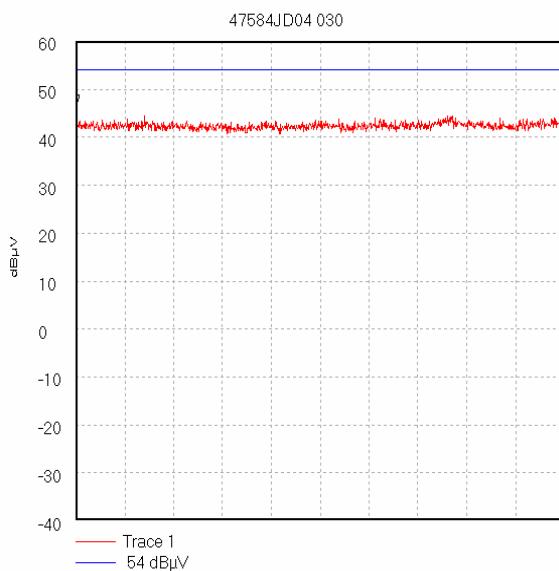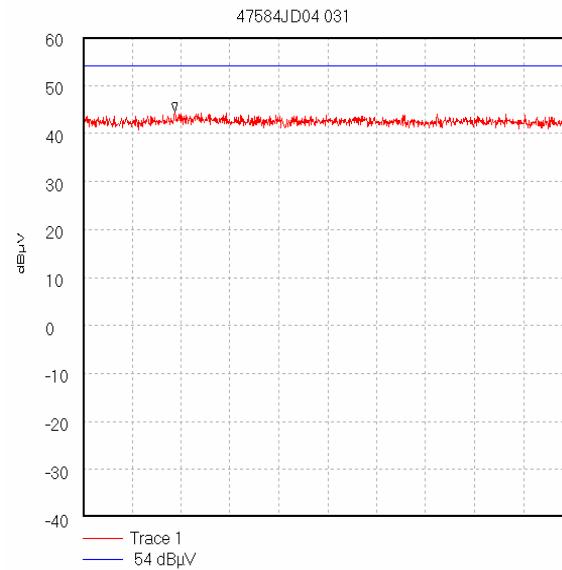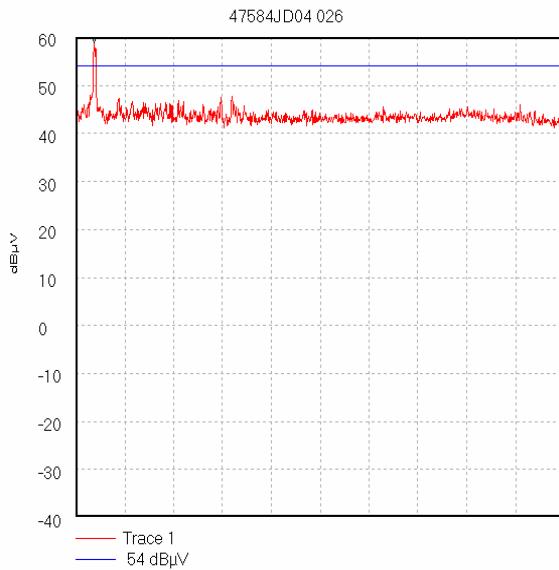


Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**


Transmitter Radiated Emissions: Section 15.247(d) and 15.209(a) - Electric Field Strength Measurements (Frequency Range: 1 to 25.0 GHz) (emissions outside the restricted bands) (Continued)

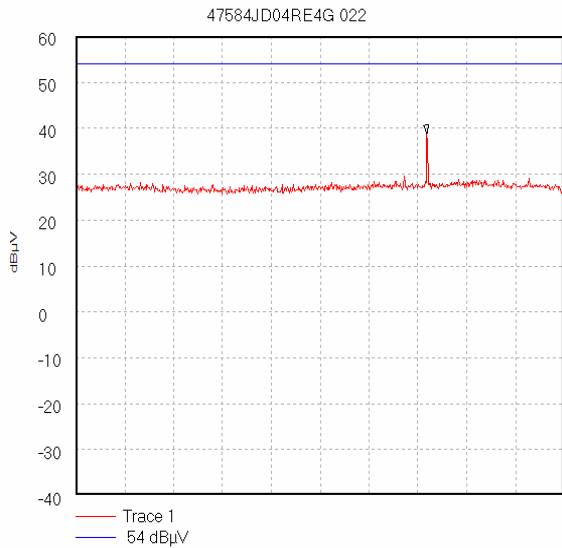


Start 6.0 GHz; Stop 8.0 GHz
Ref 60 dB μ V; Ref Offset 0.0 dB; 10 dB/div
RBW 1.0 MHz; VBW 3.0 MHz; Att 10 dB; Swp 50.0 mS
Peak 7.436667 GHz, 38.83 dB μ V
Display Line: 54 dB μ V;
Transducer Factors: 6G-8G_Horn(@0.7m,3m_cable,A1534)
01/11/2005 15:02:11

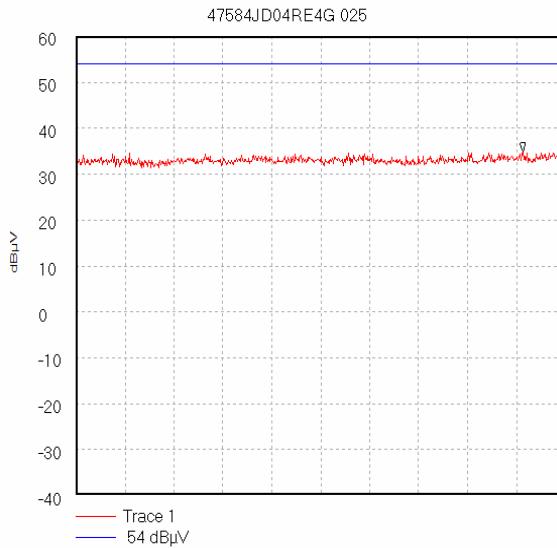

Start 8.0 GHz; Stop 12.5 GHz
Ref 60 dB μ V; Ref Offset 0.0 dB; 10 dB/div
RBW 1.0 MHz; VBW 3.0 MHz; Att 10 dB; Swp 90.0 mS
Peak 12.11 GHz, 34.83 dB μ V
Display Line: 54 dB μ V;
Transducer Factors: 8G-12.5G_Horn(@1m,3m_cable,A1534)
01/11/2005 15:17:55

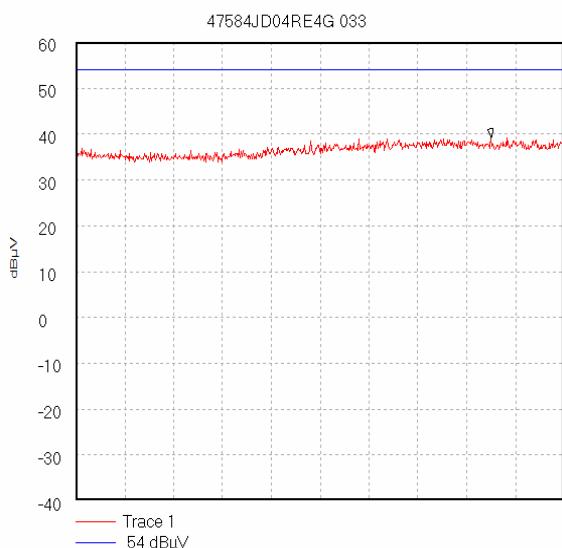

Start 12.5 GHz; Stop 18.0 GHz
Ref 60 dB μ V; Ref Offset 0.0 dB; 10 dB/div
RBW 1.0 MHz; VBW 3.0 MHz; Att 0 dB; Swp 110.0 mS
Peak 17.175 GHz, 39.17 dB μ V
Display Line: 54 dB μ V;
Transducer Factors: 12.5-18G_Horn(@1m,3m_cable,A1534)
01/11/2005 15:42:53

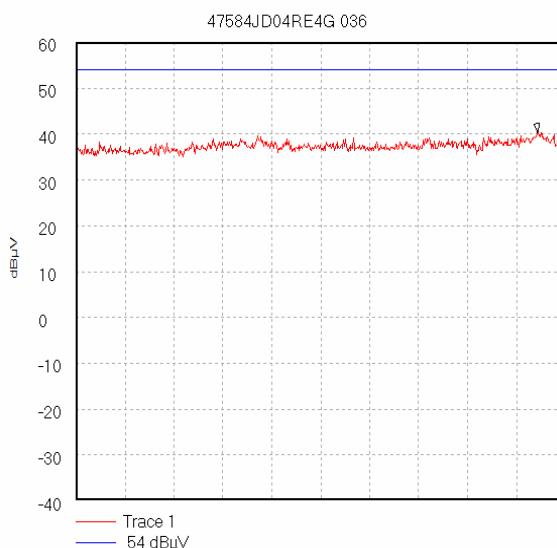

Start 18.0 GHz; Stop 25.0 GHz
Ref 60 dB μ V; Ref Offset 0.0 dB; 10 dB/div
RBW 1.0 MHz; VBW 3.0 MHz; Att 0 dB; Swp 140.0 mS
Peak 24.603333 GHz, 40.33 dB μ V
Display Line: 54 dB μ V;
Transducer Factors: 18-26.5_Horn(@1m,3m_cable,A1534)
01/11/2005 15:50:34

Note: These plots are pre-scans and for indication purposes only. For final measurements, see accompanying tables.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

7.2.13. Transmitter Band Edge Radiated Emissions: Section 15.247(d) & 15.209(a) - Electric Field Strength Measurements

The EUT was configured for band edge compliance of radiated emission measurements as described in section 9 of this report.

Tests were performed to identify the maximum radiated band edge emissions.

Results:

Peak Power Level Hopping Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2.4000	Horizontal	24.1	23.2	47.3	69.5*	22.2	Complied
2.4835	Horizontal	28.6	23.4	52.0	74.0	22.2	Complied

Average Power Level Hopping Mode:


Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2.4835	Horizontal	15.8	23.4	39.2	54.0	14.8	Complied

Note(s):


1. *The transducer factor incorporates the antenna factor and cable loss of the equipment used to perform the above measurements.*
2. **-20 dBc limit*

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

Transmitter Band Edge Radiated Emissions: Section 15.247(d) & 15.209(a) - Electric Field Strength Measurements (Continued)

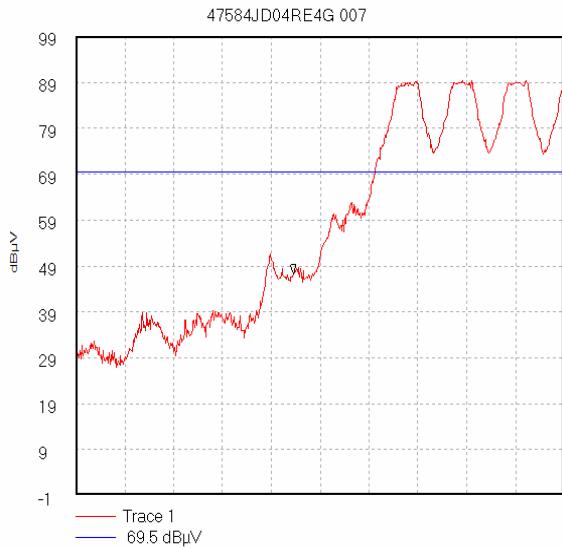

Start 2.396 GHz; Stop 2.405 GHz
Ref 99 dB μ V; Ref Offset 2.0 dB; 10 dB/div
RBW 100.0 kHz; VBW 300.0 kHz; Att 0 dB; Swp 50.0 mS
Marker 2.400005 GHz, 47.33 dB μ V
Display Line: 69.5 dB μ V;
Transducer Factors: FCCBE
01/11/2005 12:40:06

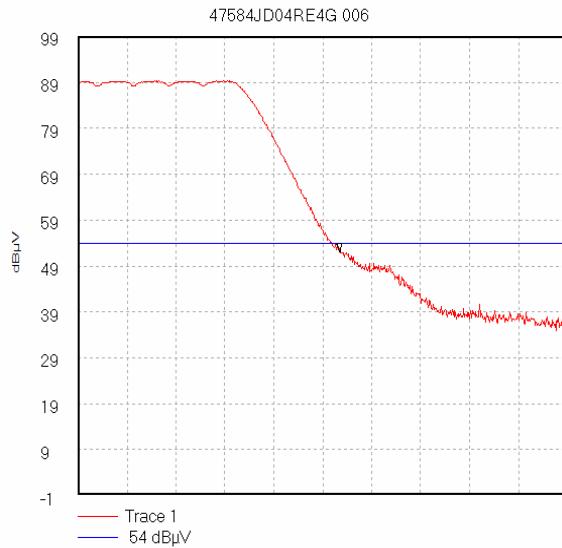

Start 2.476 GHz; Stop 2.49 GHz
Ref 99 dB μ V; Ref Offset 2.0 dB; 10 dB/div
RBW 1.0 MHz; VBW 3.0 MHz; Att 0 dB; Swp 50.0 mS
Marker 2.48349 GHz, 52.0 dB μ V
Display Line: 54 dB μ V;

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

7.2.14. Transmitter Band Edge Radiated Emissions: Section 15.247(d) & 15.209(a)

The EUT was configured for band edge compliance of radiated emission measurements as described in section 9 of this report.

Tests were performed to identify the average radiated band edge emissions.

Results:

Peak Power Level Static Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2.4000	Horizontal	25.3	23.2	48.5	69.3*	20.8	Complied
2.4835	Horizontal	29.4	23.4	52.8	74.0	21.2	Complied


Average Power Level Static Mode:

Frequency (GHz)	Antenna Polarity	Detector Level (dB μ V)	Transducer Factor (dB)	Actual Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
2.4835	Horizontal	16.6	23.4	40.0	54.0	14.0	Complied


Note(s):

1. *The transducer factor incorporates the antenna factor and cable loss of the equipment used to perform the above measurements.*
2. **-20 dBc limit*

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

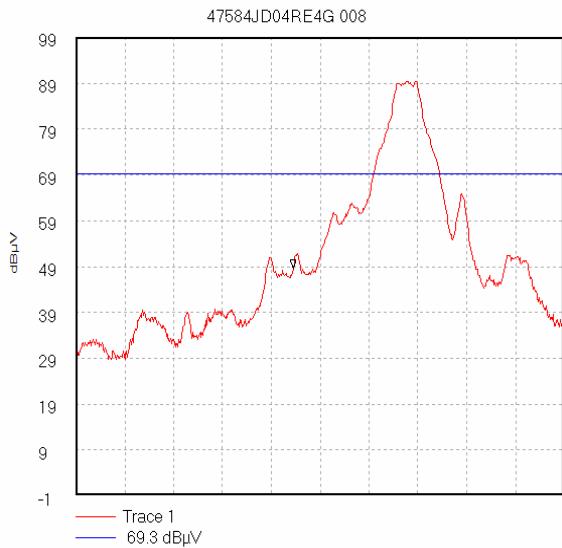Transmitter Band Edge Radiated Emissions: Section 15.247(d) & 15.209(a) (Continued)

Start 2.396 GHz; Stop 2.405 GHz
Ref 99 dB μ V; Ref Offset 2.0 dB; 10 dB/div
RBW 100.0 kHz; VBW 300.0 kHz; Att 0 dB; Swp 50.0 mS
Marker 2.400005 GHz, 48.5 dB μ V
Display Line: 69.3 dB μ V;
Transducer Factors: FCCBE
01/11/2005 12:42:30

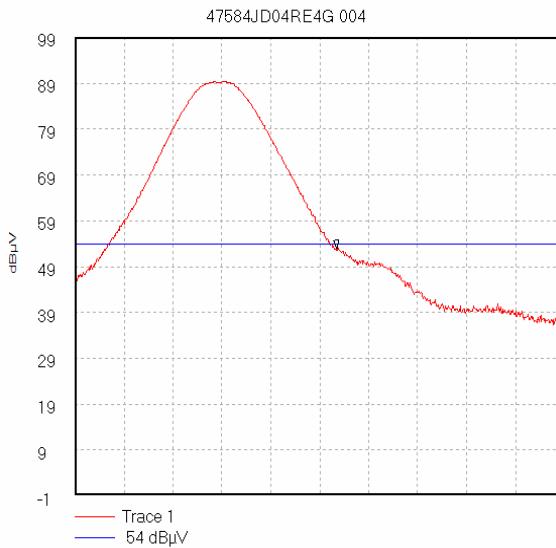

Start 2.476 GHz; Stop 2.49 GHz
Ref 99 dB μ V; Ref Offset 2.0 dB; 10 dB/div
RBW 1.0 MHz; VBW 3.0 MHz; Att 0 dB; Swp 50.0 mS
Marker 2.48349 GHz, 52.83 dB μ V
Display Line: 54 dB μ V;
Transducer Factors: FCCBE
01/11/2005 12:29:35

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

8. Measurement Uncertainty

No measurement or test can ever be perfect and the imperfections give rise to error of measurement in the results. Consequently, the result of a measurement is only an approximation to the value of the measurand (the specific quantity subject to measurement) and is only complete when accompanied by a statement of the uncertainty of the approximation.

The expression of uncertainty of a measurement result allows realistic comparison of results with reference values and limits given in specifications and standards.

The uncertainty of the result may need to be taken into account when interpreting the measurement results.

The reported expanded uncertainties below are based on a standard uncertainty multiplied by an appropriate coverage factor, such that a confidence level of approximately 95% is maintained. For the purposes of this document “approximately” is interpreted as meaning “effectively” or “for most practical purposes”.

Measurement Type	Range	Confidence Level (%)	Calculated Uncertainty
AC Conducted Spurious Emissions	0.15 MHz to 30 MHz	95%	±3.25 dB
Transmitter Maximum Peak Output Power	Not applicable	95%	±2.94 dB
Transmitter Carrier Frequency Separation	Not applicable	95%	±0.01 ppm
Transmitter Average Time of Occupancy	Not applicable	95%	±10 %
20 dB Bandwidth	Not applicable	95%	± 0.12 %
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	± 5.26 dB
Radiated Spurious Emissions	1 GHz to 40 GHz	95%	±2.94 dB

The methods used to calculate the above uncertainties are in line with those recommended within the various measurement specifications. Where measurement specifications do not include guidelines for the evaluation of measurement uncertainty, the published guidance of the appropriate accreditation body is followed.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

9. Measurement Methods

9.1. AC Mains Conducted Emissions

AC mains conducted emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

The test was performed in a shielded enclosure with the equipment arranged as detailed in the standard on a wooden bench using the floor of the screened enclosure as the ground reference plane. The EUT was powered with 110V 60 Hz ac mains supplied via a line impedance stabilisation network (LISN).

Initial measurements in the form of swept scans covering the entire measurement band were performed in order to identify frequencies on which the EUT was generating interference. In order to minimise the time taken for these swept measurements, a peak detector was used in conjunction with the appropriate detector IF measuring bandwidths (see table below). Repetitive scans were performed to allow for emissions with low repetition rates, and the duty cycle of the EUT. The test configuration was the same for the initial scans as for the final measurements.

Following the initial scans, a graph was produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. A tolerance line was set 6 dB below the specification limit and levels above the tolerance line were re-tested (at individual frequencies) using the appropriate detector function.

The test equipment settings for conducted emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements
Detector Type:	Peak	Quasi-Peak (CISPR)/Average
Mode:	Max Hold	Not applicable
Bandwidth:	10 kHz	9 kHz
Amplitude Range:	60 dB	20 dB
Measurement Time:	Not applicable	>1 s
Observation Time:	Not applicable	>15 s
Step Size:	Continuous sweep	Not applicable
Sweep Time:	Coupled	Not applicable

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

9.2. Radiated Emissions

Radiated emissions measurements were performed in accordance with the standard, against appropriate limits for each detector function.

Initial measurements covering the entire measurement band in the form of swept scans in a shielded enclosure were performed in order to identify frequencies on which the EUT was generating interference. This determined the frequencies on which the EUT should be re-measured in full on the open area test site. In order to minimise the time taken for the swept measurements, a peak detector was used in conjunction with the appropriate detector IF measuring bandwidth (see table below). Repetitive scans were performed to allow for emissions with low repetition rates.

The initial scans were performed using an antenna height of 1.5 m and a measurement distance of 3 m. Following the initial scans, graphs were produced giving an overview of the emissions from the EUT plotted against the appropriate specification limit. Any emission within 20 dB of the limit were then measured on the open area test site, except in cases where the noise floor was within 20 dB of the limit, in these cases the highest point of the noise floor was measured.

Where an emission fell inside a restricted band, measurements were made at the appropriate test distance using a measuring receiver with a quasi peak detector for measurements below 1000 MHz and an average and peak detector for measurements above 1000 MHz. A peak detector was used for all other measurements.

For the final measurements the EUT was arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 – 2003 Clause 5.4.

All measurements on the open area test site were performed using broadband antennas in both vertical and horizontal polarisations.

On the open area test site, at each frequency where a signal was to be measured, the trace was maximised by rotating a turntable through 360°. The angle at which the maximum signal was observed was locked out. For frequencies below 1000 MHz the test antenna was varied in height between 1 m and 4 m in order to further maximise the target emission.

For frequencies above 1000 MHz where a horn antenna was used, height searching was performed to locate the optimal height of the horn with respect to the EUT. At this point the horn was locked off and the turntable was again rotated through 360° to maximise the target signal. It should be noted that the received signal from the EUT would diminish very quickly after it exits the beam width of the horn antenna, for this reason it may not be necessary to fully height search with the horns.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

Radiated Emissions (Continued)

At this point, any signals found to be between the limit and a level 6 dB below it were further maximised by changing the configuration of the EUT, e.g. re-routing cables to peripherals and moving peripherals with respect to the EUT.

Scans were performed to the upper frequency limits as stated in section 15.33

The final field strength was determined as the indicated level in dB μ V plus cable loss and antenna factor.

The test equipment settings for radiated emissions measurements were as follows:

Receiver Function	Initial Scan	Final Measurements <1 GHz	Final Measurements \geq1 GHz
Detector Type:	Peak	Quasi-Peak (CISPR)	Peak / Average
Mode:	Max Hold	Not applicable	Max Hold
Bandwidth:	(120 kHz <1 GHz) (1 MHz \geq 1 GHz)	120 kHz	1 MHz
Amplitude Range:	100 dB	100 dB	100 dB
Step Size:	Continuous sweep	Not applicable	Not applicable
Sweep Time:	Coupled	Not applicable	Not applicable

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

9.3. Carrier Frequency Separation / 20 dB Bandwidth

The EUT and spectrum analyser was configured as for conducted antenna port / radiated measurements, and as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

To determine the bandwidth and separation of each transmission channel the measurement analyser was configured to measure two adjacent channels whilst the EUT was in hopping mode. The spectrum analyser was configured with a resolution bandwidth and video bandwidth greater than 1% of the frequency span.

The analyser was set for a maximum hold scan to capture the profile of the signal. The peak points on the two adjacent channels were noted and the separation between them recorded.

To determine the occupied bandwidth, a resolution bandwidth of 10 kHz was used, which is greater than 1% of the 20 dB bandwidth. A video bandwidth of, at least, the same value was used.

The analyser was set for a maximum hold scan to capture the profile of the signal. The peak level was then determined, and a reference line was drawn 20 dB below the peak level.

The bandwidth was determined at the points where the 20 dB reference line intercepted the power envelope of the emission.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

9.4. Average Time of Occupancy

The EUT and spectrum analyser was configured as for conducted antenna port / radiated measurements, and as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

First the maximum packet length was determined on the centre channel.

The measurement analyser was configured to the time domain mode by setting the span to zero with a sweep time sufficiently wide enough to measure one pulse.

The EUT was configured to operate in normal mode of operation. The pulse width of one transmission was then recorded. The measurement analyser was then configured in zero span i.e. in the time domain and the sweep time was set to 32 seconds (the closest allowable setting to 31.6 seconds). This 31.6 second period was determined by multiplying the number of channels the device operates over (79) by 0.4 seconds.

The number of transmissions within this period was noted and multiplied by the pulse width recorded earlier. This gives the maximum occupancy over 31.6 seconds.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

9.5. Peak Output Power

The EUT and spectrum analyser were configured as for radiated measurements and as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

Prior to testing being performed a suitable RF attenuator and cable, were calibrated for the required frequencies. For each frequency to be measured, the calibrated level of the attenuator and cable were entered as an offset into a spectrum analyser to compensate for the measurement set up.

To determine the transmitter output power, the EUT was operated at maximum power and a result was obtained from the spectrum analyser using peak detector and trace max hold.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

9.6. Effective Isotropic Radiated Power (EIRP)

EIRP measurements were performed in accordance with the standard, against appropriate limits.

The EIRP was measured with the EUT arranged on a non-conducting turn table on a standard test site compliant with ANSI C63.4 – 2003 Clause 5.4. The transmitter was fitted with an integral antenna; therefore all radiated tests were performed with the unit operating into the integral antenna.

The level of the EIRP was measured using a spectrum analyser.

The test antenna was positioned in the horizontal plane. The EUT was oriented in the X plane. The test antenna was then raised and lowered until a maximum peak was observed. The turntable was then rotated through 360 degrees and the maximum peak reading obtained. The height search was then repeated to take into consideration the new angular position of the turntable. The maximum reading observed was then recorded. This procedure was then repeated with the EUT oriented in the Y and Z planes. The highest reading taken in all 3 planes was recorded. The entire procedure was then repeated with the test antenna set in the vertical polarity.

Once the final amplitude (maximised) had been obtained, the EUT was substituted with a horn antenna. The centre of the substitution antenna was set to approximately the same centre location as the EUT. The substitution antenna was set to the horizontal polarity. The substitution antenna was matched into a signal generator using a 6 dB or greater attenuator. The signal generator was tuned to the EUT's frequency under test.

The test antenna was then raised and lowered to obtain a maximum reading on the spectrum analyser. The level of the signal generator output was then adjusted until the maximum recorded EUT level was observed. The signal generator level was noted. This procedure was repeated with both test antenna and substitution antenna vertically polarised. The EIRP was calculated as:-

$$\text{EIRP} = \text{Signal Generator Level} - \text{Cable Loss} + \text{Antenna Gain}$$

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

Effective Isotropic Radiated Power (EIRP) (Continued)

Circumstances where the signal generator could not produce the desired a power substitution was performed with the signal generator set to 0 dBm. The radiated signal was maximised as previously described. The level indicated on the measuring receiver was noted. The delta between this level and the maximum level for the EUT was calculated and also noted. The EIRP of the signal generator was calculated using the above formulae. The recorded delta was added to the calculated EIRP to obtain the substituted EUT EIRP.

Delta (dB) = EUT – SG

where :

EUT = spectrum analyser indicated EUT raw level

SG = spectrum analyser indicated signal generator raw level

The signal generator actual EIRP is calculated as:

EIRP SG= Signal Generator Level - Cable Loss + Antenna Gain

The EUT EIRP is calculated as:

EIRP EUT = EIRP SG + Delta.

The test equipment settings for EIRP measurements were as follows:

Receiver Function	Setting
Detector Type:	Peak
Mode:	Not applicable
Bandwidth:	1 MHz
Amplitude Range:	100 dB
Sweep Time:	Coupled

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

9.7. Band Edge Compliance of RF Radiated Emissions

The EUT and spectrum analyser were configured as for radiated measurements and as per FCC Public Notice DA 00-705, Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems.

To determine band edge compliance, the analyser resolution bandwidth was set to $\geq 1\%$ of the analyser span. The video bandwidth was set to be \geq to the resolution bandwidth. The sweep was set to auto and the detector to peak. The trace was set to max hold and a trace was produced.

A plot of the lower band edge of the allocated frequency band was produced. A marker was set to the level of the highest in band emission with a limit line set to 20 dB below this. The marker was then placed on the highest out of band emission (the specification states that either the band edge level must be measured or the highest out of band emission, whichever is the greater). The plots show that the highest out of band emission complies with the -20 dBc limit.

The above procedure was then repeated for the upper band edge except that, as the upper band edge fell on a restricted band edge (as defined in section 15.205(a)), the limit for the restricted band was applied instead of the -20 dBc limit i.e. the general limits defined in section 15.209(a).

Final measurements were performed on the worst-case configuration as described in Part 15.31(i).

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

Appendix 1. Test Equipment Used

RFI No.	Instrument	Manufacturer	Type No.	Serial No.
A027	Horn Antenna	Eaton	9188-2	301
A028	Horn Antenna	Eaton	91888-2	304
A031	Horn Antenna	Eaton	91889-2	557
A1037	Bilog Antenna	Chase EMC Ltd	CBL6112B	2413
A1069	LISN	Rohde & Schwarz	ESH3-Z5	837469/012
A1149	N-type Terminator	Suhner	A114909/02/2000	6042 7
A1360	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	A1360-20112003
A1362	Horn Antenna	Stoddart Aircraft Radio Co., Inc.	91889-1	N/A
A1534	Preamplifier 1-26.5 GHz	Hewlett Packard	8449B OPT H02	3008A00405
A253	WG 12 Microwave Horn	Flann Microwave	12240-20	128
A254	WG 14 Microwave Horn	Flann Microwave	14240-20	139
A255	WG 16 Microwave Horn	Flann Microwave	16240-20	519
A256	WG 18 Microwave Horn	Flann Microwave	18240-20	400
A259	Bilog Antenna	Chase	CBL6111	1513
A392	3 dB attenuator	Suhner	6803.17.B	None
A436	WG 20 Microwave Horn	Flann	20240-20	330
C1082	2m Cable	Rosenberger	FA210A1020M50 50	28463-1
C1122	Cable	Rosenberger	FA210A1030005 050	170434844-03
C1155	8m cable	Huber & Suhner	Sucoflex 104PA	1522/4PA
C1162	1m N-Type Cable	Rosenberger Micro-Coax Limited	FA210A1010007 070	43187-2
C1168	3m N-Type Cable	Rosenberger Micro-Coax	FA210A1030007 070	43190-02
C160	Cables	Rosenberger	UFA210A-1-1181-70x70	None
C364	BNC Cable	Rosenberger	RG142	None

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

Test Equipment Used (Continued)

RFI No.	Instrument	Manufacturer	Type No.	Serial No.
C453	Cable	Rosenberger	RG142XX-001-RFIB	C453-10081998
C460	Cable	Rosenberger	UFA210A-1-1182-704704	98H0304
C461	Cable	Rosenberger	UFA210A-1-1182-704704	98H0305
C468	N-Type Coaxial Cable	Rosenberger	UFA210A-1-3937-504504	98L0440
C573	Cable	Rosenberger	UFA210A-1-788-50x50	97E0936
M003	Spectrum Monitor	Rohde & Schwarz	EZM	883 580/008
M028	Spectrum Analyser	Rohde & Schwarz	FSB	860 001/009 (RF), 860 161/007 (Display)
M044	Test Receiver	Rohde & Schwarz	ESVP	891 845/026
M088	Receiver / Spectrum Analyser System	Rohde & Schwarz	ESBI	DU:835862/018 RU:835387/006
M1008	Spectrum Analyser	Hewlett Packard	8563E	3551A04412
M1149	Bluetooth Test Set	Anritsu	MT8852A	6K00001529
M1242	Spectrum Analyser	Rohde & Schwarz, Inc.	FSEM30	845986_022
S201	Site 1	RFI	1	
S202	Site 2	RFI	2	S202-15011990
S212	Site 12	RFI	12	

NB In accordance with UKAS requirements, all the measurement equipment is on a calibration schedule.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**


Appendix 2. Test Configuration Drawings

This appendix contains the following drawings:

Drawing Reference Number	Title
DRG\47584JD04A\EMIRAD	Test configuration for measurement of radiated emissions.

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

DRG\47584JD04A\EMIRAD

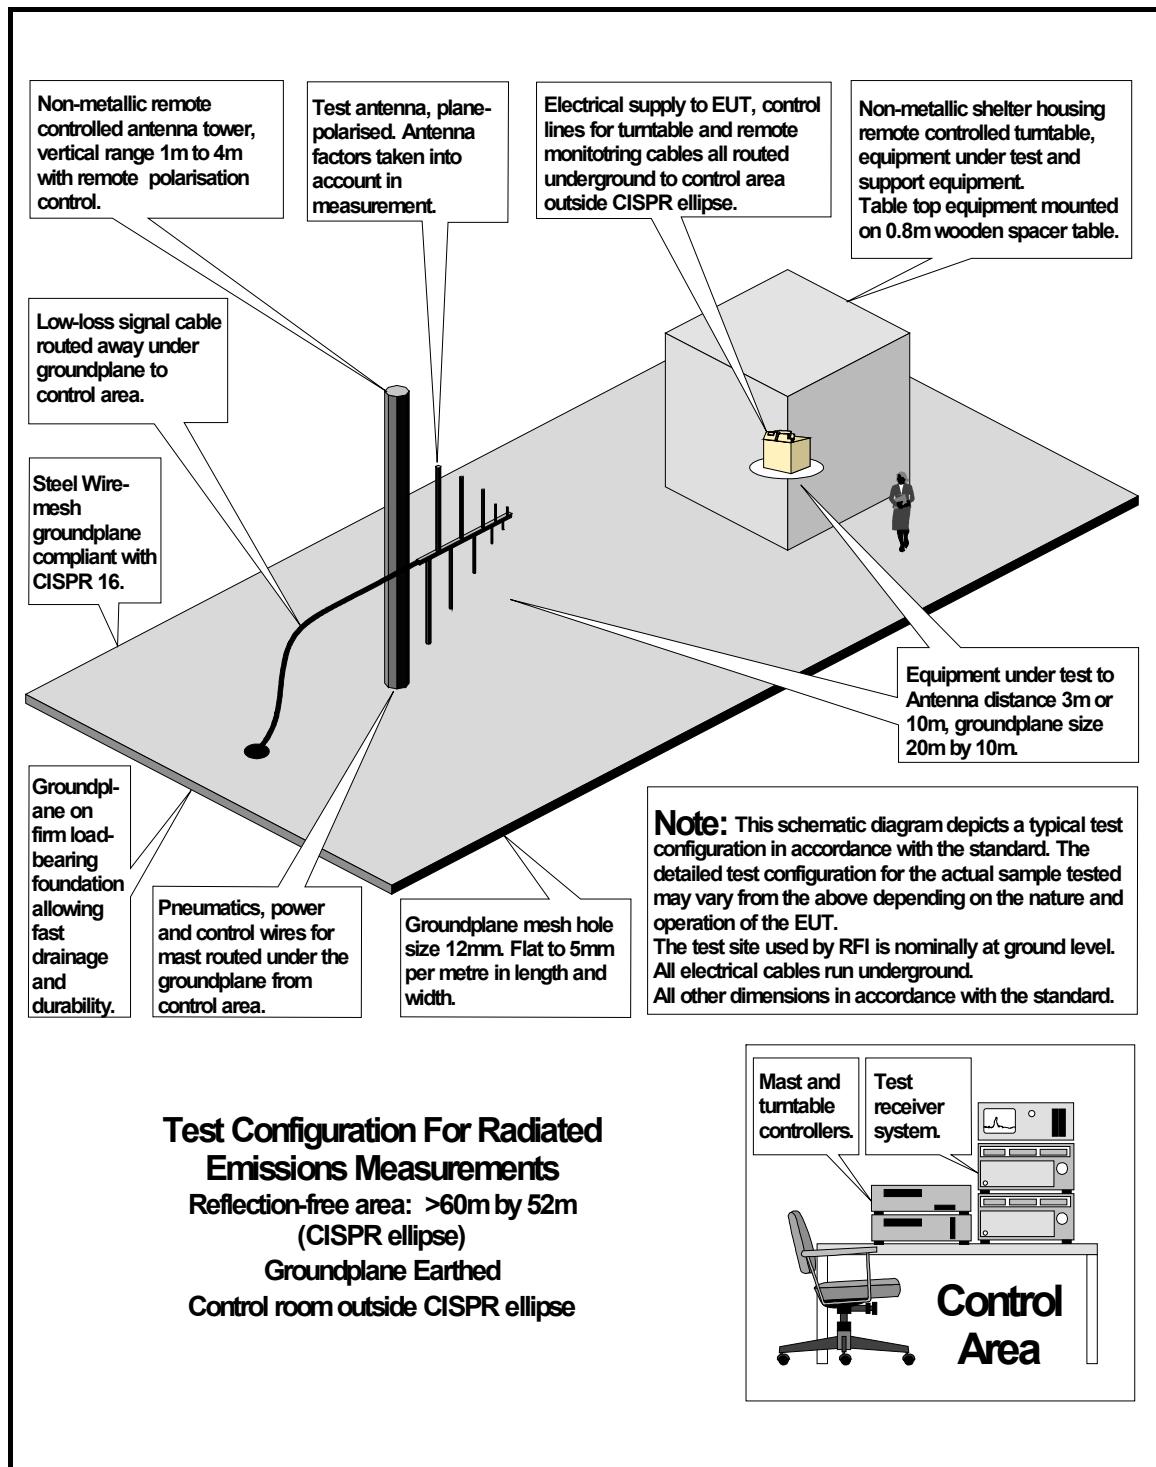

Test of: **GN Otometrics A/S**
SPEECHLINK 100 (Transceiver)
To: **FCC Part 15.247: 2004 (Subpart C)**

This page has been left intentionally blank.