


一. 产品图



Electrical performance parameters	
Frequency range (MHz)	824-960/1710-2680
VSWR (dB)	≤ 3.0
Gain (dBi)	3
Polarization	vertical
impedance (Ω)	50
Maximum Power (W)	25
Environmental parameters	
Operating temperature ($^{\circ}\text{C}$)	$-40 \sim +70$
Storage temperature ($^{\circ}\text{C}$)	$-45 \sim +75$

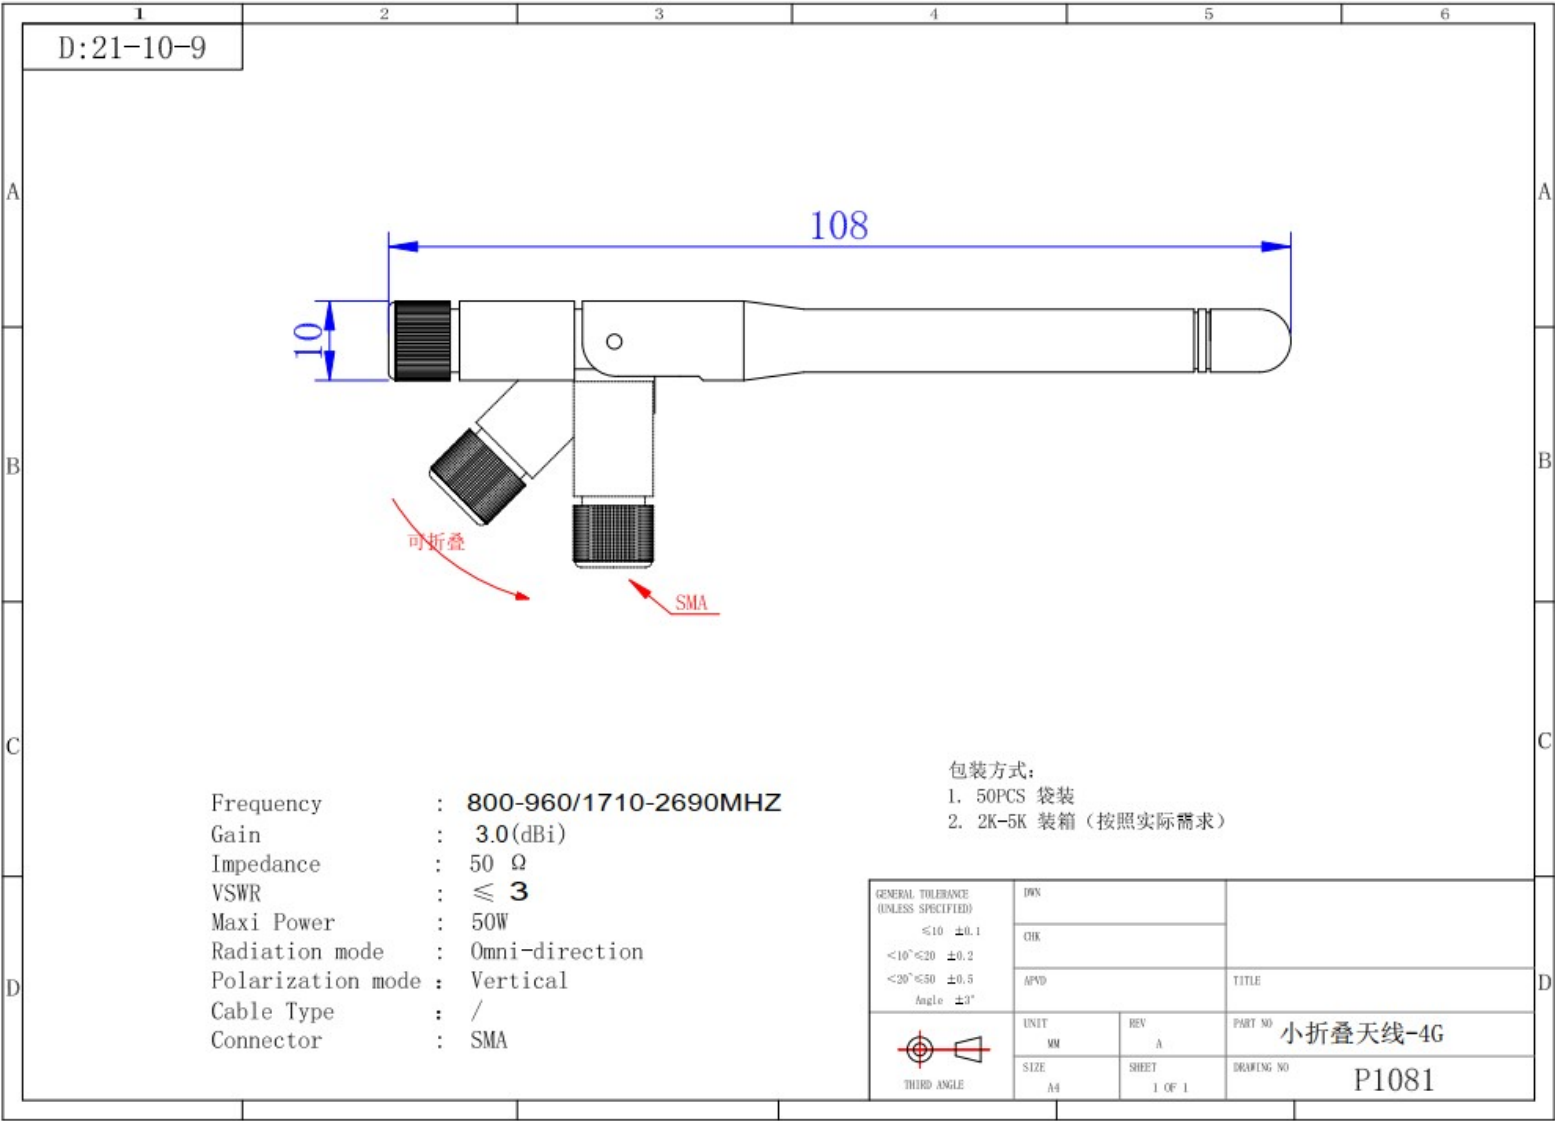