

TEST RESULT SUMMARY

FCC PART 15 Subpart C Section 15.231

| | |
|------------------------|--|
| MANUFACTURER'S NAME | Ameritek Industries |
| NAME OF EQUIPMENT | 90-010 |
| TYPE OF EQUIPMENT | 433.92 MHz Transmitter |
| MODEL NUMBER | Golden Retriever |
| MANUFACTURER'S ADDRESS | 2420 Niagara Lane Plymouth MN 55447 |
| TEST REPORT NUMBER | NC203528 |
| TEST DATE | 28 June 2002 |

According to testing performed at TÜV Product Service Inc, the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in FCC Part 15 Subpart C Section 15.231.

It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications necessary for compliance made during testing on the above mentioned date(s) must be implemented in all production units for compliance to be maintained.

TÜV Product Service Inc, as an independent testing laboratory, declares that the equipment tested as specified above conforms to the requirements of FCC Part 15 Subpart C Section 15.231.

Date: 05 November 2002

Location: Taylors Falls MN
USA


G. S. Jakubowski
Test Engineer


T. K. Swanson
Reviewed By

Not Transferable

EMC EMISSION - TEST REPORT

Test Report File No. : **NC203528** Date of issue: 05 November 2002

Model No. : **Golden Retriever**

Product Name : **90-010**

Product Type : **433.92 MHz Transmitter**

Applicant : **Ameritek Industries**

Manufacturer : **Ameritek Industries**

License holder : **Ameritek Industries**

Address : **2420 Niagara Lane**

: **Plymouth MN 55447**

Test Result : **■ Positive Negative**

Test Project Number
Reference(s) : **NC203528**

Total pages including
Appendices : **27**

TÜV Product Service Inc is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO/IEC Guide 25 and EN 45001.

TÜV Product Service Inc reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. TÜV Product Service Inc shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service Inc issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service Inc and its professional staff hold government and professional organization certifications and are members of AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI

D I R E C T O R Y - E M I S S I O N S

| | Page(s) |
|--|---------------------|
| A) Documentation | |
| Test report | 1 - 10 |
| Directory | 2 |
| Test Regulations | 3 |
| Deviation from standard / Summary | 9 |
| Test-setups (Photos) | 10 |
| Test-setup (drawing) | Appendix A |
| B) Test data results | |
| Conducted emissions | 10/150 kHz - 30 MHz |
| Radiated emissions electric field | 30 MHz - 4400 MHz |
| Radiated emissions magnetic field | 60 Hz - 30 MHz |
| Interference power | 30 MHz - 300 MHz |
| Emission Bandwidth | 433.92 MHz |
| Duty Cycle | 433.92 MHz |
| Signal Deactivation | 433.92 MHz |
| | 8 |
| C) Appendix A | |
| Test Data Sheets and Test Setup Drawing(s) | A2 – A8 |
| D) Appendix B | |
| Constructional Data Form | B2 – B7 |
| Product Information Form(s) | N/A |
| E) Appendix C | |
| Measurement Protocol | C1 - C2 |

EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- EN 50081-1 / 1991

- EN 55011 / 1991

- Group 1

- Group 2

- EN 55013 / 1990

- EN 55014 / 1987

- Class A

- Class B

- EN 55014 / A2:1990

- EN 55014 / 1993

- Household appliances and similar

- Portable tools

- Semiconductor devices

- EN 55015 / 1987

- EN 55015 / A1:1990

- EN 55015 / 1993

- EN 55022 / 1987

- EN 55022 / 1994

- Class A

- Class B

- Class A

- Class B

- BS

- VCCI

- FCC Part 15 Subpart C Section 15.231

- AS 3548 (1992)

- CISPR 11 (1990)

- CISPR 22 (1993)

- RSS-210 Issue 2 Rev. 1 Section 6.1.1 & 7.0

- Class A

- Class B

- Class A

- Class B

- Group 1

- Group 2

- Class A

- Class B

- Class A

- Class B

Environmental conditions in the lab:

| | <u>Actual</u> |
|----------------------|---------------|
| Temperature | : 22 °C |
| Relative Humidity | : 65 % |
| Atmospheric pressure | : 99.0 kPa |
| Power supply system | : 3.2 VDC |

Sign Explanations:

- not applicable
- applicable



Emissions Test Conditions: CONDUCTED EMISSIONS (Interference Voltage)

The **CONDUCTED EMISSIONS (INTERFERENCE VOLTAGE)** measurements were performed at the following test location:

■ - Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)
- Wild River Lab Screen Room
- New Brighton Lab Shielded Room

Emissions Test Conditions: RADIATED EMISSIONS (Magnetic Field)

The **RADIATED EMISSIONS (MAGNETIC FIELD)** measurements were performed at the following test location:

■ - Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)

Emissions Test Conditions: INTERFERENCE POWER

The **INTERFERENCE POWER** measurements were performed by using the absorbing clamp on the mains and interface cables in the frequency range 30 MHz - 300 MHz at the following test location:

■ - Test not applicable

- Wild River Lab Large Test Site (Open Area Test Site)
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)
- Wild River Lab Screen Room
- New Brighton Lab Shielded Room

Emissions Test Conditions: RADIATED EMISSIONS (Electric Field)

The **RADIATED EMISSIONS (ELECTRIC FIELD)** measurements, in the frequency range of 30 MHz- 4400 MHz, were tested in a horizontal and vertical polarization at the following test location:

- Test not applicable

- - Wild River Lab Large Test Site (Open Area Test Site) – NSA measurements made 7-01, due 7-02.
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)

at a test distance of :

- - 3 meters
- 10 meters
- 30 meters

Test equipment used:

| TUV ID | Model Number | Manufacturer | Description | Serial Number | Cal Due |
|----------|--------------|--------------------------|----------------------------------|---------------|----------|
| ■ - 3202 | EM-6917B | Electro-Metrics | Biconicalog Periodic 30-2000 MHz | 102 | 9-24-02 |
| ■ - 2665 | ZHL-1042J | Mini-Circuits | Preamplifier | 32296 | 9-12-02 |
| ■ - 2690 | 8566B | Hewlett-Packard | Spectrum Analyzer (Unit F) | 2430A00930 | 11-19-02 |
| ■ - 2678 | 85662A | Hewlett-Packard | Analyzer Display (Unit F) | 2403A08134 | 11-19-02 |
| ■ - 2684 | 85650A | Hewlett-Packard | Quasi-Peak Adapter (Unit F) | 2521A01006 | 11-19-02 |
| ■ - 2075 | 3115 | Electro-Mechanics (EMCO) | Ridge Guide Ant. 2-18 GHz | 9001-3275 | 10-20-02 |

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST) and is calibrated annually.

Equipment Under Test (EUT) Test Operation Mode - Emission tests :

The device under test was operated under the following conditions during emissions testing:

- Standby
- Test program (H - Pattern)
- Test program (color bar)
- Test program (customer specific)
- Practice operation
- Normal Operating Mode
- Constant transmit.

Configuration of the device under test:

- See Constructional Data Form in Appendix B - Page B2
- See Product Information Form in Appendix B - beginning on Page B3

The following peripheral devices and interface cables were connected during the measurement:

- _____
- _____
- _____
- _____
- _____
- _____
- _____
- _____
- _____
- unshielded power cable
- unshielded cables
- shielded cables
- customer specific cables
- _____
- _____

Type : _____

MPS.No.: _____

Emission Test Results:

FCC 15.231 - Radiated emissions (electric field) 30 MHz - 4400 MHz

The requirements are

- MET - NOT MET

Minimum margin of compliance for fundamental 3 dB at 433.92 MHz

Minimum margin of compliance for spurious < 1 GHz 9 dB at 867.83 MHz

Minimum margin of compliance for spurious > 1 GHz 7 dB at 1301.75 MHz

Remarks: The fundamental (433.92 MHz) was measured to be 77.5 dBuV/m or 7498.9 uV/m (97.5 dBuV/m minus 20 dB duty cycle correction factor) in average mode compared to an average limit of 80.8 dBuV/m (10996.67 uV/m). The 867.83 MHz signal was measured to be 51.6 dBuV/m or 380.2 uV/m (71.6 dBuV/m minus 20dB duty cycle correction factor) in peak mode compared to an average limit of 60.8 dBuV/m (1099.667 uV/m). At 1301.75 MHz, peak analyzer reading of 46.8 dBuV/m or 218.8 uV/m (66.8 dBuV/m minus 20 dB duty cycle correction factor) compared to an average limit of 54 dBuV/m (500 uV/m). The duty cycle correction factor is calculated by $20 \log (9.75/100 \text{ msec}) = -20 \text{ dB}$.

FCC 15.231 (c) - Emission Bandwidth

The requirements are

- MET - NOT MET

Remarks: The bandwidth of the fundamental must be less than 0.25% of the center frequency, or 1.08 MHz.

Page A6 of A8 shows the bandwidth to be approximately 1.05 MHz.

FCC 15.35 (c) – Duty Cycle

The requirements are

- MET - NOT MET

Remarks: Duty cycle declared to be worst case is 4.875 msec/pulse, with 2 pulses per 100 msec. Duty Cycle

Correction Factor = $20 \log (9.75/100)$ or -20 dB . See plots on pages A7 and A8.

FCC 15.231 (a) – Signal Deactivation

The requirements are

- MET - NOT MET

Remarks: The transmitter is used to control a motorized shopping cart pushing device. This enables a person to

return multiple shopping carts back to the location they came from. Commands can be sent from the transmitter to a receiver that controls the pushing device. These commands are slow speed (approx. 1 MPH), fast speed (approx. 2.5 MPH), honk horn, and stop. These commands are activated only while the respective push button on the control device, is held down. If no button is pushed, no transmissions are sent out, and the shopping cart pushing device reverts to an automatic stop.

DEVIATIONS FROM STANDARD:

None.

GENERAL REMARKS:

SUMMARY:

The requirements according to the technical regulations are

- met
- **not** met.

The device under test does

- fulfill the general approval requirements mentioned on page 3.
- **not** fulfill the general approval requirements mentioned on page 3.

Testing Start Date: 28 June 2002

Testing End Date: 28 June 2002

- TÜV PRODUCT SERVICE INC -

Thomas K. Swanson

T. K. Swanson
Reviewed By

G. S. Jakubowski

Tested By:
G. S. Jakubowski

Test-setup photo(s):
Radiated emission 30 MHz – 4.4 GHz



File No. NC203528, Page 10 of 10

Appendix A

Test Data Sheets

and

Test Setup Drawing(s)




TEST SETUP FOR EMISSIONS TESTING

WILD RIVER LAB
Large Test Site

Notes:

1. Items shown in dotted lines are located on the floor below the test area. It is 5 meters vertically from the ground floor to the test area.
2. 50 Hz, 60 Hz, and 400 Hz are power panels for alternating current.
3. The antenna may be positioned horizontally 3, 10 or 30 meters from the center of the turntable.
4. The circle is a 6.7 meter diameter turntable.
5. A ground plane is in the plane of this sheet.
6. The test sample is shown in the azimuthal position representing zero degrees.

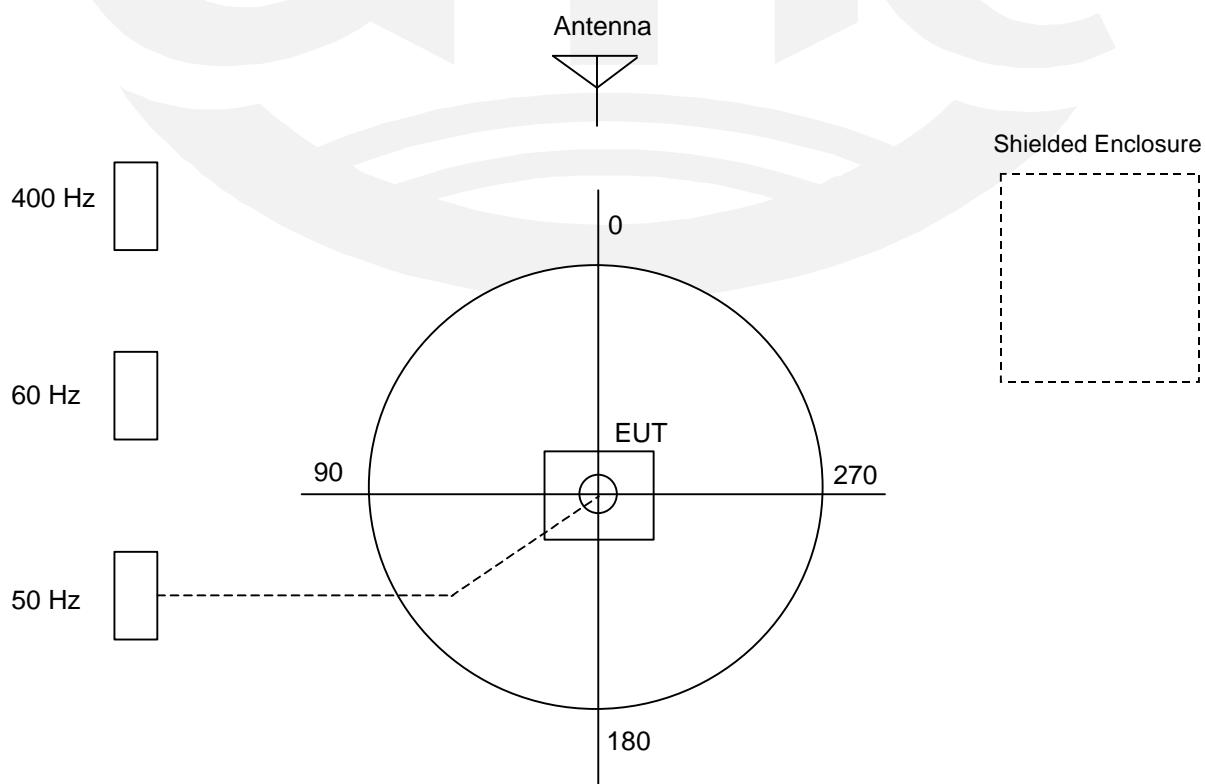

Radiated Electromagnetic Emissions

| | | | | | |
|------------------|--------------------------------------|------------|------------------|--------------------|--------|
| Test Report #: | 3528 Run 01 | Test Area: | LTS 3m | | |
| Test Method: | N/A | Test Date: | 28-Jun-2002 | | |
| EUT Model #: | Golden Retriever Transmitter | EUT Power: | 3.2 VDC internal | | |
| EUT Serial #: | | | | Temperature: | 22 °C |
| Manufacturer: | Ameritek | | | Relative Humidity: | 65 % |
| EUT Description: | Hand held remote control Transmitter | | | Air Pressure: | 99 kPa |
| Notes: | Intentional Radiator Test | | | Page: | 1 of 3 |

| FREQ (MHz) | LEVEL (dBuV) | CABLE / ANT / PREAMP (dB) | FINAL PEAK (dBuV) | POL / HGT / AZ (m) (DEG) | FINAL with pk-ave correction (20 dB) (dBuV) | FCC 15.231(b) Limit (dBuV) |
|---|-----------------|------------------------------|-------------------------|-----------------------------|---|-------------------------------|
| Antenna: LTS Bilog 3M SN 102 | | | | | | |
| Fundamental measured with ESVS 20 | | | | | | |
| Unmodulated | | | | | | |
| Board on its back, Xmit antenna horizontal | | | | | | |
| Maximized | | | | | | |
| 433.92 | 76.6 Av | 2.4 / 16.6 / 0.0 | 95.6 | H / 1.0 / 0.0 | 75.6 | 80.8 |
| Board upright, xmit antenna vertical | | | | | | |
| 433.92 | 76.9 Av | 2.4 / 16.6 / 0.0 | 95.9 | V / 1.3 / 120.0 | 75.9 | 80.8 |
| Board on its side, Xmit antenna horizontal | | | | | | |
| 433.92 | 78.5 Av | 2.4 / 16.6 / 0.0 | 97.5 | H / 1.0 / 38.0 | 77.5 | 80.8 |
| This position used to complete testing | | | | | | |
| EUT running with normal modulation | | | | | | |
| Peak - Average correction factor calculated at 20.db relaxation | | | | | | |
| Max'd | | | | | | |
| 867.83 | 45.8 Pk | 3.5 / 22.2 / 0.0 | 71.6 | H / 1.0 / 120.0 | 51.6 | 60.8 |
| 867.83 | 4.8 Av | 3.5 / 22.2 / 0.0 | 30.6 | H / 1.0 / 120.0 | 10.6 | 60.8 |

Tested by: G Jakubowski



Printed

Signature

Reviewed by: JTS



Printed

Signature

Radiated Electromagnetic Emissions

Test Report #: **3528 Run 01** Test Area: **LTS 3m**
 Test Method: **N/A** Test Date: **28-Jun-2002**
 EUT Model #: **Golden Retriever Transmitter** EUT Power: **3.2 VDC internal**
 EUT Serial #: _____ Temperature: **22** °C
 Manufacturer: **Ameritek** Relative Humidity: **65** %
 EUT Description: **Hand held remote control Transmitter** Air Pressure: **99** kPa
 Notes: **Intentional Radiator Test** Page: **2 of 3**

| FREQ (MHz) | LEVEL (dBuV) | CABLE / ANT / PREAMP (dB) | FINAL PEAK (dBuV) | POL / HGT / AZ (m) (DEG) | FINAL with pk-ave correction (20 dB) (dBuV) | FCC 15.231(b) Limit (dBuV) |
|--|-----------------|------------------------------|-------------------------|-----------------------------|---|-------------------------------|
| 1-2GHz BPF | | | | | | |
| 1301.75 | 35.9 Pk | 4.5 / 26.5 / 0.0 | 66.8 | H / 1.1 / 270.0 | 46.8 | 54.0 |
| 1735.65 | 44.7 Pk | 5.6 / 28.5 / 27.1 | 51.7 | V / 1.0 / 0.0 | 31.7 | 60.8 |
| Antenna: LTS Horn ID# 2075 | | | | | | |
| 2-4GHz BPF | | | | | | |
| Max'd | | | | | | |
| 2169.58 | 43.1 Pk | 7.1 / 30.0 / 27.1 | 53.0 | V / 1.0 / 265.0 | 33.0 | 60.8 |
| 2603.50 | 39.1 Pk | 7.3 / 30.9 / 27.0 | 50.2 | V / 1.2 / 204.0 | 30.2 | 60.8 |
| No other significant emissions detected above 2603.5 MHz | | | | | | |
| End scan 30MHz to 4.4GHz | | | | | | |
| | | | | | | |

Tested by: **G Jakubowski**



Printed

Signature

Reviewed by: **JTS**



Printed

Signature

Radiated Electromagnetic Emissions

| | | | |
|------------------|--------------------------------------|--------------------|------------------|
| Test Report #: | 3528 Run 01 | Test Area: | LTS 3m |
| Test Method: | N/A | Test Date: | 28-Jun-2002 |
| EUT Model #: | Golden Retriever Transmitter | EUT Power: | 3.2 VDC internal |
| EUT Serial #: | | Temperature: | 22 °C |
| Manufacturer: | Ameritek | Relative Humidity: | 65 % |
| EUT Description: | Hand held remote control Transmitter | Air Pressure: | 99 kPa |
| Notes: | Intentional Radiator Test | Page: | 3 of 3 |

| FREQ (MHz) | LEVEL (dBuV) | CABLE / ANT / PREAMP (dB) (dB/m) (dB) | FINAL PEAK (dBuV) | POL / HGT / AZ (m) (DEG) | FINAL with pk-ave correction (20 dB) (dBuV) | FCC 15.231(b) Limit (dBuV) |
|---------------|-----------------|--|-------------------------|-----------------------------|---|-------------------------------|
|---------------|-----------------|--|-------------------------|-----------------------------|---|-------------------------------|

| ***** MEASUREMENT SUMMARY ***** | | | | | | |
|---------------------------------|---------|-------------------|------|-----------------|------|------|
| 433.92 | 78.5 Av | 2.4 / 16.6 / 0.0 | 97.5 | H / 1.0 / 38.0 | 77.5 | 80.8 |
| 867.83 | 45.8 Pk | 3.5 / 22.2 / 0.0 | 71.6 | H / 1.0 / 120.0 | 51.6 | 60.8 |
| 1301.75 | 35.9 Pk | 4.5 / 26.5 / 0.0 | 66.8 | H / 1.1 / 270.0 | 46.8 | 54.0 |
| 1735.65 | 44.7 Pk | 5.6 / 28.5 / 27.1 | 51.7 | V / 1.0 / 0.0 | 31.7 | 60.8 |
| 2169.58 | 43.1 Pk | 7.1 / 30.0 / 27.1 | 53.0 | V / 1.0 / 265.0 | 33.0 | 60.8 |
| 2603.50 | 39.1 Pk | 7.3 / 30.9 / 27.0 | 50.2 | V / 1.2 / 204.0 | 30.2 | 60.8 |
| | | | | | | |

Tested by: G Jakubowski



Printed


Signature

Reviewed by: JTS





Printed

Signature

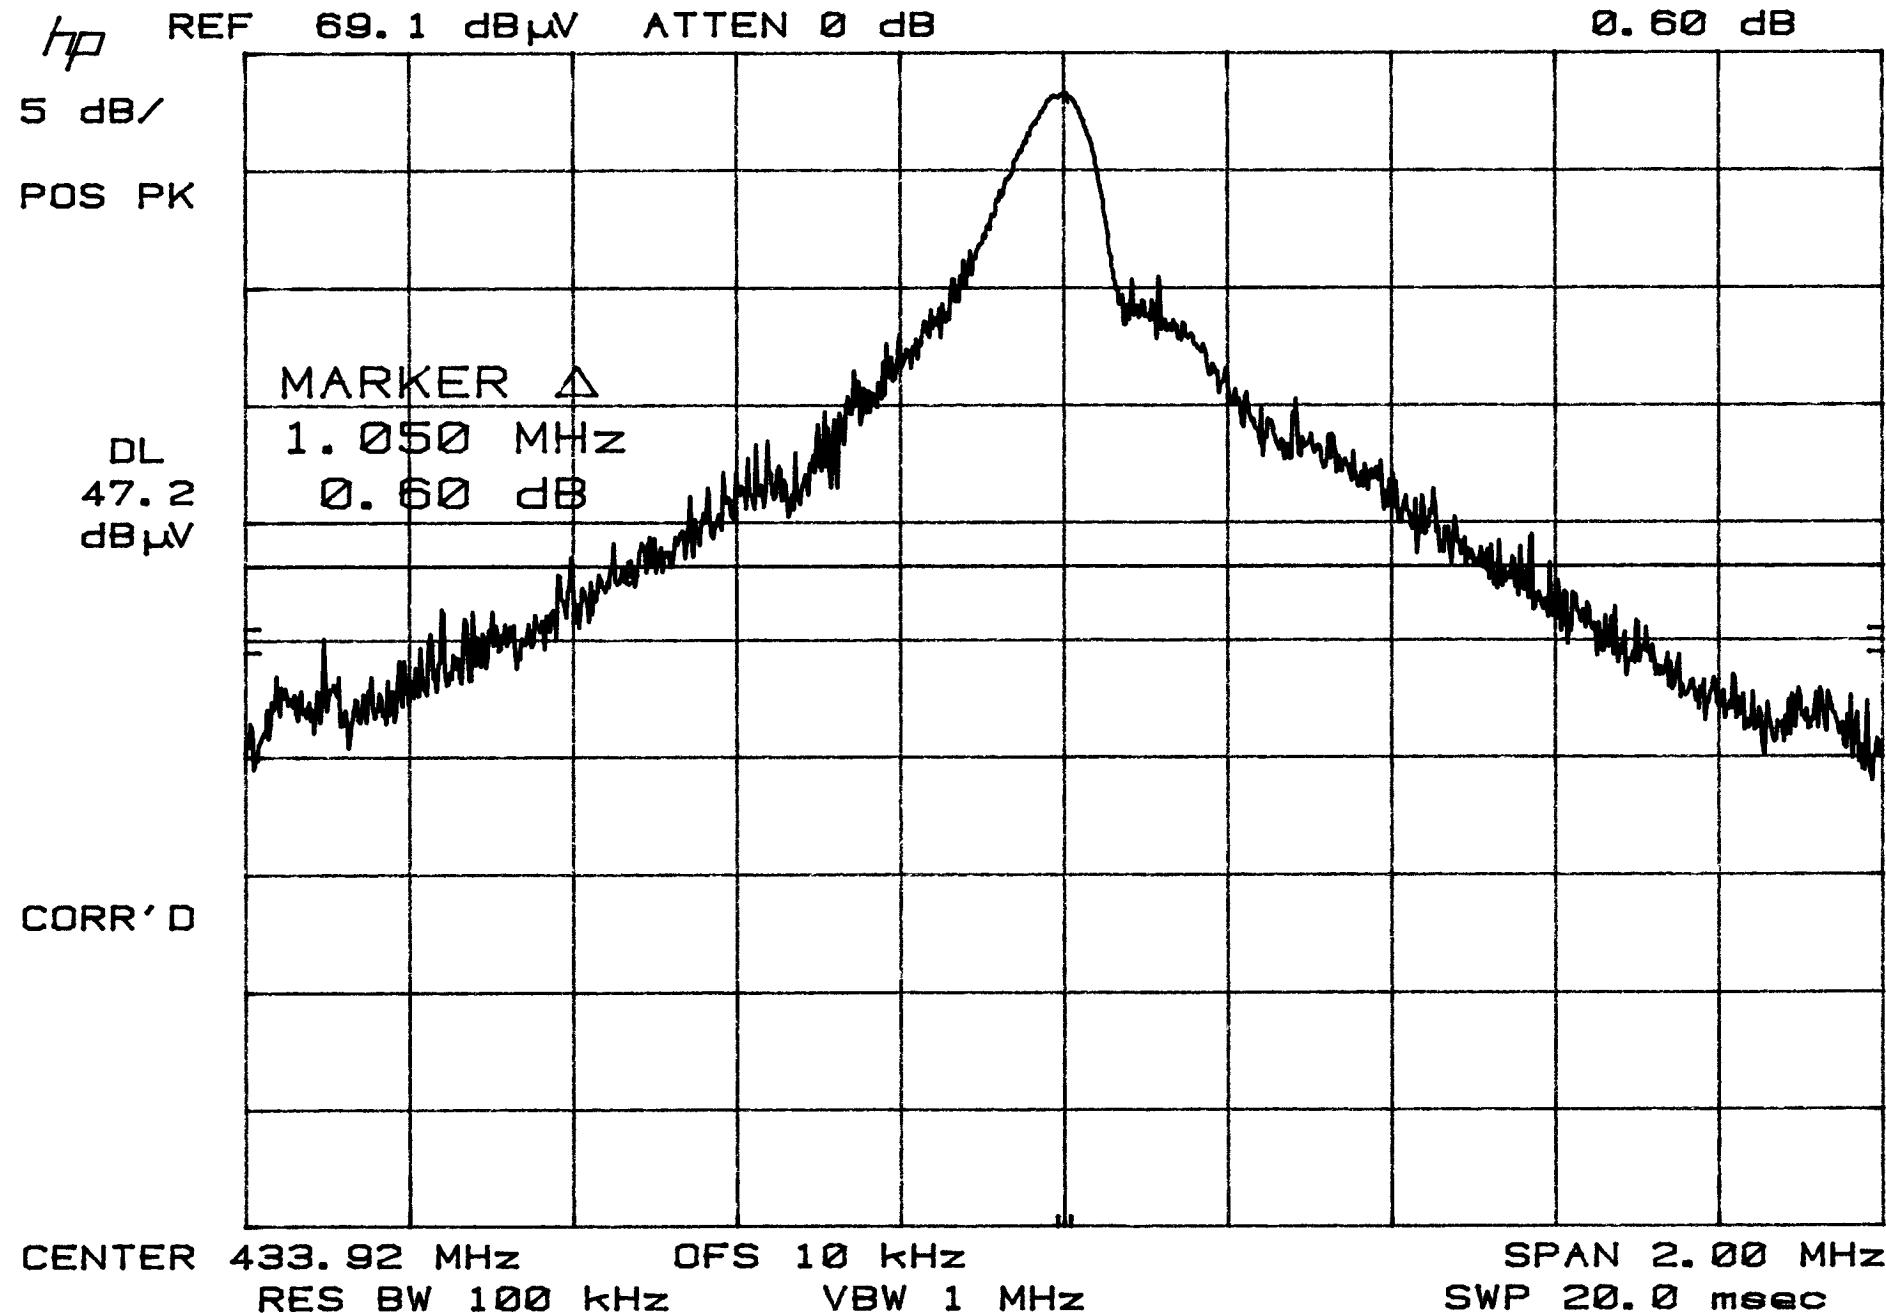MKR Δ 1.050 MHz
0.60 dB

Duty Cycle - FCC 15.35(c)

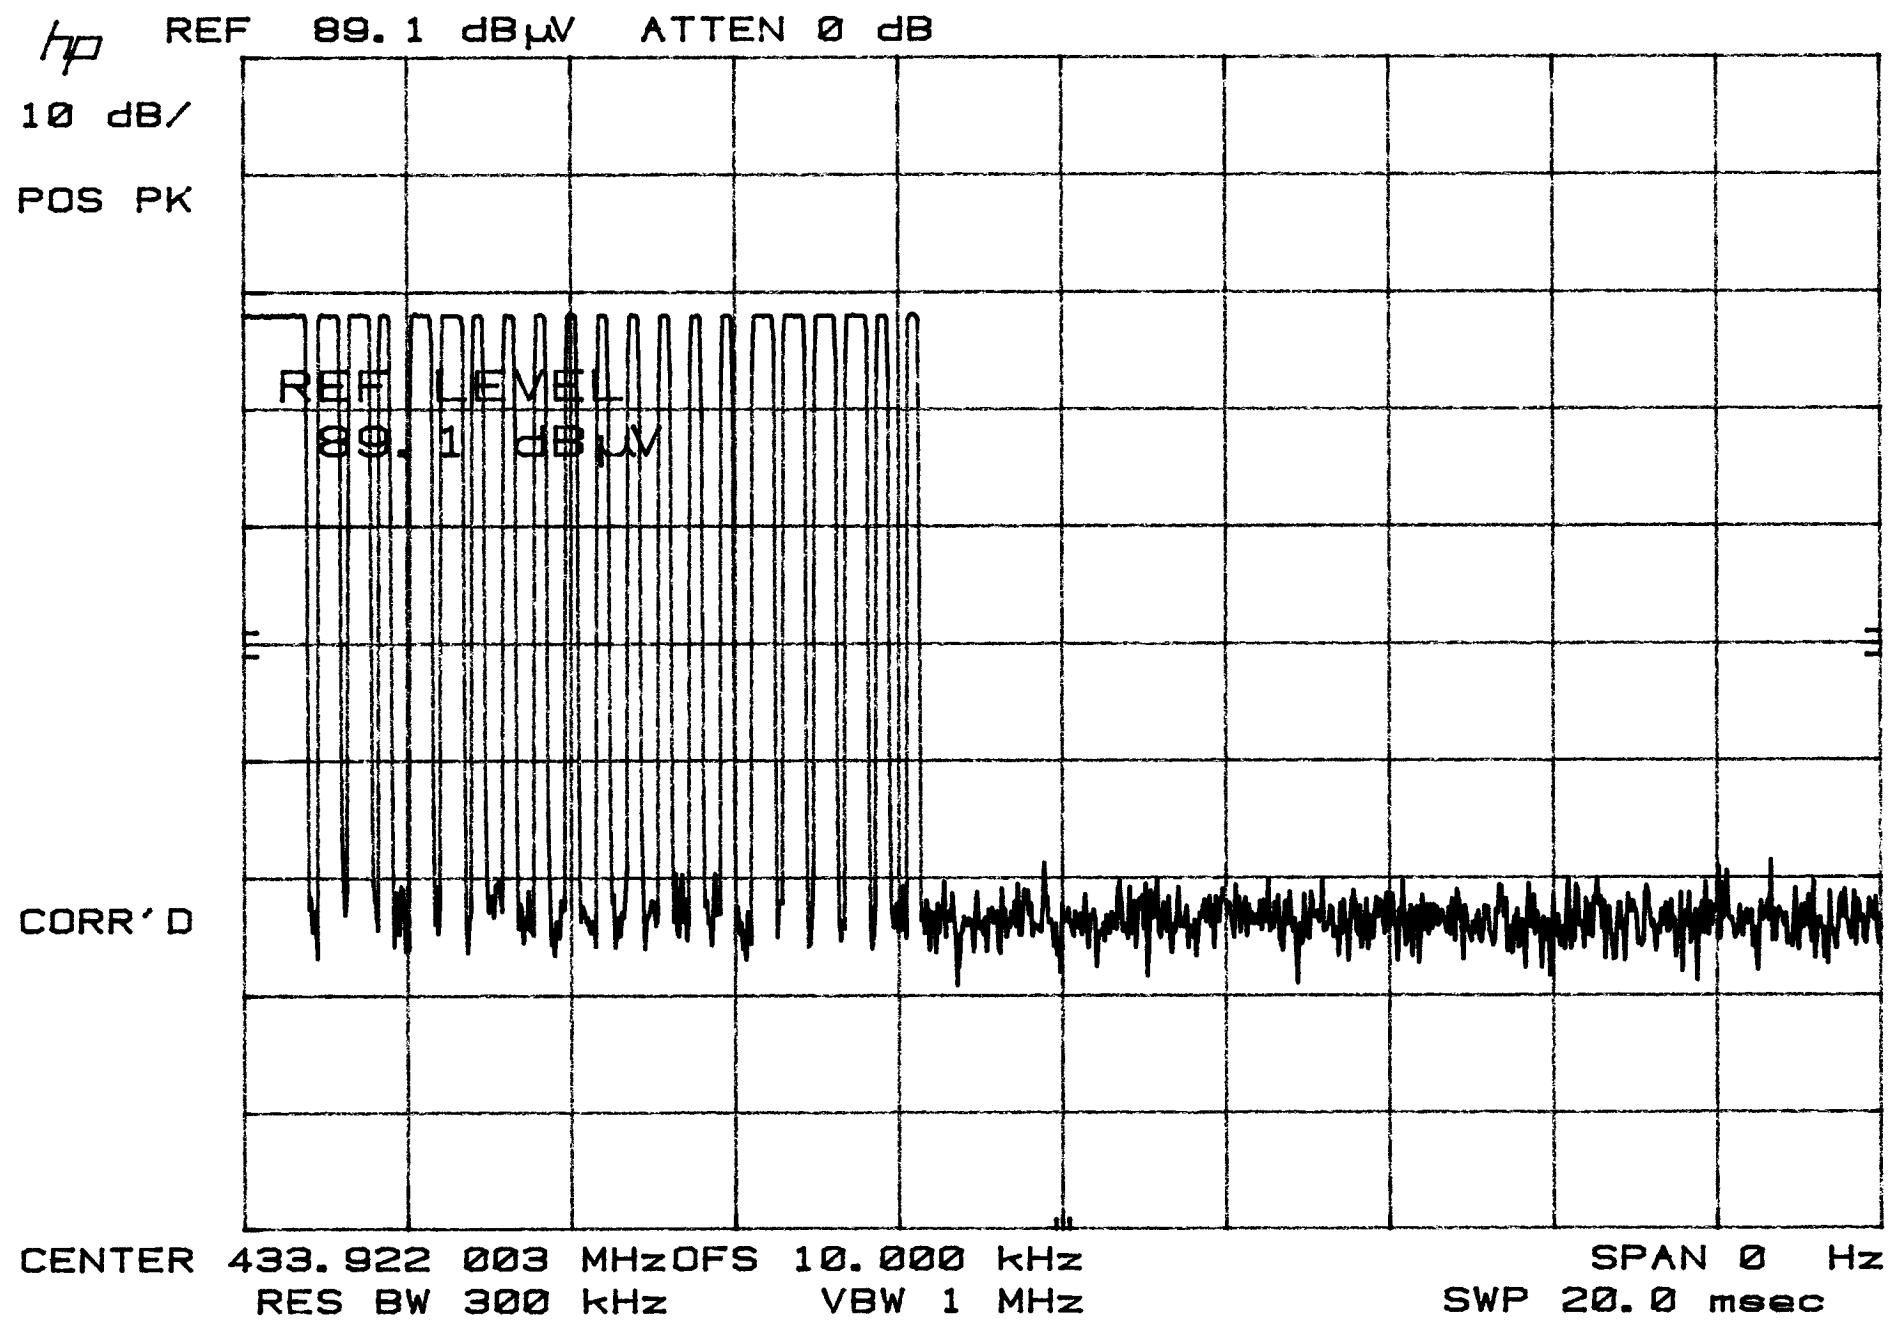

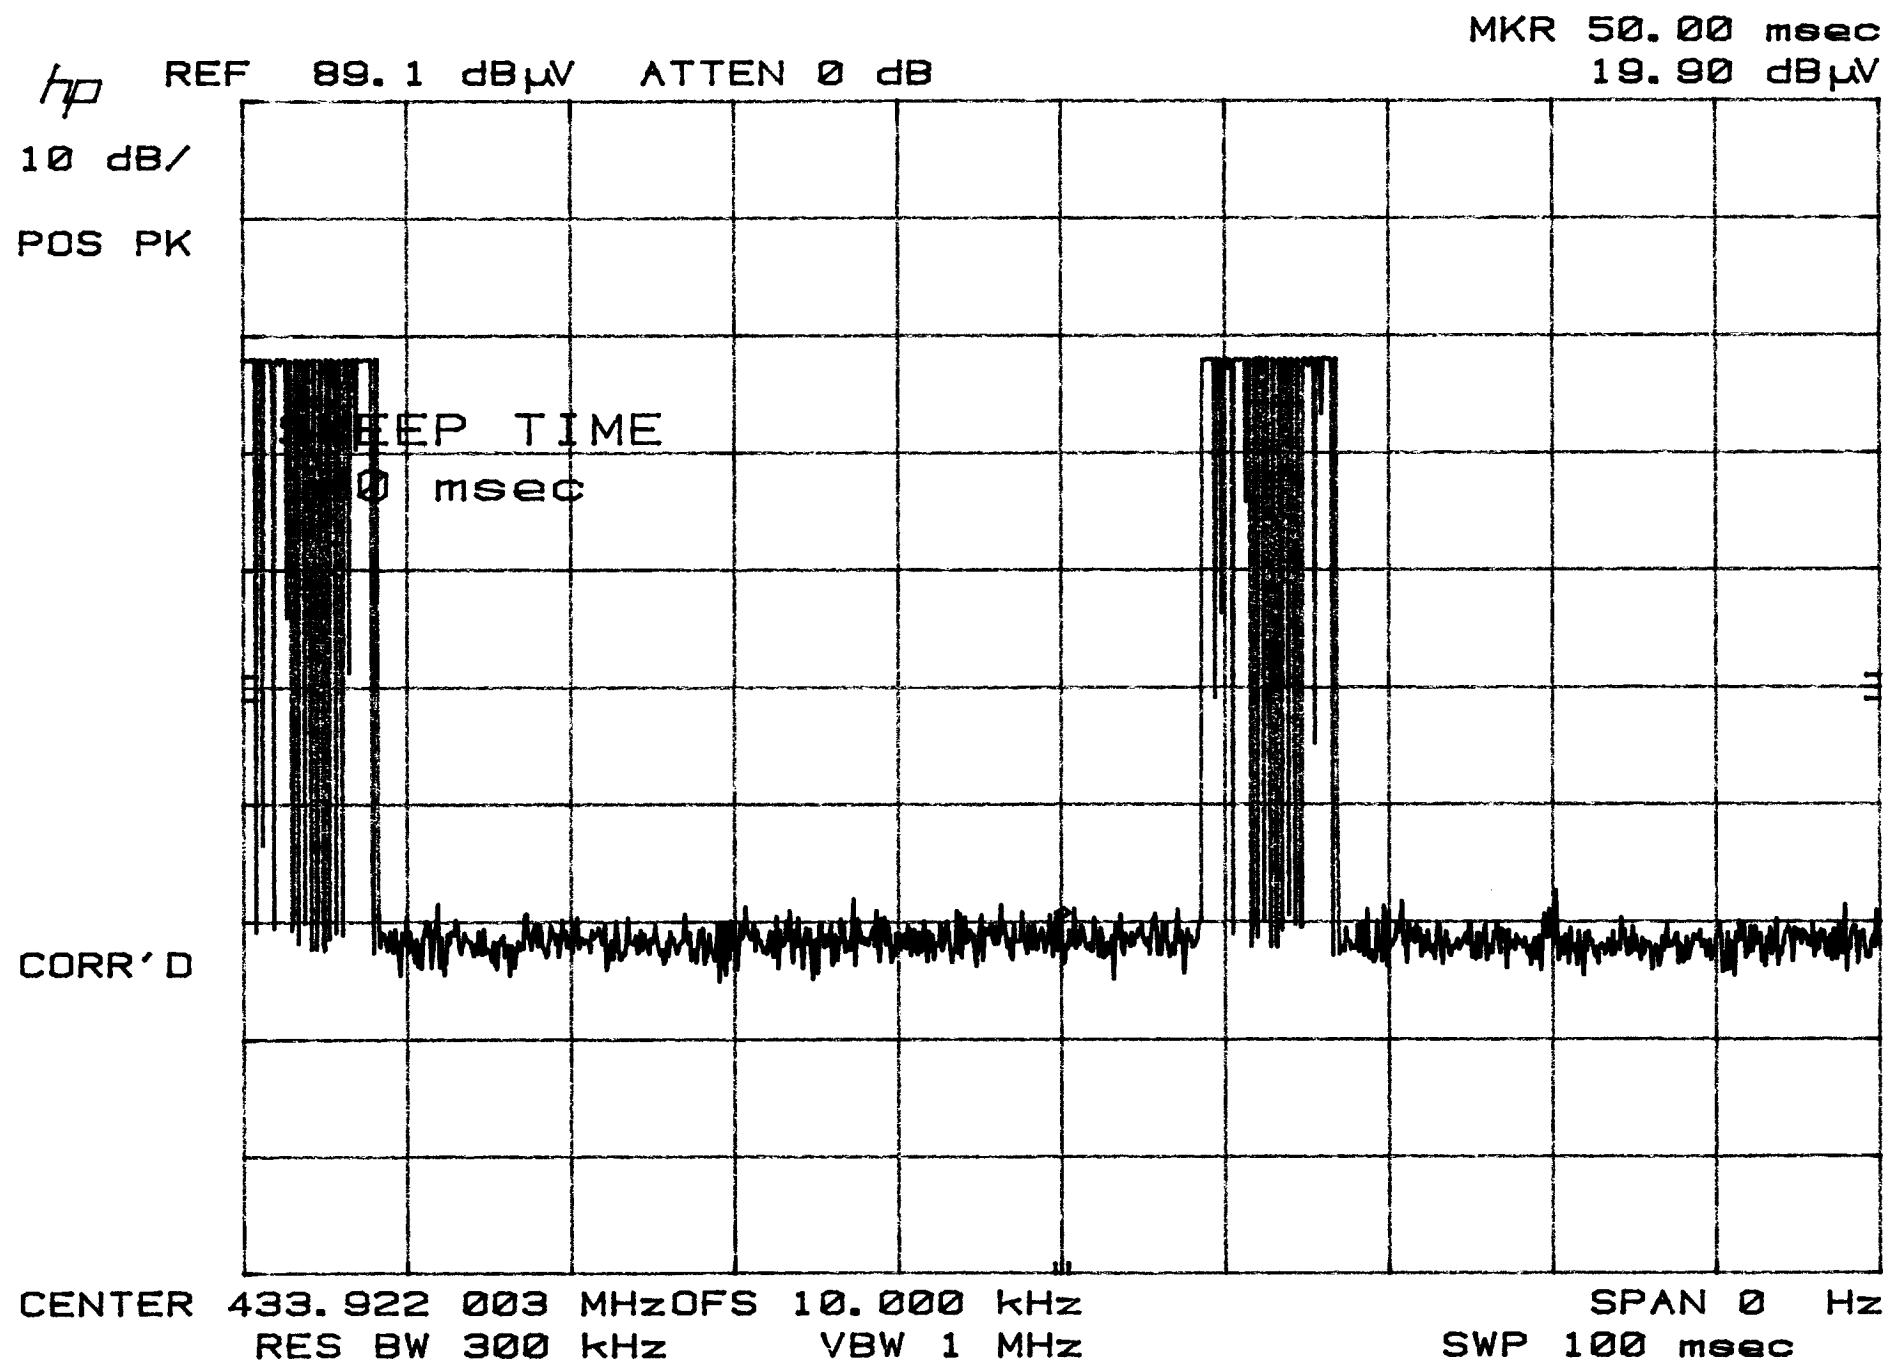

Appendix B

Constructional Data Form



File No. NC203528, Page B1 of B7

EMC Test Plan and Constructional Data Form

PLEASE COMPLETE THIS DOCUMENT IN FULL, ENTERING N/A IF THE FIELD IS NOT APPLICABLE.

Applicant -- NOTE: *This information will be input into your test report as shown below.
Press the F1 key at any time to get HELP for the current field selected.*

Company: AMERITEK INDUSTRIES, INC.

Address: 2420 NIAGARA LANE
PLYMOUTH, MN 55447

Contact: GARY HOONSBEEN Position: PRESIDENT

Phone: 763 475 7002 Fax: 763 475 2293

E-mail Address: GARY@ameritekindustries.com

General Equipment Description -- NOTE: *This information will be input into your test report as shown below.*

EUT Description 433.92 MHz Transmitter and Receiver

EUT Name 90-010

Model No.: GOLDEN RETRIEVER Serial No.: NONE

Product Options: NONE

Configurations to be tested: TRANSMITTER AND RECEIVER

Test Objective

| | |
|---|--|
| <input checked="" type="checkbox"/> EMC Directive 89/336/EEC (EMC) Std: _____ | <input checked="" type="checkbox"/> FCC: Class <input checked="" type="checkbox"/> A <input type="checkbox"/> B Part _____ |
| <input type="checkbox"/> Machinery Directive 89/392/EEC (EMC) Std: _____ | <input type="checkbox"/> VCCI: Class <input type="checkbox"/> A <input type="checkbox"/> B |
| <input type="checkbox"/> Medical Device Directive 93/42/EEC (EMC) Std: _____ | <input type="checkbox"/> BSMI: Class <input type="checkbox"/> A <input type="checkbox"/> B |
| <input type="checkbox"/> Vehicle Directive 72/245/EEC (EMC) Std: _____ | <input type="checkbox"/> Canada: Class <input type="checkbox"/> A <input type="checkbox"/> B |
| <input type="checkbox"/> FDA Reviewers Guidance for Premarket Notification Submissions (EMC) | <input type="checkbox"/> Australia: Class <input type="checkbox"/> A <input type="checkbox"/> B Other: _____ |

TÜV Product Service Certification Requested

| | |
|--|---|
| <input type="checkbox"/> Attestation of Conformity (AoC) | <input type="checkbox"/> EMC Certification (used with Octagon Mark) |
| <input type="checkbox"/> Certificate of Conformity (CoC) | <input type="checkbox"/> Compliance Document |

Protection Class (N/A for vehicles) Class I Class II Class III

(Press F1 when field is selected to show additional information on Protection Class.)

Attendance

Test will be: Attended by the customer Unattended by the customer

EMC Test Plan and Constructional Data Form

Failure - Complete this section if testing will not be attended by the customer.

If a failure occurs, TÜV Product Service should:

- Call contact listed above, if not available then stop testing. (After hrs phone): _____
- Continue testing to complete test series.
- Continue testing to define corrective action.
- Stop testing.

EUT Specifications and Requirements

Length: 9 inch Width: 6 inch Height: 3 inch Weight: 1 lb

Power Requirements

Regulations require testing to be performed at typical power ratings in the countries of intended use. (i.e., European power is typically 230 VAC 50 Hz or 400 VAC 50 Hz, single and three phase, respectively)

Voltage: Battery (If battery powered, make sure battery life is sufficient to complete testing.)

of Phases: _____

Current (Amps/phase(max)): _____ Current (Amps/phase(nominal)): _____

Other _____

Other Special Requirements

Typical Installation and/or Operating Environment

(ie. Hospital, Small Business, Industrial/Factory, etc.)

Industrial

EUT Power Cable

| | | | |
|--|----|-------------------------------------|---------------------------|
| <input type="checkbox"/> Permanent | OR | <input type="checkbox"/> Removable | Length (in meters): _____ |
| <input type="checkbox"/> Shielded | OR | <input type="checkbox"/> Unshielded | |
| <input checked="" type="checkbox"/> Not Applicable | | | |

EMC Test Plan and Constructional Data Form
EUT Interface Ports and Cables

| Type | Interface | | Qty | Shielding | | Termination | Connector Type | Port Termination | Length (in meters) | Removable | Permanent |
|--------------------------|--------------------------|-------------------------------------|-----|-------------------------------------|--------------------------|-----------------|----------------|------------------------|--------------------------|--------------------------|-------------------------------------|
| | Analog | Digital | | Yes | No | | | | | | |
| EXAMPLE: RS232 | <input type="checkbox"/> | <input checked="" type="checkbox"/> | 2 | <input checked="" type="checkbox"/> | <input type="checkbox"/> | Foil over braid | Coaxial | Metallized 9-pin D-Sub | Characteristic Impedance | 6 | <input checked="" type="checkbox"/> |
| NONE | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | | | | | <input type="checkbox"/> | <input type="checkbox"/> |
| | <input type="checkbox"/> | <input type="checkbox"/> | | <input type="checkbox"/> | <input type="checkbox"/> | | | | | <input type="checkbox"/> | <input type="checkbox"/> |

EMC Test Plan and Constructional Data Form

EUT Software.

Revision Level: A

Description:

Equipment Under Test (EUT) Operating Modes to be Tested -- list the operating modes to be used during test. It is recommended the equipment be tested while operating in a typical operation mode. FCC testing of personal computers and/or peripherals requires that a simple program generate a complete line of upper case H's. Provide a general description of all software, firmware, and PLD algorithms used in the equipment. List all code modules as described above, with the revision level used during testing. Consult with your TÜV Product Service Representative if additional assistance is required.

1. RECEIVER EMISSIONS
2. TRANSMITTER INTENTIONAL RADIATOR
- 3.

Equipment Under Test (EUT) System Components -- List and describe all components which are part of the EUT. For FCC testing a minimum configuration is required. (ie. Mouse, Printer, Monitor, External Disk Drive, Motherboard, etc.)

| Description | Model # | Serial # | FCC ID # |
|------------------------|---------|----------|----------|
| RECEIVER 433.92 MHx | | | |
| TRANSMITTER 433.92 MHz | | | |

EMC Test Plan and Constructional Data Form

Support Equipment -- List and describe all support equipment which is not part of the EUT. (i.e. peripherals, simulators, etc)

| Description | Model # | Serial # | FCC ID # |
|-------------|---------|----------|----------|
| NONE | | | |

Oscillator Frequencies

| Frequency | Derived Frequency | Component # / Location | Description of Use |
|------------|-------------------|------------------------|--------------------|
| 13.560 Mhz | 433.92 Mhz | PCB | TRANSMITTER |
| 422.20 Mhz | 422.20 Mhz | PCB | RECEIVER |
| | | | |
| | | | |
| | | | |
| | | | |

Power Supply

| Manufacturer | Model # | Serial # | Type |
|--------------|---------|----------|--|
| NONE | | | <input type="checkbox"/> Switched-mode: (Frequency) _____ <input type="checkbox"/> Linear <input type="checkbox"/> Other: _____ |
| | | | <input type="checkbox"/> Switched-mode: (Frequency) _____ <input type="checkbox"/> Linear <input type="checkbox"/> Other: _____ |

Power Line Filters

| Manufacturer | Model # | Location in EUT |
|--------------|---------|-----------------|
| NONE | | |
| | | |

EMC Test Plan and Constructional Data Form


Critical EMI Components (Capacitors, ferrites, etc.)

| Description | Manufacturer | Part # or Value | Qty | Component # / Location |
|-------------|--------------|-----------------|-----|------------------------|
| NONE | | | | |
| | | | | |
| | | | | |
| | | | | |

EMC Critical Detail -- Describe other EMC Design details used to reduce high frequency noise.

(PLEASE INSERT "ELECTRONIC SIGNATURE" BELOW IF POSSIBLE)

Authorization Signatures



10/31/02

Date

Customer authorization to perform tests
according to this test plan.

MAX HENDRICKSON

10/31/02

Date

Test Plan/CDF Prepared By (please print)

Reviewed by TÜV Product Service Associate

Date

Appendix C

MEASUREMENT PROTOCOL

GENERAL INFORMATION

Measurement Uncertainty

The test system for conducted emissions is defined as the LISN, tuned receiver or spectrum analyzer, and coaxial cable. The test system for radiated emissions is defined as the antenna, the pre-amplifier, the spectrum analyzer and the coaxial cable. These test systems have a measurement uncertainty of ± 4.5 dB. The equipment comprising the test systems are calibrated on an annual basis.

Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral into its characteristic impedance or left unterminated. When appropriate, the cables are manually manipulated with respect to each other to obtain maximum emissions from the unit.

CONDUCTED EMISSIONS

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

RADIATED EMISSIONS

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the spectrum analyzer (Level dB μ V), adding the antenna correction factor and cable loss factor (Factor dB) to it, then subtracting the preamp gain. This result then has the FCC limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets in Attachment A.

Example:

| FREQ (MHz) | LEVEL (dB μ V) | CABLE/ANT/PREAMP (dB) | FINAL (dB μ V/m) | POL/HGT/AZ (m) (deg) | DELTA1 LIMIT |
|---------------|-----------------------|--------------------------|-------------------------|-------------------------|-----------------|
| 60.80 | 42.5Qp | + 1.2 + 10.9 - 25.5 = | 29.1 | V 1.0 0.0 - | -10.9 |

DETAILS OF TEST PROCEDURES

General Standard Information

The test methods used comply with ANSI C63.4-1992 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

Conducted Emissions

Conducted emissions on the 60 Hz power interface of the EUT are measured in the frequency range of 450 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection, and a Line Impedance Stabilization Network (LISN), with $50\ \Omega/50\ \mu\text{H}$ (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. In some cases, a pre-scan using a spectrum analyzer is initially performed on the units comprising the system under test to locate the highest emissions. If the minimum passing margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver or spectrum analyzer with quasi-peak and average detection and recorded on the data sheets.

Radiated Emissions

Radiated emissions from the EUT are measured in the frequency range of 30 to 4400 MHz using a spectrum analyzer and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection and measurements above 1000 MHz are made with a 1 MHz/6 dB bandwidth and peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimeters above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Interface cables that are closer than 40 centimeters to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimeters from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna is positioned 3 meters horizontally from the EUT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarizations and the EUT are rotated 360 degrees. Intentional radiators are rotated through three orthogonal axes to determine the attitude that maximizes the emissions.