


HIGH CHANNEL

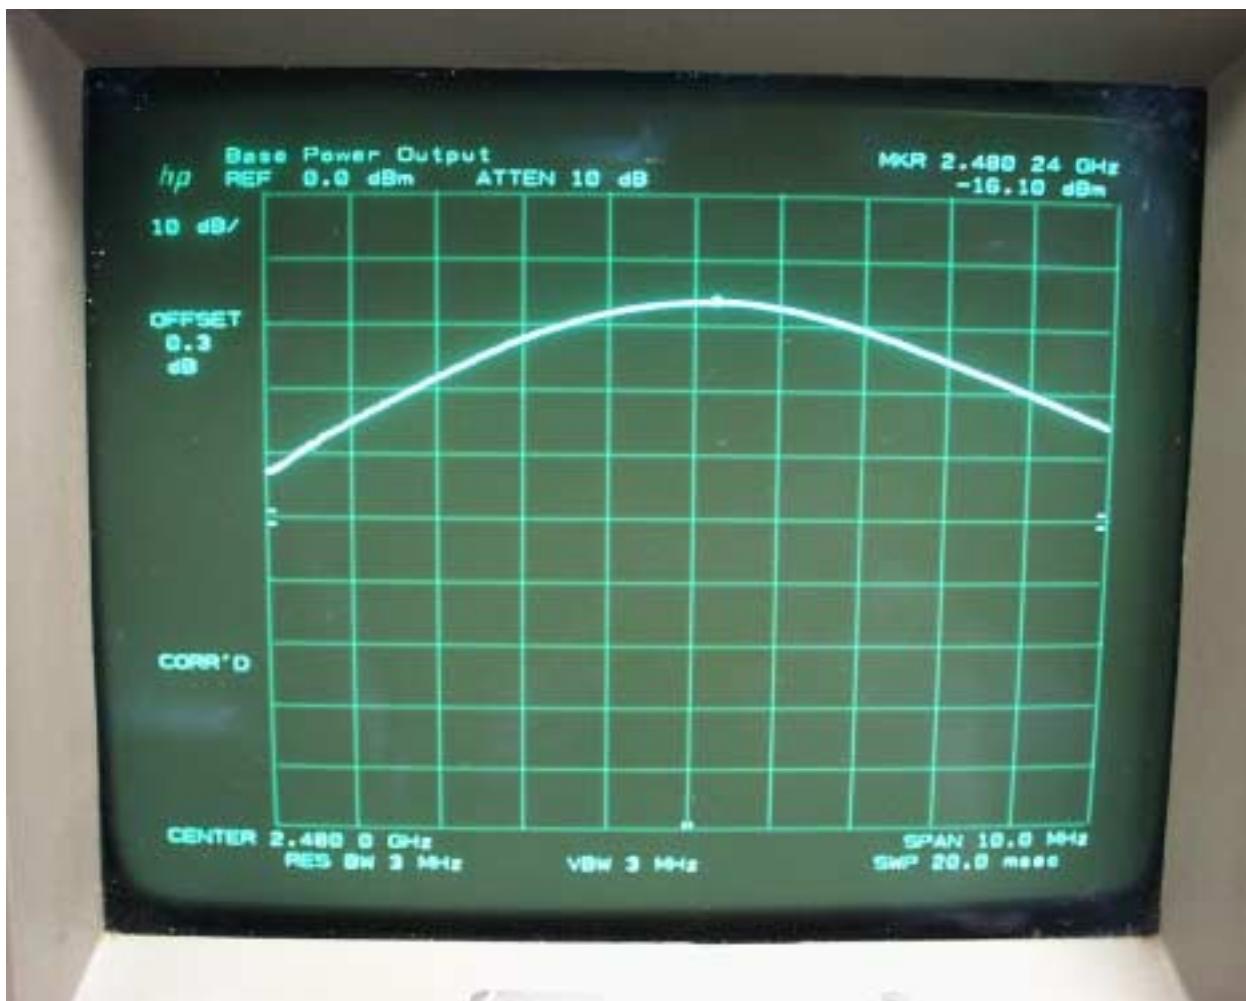


9.6. CONDUCTED SPURIOUS EMISSION

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
30 - 24000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 100 kHz	<input checked="" type="checkbox"/> 100 kHz




TEST PROCEDURE

Connect the Eut's antenna port to the Spectrum Analyzer's input port.
Investigate the entire frequency of the carrier frequency, up to the tenth harmonic.

RESULT


No non-compliance noted. See below plots for LOW, MID, and HIGH channels.

LOW CHANNEL

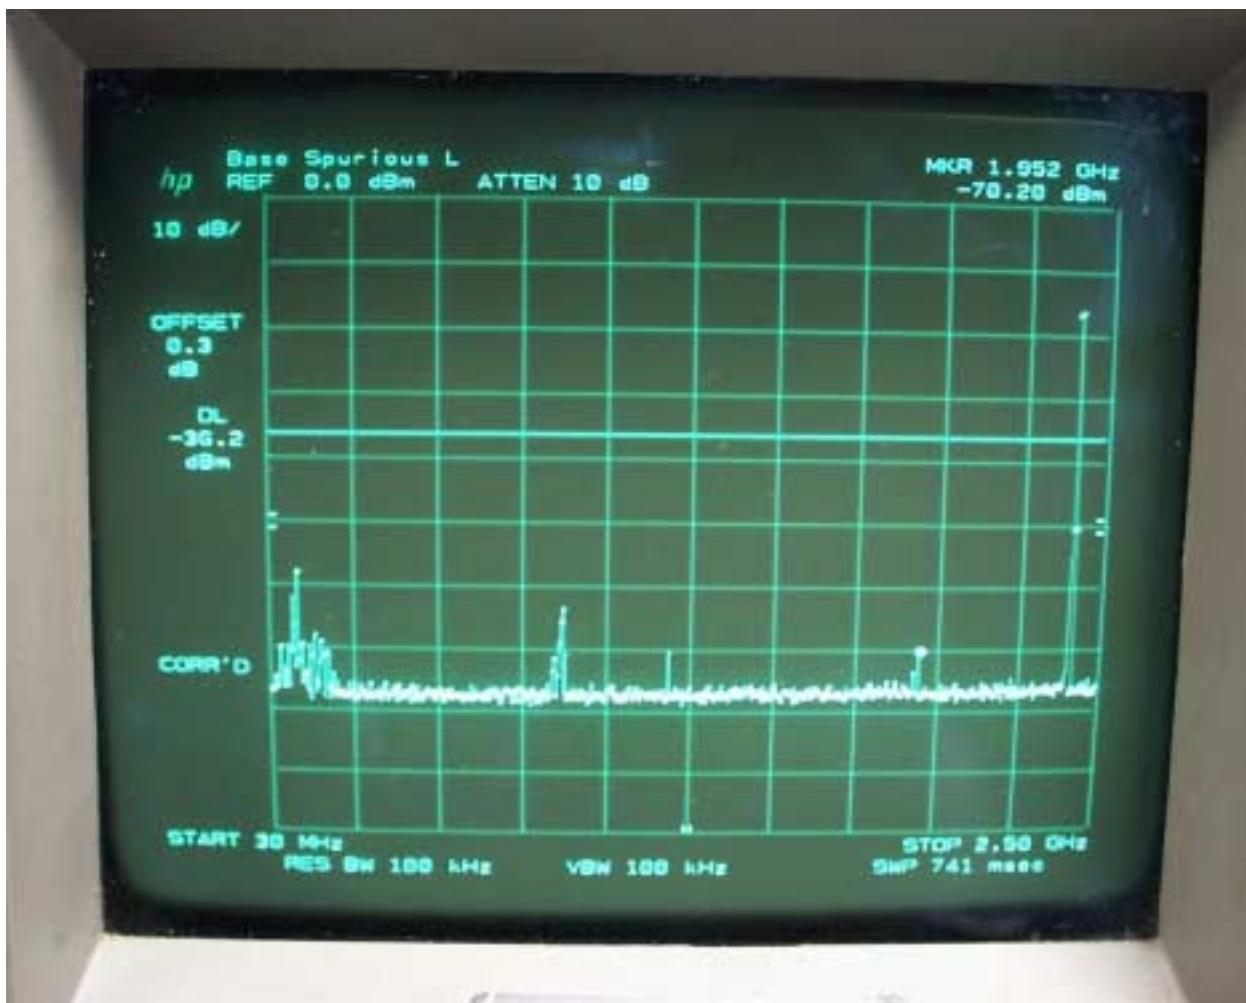


FREQUENCY RANGE 30 – 2500 MHz

LOW CHANNEL

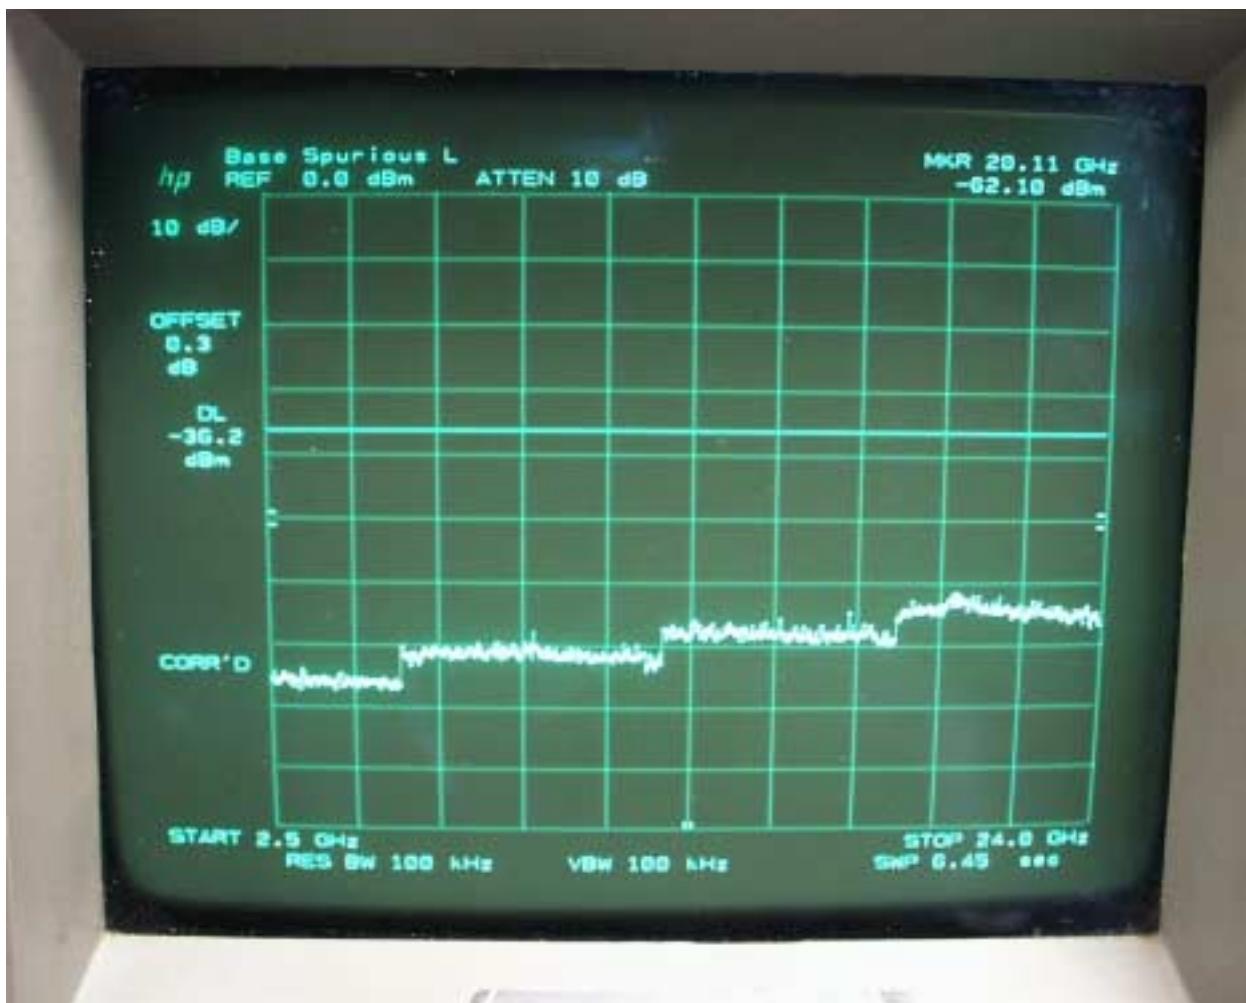


FREQUENCY RANGE 2.5 – 24 GHz

MID CHANNEL

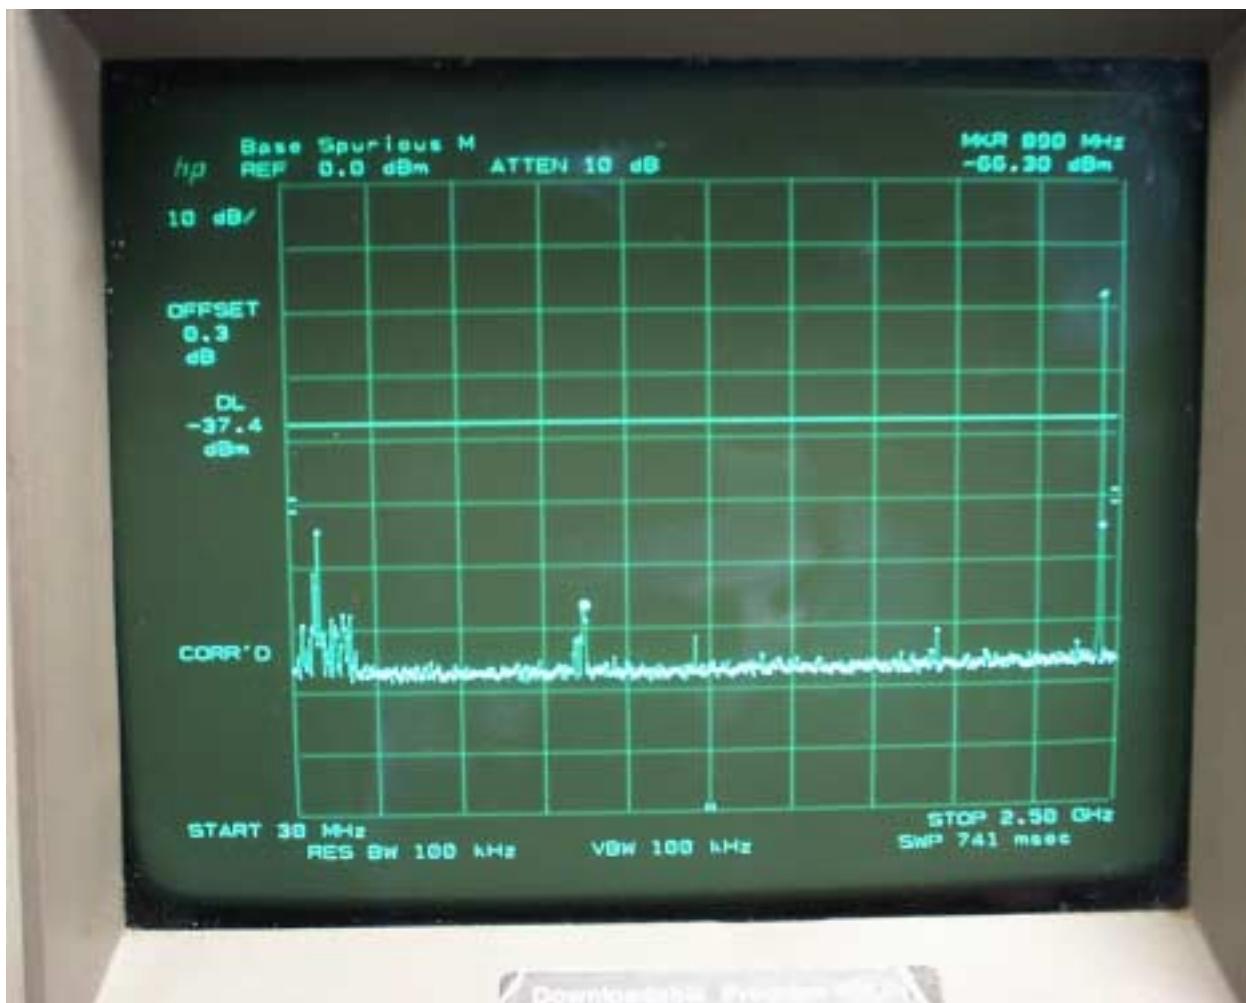


FREQUENCY RANGE 30 – 2500 MHz

MID CHANNEL

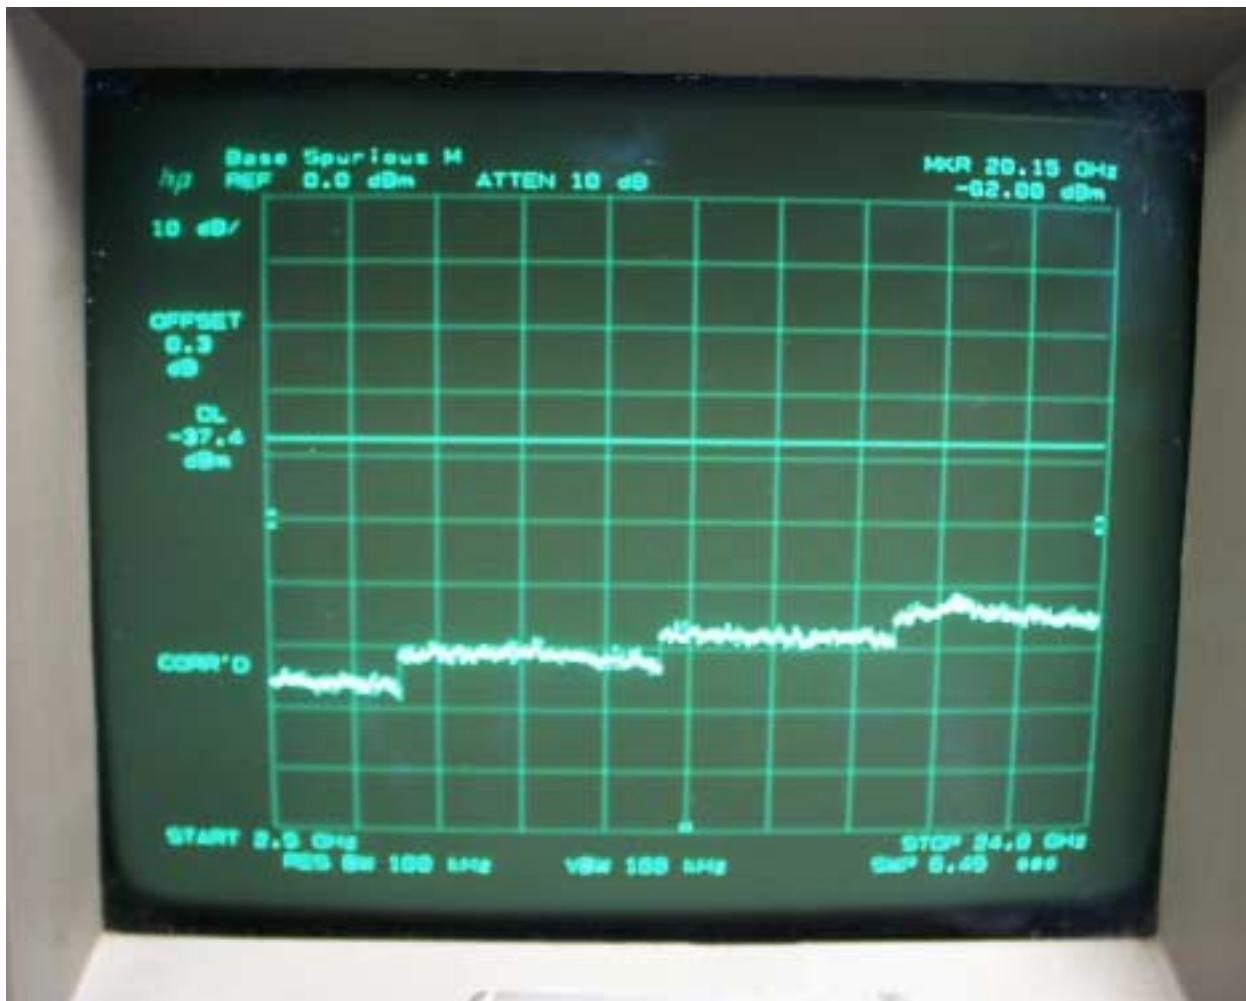

FREQUENCY RANGE 2.5 – 24 GHz

HIGH CHANNEL

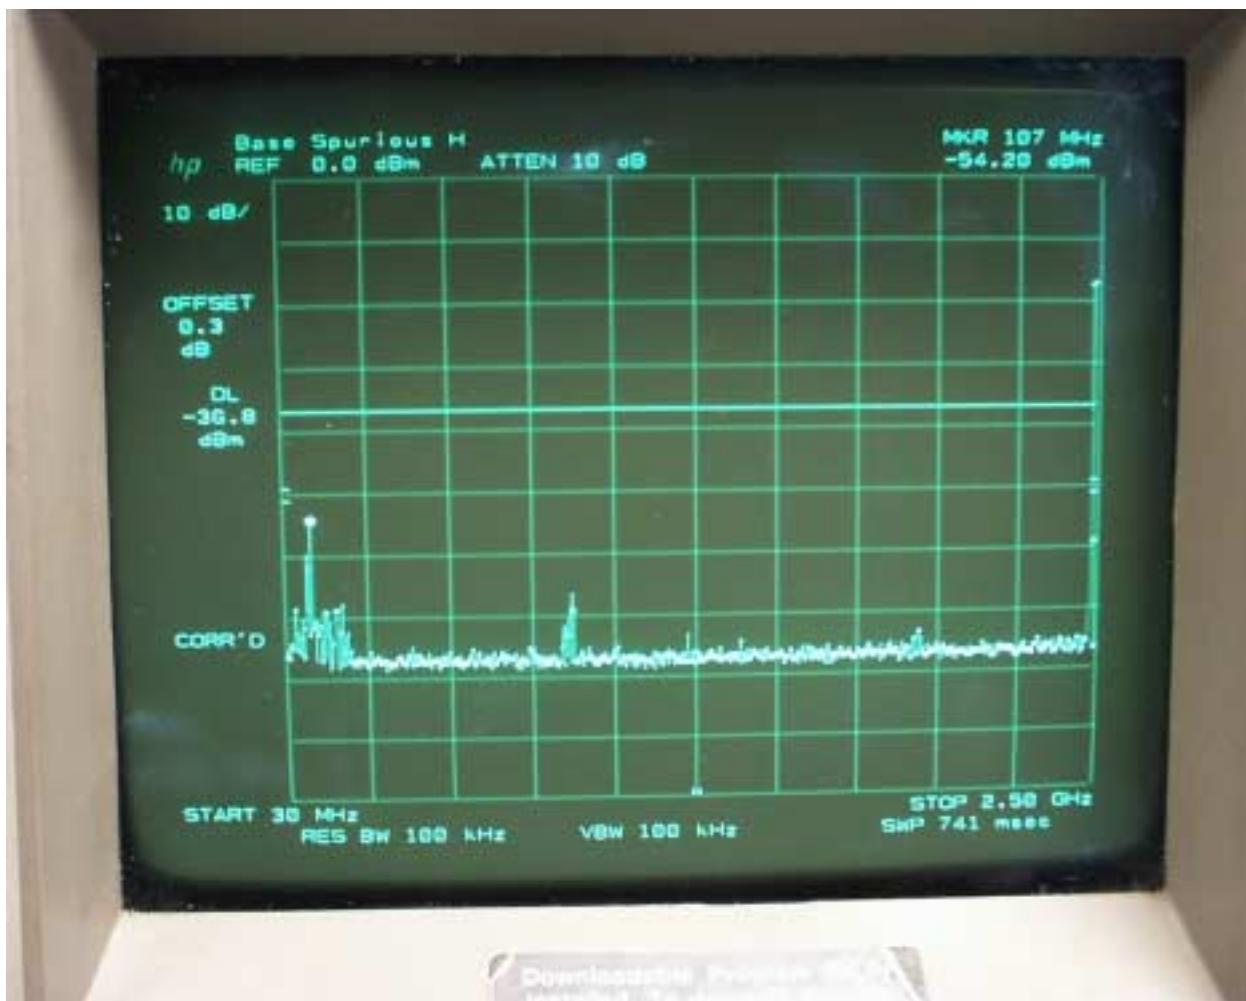

FREQUENCY RANGE 30 – 2500 MHz

HIGH CHANNEL




FREQUENCY RANGE 2.5 – 24 GHz

9.7. RESTRICTED BAND EDGE MEASUREMENT

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
Above 1000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 100 KHz	<input checked="" type="checkbox"/> 100 KHz



TEST PROCEDURE

Connect the Eut's antenna port to the Spectrum Analyzer's input port. The Resolution and Video bandwidth was set to 100 kHz. Set the Display Line 20 dB down from the carrier. Investigated at bottom end, 2390 MHz, and top end, 2483.5 MHz.

RESULT

No non-compliance noted. See plots below.

BANDEDGE @ LOW CHANNEL



BANDEDGE @ HIGH CHANNEL




9.8. PEAK POWER SPECTRAL DENSITY

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
Above 1000	<input checked="" type="checkbox"/> Peak	<input checked="" type="checkbox"/> 3 kHz	<input checked="" type="checkbox"/> 3 kHz




TEST PROCEDURE

Connect the Eut's antenna port to the Spectrum Analyzer's input port. The bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 3 kHz VBW, set sweep time=span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.


Result:

No non-compliance noted. See plot below.


LOW CHANNEL

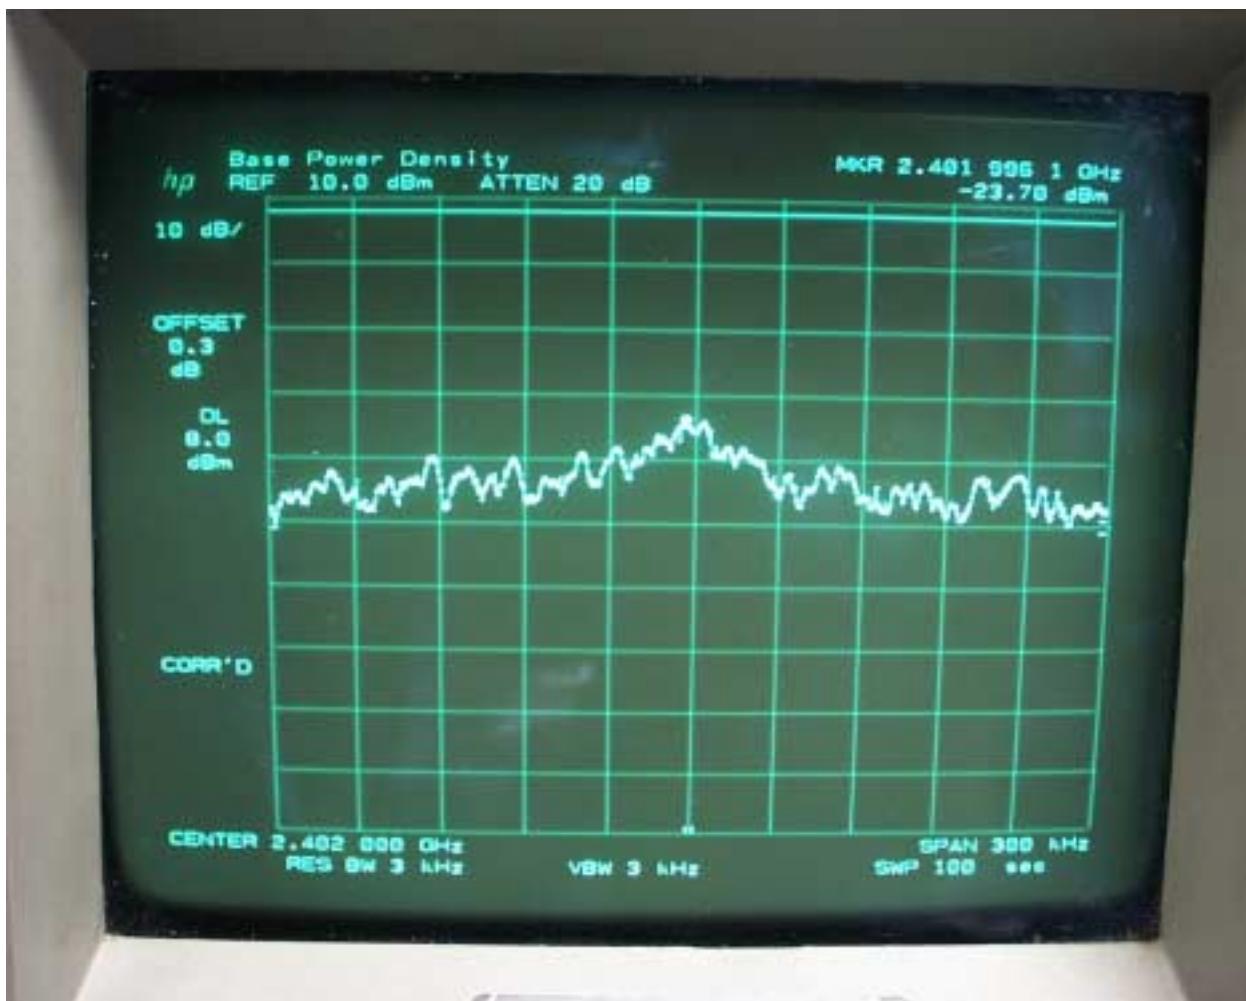

MID CHANNEL

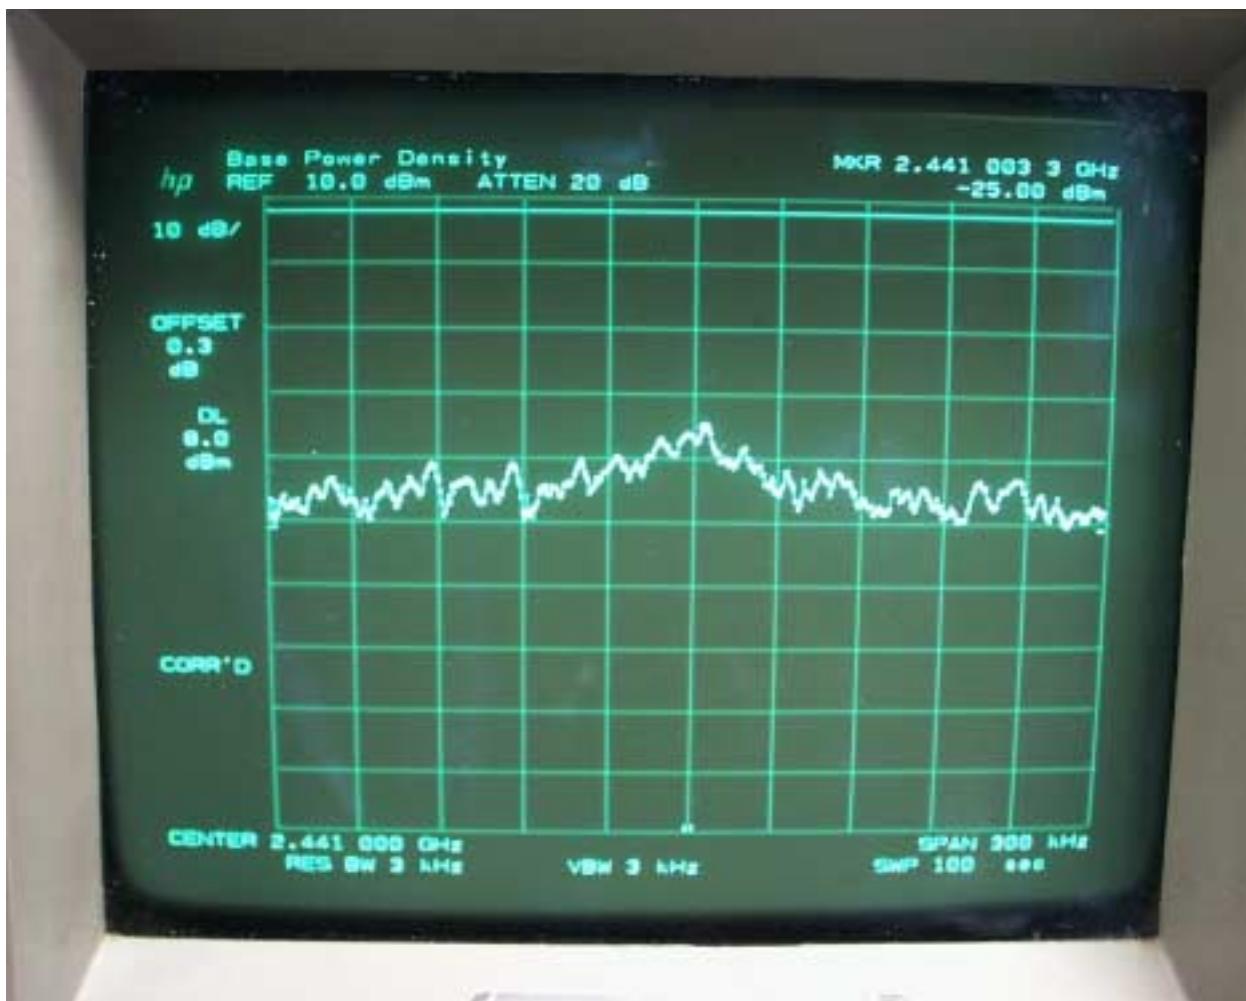

HIGH CHANNEL

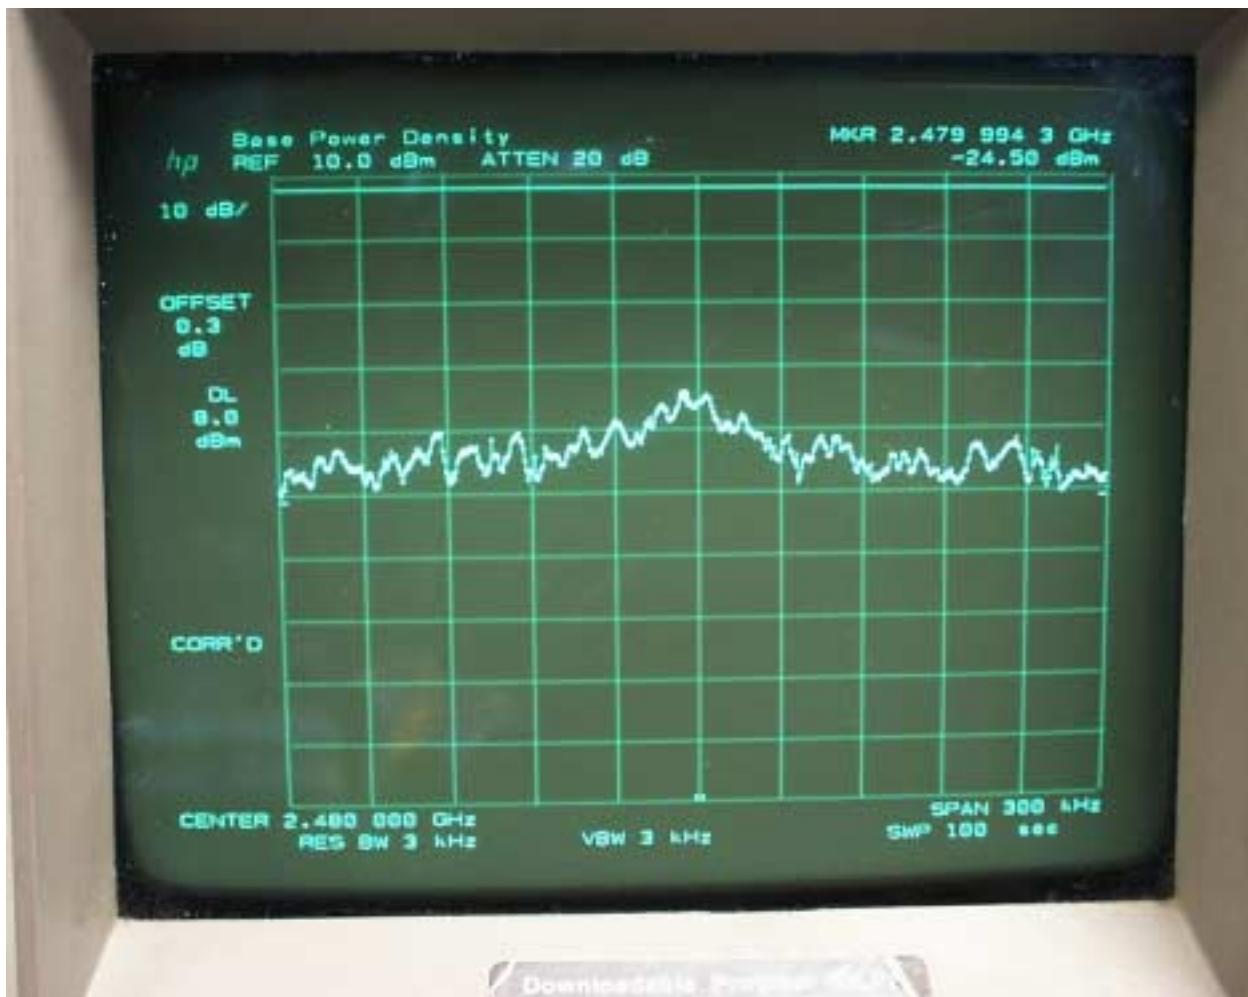

9.9. RADIATED EMISSION

9.9.1. RADIATED EMISSION AND RESTRICTED BANDS

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
30 to 1000	<input checked="" type="checkbox"/> Peak <input checked="" type="checkbox"/> Quasi Peak	<input checked="" type="checkbox"/> 100 KHz <input checked="" type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 100 KHz <input checked="" type="checkbox"/> 1 MHz
Above 1000	<input checked="" type="checkbox"/> Peak <input checked="" type="checkbox"/> Average	<input checked="" type="checkbox"/> 1 MHz	<input checked="" type="checkbox"/> 1 MHz <input checked="" type="checkbox"/> 10 Hz

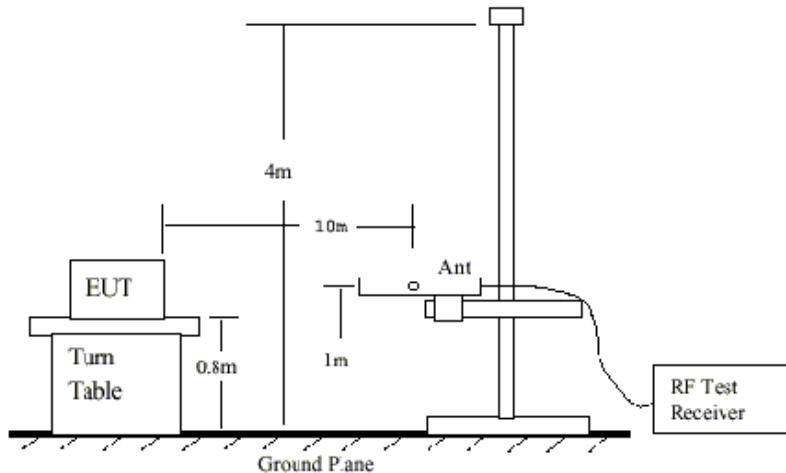


Fig 1: Radiated Emission Measurement 30 to 1000 MHz

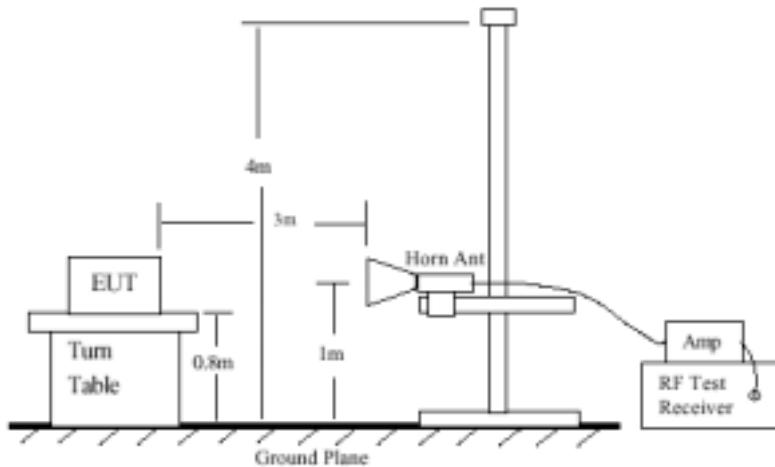


Fig 2: Radiated Emission Above 1000 MHz

TEST PROCEDURE

1. The EUT was placed on the turntable 0.8 meter above ground in 3 meter open area test site.
2. Set the resolution bandwidth to 100KHz in the test receiver and select Peak function to scan the frequency below 1 GHz.
3. Shift the interference-receiving antenna located in antenna tower upwards and downward between 1 and 4 meters above ground and find out the local peak emission on frequency domain.
4. Locate the interference-receiving antenna at the position where the local peak reach the maximum emission.
5. Rotate the turntable and stop at the angle where the measurement device has maximum reading.
6. Shift the interference-receiving antenna again to detect the maximum emission of the local peak.
7. If the reading of the local peak under Peak function is lower than limit by 6dB, then Quasi Peak detection is not needed and this reading should be recorded. And if it is higher than Peak limit, then the test is fail. Others, switch the receiver to Quasi Peak

function, set the resolution bandwidth to 100kHz and repeat the procedures (3)~(6). If the reading is lower than limit, this reading should be recorded, otherwise the test is fail.

8. Set the resolution and video bandwidth of the spectrum analyzer to 1MHz and repeat procedures (3)~(6) for frequency band from 1 GHz to 10 times carrier frequency.

9. If the reading for the local peak is lower than the Average limit, no further testing is needed in this local peak and this reading should be recorded. If it is higher than Average limit but lower than Peak limit, then set the resolution bandwidth to 1MHz and video bandwidth to 10Hz. Repeat procedures (3)~(6). If the maximum reading is lower than Average limit, then this reading should be recorded. If it is higher, then the test is fail.

RESULT

No non-compliance noted. See data below.

 COMPLIANCE Certification Services		<p>Project #: 02U1331-1 Report #: 020716B1 Date & Time: 07/16/02 9:32 AM Test Engr: KERWIN CORPUZ</p>									
<p>FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP</p> <p>561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888</p> <p>Company: WICOS CO., LTD. EUT Description: WIRELESS BLUETOOTH HEADSET-BASE(M/N: WICOS201AG) Test Configuration : EUT ONLY Type of Test: FCC CLASS B Mode of Operation: STANDBY</p>											
<< Main Sheet											
Freq. (MHz)	Reading (dBuV)	AF (dB)	Closs (dB)	Pre-amp (dB)	Level (dBuV/m)	Limit FCC_B	Margin (dB)	Pol (H/V)	Az (Deg)	Height (Meter)	Mark (P/Q/A)
117.96	42.10	11.70	2.34	29.51	26.64	43.50	-16.86	3mV	0.00	1.00	P
132.70	41.40	11.37	2.45	29.46	25.75	43.50	-17.75	3mV	0.00	1.00	P
44.23	39.20	10.74	1.66	29.68	21.92	40.00	-18.08	3mV	0.00	1.00	P
58.98	41.70	5.77	1.87	29.64	19.69	40.00	-20.31	3mV	0.00	1.00	P
169.56	40.00	9.56	2.74	29.31	22.98	43.50	-20.52	3mV	0.00	1.00	P
73.72	40.50	6.07	2.01	29.62	18.96	40.00	-21.04	3mV	0.00	1.00	P
6 Worst Data											

COMPLIANCE CERTIFICATION SERVICES, INC.

Radiated Emissions
FCC 15.205

07/15/02
Kerwin Corpuz
A-site (1.0 Meter)

WICOS CO., LTD.

BLUETOOTH BASE SET (M/N: WICOS201AG)

fo = 2402 MHz (low channel)

TX/RX mode

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	TOTAL (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4804V	53.2	44.4	33.4	4	36	9.54	1	46.06	37.26	74	54	-27.9	-16.7
4804H	56.2	46.1	33.4	4	36	9.54	1	49.06	38.96	74	54	-24.9	-15
7206*	45.3	36.4	37.3	5	36.2	9.54	1	42.86	33.96	74	54	-31.1	-20
9608*	45.6	36.4	38.1	5.9	35.7	9.54	1	45.36	36.16	74	54	-28.6	-17.8
12010*	47.2	36.6	39.3	6.5	36.5	9.54	1	47.96	37.36	74	54	-26	-16.6
14412*	49.7	39.3	41.2	7.5	38.4	9.54	1	51.46	41.06	74	54	-22.5	-12.9
16814*	51.6	40.6	42	8.5	38.6	9.54	1	54.96	43.96	74	54	-19	-10
19216*	52	40.5	32	9.4	39.5	9.54	1	45.36	33.86	74	54	-28.6	-20.1
21618*	53.8	42.3	32.7	10.2	38.5	9.54	1	49.66	38.16	74	54	-24.3	-15.8
24020*	54.1	42.7	33.4	11.1	39.4	9.54	1	50.66	39.26	74	54	-23.3	-14.7

fo = 2441 MHz (mid channel)

TX/RX mode

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	TOTAL (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4882V	52.4	44.9	33.4	4	36	9.54	1	45.26	37.76	74	54	-28.7	-16.2
4882H	53.9	45.2	33.4	4	36	9.54	1	46.76	38.06	74	54	-27.2	-15.9
7323*	45.3	36.4	37.3	5	36.2	9.54	1	42.86	33.96	74	54	-31.1	-20
9764*	45.6	36.4	38.1	5.9	35.7	9.54	1	45.36	36.16	74	54	-28.6	-17.8
12205*	47.2	36.6	39.3	6.5	36.5	9.54	1	47.96	37.36	74	54	-26	-16.6
14646*	49.7	39.3	41.2	7.5	38.4	9.54	1	51.46	41.06	74	54	-22.5	-12.9
17087*	51.6	40.6	42	8.5	38.6	9.54	1	54.96	43.96	74	54	-19	-10
19528*	52	40.5	32	9.4	39.5	9.54	1	45.36	33.86	74	54	-28.6	-20.1
21969*	53.8	42.3	32.7	10.2	38.5	9.54	1	49.66	38.16	74	54	-24.3	-15.8
24410*	54.1	42.7	33.4	11.1	39.4	9.54	1	50.66	39.26	74	54	-23.3	-14.7

fo = 2480 MHz (high channel)

TX/RX mode

FREQ (MHz)	READING (dBuV)		AF (dB)	CL (dB)	AMP (dB)	DIST (dB)	HPF (dB)	TOTAL (dBuV/m)		LIMIT (dBuV/m)		MARGIN (dB)	
	Pk	Avg						Pk	Avg	Pk	Avg	Pk	Avg
4960V	49.1	40.2	33.4	4	36	9.54	1	41.96	33.06	74	54	-32	-20.9
4960H	50	40.7	33.4	4	36	9.54	1	42.86	33.56	74	54	-31.1	-20.4
7440*	45.3	36.4	37.3	5	36.2	9.54	1	42.86	33.96	74	54	-31.1	-20
9920*	45.6	36.4	38.1	5.9	35.7	9.54	1	45.36	36.16	74	54	-28.6	-17.8
12400*	47.2	36.6	39.3	6.5	36.5	9.54	1	47.96	37.36	74	54	-26	-16.6
14880*	49.7	39.3	41.2	7.5	38.4	9.54	1	51.46	41.06	74	54	-22.5	-12.9
17360*	51.6	40.6	42	8.5	38.6	9.54	1	54.96	43.96	74	54	-19	-10
19840*	52	40.5	32	9.4	39.5	9.54	1	45.36	33.86	74	54	-28.6	-20.1
22320*	53.8	42.3	32.7	10.2	38.5	9.54	1	49.66	38.16	74	54	-24.3	-15.8
24800*	54.1	42.7	33.4	11.1	39.4	9.54	1	50.66	39.26	74	54	-23.3	-14.7

Spot check X, Y and Z axis; worst position @ Z axis.

NOTE: * Measured noise floor (worse case vertical), horizontal (H) and vertical (V)

DIST: extrapolate reading from 3m specification distance to 1m measurement distance = **-9.54dB**

AF: Antenna Factor


AMP: Pre-amp gain

CL: SMA cable loss (12ft)


HPF: FSY High pass filter insertion loss (4.57GHz; S/N:003)

RESTRICTED BANDEDGE: 2310 – 2390 MHz and 2483.5 – 2500 MHz

BOTTOM BANDEDGE @ LOW CHANNEL

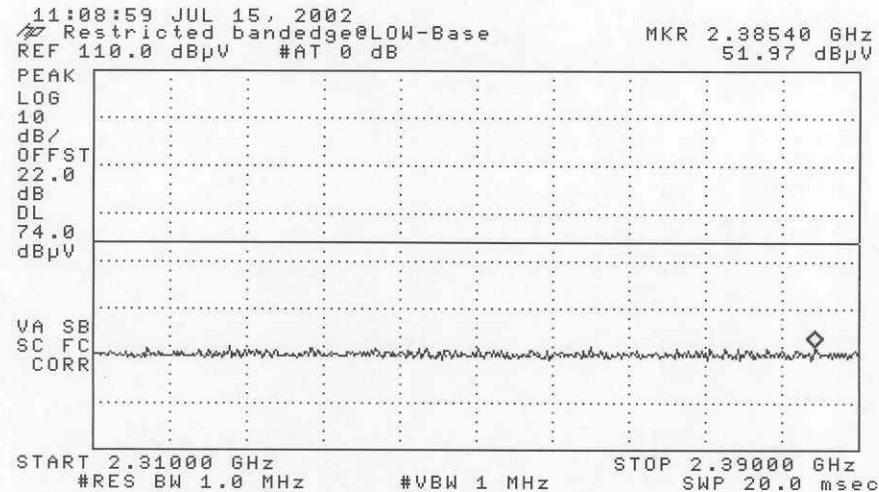


Peak measurement

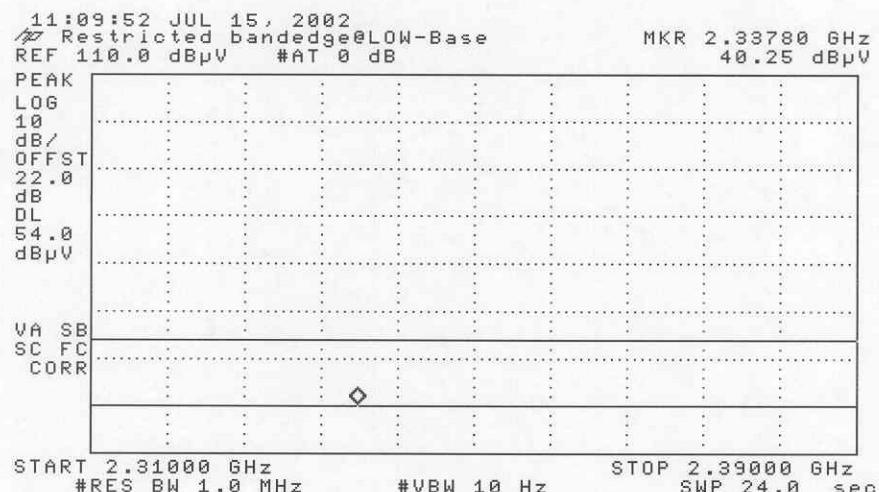


Average measurement

TOP BANDEDGE @ HIGH CHANNEL

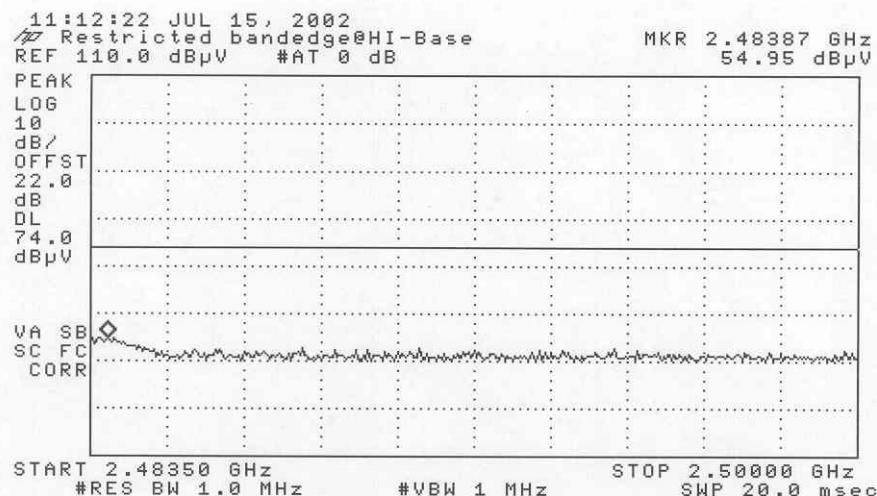


Peak measurement

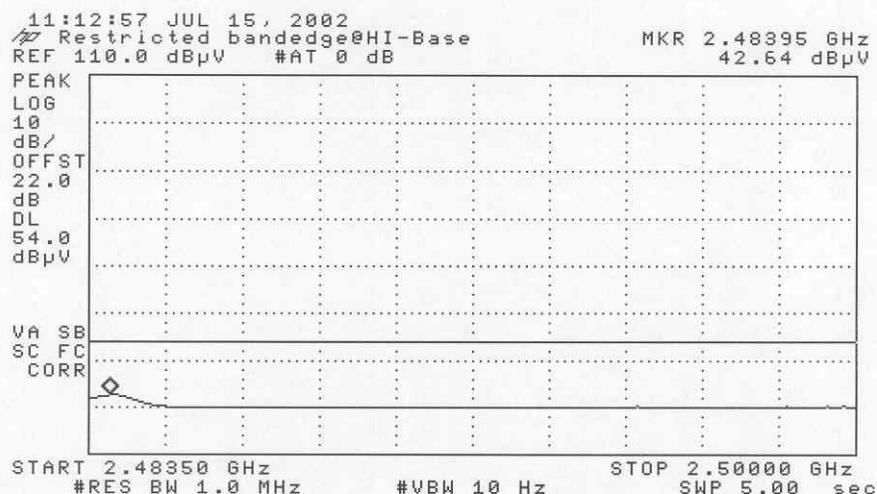


Average
measurement

BOTTOM BANDEDGE @ HOPPING CHANNEL

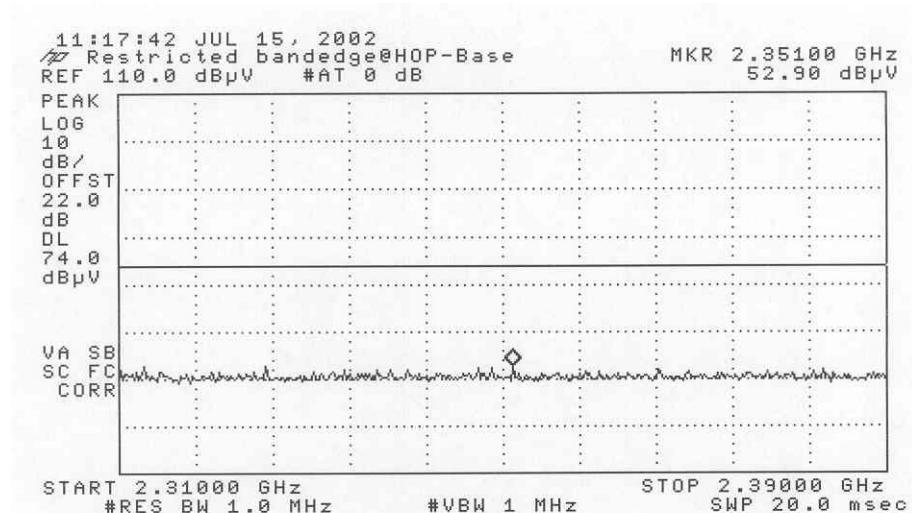


Peak measurement

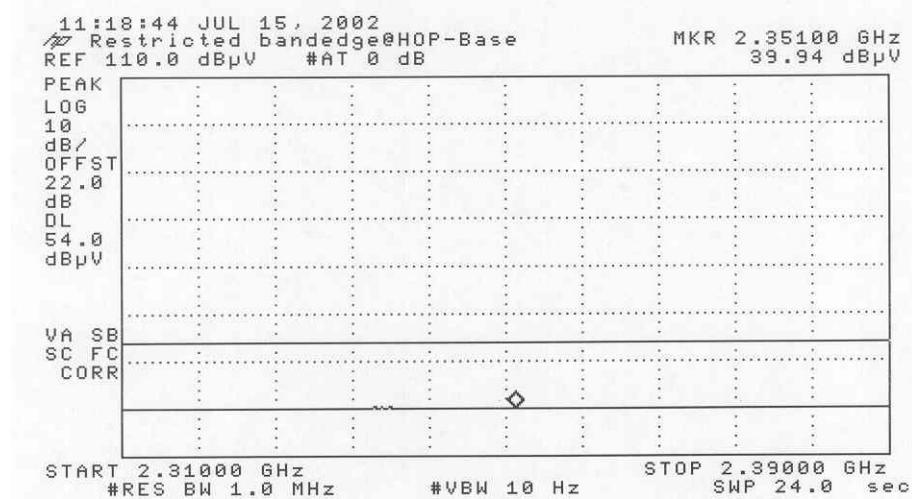


Average
measurement

TOP BANDEDGE @ HOPPING CHANNEL

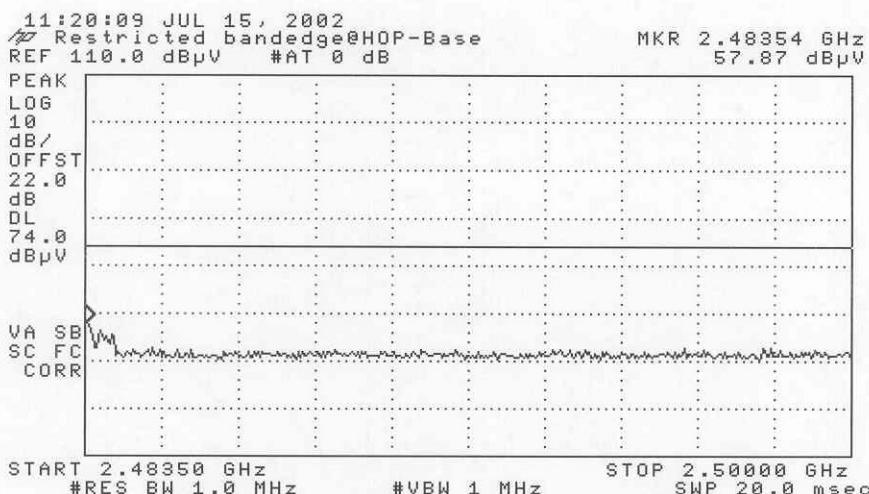

Peak measurement

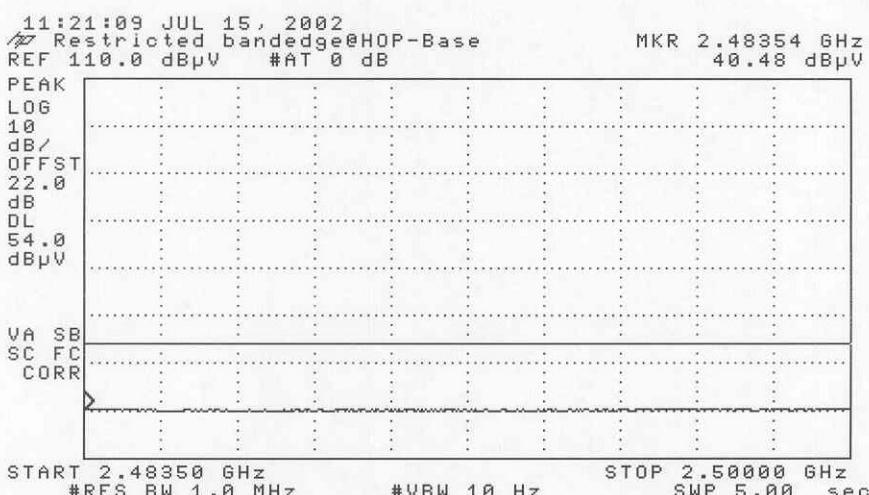


Average measurement

9.10. POWER LINE CONDUCTED EMISSION

TEST SETUP

Detector Function Setting of Test Receiver

Frequency Range (MHz)	Detector Function	Resolution Bandwidth	Video Bandwidth
450 KHz to 30 MHz	<input type="checkbox"/> Peak <input checked="" type="checkbox"/> Quasi Peak	<input checked="" type="checkbox"/> 10 KHz	<input checked="" type="checkbox"/> 10 KHz

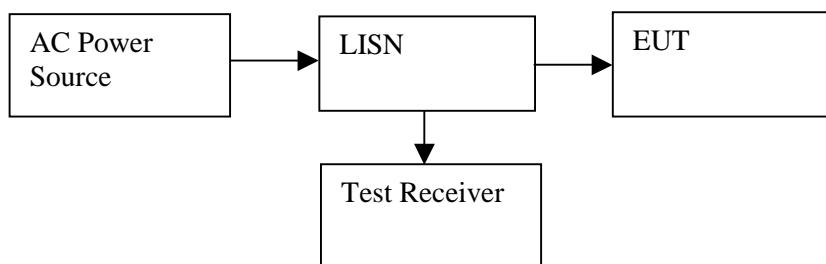

TEST PROCEDURE

1. The EUT was placed on a wooden table 80 cm above the horizontal ground plane and 40 cm away from the vertical ground plane. The EUT was set to transmit / receive in a continuous mode.
2. Conducted disturbance was measured between the phase lead and the ground, and between the neutral lead and the ground. The frequency 0.450 - 30 MHz was investigated.

RESULT

EUT does not required 15.207 test. EUT is a battery powered unit.

9.11. SETUP PHOTOS

Radiated Emission below 1 GHz measurement



Z axis (worst position)



Y axis



X axis

Radiated Emission above 1 GHz measurement



Z axis (worst position)



Y axis



X axis

Radiated Emission above 18 GHz measurement @ Z axis (worst position)



END OF REPORT