

**PERSONAL COMMUNICATIONS SECTOR****PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY****EMC TEST REPORT****Test Report Number** – 11714-1**Report Date** – August 28, 2003

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature

A handwritten signature in blue ink that reads "Michael E. Hill".

Name: Michael E. HillTitle: Senior Electrical EngineerDate : 2003-08-28

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 1846-01



Table of Contents

| Description | Page |
|---|------|
| Test Report Details | 4 |
| Applicable Standards | 4 |
| Summary of Testing | 5 |
| General and Special Conditions | 5 |
| Equipment and Cable Configurations | 6 |
| Measuring Equipment and Calibration Information | 6 |
| Measurement Procedures and Data | |
| RF Power Output | 7 |
| Radiated Power (ERP) | 8 |
| Occupied Bandwidth | 9 |
| GSM 1900 Occupied Band Plot | 10 |
| GSM 1900 Reference Plot | 10 |
| GSM 1900 Lower Band Edge | 11 |
| GSM 1900 Upper Band Edge | 11 |
| GSM 1900 A Min Block Edge | 12 |
| GSM 1900 A Max Block Edge | 12 |
| GSM 1900 B Min. Block Edge | 13 |
| GSM 1900 B Max Block Edge | 13 |
| GSM 1900 C, C2, C3 Min. Block Edge | 14 |
| GSM 1900 C Max Block Edge | 14 |
| GSM 1900 C1 Min Block Edge | 15 |
| GSM 1900 C1 Max Block Edge | 15 |
| GSM 1900 C3 Max Block Edge | 16 |
| GSM 1900 C4 Max/C5 Min Block Edge | 16 |
| GSM 1900 C4 Max Block Edge | 17 |
| GSM1900 C5 Min Block Edge | 17 |
| GSM 1900 C5 Max Block Edge | 18 |
| GSM 1900 D Min. Block Edge | 18 |
| GSM 1900 D Max Block Edge | 19 |
| GSM 1900 E Min. Block Edge | 19 |
| GSM 1900 E Max Block Edge | 20 |
| GSM 1900 F Min. Block Edge | 20 |
| GSM 1900 F Max Block Edge | 21 |
| Spurious Emissions at Antenna Terminals | 22 |
| GSM 1900 Tabular and Graphical Data | 23 |
| Field Strength of Spurious Emissions | 24 |
| GSM 1900 Tabular and Graphical Data | 25 |
| Frequency Stability | 26 |
| GSM 1900 Tabular and Graphical Data | 27 |

| | |
|---|----|
| Field Strength of Spurious Emissions From Unintentional Radiators | 28 |
| GSM 1900 Tabular and Graphical Data | 29 |
| Appendix A - Radiated Emissions Test Setup Photos | |
| Figure A.1 – Radiated Emissions Measurement | 30 |
| Figure A.2 – Substitution Measurement | 30 |

Test Report Details

Tests Performed By: Motorola Personal Communications Sector
Product Safety and Compliance Group
600 North US Hwy 45
Libertyville, IL 60048
PH (847) 523-6167 Fax (847) 523-4538
Motorola PCS FRN: 0004321311
FCC Registration Number: 316588
Industry Canada Number: IC3908

Tests Requested By: Motorola Inc.
Personal Communications Sector
600 North US Hwy 45
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: GSM 1900

Model Number: SUG3561AA

Serial Numbers: 330005171, 330005174, 330005207

Testing Complete Date: August 27, 2003

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- Part 15 Subpart B – Unintentional Radiators
- Part 22 Subpart H - Public Mobile Services
- Part 24 - Personal Communications Services
- Part 90 - Private Land Mobile Radio Service

Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, ANSI 63.4 2001, RSS-118 (AMPS), RSS-128 (TDMA), RSS-129 (CDMA), RSS-133 (PCS)

Summary of Testing

| Test # | Test Name | Pass/Fail |
|--------|---|-----------|
| 1 | RF Power Output | NA |
| 2 | ERP (Effective Radiated Power) | NA |
| 3 | Modulation Characteristics | Pass |
| 4 | Occupied Bandwidth | Pass |
| 5 | Spurious Emissions at Antenna Terminal | Pass |
| 6 | Field Strength of Spurious Emissions | Pass |
| 7 | Frequency Stability | Pass |
| 8 | Field Strength of Spurious Emissions from Unintentional Radiators | Pass |

| Test # | Test Name | Margin with respect to the Limit |
|--------|---|----------------------------------|
| 1 | RF Power Output | NA |
| 2 | ERP (Effective Radiated Power) | NA |
| 3 | Modulation Characteristics | NA |
| 4 | Occupied Bandwidth | See Plots |
| 5 | Spurious Emissions at Antenna Terminal | 31.9 dB |
| 6 | Field Strength of Spurious Emissions | 4.7 dB |
| 7 | Frequency Stability | 24.75 Hz |
| 8 | Field Strength of Spurious Emissions from Unintentional Radiators | 3.3 dB |

The margin with respect to the limit is the minimum margin for all modes and bands. () indicates the margin at which the product exceeds the limit.

General and Special Conditions

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Measuring Equipment and Calibration Information

All equipment is on a one-year calibration cycle.

Measurement Procedures and Data

RF POWER OUTPUT

Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of a HPE4406A Vector Signal Analyzer through a 10dB passive attenuator, adaptor (if needed), and specialized RF connector. The peak power output is measured for all channels.

CFR Part 2.1046

Measurement Results

* Data supplied by SAR Lab

GSM 1900

| Frequency (MHz) | Power (dBm) |
|-----------------|-------------|
| 1850.20 | 30.81 |
| 1880.00 | 30.80 |
| 1909.80 | 30.80 |

RADIATED (ERP)

Measurement Procedure

The phone was tested in a 16' cubical anechoic chamber with a 2-axis position system that permits taking complete spherical scans of the EUT's radiation patterns. For all tests, the phone was supported in a free space type environment, vertically oriented in the chamber. Tests were done for GSM 1900 three frequencies (1850.2, 1880.00, and 1909.80 MHz) with antenna stubby.

GSM measurements were made with the phone placed in a call using the HP8922M mobile station test set. The phone was weakly coupled to the test set and configured to transmit in full data rate mode. Radiated power was measured at each 15 degree step. The radiated power was measured using a Gigatronics 8542C power meter in "Burst Avg" mode. From these measurements, the software calculates the angle at which maximum radiated power occurs for each case, and the radiated power at this angle was extracted from the data. The max radiated power results for the QDJ-03008LUG001 follows, as EIRP in dBm. To get ERP (effective radiated power referenced to a half-wave dipole), subtract 2.1 dB from these numbers.

Measurement Results

* Data not supplied by EMC Lab

GSM 1900

1850.2 MHz: 28.61 dBm

1880.0 MHz: 28.67 dBm

1909.8 MHz: 29.03 dBm

For all measurements, calibration was performed via gain substitution with a half-wave dipole.

Max EIRP in GSM 1900 is 29.03dBm mode (max ERP is 26.93 dBm)

OCCUPIED BANDWIDTH

CFR Part 2.1049, 24.238, 22.917


Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. A fully charged battery was used for the supply voltage.


The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.

Measurement Results – GSM 1900


Attached

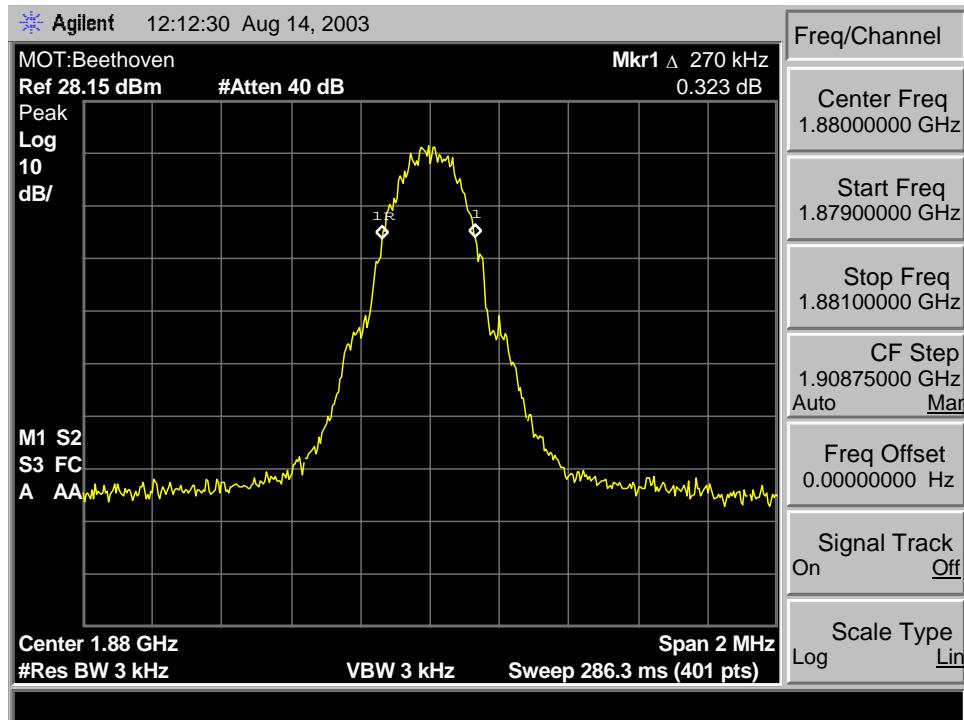


1900 GSM Occupied Band

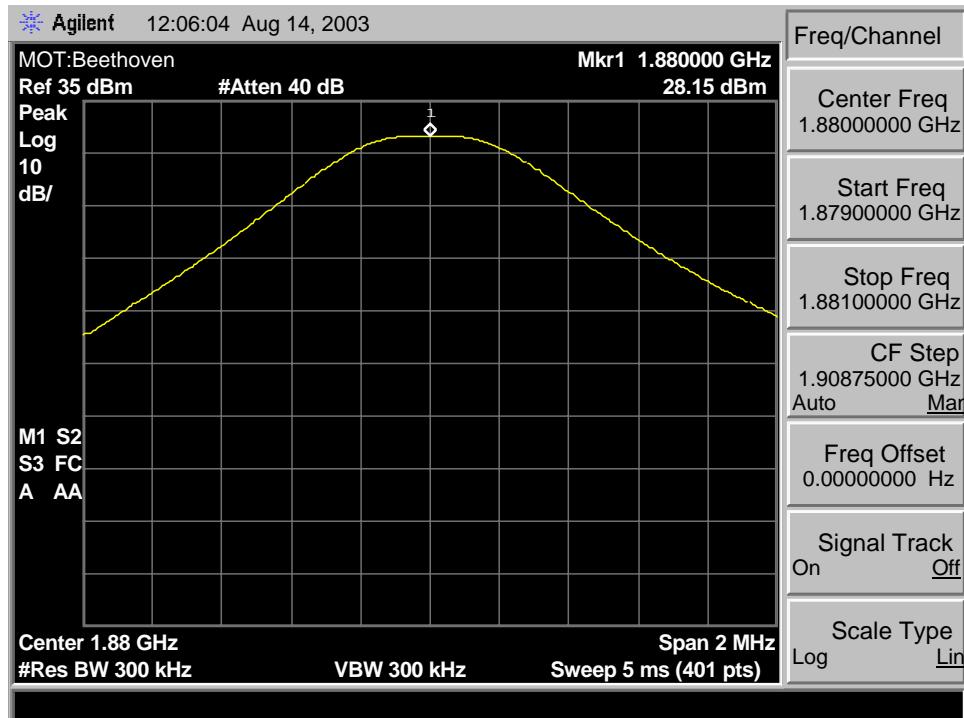


1900 GSM Reference Plot

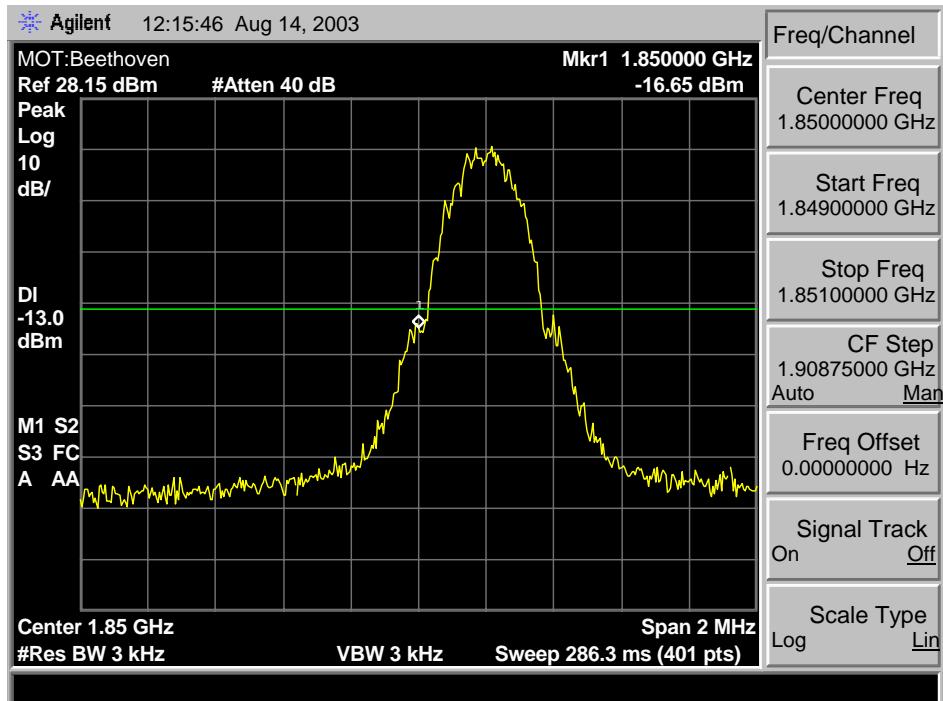


1900 GSM Lower Band Edge

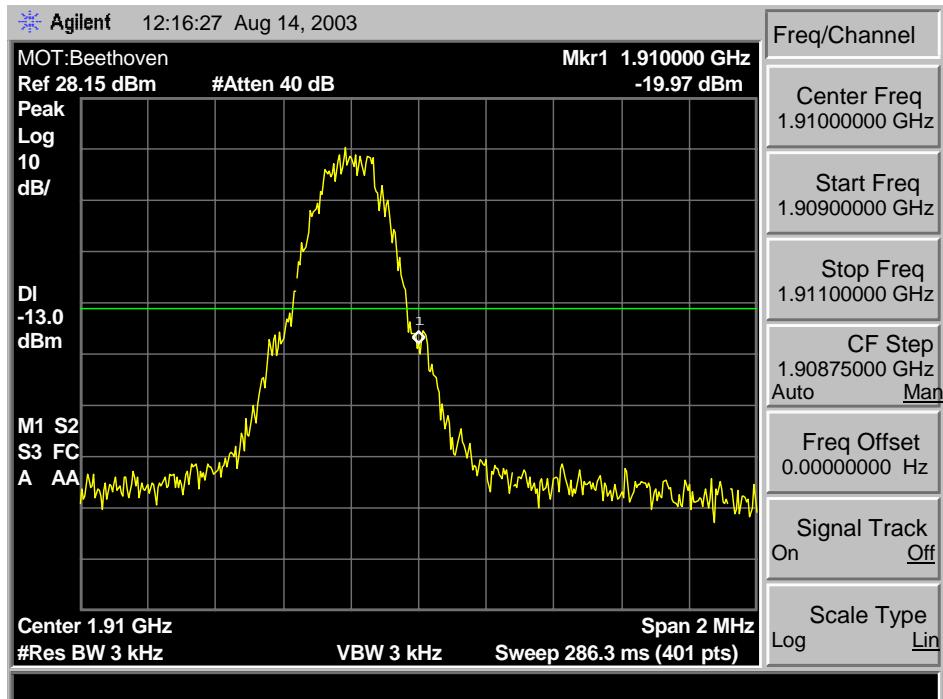


1900 GSM Upper Band Edge

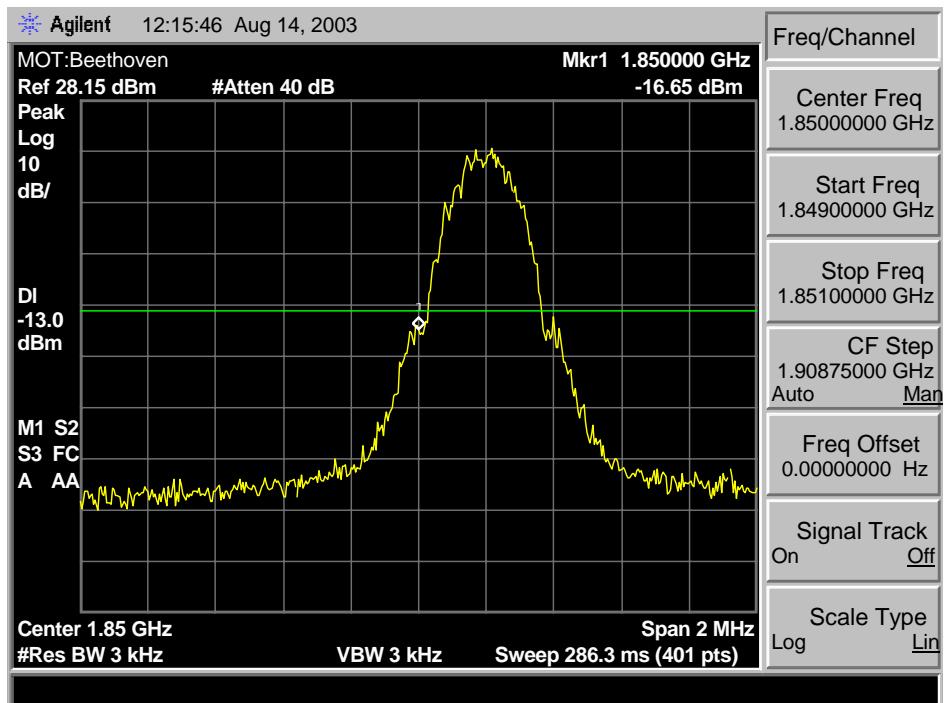


GSM 1900 A Min Block Edge

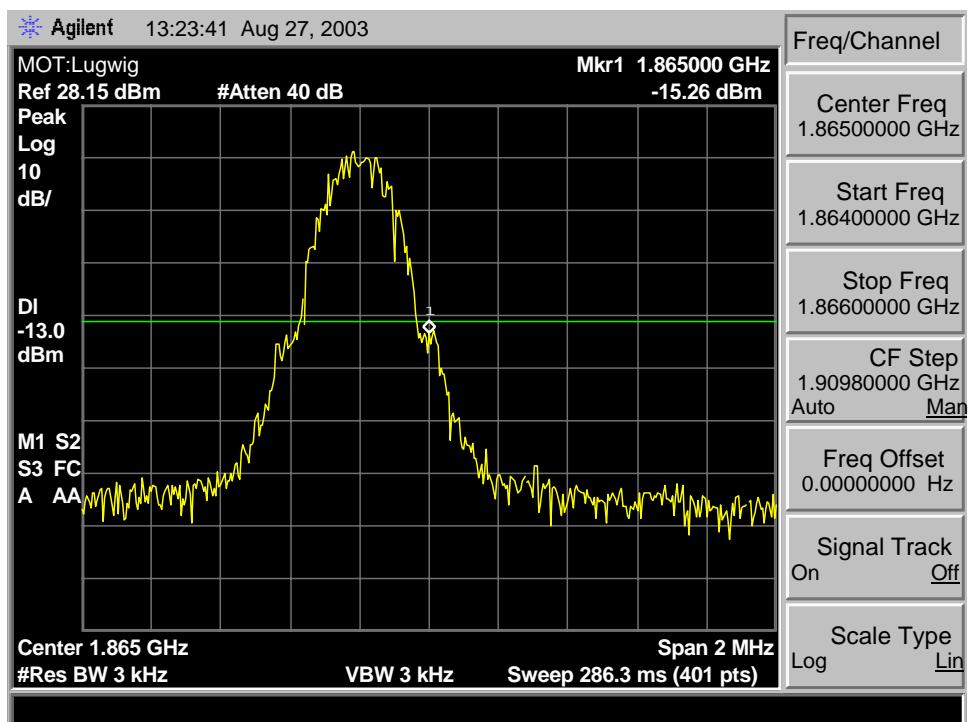


GSM 1900 A Max. Block Edge

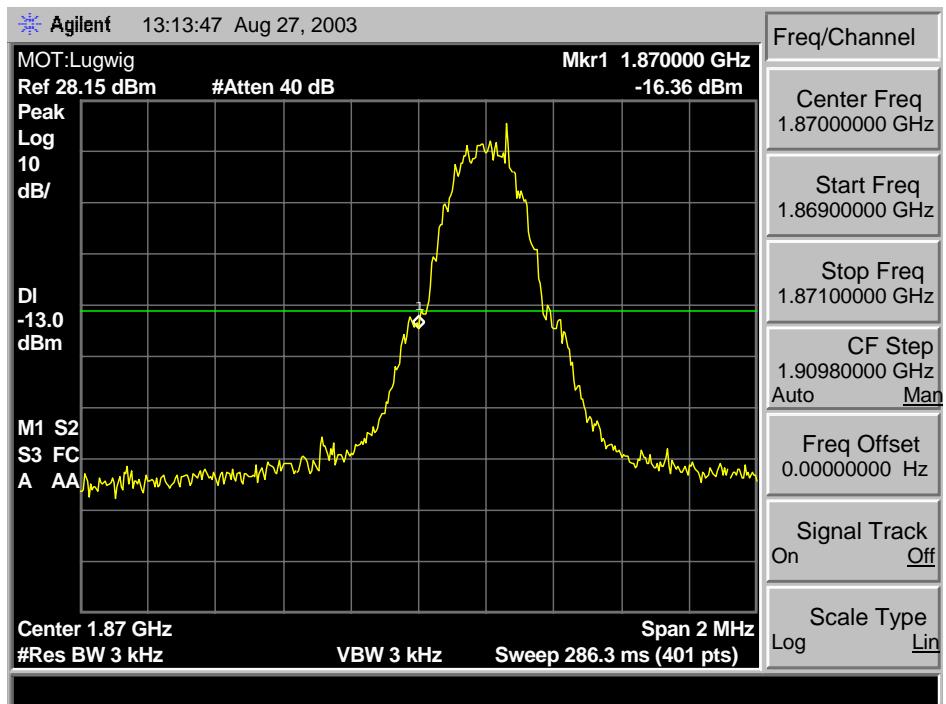


GSM 1900 B Min. Block Edge

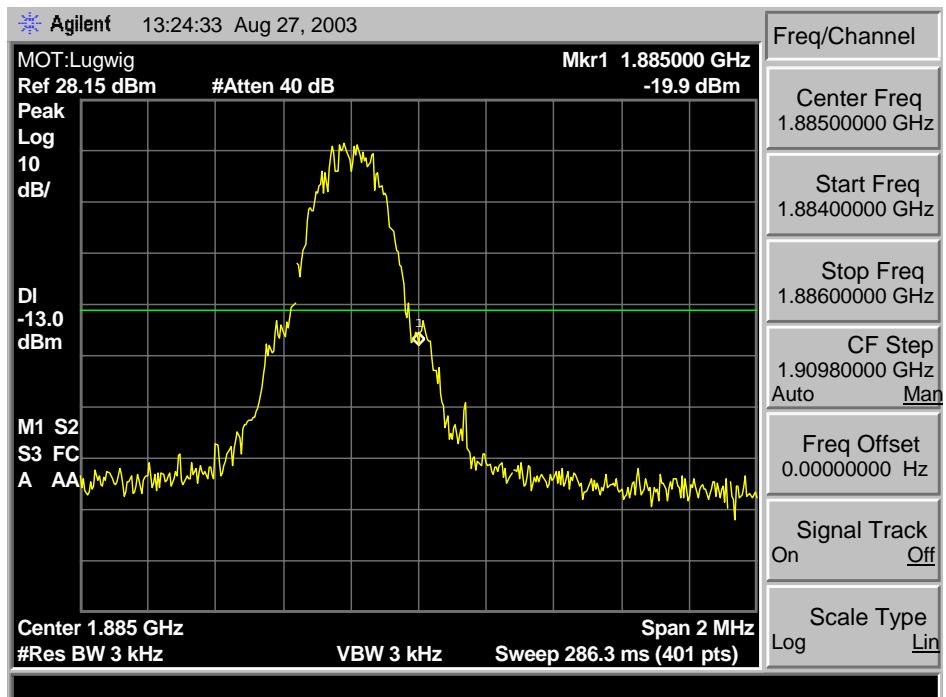


GSM 1900 B Max Block Edge

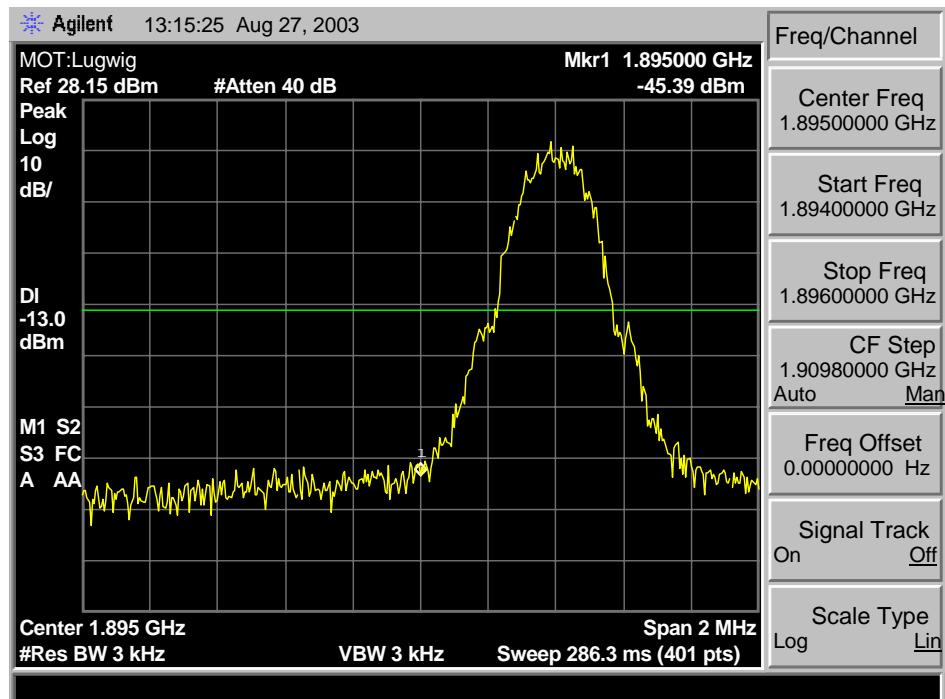


GSM 1900 C, C2, C3 Min. Block Edge

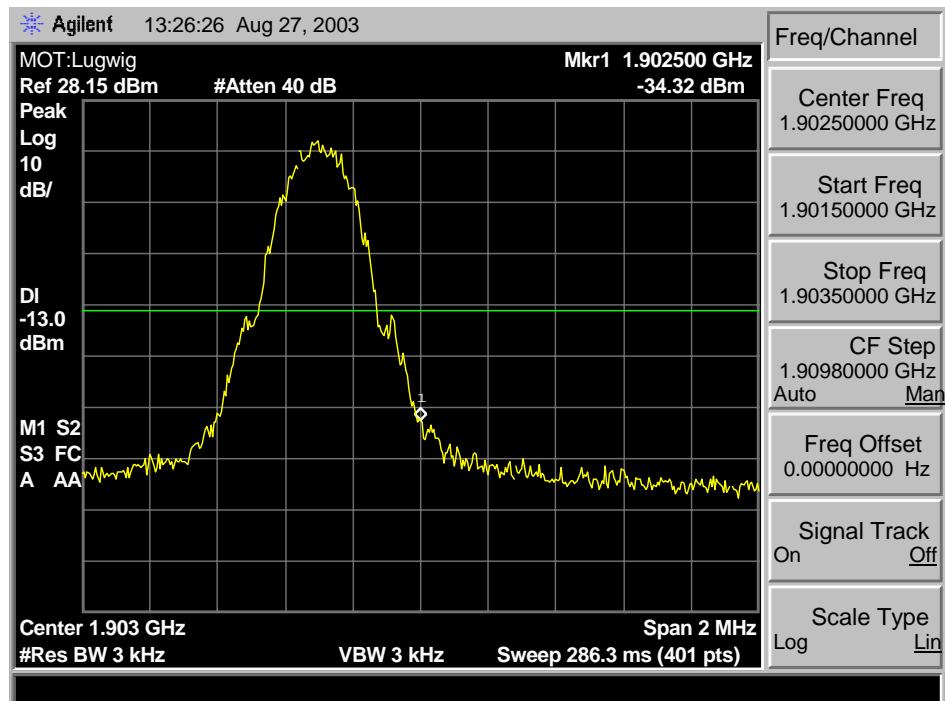


GSM 1900 C2 Max Block Edge

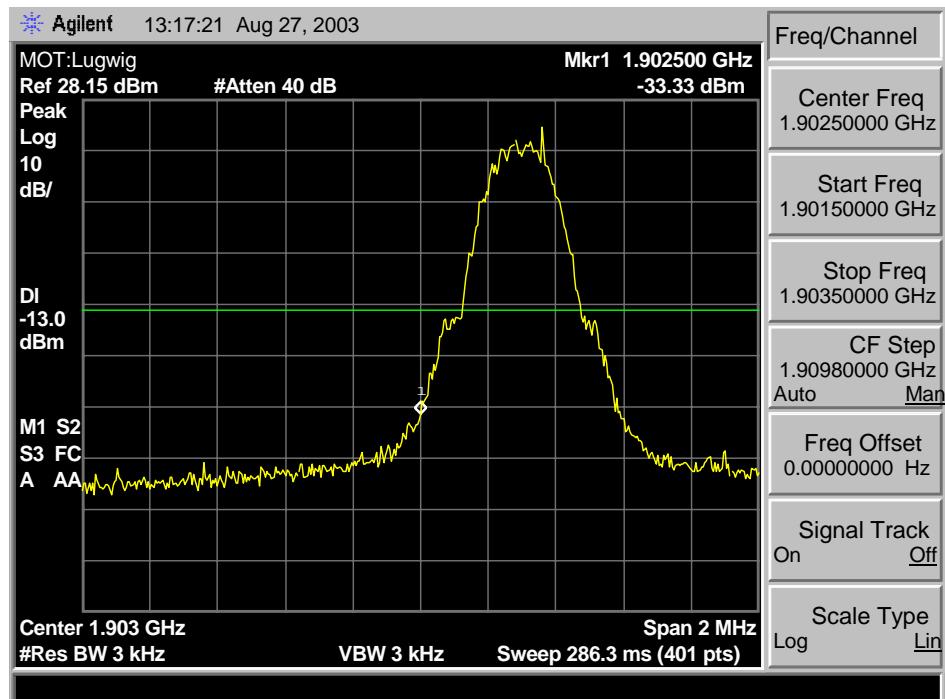


GSM 1900 C1 Min. Block Edge

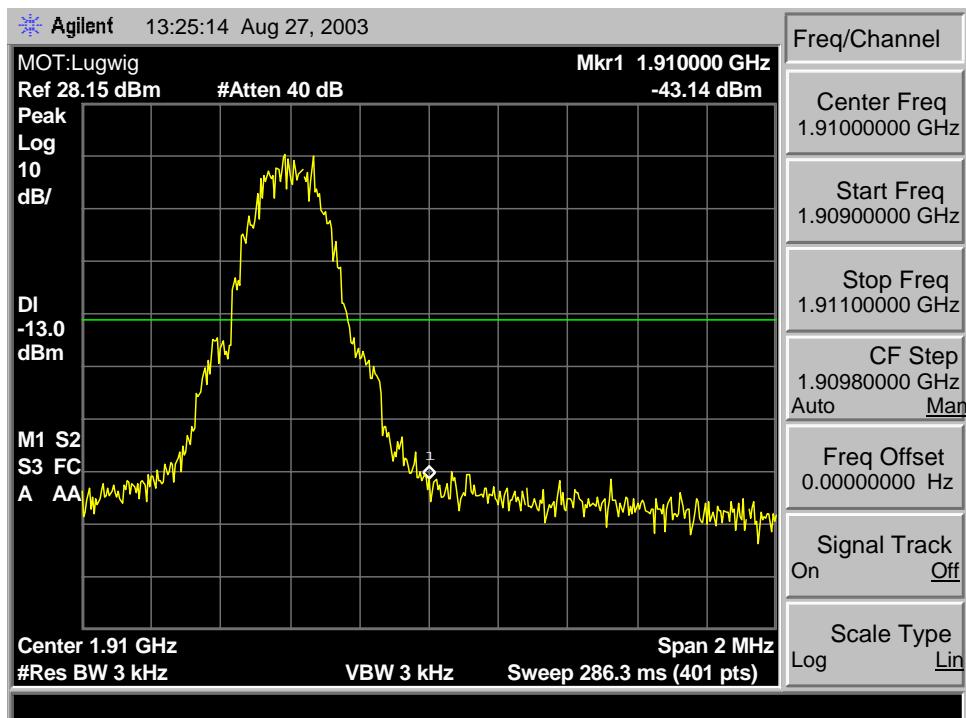


GSM 1900 C1 Max. Block Edge

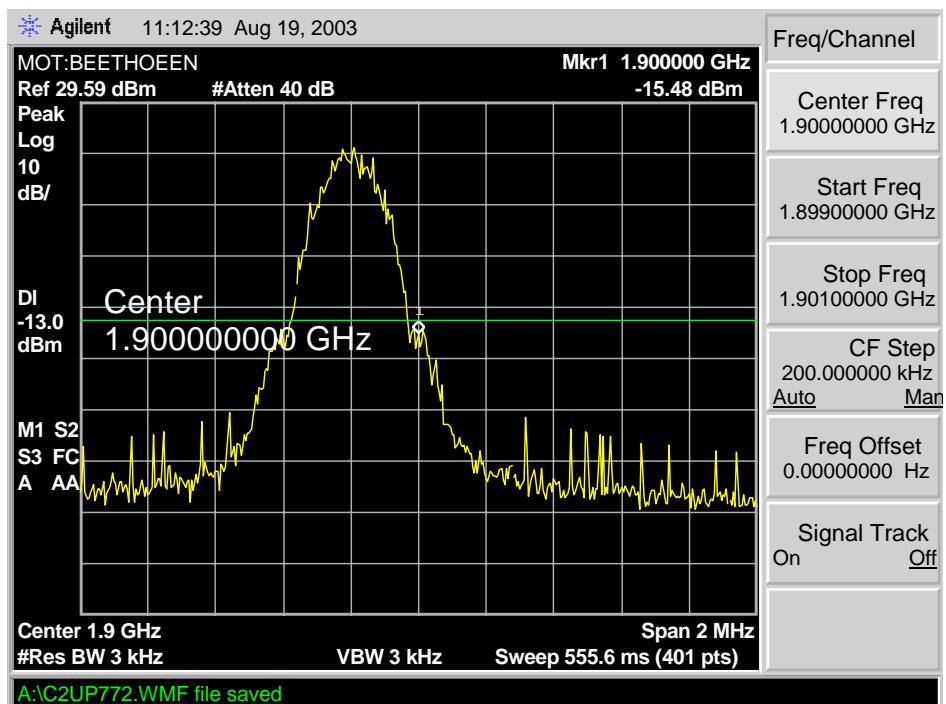


GSM 1900 C3 Max Block Edge

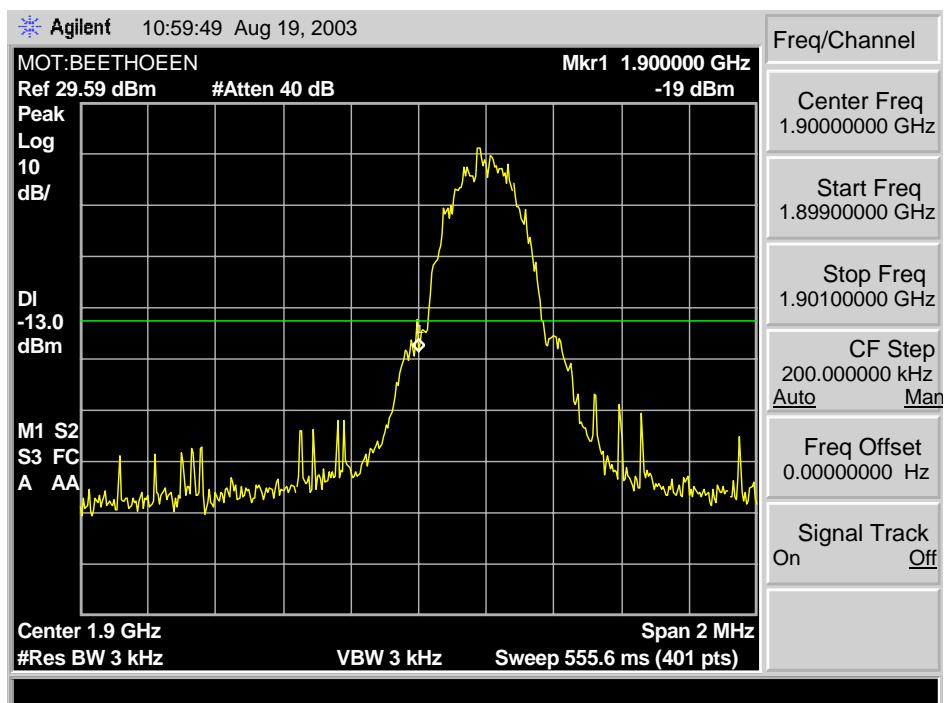


GSM 1900 C4 Min Block Edge

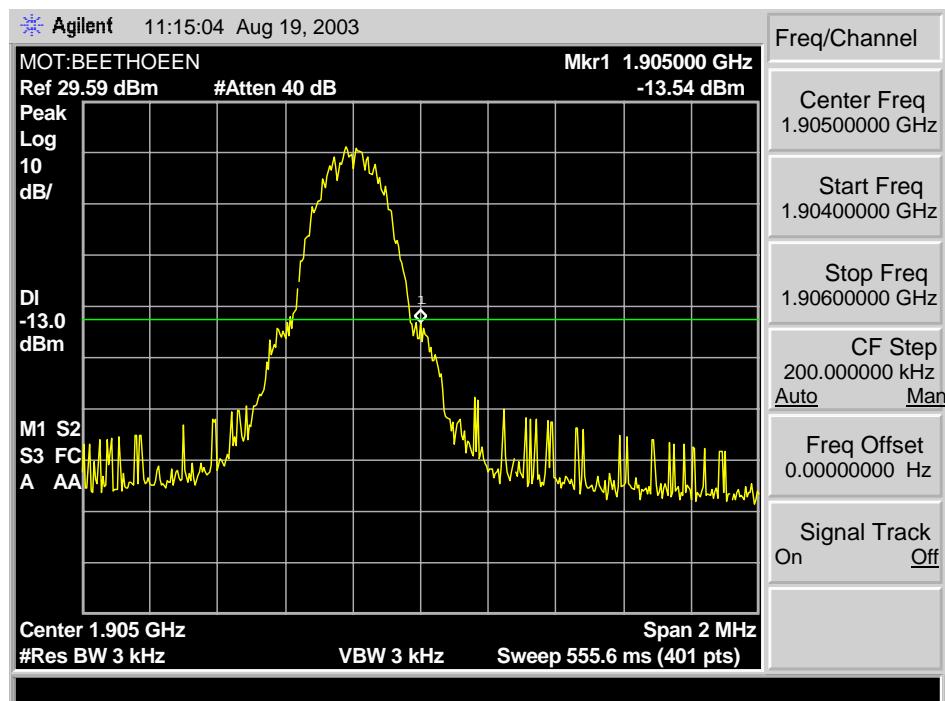


GSM 1900 C4 Max Block Edge

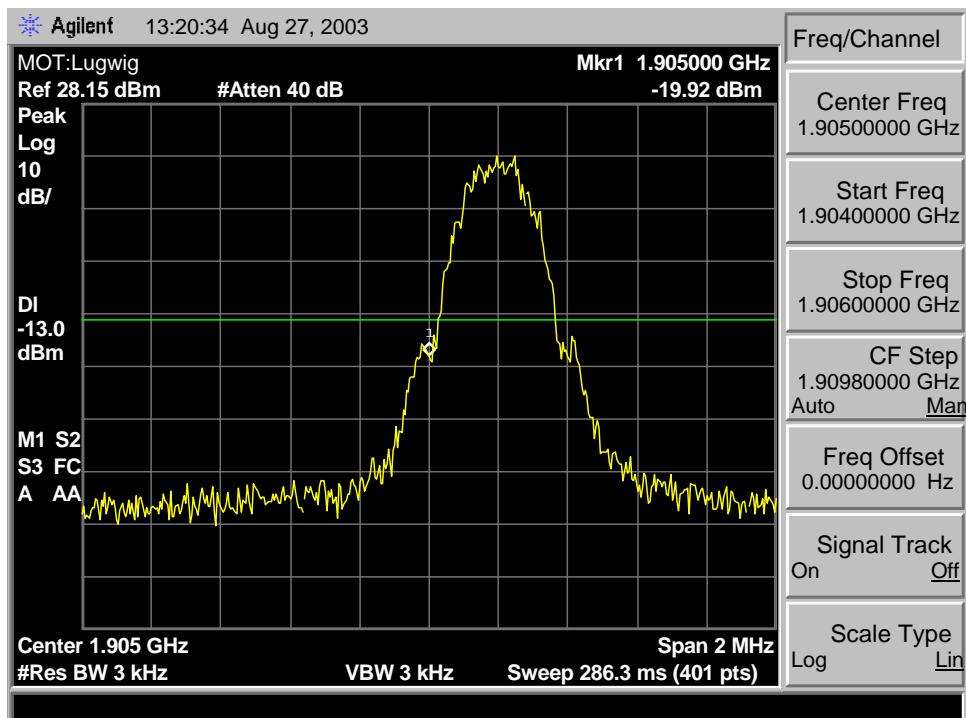


GSM 1900 C5 Min. Block Edge

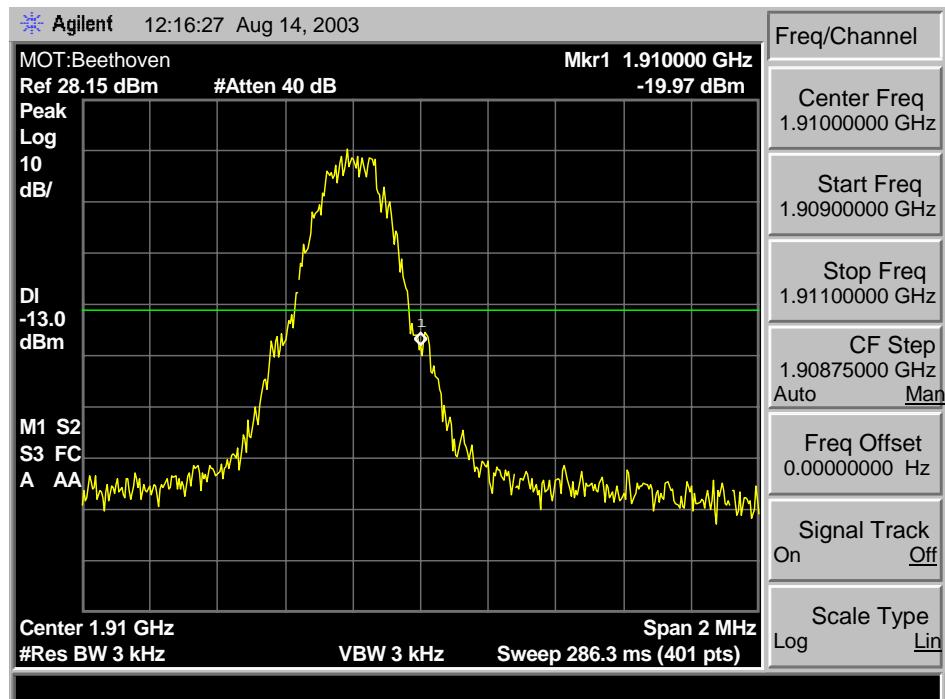


GSM 1900 C5 Max. Block Edge

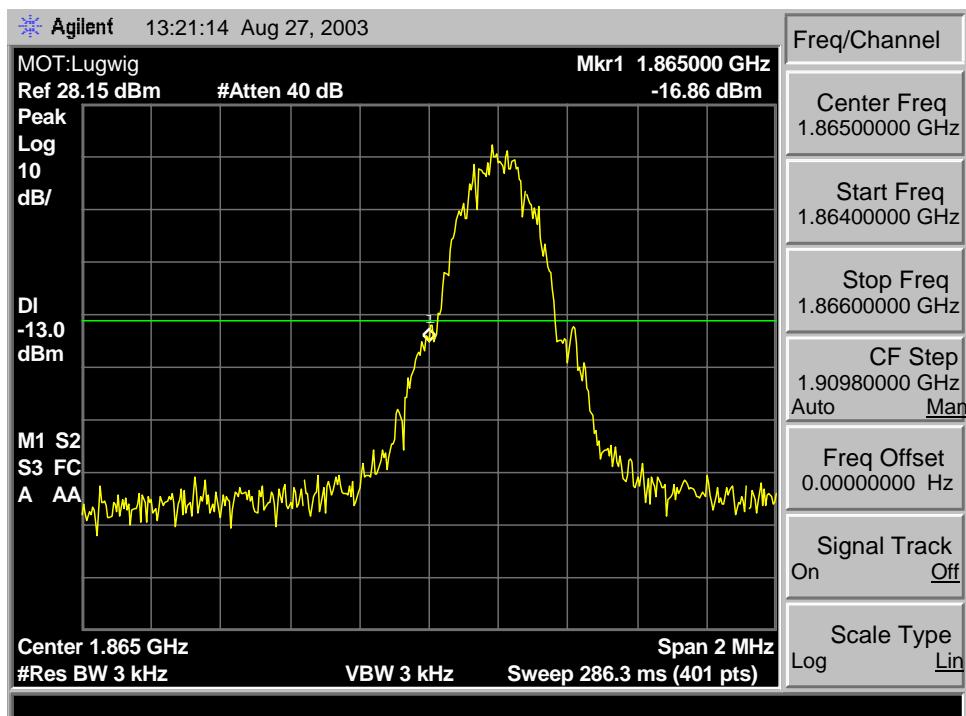


GSM 1900 D Min. Block Edge

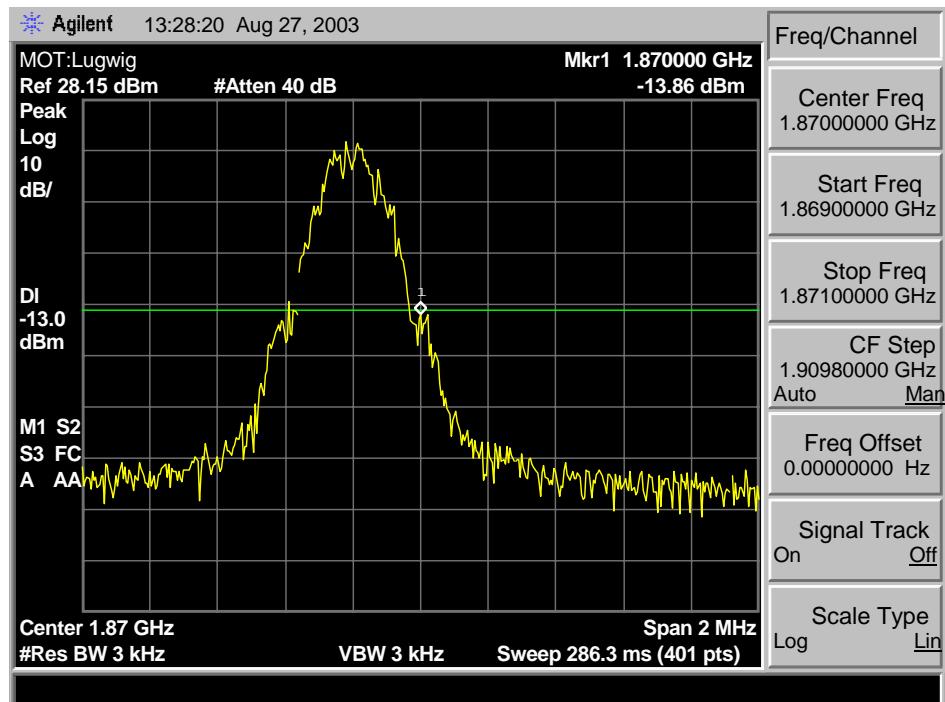


GSM 1900 D Max. Block Edge

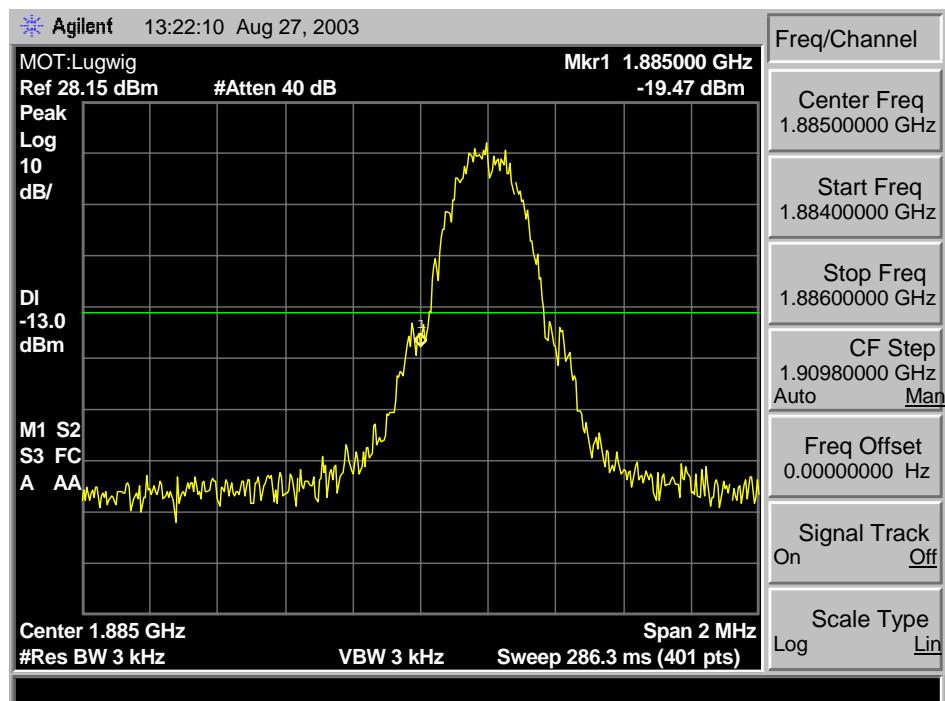


GSM 1900 E Min. Block Edge

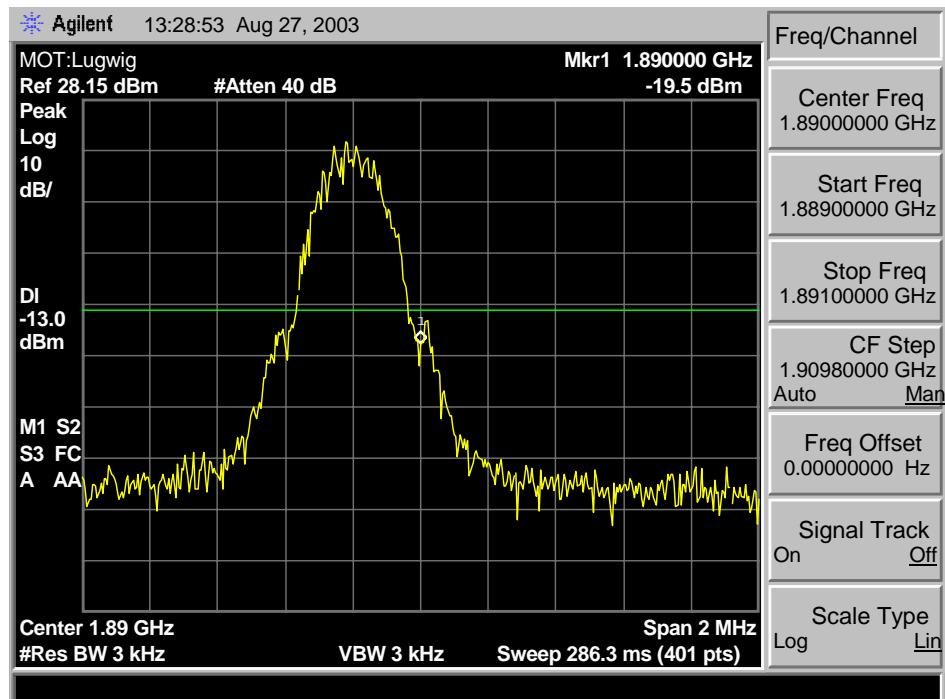

GSM 1900 E Max. Block Edge

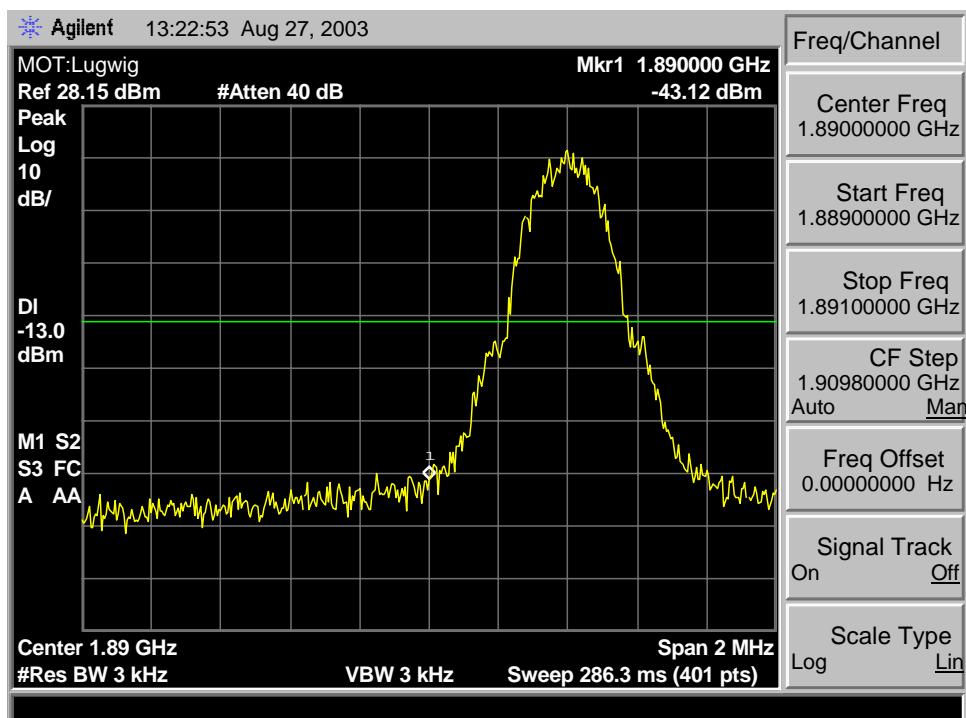

GSM 1900 F Min. Block Edge

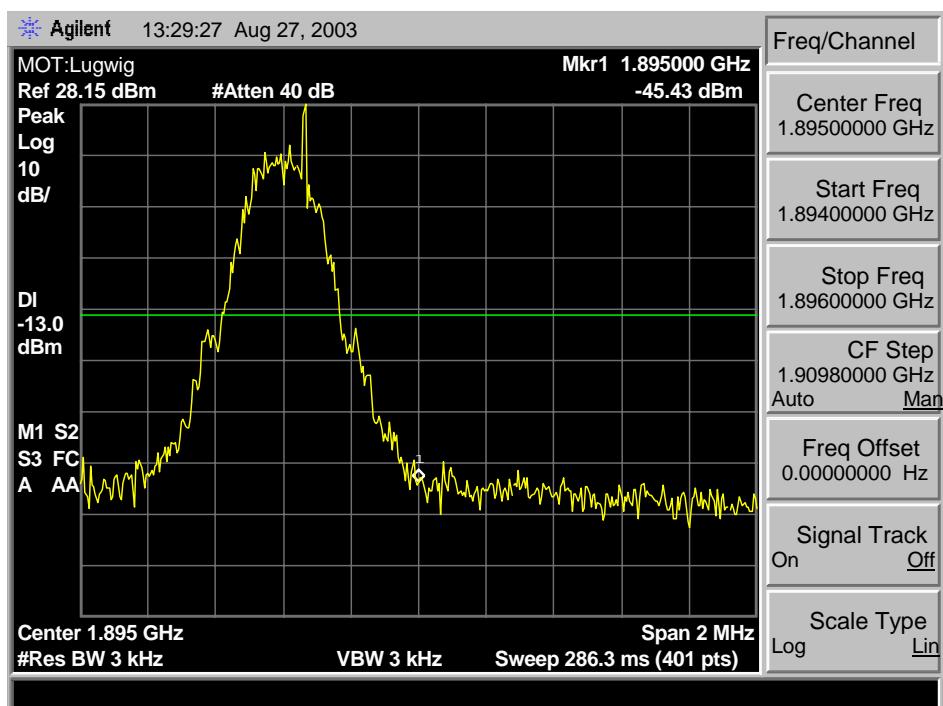

GSM 1900 F Max. Block Edge

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

CFR Part 2.1051, 22.917, 24.238

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.


Measurements were made at the middle channel within the frequency band and within the base station frequency range for PCS.

Measurement Results

Attached

Measurement Results**Modulation: GSM 1900****Conducted Spurious and Harmonic Emissions**

| Harmonic of Fundamental | FCC Maximum Limit (dBm) | Conducted Emission (dBm) |
|-------------------------|-------------------------|--------------------------|
| 2nd harmonic | -13 | -44.9 |
| 3rd harmonic | -13 | -50.5 |
| 4th harmonic | -13 | -48.7 |
| 5th harmonic | -13 | -48.2 |
| 6th harmonic | -13 | -44.9 |
| 7th harmonic | -13 | -45.9 |
| 8th harmonic | -13 | -44.9 |
| 9th harmonic | -13 | * |
| 10th harmonic | -13 | * |

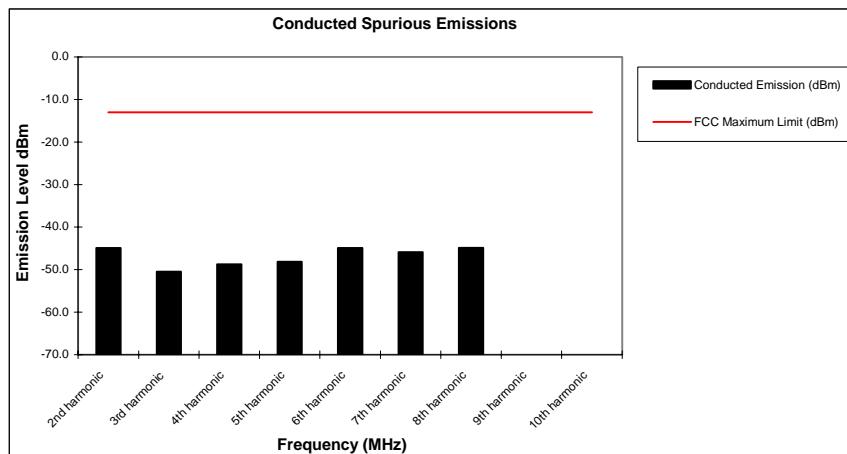

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

FIELD STRENGTH OF SPURIOUS EMISSIONS

CFR Part 2.1053, 22.917, 24.238

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.


The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

Measurement Results

Attached

Measurement Results**Modulation: GSM 1900****Radiated Spurious and Harmonic Emissions**

| Frequency (MHz) | FCC Maximum Limit (dBm) | Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm) | Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm) |
|-----------------|-------------------------|--|---|
| 2nd harmonic | -13 | -17.7 | -19.9 |
| 3rd harmonic | -13 | -29.0 | -28.6 |
| 4th harmonic | -13 | -43.9 | -49.5 |
| 5th harmonic | -13 | * | * |
| 6th harmonic | -13 | -31.7 | -31.8 |
| 7th harmonic | -13 | -37.6 | -40.8 |
| 8th harmonic | -13 | -34.7 | * |
| 9th harmonic | -13 | * | * |
| 10th harmonic | -13 | * | * |

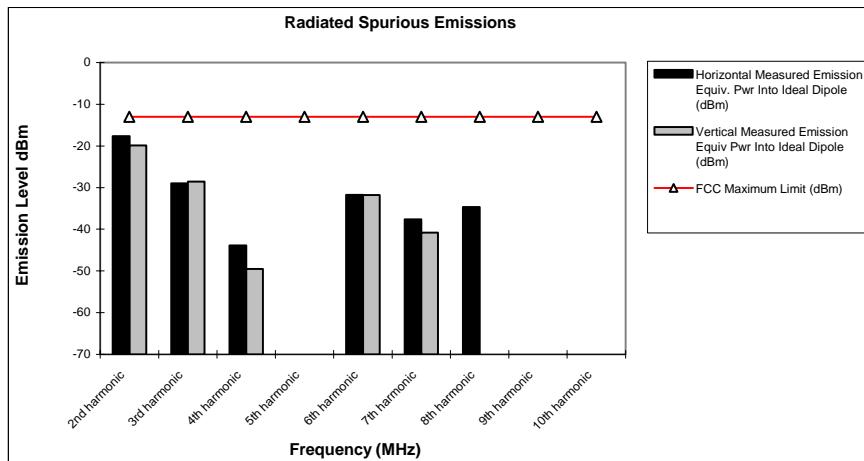

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

FREQUENCY STABILITY

CFR Part 2.1055, 22.355, 24.235

Measurement Procedure

The equipment under test is placed in an environmental chamber. The antenna port of the Equipment Under Test is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range -30° C to +60° C and at intervals of 10° C with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

Measurement Results

Attached

Measurement Results**Modulation: GSM1900****Frequency Stability**


Mode: GSM 1900

Operating Frequency: 1880.0 MHz

Channel: 661

Deviation Limit (PPM): 0.1 ppm

| Temperature | Frequency Error | Frequency Error | Voltage | Voltage |
|-------------|-----------------|-----------------|------------------|---------------------|
| C | Hz | (PPM) | (%) | (VDC) |
| -30 C | 18.49 | 0.010 | 100% | 3.8 (3.6 Specified) |
| -20 C | 20.44 | 0.011 | 100% | 3.8 (3.6 Specified) |
| -10 C | 21.06 | 0.011 | 100% | 3.8 (3.6 Specified) |
| 0 C | 19.83 | 0.011 | 100% | 3.8 (3.6 Specified) |
| 10 C | 17.26 | 0.009 | 100% | 3.8 (3.6 Specified) |
| 20 C | 21.36 | 0.011 | 100% | 3.8 (3.6 Specified) |
| 30 C | 18.94 | 0.010 | 100% | 3.8 (3.6 Specified) |
| 40 C | 18.99 | 0.010 | 100% | 3.8 (3.6 Specified) |
| 50 C | 20.81 | 0.011 | 100% | 3.8 (3.6 Specified) |
| 60 C | 24.75 | 0.013 | 100% | 3.8 (3.6 Specified) |
| 20 C | 24.14 | 0.013 | Battery Endpoint | 3.40 |

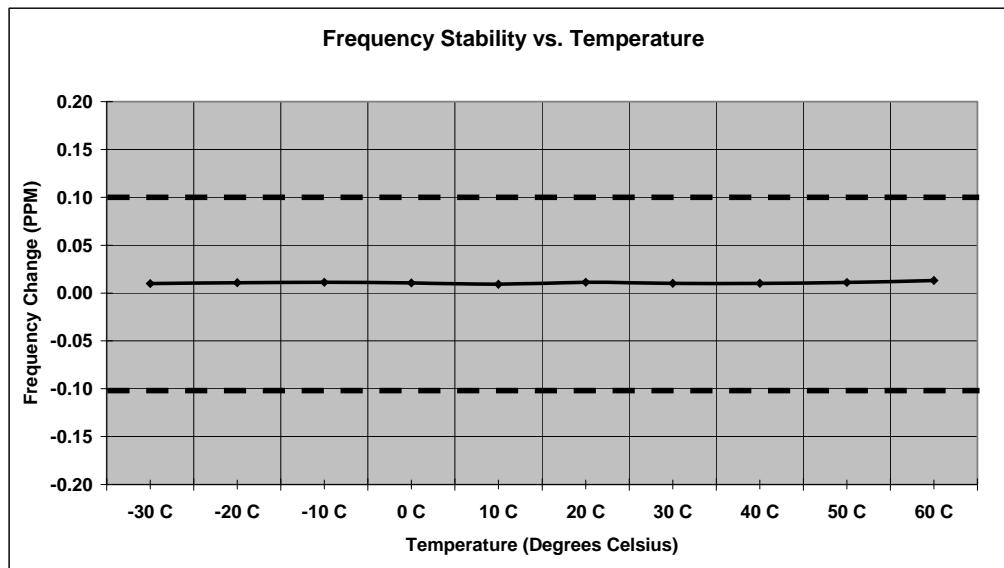

Engineer: Kien

Date: 08/13/03

Product Name: MPX200

Submission #: 11707-1

S/N: 330005171

(Uncontrolled When Printed)

Form Control Number: FCD-0192, Rev. 3

FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS

CFR Part 15.109

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna. A fully charged battery was used for the supply voltage.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.


$$\text{Field Strength (dBuV/m)} = \text{EMI Receiver Level (dBuV)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Antenna Correction Factor (1/m)}$$

Measurement Results



Attached

Measurement Results**Modulation: GSM 1900****Receiver Radiated Spurious Emissions**

| Frequency (MHz) | FCC Maximum Limit (dBuV/m) | Horizontal Measured Field Strength (dBuV/m) | Vertical Measured Field Strength (dBuV/m) |
|------------------|----------------------------|---|---|
| Local Oscillator | 54 | * | * |
| 2nd harmonic | 54 | 42.8 | 42.7 |
| 3rd harmonic | 54 | 46.1 | 46.2 |
| 4th harmonic | 54 | 49.3 | 49.4 |
| 5th harmonic | 54 | 50.5 | 50.7 |
| 6th harmonic | 54 | * | * |
| 7th harmonic | 54 | * | * |
| 8th harmonic | 54 | * | * |
| 9th harmonic | 54 | * | * |
| 10th harmonic | 54 | * | * |

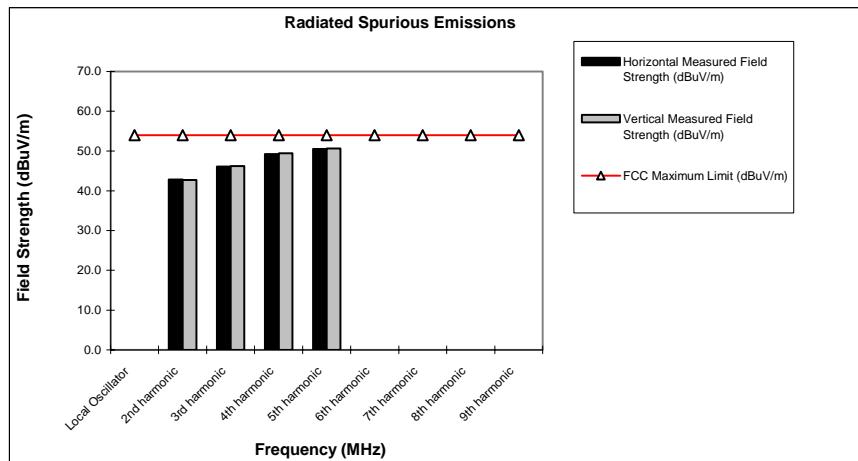**Notes:**

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific frequency for the low, mid, and high channels.

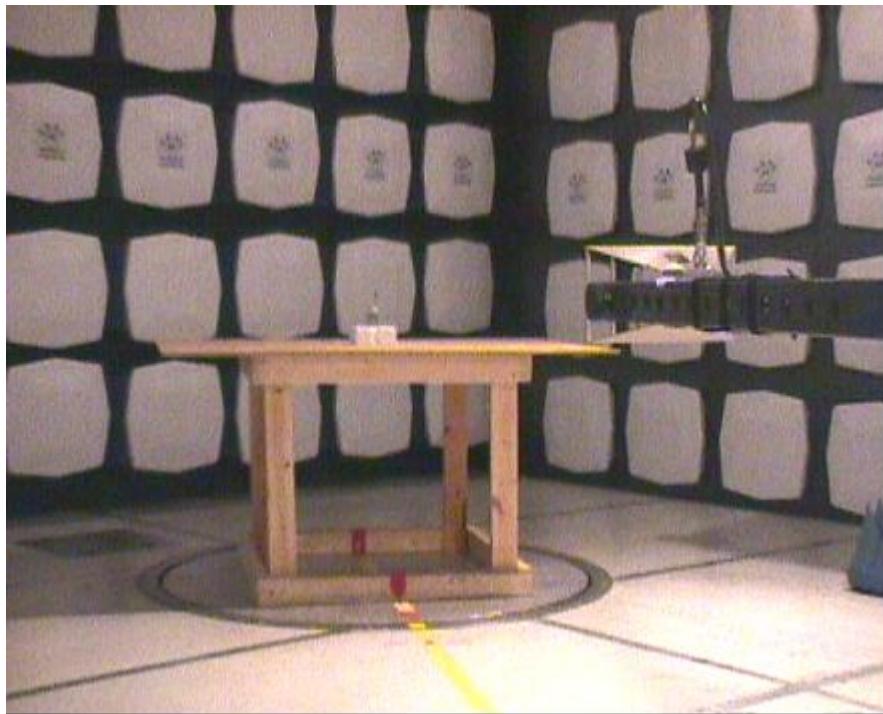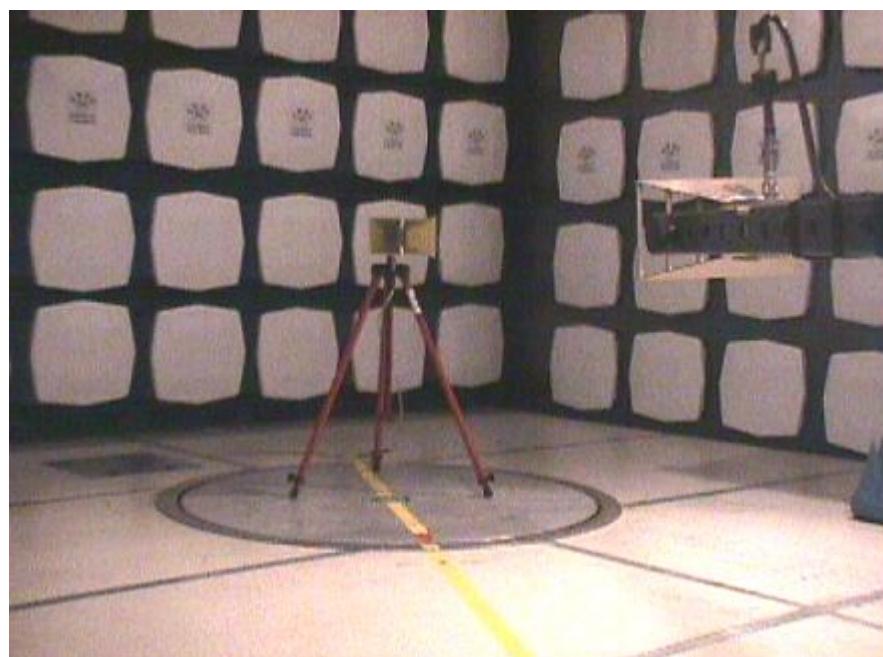Appendix A – Radiated Emissions Test Setup Photos**A.1 Radiated Emissions Measurement****A.2 Substitution Measurement****End of Test Report**