



**FCC CFR47 PART 15 SUBPART C
CLASS II PERMISSIVE CHANGE
TEST REPORT**

FOR

BROADCOM CORPORATION

BROADCOM 54g MINI PCI CARD

MODEL NUMBER: BCM94306MPSG

BRAND NAME: BROADCOM

FCC ID: QDS-BRCM1005-H

REPORT NUMBER: 03U2192-1

ISSUE DATE: SEPTEMBER 23, 2003

Prepared for
**BROADCOM CORPORATION
190 MATHIDA PLACE
SUNNYVALE, CA 94086
USA**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888**

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION	3
2. FCC CLASS II CHANGE DESCRIPTION.....	4
3. TEST METHODOLOGY	5
4. FACILITIES AND ACCREDITATION	5
4.1. <i>FACILITIES AND EQUIPMENT</i>	<i>5</i>
4.2. <i>TABLE OF ACCREDITATIONS AND LISTINGS.....</i>	<i>6</i>
5. CALIBRATION AND UNCERTAINTY	7
5.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>7</i>
5.2. <i>MEASUREMENT UNCERTAINTY</i>	<i>7</i>
5.3. <i>TEST AND MEASUREMENT EQUIPMENT.....</i>	<i>8</i>
6. SETUP OF EQUIPMENT UNDER TEST.....	9
7. APPLICABLE LIMITS AND TEST RESULTS	11
7.1. <i>MAXIMUM PERMISSIBLE EXPOSURE.....</i>	<i>11</i>
7.2. <i>RADIATED EMISSIONS</i>	<i>13</i>
7.3. <i>POWERLINE CONDUCTED EMISSIONS.....</i>	<i>35</i>
8. SETUP PHOTOS.....	39

1. TEST RESULT CERTIFICATION

COMPANY NAME: BROADCOM CORPORATION
190 MATHILA PLACE
SUNNYVALE, CA 94086
USA

EUT DESCRIPTION: BROADCOM 54G MINI PCI CARD

MODEL: BCM94306MPSG

DATE TESTED: AUGUST 13 – SEPTEMBER 23, 2003

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: This document reports conditions under which testing was conducted and results of tests performed. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document.

Approved & Released For CCS By:

Tested By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



CHIN PANG
EMC TECHNICIAN
COMPLIANCE CERTIFICATION SERVICES

2. FCC CLASS II CHANGE DESCRIPTION

The EUT is an 802.11g WLAN Mini PCI Card operating in the 2400 – 2483.5 MHz band with a peak output power of 25.55dBm (359mW), and has a peak antenna gain of 2.78 dBi. The changes are as follows:

Change #1 Adding new host, HP laptop model# PP2200.

Change #2 Adding two antenna options:

a) WNC, Metal PIFA

-P/N: 81.EBC15.002 (MAIN ANTENNA)

-P/N: 81.EBC15.001 (AUX ANTENNA)

PEAK GAIN = 2.78dBi

b) SMARTANT, INVERTED F TYPE ANTENNA

-P/N: RO322-031R (MAIN ANTENNA)

-P/N: RO322-031L (AUX ANTENNA)

PEAK GAIN = 1.6353dBi

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4/1992, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

4. FACILITIES AND ACCREDITATION

4.1. FACILITIES AND EQUIPMENT

The open area test sites and conducted measurement facilities used to collect the radiated data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

4.2. TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3/10 meter Open Area Test Sites to perform FCC Part 15/18 measurements	 1300
Japan	VCCI	CISPR 22 Two OATS and one conducted Site	 R-1014, R-619, C-640
Norway	NEMKO	EN50081-1, EN50081-2, EN50082-1, EN50082-2, IEC61000-6-1, IEC61000-6-2, EN50083-2, EN50091-2, EN50130-4, EN55011, EN55013, EN55014-1, EN55104, EN55015, EN61547, EN55022, EN55024, EN61000-3-2, EN61000-3-3, EN60945, EN61326-1	 ELA 117
Norway	NEMKO	EN60601-1-2 and IEC 60601-1-2, the Collateral Standards for Electro-Medical Products. MDD, 93/42/EEC, AIMD 90/385/EEC	 ELA-171
Taiwan	BSMI	CNS 13438	 SL2-IN-E-1012
Canada	Industry Canada	RSS210 Low Power Transmitter and Receiver	 IC2324 A,B,C, and F

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measurement instruments utilized to perform the tests documented in this report have been calibrated in accordance with the manufacturer's recommendations, and are traceable to national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5.3. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Name of Equipment	Manufacturer	Model No.	Serial No.	Due Date
Quasi-Peak Adaptor	HP	85650A	2521A01038	4/16/2004
SA Display Section 3	HP	85662A	2314A04793	4/16/2004
SA RF Section, 1.5 GHz	HP	85680A	2314A02604	4/16/2004
Antenna, Biconical	Eaton	94455-1	1214	9/6/2004
Antenna, Log Periodic 200 ~ 1000 MHz	EMCO	3146	9107-3163	9/6/2004
Preamplifier, 1300 MHz	HP	8447D	2944A06550	8/22/2004
LISN, 10 kHz ~ 30 MHz	FCC	50/250-25-2	114	9/6/2003
EMI Test Receiver	R & S	ESHS 20	827129/006	7/18/2004
Antenna, Horn 1 ~ 18 GHz	EMCO	3115	2238	NCR
Preamplifier, 1 ~ 26 GHz	Miteq	NSP2600-SP	924341	4/25/2004
PSA Spectrum Analyser	Agilent	E4446A	US42510266	1/13/2004
High Pass Filter 3.0 GHz	MicroTronic	HPM13351	1	NCR

6. SETUP OF EQUIPMENT UNDER TEST

SUPPORT EQUIPMENT

TEST				
Device Type	Manufacturer	Model Number	Serial Number	FCC ID
AC Adapter	Compaq	PP2200	NA	DoC


I/O CABLES

TEST I / O CABLES								
Cable No	I/O Port	# of I/O Port	Connector Type	Type of Cable	Cable Length	Data Traffic	Bundled	Remark
1	AC	3	AC	Un-Shielded	2m	No	No	NA
2	DC	1	DC	Un-Shielded	1m	No	Yes	NA

TEST SETUP

The EUT was located inside the laptop.

SETUP DIAGRAM

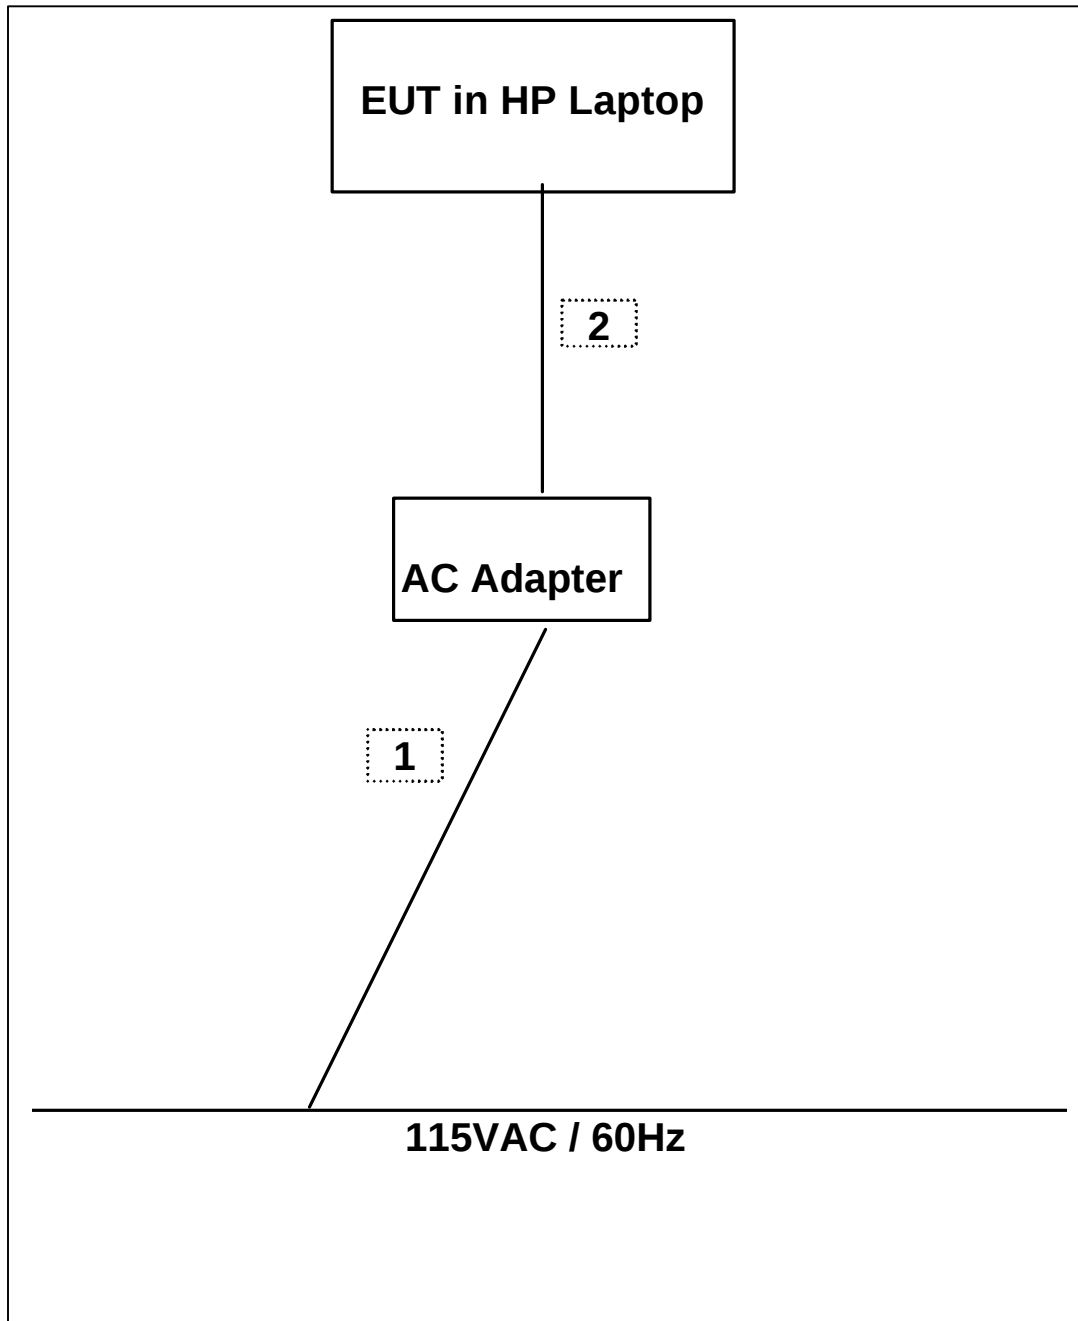

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§15.247 (b) (5) Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts / meter

P = Power in Watts

G = Numeric antenna gain

d = distance in meters

S = Power Density in milliwatts / square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of mW and cm, using:

$$P \text{ (mW)} = P \text{ (W)} / 1000 \text{ and}$$

$$d \text{ (cm)} = 100 * d \text{ (m)}$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW / cm²

Substituting the logarithmic form of power and gain using:

$$P \text{ (mW)} = 10 ^ { (P \text{ (dBm)} / 10) } \text{ and}$$

$$G \text{ (numeric)} = 10 ^ { (G \text{ (dBi)} / 10) }$$

yields

$$d = 0.282 * 10 ^ { ((P + G) / 20) / \sqrt{S} } \quad \text{Equation (1)}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW / cm²

Equation (1) and the measured peak power is used to calculate the MPE distance.

LIMITS

S = 1.0 mW / cm² from 1.1310 Table 1

RESULTS

No non-compliance noted:

Mode	Power Density Limit (mW/cm ²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11g Normal	1.0	25.55	2.78	7.36

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

7.2. RADIATED EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

RESULTS


No non-compliance noted:


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

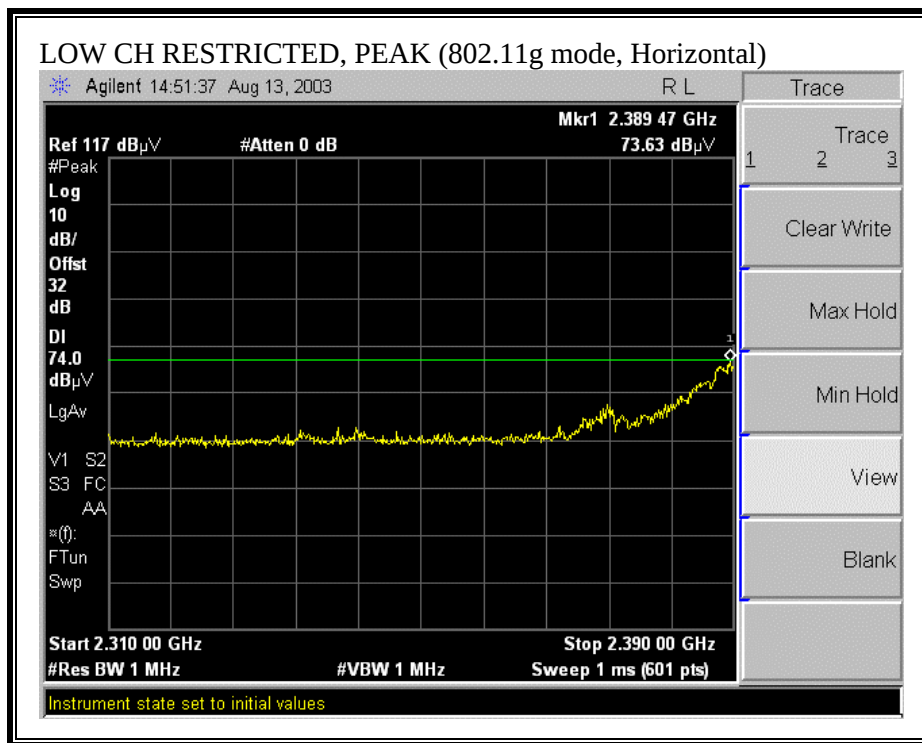

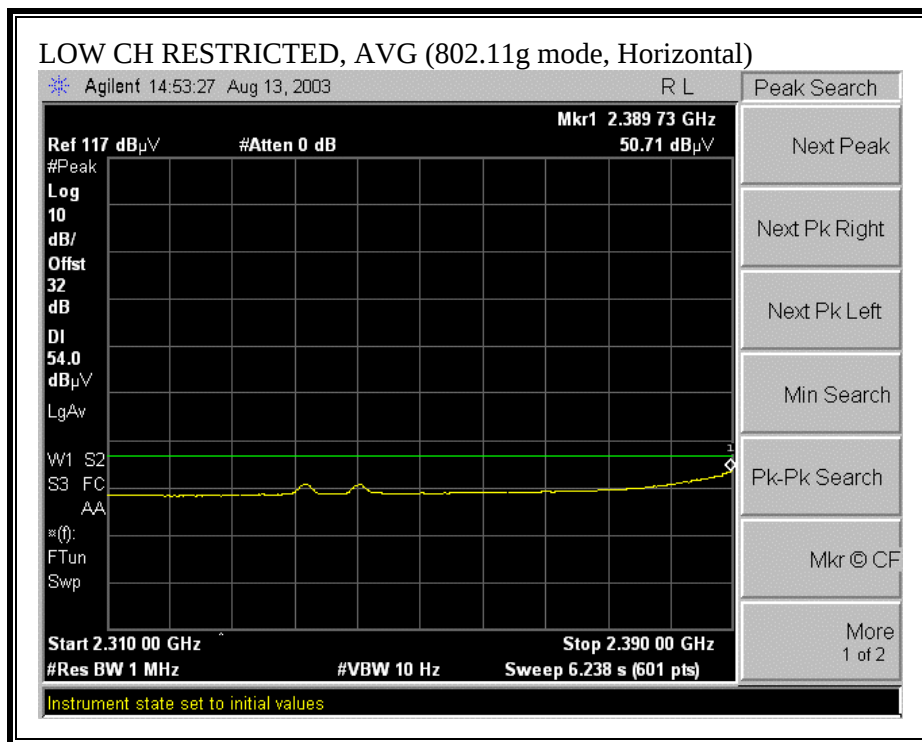



RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

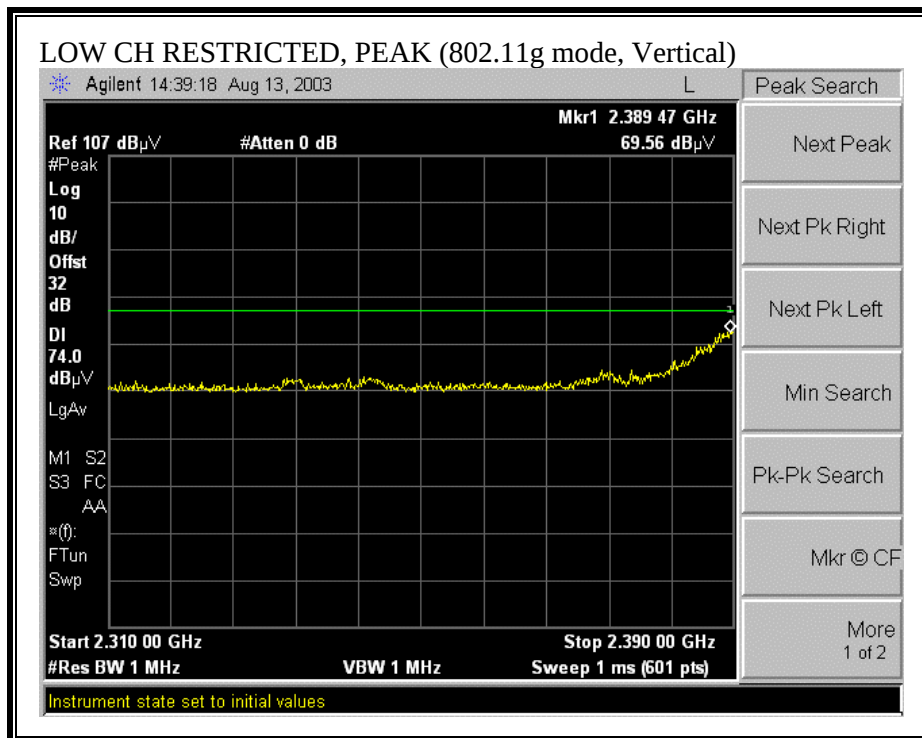

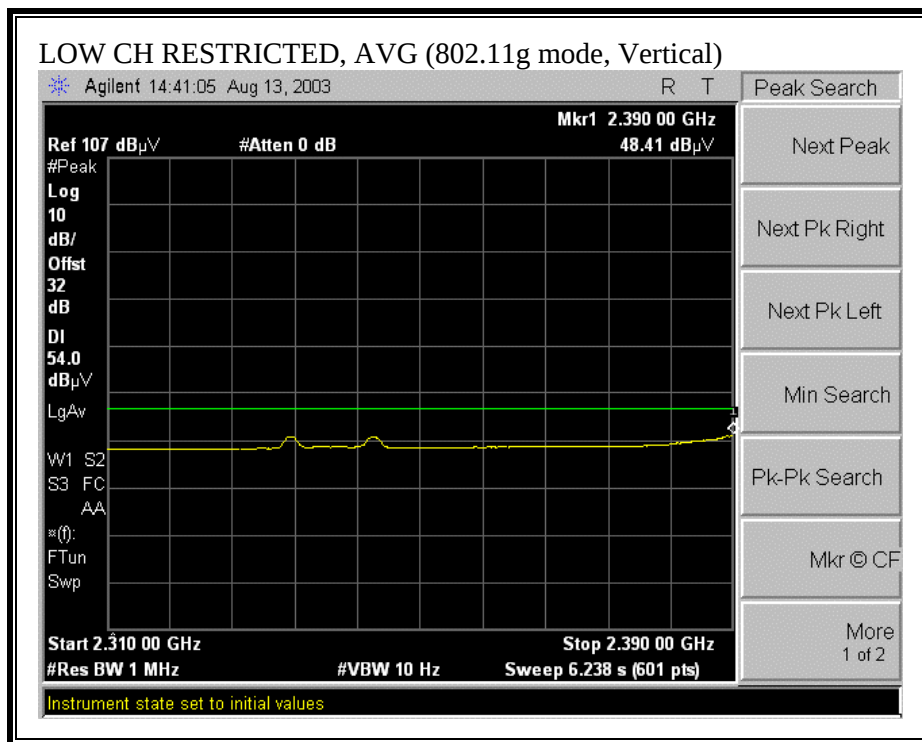



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)

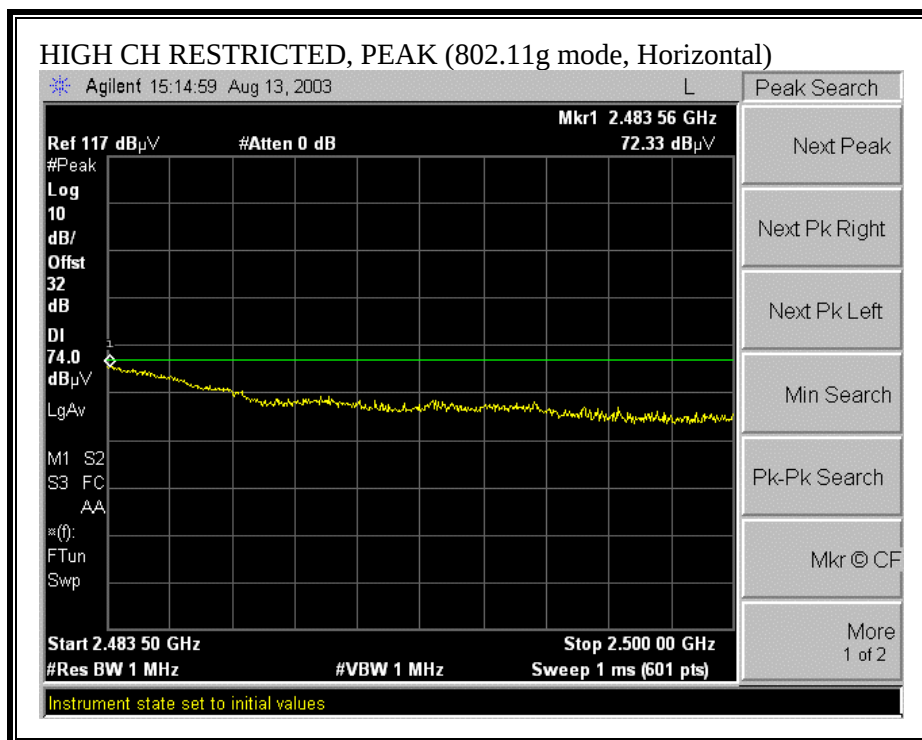

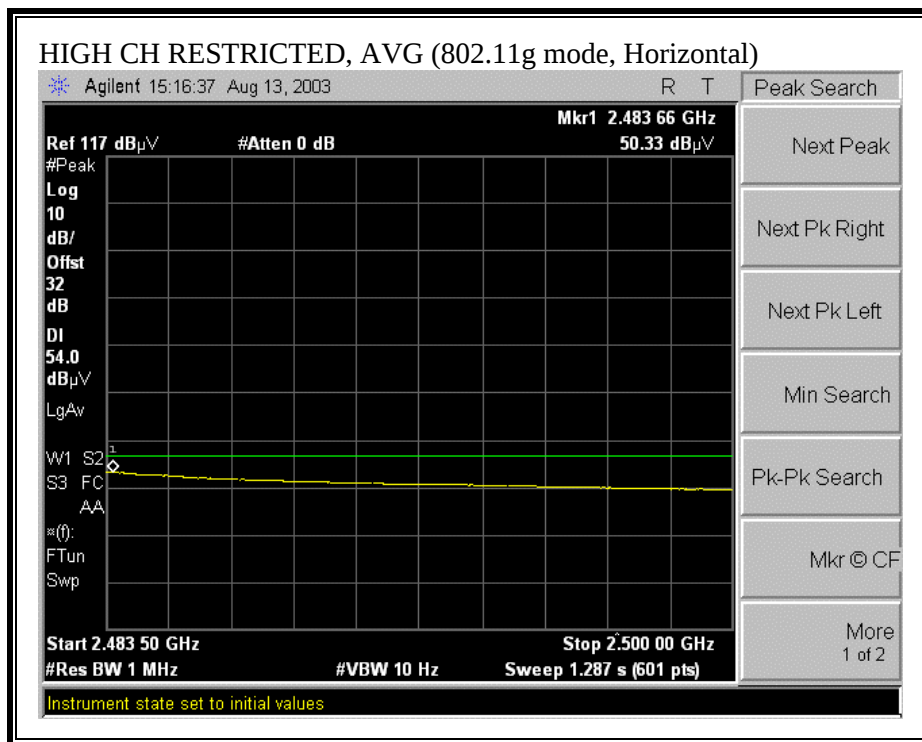



RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

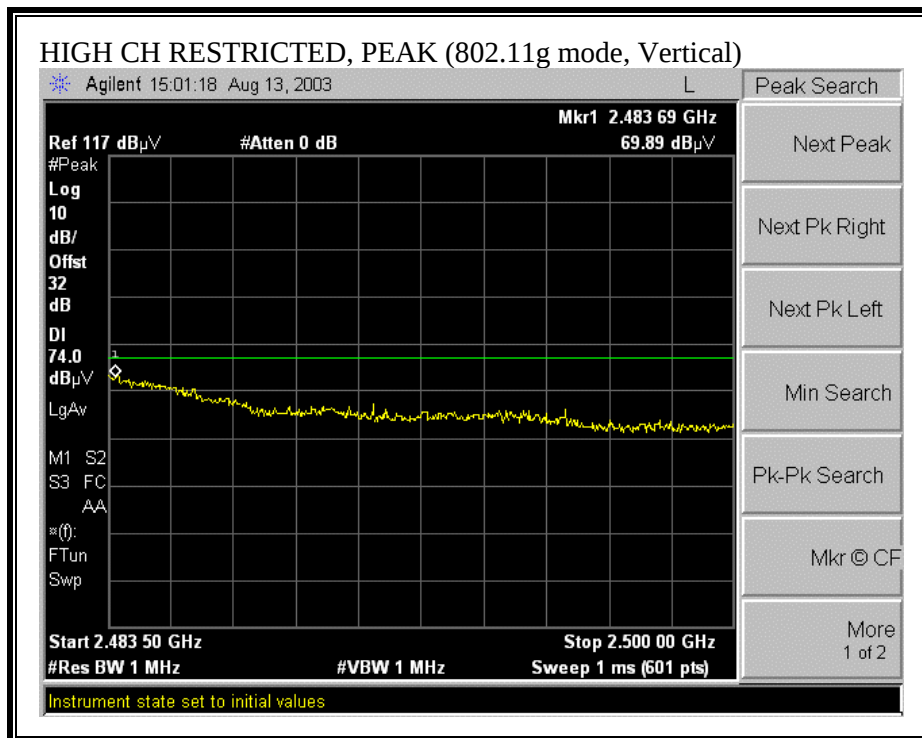

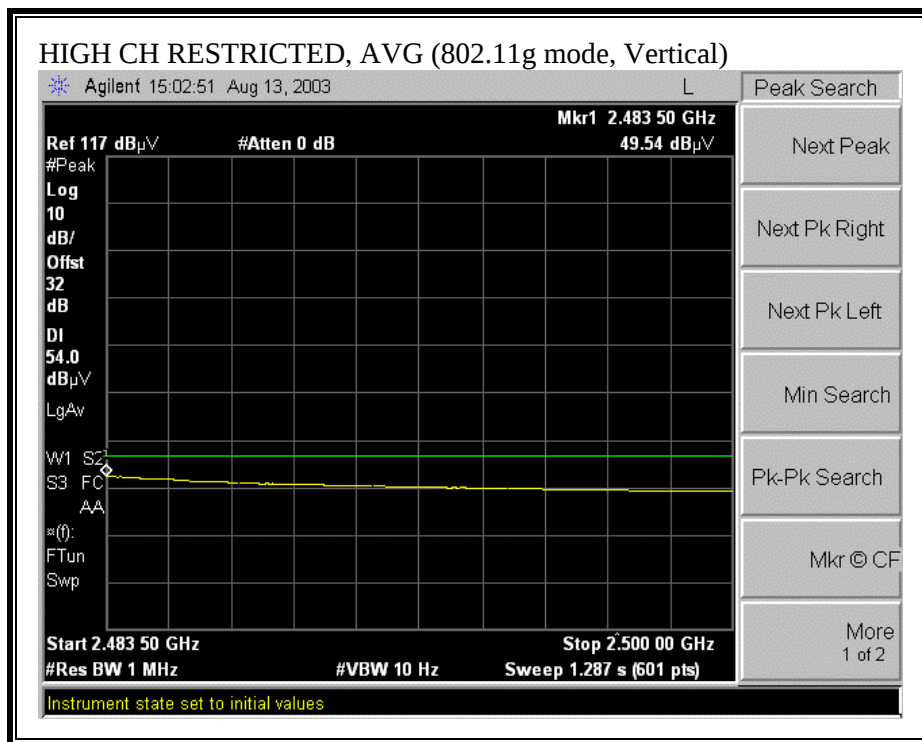



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

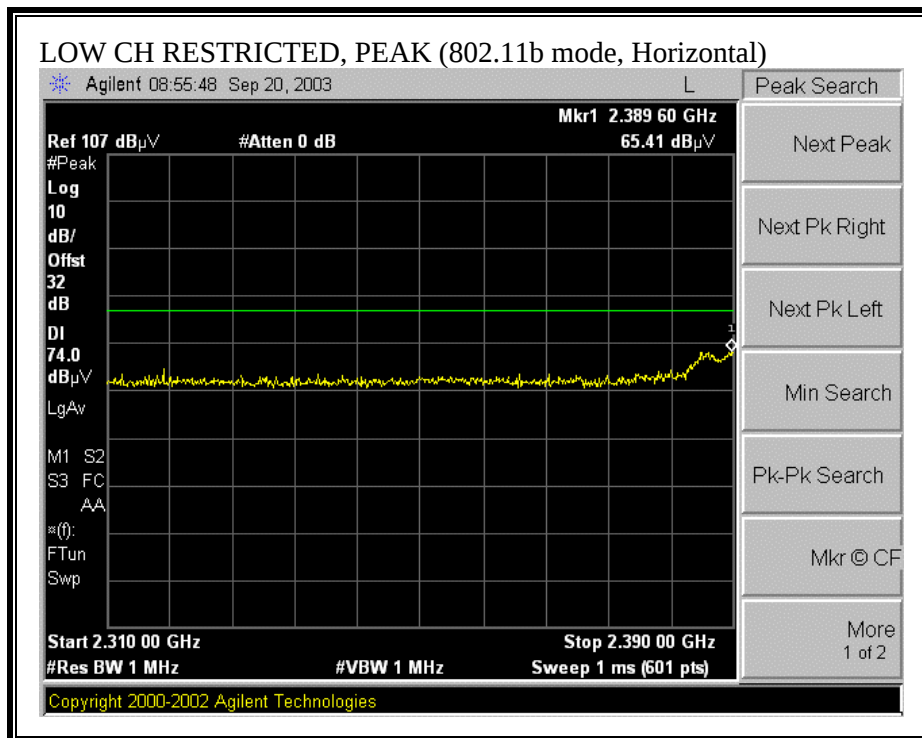

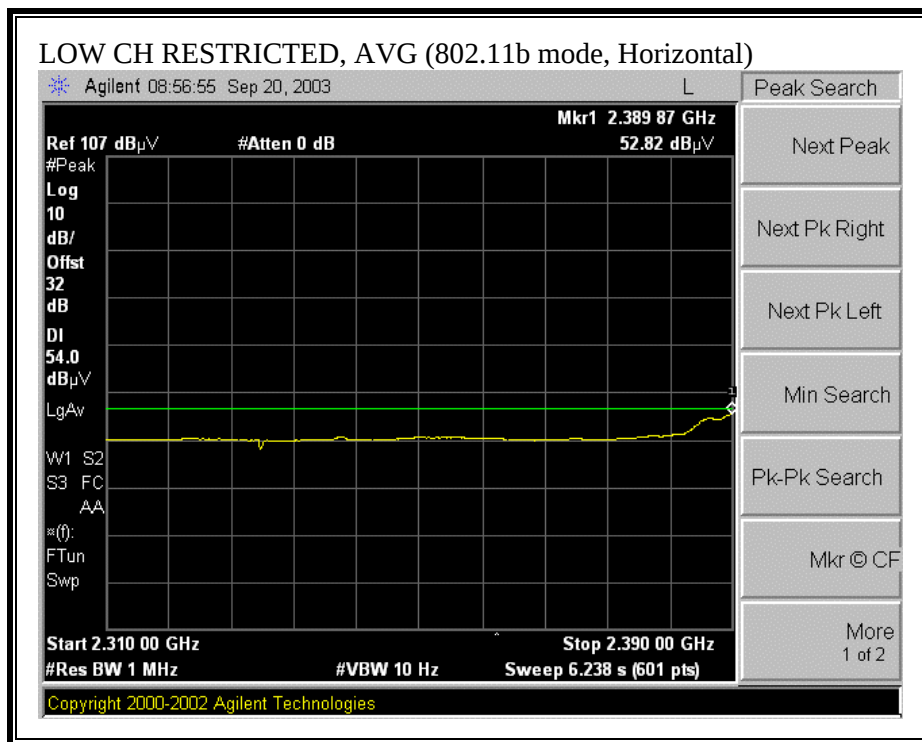



RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

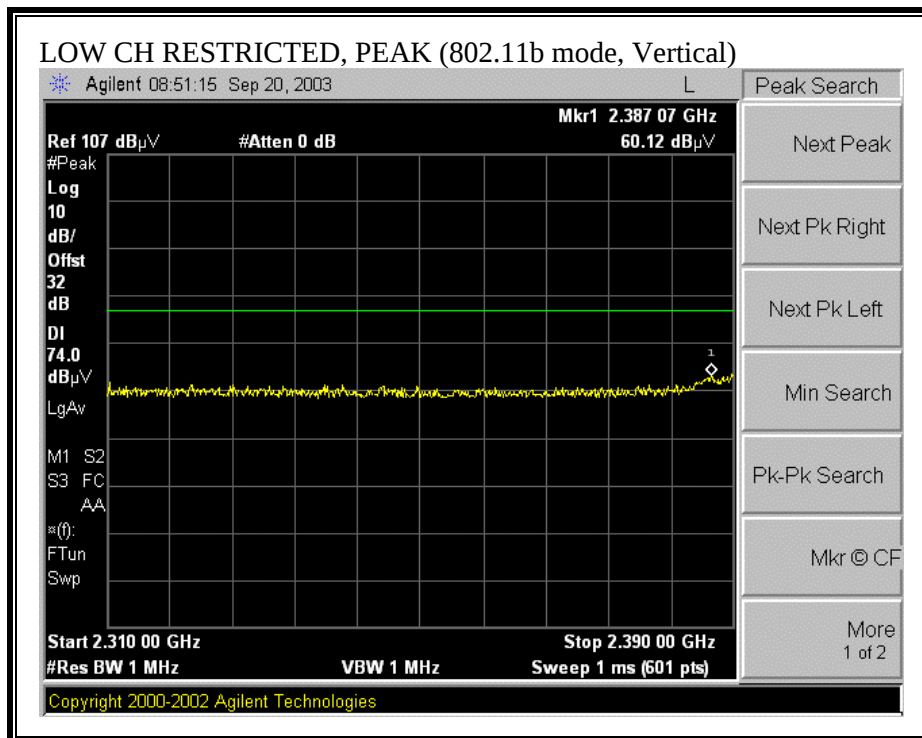

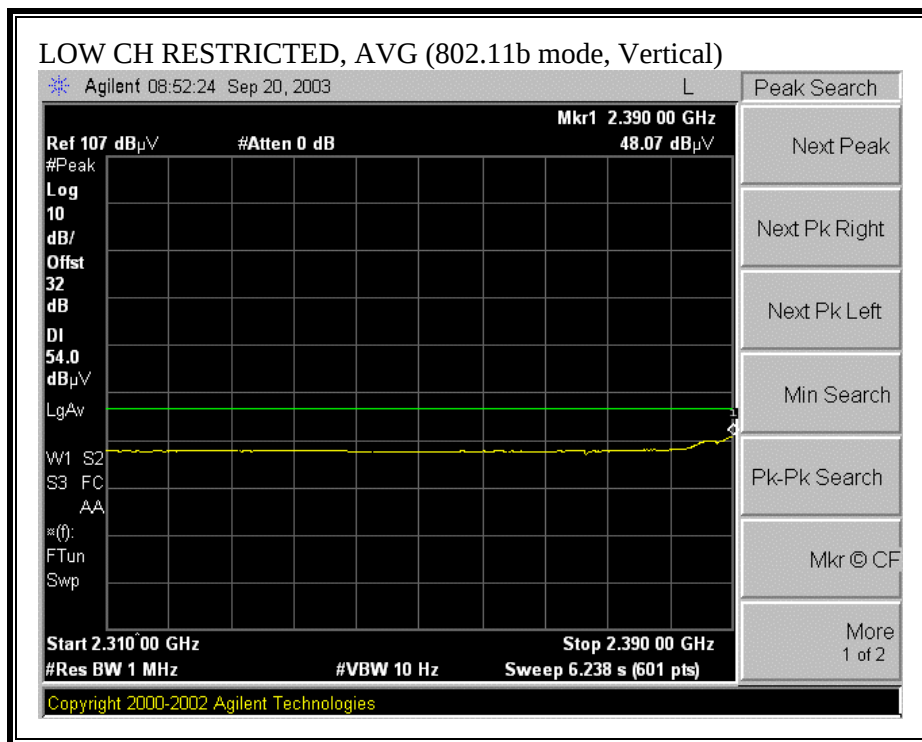



RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)

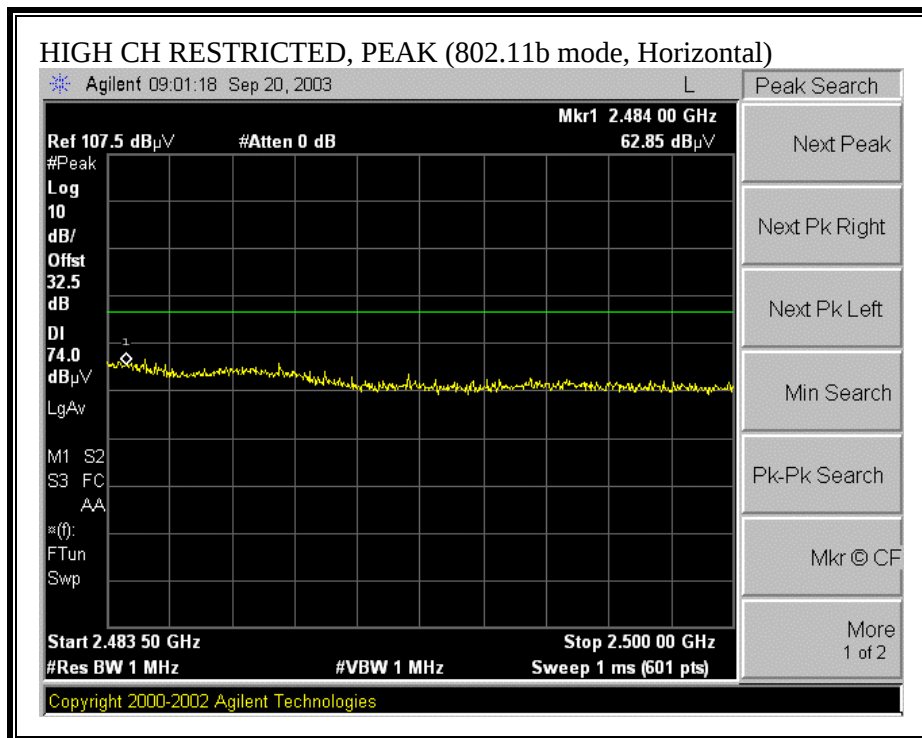

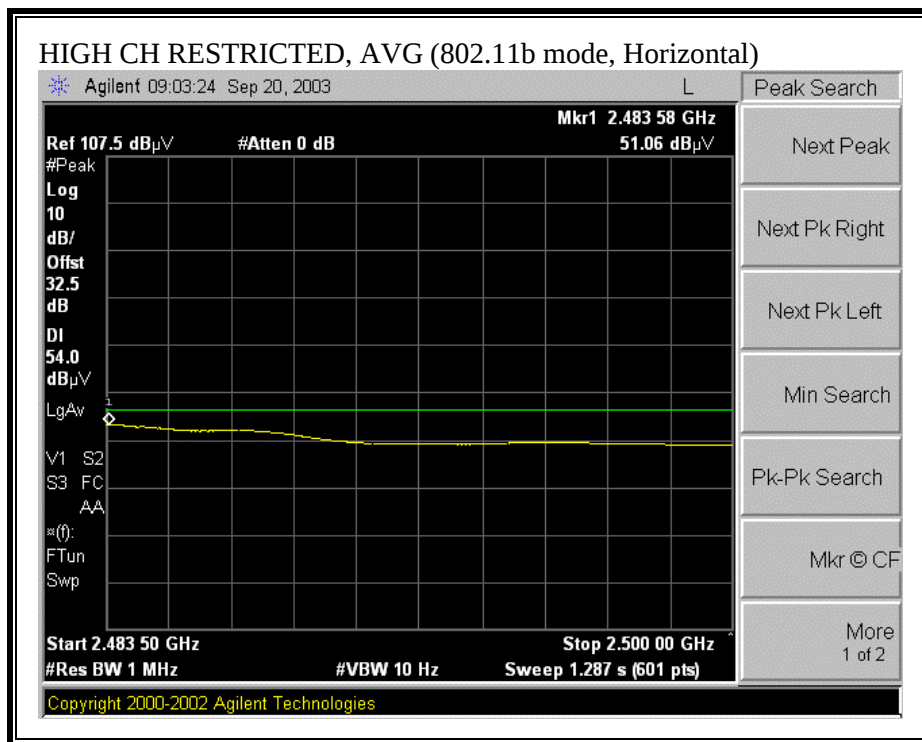

RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

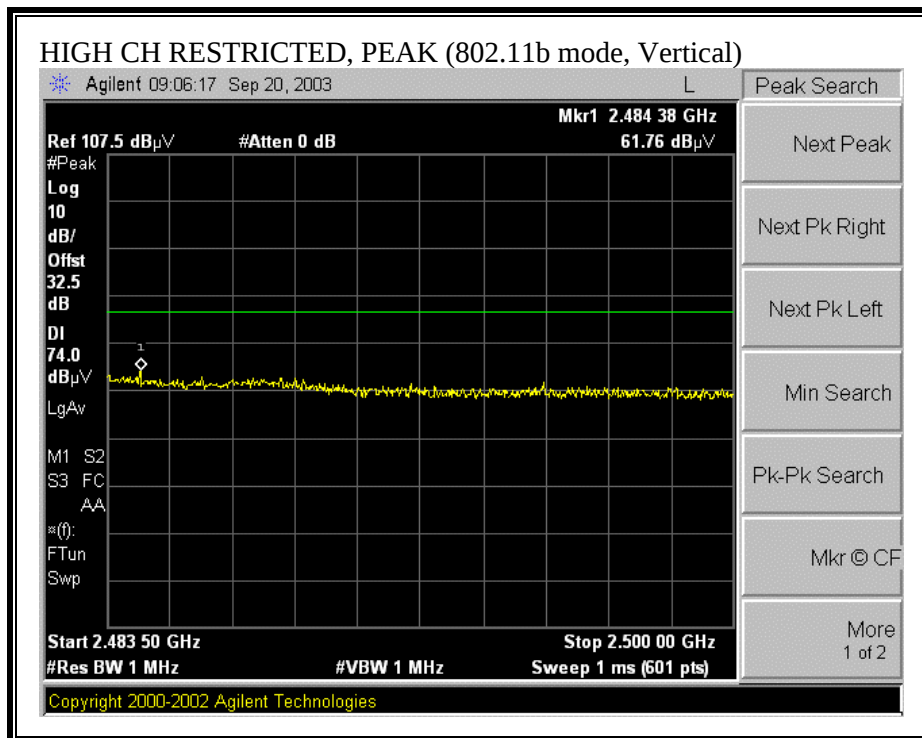

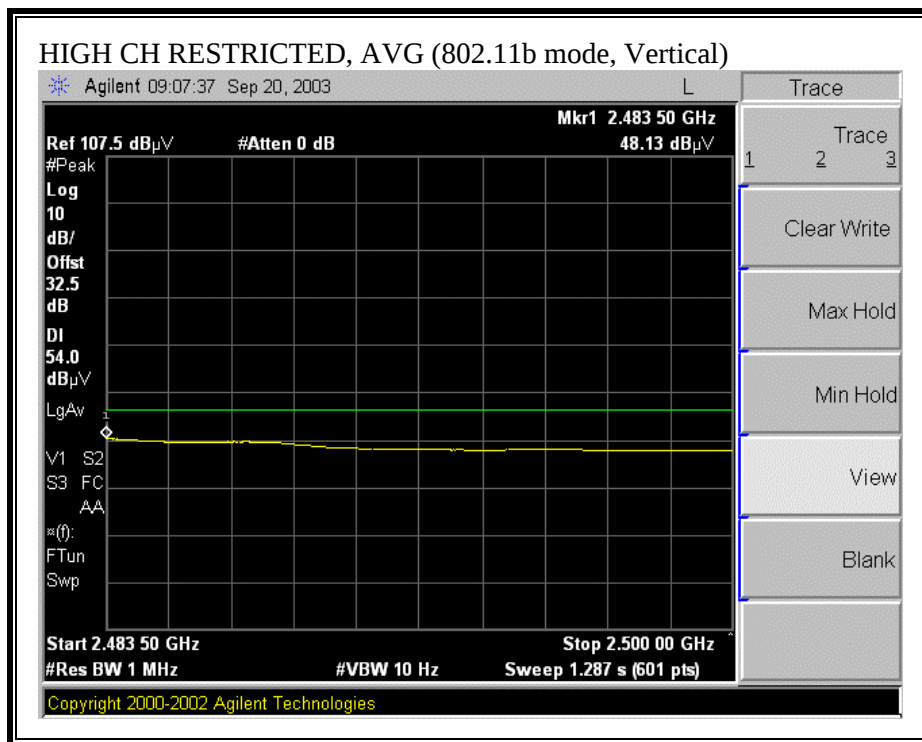

HARMONICS AND SPURIOUS EMISSIONS (q NORMAL MODE, L, M & H CHANNEL)

03/14/03 High Frequency Measurement															
Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: Chin Pang															
Project #: 03U2192-1															
Company: Broadcom Corporation															
EUT Descrip.: Broadcom 54g Mini PCI Card in PP2200 Laptop															
EUT M/N: BSM94306MP&G															
Test Target: FCC Class B															
Mode Oper: TX															
Test Equipment:															
EMCO Horn 1-18GHz		Pre-amplifier 1-26GHz		Spectrum Analyzer		Horn > 18GHz		Limit							
T60; S/N: 2238 @3m		T86 Miniq 924341		Agilent E4466A Analyzer				FCC 15.205							
HF Frequency Cables ☐ (2 ft) ☒ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)										Peak Measurements: 1 MHz Resolution Bandwidth 1 MHz Video Bandwidth Average Measurements: 1 MHz Resolution Bandwidth 10 Hz Video Bandwidth					
f	Dist	Read Pk	Read Avg	AF	CL	Amp	D Corr	HPF	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes
GHz	feet	dBuV	dBuV	dB/m	dB	dB	dB		dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	
Transmitting at low ch															
4.824	9.8	59.0	43.0	33.1	3.9	-45.6	0.0	1.0	51.4	35.4	74.0	54.0	-22.6	-18.6	V
4.824	9.8	55.9	41.3	33.1	3.9	-45.6	0.0	1.0	48.3	33.7	74.0	54.0	-25.7	-20.3	H
Transmitting at mid ch															
4.874	9.8	59.6	43.2	33.1	4.0	-45.6	0.0	1.0	52.0	35.6	74.0	54.0	-22.0	-18.4	V
7.311	9.8	52.3	39.8	36.2	5.2	-46.6	0.0	1.0	48.1	35.6	74.0	54.0	-25.9	-18.4	V
4.874	9.8	56.0	41.5	33.1	4.0	-45.6	0.0	1.0	48.4	33.9	74.0	54.0	-25.6	-20.1	H
7.311	9.8	51.7	39.4	36.2	5.2	-46.6	0.0	1.0	47.5	35.2	74.0	54.0	-26.5	-18.8	H
Transmitting at high ch															
4.924	9.8	58.6	42.5	33.2	4.0	-45.7	0.0	1.0	51.1	35.0	74.0	54.0	-22.9	-19.0	V
7.386	9.8	52.7	40.2	36.3	5.2	-46.5	0.0	1.0	48.6	36.1	74.0	54.0	-25.4	-17.9	V
4.924	9.8	55.5	41.2	33.2	4.0	-45.7	0.0	1.0	48.0	33.7	74.0	54.0	-26.0	-20.3	H
7.386	9.8	49.6	38.6	36.3	5.2	-46.5	0.0	1.0	45.5	34.5	74.0	54.0	-28.5	-19.5	H
No other emissions were detected above system noise floor.															
f	Measurement Frequency				Amp	Preamp Gain				Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna				D Corr	Distance Correct to 3 meters				Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading				Avg	Average Field Strength @ 3 m				Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor				Peak	Calculated Peak Field Strength				Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss				HPF	High Pass Filter									

HARMONICS AND SPURIOUS EMISSIONS (b NORMAL MODE, L, M & H CHANNEL)

09/19/03 High Frequency Measurement
Compliance Certification Services, Morgan Hill Open Field Site

Test Eng: Chin Pang
Project #: 03U2192-1
Company: Broadcom Corporation
EUT Descrip.: Broadcom 11b Mini PCI Card in PP2200 Laptop
EUT M/N: BSM194306MP&G
Test Target: FCC II Change (FCC 15.247)
Mode Oper: TX

Test Equipment:

EMCO Horn 1-18GHz T60; S/N: 2238 @3m	Pre-amplifier 1-26GHz T86 Miniq 924341	Spectrum Analyzer Agilent E4446A Analyzer	Horn > 18GHz	Limit FCC 15.205
---	---	--	--------------	---------------------

HF Frequency Cables:
☐ (2 ft) ☒ (2 ~ 3 ft) ☐ (4 ~ 6 ft) ☒ (12 ft)

Peak Measurements: 1 MHz Resolution Bandwidth
10MHz Video Bandwidth
Average Measurements: 1 MHz Resolution Bandwidth
10Hz Video Bandwidth

11b Mode

f GHz	Dist feet	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	HPF	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes
Transmitting at low ch															
4.824	9.8	58.7	44.7	33.1	3.9	-45.6	0.0	1.0	51.1	37.1	74.0	54.0	-22.9	-16.9	V
4.824	9.8	59.8	46.0	33.1	3.9	-45.6	0.0	1.0	52.2	38.4	74.0	54.0	-21.8	-15.6	H
Transmitting at mid ch															
4.874	9.8	55.5	44.2	33.1	4.0	-45.6	0.0	1.0	47.9	36.6	74.0	54.0	-26.1	-17.4	V
7.311	9.8	51.8	40.4	36.2	5.2	-46.6	0.0	1.0	47.6	36.2	74.0	54.0	-26.4	-17.8	V
4.874	9.8	56.2	46.4	33.1	4.0	-45.6	0.0	1.0	48.6	38.8	74.0	54.0	-25.4	-18.2	H
7.311	9.8	53.0	42.0	36.2	5.2	-46.6	0.0	1.0	48.8	37.8	74.0	54.0	-25.2	-16.2	H
Transmitting at high ch															
4.924	9.8	58.0	44.5	33.2	4.0	-45.7	0.0	1.0	50.5	37.0	74.0	54.0	-23.5	-17.0	V
7.386	9.8	52.0	40.0	36.3	5.2	-46.5	0.0	1.0	47.9	35.9	74.0	54.0	-26.1	-18.1	V
4.924	9.8	58.5	45.0	33.2	4.0	-45.7	0.0	1.0	51.0	37.5	74.0	54.0	-23.0	-16.5	H
7.386	9.8	52.0	41.6	36.3	5.2	-46.5	0.0	1.0	47.9	37.5	74.0	54.0	-26.1	-16.5	H

No other emissions were detected above system noise floor.

f	Measurement Frequency	Amp	Preamplifier Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

						Project #: 03U2192-1 Report #: 030814C1 Date & Time: 08/14/03 10:30 AM Test Engr: Chin Pang					
FCC, VCCI, CISPR, CE, AUSTEL, NZ UL, CSA, TUV, BSMI, DHHS, NVLAP 561F MONTEREY ROAD, SAN JOSE, CA 95037-9001 PHONE: (408) 463-0885 FAX: (408) 463-0888											
Company: Broadcom Corporation EUT Description: Broadcom 54g Mini PCI Card in PP2200 Test Configuration : EUT/Support Equipment Type of Test: FCC Class B Mode of Operation: Tx											
<< Main Sheet											

Freq.	Reading	AF	Closs	Pre-amp	Level	Limit	Margin	Pol	Az	Height	Mark
(MHz)	(dBuV)	(dB)	(dB)	(dB)	(dBuV/m)	FCC_B	(dB)	(H/V)	(Deg)	(Meter)	(P/Q/A)
720.00	45.50	21.26	5.03	27.83	43.96	46.00	-2.04	3mH	0.00	1.00	QP
480.00	50.25	17.22	3.94	27.47	43.94	46.00	-2.06	3mV	0.00	1.00	QP
720.00	45.27	21.26	5.03	27.83	43.73	46.00	-2.27	3mV	0.00	1.00	QP
576.00	47.90	18.19	4.44	27.73	42.79	46.00	-3.21	3mV	0.00	1.00	P
624.00	46.60	19.06	4.66	27.82	42.49	46.00	-3.51	3mH	0.00	1.00	QP
624.00	45.60	19.06	4.66	27.82	41.49	46.00	-4.51	3mV	0.00	1.00	P
6 Worst Data											

7.3. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.


RESULTS

No non-compliance noted:


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.18	59.03	--	48.64	0.00	65.17	55.17	-6.14	-6.53	L1
0.24	53.51	--	42.64	0.00	63.57	53.57	-10.06	-10.93	L1
22.30	51.08	--	25.64	0.00	60.00	50.00	-8.92	-24.36	L1
0.18	58.15	--	48.11	0.00	65.17	55.17	-7.02	-7.06	L2
0.24	51.49	--	41.10	0.00	63.57	53.57	-12.08	-12.47	L2
23.02	45.54	--	22.10	0.00	60.00	50.00	-14.46	-27.90	L2
6 Worst Data									

LINE 1 RESULTS

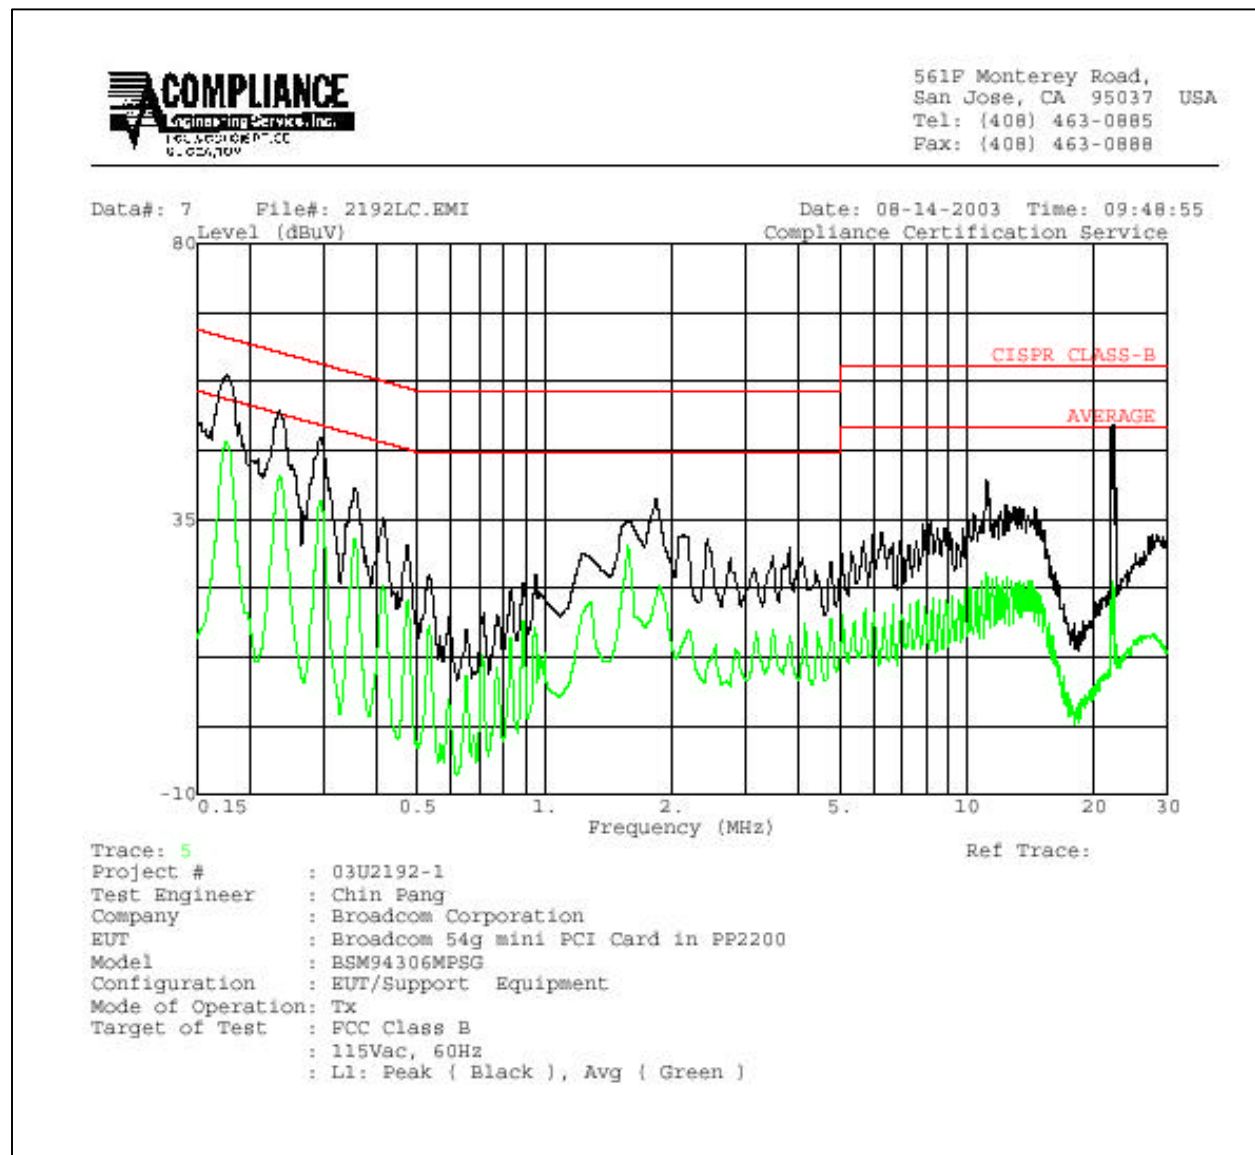


LINE 2 RESULTS

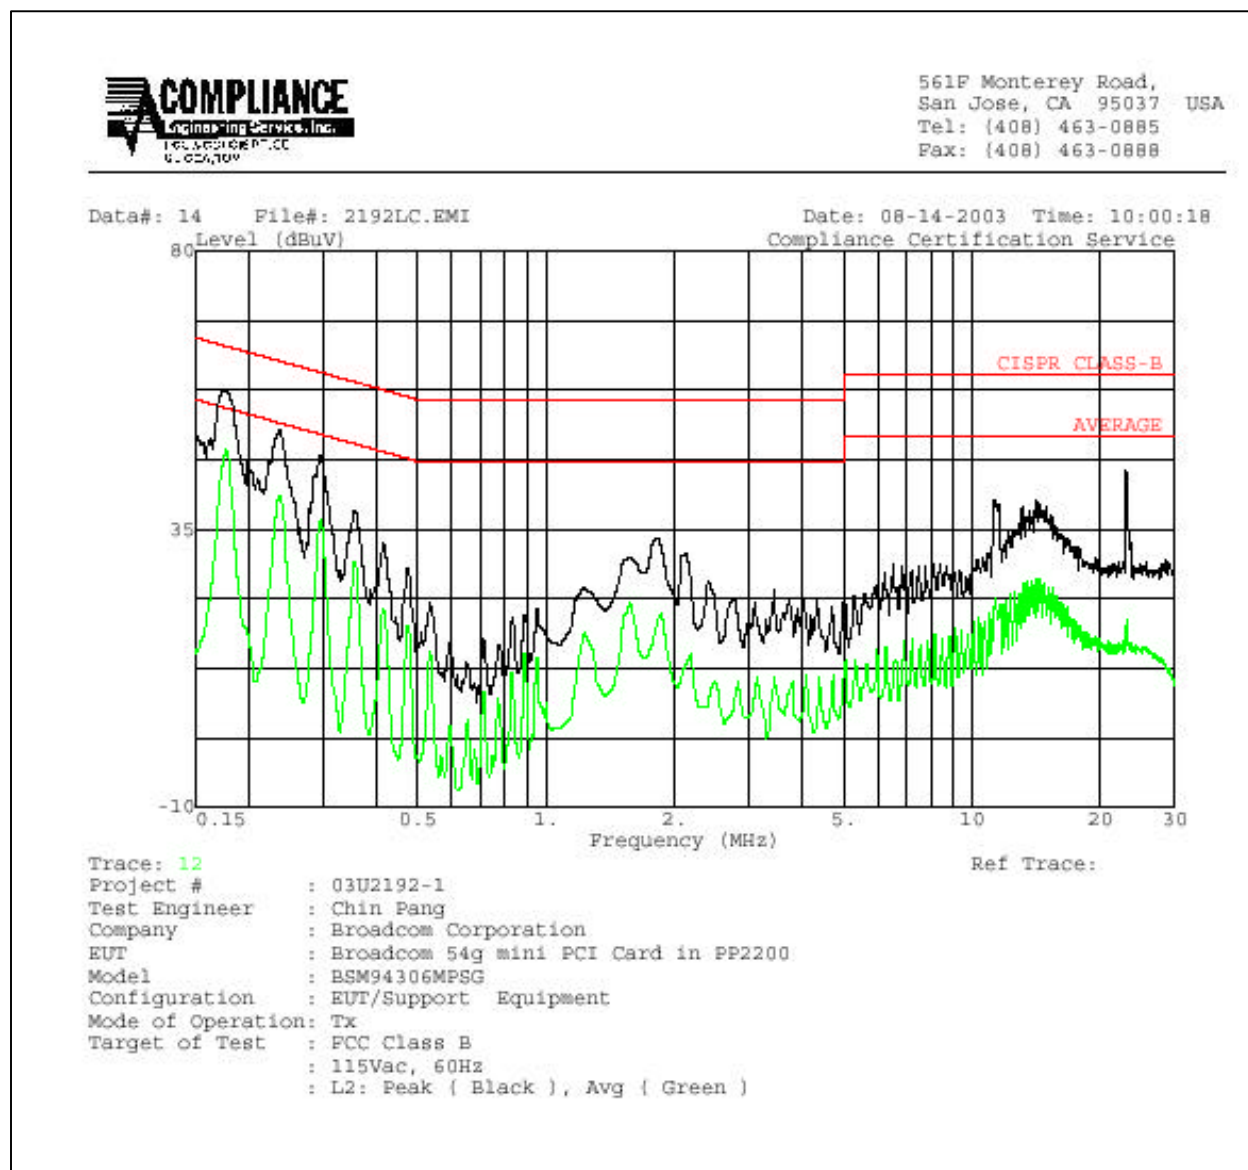

8. SETUP PHOTOS

RADIATED RF MEASUREMENT SETUP

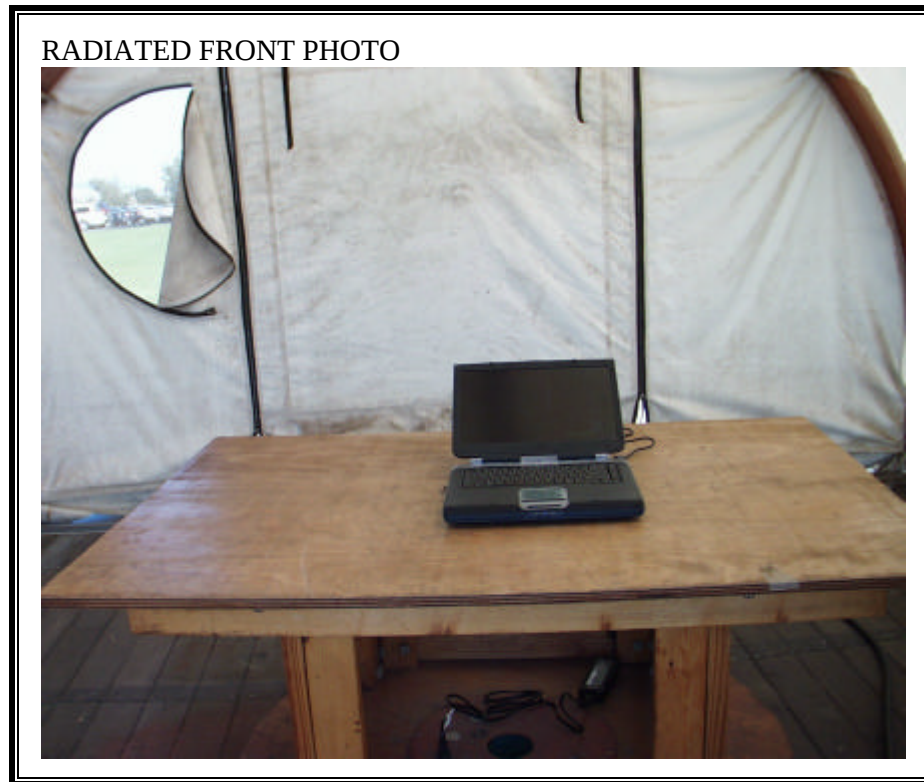

RADIATED BACK PHOTO



POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP



LINE CONDUCTED BACK PHOTO



END OF REPORT