



FCC Test Report

Test report no.: EMC_797FCC15.407_2004_5180_5320_PP14L

FCC Part 15.407 for UNII Devices / CANADA RSS-210 Issue 5 for LELEAN Devices

EUT: WLAN Model: BCM94309MP

HOST: Dell Laptop Model: PP14L

FCC ID: QDS-BRCM1015

IC ID: 4324B-94309MP

(This test report covers freq. band 5180 – 5320MHz)



TTI-P-G 081/94-A0

Accredited according to ISO/IEC 17025

Bluetooth™
Bluetooth Qualification
Test Facility
(BQTF)

CTIA Authorized Test Lab
LAB CODE 20020328-00

FCC listed # 101450

IC recognized # 3925

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686
Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

Table of Contents

1 General information

1.1 Notes

1.2 Testing laboratory

1.3 Details of applicant

1.4 Application details

1.5 Test item

1.6 Test standards

2 Technical test

2.1 Summary of test results

2.2 Test report

1 General information

1.1 Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

TEST REPORT PREPARED BY:

EMC Engineer: Harpreet Sidhu

1.2 Testing laboratory

CETECOM Inc.

411 Dixon Landing Road, Milpitas, CA-95035, USA

Phone: +1 408 586 6200 Fax: +1 408 586 6299

E-mail: lothar.schmidt@cetecomusa.com

Internet: www.cetecom.com

1.3 Details of applicant

Name	:	Broadcom corporation
Street	:	190 Mathilda Place
City / Zip Code	:	Sunnyvale, CA 94086
Country	:	USA
Contact	:	Dan Lawless
Telephone	:	408-922-5870
Tele-fax	:	408-543-3399
e-mail	:	dlawless@broadcom.com

1.4 Application details

Date of receipt test item	:	2004-11-15
Date of test	:	2003-11-19, 2004-11-15, 2005-02-01

1.5 Test item

Manufacturer	:	Applicant
Model No. (EUT)	:	BCM94309MP
Model No. (Host)	:	PP14L (Dell Laptop)
Description	:	WLAN MiniPCI Multiband card incorporating 2.4GHz and 5GHz radios
FCC ID	:	QDS-BRCM1015
IC ID	:	4324B-94309MP

Additional information

Frequency	:	5180MHz – 5320MHz for 5GHz band
Type of modulation	:	DSSS / OFDM (orthogonal frequency division multiplexing)
Number of channels	:	11 for 2.4GHz band 13 for 5GHz band
Antenna	:	Hitachi Stamped metal sheet antenna 5.1dBi
Power supply	:	3.3 VDC from Host
Output power	:	21.8dBm conducted peak power
Extreme temp. Tolerance	:	0°C to +70°C

1.6 Test standards:

FCC Part 15 §15.407 / CANADA RSS-210
Measurements done as per DA 02-2138

PROJECT OVERVIEW:

BCM94309MP is WLAN MiniPCI Multiband card incorporating 2.4GHz and 5GHz radios.

This test report carries all measurements required as per FCC 15.407 on WLAN mini PCI card tested in laptop model PP14L in freq. band 5180-5320MHz **with Hitachi stamped metal sheet ant. max gain 5.1dBi**

WLAN was tested for spurious emissions in different data rates (1, 2, 5.5, 6, 11, and 54) to ensure compliance of the whole device. Test report shows only worst-case test results of all data rates.

BCM94309MP antenna list						
No	Dell Model (Internal Name)	Supplier	Antenna Type	Model number	Max Peak gain 2.4GHz/dBi	Max Peak Gain 5GHz/dBi
1	Dell PP09L	Hitachi	PIFA stamped Metal	HFT08-DL-AS (Antenna side) HFT08-DL-MS (Module side)	2.9 (Aux)	2.8 (Main)
2	Dell PP14L	Hitachi	PIFA stamped Metal	HFT17-DL03	Main 1.5 (H)	Main 5.1 (V)

2 Technical test**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests
Performed

Final Verdict: (Only "passed" if all single measurements are "passed")	Passed
---	---------------

Technical responsibility for area of testing:

2005-02-17 EMC & Radio

Lothar Schmidt
(Technical Manager)



Date	Section	Name	Signature
------	---------	------	-----------

Responsible for test report and project leader:

2005-02-17 EMC & Radio Harpreet Sidhu (EMC Engineer)



Date	Section	Name	Signature
------	---------	------	-----------

2.2 Test report

TEST REPORT

Test report no.: EMC_797FCC15.407_2004_5180_5320_PP14L

FCC Part 15.407 for UNII Devices / CANADA RSS-210

TEST REPORT REFERENCE

		PAGE
LIST OF MEASUREMENTS		PAGE
EMISSION BANDWIDTH	§15.407(a)(1)(2)	8
99% POWER BANDWIDTH	RSS-210 §6.2.2(q1)(i)(ii)	12
OUTPUT POWER	§ 15.407 (a)(1)(2)	13
PEAK POWER SPECTRAL DENSITY	§15.407 (a)(1)(2)(5)	15
PEAK EXCURSION	§15.407 (a)(6)	19
BAND EDGE COMPLIANCE	§15.407 (b)(1)(2)(4)(6)	23
EMISSION LIMITATIONS	§ 15.407 (b)(1)(2)(4)(6)	27
CONDUCTED EMISSIONS	§ 15.107/207	39
RECEIVER SPURIOUS RADIATION	§ 15.209	40
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS		47
BLOCK DIAGRAMS		48

EMISSION BANDWIDTH**§15.407(a)(1)(2)****26dB bandwidth****(Data rate – 6Mbps)**

6Mbps is found to be worst-case for this measurement. Following method as defined in DA 02-2138 was used for this measurement.

Test Procedure:

- Use a RBW = approximately 1% of the emission bandwidth.
- Set the VBW > RBW
- Use a peak detector
- Do not use the max hold function. Rather, use the view button to capture the emission.
- Measure the maximum width of the emission that is 26dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.


Test Results

TEST CONDITIONS		26 dB BANDWIDTH (MHz)		
Frequency (MHz)		5180	5260	5320
T_{nom}(23)°C	V_{nom}(3.3) VDC	18.83	21.54	24.94

LIMIT**SUBCLAUSE §15.407(c)**

Determination of the emissions bandwidth is based on the use of measurement instrumentation employing a peak detector function with an instrument resolutions bandwidth approximately equal to 1.0 percent of the emission bandwidth of the device under measurement.

ANALYZER SETTINGS: RBW=300KHz, VBW=1MHz

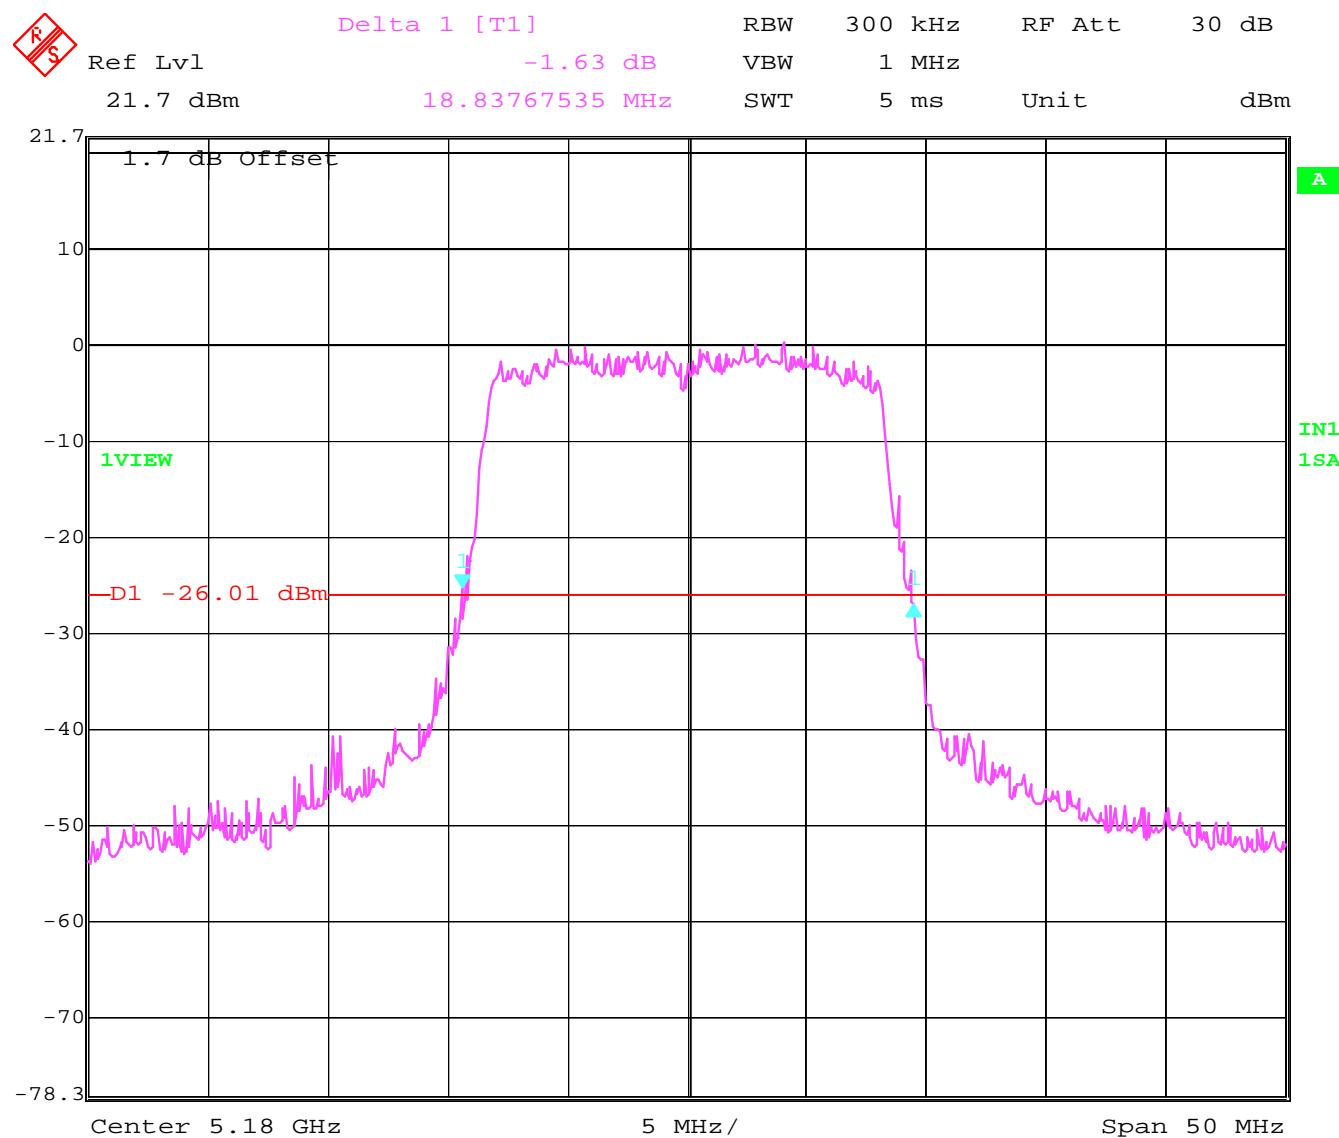EMISSION BANDWIDTH**§15.407(a)(1)(2)****26 dB bandwidth****(Data rate – 6Mbps)****Lowest Channel: 5180MHz**


EMISSION BANDWIDTH

§15.407(a)(1)(2)


26 dB bandwidth

(Data rate – 6Mbps)

Mid Channel: 5260MHz

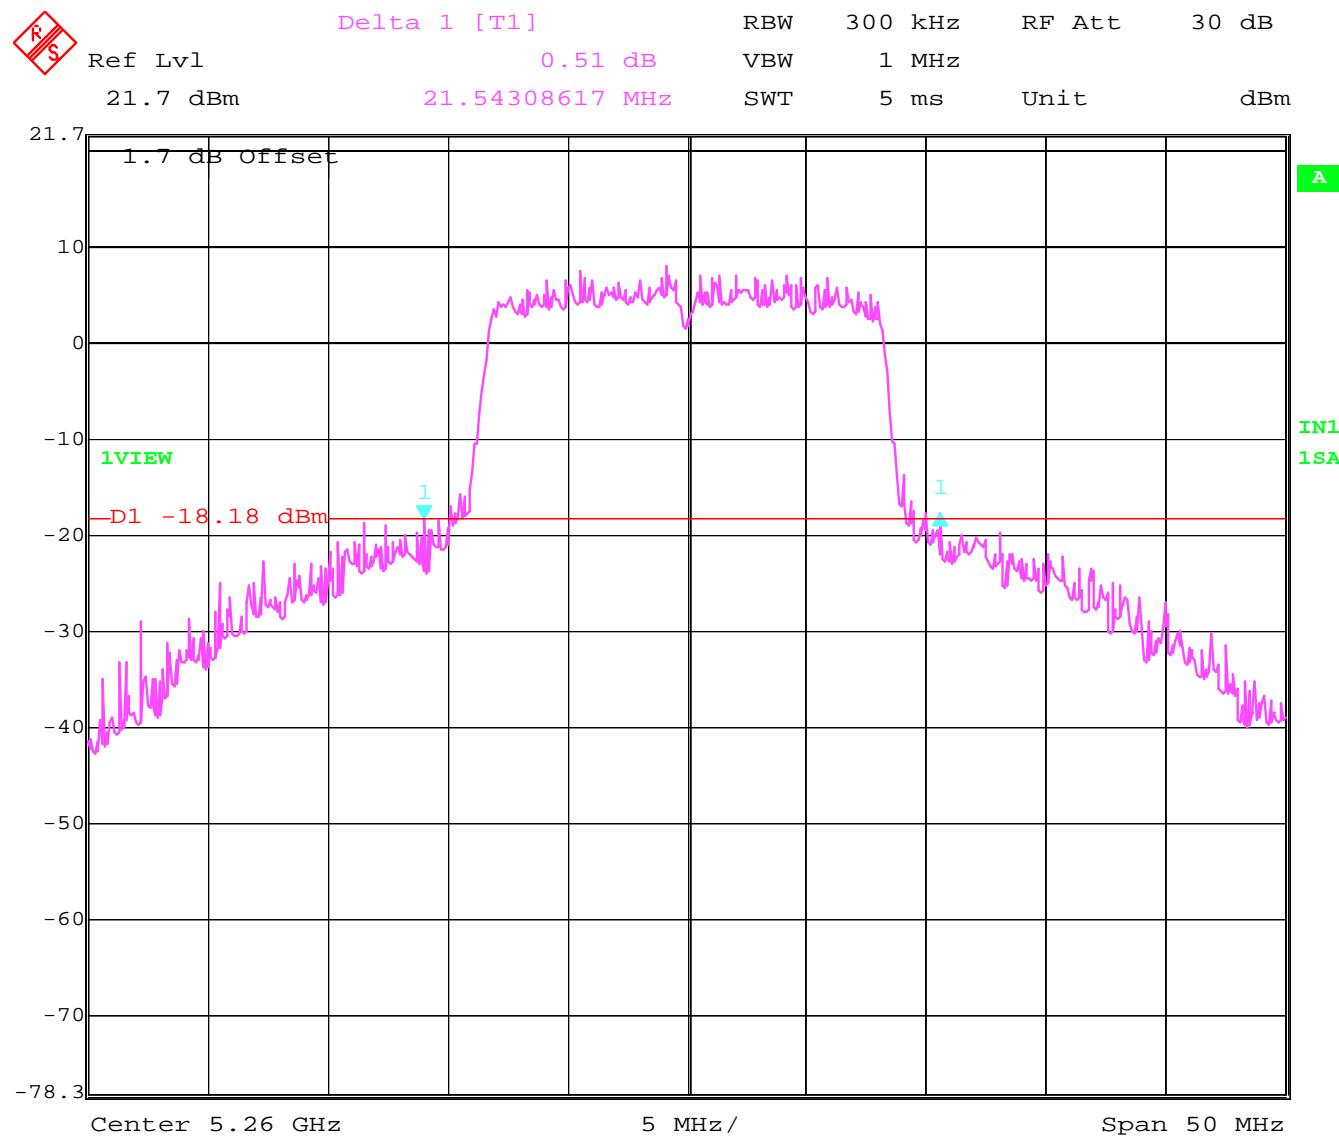

Date: 18.NOV.2003 09:30:37

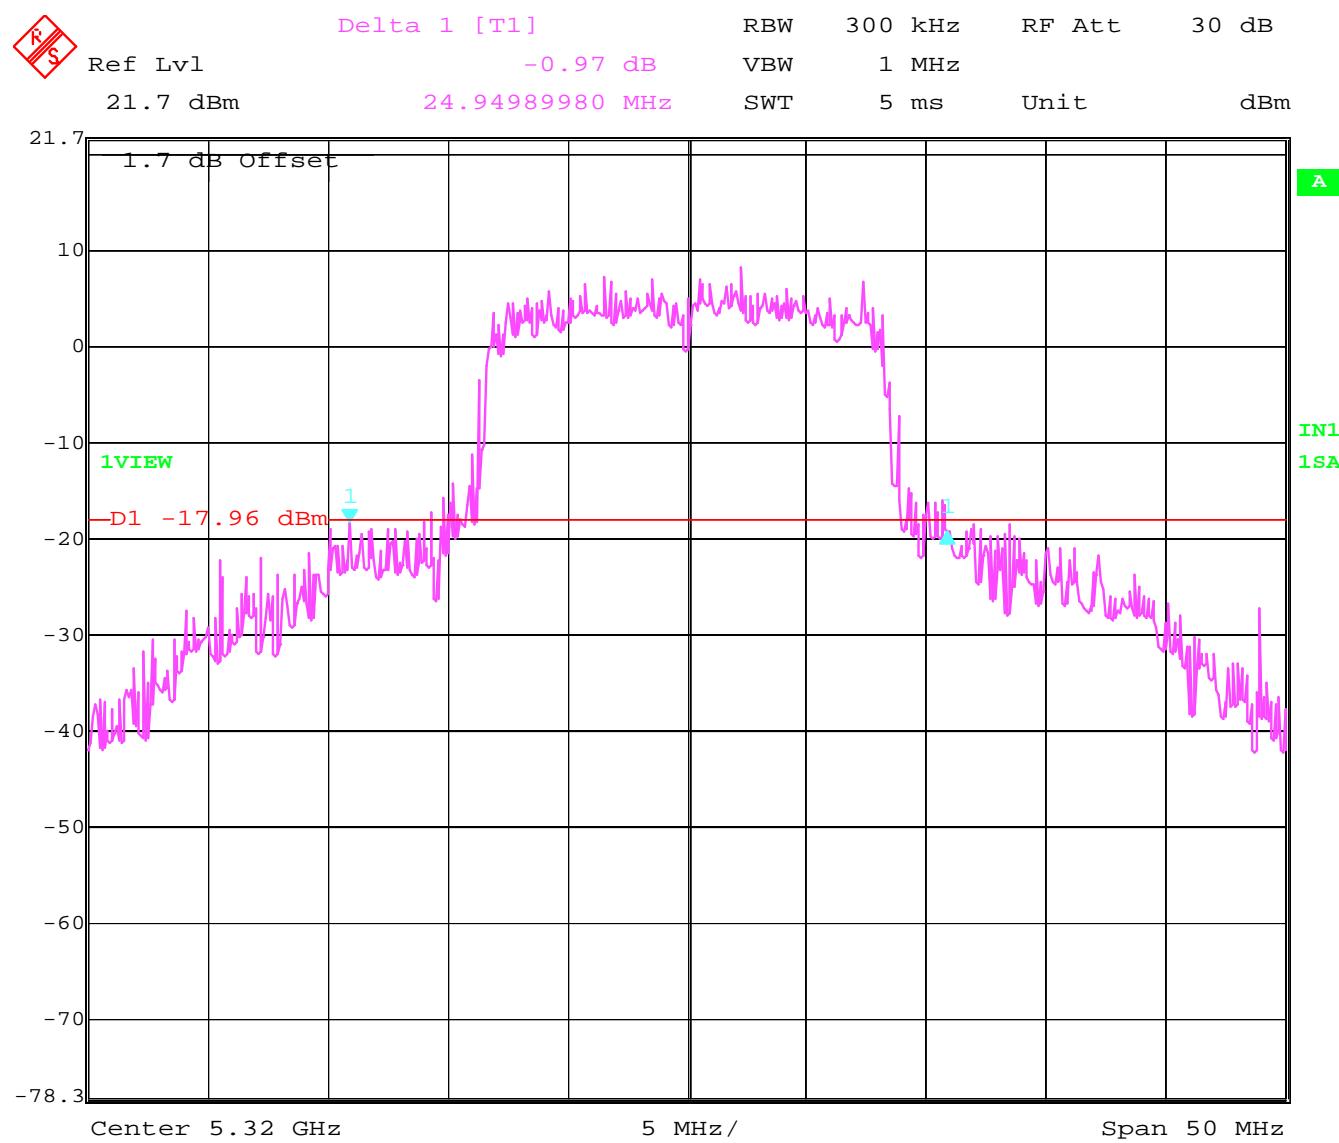EMISSION BANDWIDTH**§15.407(a)(1)(2)****26 dB bandwidth****(Data rate – 6Mbps)****Highest Channel: 5320MHz**

99% POWER BANDWIDTH
20 dB bandwidth
(Data rate – 6Mbps)

RSS-210 §6.2.2(q1)(i)(ii)

Test Results

TEST CONDITIONS		20 dB BANDWIDTH (MHz)		
Frequency (MHz)		5180	5260	5320
$T_{nom}(23)^\circ C$	$V_{nom}(3.3) VDC$	17.83	17.93	17.93

ANALYZER SETTINGS: RBW=300KHz, VBW=1MHz

OUTPUT POWER**§ 15.407 (a)(1)(2)****(Conducted)****(Data rate – 54Mbps)**

54Mbps is found to be worst-case for peak output power.

Test Procedure:**DA 02-2138****Test Results**

TEST CONDITIONS		CONDUCTED OUTPUT POWER (dBm)			
Frequency (MHz)		5180		5260	5320
T _{nom} (23)°C	V _{nom} (3.3) VDC	Pk	15.0	21.5	21.8
Measurement uncertainty		±0.5dBm			

LIMIT**SUBCLAUSE § 15.407 (a)(1)(2)**

Frequency range (GHz)	Conducted Peak Power
5.15 – 5.25	17dBm
5.25 – 5.35	24dBm

OUTPUT POWER § 15.407 (a)(1)(2)**(RADIATED)****(Data rate – 54Mbps)**

54Mbps is found to be worst-case for peak output power.

Test Procedure:

DA 02-2138

EIRP:**Test Results**

TEST CONDITIONS		OUTPUT POWER EIRP (dBm)		
		5180	5260	5320
T_{nom} (23)°C	V_{nom} (3.3) VDC	*20.1	*26.6	*26.9
Measurement uncertainty		±0.5dBm		

*Note: EIRP is calculated based on 5.1dBi antenna gain and conducted power measurements.

LIMIT**SUBCLAUSE § 15.407 (a)(1)(2)**

Frequency range (GHz)	Conducted Peak Power
5.15 – 5.25	17dBm
5.25 – 5.35	24dBm

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi

PEAK POWER SPECTRAL DENSITY**§15.407 (a)(1)(2)(5)****(Data rate – 6Mbps)**

6Mbps is found to be worst-case data rate for Power spectral density. Method-2 from DA 02-2138 was used for this measurement.

Test Procedure (Method-2):

Use sample detector and power averaging (not video averaging) mode. Set RBW=1MHz, VBW>1MHz. The PPSD is the highest level found across the emission in any 1-MHz band after 100 sweeps of averaging. This method is permitted only if the transmission pulse or sequence of pulses remains at maximum transmit power throughout each of the 100 sweeps of averaging and that the interval between pulses is not included in any of the sweeps. (e.g.; 100 sweeps occur during one transmission, or each sweep gated to occur during a transmission)

Test Results


TEST CONDITIONS		POWER SPECTRAL DENSITY (dBm)		
		5180	5260	5320
T_{nom}(23)°C	V_{nom}(3.3) VDC	-3.48	3.06	4.97

LIMIT**SUBCLAUSE § 15.407 (a)(1)(2)**

Frequency range (GHz)	Conducted Peak Power
5.15 – 5.25	4dBm in any 1MHz band
5.25 – 5.35	11dBm in any 1MHz band

If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi


ANALYZER SETTINGS: RBW=1MHz, VBW=3MHz

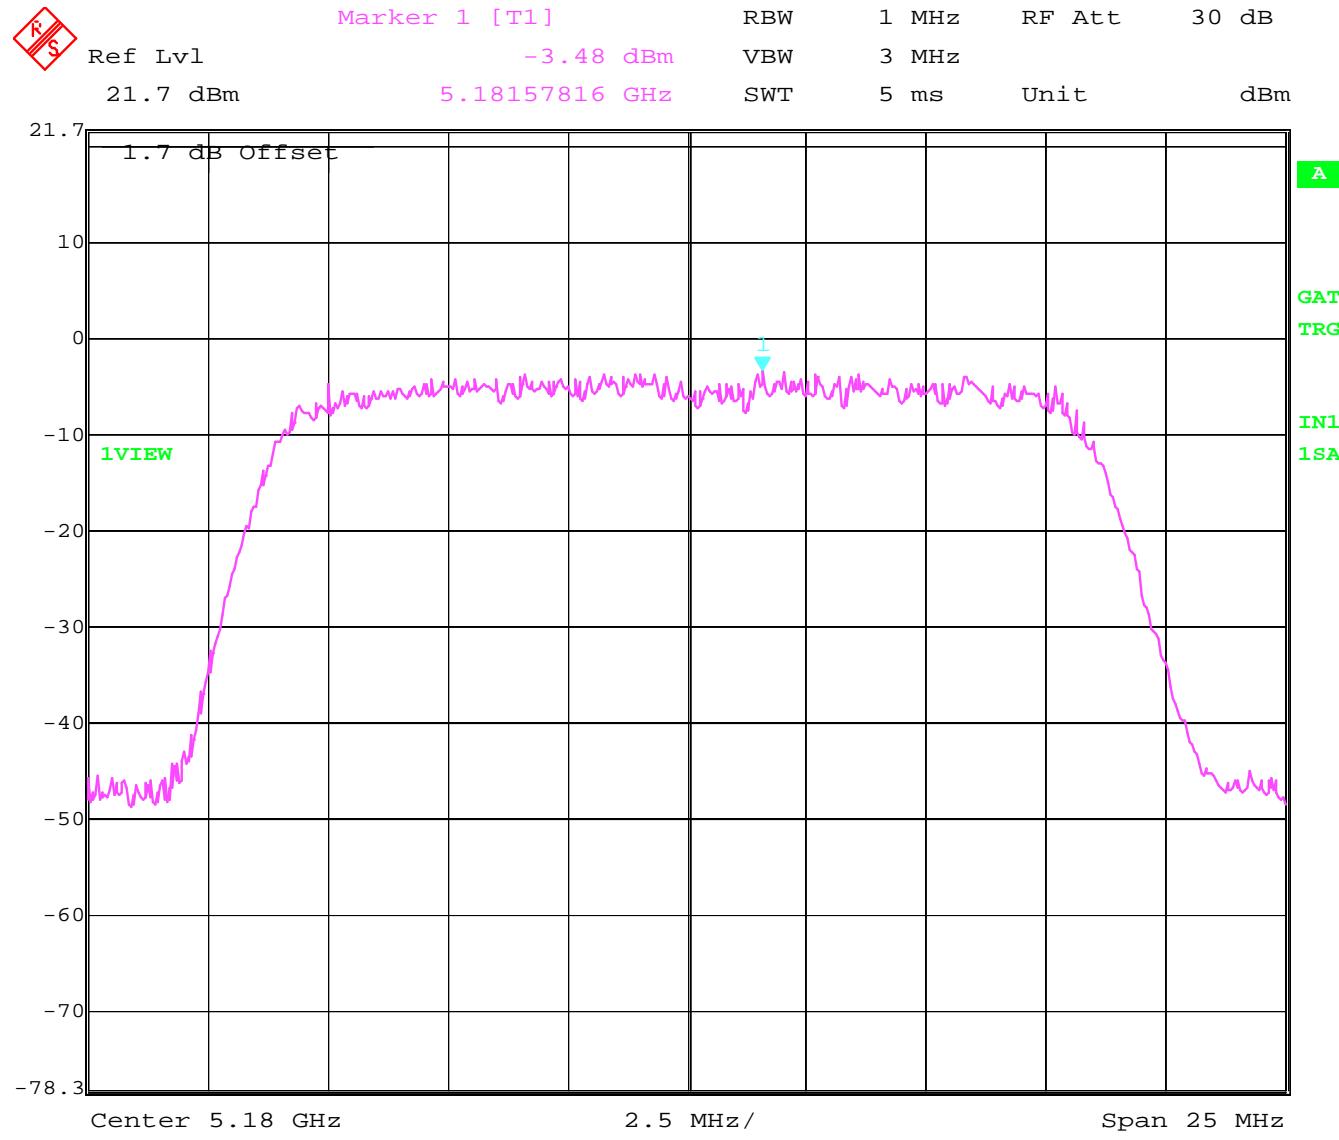POWER SPECTRAL DENSITY
(Data rate – 6Mbps)**§15.407(a)(1)(2)(5)****Lowest Channel: 5180MHz**


POWER SPECTRAL DENSITY
(Data rate – 6Mbps)

§15.407(a)(1)(2)(5)

Mid Channel: 5260MHz

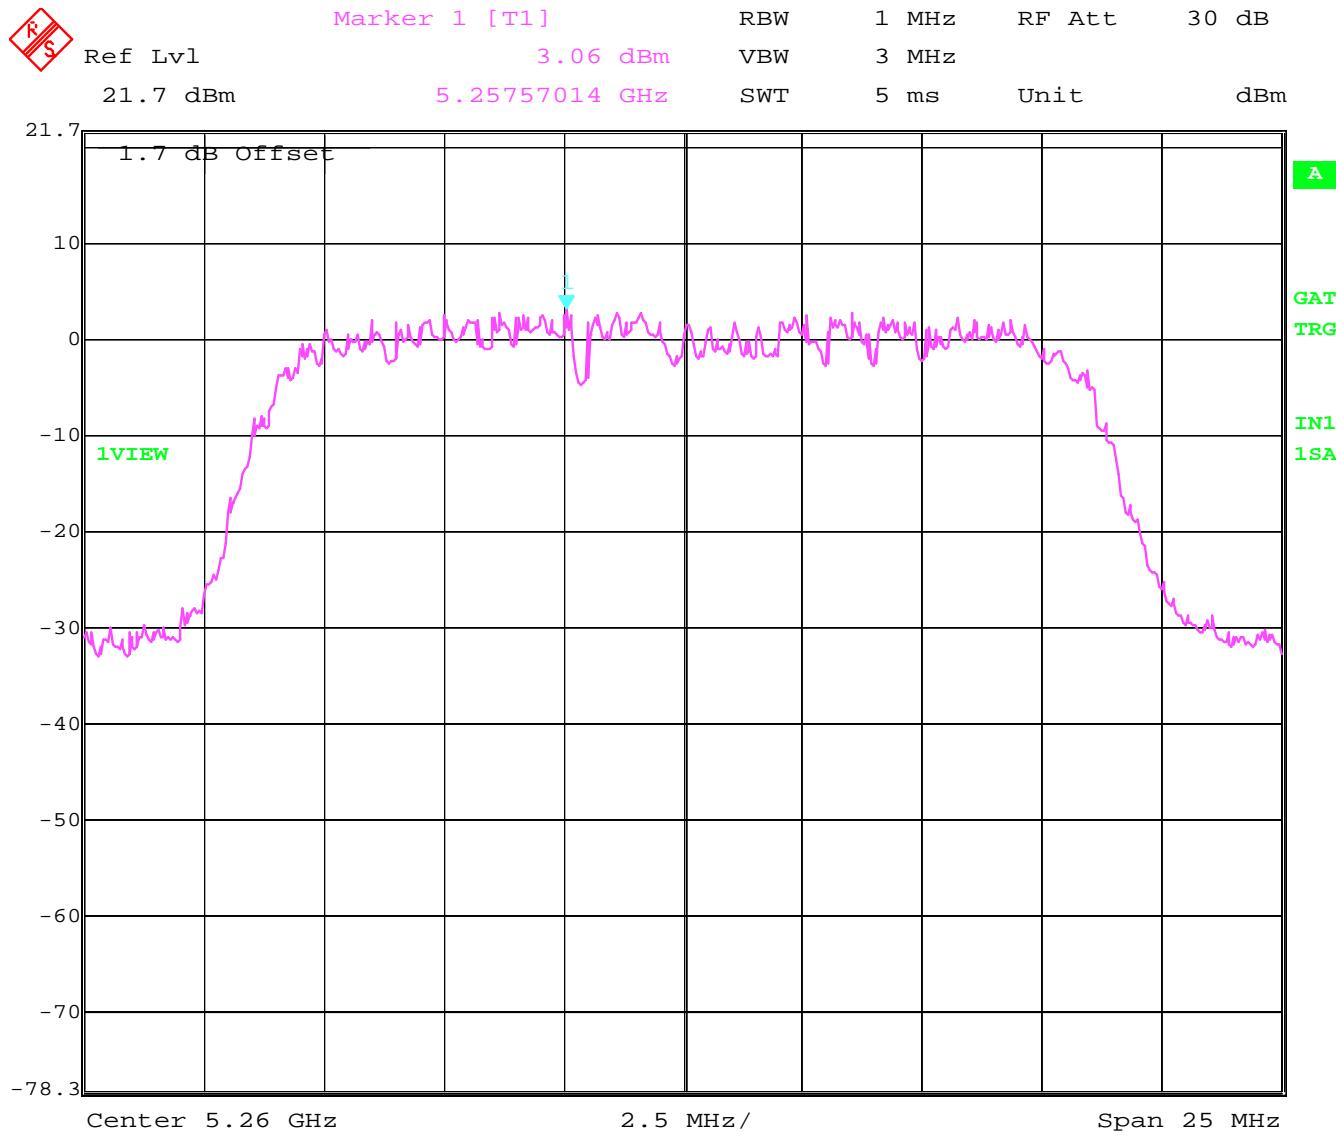

Date: 18.NOV.2003 13:43:13

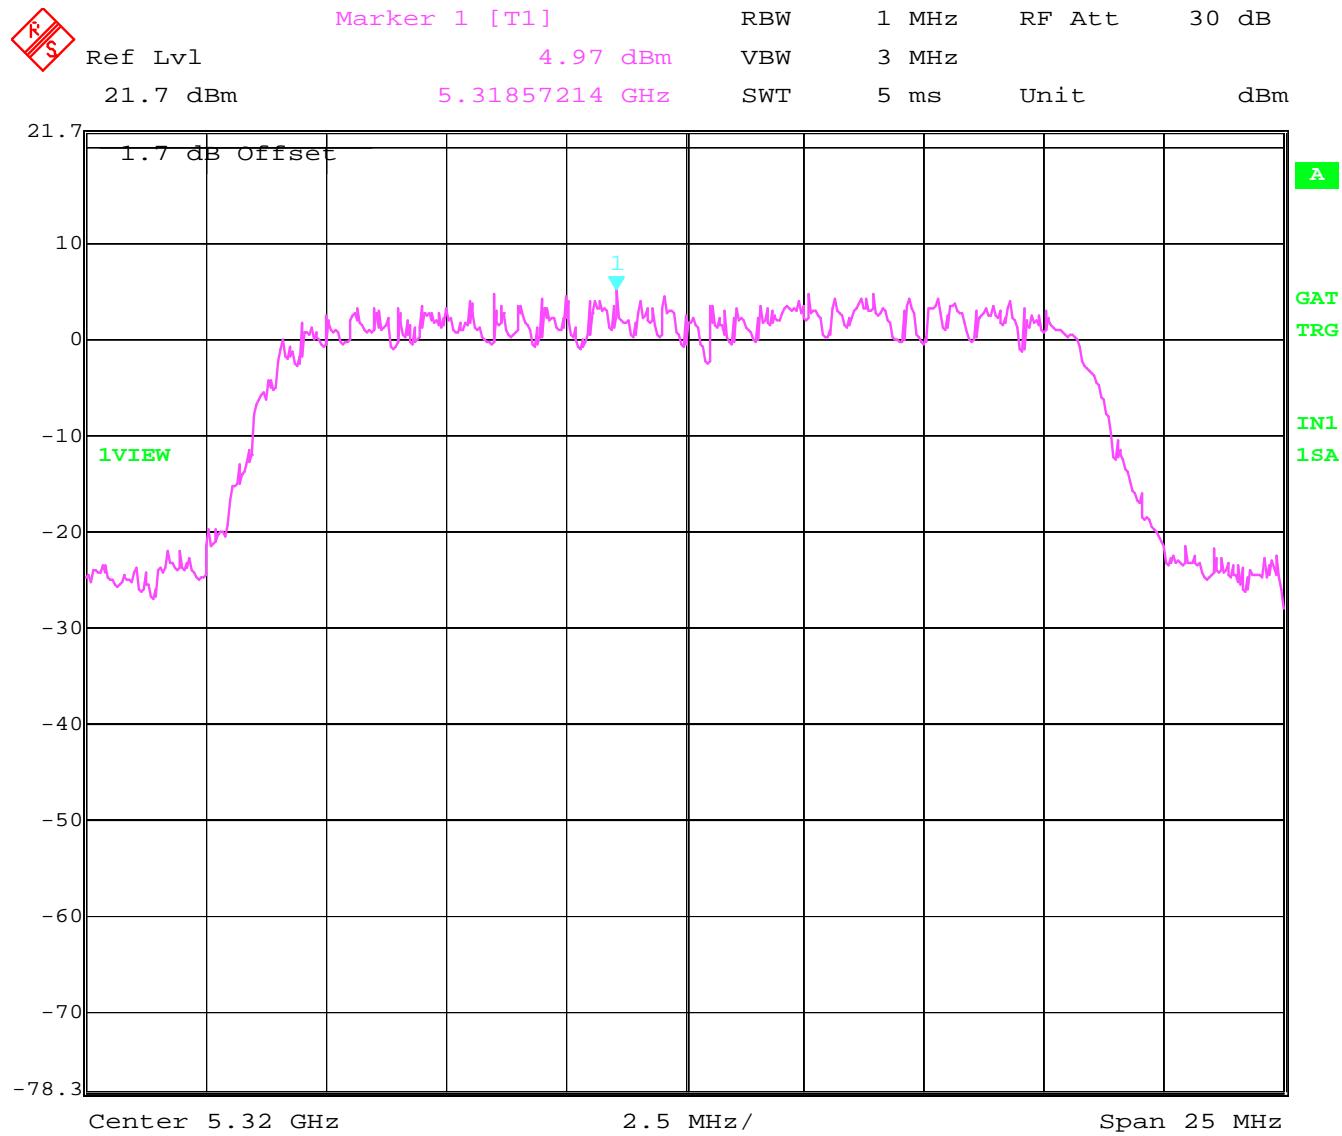**POWER SPECTRAL DENSITY
(Data rate – 6Mbps)****§15.407(a)(1)(2)(5)****Highest Channel: 5320MHz**

Date: 18.NOV.2003 13:49:11

PEAK EXCURSION**§15.407 (a)(6)****(Data rate – 54Mbps)**

54Mbps is found to be worst-case for this measurement. Following method as defined in DA 02-2138 was used for this measurement.

Test Procedure:

Set the spectrum analyzer span to view the entire emission bandwidth. The largest difference between the following two traces must be ≤ 13 dB for all frequencies across the emission bandwidth. Submit a plot.

1st Trace:

- Set RBW=1MHz, VBW \geq 3MHz with peak detector and max hold settings

2nd Trace:

- If method #1 was used for the peak conducted transmit output power test, then create the 2nd trace using the settings described in method #1.
- If method #2 or #3 were used for the peak conducted transmit power test, then create the 2nd trace using the settings described in method #3.

Since method #3 is applicable for measuring peak output power for EUT following analyzer settings were used;

1st Trace: RBW = 1MHz, VBW = 3MHz

2nd Trace: RBW = 1MHz, VBW = 5KHz

Test Results


TEST CONDITIONS		PEAK EXCURSION RATIO (dB)		
Frequency (MHz)		5180	5260	5320
T _{nom} (23)°C	V _{nom} (3.3) VDC	11.83	12.54	11.76

LIMIT**SUBCLAUSE §15.407(a)(6)**

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power shall not exceed 13dB across any 1MHz bandwidth or the emission bandwidth which ever is less.

PEAK EXCURSION
(Data rate – 54Mbps)
Lowest Channel: 5180MHz


§15.407 (a)(6)

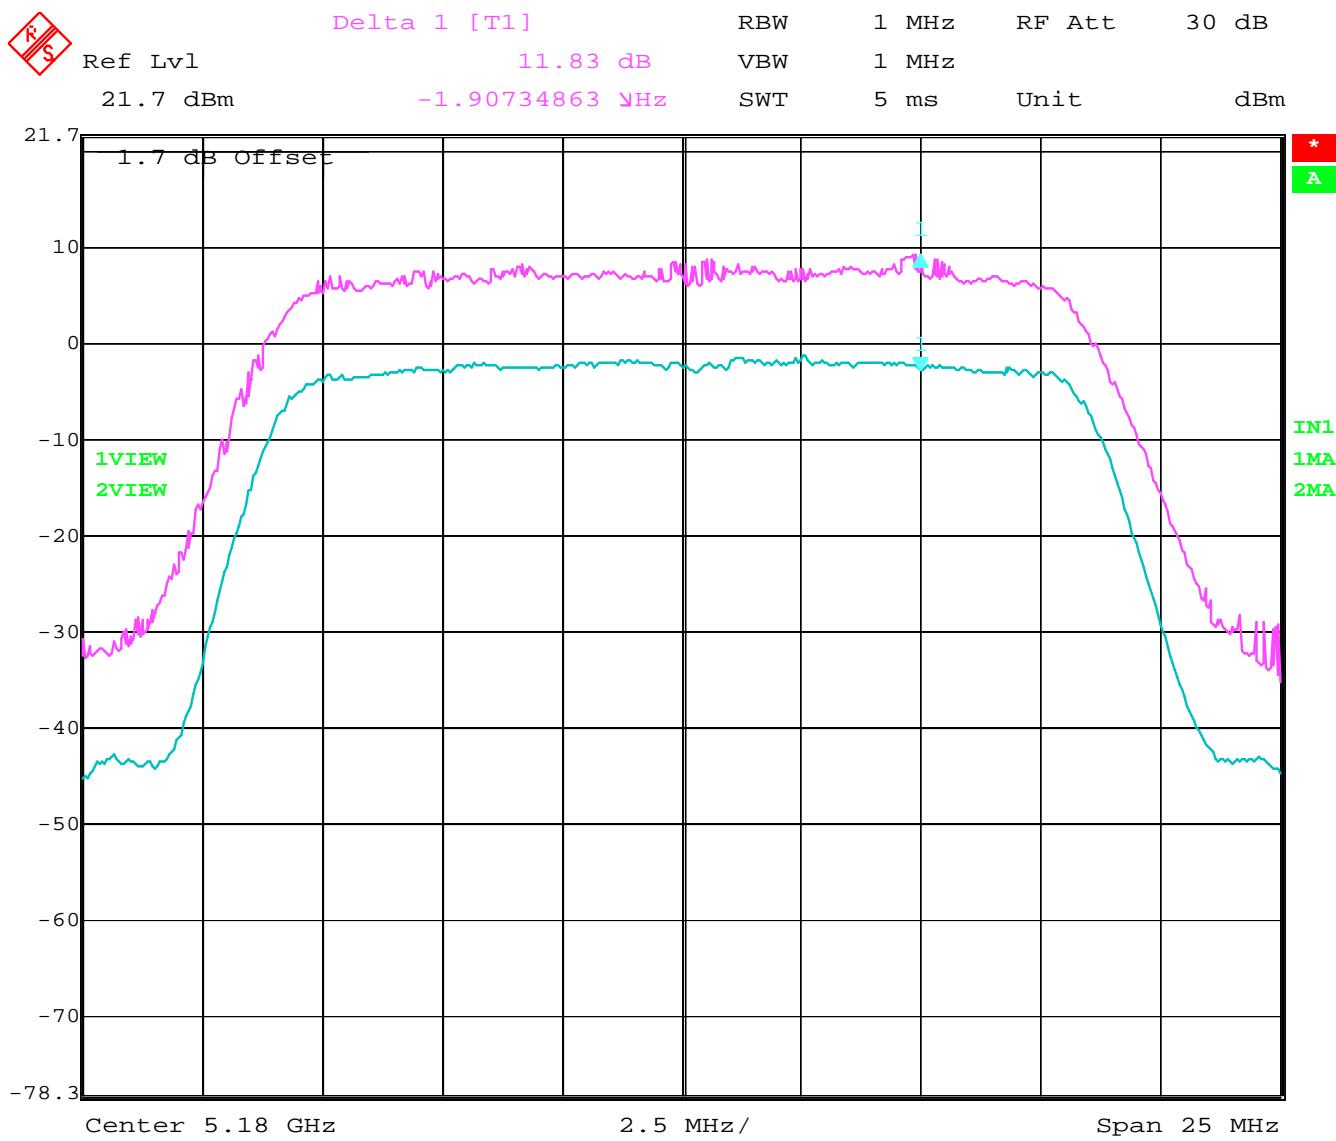

Date: 13.NOV.2003 08:24:50


PEAK EXCURSION
(Data rate – 54Mbps)
Mid Channel: 5260MHz

§15.407 (a)(6)

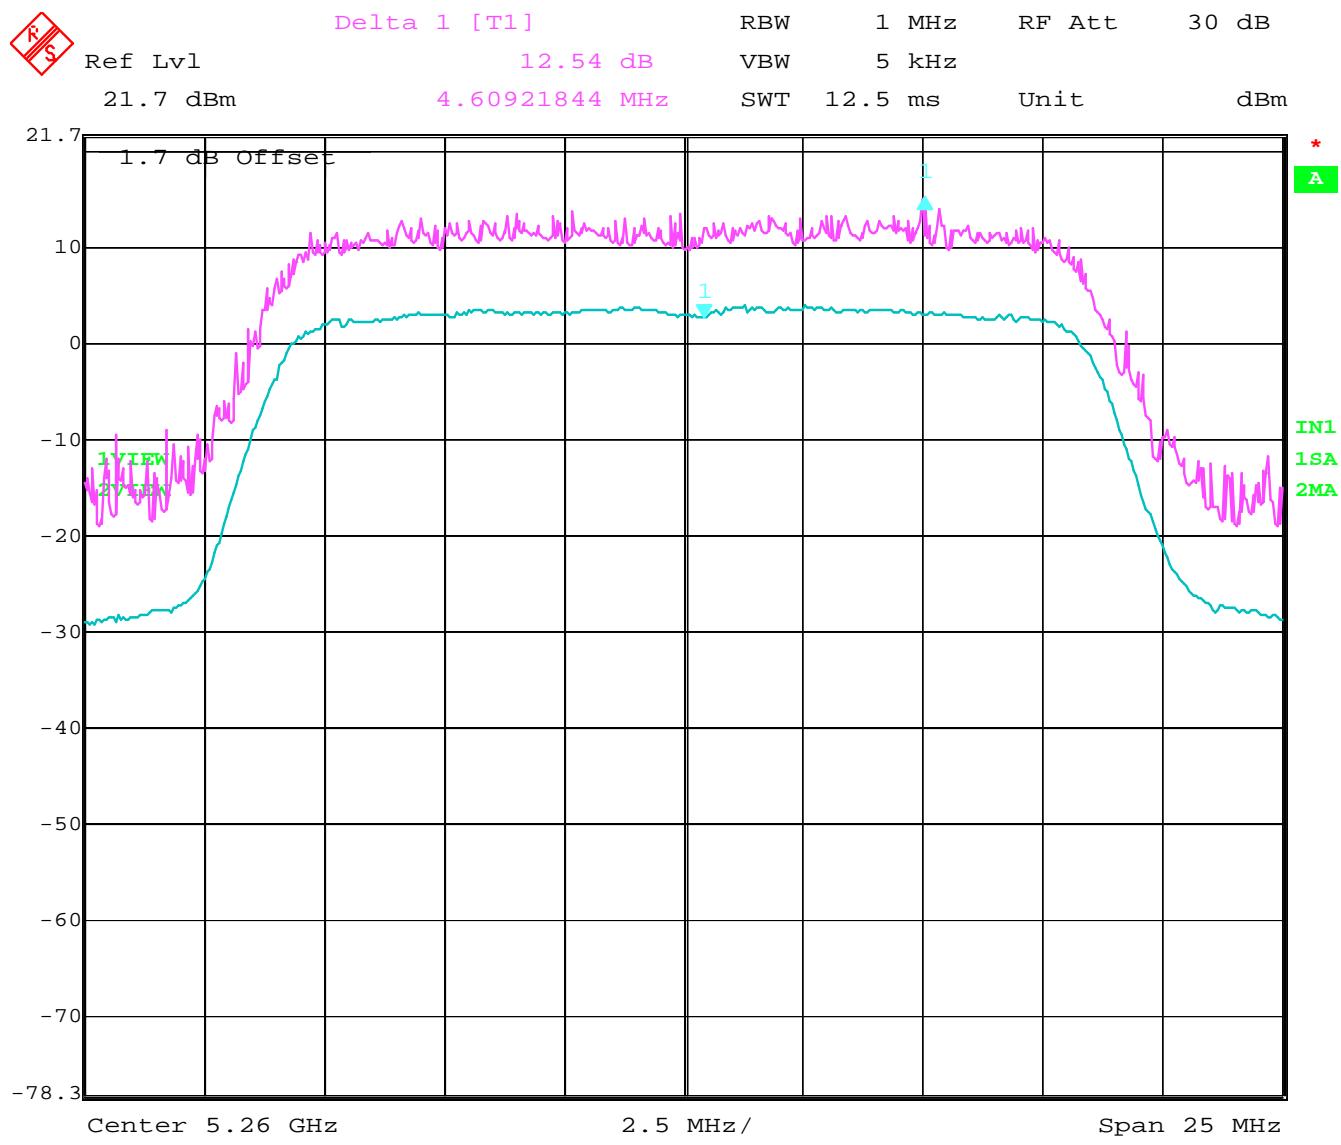

PEAK EXCURSION
(Data rate – 54Mbps)
Highest Channel: 5320MHz

§15.407 (a)(6)

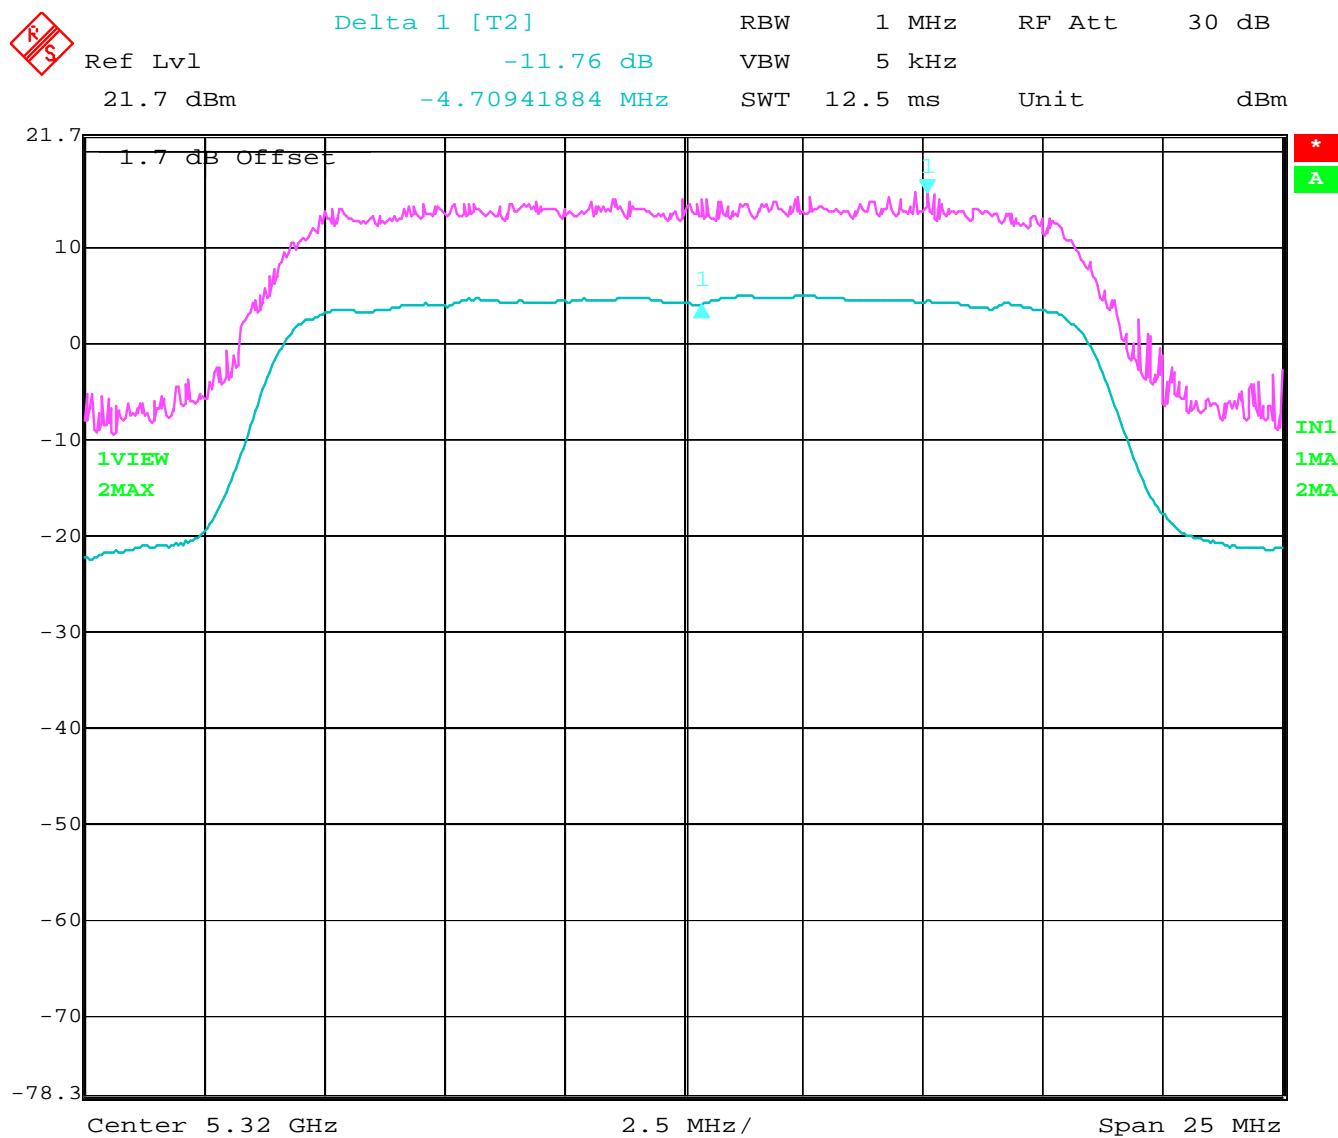


Date: 18.NOV.2003 11:53:20

BAND EDGE COMPLIANCE**§15.407 (b)(1)(2)(4)(6)****Low frequency section (spurious in the restricted band 4500 – 5150 MHz)
(Average measurement)**

Antenna: Horizontal
EUT plane: Horizontal with screen vertical @ 90°

Operating condition : Tx at 5180MHz
SWEEP TABLE : "FCC15.407 LBE_AVG"
Limit Line horizontal : 54dB μ V
Limit Line vertical : 5150MHz

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
4.5 GHz	5.19 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

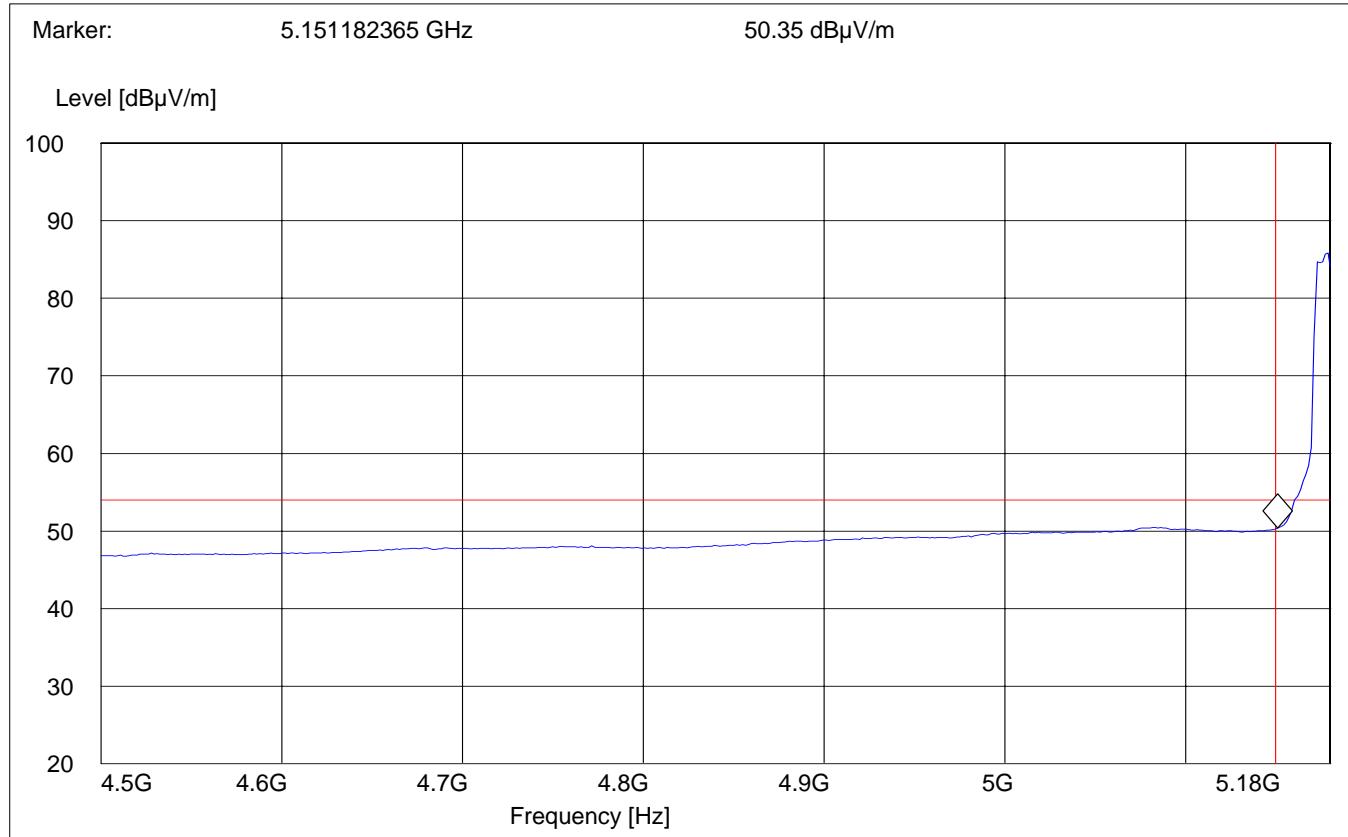


BAND EDGE COMPLIANCE**§15.407 (b)(1)(2)(4)(6)****Low frequency section (spurious in the restricted band 4500 – 5150 MHz)
(Peak measurement)**

Antenna: **Horizontal**
EUT plane: **Horizontal with screen vertical @ 90°**

Operating condition : Tx at 5180MHz
SWEEP TABLE : "FCC15.407 LBE_Pk"
Limit Line horizontal : 74dB μ V
Limit Line vertical : 5150MHz


Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
4.5 GHz	5.19 GHz	MaxPeak	Coupled	1MHz	1MHz	#326 horn (dBi)

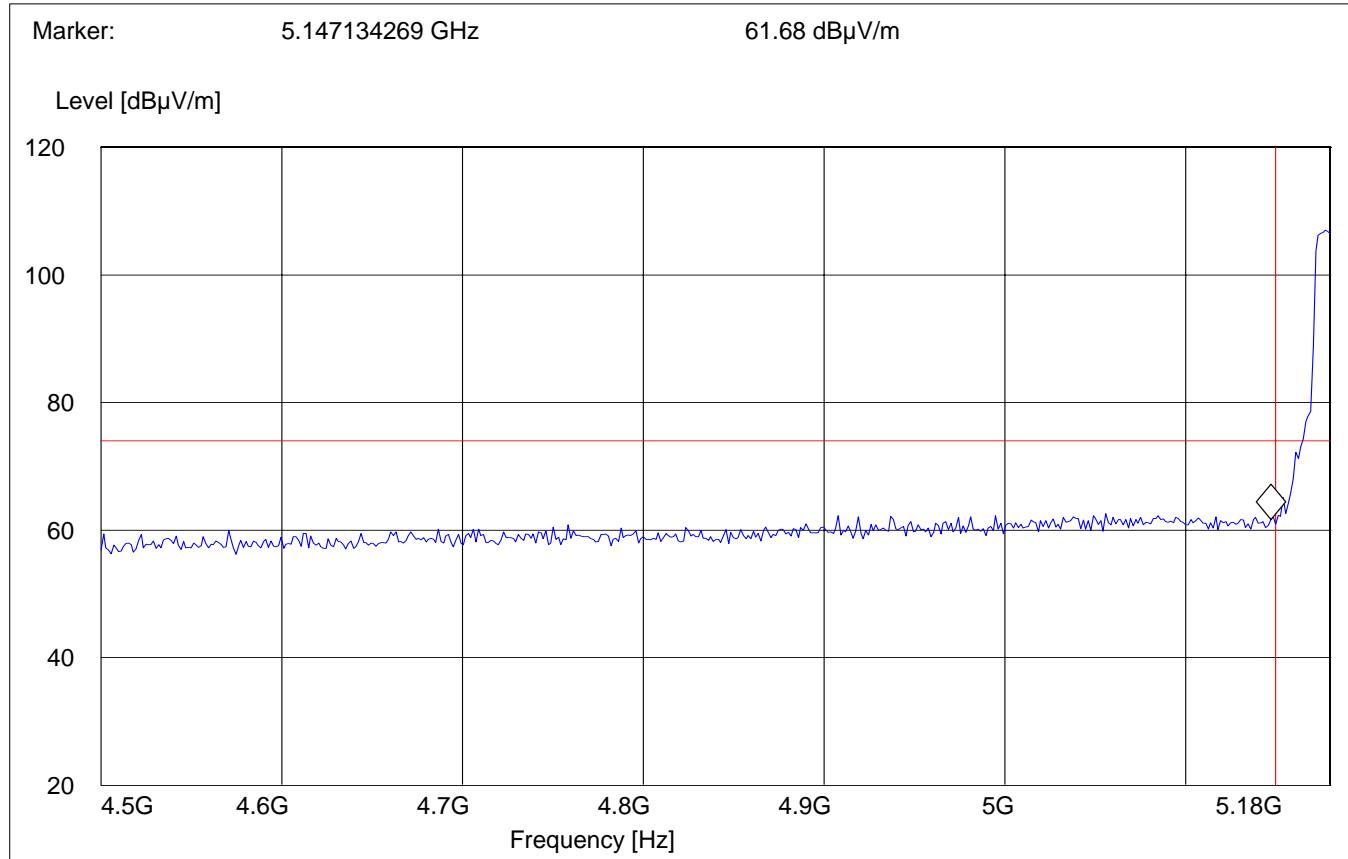

BAND EDGE COMPLIANCE §15.407 (b)(1)(2)(4)(6)**High frequency section (spurious in the restricted band 5350 – 5460 MHz)
(Average measurement)****Antenna: Horizontal**
EUT plane: Horizontal with screen vertical @ 90°

Operating condition : Tx at 5320MHz
SWEEP TABLE : "FCC15.407 HBE_AVG"
Limit Line horizontal : 54dB μ V
Limit Line vertical : 5350MHz


Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
5.28 GHz	5.46 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

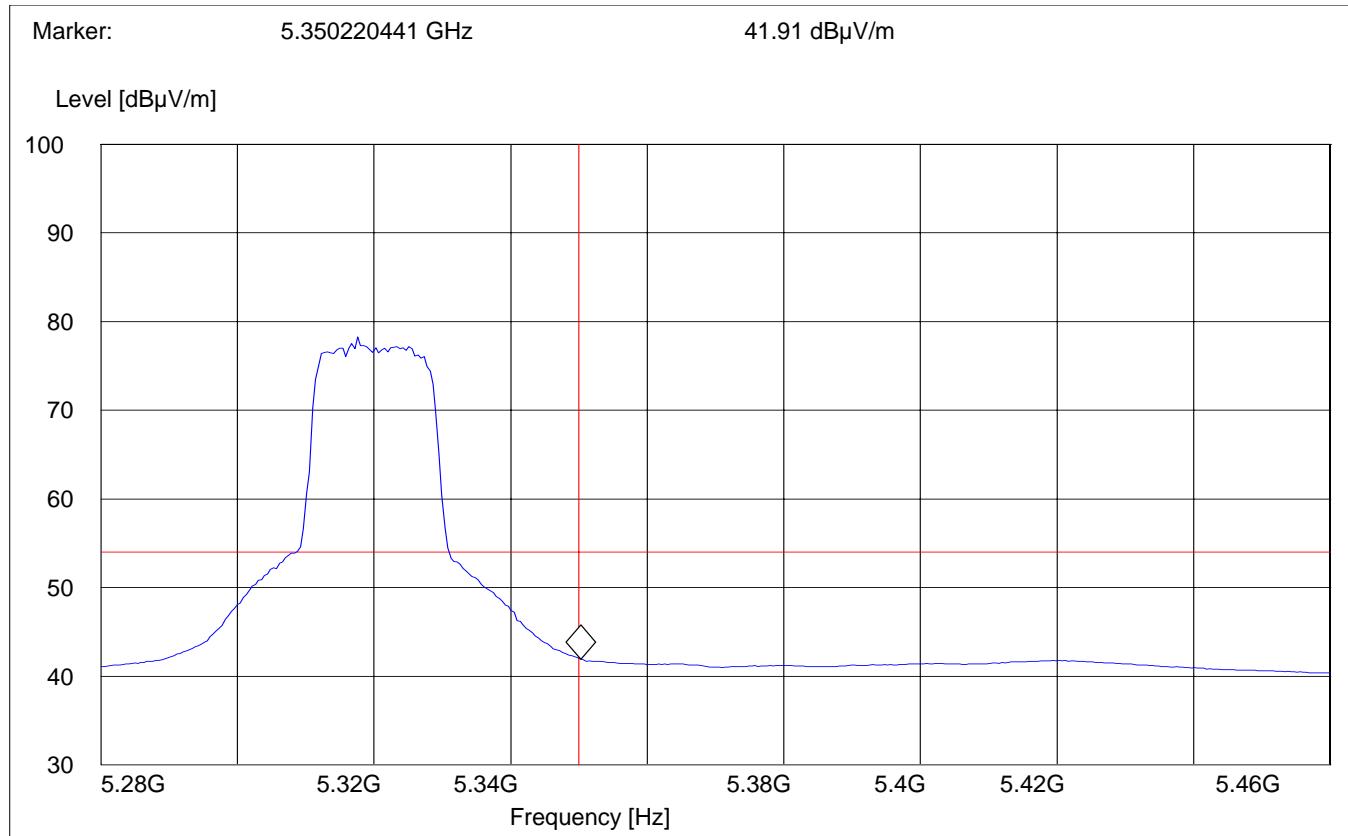

BAND EDGE COMPLIANCE §15.407 (b)(1)(2)(4)(6)**High frequency section (spurious in the restricted band 5350 – 5460 MHz)
(Peak measurement)****Antenna: Horizontal**
EUT plane: Horizontal with screen vertical @ 90°

Operating condition : Tx at 5320MHz
SWEEP TABLE : "FCC15.407 HBE_Pk"
Limit Line horizontal : 74dB μ V
Limit Line vertical : 5350MHz

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
5.28 GHz	5.46 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

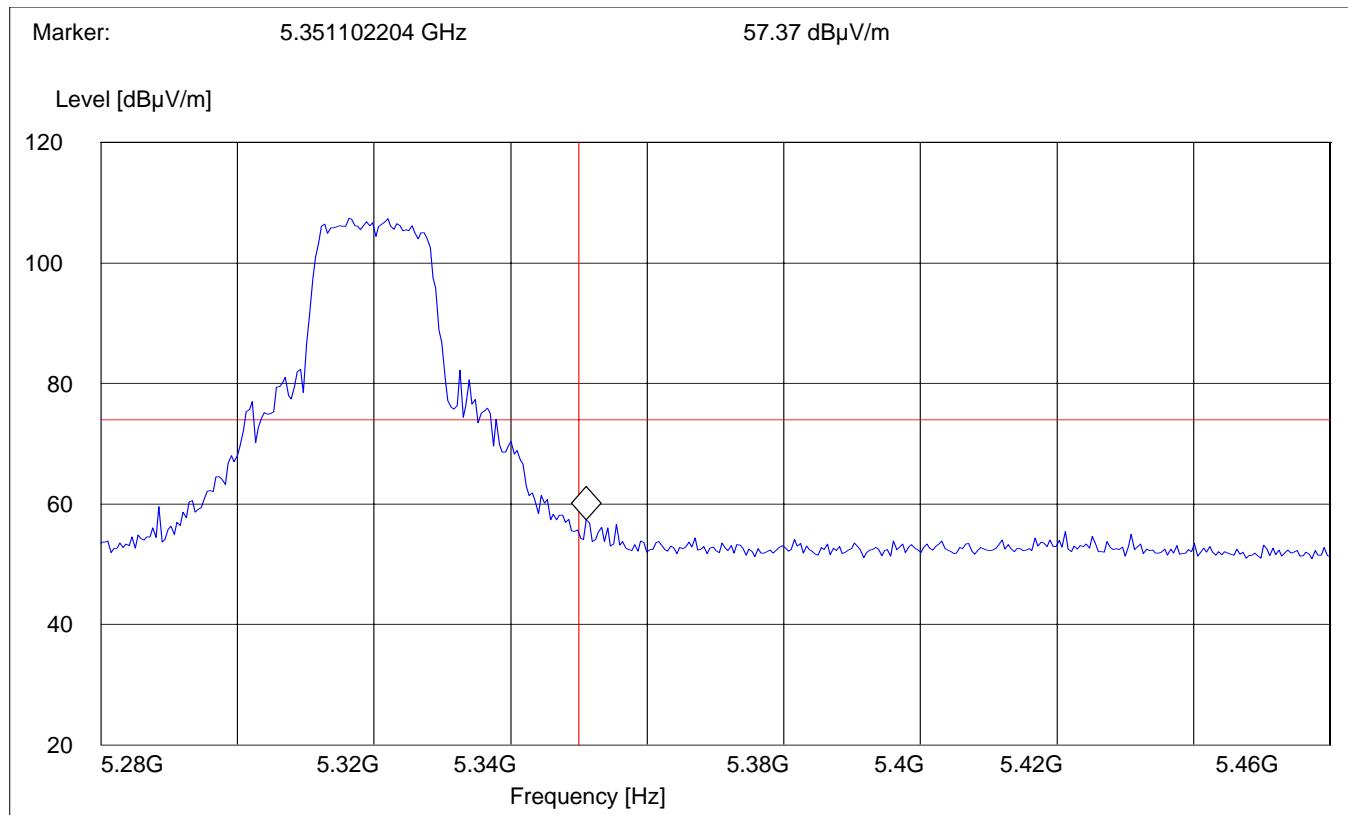

EMISSION LIMITATIONS**§ 15.407 (b)(1)(2)(4)(6)****Transmitter (Radiated)
(Data rate – 54Mbps)****Limits****§ 15.209 / § 15.407**

Freq. (MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)
0.009-0.490	2400/F (kHz)	
0.490-1.750	24000/F (kHz)	
1.705-30.0	30	29.54
30-88	100	40.00
88-216	150	43.52
216-960	200	46.02
Above 960*	500	53.97
1000-40000**	2013.8	66.08

*) Limit in restricted bands

**) Limit outside restricted bands

NOTE:


1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 40 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode unless specified with the plots.

Transmit at Lowest channel Frequency 5180MHz			
Frequency (MHz)	Level (dBμV/m)		
	Peak	Quasi-Peak	Average
3452.9	63.12		47.19
8631	52		35.69
10369	62.12		46.26
Transmit at Middle channel Frequency 5260MHz			
Frequency (MHz)	Level (dBμV/m)		
	Peak	Quasi-Peak	Average
3513.02	61.96		42.74
8767	49.21		34.81
10539	58.37		41.24
Transmit at Highest channel Frequency 5320MHz			
Frequency (MHz)	Level (dBμV/m)		
	Peak	Quasi-Peak	Average
3549.09	63.35		47.98
7098	50.25		32.19
10641	54.56		42.81

EMISSION LIMITATIONS - Radiated (Transmitter)**§ 15.407 (b)(1)(2)(4)(6)****Lowest Channel (5180MHz): 30MHz – 1GHz**Antenna: **Vertical**EUT plane: **Horizontal with screen vertical @ 90°****Note: This plot is valid for low, mid, high channels (worst-case plot)**

SWEEP TABLE: "FCC 15.407 30-1G_V"

Start Frequency	Stop Frequency	Detector	Meas.	RBW	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

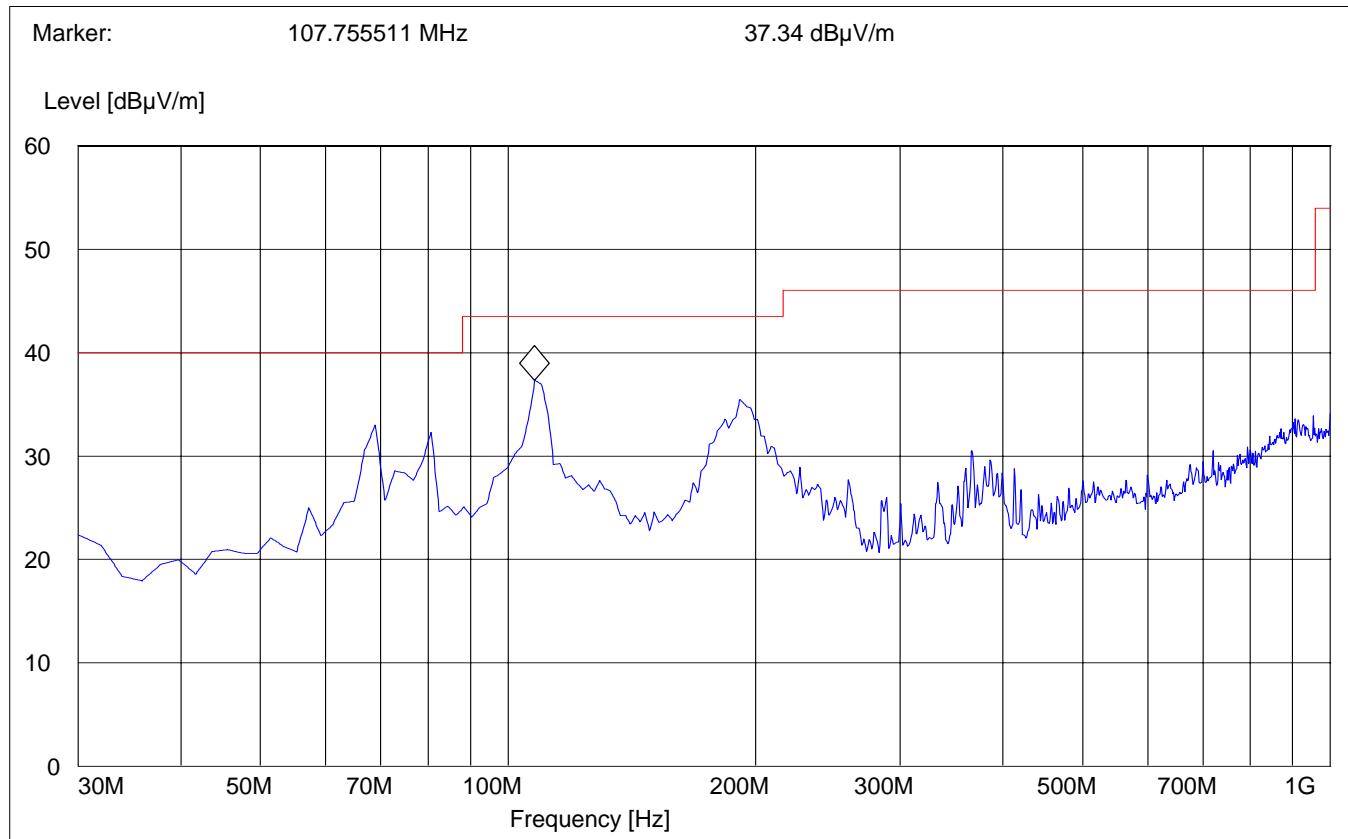


EMISSION LIMITATIONS - Radiated (Transmitter)**§ 15.407 (b)(1)(2)(4)(6)****Lowest Channel (5180MHz): 30MHz – 1GHz**

Antenna: **Horizontal**
EUT plane: **Horizontal with screen vertical @ 90°**

Note: This plot is valid for low, mid, high channels (worst-case plot)

SWEEP TABLE: "FCC 15.407 30-1G_H"


Start Frequency	Stop Frequency	Detector	Meas.	RBW	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

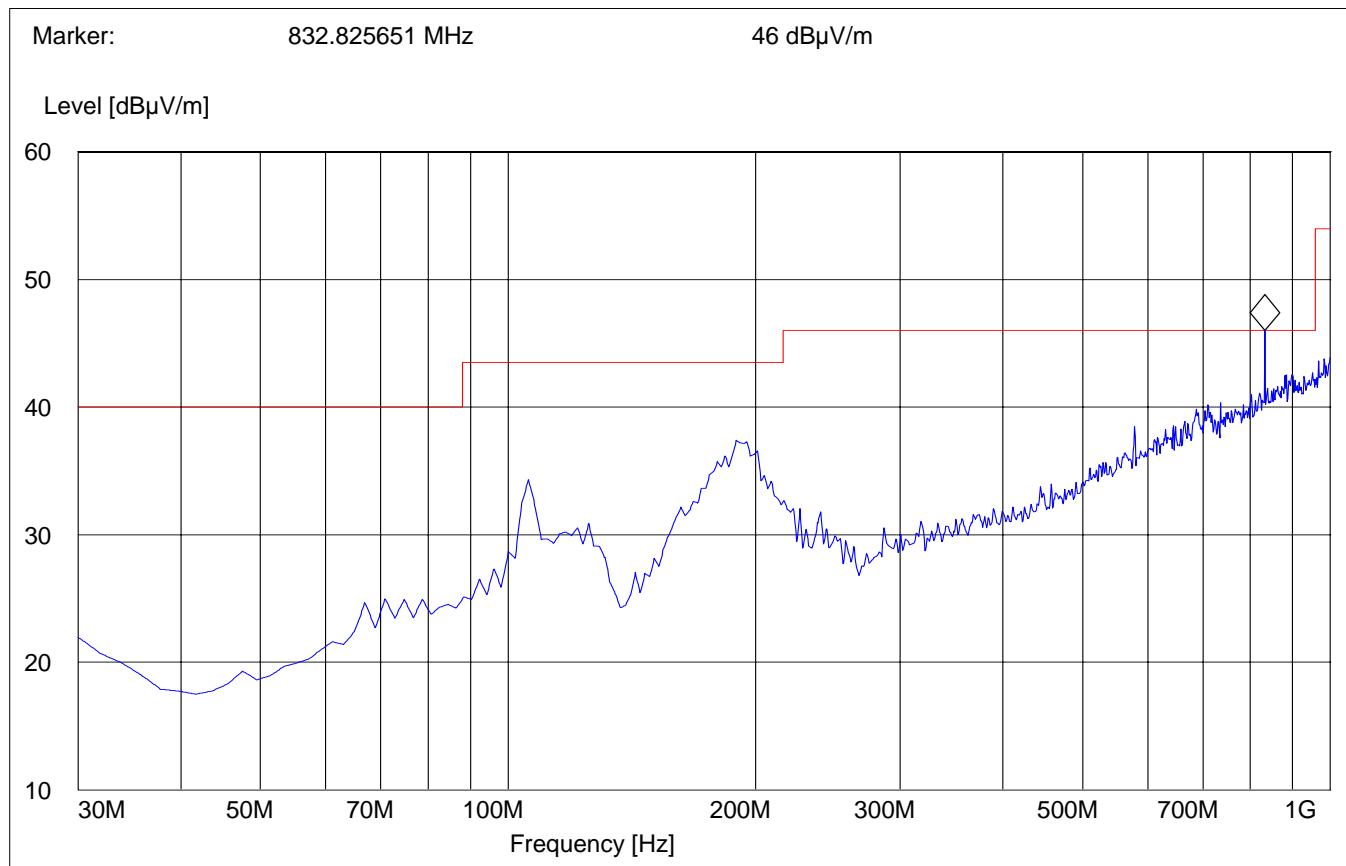

EMISSION LIMITATIONS - Radiated (Transmitter)**§ 15.407 (b)(1)(2)(4)(6)****Lowest Channel (5180MHz): 1GHz – 7GHz****(Average)****Antenna:** Horizontal**EUT plane:** Horizontal with screen vertical @ 90°**Note: The peak above the limit line is the carrier freq.**

SWEEP TABLE: "FCC 15.407 1-7G"


Start Frequency	Stop Frequency	Detector	Meas.	RBW	VBW	Transducer
1GHz	7.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

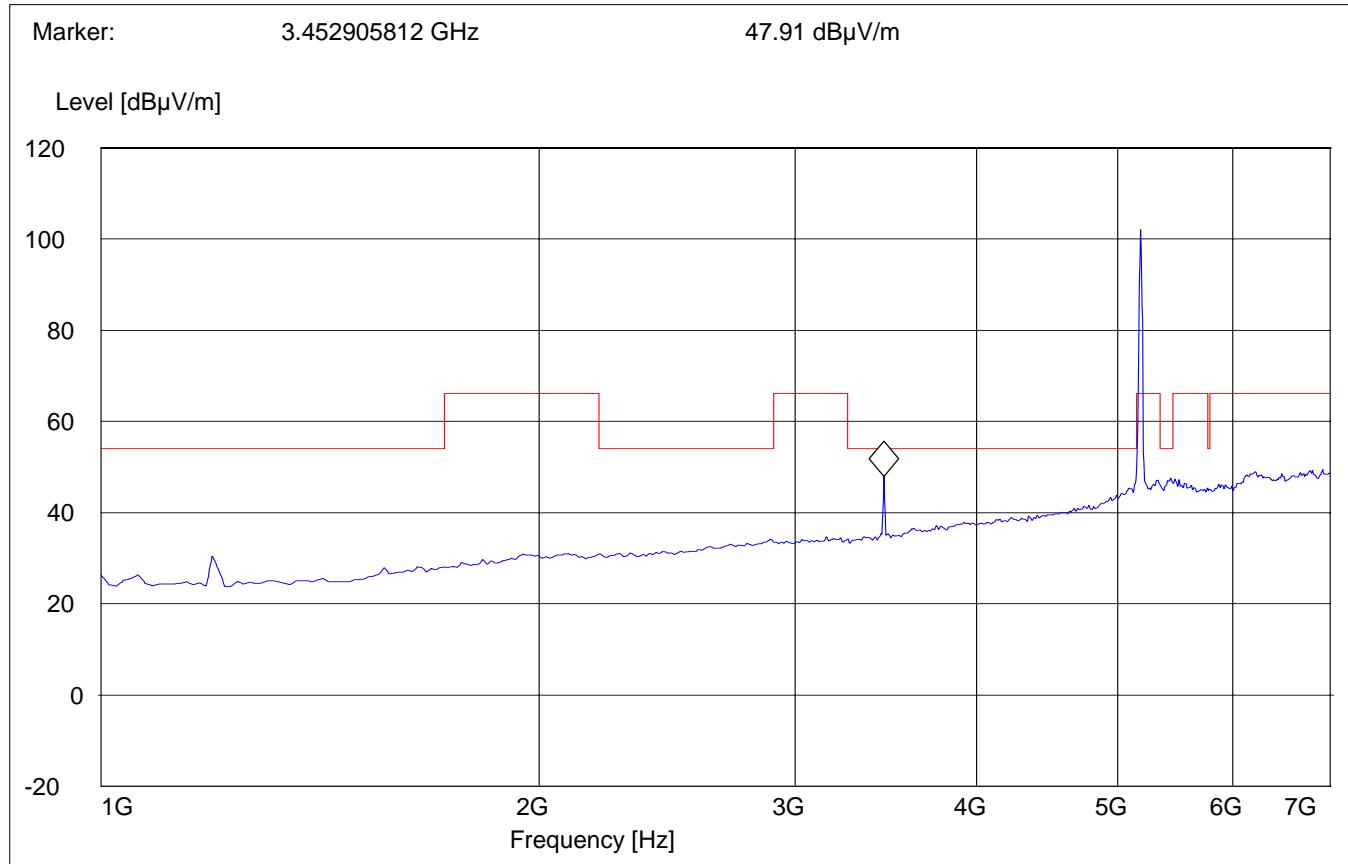

EMISSION LIMITATIONS - Radiated (Transmitter)**§ 15.407 (b)(1)(2)(4)(6)****Lowest Channel (5180MHz): 7GHz – 18GHz****Average****Antenna:** **Horizontal****EUT plane:** **Horizontal with screen vertical @ 90°**

SWEEP TABLE: "FCC 15.407 7-18G"


Start Frequency	Stop Frequency	Detector	Meas.	RBW	VBW	Transducer
7GHz	18.0 GHz	MaxPeak	Time Coupled	1MHz	10Hz	326 horn

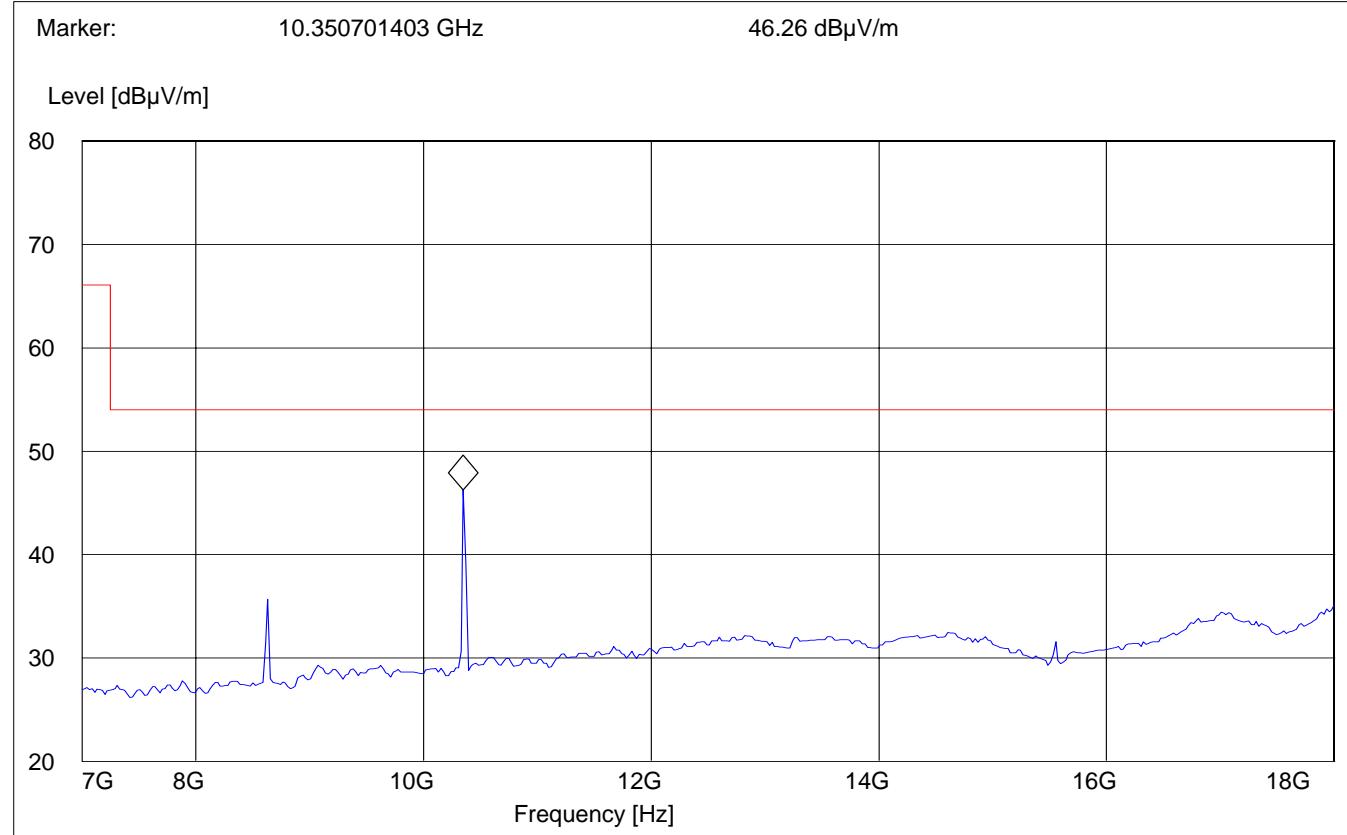

EMISSION LIMITATIONS - Radiated (Transmitter)**§ 15.407 (b)(1)(2)(4)(6)****Mid Channel (5260MHz): 1GHz – 7GHz****(Average)****Antenna:** Horizontal**EUT plane:** Horizontal with screen vertical @ 90°**Note: The peak above the limit line is the carrier freq.**


SWEEP TABLE: "FCC 15.407 1-7G"

Start Frequency	Stop Frequency	Detector	Meas.	RBW	VBW	Transducer
1GHz	7.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

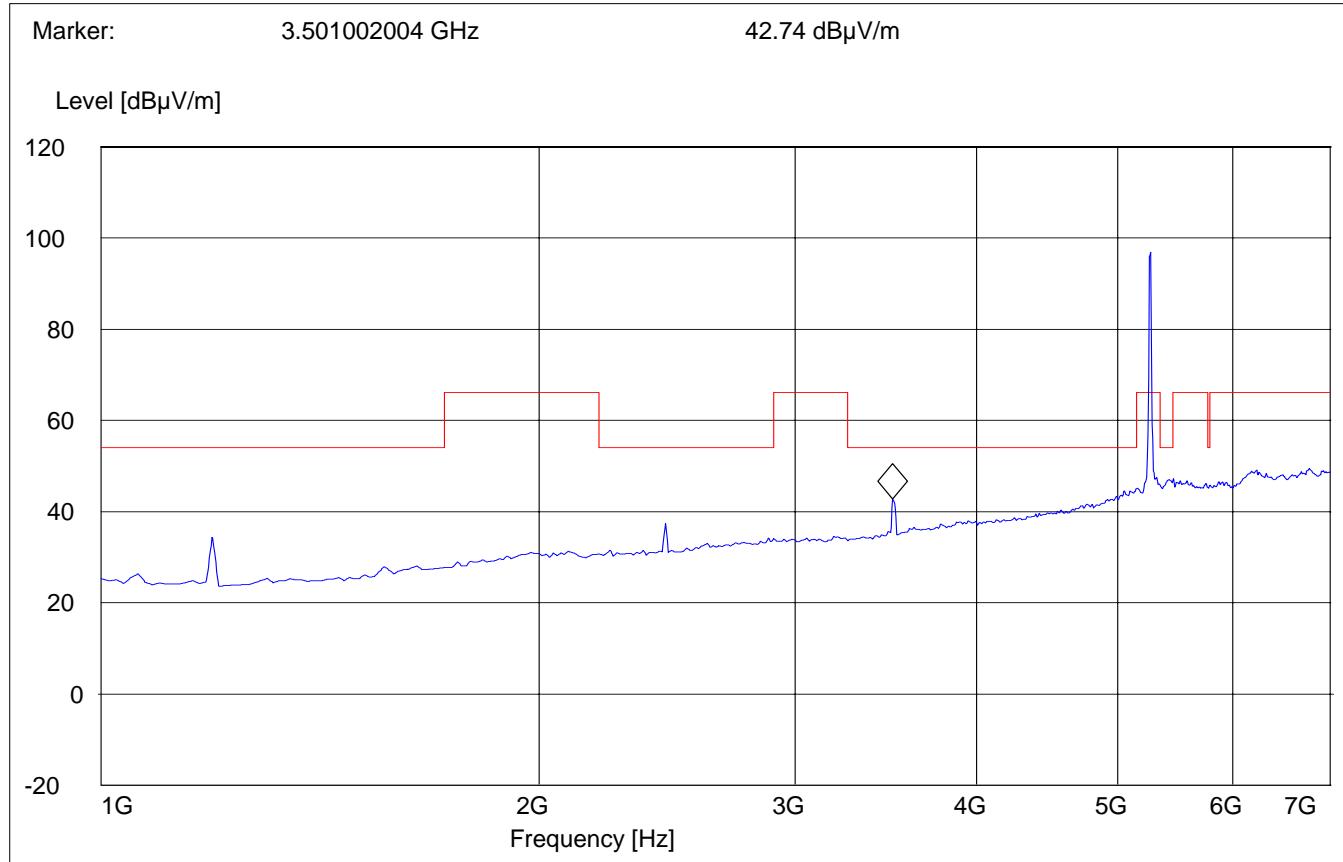

EMISSION LIMITATIONS - Radiated (Transmitter)**§ 15.407 (b)(1)(2)(4)(6)****Mid Channel (5260MHz): 7GHz – 18GHz****Antenna:****Horizontal****EUT plane:****Horizontal with screen vertical @ 90°****SWEEP TABLE:****"FCC 15.407 7-18G"**


Start Frequency	Stop Frequency	Detector	Meas.	RBW	Transducer
7GHz	18.0 GHz	MaxPeak	Coupled	1MHz	326 horn

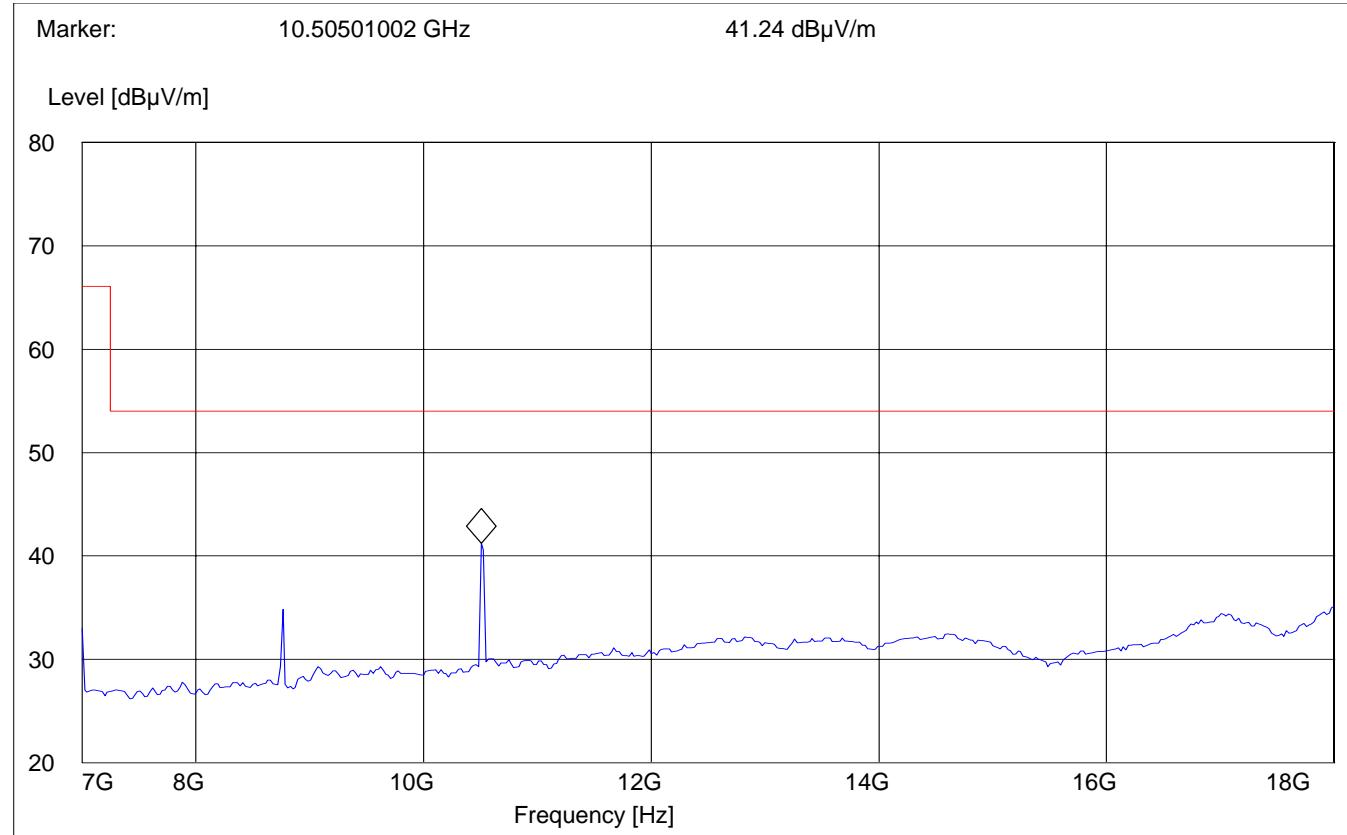

EMISSION LIMITATIONS - Radiated (Transmitter)**§ 15.407 (b)(1)(2)(4)(6)****Highest Channel (5320MHz): 1GHz – 7GHz****(Average)****Antenna:** Horizontal**EUT plane:** Horizontal with screen vertical @ 90°**Note: The peak above the limit line is the carrier freq.**

SWEEP TABLE: "FCC 15.407 1-7G"


Start Frequency	Stop Frequency	Detector	Meas.	RBW	VBW	Transducer
1GHz	7.0 GHz	MaxPeak	Time Coupled	1MHz	10Hz	326 horn

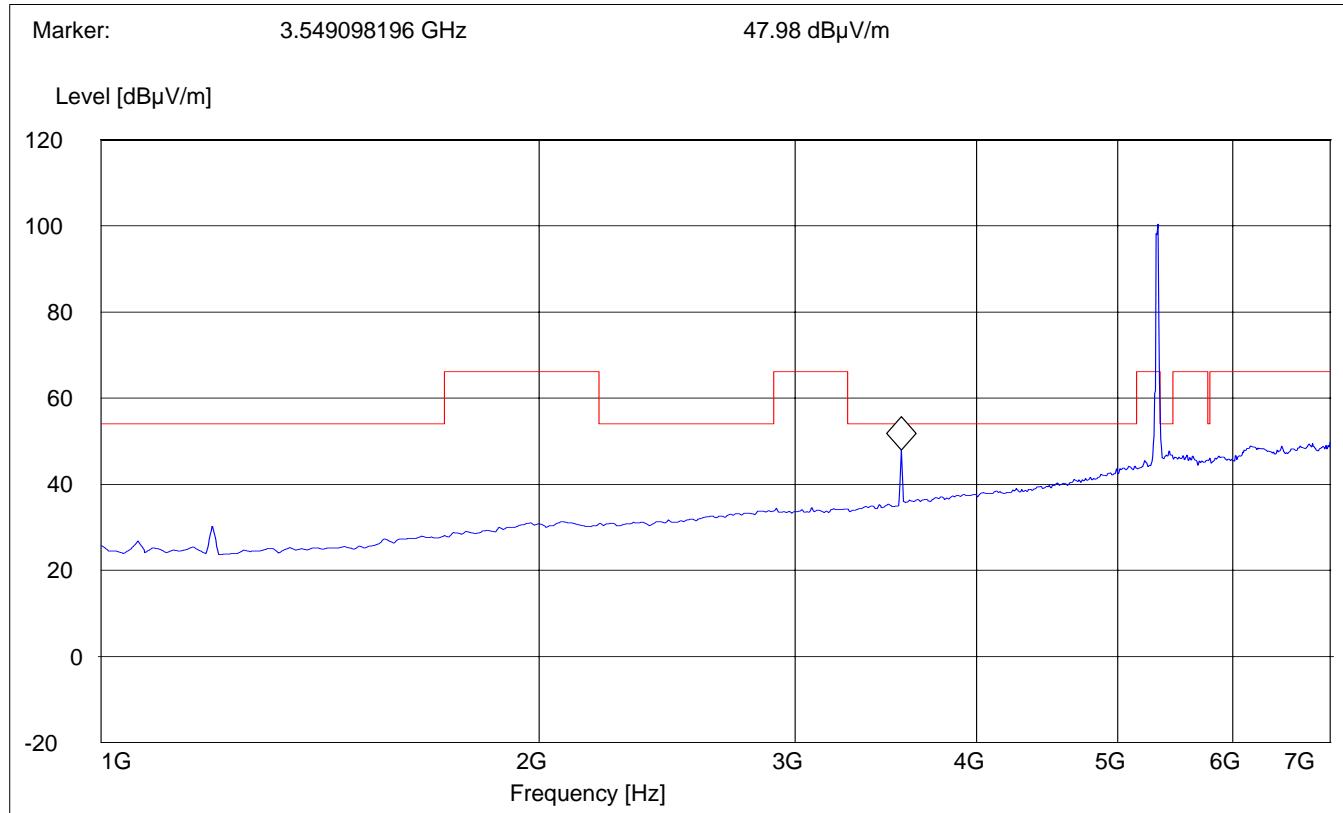

EMISSION LIMITATIONS - Radiated (Transmitter)**§ 15.407 (b)(1)(2)(4)(6)****Highest Channel (5320MHz): 7GHz – 18GHz****Average**Antenna: **Horizontal**EUT plane: **Horizontal with screen vertical @ 90°**

SWEEP TABLE: "FCC 15.407 7-18G"


Start Frequency	Stop Frequency	Detector	Meas.	RBW	VBW	Transducer
7GHz	18.0 GHz	MaxPeak	Time Coupled	1MHz	10Hz	326 horn

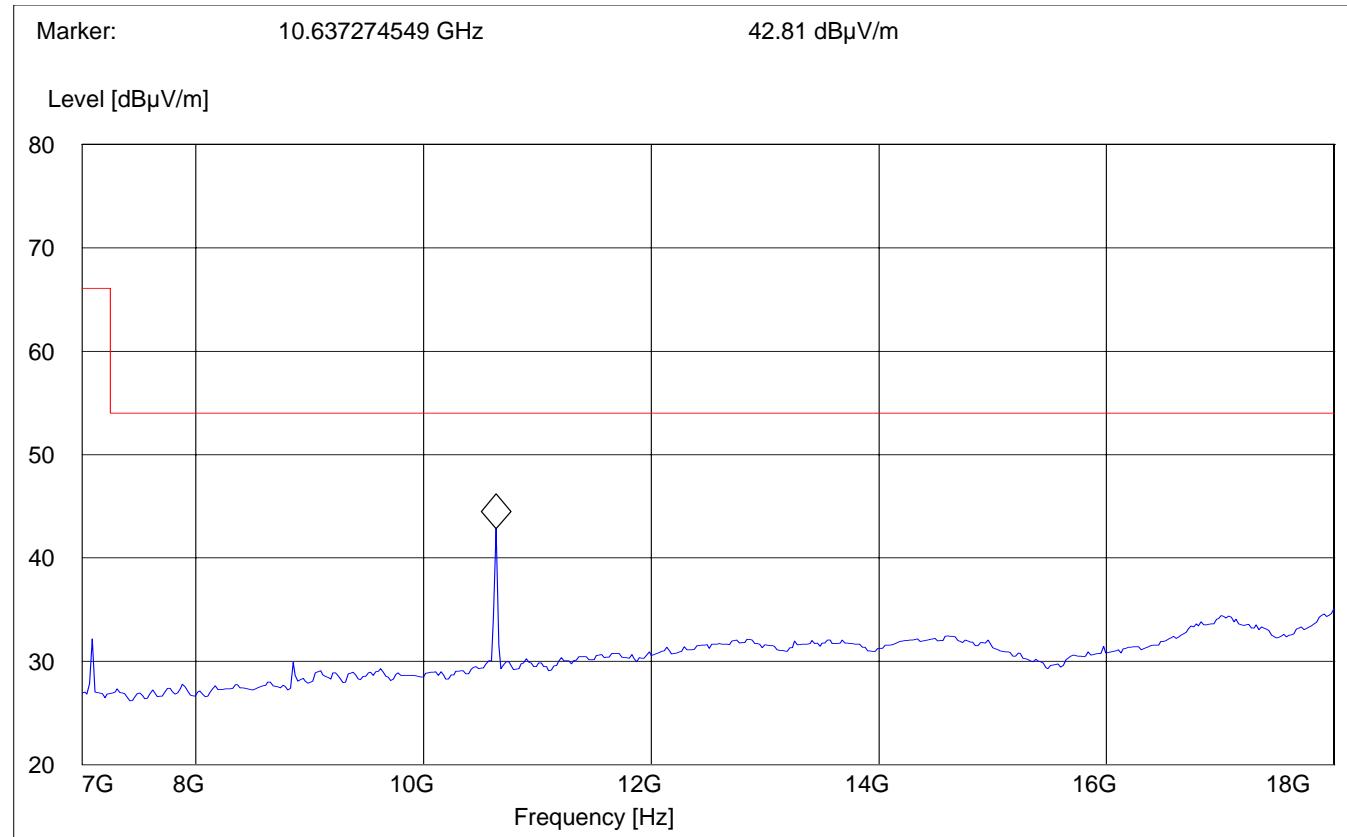

EMISSION LIMITATIONS - Radiated (Transmitter)**§ 15.407 (b)(1)(2)(4)(6)****18GHz – 26.5GHz**Antenna: **Horizontal**EUT plane: **Horizontal with screen vertical @ 90°****Note: This plot is valid for low, mid, high channels (worst-case plot)**

SWEEP TABLE: "FCC 15.407 18-26.5G"


Start Frequency	Stop Frequency	Detector	Meas.	RBW	Transducer
18GHz	26.5 GHz	MaxPeak	Coupled	1MHz	3160-09 horn

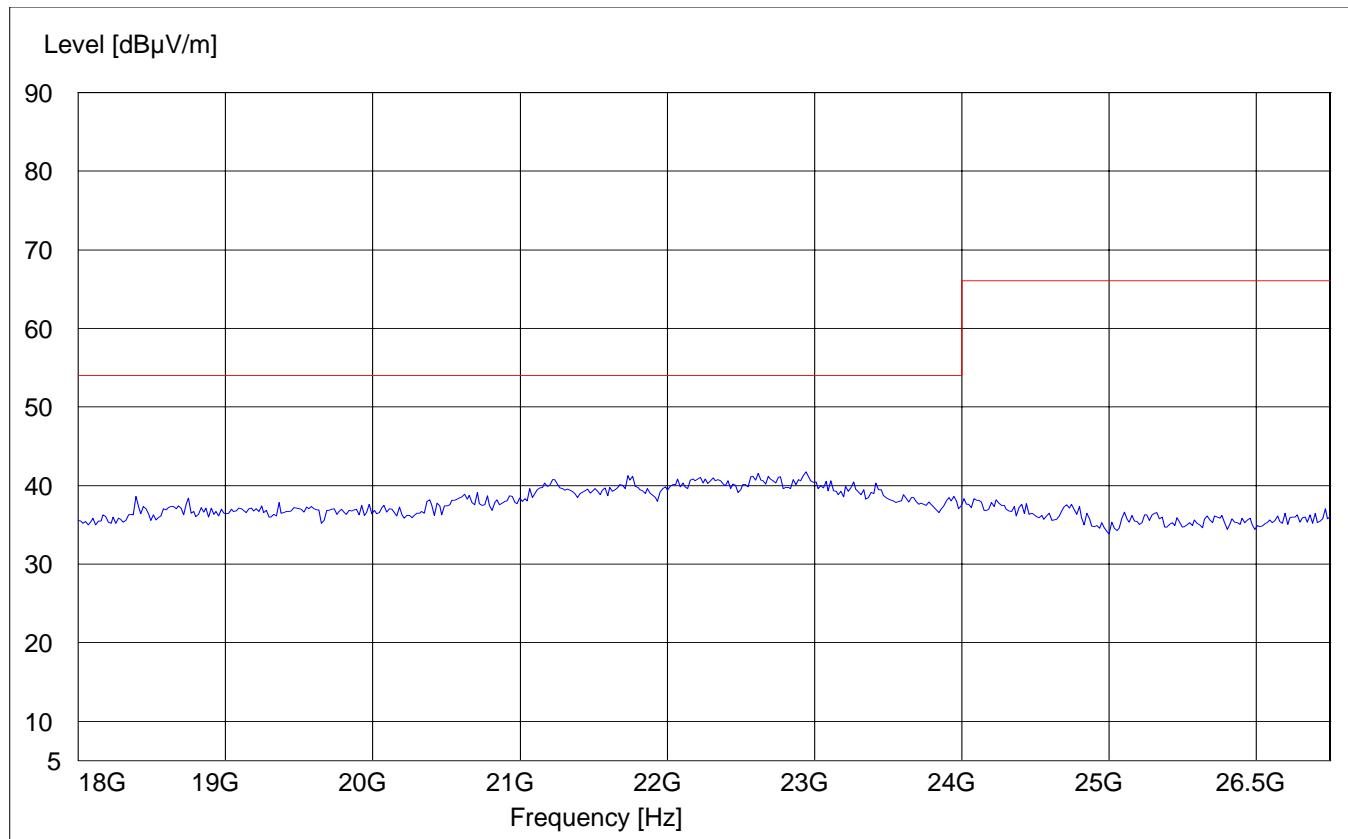

EMISSION LIMITATIONS - Radiated (Transmitter)**§ 15.407 (b)(1)(2)(4)(6)****26.5GHz – 40GHz**Antenna: **Horizontal**EUT plane: **Horizontal with screen vertical @ 90°****Note: This plot is valid for low, mid, high channels (worst-case plot)**

SWEEP TABLE: "FCC 15.407 26.5-40G"

Start Frequency	Stop Frequency	Detector	Meas.	RBW	Transducer
26.5GHz	40 GHz	MaxPeak	Coupled	1MHz	3160-10 horn

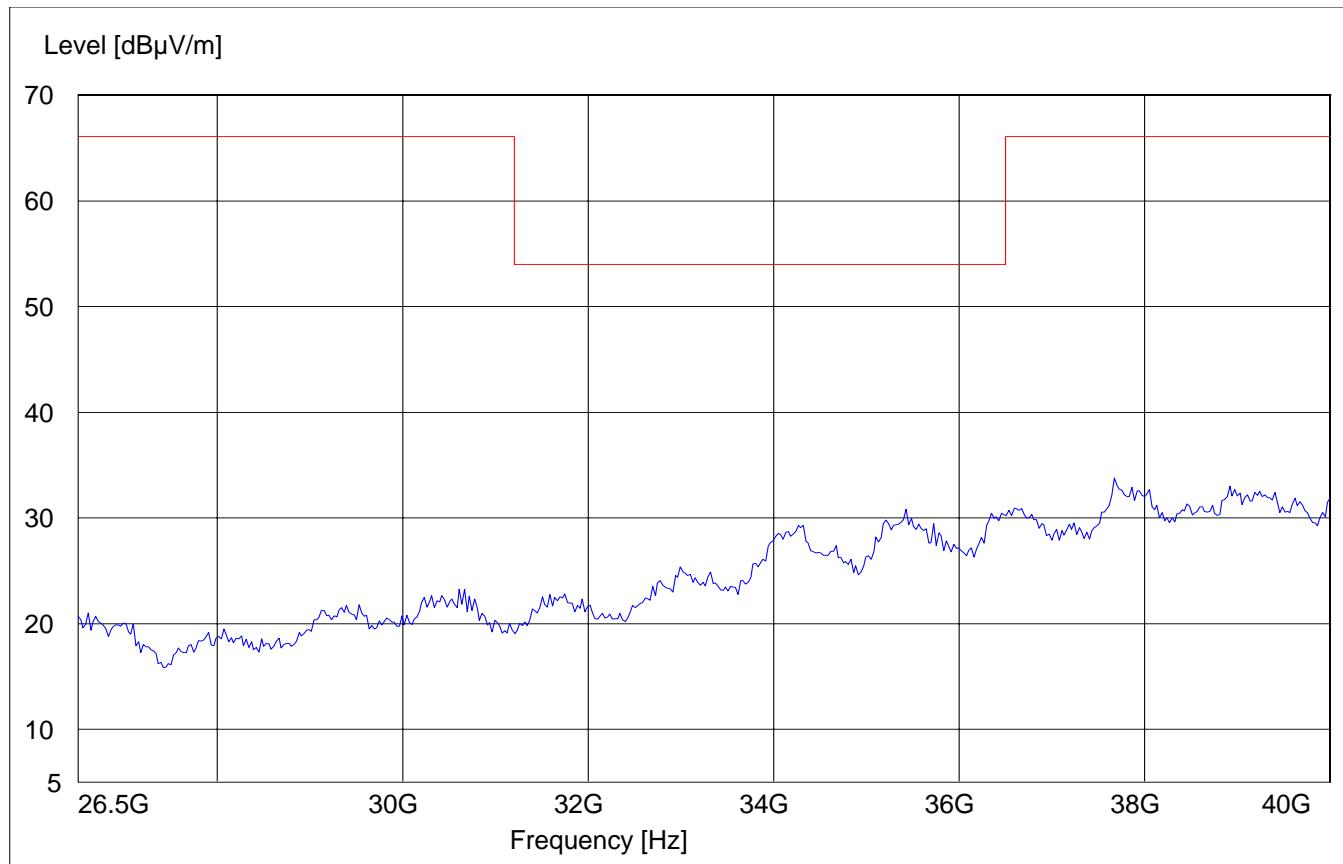

CONDUCTED EMISSIONS**§ 15.107/207**

Measured with AC/DC power adapter

PP14L***SWEEP TABLE: "55022 cond"***


Short Description: EN 55022 for 150KHz-30MHz

Start Frequency	Stop Frequency	Detector	Meas	IF	Transducer
150.0 kHz	30.0 MHz	MaxPeak	Coupled	10 kHz	None

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)**Limit**

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

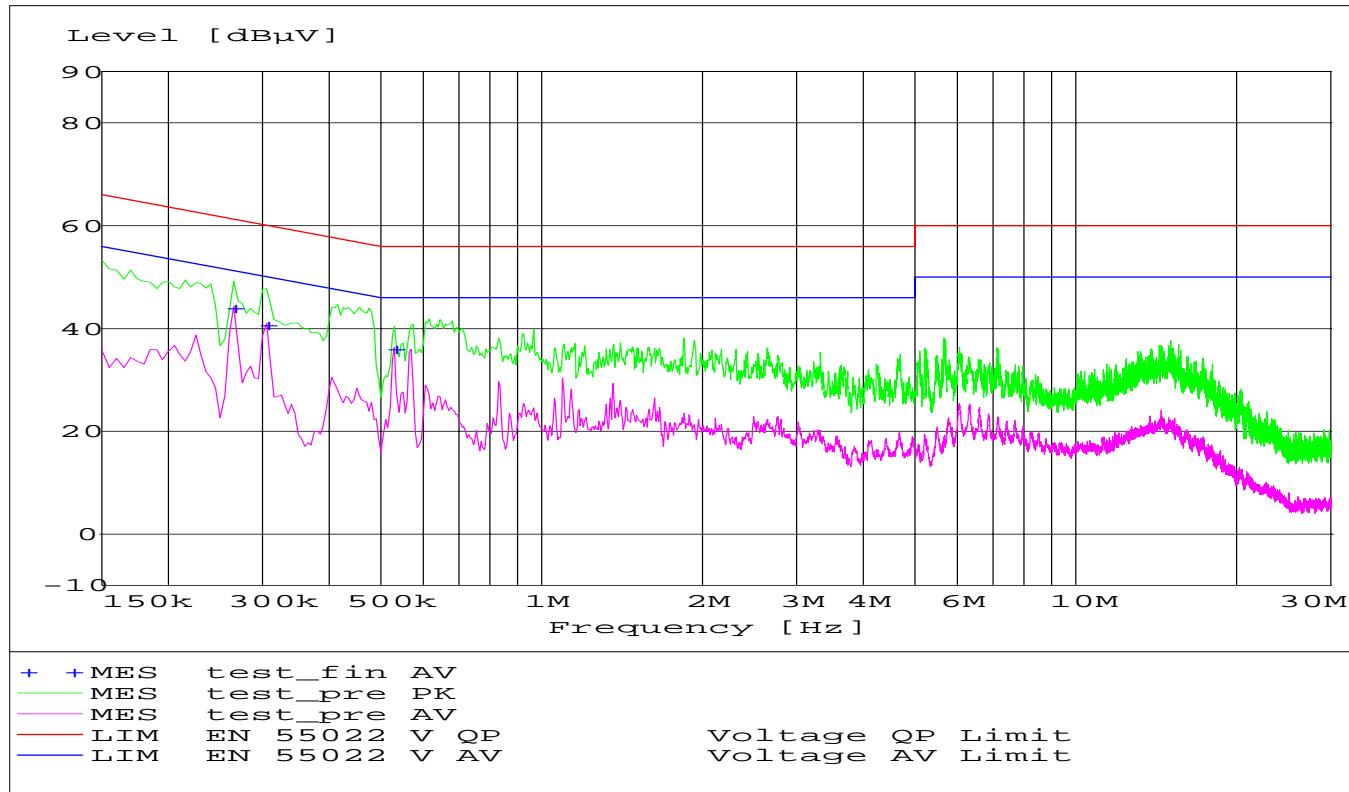ANALYZER SETTINGS: RBW = 10KHz**VBW = 10KHz**

RECEIVER SPURIOUS RADIATION**§ 15.209****Limits**

Frequency (MHz)	Field strength (μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3


NOTE:

The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 26.5 GHz very short cable connections to the antenna was used to minimize the noise level.

**RECEIVER SPURIOUS RADIATION
30MHz – 1GHz****§ 15.209**

Antenna: Vertical
EUT plane: Horizontal with screen vertical @ 90°


SWEEP TABLE: "WLAN Spuri hi 30-1G"
Start Stop Detector Meas. RBW Transducer
Frequency Frequency Time VBW
30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz 3141-#1186

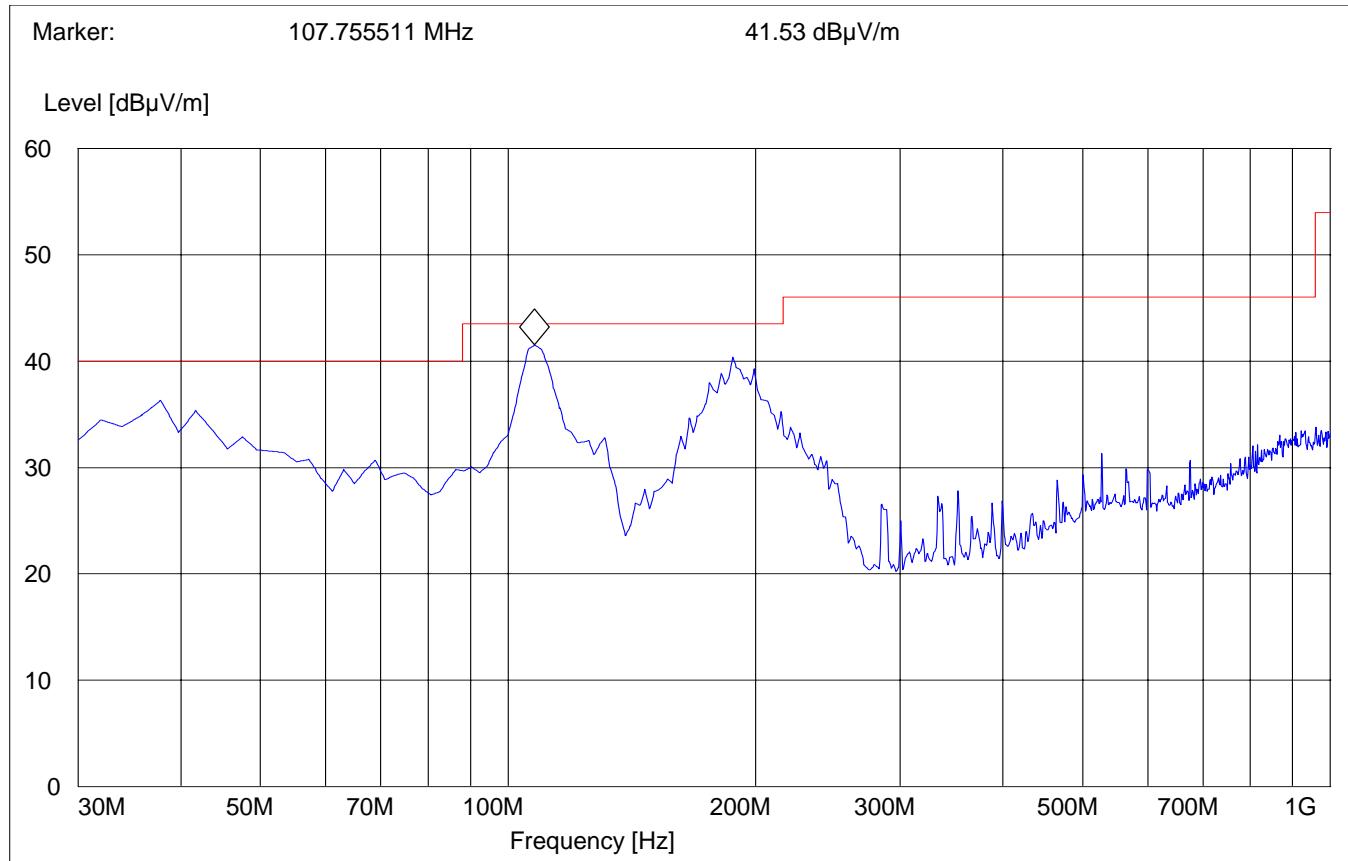

**RECEIVER SPURIOUS RADIATION
30MHz – 1GHz****§ 15.209**

Antenna: Horizontal
EUT plane: Horizontal with screen vertical @ 90°


SWEEP TABLE: "WLAN Spuri hi 30-1G"
Start Stop Detector Meas. RBW Transducer
Frequency Frequency Time VBW
30.0 MHz 1.0 GHz MaxPeak Coupled 100 kHz 3141-#1186

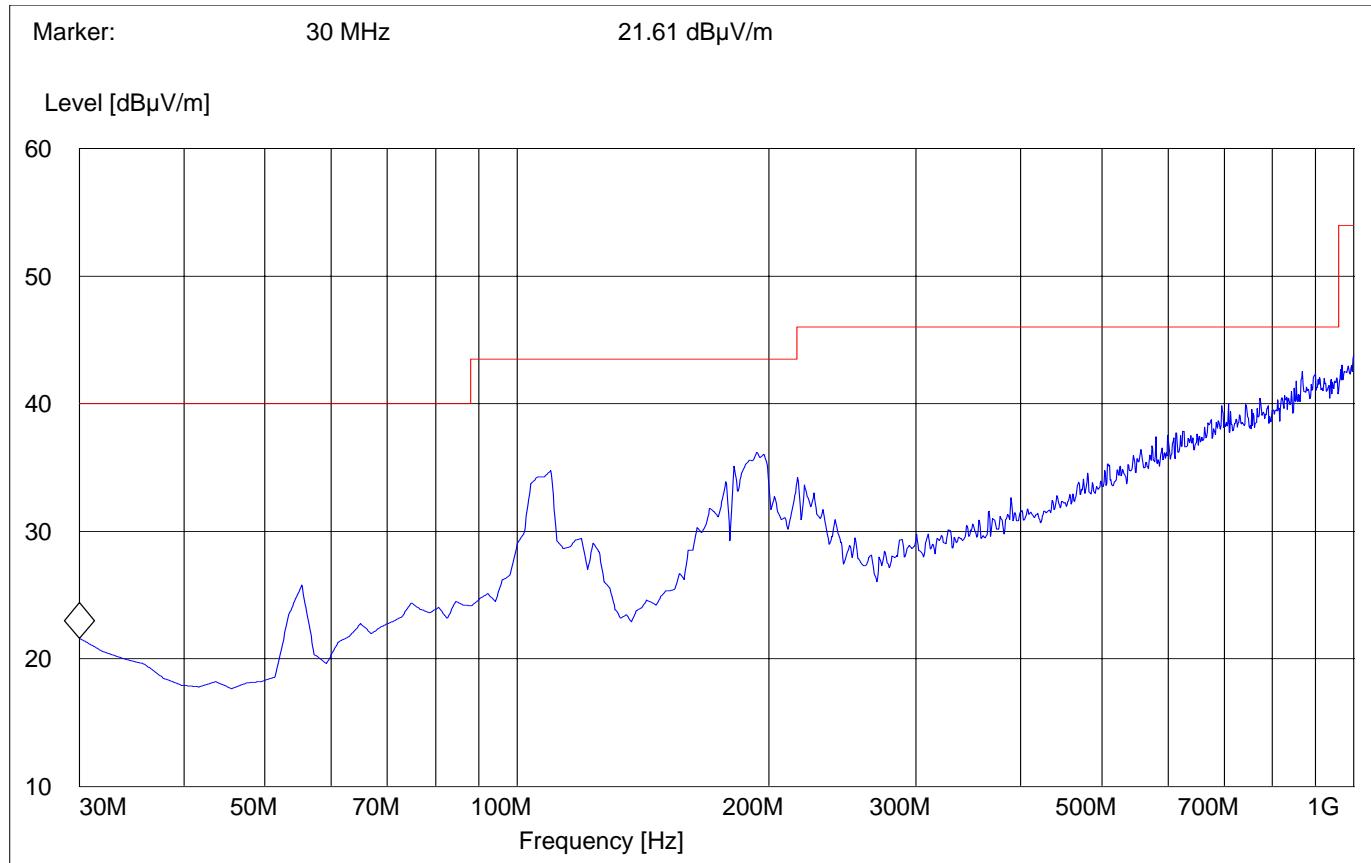

RECEIVER SPURIOUS RADIATION**§ 15.209****1GHz – 7GHz****Average****Antenna: Horizontal****EUT plane: Horizontal with screen vertical @ 90°**

SWEEP TABLE: "WLAN Spuri hi 1-7G"


Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
1.0 GHz	7.0 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

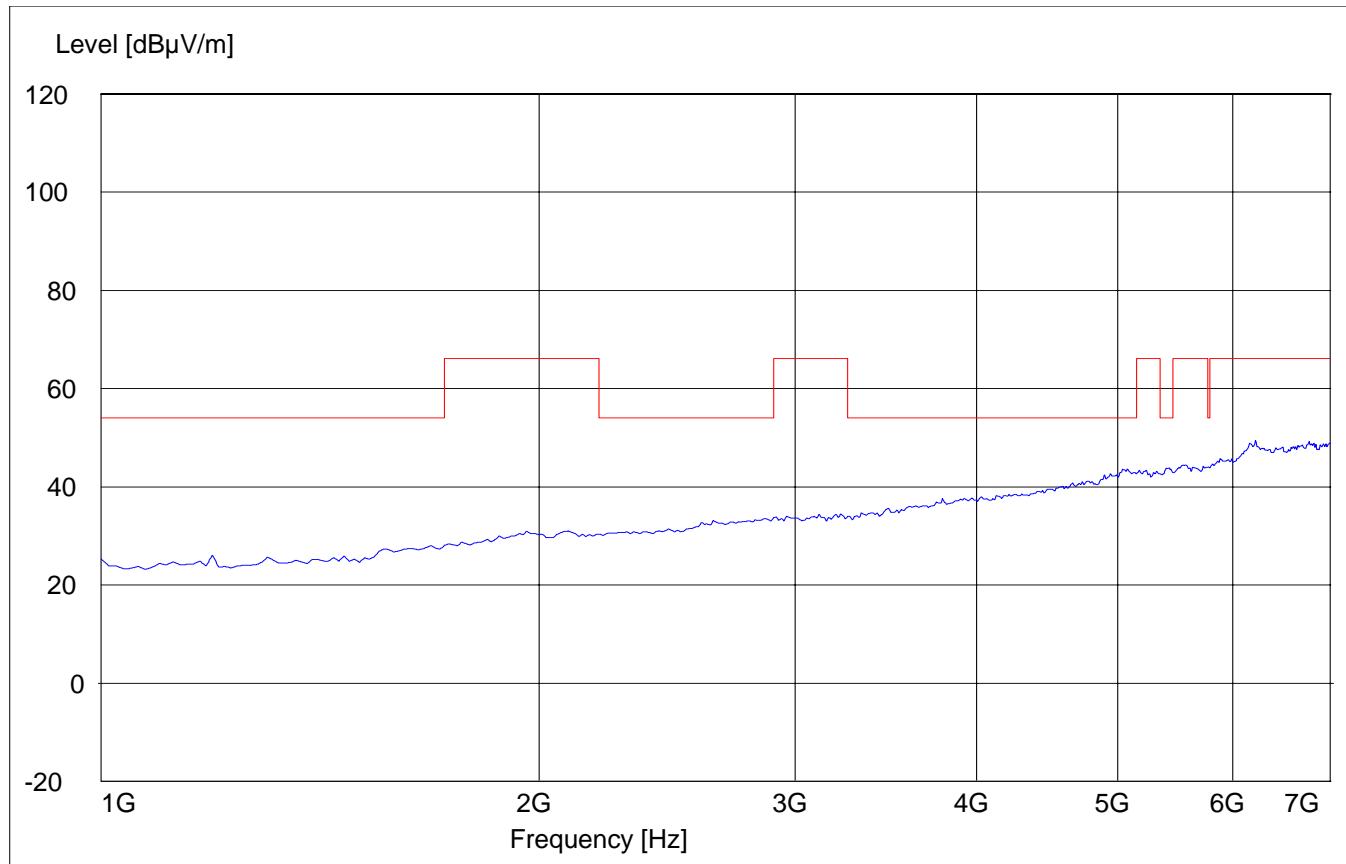

**RECEIVER SPURIOUS RADIATION
7GHz – 18GHz****§ 15.209**

Antenna: Horizontal
EUT plane: Horizontal with screen vertical @ 90°


SWEEP TABLE: "WLAN Spuri hi 7-18G"
Start Stop Detector Meas. RBW Transducer
Frequency Frequency Time Bandw. VBW
7.0 GHz 18 GHz MaxPeak Coupled 1 MHz #326 horn (dBi)

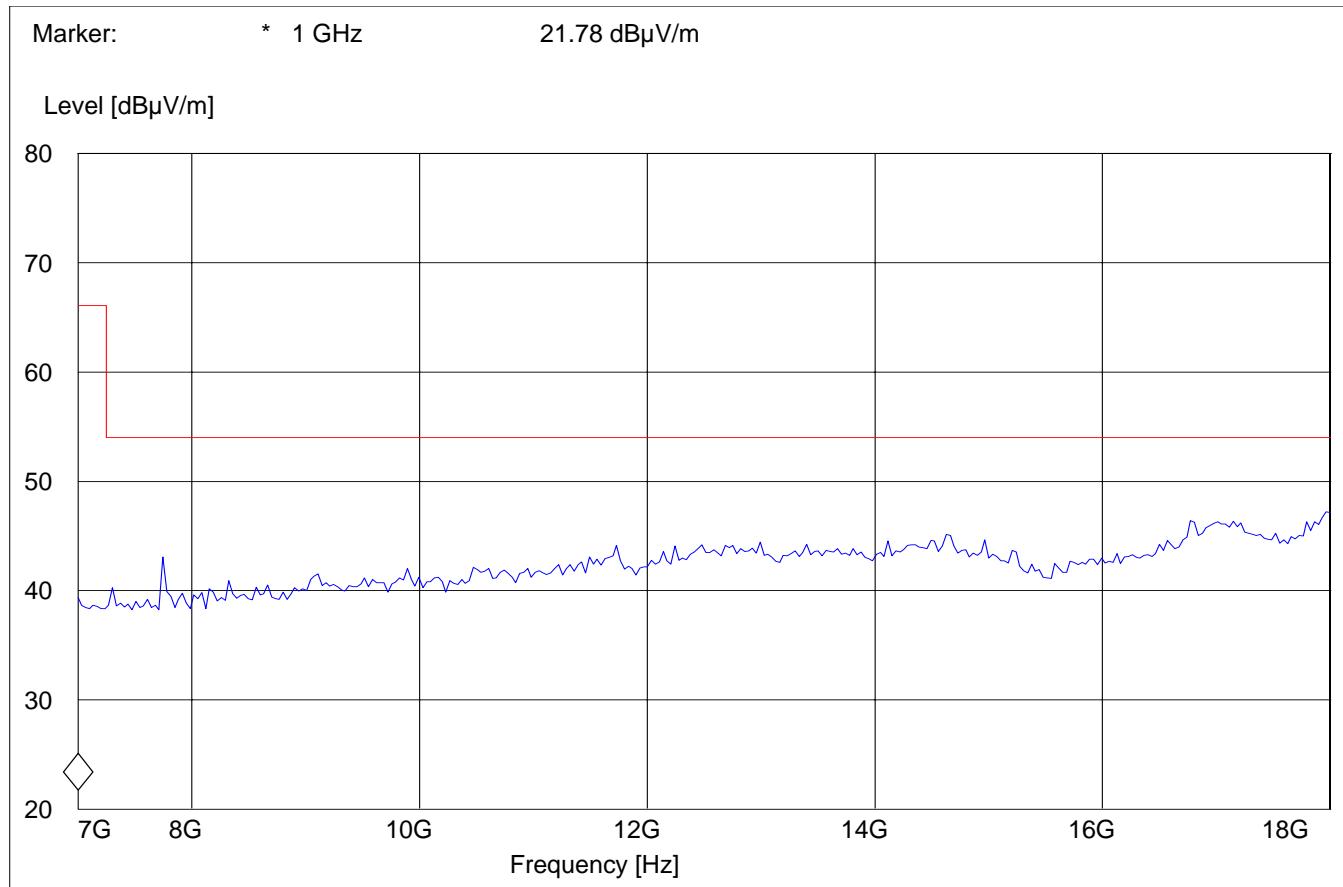

**RECEIVER SPURIOUS RADIATION
18GHz – 26.5GHz****§ 15.209**

Antenna: **Horizontal**
EUT plane: **Horizontal with screen vertical @ 90°**


SWEEP TABLE: "WLAN Spuri hi 18-26.5G"
Start Stop Detector Meas. RBW Transducer
Frequency Frequency Time Bandw. VBW
18 GHz 26.5 GHz MaxPeak Coupled 1 MHz #141 horn (dBi)

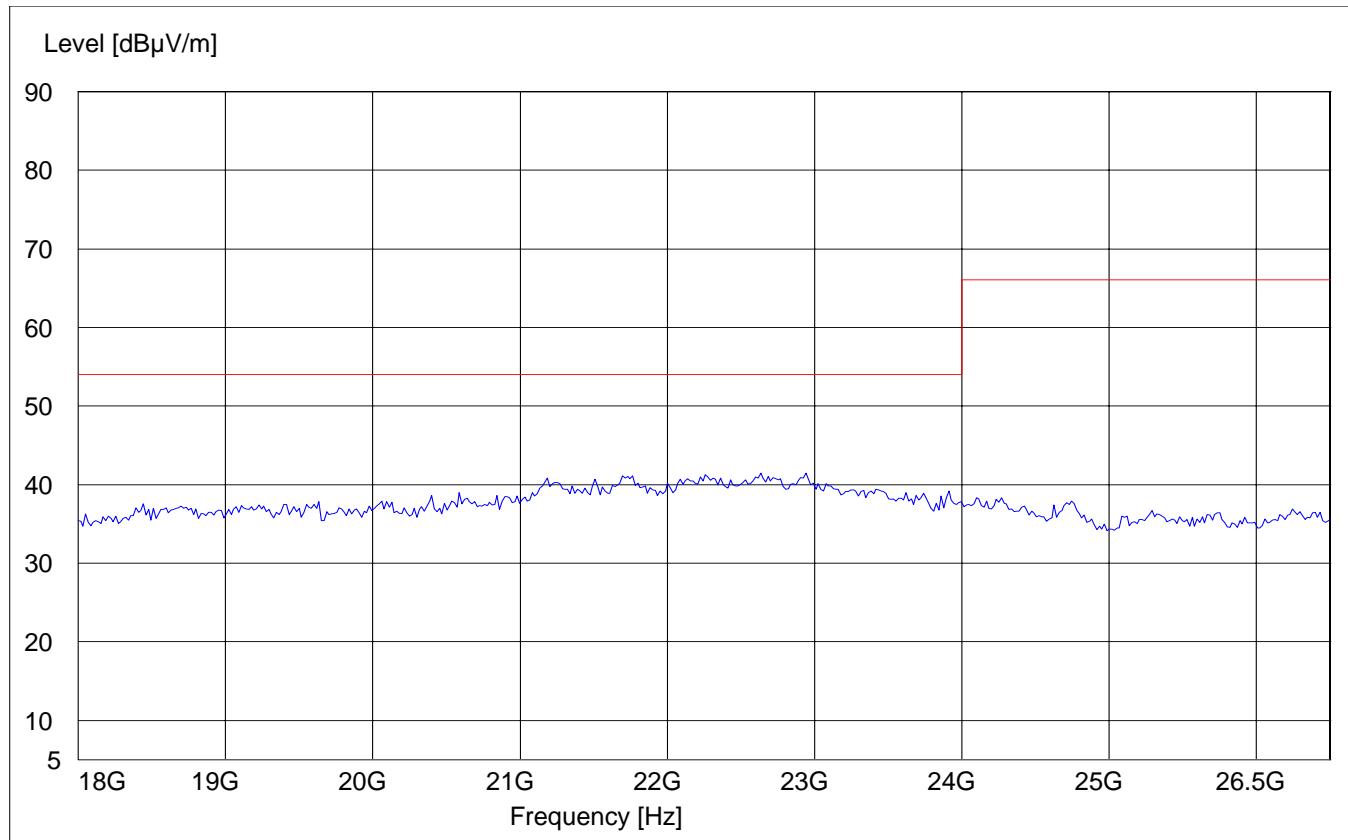

**RECEIVER SPURIOUS RADIATION
26.5GHz – 40GHz****§ 15.209**

Antenna: **Horizontal**
EUT plane: **Horizontal with screen vertical @ 90°**

SWEEP TABLE: "WLAN Spuri hi 26.5-40G"
Start Stop Detector Meas. RBW Transducer
Frequency Frequency Time Bandw. VBW
26.5 GHz 40 GHz MaxPeak Coupled 1 MHz 3160-10 horn

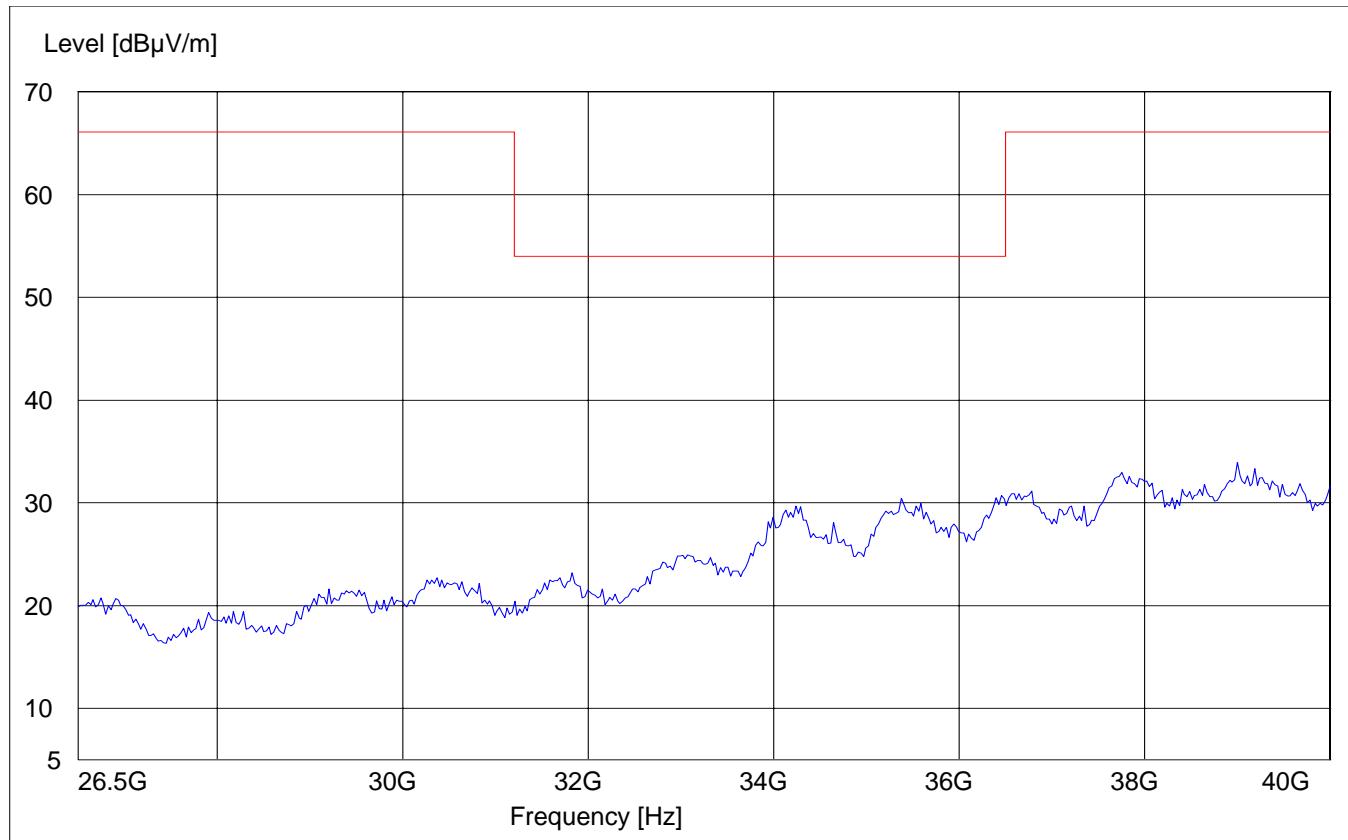


TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Biconilog Antenna	3141	EMCO	0005-1186
04	Horn Antenna (700M-18GHz)	SAS-200/571	AH Systems	325
05	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240
06	Horn Antenna (26.5-40GHz)	3160-10	EMCO	1156
07	2-3GHz Band reject filter	BRM50701	Microtronics	6
08	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
09	Pre-Amplifier	TS-ANA	Rohde & Schwarz	--
10	Pre-Amplifier	JS4-00102600	Miteq	00616

BLOCK DIAGRAMS

Conducted Testing

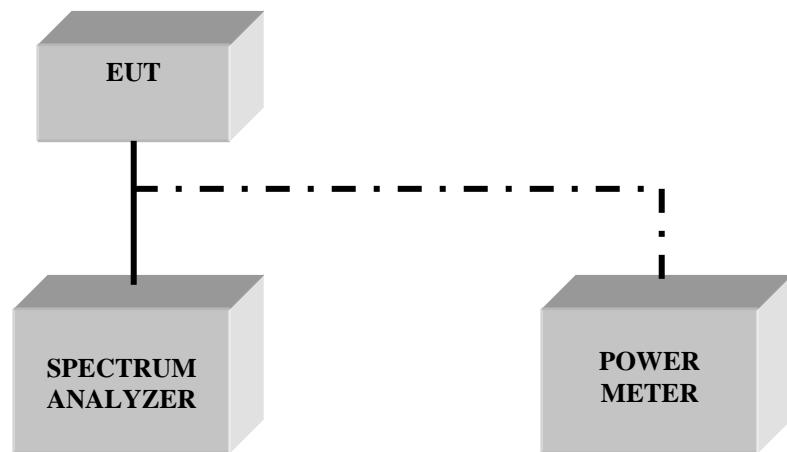

Radiated Testing**ANECHOIC CHAMBER**