




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/7/2005 11:01:29 AM	DUT Battery Model/No:	
Filename:	byst2462_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BCM94318MPAGH PP02X	Relative Permittivity:	51.86
Relative Humidity:	50%	Conductivity:	1.912
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	6.00 mm
DUT Position:	Bystander 5mm	Max SAR Z-axis Location:	-162.00 mm
Antenna Configuration:	integral	Max E Field:	25.41 V/m
Test Frequency:	2437MHz	SAR 1g:	0.907 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.438 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.223 W/kg
Type of Modulation:		SAR End:	0.220 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.04 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

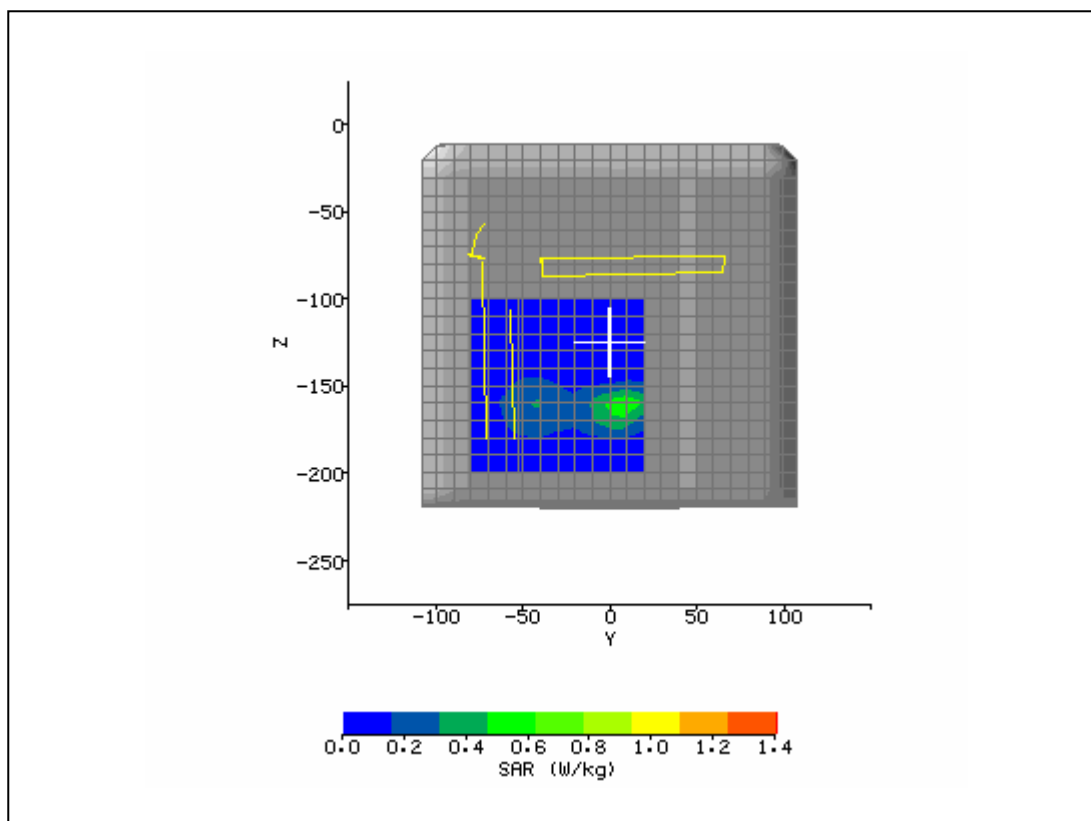

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/7/2005 11:33:13 AM	DUT Battery Model/No:	
Filename:	byst2437_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BCM94318MPAGH PP02X	Relative Permittivity:	51.86
Relative Humidity:	50%	Conductivity:	1.912
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-16.00 mm
DUT Position:	lap	Max SAR Z-axis Location:	-157.00 mm
Antenna Configuration:	integral	Max E Field:	20.99 V/m
Test Frequency:	2437MHz	SAR 1g:	0.664 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.336 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.193 W/kg
Type of Modulation:		SAR End:	0.193 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

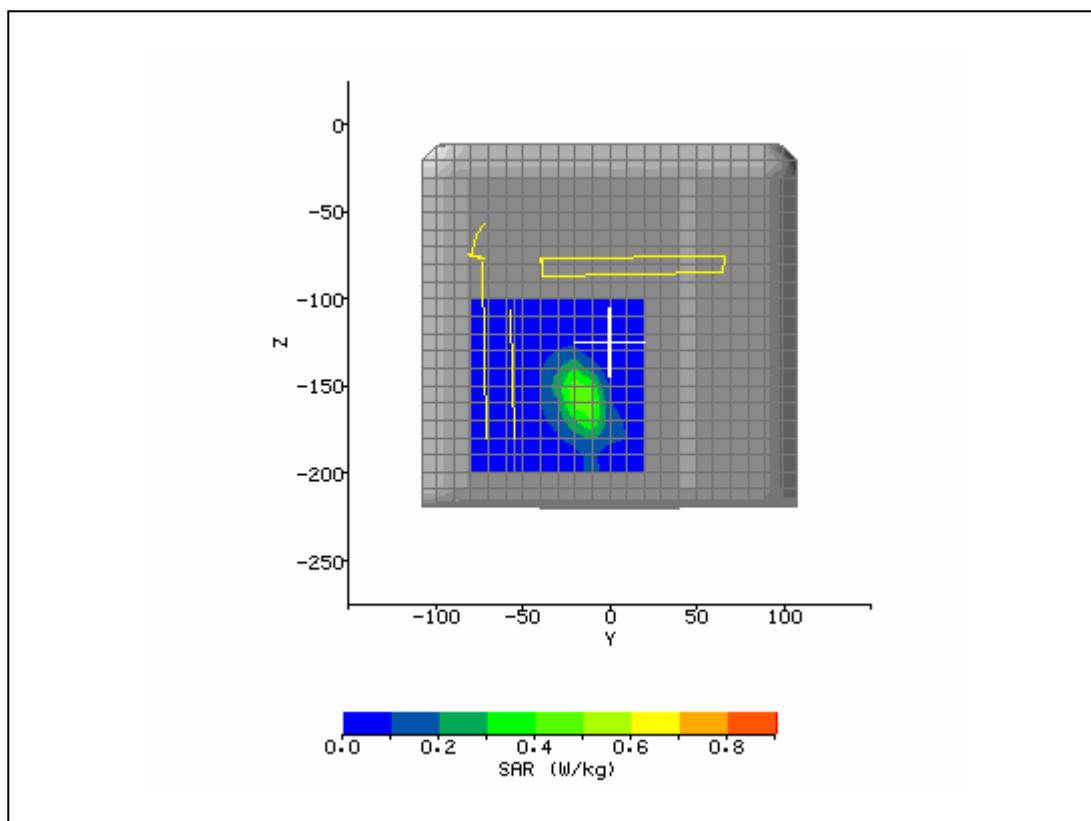

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/7/2005 12:08:07 PM	DUT Battery Model/No:	
Filename:	lap2437_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BCM94318MPAGH PP02X	Relative Permittivity:	51.79
Relative Humidity:	50%	Conductivity:	1.895
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	4.00 mm
DUT Position:	Bystander 5mm	Max SAR Z-axis Location:	-163.00 mm
Antenna Configuration:	integral	Max E Field:	26.68 V/m
Test Frequency:	2412MHz	SAR 1g:	1.010 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.490 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.262 W/kg
Type of Modulation:		SAR End:	0.262 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

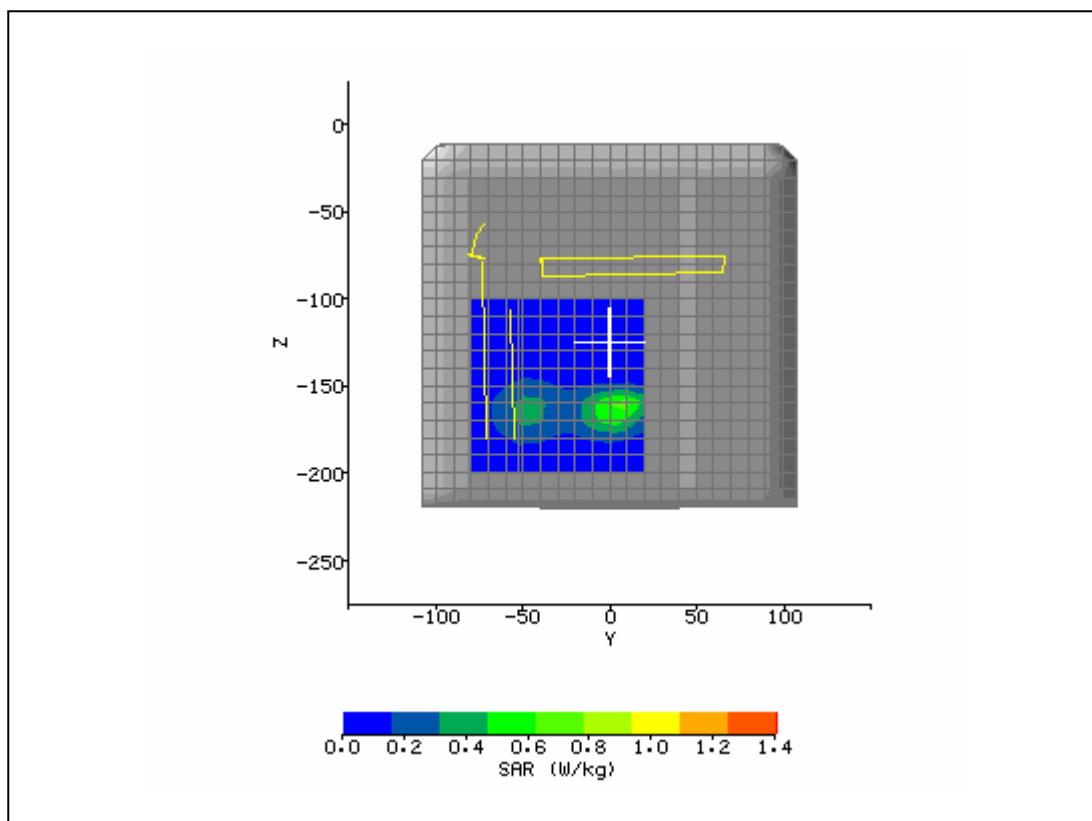

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	3/7/2005 1:53:13 PM	DUT Battery Model/No:	
Filename:	byst2412_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BCM94318MPAGH PP02X	Relative Permittivity:	51.97
Relative Humidity:	50%	Conductivity:	1.931
Phantom S/No:	HeadBox_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	3.00 mm
DUT Position:	Bystander 5mm	Max SAR Z-axis Location:	-164.00 mm
Antenna Configuration:	integral	Max E Field:	24.99 V/m
Test Frequency:	2457MHz	SAR 1g:	0.912 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.413 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.234 W/kg
Type of Modulation:		SAR End:	0.234 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	3/1/05
Input Power Level:	max	Extrapolation:	poly4

