



FCC Test Report

Test report no.: EMC_831FCC15.407_2005_FC_PA

FCC Part 15.407 for UNII Devices / CANADA RSS-210 Issue 5 for LELEAN Devices

EUT: WLAN Model: BCM94318MPAGH
HOST: Test Fixture (Modular Approval)
(C2P Change to add Fairchild PA)
FCC ID: QDS-BRCM1017
IC ID: 4324A-BRCM1017
(This test report covers freq. 5180-5320MHz)



TTI-P-G 081/94-A0

Accredited according to **ISO/IEC 17025**



**Bluetooth Qualification
Test Facility
(BQTF)**



FCC listed # 101450

IC recognized # 3925

CETECOM Inc.

411 Dixon Landing Road ♦ Milpitas, CA 95035 ♦ U.S.A.

Phone: + 1 (408) 586 6200 ♦ Fax: + 1 (408) 586 6299 ♦ E-mail: info@cetecomusa.com ♦ <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686
Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

Table of Contents

1	General information
1.1	Notes
1.2	Testing laboratory
1.3	Details of applicant
1.4	Application details
1.5	Test item
1.6	Test standards
2	Technical test
2.1	Summary of test results
2.2	Test report
1	General information
1.1	Notes

The test results of this test report relate exclusively to the test item specified in 1.5. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

TEST REPORT PREPARED BY:**EMC Engineer: Harpreet Sidhu**

1.2 Testing laboratory
CETECOM Inc.
411 Dixon Landing Road, Milpitas, CA-95035, USA
Phone: +1 408 586 6200 Fax: +1 408 586 6299
E-mail: lothar.schmidt@cetecomusa.com
Internet: www.cetecom.com

1.3 Details of applicant

Name : **Broadcom corporation**
Street : **190 Mathilda Place**
City / Zip Code : **Sunnyvale, CA 94086**
Country : **USA**
Contact : **Dan Lawless**
Telephone : **408-922-5870**
Tele-fax : **408-543-3399**
e-mail : dlawless@broadcom.com

1.4 Application details

Date of receipt test item : 2005-03-14
Date of test : 2005-03-14/15/17/18/22

1.5 Test item

Manufacturer : Applicant
Model No. (EUT) : [BCM94318MPAGH](#)
Host : Test Fixture
Description : [WLAN MiniPCI Multiband card incorporating 2.4GHz and 5GHz radios](#)
FCC ID : QDS-BRCM1017
IC ID : 4324A-BRCM1017
Additional information
Frequency : 2412MHz – 2472MHz for 2.4GHz band (not covered in this test report)
5180MHz – 5320MHz for 5GHz band (covered in this test report)
5745MHz – 5825MHz for 5GHz band (not covered in this test report)
Type of modulation : DSSS / OFDM (orthogonal frequency division multiplexing)
Number of channels : 13 for 2.4GHz band
13 for 5GHz band
Antenna : 5.1dBi max. gain Stamped metal sheet antenna for
5180-5320GHz band (Hitachi model HFT17-DL03)
Power supply : 3.3 VDC from Host
Output power : 12.77dBm (18.93mW) conducted power for 5150-5250GHz
14.22dBm (26.43mW) conducted power for 5250-5350GHz
Extreme temp. Tolerance : 0°C to +70°C

1.6 Test standards: **FCC Part 15 §15.407 / CANADA RSS-210**
Measurements done as per DA 02-2138

PROJECT OVERVIEW:

This test report carries all radiated measurements required as per FCC 15.407 for doing a class-2 permissive change on WLAN mini PCI card model# BCM94318MPAGH tested in test fixture as per DA001407 & FCC04-165 requirements for modular transmitter approval. Conducted power was measured and found within limits of C2P change rules.

Following are the changes filed under this application;

Change #1 Adding alternate Fairchild power amp. The associated layout and filter circuitry is the same. The average power in packet is maintained the same as the original filing.

All measurements are done with under-mentioned max gain antennas for each band. WLAN was tested for spurious emissions at different data rates. Test report shows only worst-case test results of all data rates with following power levels.

802.11a Mode:

Channels 36-48:12.0dBm

Channels 52-64:15.0dBm

Channel 149-165:15.0dBm

Antenna Manufacturer	Antenna Type	Model	Peak gain @ 2400-2483.5MHz	Peak gain 5150-5350MHz	Peak gain @ 5725-5850
WNC	Stamped metal sheet	81.ED415.002	3.24dBi (Main)	1.51dBi (Main)	Main -0.35dBi
Hitachi	Stamped metal sheet	HFT17-DL03	Main 1.5 (H)	Main 5.1 (V)	Main 5.7 (V+H)

For more information on antennas covered under this C2P change please refer to **BCM94318MPAGH_C2P_Fairchild_PA_Declaration_worst_case_antenna**

2 Technical test**2.1 Summary of test results**

No deviations from the technical specification(s) were ascertained in the course of the tests
Performed

Final Verdict:
(Only “passed” if all single measurements are “passed”)

Passed

Technical responsibility for area of testing:

2005-04-08 EMC & Radio Lothar Schmidt
(Technical Manager)



Date

Section

Name

Signature

Responsible for test report and project leader:

2005-04-08 EMC & Radio Harpreet Sidhu (EMC Engineer)



Date

Section

Name

Signature

2.2 Test report

TEST REPORT

Test report no.: EMC_831FCC15.407_2005_FC_PA

FCC Part 15.407 for UNII Devices / CANADA RSS-210

TEST REPORT REFERENCE

	PAGE
LIST OF MEASUREMENTS	
PEAK OUTPUT POWER § 15.407 (a)(1)(2)	8
Hitachi Stamped metal sheet antenna	10
BAND EDGE COMPLIANCE §15.407 (b)(1)(2)(4)(6)	11
EMISSION LIMITATIONS § 15.407 (b)(1)(2)(4)(6)	15
CONDUCTED EMISSIONS § 15.107/207	29
RECEIVER SPURIOUS RADIATION § 15.209	30
TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	37
BLOCK DIAGRAMS	38

PEAK OUTPUT POWER

§ 15.407 (a)(1)(2)

(Conducted)**(Data rate – 54Mbps)**

54Mbps is found to be worst-case for peak output power.

Test Procedure:

DA02-2138 Method-3.

Test Results

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)			
Frequency (MHz)		5180	5260	5320	
T _{nom} (23)°C	V _{nom} (3.3) VDC	Pk	12.77	14.22	14.20
Measurement uncertainty		±0.5dBm			

LIMIT

SUBCLAUSE § 15.407 (a)(1)(2)

Frequency range (GHz)	Conducted Peak Power
5.15 – 5.25	17dBm
5.25 – 5.35	24dBm

**MAXIMUM PEAK OUTPUT POWER
(RADIATED)****§ 15.407 (a)(1)(2)****(Data rate – 54Mbps)**

54Mbps is found to be worst-case for peak output power.

EIRP:**Test Results**

TEST CONDITIONS		MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)		5180	5260	5320
T _{nom} (23)°C	V _{nom} (3.3) VDC	*17.87	*19.32	*19.3
Measurement uncertainty		±0.5dBm		

Note:** EIRP is calculated based on 5.1Bi antenna gain and conducted peak power measurements.**LIMIT*SUBCLAUSE § 15.407 (a)(1)(2)**

Frequency range (GHz)	Conducted Peak Power
5.15 – 5.25	17dBm
5.25 – 5.35	24dBm
If transmitting antennas of directional gain greater than 6dBi are used, both the peak transmit power and the peak spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi	

**Hitachi Stamped metal sheet antenna
(Freq. band: 5180-5320MHz, Gain: 5.1dBi, Model HFT17-DL03)**

BAND EDGE COMPLIANCE

§15.407 (b)(1)(2)(4)(6)

(Data rate – 6Mbps)


Low frequency section (spurious in the restricted band 4500 – 5150 MHz)

(Average measurement)

Antenna: Horizontal
EUT plane: Horizontal

Operating condition : Tx at 5180MHz
SWEEP TABLE : "FCC15.407 LBE_AVG"
Limit Line horizontal : 54dB μ V
Limit Line vertical : 5150MHz

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
4.5 GHz	5.19 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

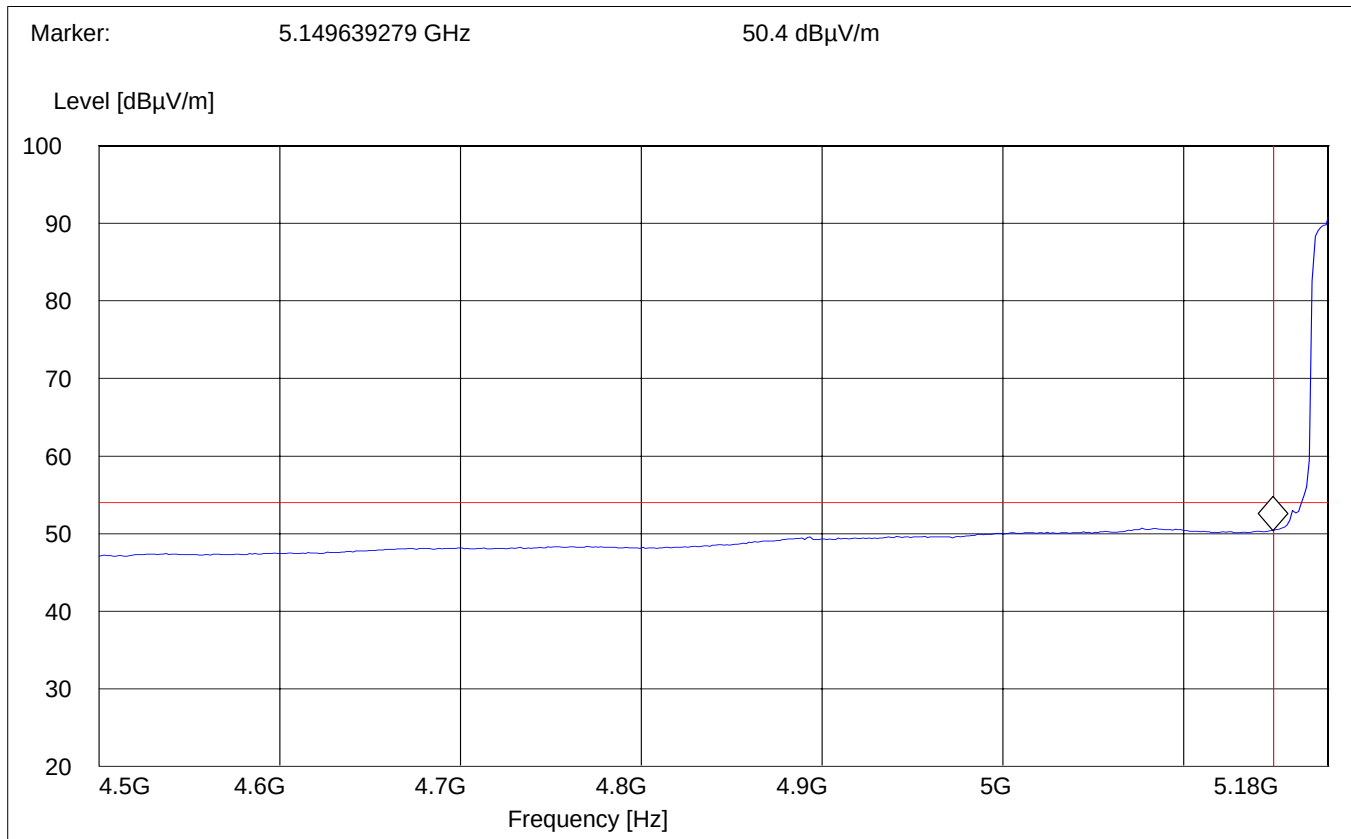

BAND EDGE COMPLIANCE

§15.407 (b)(1)(2)(4)(6)

(Data rate – 54Mbps)


Low frequency section (spurious in the restricted band 4500 – 5150 MHz)

(Peak measurement)

Antenna: Horizontal
EUT plane: Horizontal

Operating condition : Tx at 5180MHz
SWEEP TABLE : "FCC15.407 LBE_Pk"
Limit Line horizontal : 74dB μ V
Limit Line vertical : 5150MHz

Start Frequency	Stop Frequency	Detector	Meas. Bandw.	RBW	VBW	Transducer
4.5 GHz	5.19 GHz	MaxPeak	Coupled	1MHz	1MHz	#326 horn (dBi)

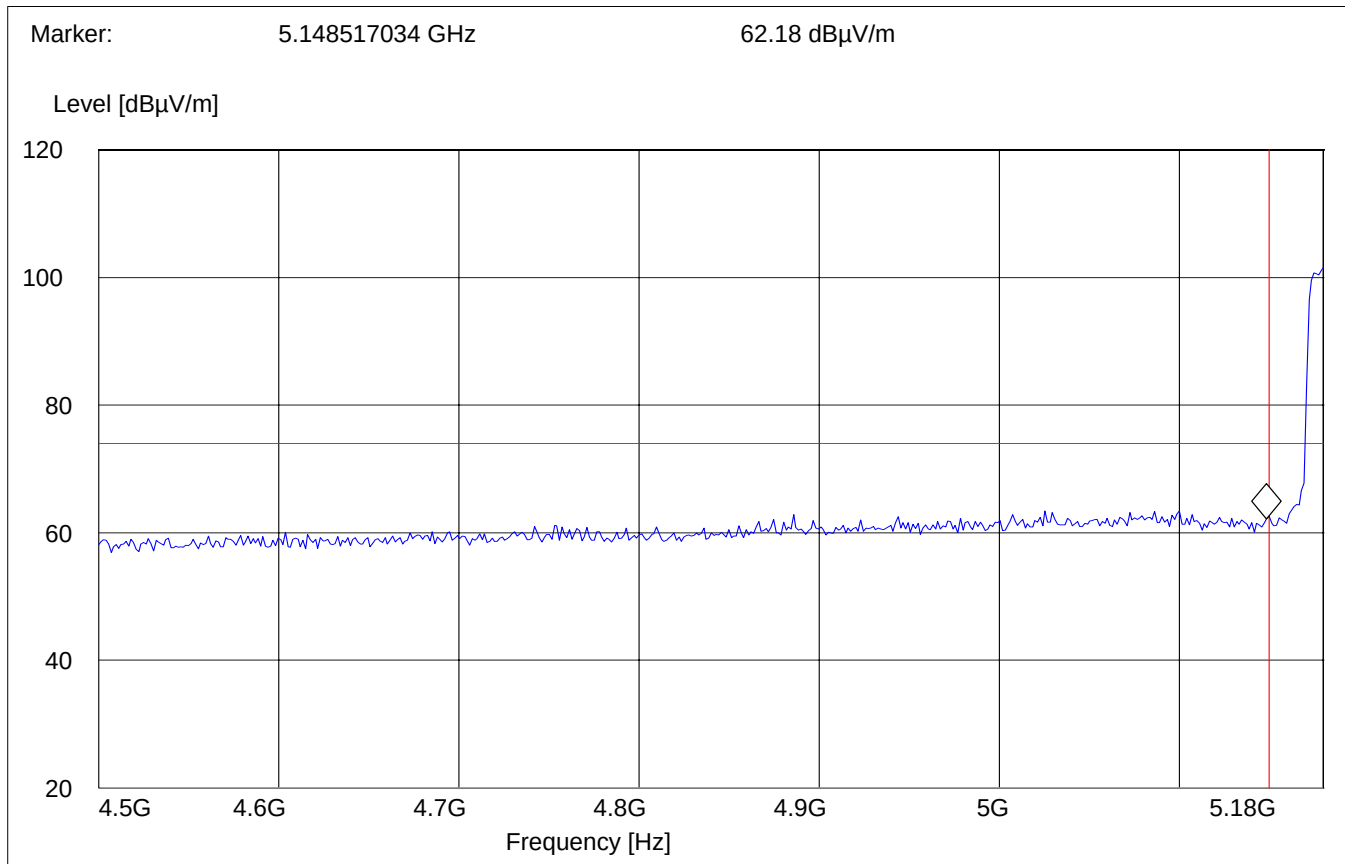

BAND EDGE COMPLIANCE

§15.407 (b)(1)(2)(4)(6)

(Data rate – 6Mbps)


High frequency section (spurious in the restricted band 5350 – 5460 MHz)

(Average measurement)

Antenna: Horizontal
EUT plane: Horizontal

Operating condition : Tx at 5320MHz
SWEEP TABLE : "FCC15.407 HBE_AVG"
Limit Line horizontal : 54dBμV
Limit Line vertical : 5350MHz

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
5.28 GHz	5.46 GHz	MaxPeak	Coupled	1 MHz	10Hz	#326 horn (dBi)

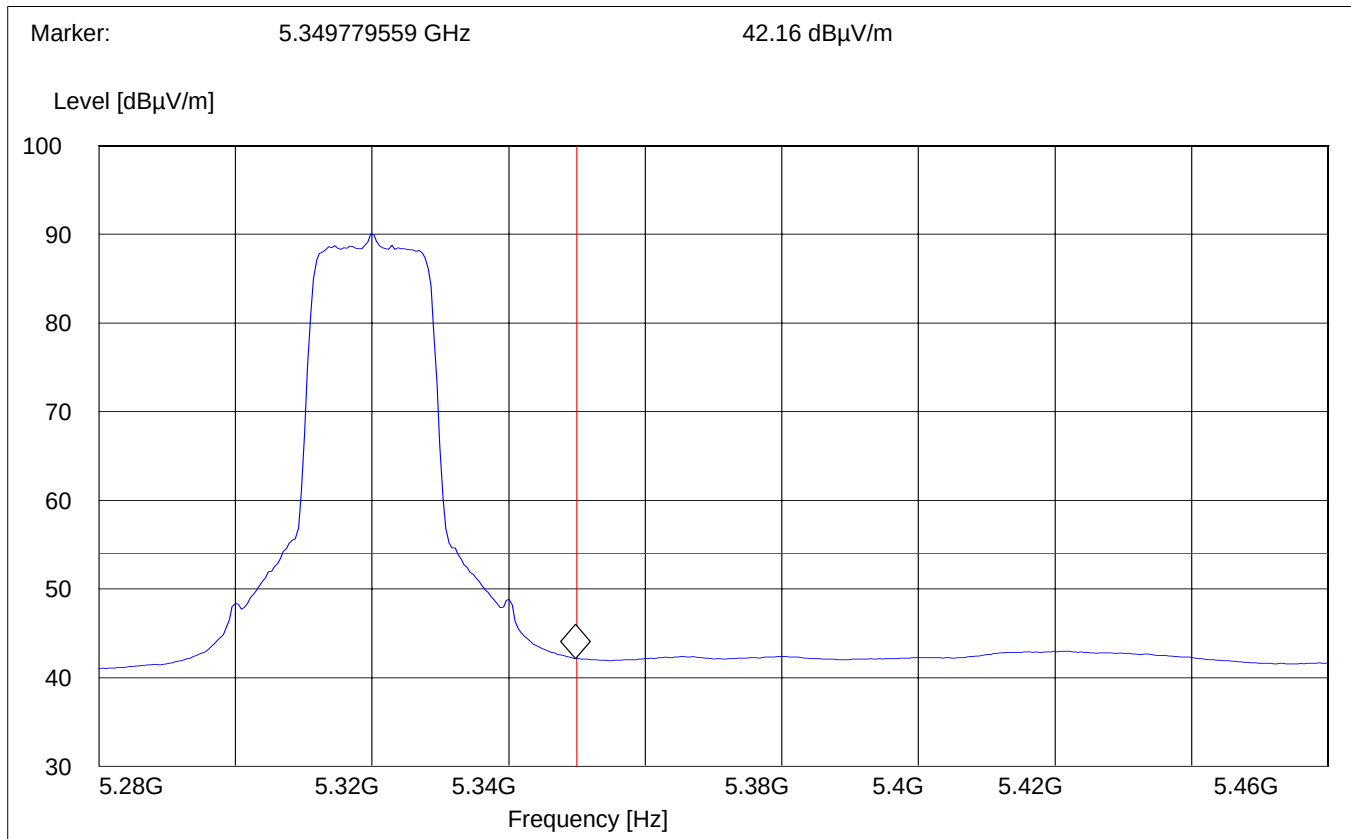

BAND EDGE COMPLIANCE

§15.407 (b)(1)(2)(4)(6)

(Data rate – 54Mbps)


High frequency section (spurious in the restricted band 5350 – 5460 MHz)

(Peak measurement)

Antenna: Horizontal
EUT plane: Horizontal

Operating condition : Tx at 5320MHz
SWEEP TABLE : "FCC15.407 HBE_Pk"
Limit Line horizontal : 74dB μ V
Limit Line vertical : 5350MHz

Start Frequency	Stop Frequency	Detector Time	Meas. Bandw.	RBW	VBW	Transducer
5.28 GHz	5.46 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

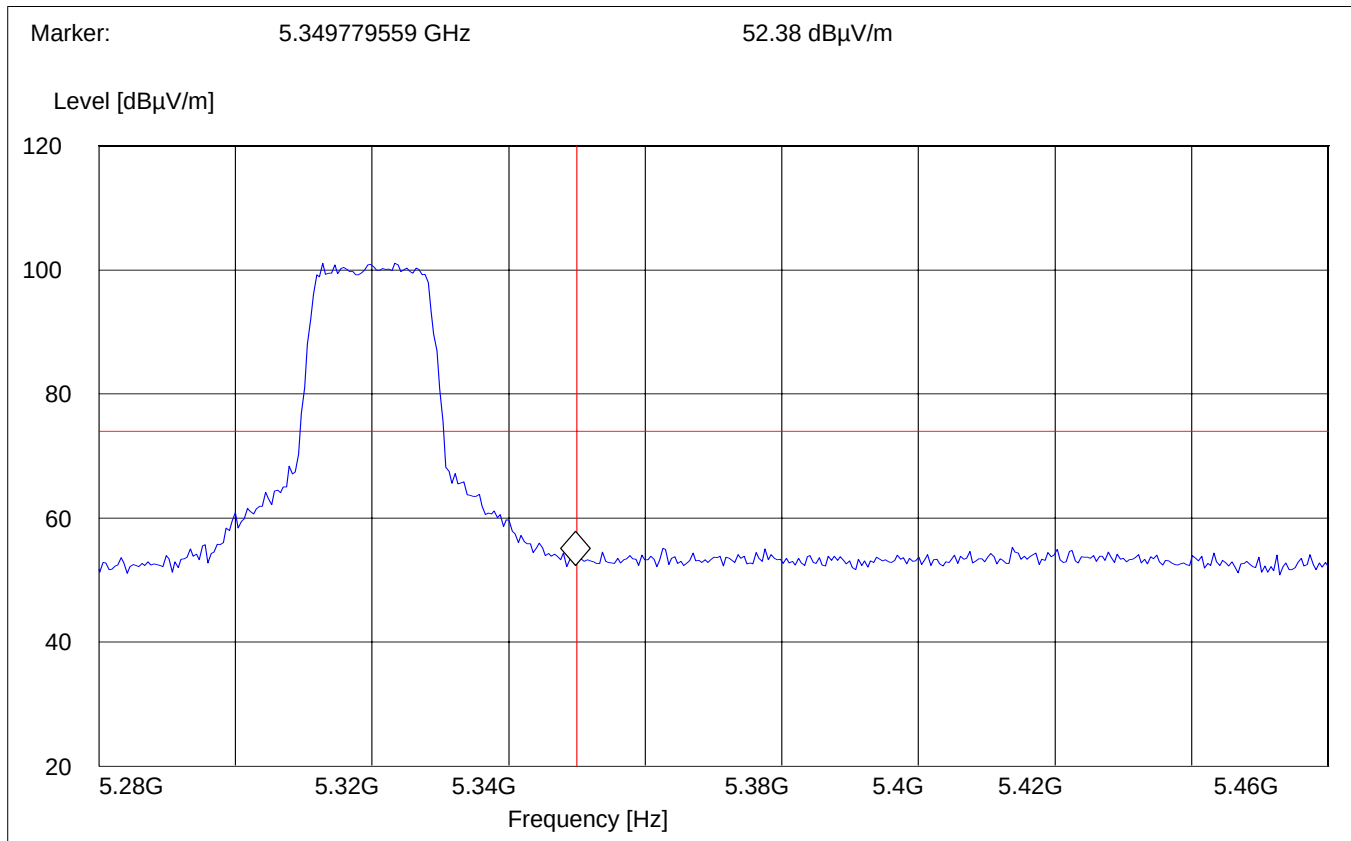

EMISSION LIMITATIONS**§ 15.407 (b)(1)(2)(4)(6)****Transmitter (Radiated)****(Data rate – 54Mbps)****Limits****§ 15.209 / § 15.407**

Freq. (MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)
0.009-0.490	2400/F (kHz)	
0.490-1.750	24000/F (kHz)	
1.705-30.0	30	29.54
30-88	100	40.00
88-216	150	43.52
216-960	200	46.02
Above 960*	500	53.97
1000-40000**	2013.8	66.08

*) Limit in restricted bands

**) Limit outside restricted bands

NOTE:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 40 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in peak mode unless specified with the plots.

Transmit at Lowest channel Frequency 5180MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			
Transmit at Middle channel Frequency 5260MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			
Transmit at Highest channel Frequency 5320MHz			
Frequency (MHz)	Level (dBµV/m)		
	Peak	Quasi-Peak	Average
SEE PLOTS			

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.407 (b)(1)(2)(4)(6)

Lowest Channel (5180MHz): 30MHz – 1GHz

(Data rate – 54Mbps)

Note:

1. This plot is valid for low, mid, high channels (worst-case plot valid for all antennas)
2. All significant peaks were confirmed originating from test fixture, see plots on next pages with test fixture tested alone with no WLAN card

Antenna:

Vertical


EUT plane:

Horizontal with screen vertical @ 90°

SWEEP TABLE:

"FCC 15.407 30-1G_V"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

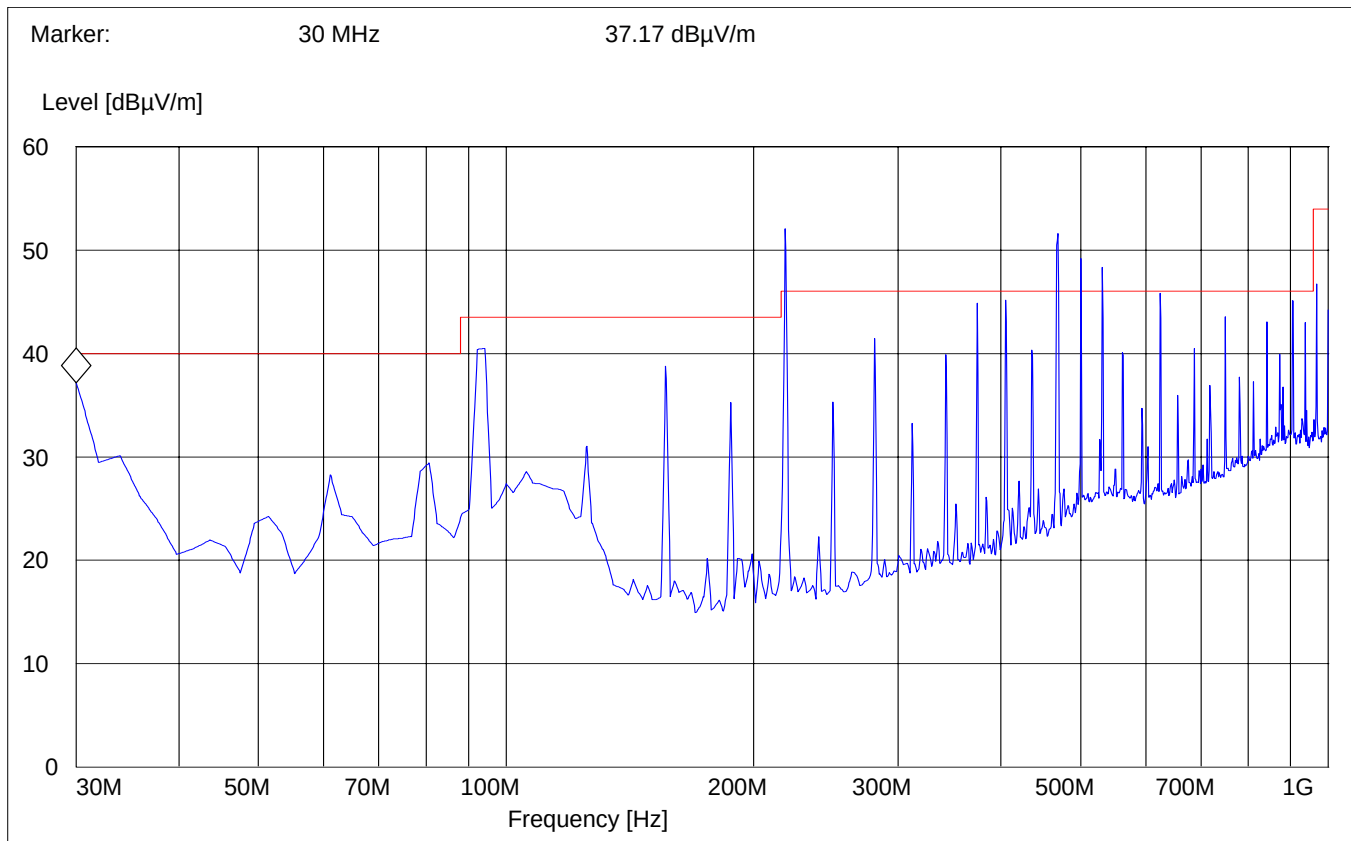

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.407 (b)(1)(2)(4)(6)

Lowest Channel (5180MHz): 30MHz – 1GHz


(Data rate – 54Mbps)

Hitachi FPC Antenna

Note:

- 1 This plot is valid for low, mid, high channels (worst-case plot valid for all antennas)
- 2 All significant peaks were confirmed originating from test fixture, see plots on next pages with test fixture tested alone with no WLAN card

Antenna:		Horizontal			
EUT plane:		Horizontal with screen vertical @ 90°			
SWEEP TABLE:		"FCC 15.407 30-1G_H"			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

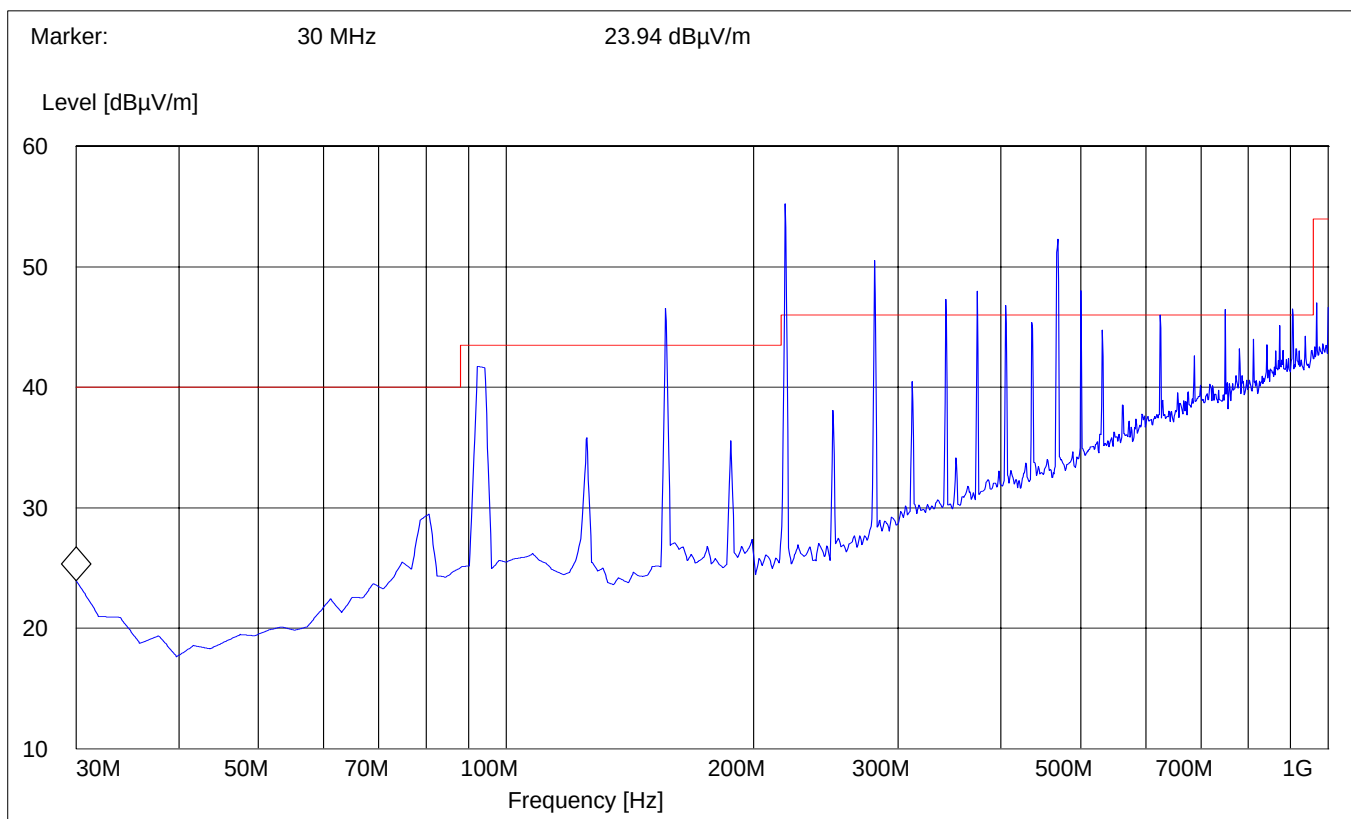


EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (d)

30MHz – 1GHz

Antenna: Vertical

Test Fixture only (no WLAN card)

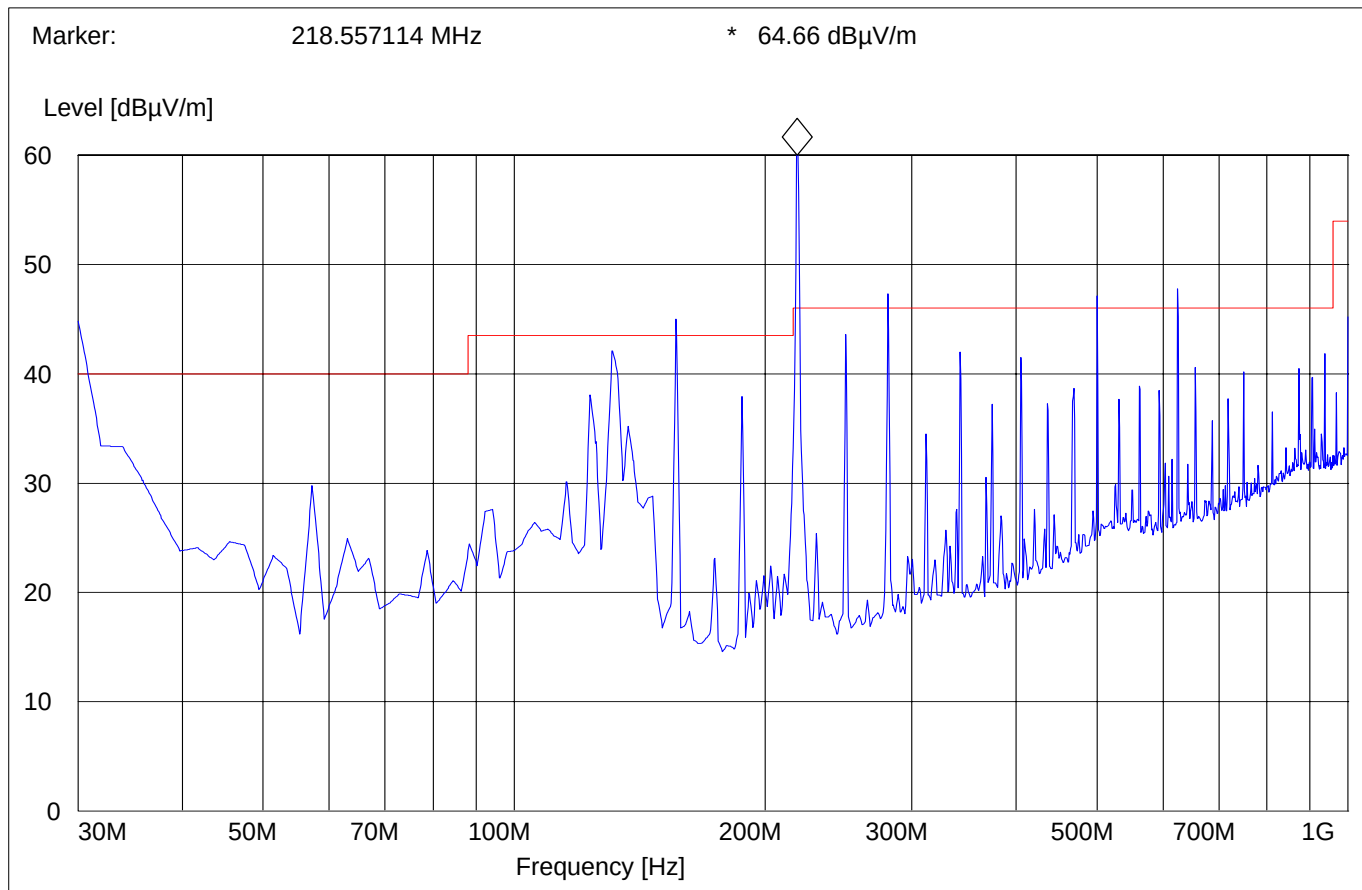


EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.247 (c) (1)

30MHz – 1GHz

Antenna: Horizontal

Test Fixture only (no WLAN card)

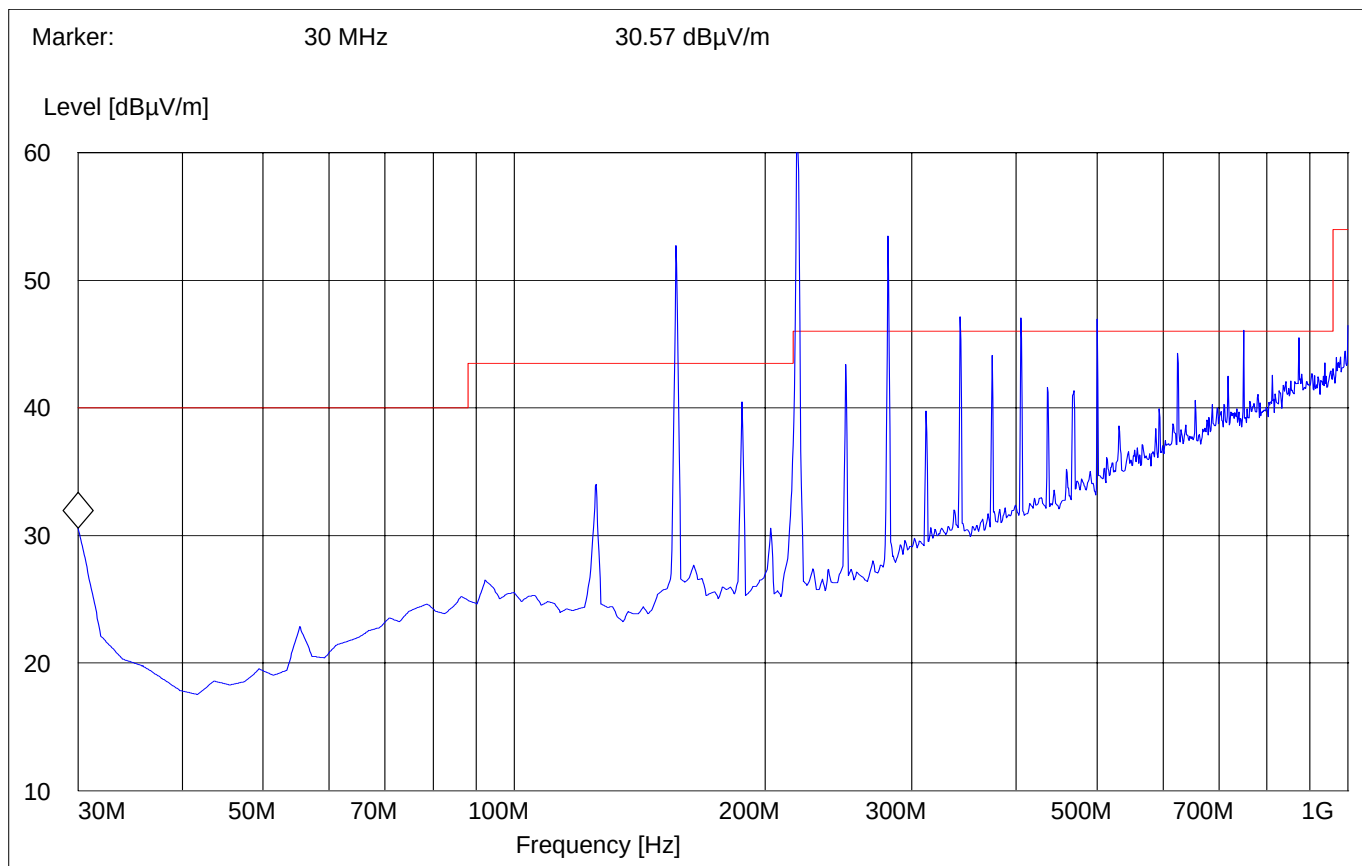

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.407 (b)(1)(2)(4)(6)

Lowest Channel (5180MHz): 1GHz – 7GHz

(Average)

(Data rate – 54Mbps)

Antenna:

Horizontal

EUT plane:


Horizontal with screen vertical @ 90°

Note: The peak above the limit line is the carrier freq.

SWEEP TABLE:

"FCC 15.407 1-7G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency		Time			
1GHz	7.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

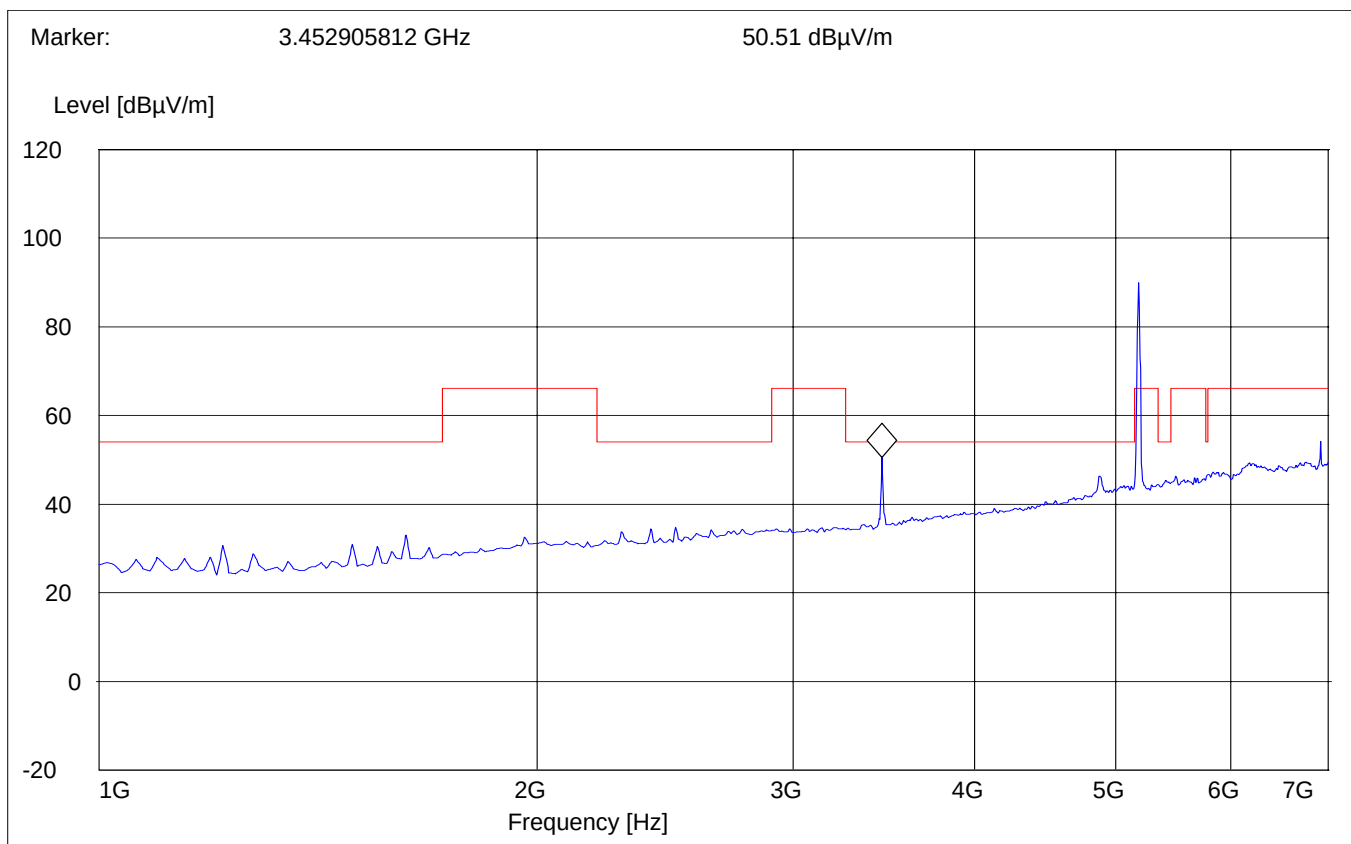

EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.407 (b)(1)(2)(4)(6)

Lowest Channel (5180MHz): 7GHz – 18GHz

(Data rate – 54Mbps)

Antenna: Horizontal
EUT plane: Horizontal with screen vertical @ 90°

SWEEP TABLE:		"FCC 15.407 7-18G"			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
7GHz	18.0 GHz	MaxPeak	Coupled	1MHz	326 horn

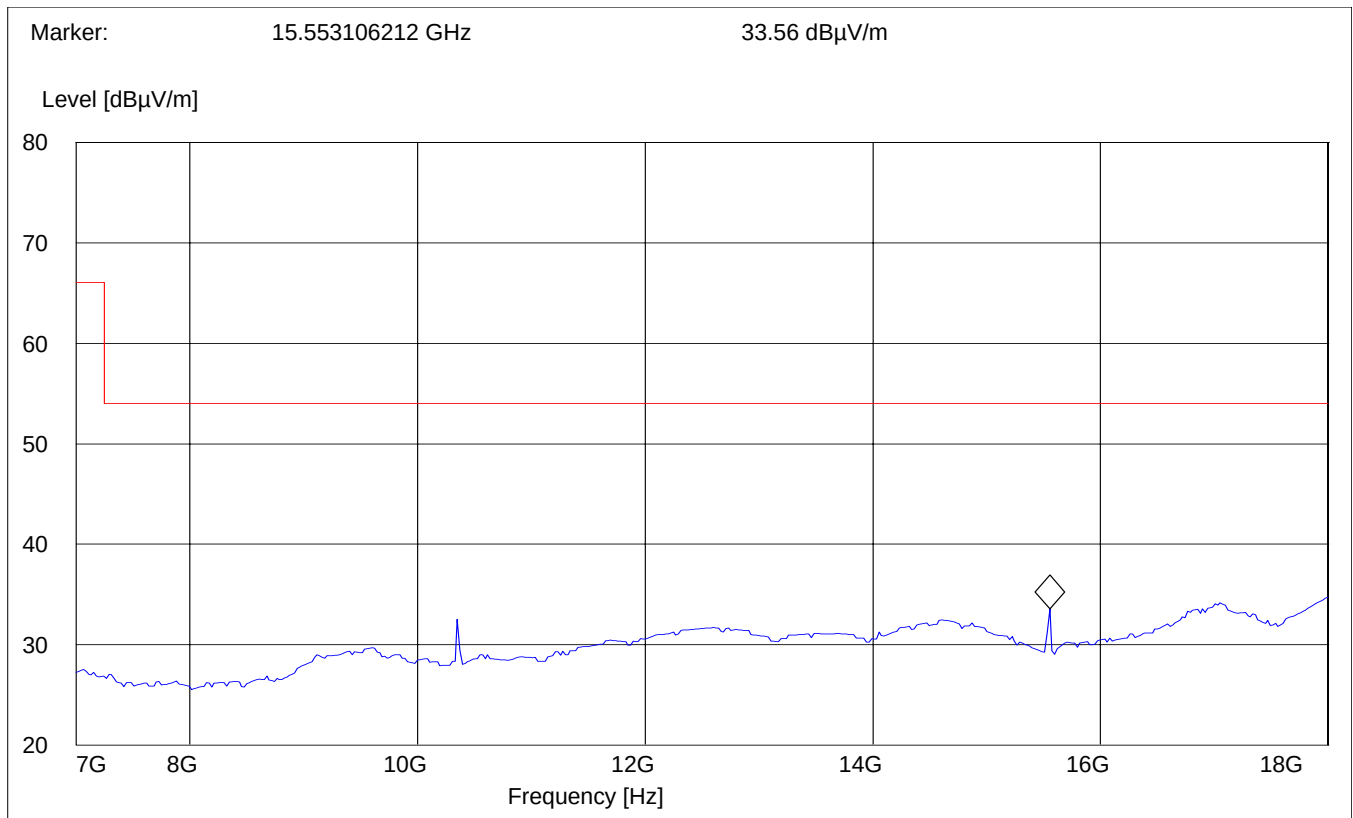

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.407 (b)(1)(2)(4)(6)

Lowest Channel (5260MHz): 1GHz – 7GHz

(Average)

(Data rate – 54Mbps)


Antenna: Horizontal

EUT plane: Horizontal

Note: The peak above the limit line is the carrier freq.

SWEEP TABLE: "FCC 15.407 1-7G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency		Time			
1GHz	7.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

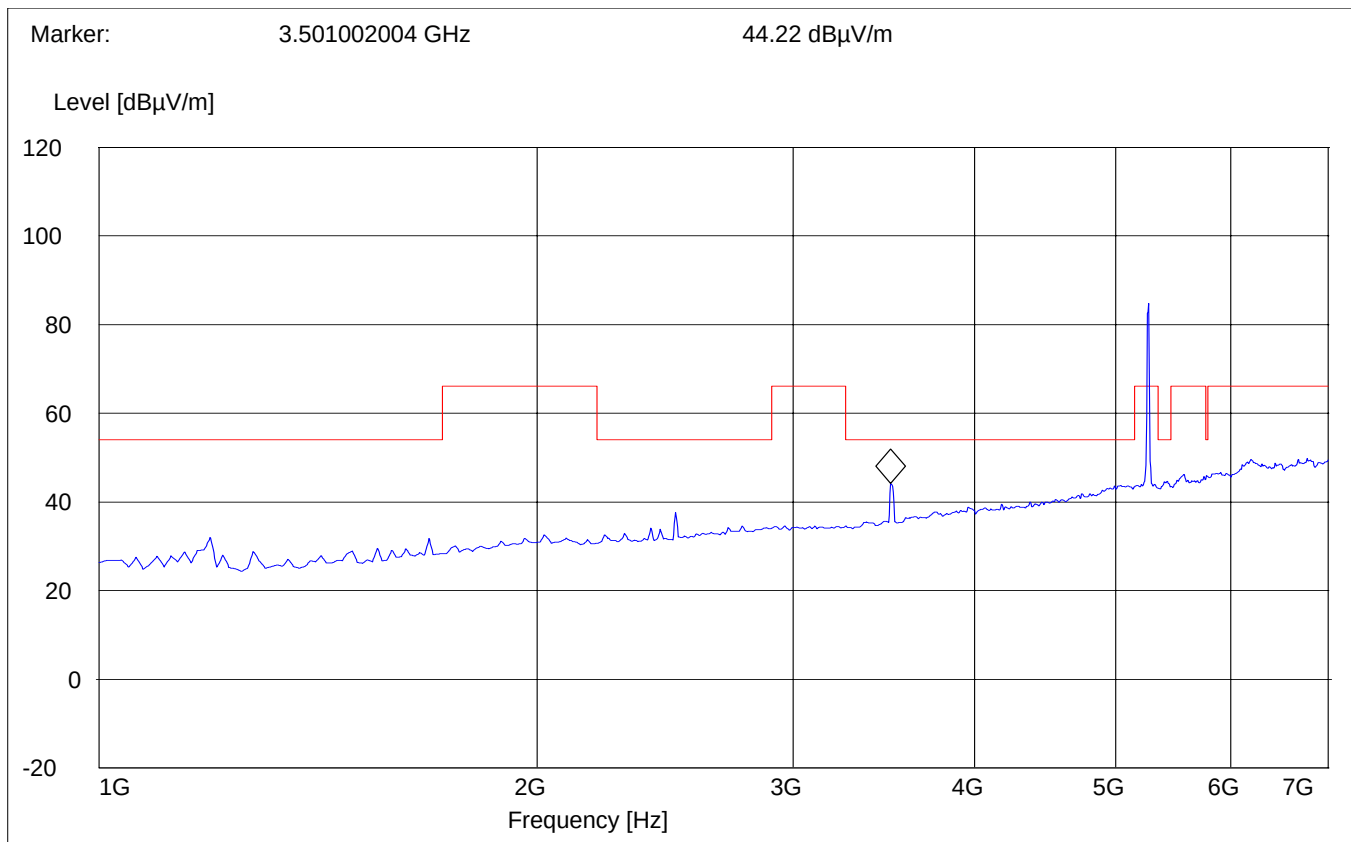

EMISSION LIMITATIONS - Radiated (Transmitter)


§ 15.407 (b)(1)(2)(4)(6)

Lowest Channel (5260MHz): 7GHz – 18GHz

(Data rate – 54Mbps)

Antenna: Horizontal
EUT plane: Horizontal with screen vertical @ 90°

SWEEP TABLE:		"FCC 15.407 7-18G"			
Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
7GHz	18.0 GHz	MaxPeak	Coupled	1MHz	326 horn

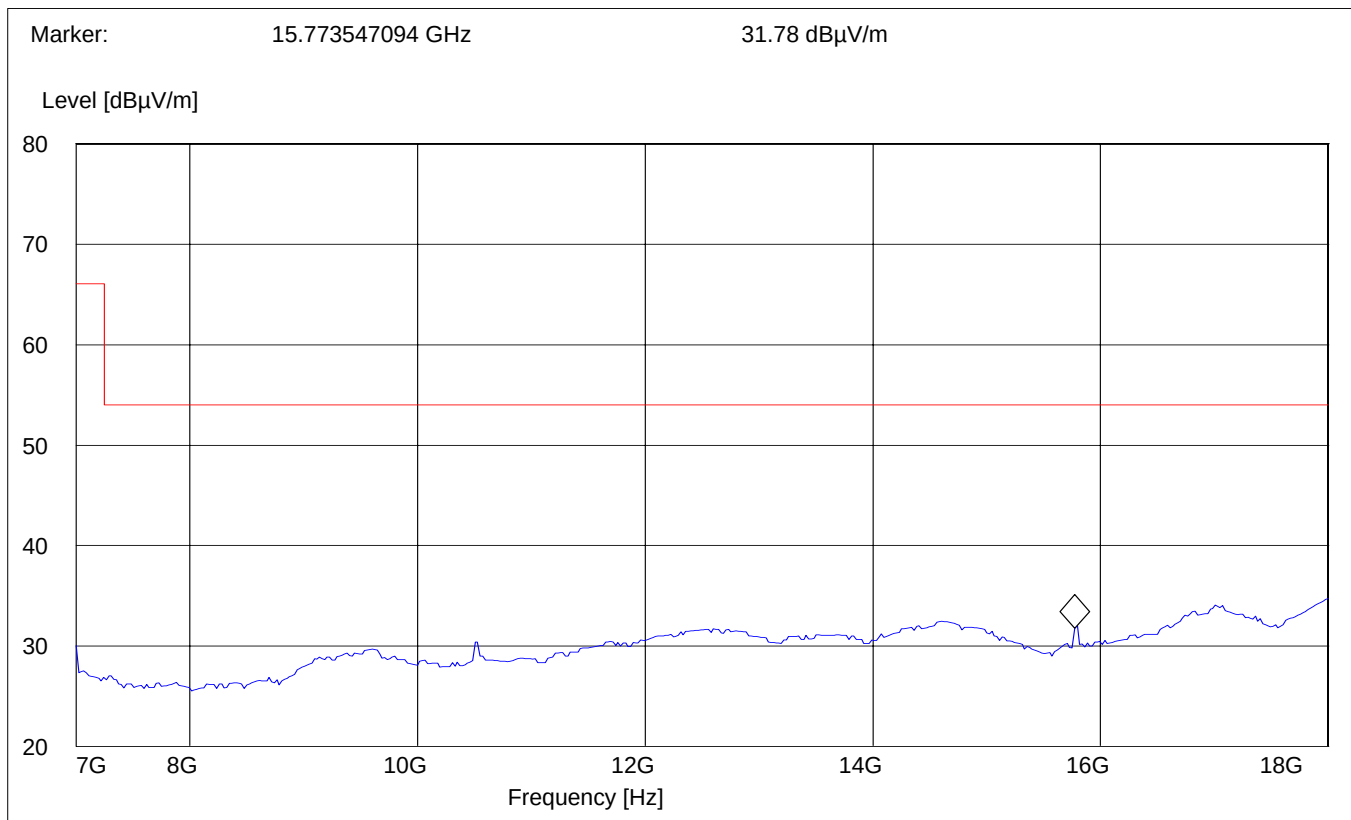

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.407 (b)(1)(2)(4)(6)

Lowest Channel (5320MHz): 1GHz – 7GHz

(Data rate – 54Mbps)

(Average)

Antenna:

Horizontal

EUT plane:


Horizontal with screen vertical @ 90°

Note: The peak above the limit line is the carrier freq.

SWEEP TABLE:

"FCC 15.407 1-7G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency		Time			
1GHz	7.0 GHz	MaxPeak	Coupled	1MHz	10Hz	326 horn

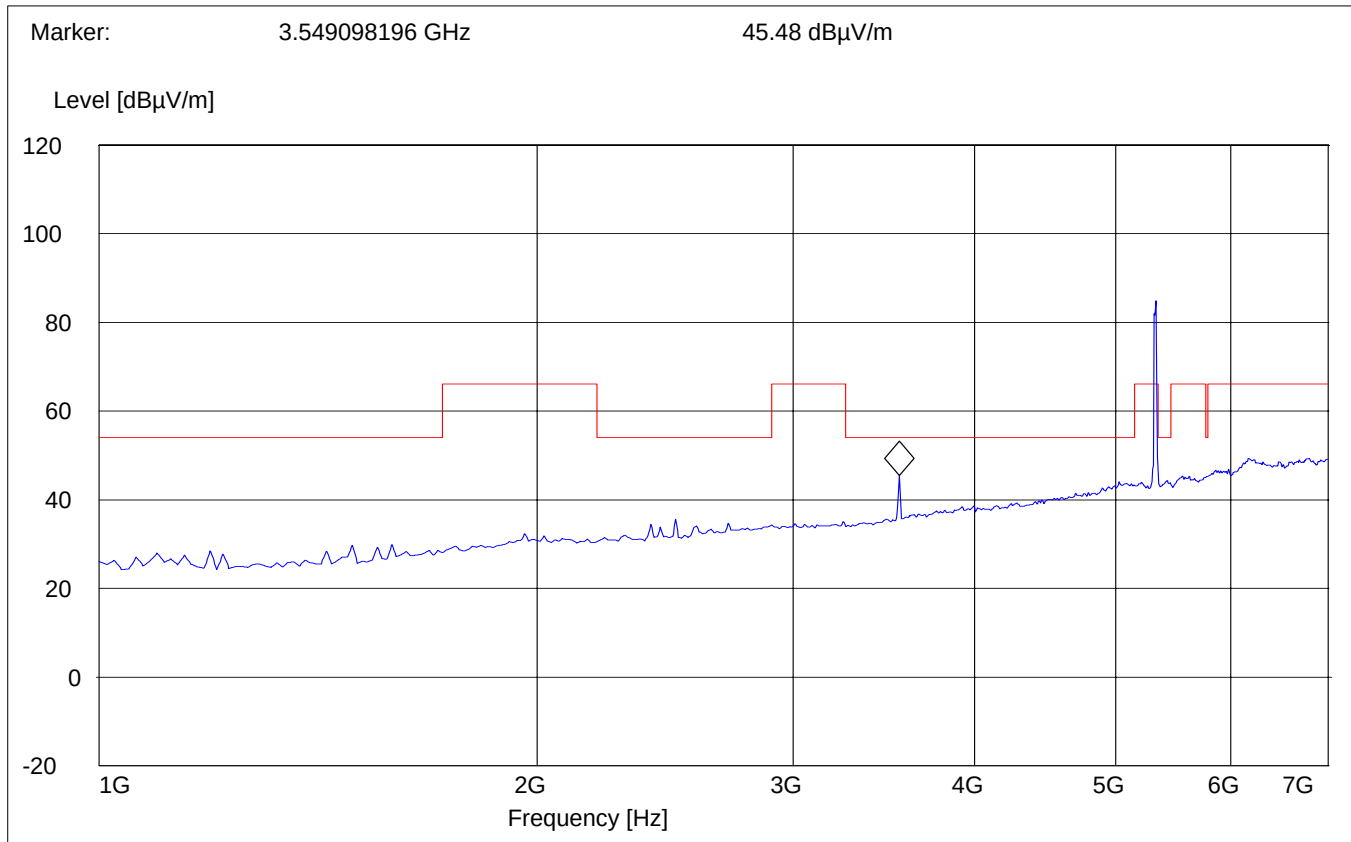

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.407 (b)(1)(2)(4)(6)

Lowest Channel (5320MHz): 7GHz – 18GHz


(Data rate – 54Mbps)

Antenna: Horizontal

EUT plane: Horizontal with screen vertical @ 90°

SWEEP TABLE: "FCC 15.407 7-18G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
7GHz	18.0 GHz	MaxPeak	Coupled	1MHz	326 horn

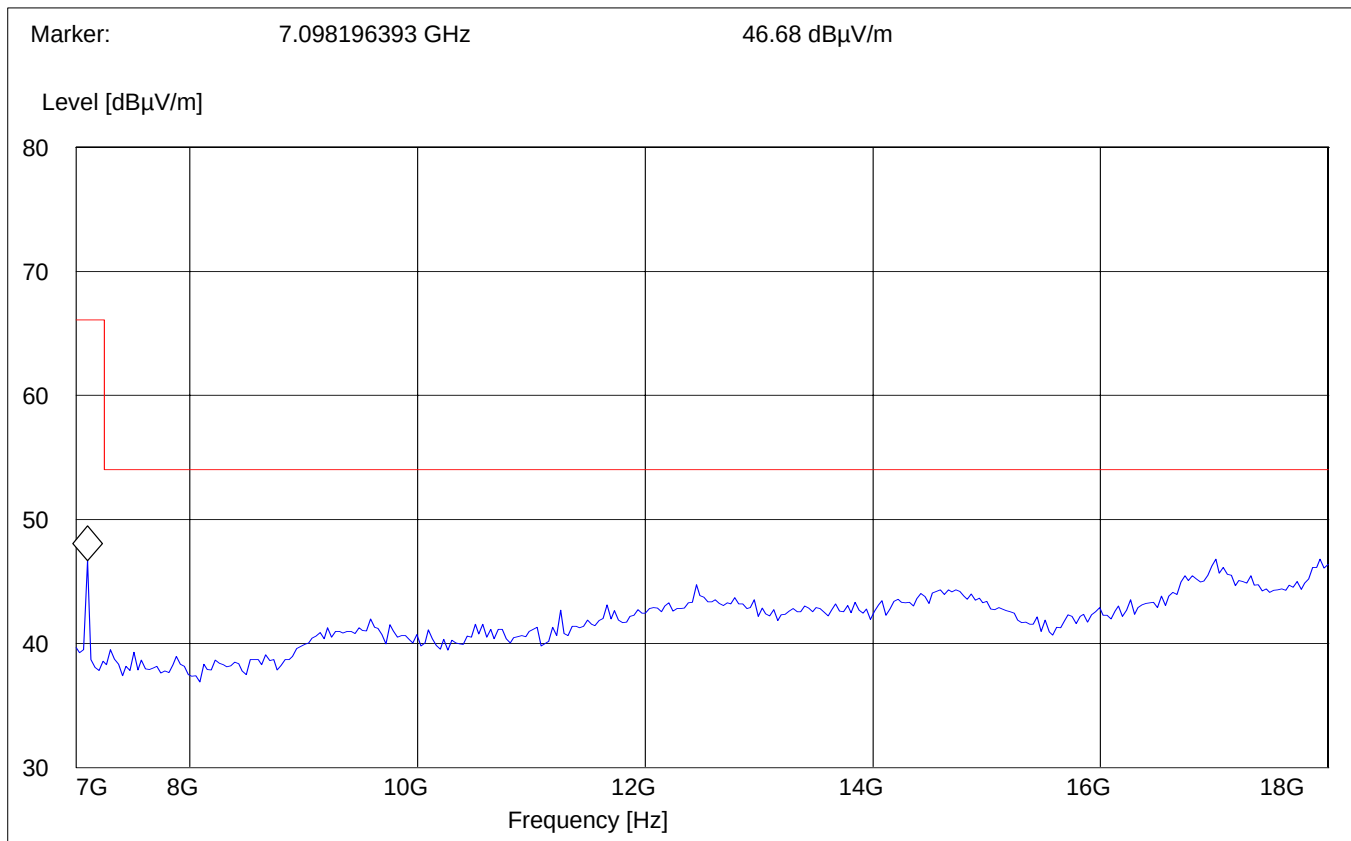

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.407 (b)(1)(2)(4)(6)

18GHz – 26.5GHz

(Data rate – 54Mbps)


Antenna: Horizontal

EUT plane: Horizontal with screen vertical @ 90°

Note: This plot is valid for low, mid, high channels (worst-case plot for all antenna types)

SWEEP TABLE: "FCC 15.407 18-26.5G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
18GHz	26.5 GHz	MaxPeak	Coupled	1MHz	3160-09 horn

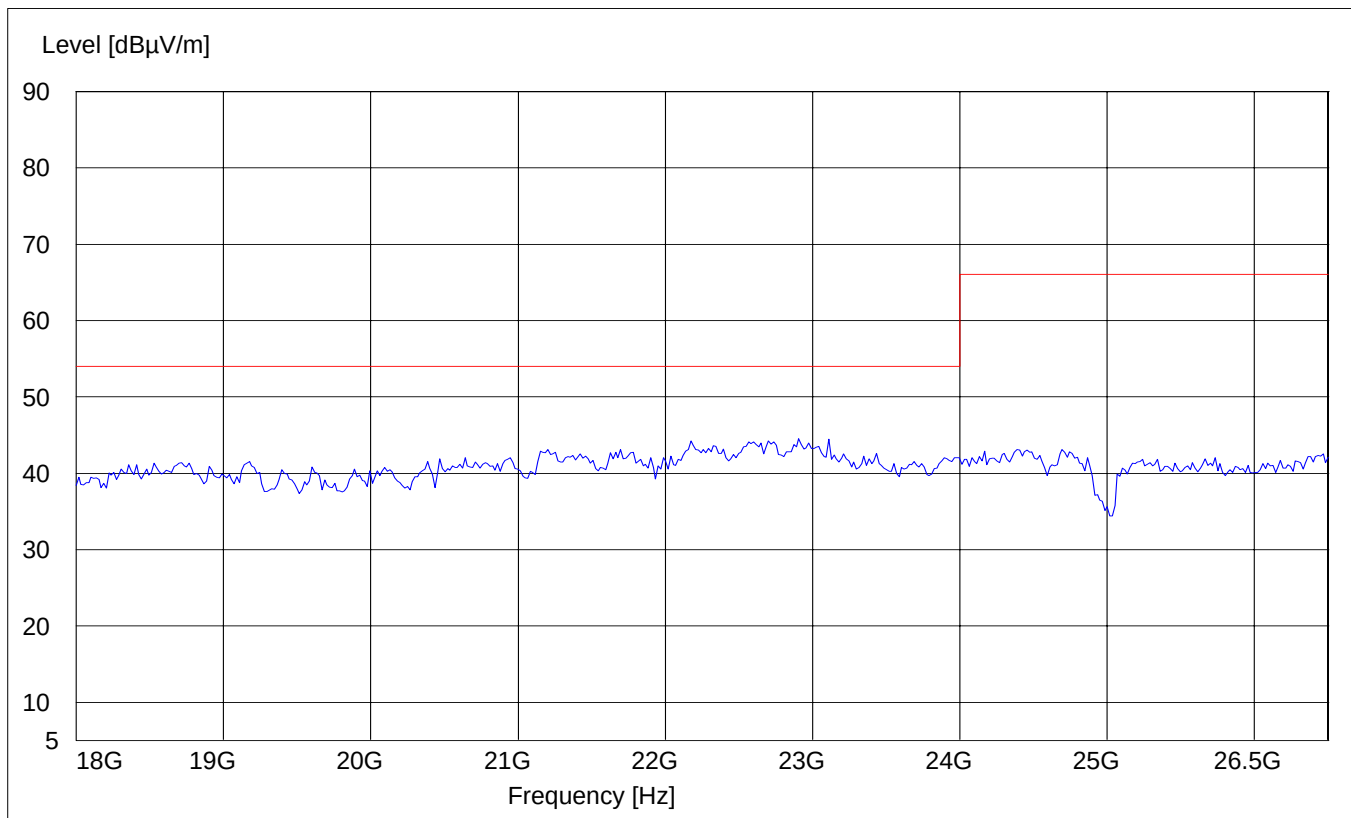

EMISSION LIMITATIONS - Radiated (Transmitter)

§ 15.407 (b)(1)(2)(4)(6)

26.5GHz – 40GHz

(Data rate – 54Mbps)


Antenna: Horizontal

EUT plane: Horizontal with screen vertical @ 90°

Note: This plot is valid for low, mid, high channels (worst-case plot for all antenna types)

SWEEP TABLE: "FCC 15.407 26.5-40G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
26.5GHz	40 GHz	MaxPeak	Coupled	1MHz	3160-10 horn

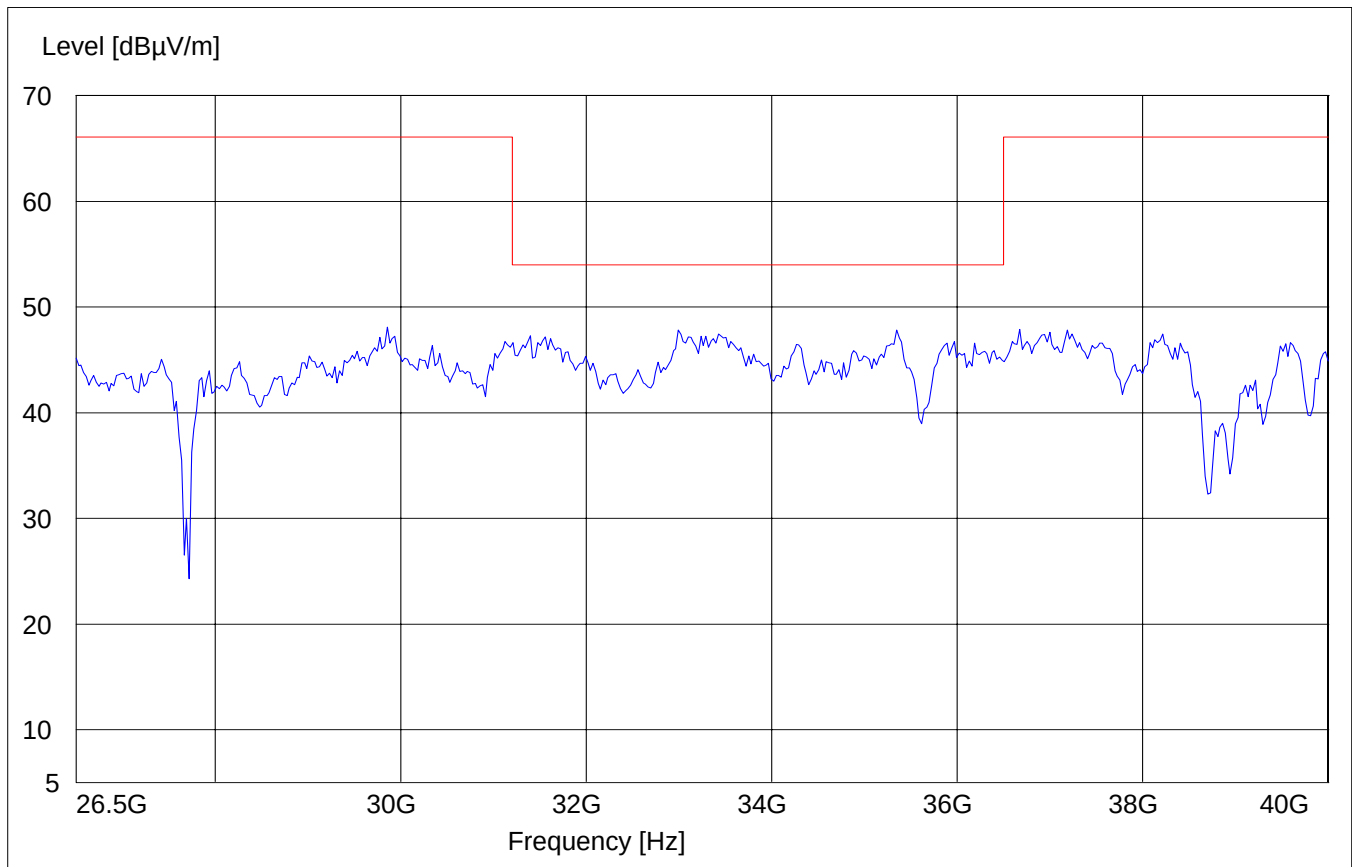

CONDUCTED EMISSIONS

§ 15.107/207

Measured with AC/DC power adapter

SWEEP TABLE: "55022 cond"

Short Description:		EN 55022 for 150KHz-30MHz			
Start	Stop	Detector	Meas	IF	Transducer
Frequency	Frequency		Time	Bandw.	
150.0 kHz	30.0 MHz	MaxPeak	Coupled	10 kHz	None

Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)


Limit

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

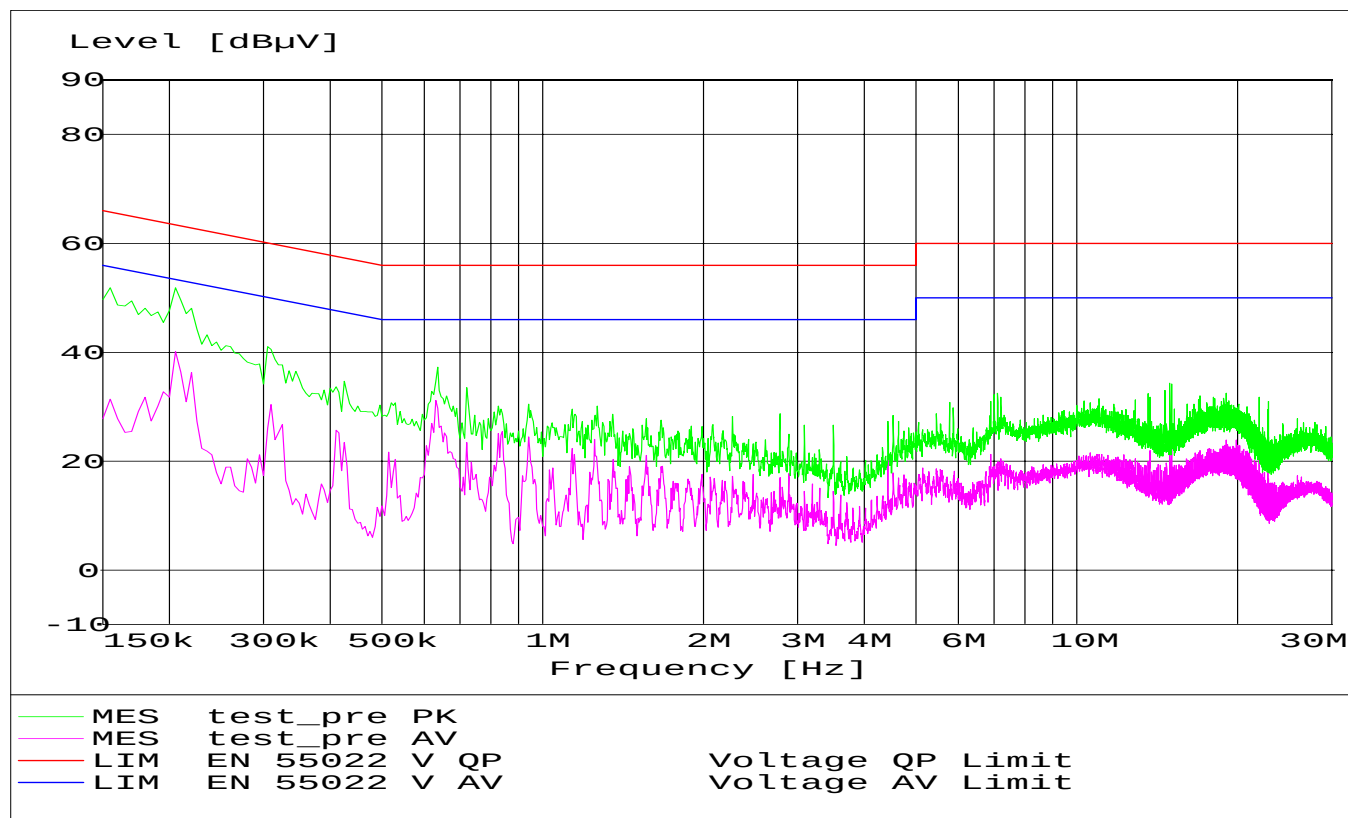

RECEIVER SPURIOUS RADIATION**§ 15.209****Limits**

Frequency (MHz)	Field strength (µV/m)	Measurement distance (m)
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
above 960	500	3

NOTE:

The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 40GHz very short cable connections to the antenna was used to minimize the noise level.

RECEIVER SPURIOUS RADIATION

§ 15.209

(Data rate – 54Mbps)

Antenna: Vertical


EUT plane: Horizontal

Note:

1. This plot is valid for low, mid, high channels (worst-case plot valid for all antennas)
2. All significant peaks were confirmed originating from test fixture, see next pages with test fixture tested alone with no WLAN card

SWEEP TABLE: "WLAN Spuri hi 30-1G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

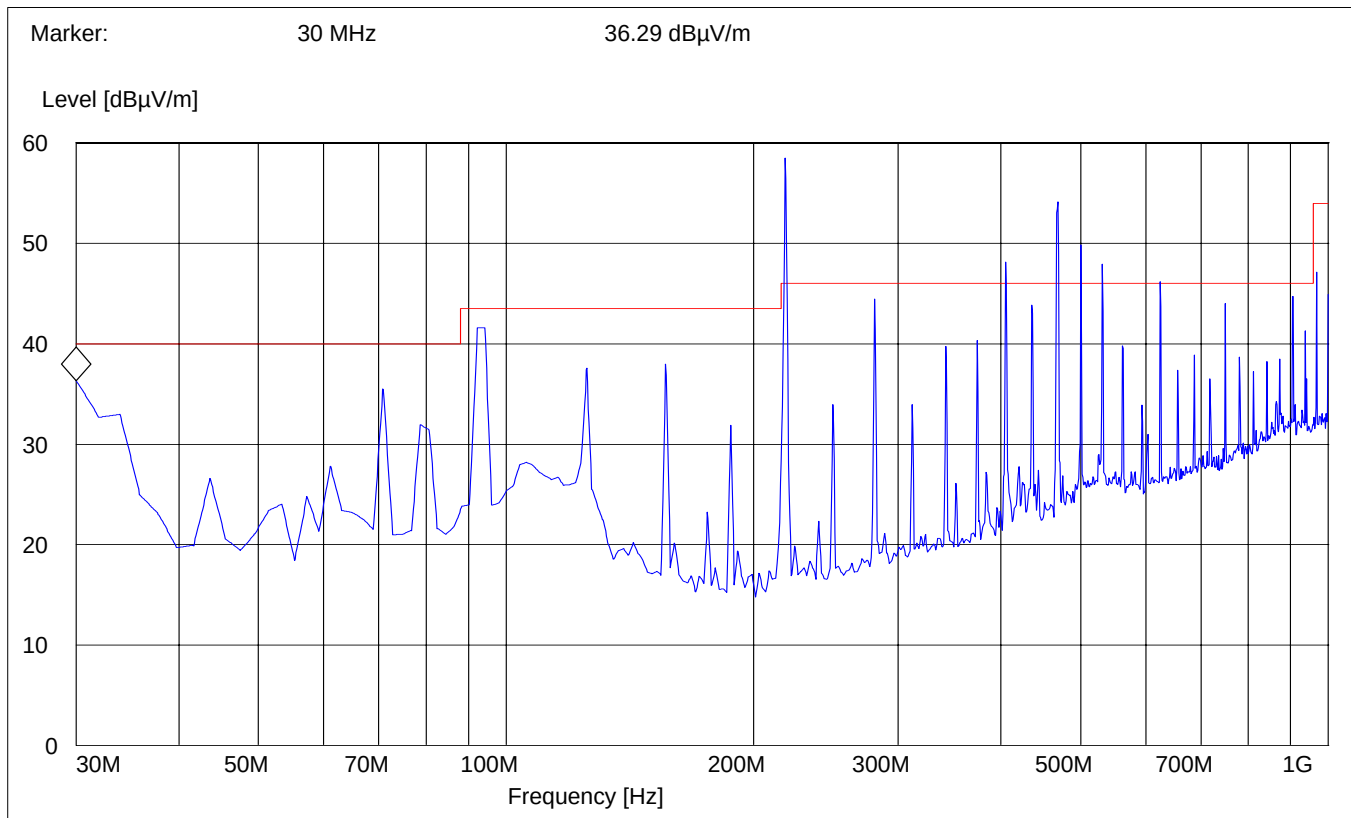

RECEIVER SPURIOUS RADIATION

§ 15.209


Antenna: vertical

EUT plane: Horizontal

Test Fixture only (no WLAN card)

SWEEP TABLE: "WLAN Spuri hi 30-1G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency		Time	VBW	
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186

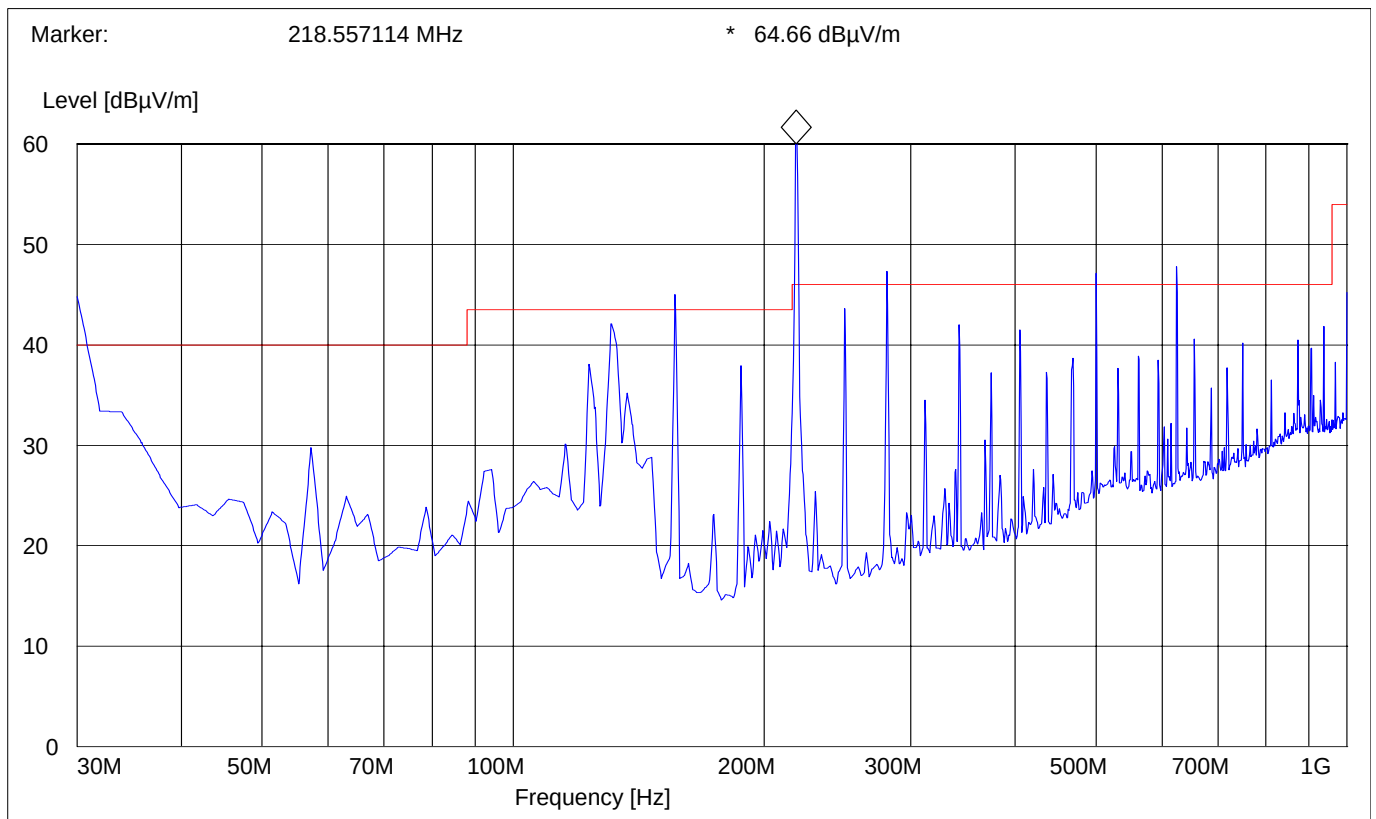


RECEIVER SPURIOUS RADIATION 1GHz – 7GHz

§ 15.209

Antenna: Horizontal
EUT plane: Horizontal with screen vertical @ 90°

SWEEP TABLE: "WLAN Spuri hi 1-7G"

Start	Stop	Detector	Meas.	RBW	VBW	Transducer
Frequency	Frequency	Time	Bandw.			
1.0 GHz	7.0 GHz	MaxPeak	Coupled	1 MHz	1MHz	#326 horn (dBi)

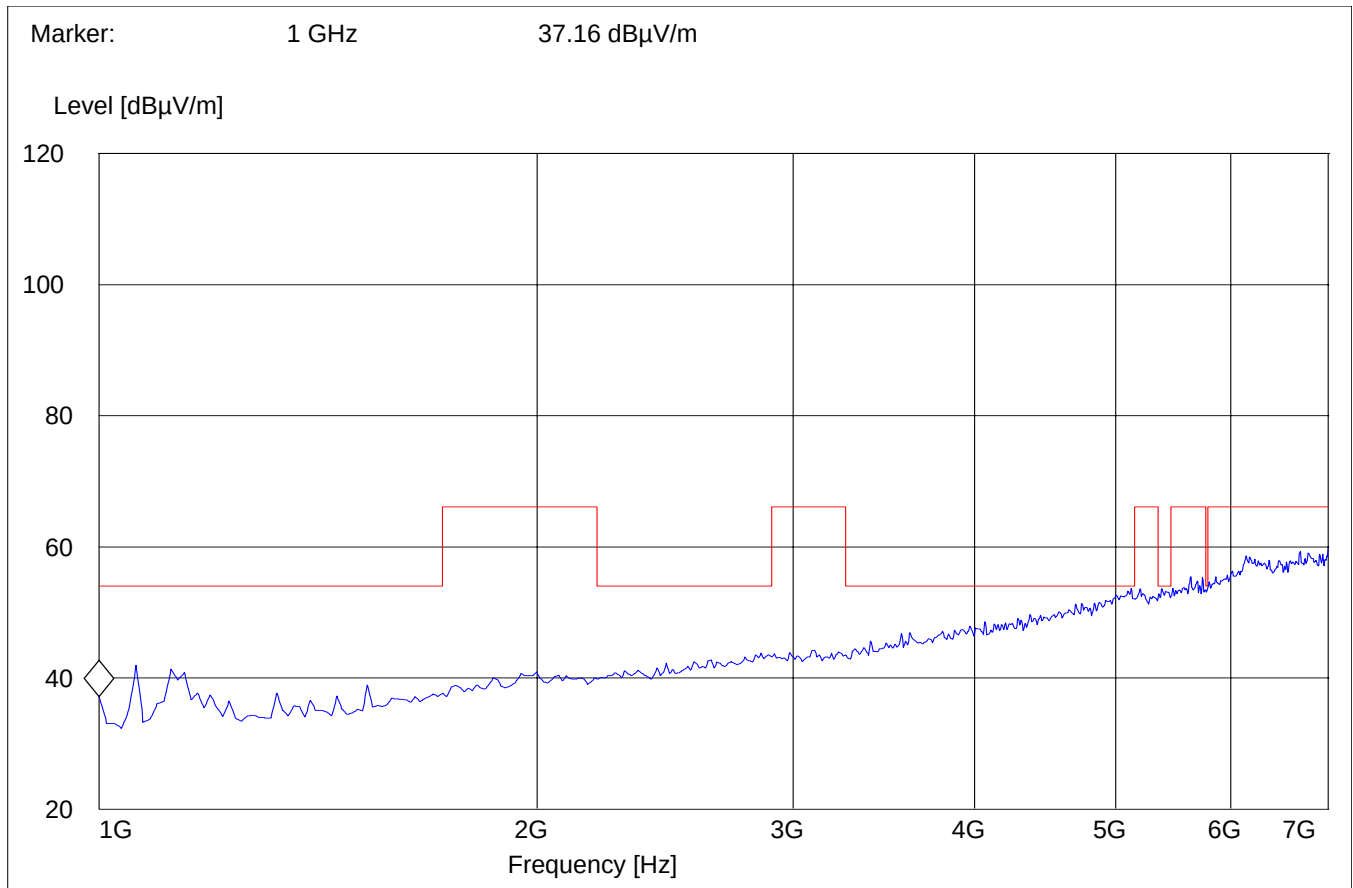


RECEIVER SPURIOUS RADIATION 7GHz – 18GHz

§ 15.209

Antenna: Horizontal
EUT plane: Horizontal with screen vertical @ 90°

SWEEP TABLE: "WLAN Spuri hi 7-18G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
7.0 GHz	18 GHz	MaxPeak	Coupled	1 MHz	#326 horn (dBi)

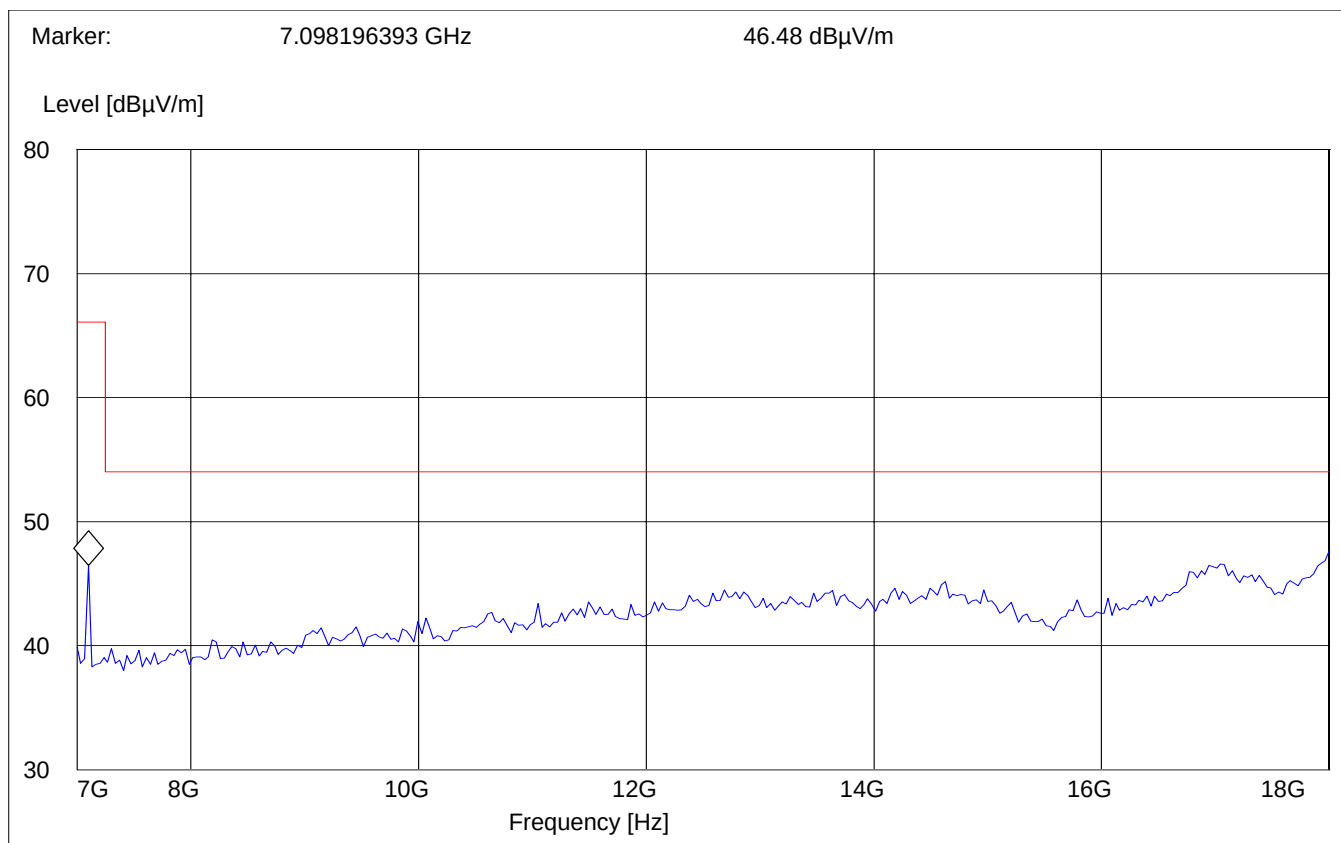


RECEIVER SPURIOUS RADIATION 18GHz – 26.5GHz

§ 15.209

Antenna: Horizontal
EUT plane: Horizontal with screen vertical @ 90°

SWEEP TABLE: "WLAN Spuri hi 18-26.5G"

Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
18 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	#141 horn (dBi)

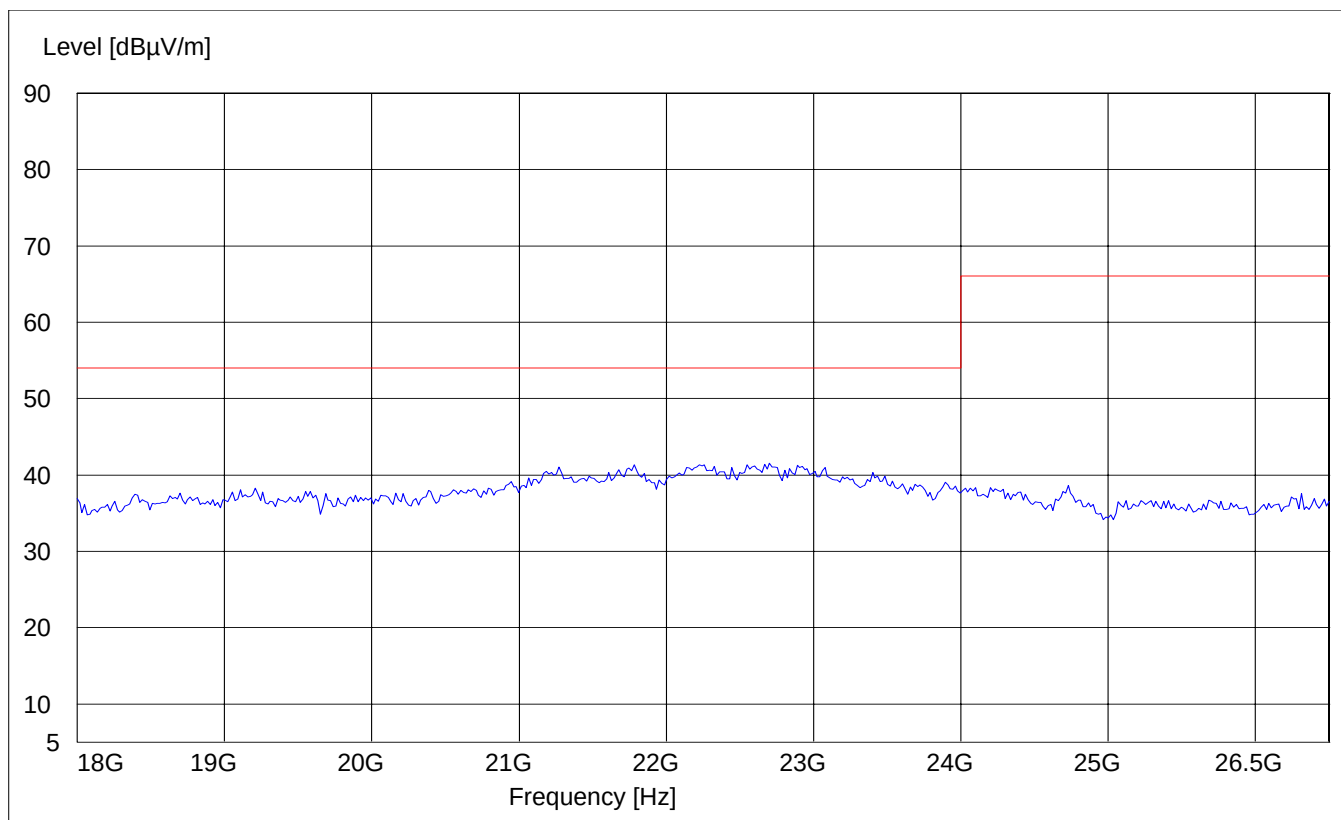


RECEIVER SPURIOUS RADIATION 26.5GHz – 40GHz

§ 15.209

Antenna: Horizontal
EUT plane: Horizontal with screen vertical @ 90°

SWEEP TABLE: "WLAN Spuri hi 26.5-40G"


Start	Stop	Detector	Meas.	RBW	Transducer
Frequency	Frequency	Time	Bandw.	VBW	
26.5 GHz	40 GHz	MaxPeak	Coupled	1 MHz	3160-10 horn

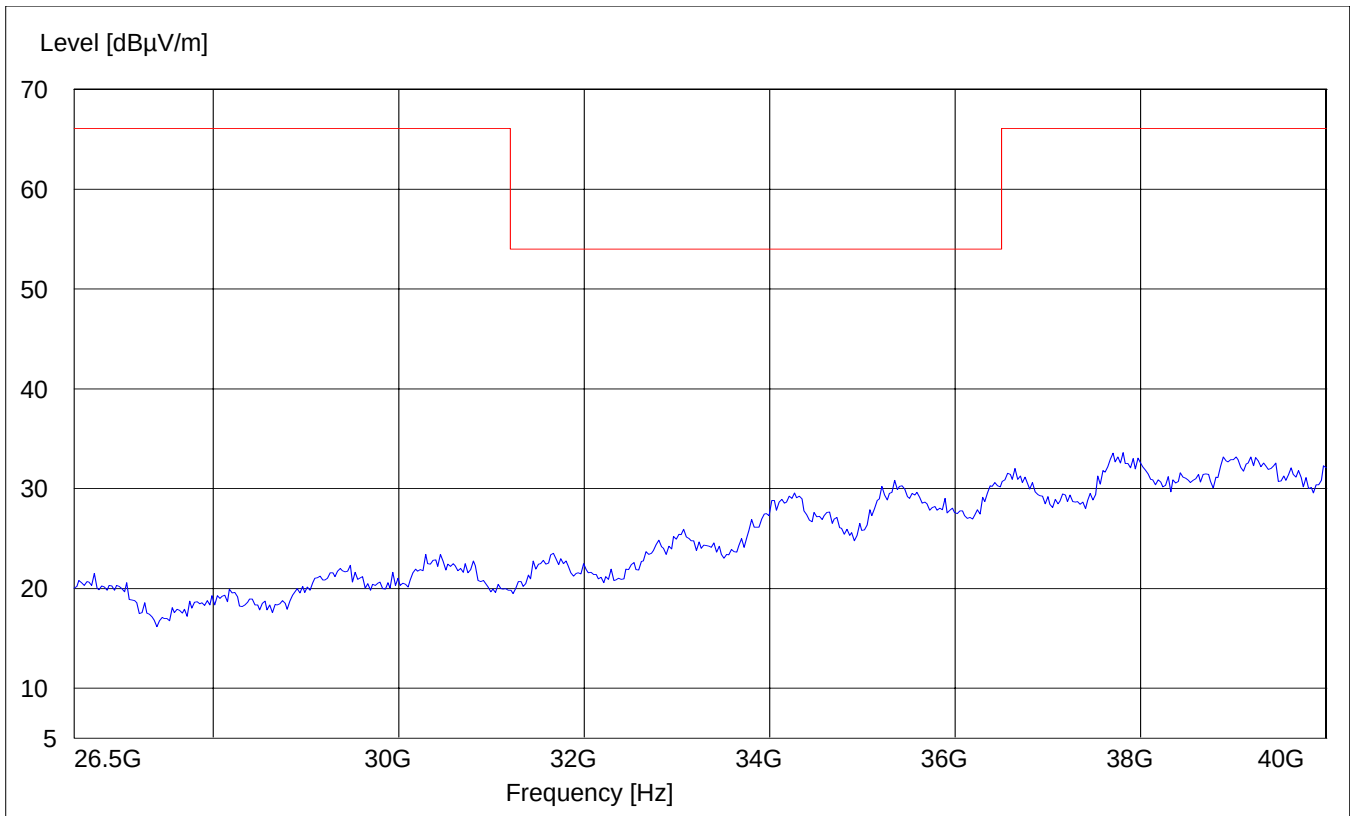

TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	826880/010
03	Biconilog Antenna	3141	EMCO	0005-1186
04	Horn Antenna (700M-18GHz)	SAS-200/571	AH Systems	325
05	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240
06	Horn Antenna (26.5-40GHz)	3160-10	EMCO	1156
07	2-3GHz Band reject filter	BRM50701	Microtronics	6
08	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02
09	Pre-Amplifier	TS-ANA	Rohde & Schwarz	--
10	Pre-Amplifier	JS4-00102600	Miteq	00616

BLOCK DIAGRAMS
Conducted Testing

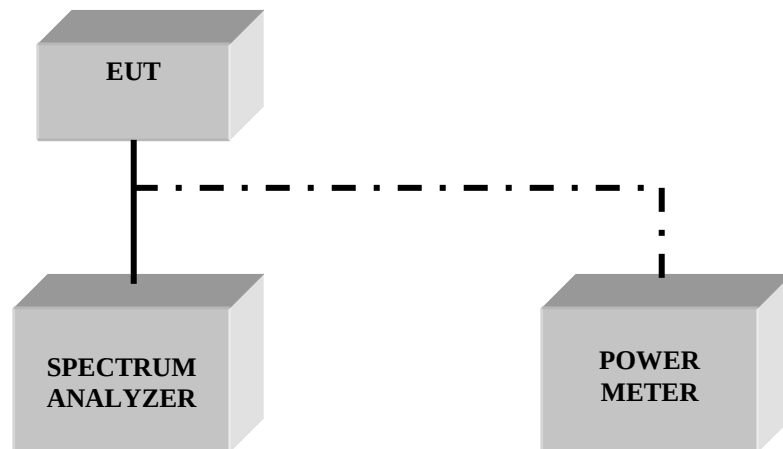

Radiated Testing

ANECHOIC CHAMBER

