




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/10/2005 4:27:12 PM	DUT Battery Model/No:	
Filename:	tab_main6lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom	Relative Permittivity:	50.99
Relative Humidity:	50%	Conductivity:	1.904
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	26.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-149.00 mm
Antenna Configuration:	Main normal configuration	Max E Field:	6.50 V/m
Test Frequency:	2437 1Mb/SMHz	SAR 1g:	0.062 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.034 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.012 W/kg
Type of Modulation:		SAR End:	0.012 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

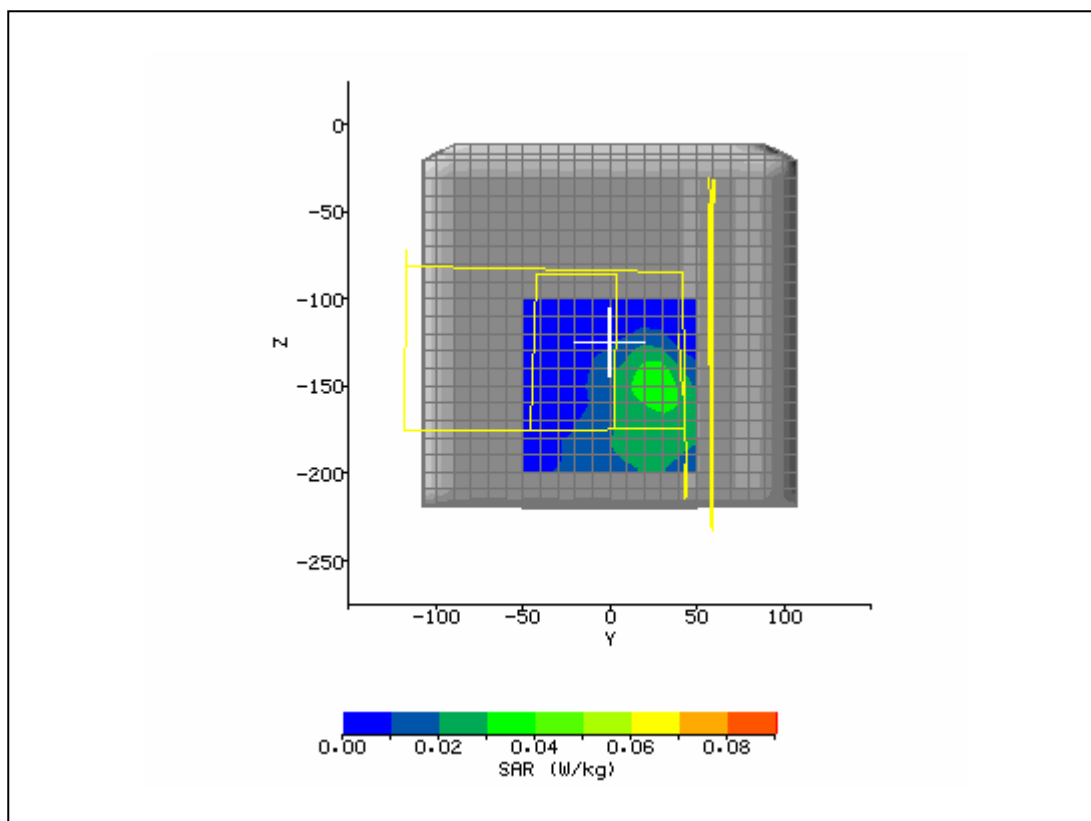


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/10/2005 3:50:25 PM	DUT Battery Model/No:	
Filename:	tab_main6lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom	Relative Permittivity:	50.99
Relative Humidity:	50%	Conductivity:	1.904
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-41.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-154.00 mm
Antenna Configuration:	Main tablet configuration	Max E Field:	6.36 V/m
Test Frequency:	2437 1Mb/SMHz	SAR 1g:	0.060 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.032 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.019 W/kg
Type of Modulation:		SAR End:	0.019 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

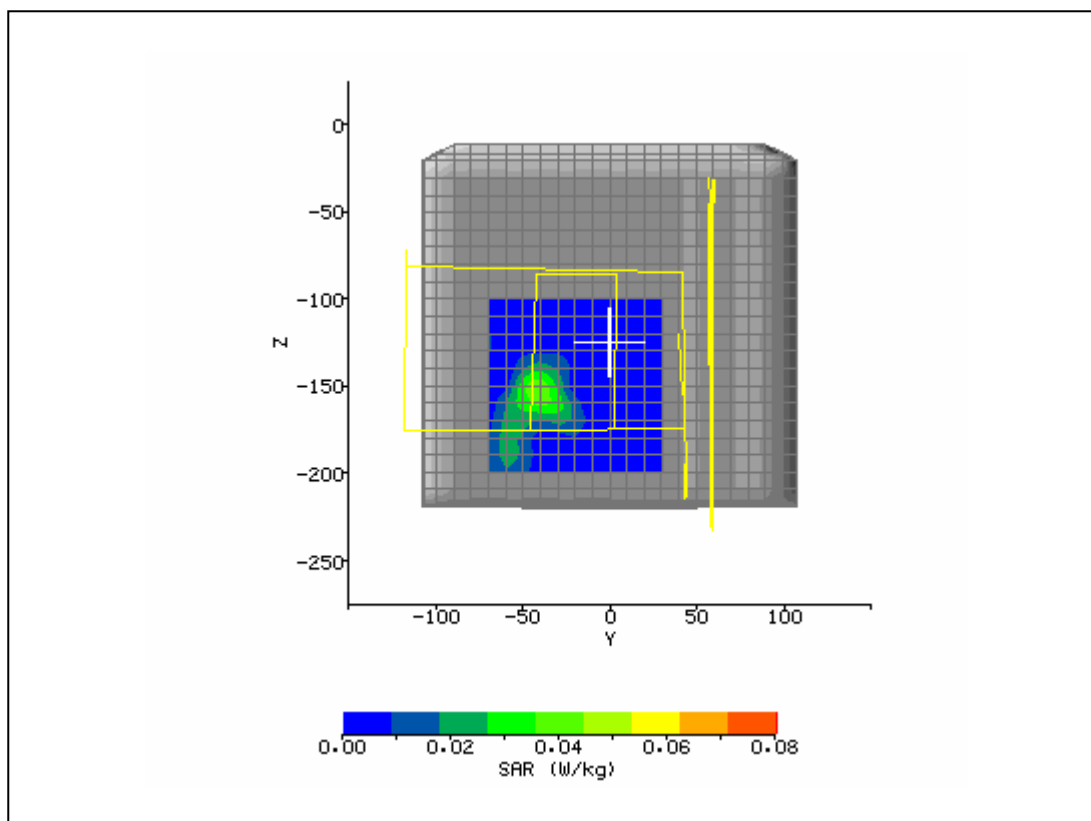


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/10/2005 11:22:08 AM	DUT Battery Model/No:	
Filename:	tab_aux6lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom	Relative Permittivity:	50.99
Relative Humidity:	50%	Conductivity:	1.904
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-4.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-184.00 mm
Antenna Configuration:	Aux tablet configuration	Max E Field:	7.92 V/m
Test Frequency:	2437.6 Mb/SMHz	SAR 1g:	0.094 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.050 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.027 W/kg
Type of Modulation:		SAR End:	0.027 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

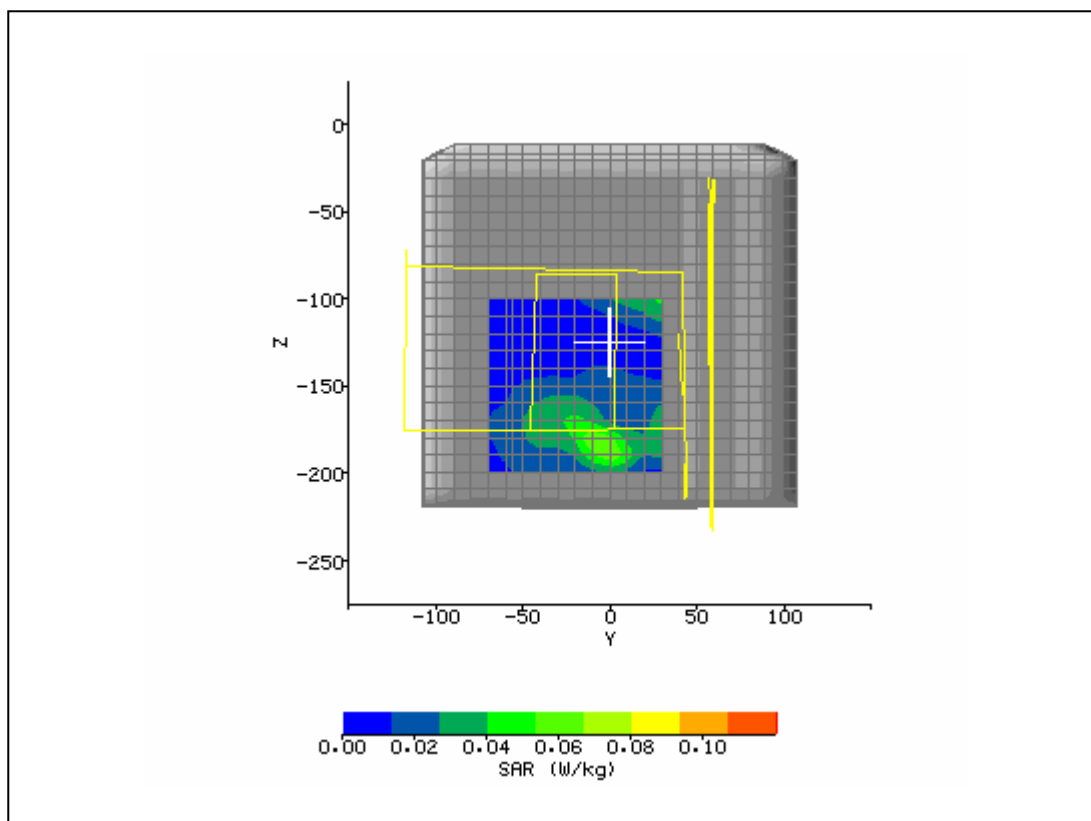

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/10/2005 12:24:06 PM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom	Relative Permittivity:	50.99
Relative Humidity:	50%	Conductivity:	1.862
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-1.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-184.00 mm
Antenna Configuration:	Aux tablet configuration	Max E Field:	8.11 V/m
Test Frequency:	2412 1Mb/SMHz	SAR 1g:	0.094 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.047 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.023 W/kg
Type of Modulation:		SAR End:	0.023 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

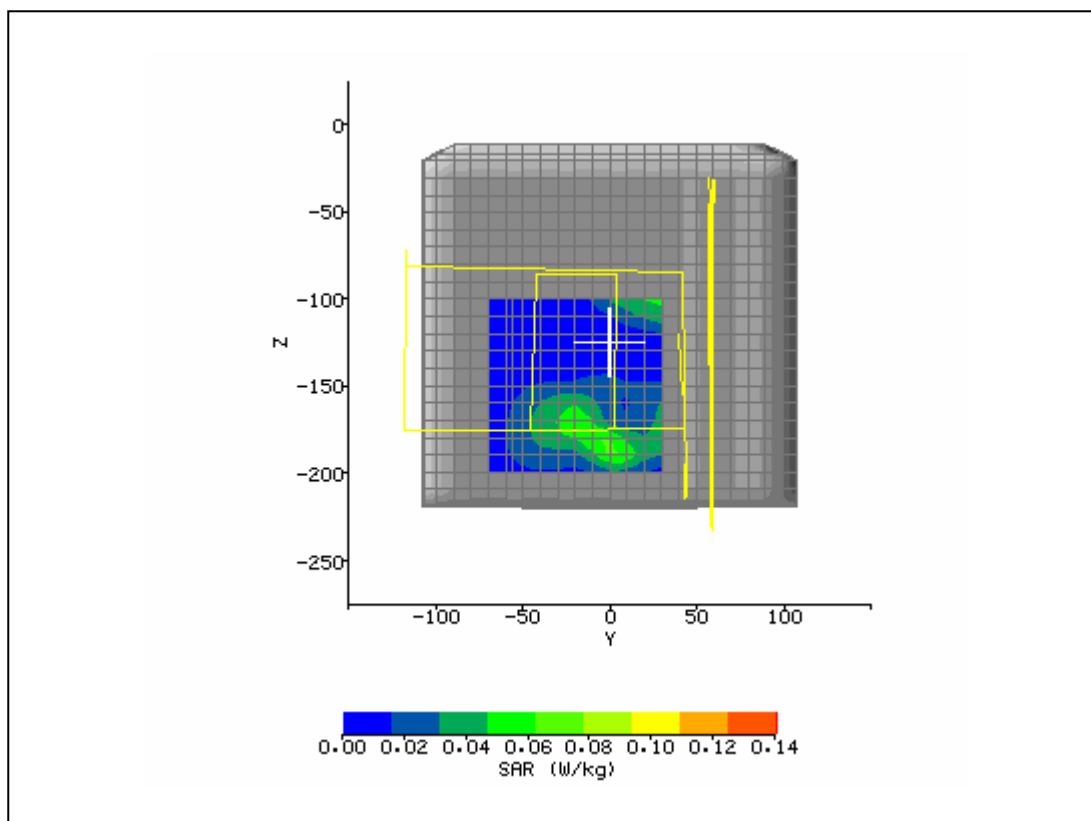

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/10/2005 1:08:17 PM	DUT Battery Model/No:	
Filename:	tab_aux1lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom	Relative Permittivity:	51.01
Relative Humidity:	50%	Conductivity:	1.941
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-32.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-180.00 mm
Antenna Configuration:	Aux tablet configuration	Max E Field:	7.43 V/m
Test Frequency:	2462 1Mb/SMHz	SAR 1g:	0.075 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.036 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.015 W/kg
Type of Modulation:		SAR End:	0.015 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.17 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

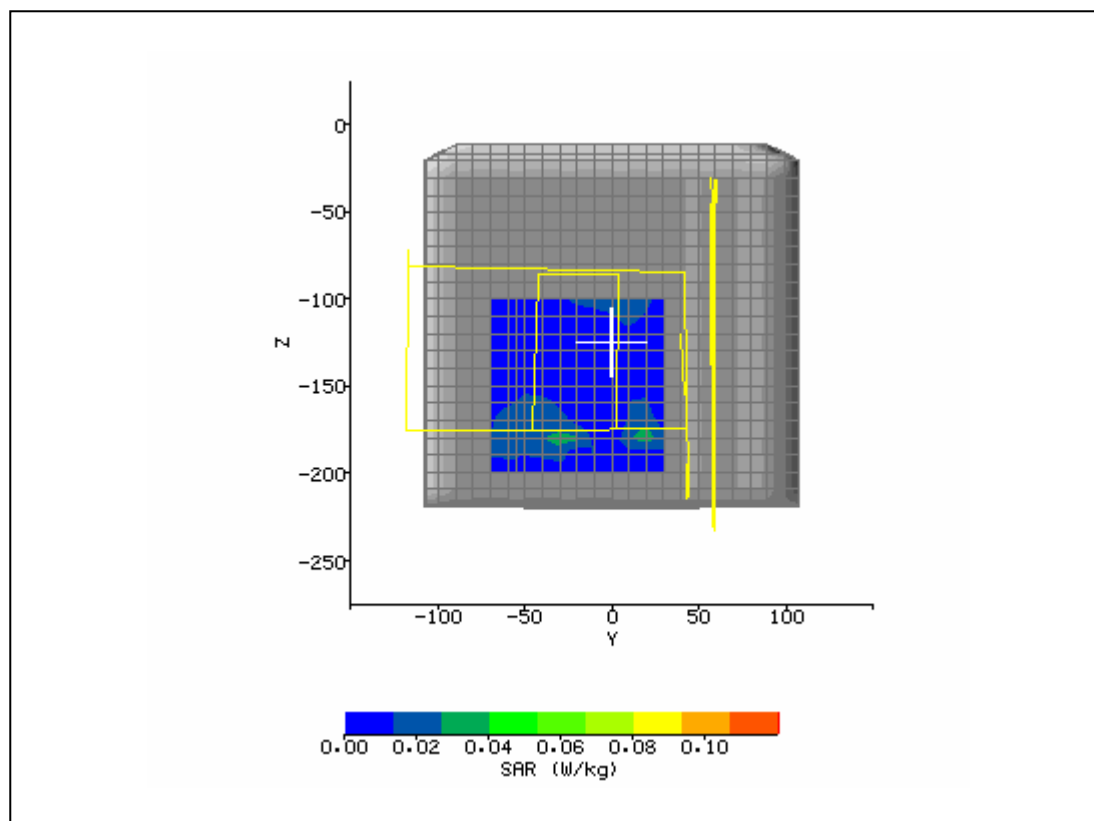

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	6/13/2005 10:11:42 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom	Relative Permittivity:	50.99
Relative Humidity:	50%	Conductivity:	1.961
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	14.00 mm
DUT Position:	Lap	Max SAR Z-axis Location:	-182.00 mm
Antenna Configuration:	Aux tablet configuration	Max E Field:	3.93 V/m
Test Frequency:	2462 1Mb/SMHz	SAR 1g:	0.022 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.010 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.003 W/kg
Type of Modulation:		SAR End:	0.003 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.97 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	5/27/05
Input Power Level:	max	Extrapolation:	poly4

