



**FCC CFR47 PART 15 SUBPART C
CERTIFICATION**

TEST REPORT

FOR

BROADCOM 802.11ag WIRELESS LAN PCI-E MINI CARD

MODEL NUMBER: BCM94311MCAG

FCC ID: QDS-BRCM1019

REPORT NUMBER: 05U3487-1B

ISSUE DATE: AUGUST 2, 2005

Prepared for
BOARDCOM CORP.
190 MATHILDA PLACE
SUNNYVALE, CA 94086, USA

Prepared by
COMPLIANCE ENGINEERING SERVICES, INC.
d.b.a.
COMPLIANCE CERTIFICATION SERVICES
561F MONTEREY ROAD,
MORGAN HILL, CA 95037, USA
TEL: (408) 463-0885
FAX: (408) 463-0888

NVLAP[®]
LAB CODE:200065-0

Revision History

Rev.	Revisions	Revised By
A	Initial Issue	Thu
B	Added data for PPSD measurement under sections 8.1.6 and 8.2.6 Indicated power settings for each channel under sections 8.1.6 and 8.2.6 Revised MPE calculations under sections 8.1.4 and 8.2.4 Corrected a typo on page 36	Thu Thu Thu Thu

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. CROSS REFERENCE TO OTHER REPORTS ON THIS PRODUCT	6
4. FACILITIES AND ACCREDITATION	6
5. CALIBRATION AND UNCERTAINTY.....	6
5.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	<i>6</i>
5.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
6. EQUIPMENT UNDER TEST.....	7
6.1. <i>DESCRIPTION OF EUT</i>	<i>7</i>
6.2. <i>MODIFICATION</i>	<i>7</i>
6.3. <i>MAXIMUM OUTPUT POWER</i>	<i>7</i>
6.4. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	<i>8</i>
6.5. <i>SOFTWARE AND FIRMWARE</i>	<i>8</i>
6.6. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	<i>8</i>
6.7. <i>DESCRIPTION OF TEST SETUP</i>	<i>10</i>
7. TEST AND MEASUREMENT EQUIPMENT	12
8. LIMIT AN TEST RESULTS	13
8.1. <i>CHANNEL TESTS FOR 2400 – 2483.5 MHz BAND.....</i>	<i>13</i>
8.1.1. <i>6 dB BANDWIDTH</i>	<i>13</i>
8.1.2. <i>99% BANDWIDTH.....</i>	<i>20</i>
8.1.3. <i>PEAK OUTPUT POWER</i>	<i>27</i>
8.1.4. <i>MAXIMUM PERMISSIBLE EXPOSURE.....</i>	<i>39</i>
8.1.5. <i>AVERAGE POWER.....</i>	<i>43</i>
8.1.6. <i>PEAK POWER SPECTRAL DENSITY</i>	<i>44</i>
8.1.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>55</i>
8.2. <i>CHANNEL TESTS FOR THE 5725 TO 5850 MHz BAND</i>	<i>68</i>
8.2.1. <i>6 dB BANDWIDTH</i>	<i>68</i>
8.2.2. <i>99% BANDWIDTH.....</i>	<i>72</i>
8.2.3. <i>PEAK OUTPUT POWER</i>	<i>76</i>
8.2.4. <i>MAXIMUM PERMISSIBLE EXPOSURE.....</i>	<i>81</i>
8.2.5. <i>AVERAGE POWER.....</i>	<i>84</i>
8.2.6. <i>PEAK POWER SPECTRAL DENSITY</i>	<i>85</i>
8.2.7. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>89</i>
8.3. <i>RADIATED EMISSIONS.....</i>	<i>96</i>
8.3.1. <i>TRANSMITTER RADIATED SPURIOUS EMISSIONS</i>	<i>96</i>

8.3.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND_b Mode.....	99
8.3.3. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND_g Mode.....	112
8.3.4. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND_a Mode.....	133
8.3.5. TRANSMITTER BELOW 1 GHz FOR 2400 TO 2483.5 MHz BAND_b Mode	134
8.3.6. TRANSMITTER BELOW 1 GHz FOR 2400 TO 2483.5 MHz BAND_g Mode	138
8.3.7. TRANSMITTER BELOW 1 GHz FOR 5725 TO 5850 MHz BAND_a Mode	142
8.4. POWERLINE CONDUCTED EMISSIONS	146
9. SETUP PHOTOS	150

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Broadcom Corp.
190 Mathilda Place
Sunnyvale, CA 94086, USA

EUT DESCRIPTION: Broadcom 802.11ag Wireless LAN PCI-E Mini Card

MODEL: BCM94311MCAG

SERIAL NUMBER: 191

DATE OF ORIGINAL TESTS: June 10 to June 20, 2005

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART C	NO NON-COMPLIANCE NOTED

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Note: The 802.11ag DTS Band is applicable to this report; another 5.2 GHz UNII band of operation is in separate report.

Approved & Released For CCS By:



THU CHAN
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES

Tested By:



VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2 and FCC CFR 47 Part 15.

3. CROSS REFERENCE TO OTHER REPORTS ON THIS PRODUCT

Other FCC reports applicable to this product include CCS 05U3487-3.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 561F Monterey Road, Morgan Hill, California, USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

5. CALIBRATION AND UNCERTAINTY

5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

5.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

6. EQUIPMENT UNDER TEST

6.1. DESCRIPTION OF EUT

The EUT is an 802.11a/b/g transceiver module, operating in the DTS 2400-2483.5 MHz and DTS 5725-5850MHz.

The radio module is manufactured by Broadcom Corp.

6.2. MODIFICATION

No modification was made during the testing.

6.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

2400 to 2483.5 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2472	802.11b	21.80	151.36
2412 - 2472	802.11g	26.36	432.51

5725 to 5850 MHz Authorized Band

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
5745 - 5825	802.11a	23.67	232.81

6.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes two PIFA Stamped type metal antennas, supplied by WNC and Hitachi Cable, Ltd. The testing was performed with WNC antenna at 2.4 GHz band and Hitachi Cable, Ltd. antenna at 5 GHz bands both represents the worst-case configuration for each band.

The two antennas have maximum gains as follows:

- WNC antenna: 3.24 dBi at 2.4GHz band
- Hitachi Cable, Ltd. antenna: 5.7 dBi at 5GHz bands.

6.5. SOFTWARE AND FIRMWARE

The EUT driver software installed in the host support equipment during testing was BCM94311, version. 3.100.53.0

The test utility software used during testing was wl_tools.

6.6. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power. The highest measured output powers were at 2437 MHz for 11b mode, 2437 MHz for 11g mode and 5825 MHz for 11a.

The worst-case data rate for these channels are determined to be 1 Mb/s for 11b mode, 6 Mb/s for 11g mode, and 6 Mb/s for 11a mode based on previous experience with WLAN product design architectures.

WORST-CASE POWER AND BIT RATE SETTING

802.11b				
CHANNEL	1	6	11	13
(MHz)	2412	2437	2462	2472
Band Edge				
(dBm)	19	x	19	10
Emission				
(dBm)	19	19	x	19*
Peak Power / PSD				
(dBm)	19	19	19	10
Bit Rate				
(Mbps)	11 Mbps for Peak reading & 1 Mbps for Average reading			
* NOTE:		For the rest of the RF Conducted and Radiated Emission tests, channel 13 is set to 19dBm for worst case power to cover all high channels_Channel 11 (19dBm) & Channel 13 (10dBm).		

802.11g						
CHANNEL	1	2	6	10	11	13
(MHz)	2412	2417	2437	2457	2462	2472
Band Edge						
(dBm)	18	19	X	19	17	11
Emission						
(dBm)	19	X	19	X	X	19*
Peak Power / PSD						
(dBm)	18	19	19	19	17	11
Bit Rate						
(Mbps)	54 Mbps for Peak reading & 6 Mbps for Average reading					
*NOTE:	For the rest of the RF Conducted and Radiated Emission tests, channel 13 is set to 19dBm for worst case power to cover all high channels_Channel 10 (19dBm), Channel 11 (17dBm) & Channel 13 (11dBm)					

802.11a - 5.8 GHz			
CHANNEL	149	157	165
(MHz)	5745	5785	5825
Band Edge			
(dBm)	17	17	17
Emission			
(dBm)	17	17	17
Peak Power / PSD			
(dBm)	17	17	17
Bit Rate			
(Mbps)	54 Mbps for Peak reading & 6 Mbps for Average reading		
	Powers are the same for both Band Edge & Emission		

6.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	HP	Pavilion dv4030us	CNE52005T6	DoC
AC Adapter	HP	PPP0009S	CT 57BC30AU4R00L0	DoC
Extended Card	ADEXELEC	PEX1-MINI	01/01/1900	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC Power	1	AC power	Unshielded	1.5 m	N/A
2	DC Power	1	DC Power	Unshielded	1.5 m	N/A

TEST SETUP

The EUT is installed in a host laptop computer via a card bus-to-mini PCI adapter / extension board during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

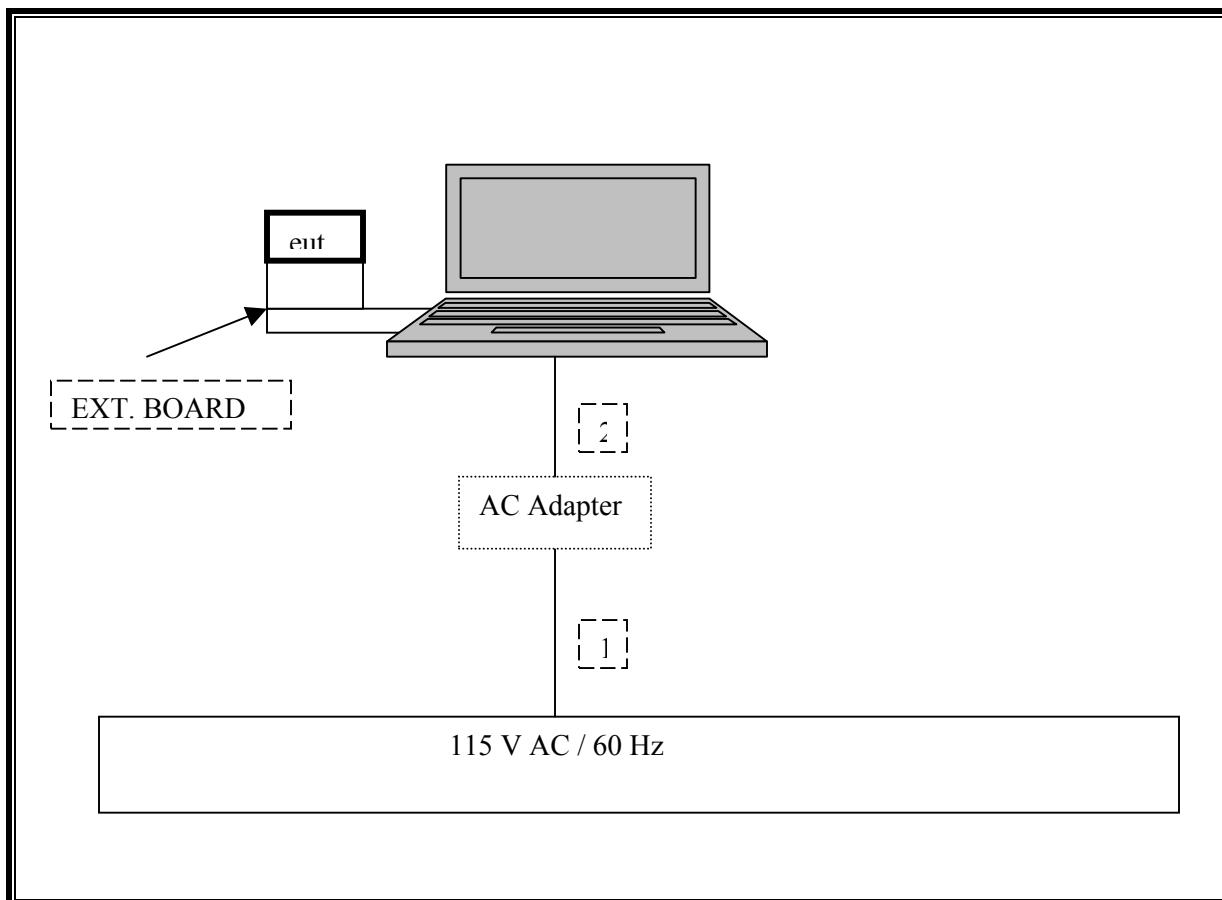

7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	Cal Due
EMI Test Receiver	R & S	ESHS 20	827129/006	10/22/2005
Site A Line Stabilizer / Conditioner	Tripplite	LC-1800a	A0051681	CNR
LISN, 10 kHz ~ 30 MHz	FCC	LISN-50/250-25-2	2023	08/30/2005
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	8379443	10/21/2005
Spectrum Analyzer	HP	E4446A	US42510266	08/25/2005
Antenna, Horn 1 ~ 18 GHz	EMCO	3117	29310	09/12/2005
Antenna, Horn 18 ~ 26 GHz	ARA	SWH-28	1007	06/02/2006
Antenna, Horn 26 ~ 40 GHz	ARA	MWH-2640/B	1029	12/03/2005
Preamplifier, 1 ~ 26.5 GHz	HP	8449B	3008A00369	08/17/2005
PreAmplifier 26-40 GHz	MITEQ	NSP4000-SP2	924343	06/01/2006
Peak Power Meter	Agilent	E4416A	GB41291160	11/07/2005
Peak / Average Power Sensor	Agilent	E9327A	US40440755	11/07/2005
RF Filter Section	HP	85420E	3705A00256	11/21/2005
EMI Receiver, 9 kHz ~ 2.9 GHz	HP	8542E	3942A00286	11/21/2005
Bilog Antenna 30MHz---- 2Ghz	Sunol Sciences	JB1 Antenna	A121003	12/22/2005
4.0 GHz High Pass Filter	Micro Tronics	HPM13351	3	N/A
2.4 - 2.5 Reject Filter	Micro Tronics	BRM50702	3	N/A
7.6 GHz High Pass Filter	Micro Tronics	HPM13350	1	N/A
5.75 - 5.8 Reject Filter	Micro Tronics	BRC13192	2	N/A

8. LIMIT AND TEST RESULTS

8.1. CHANNEL TESTS FOR 2400 – 2483.5 MHz BAND

8.1.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS


No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	10670	500	10170
Middle	2437	11080	500	10580
High	2472	10750	500	10250

802.11g Mode


Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	2412	16500	500	16000
Middle	2437	16500	500	16000
High	2472	16500	500	16000

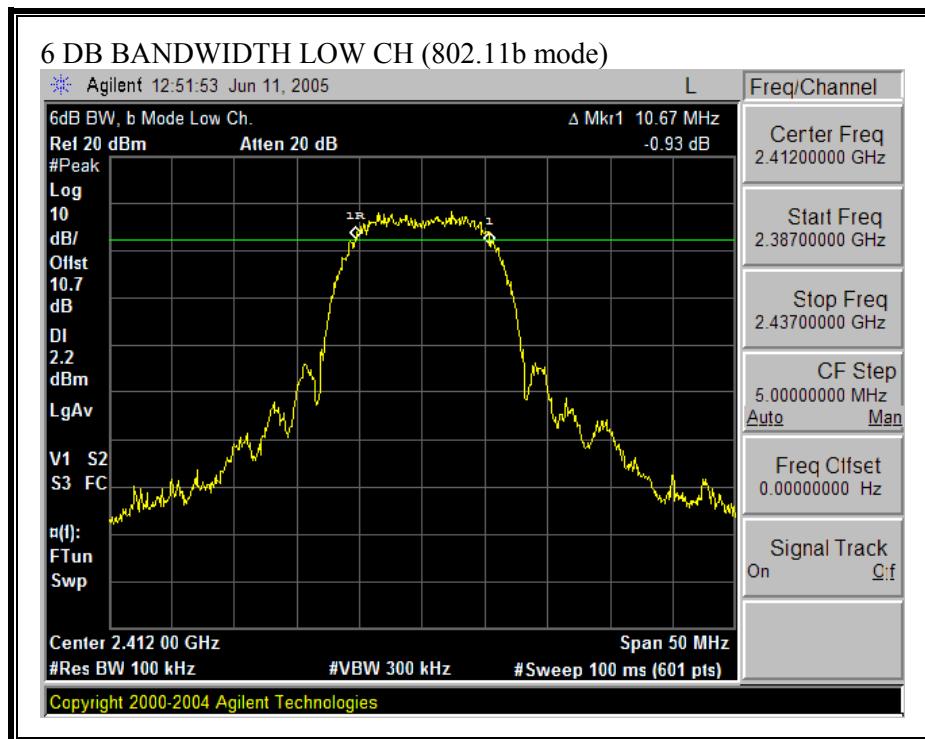
6 DB BANDWIDTH (802.11b MODE)

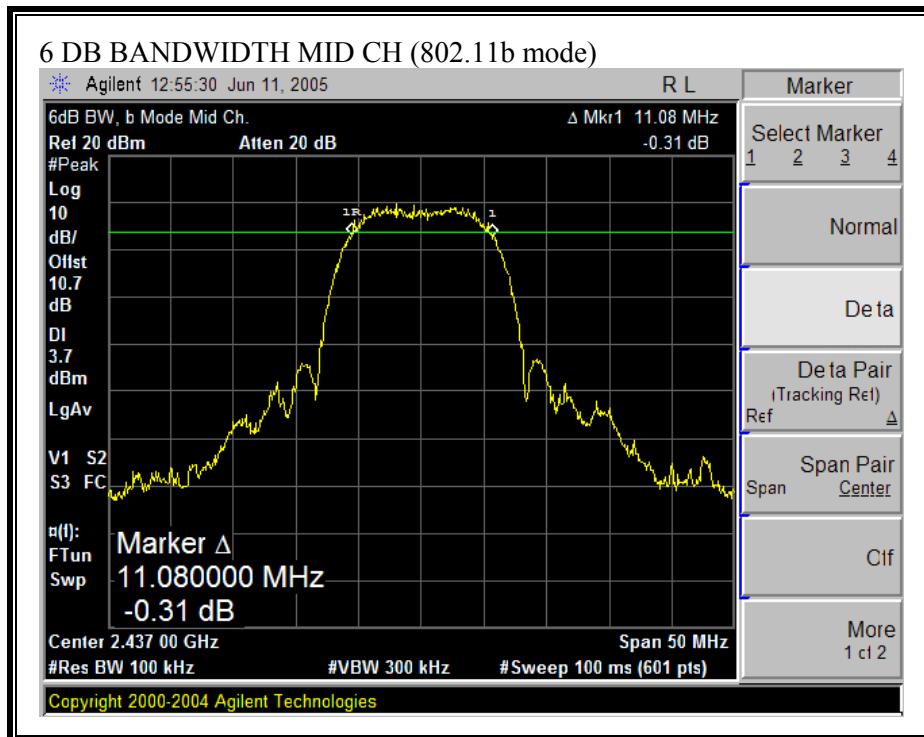


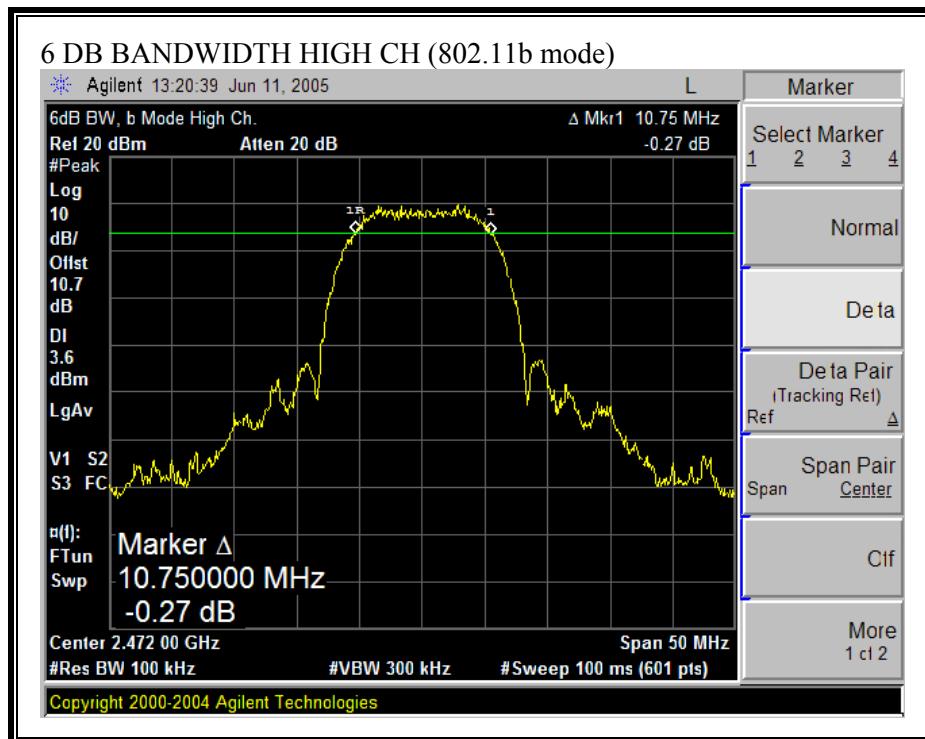

6 DB BANDWIDTH (802.11g MODE)

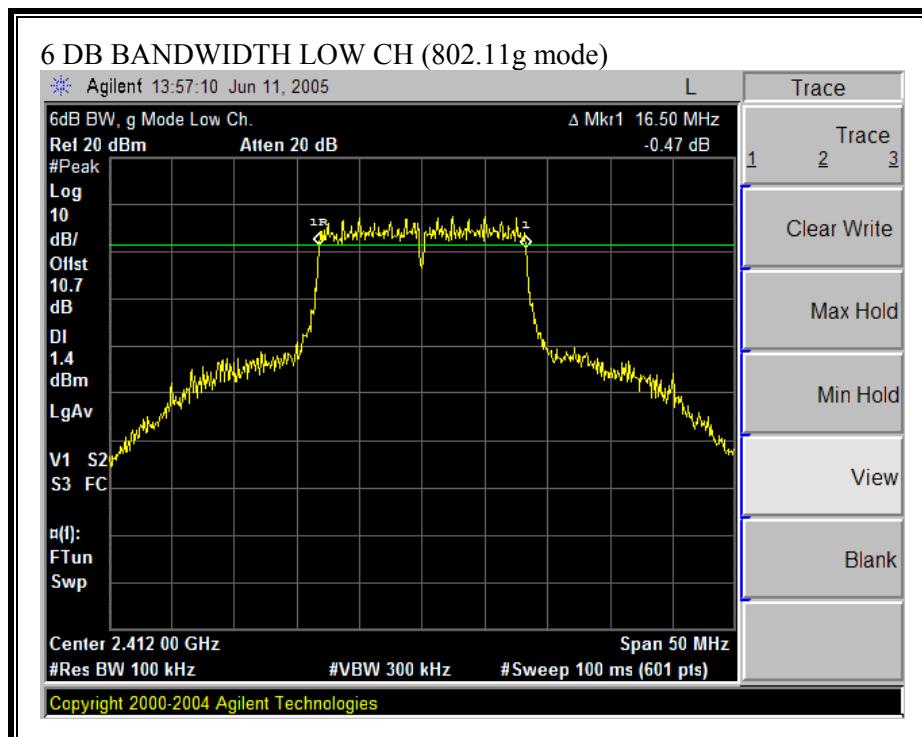

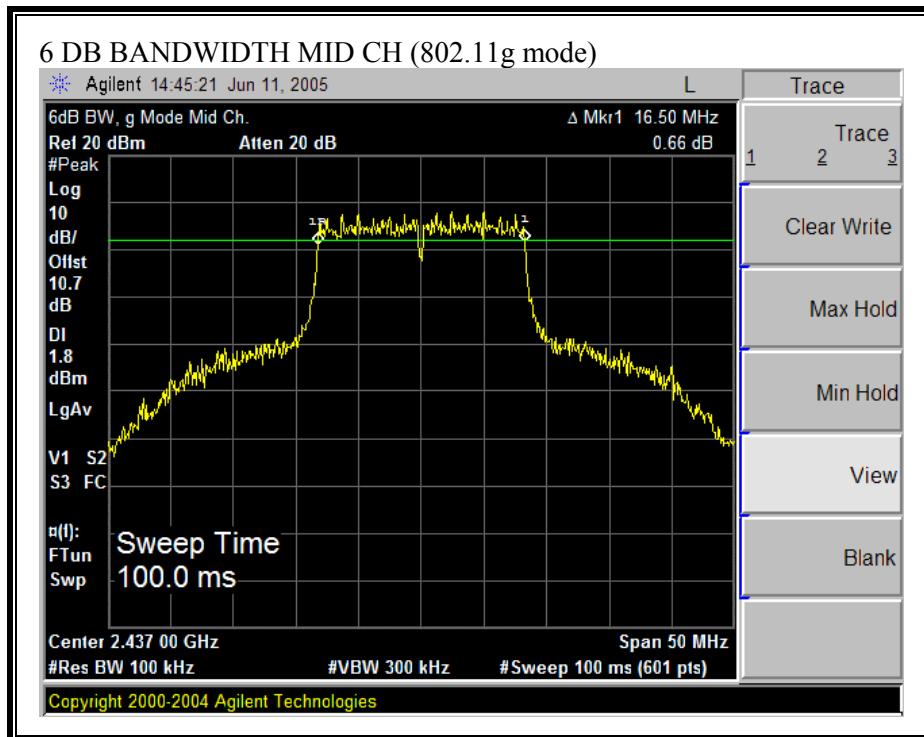

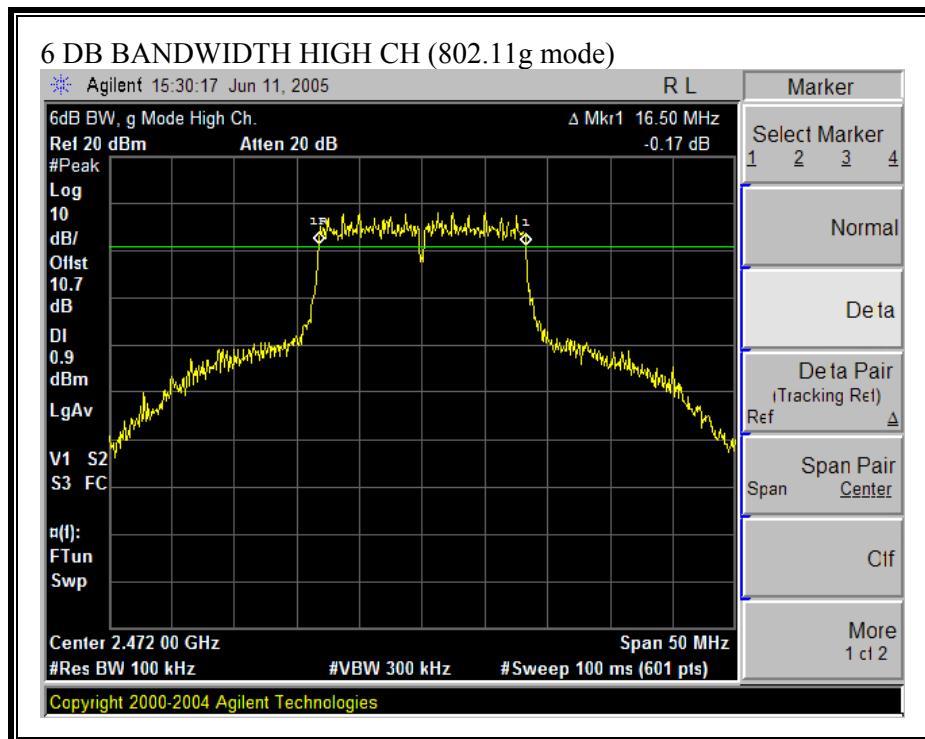

8.1.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS


No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	12.8667
Middle	2437	12.899
High	2472	12.8927


802.11g Mode


Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.5393
Middle	2437	16.5569
High	2472	16.5608

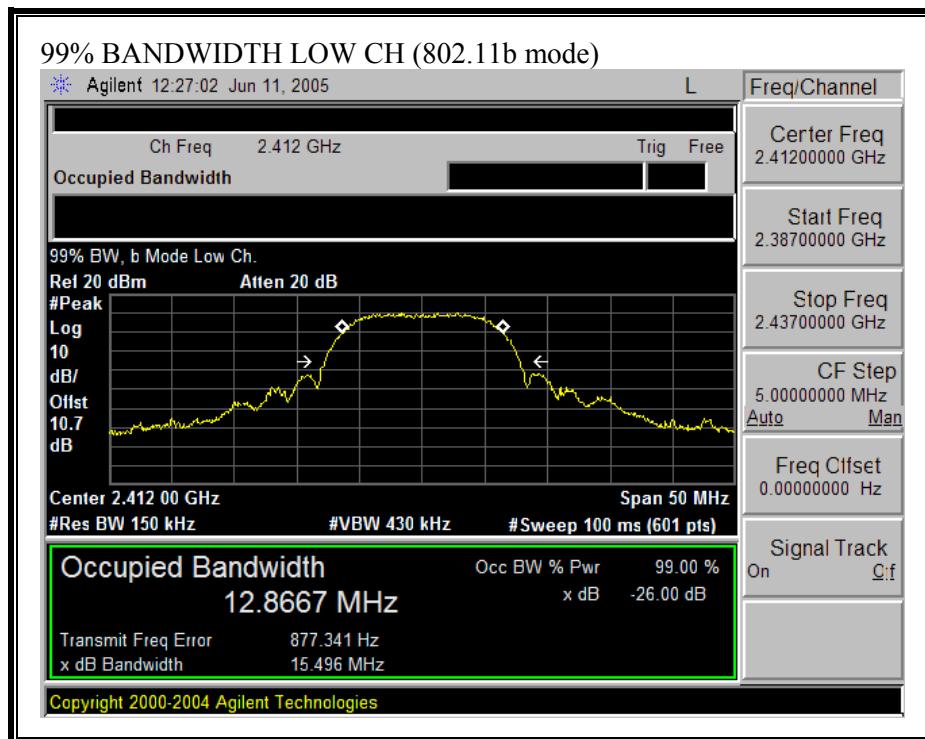
99% BANDWIDTH (802.11b MODE)

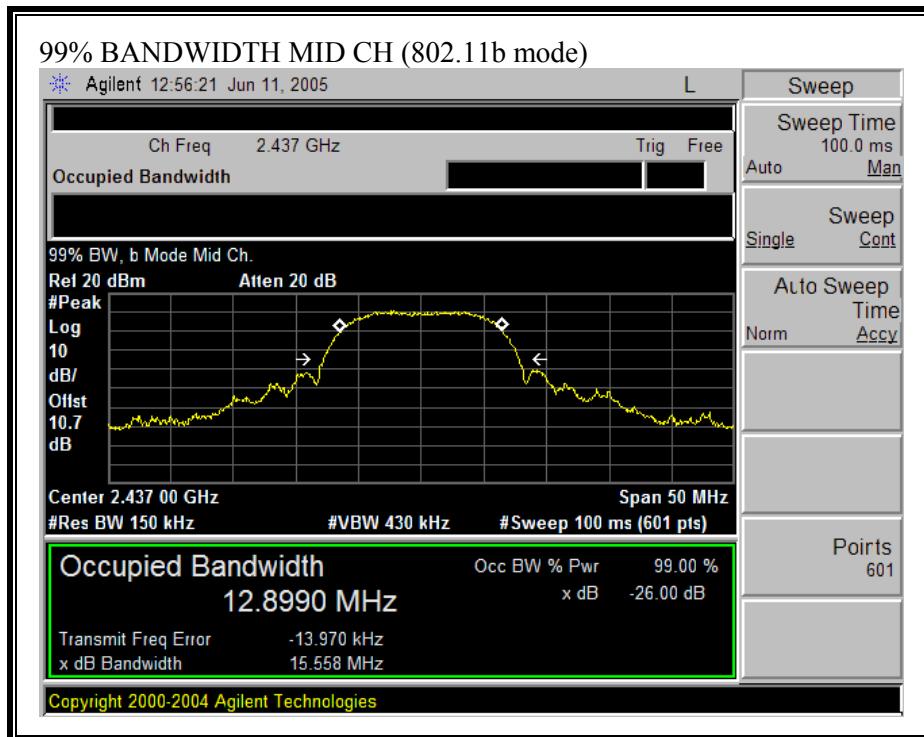

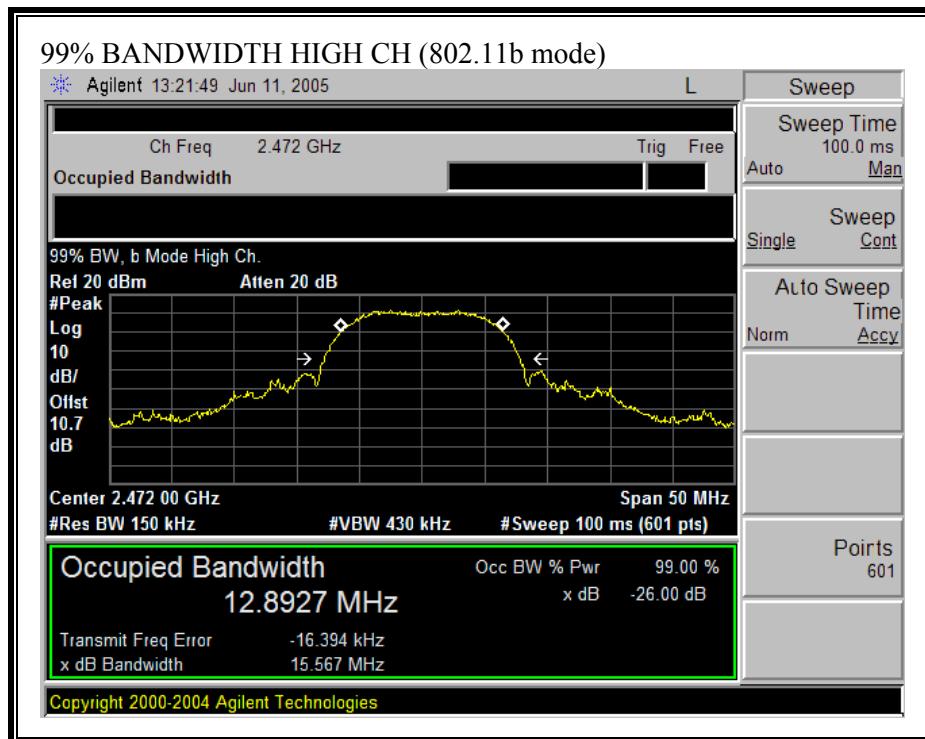

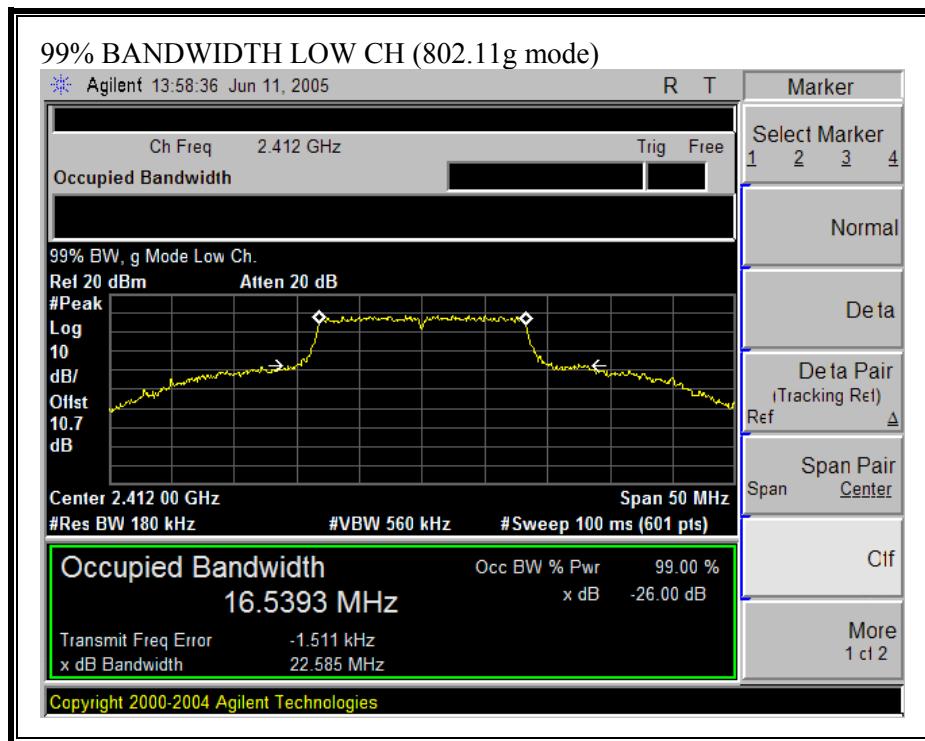99% BANDWIDTH (802.11g MODE)

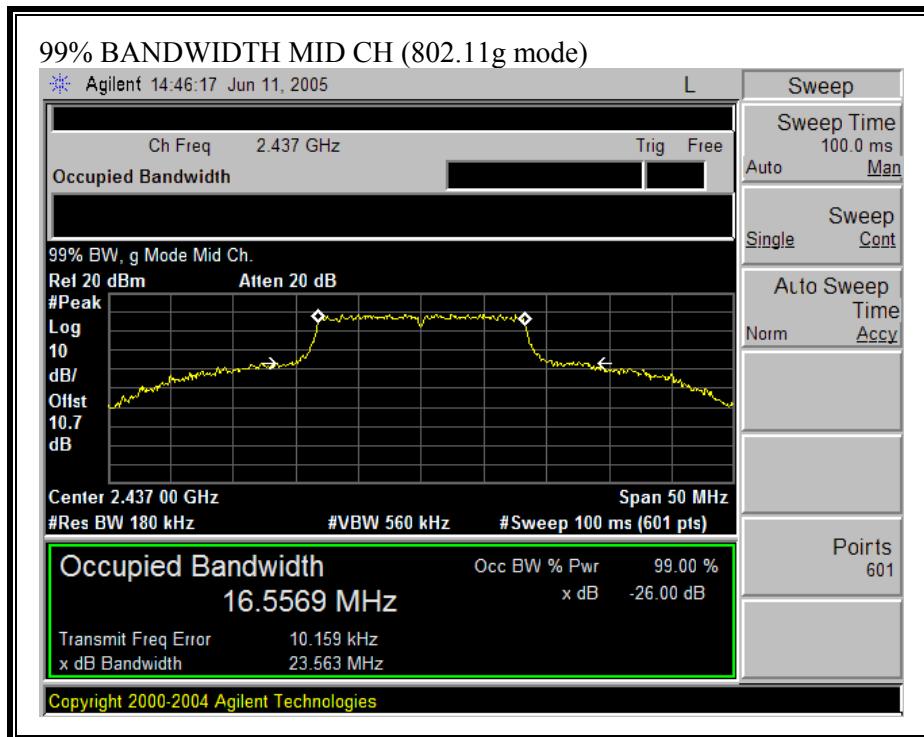

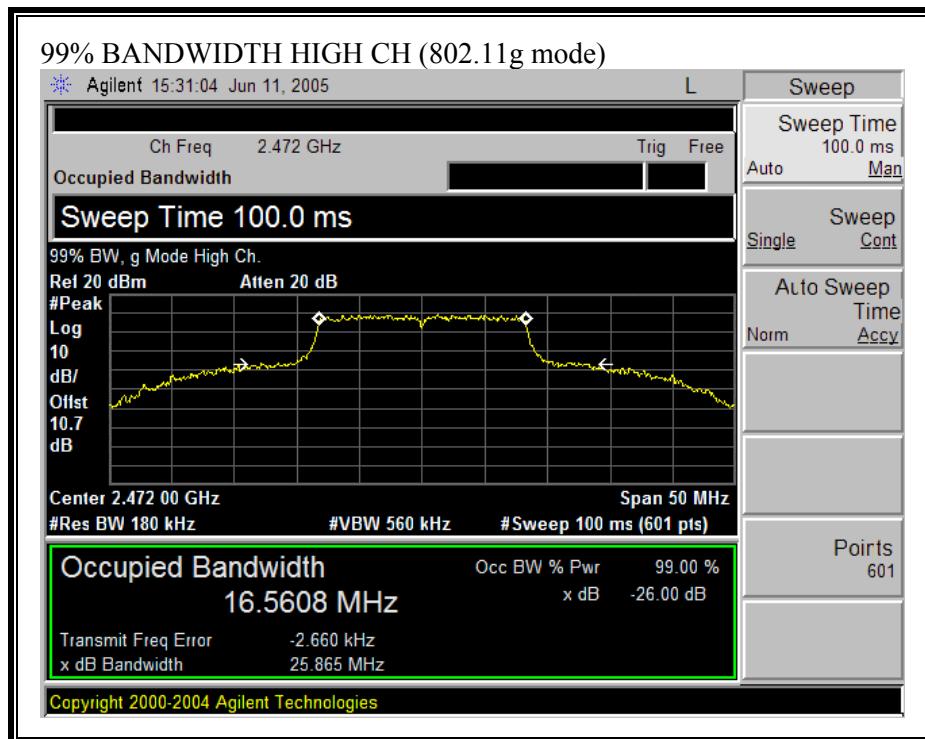

8.1.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz , and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(4) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (i) Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS

The maximum antennas gains are 3.24 dBi (2.4GHz) and 5.7 dBi (5GHz) for other than fixed, point-to-point operations, therefore the limit is 30 dBm.

No non-compliance noted:

802.11b Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
1	2412	21.44	30	-8.56
6	2437	21.80	30	-8.20
11	2462	21.74	30	-8.26
13	2472	12.81	30	-17.19

802.11g Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
1	2412	24.71	30	-5.29
2	2417	25.86	30	-4.14
6	2437	26.36	30	-3.64
10	2457	26.02	30	-3.98
11	2462	24.07	30	-5.93
13	2472	17.85	30	-12.15

OUTPUT POWER (802.11b MODE)


CHANNEL 1, 2412 MHz _ POWER = 19dBm (Gate Average Power)

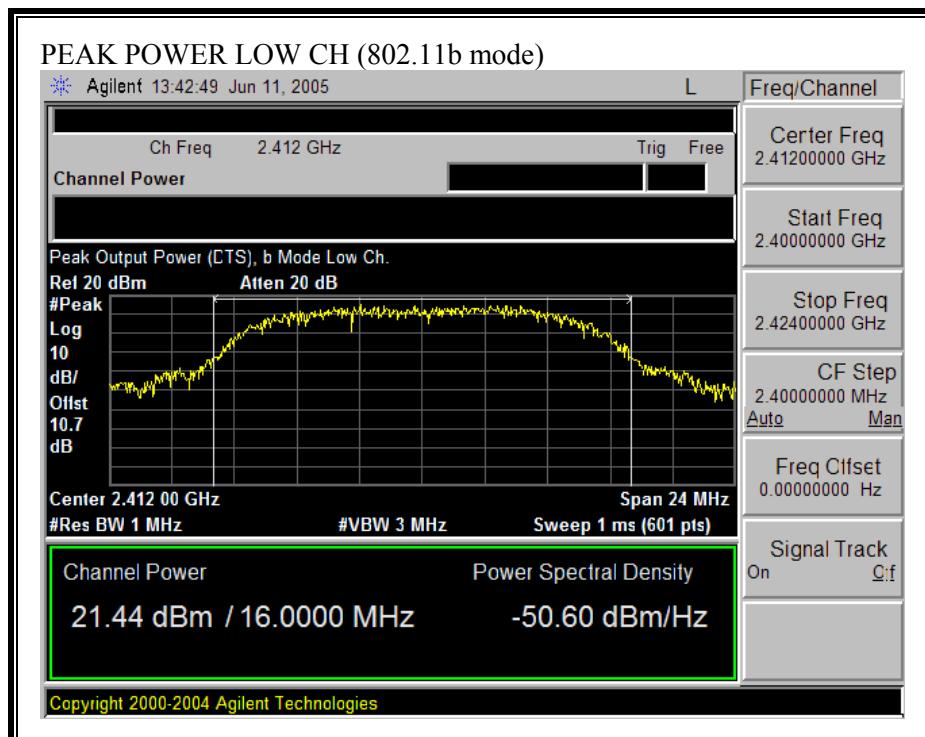


CHANNEL 6, 2437 MHz _ POWER = 19dBm (Gate Average Power)

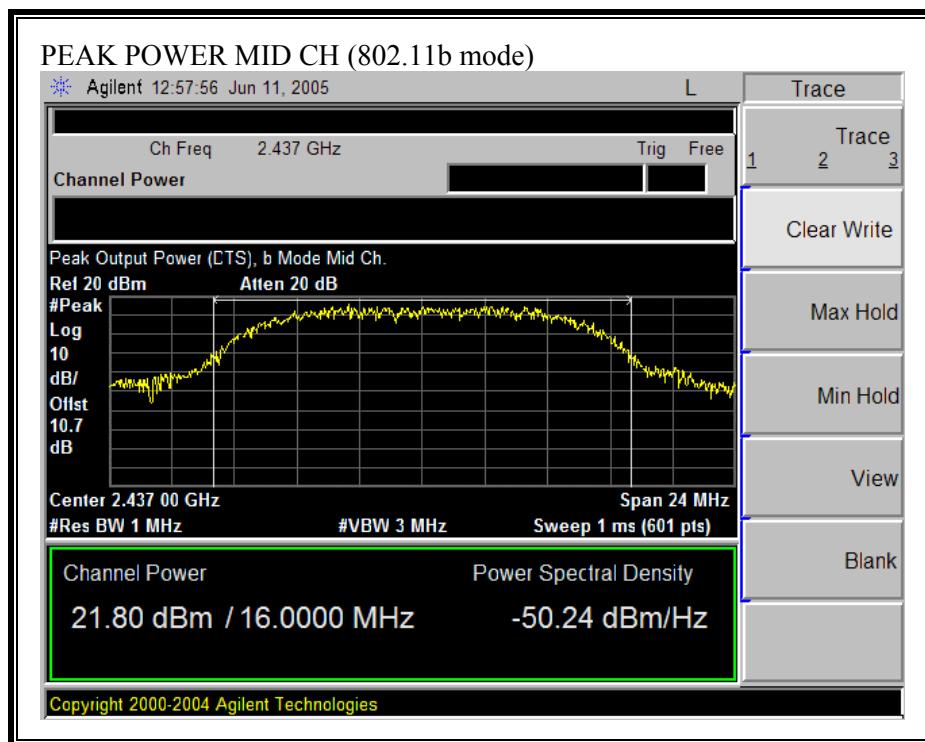

CHANNEL 11, 2462 MHz _ POWER = 19dBm (Gate Average Power)

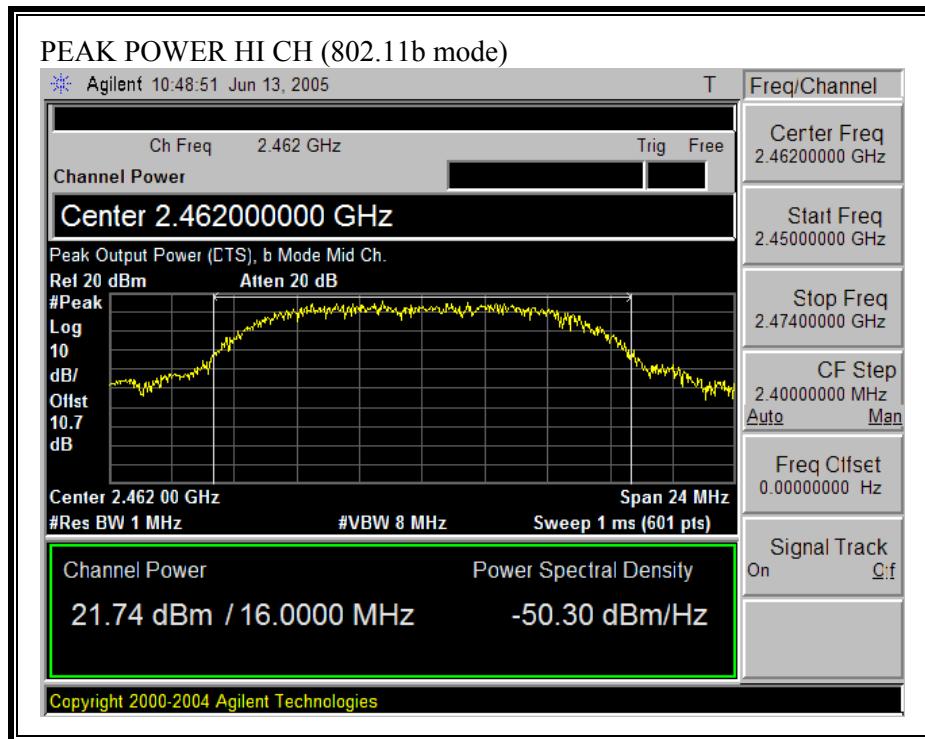


CHANNEL 13, 2472 MHz _ POWER = 10dBm (Gate Average Power)

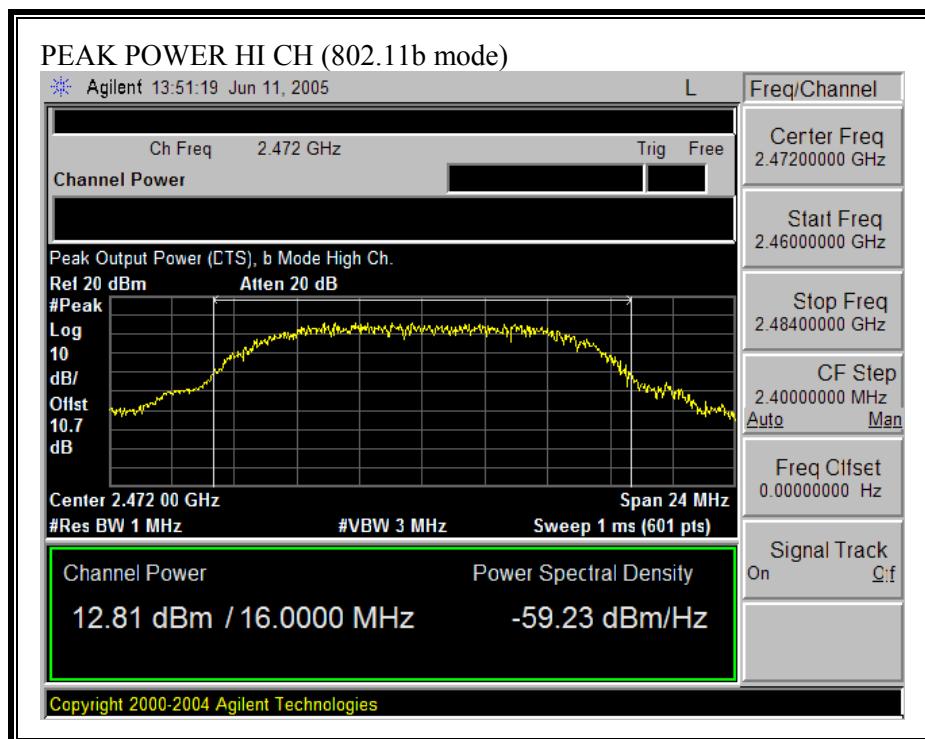


OUTPUT POWER (802.11g MODE)


CHANNEL 1, 2412 MHz _ POWER = 18dBm (Gate Average Power)

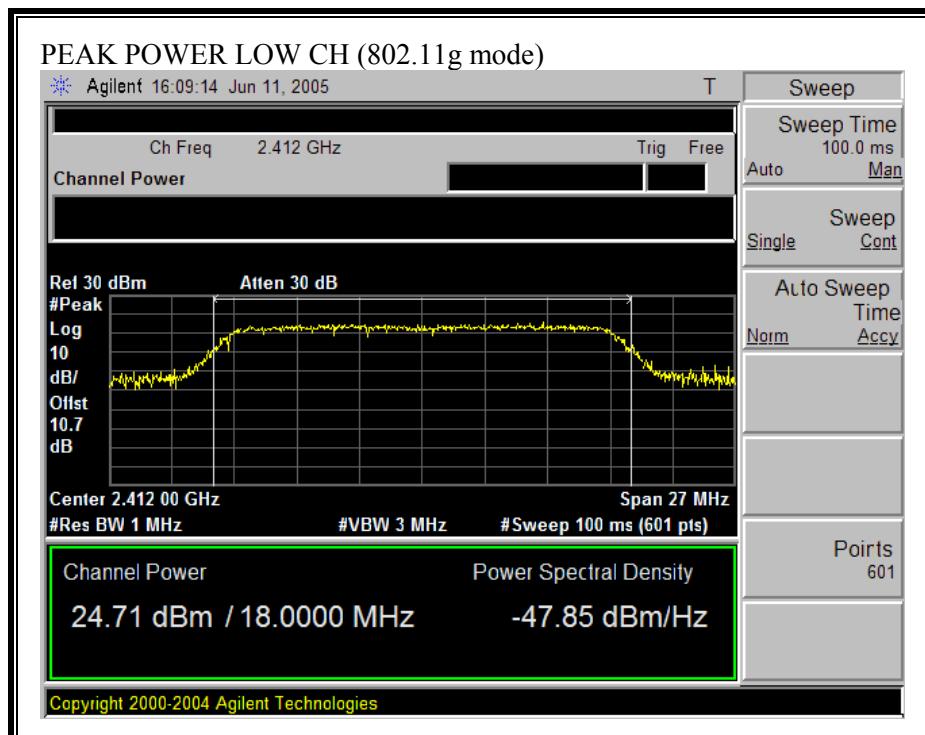


CHANNEL 2, 2417 MHz _ POWER = 19dBm (Gate Average Power)

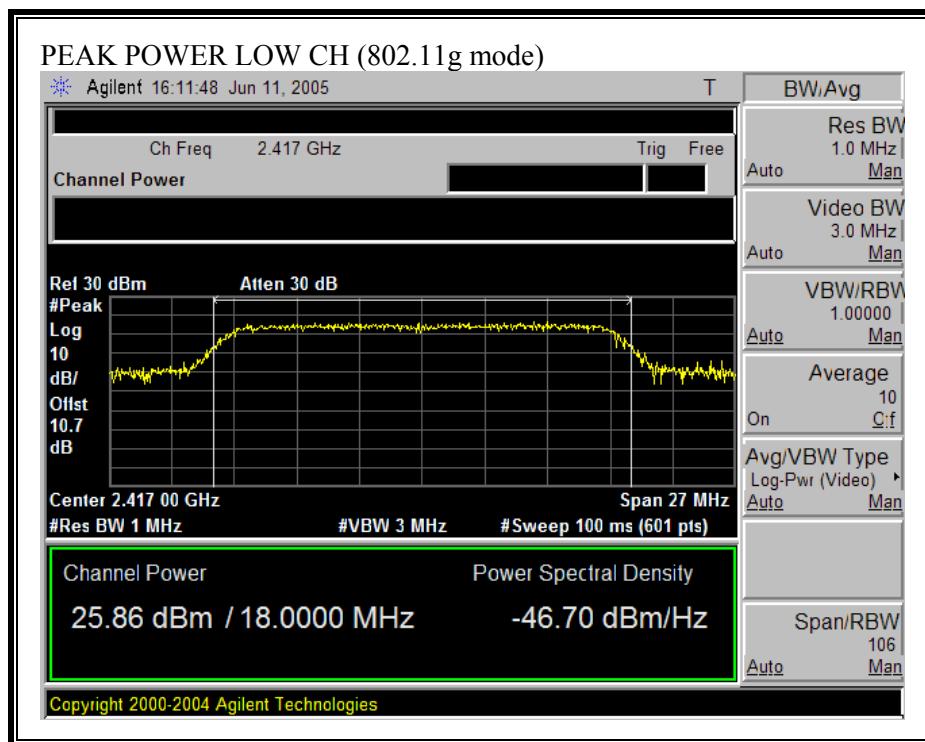


CHANNEL 6, 2437 MHz _ POWER = 19dBm (Gate Average Power)

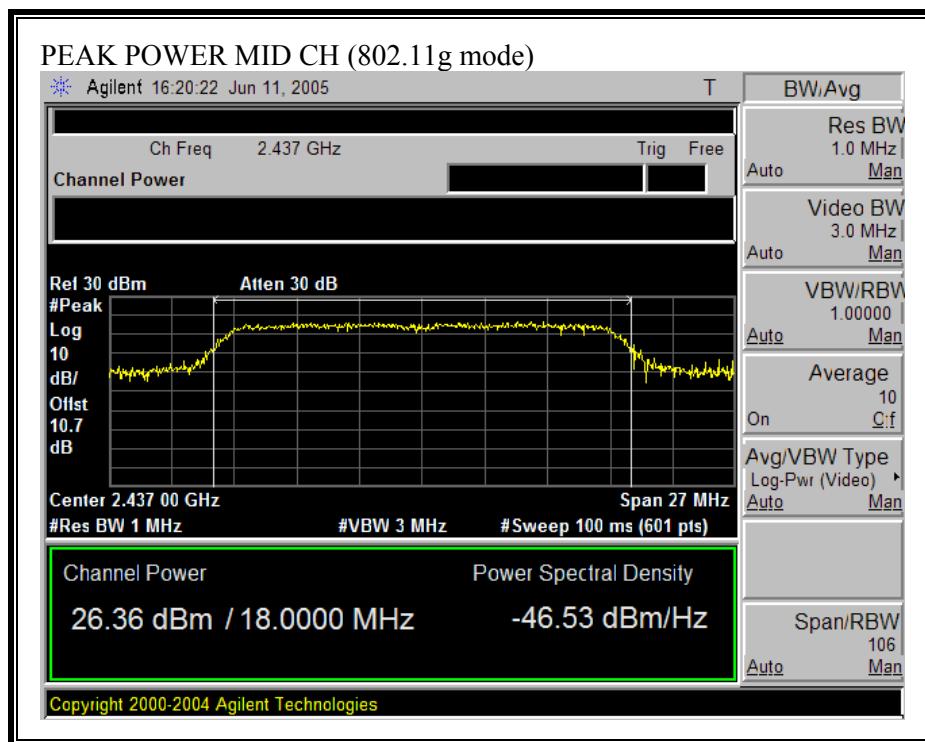


CHANNEL 10, 2457 MHz _ POWER = 19dBm (Gate Average Power)

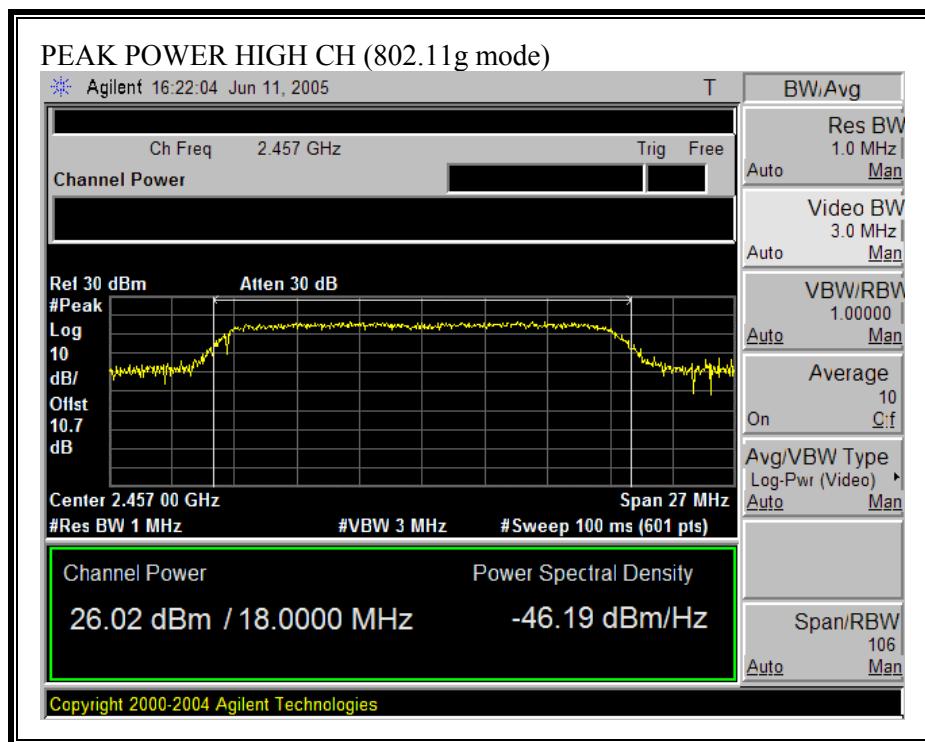

CHANNEL 11, 2462 MHz _ POWER = 17dBm (Gate Average Power)

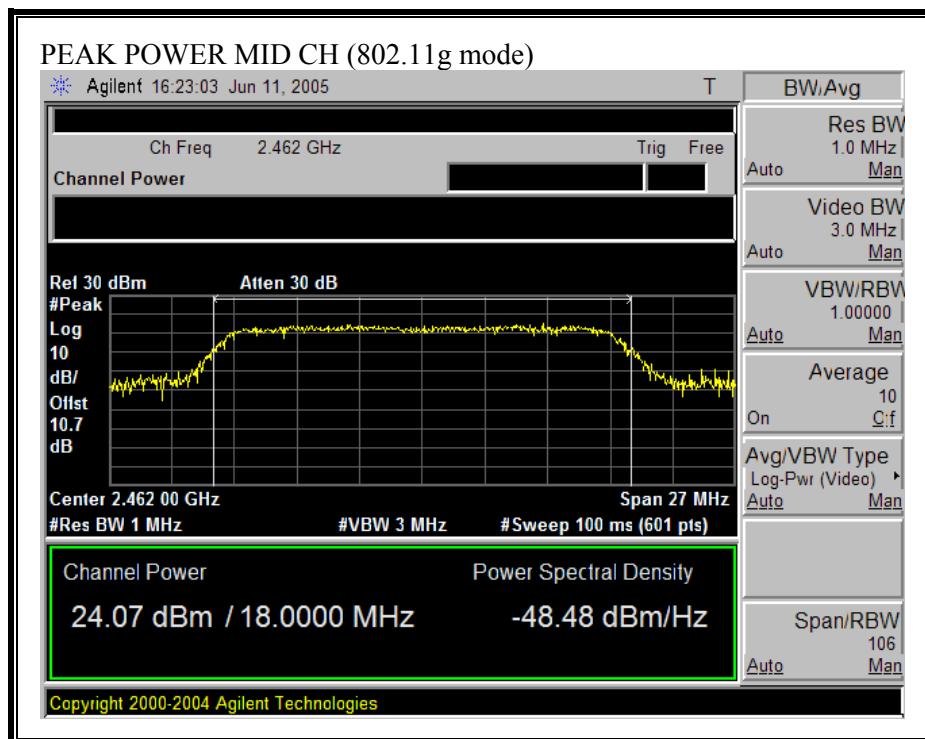

CHANNEL 13, 2472 MHz _ POWER = 10dBm (Gate Average Power)

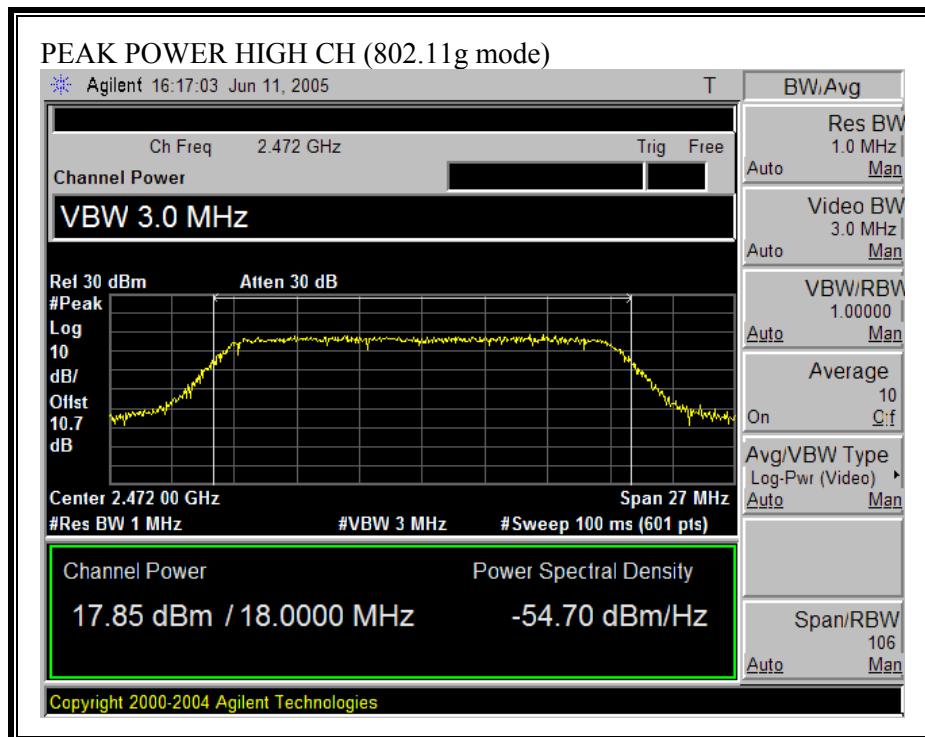

8.1.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P (\text{mW}) = P (\text{W}) / 1000 \text{ and}$$

$$d (\text{cm}) = 100 * d (\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P (\text{mW}) = 10^{(P (\text{dBm}) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

LIMITS

From §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

RESULTS

No non-compliance noted.

Mode	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm ²)
802.11b	20.0	21.80	3.24	0.06
802.11g	20.0	26.36	3.24	0.18

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

Mode	Power Density Limit (mW/cm ²)	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)
802.11b	1.0	21.80	3.24	5.04
802.11g	1.0	26.36	3.24	8.52

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

8.1.5. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 10.7 dB (including 10 dB pad and 0.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

802.11b Mode (Gate Average Power)

Channel	Frequency (MHz)	Power (dBm)
1	2412	18.50
6	2437	19.00
11	2462	19.05
13	2472	10.25

802.11g Mode (Gate Average Power)

Channel	Frequency (MHz)	Power (dBm)
1	2412	17.35
2	2417	18.96
6	2437	19.05
10	2457	18.95
11	2462	16.98
13	2472	10.70

8.1.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.

RESULTS


No non-compliance noted:


802.11b Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-5.52	8	-13.52
Middle	2437	-5.37	8	-13.37
High	2462	-3.66	8	-11.66
High	2472	-5.05	8	-13.05


802.11g Mode


Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-6.17	8	-14.17
Low	2417	-7.08	8	-15.08
Middle	2437	-5.07	8	-13.07
High	2457	-5.55	8	-13.55
High	2462	-7.46	8	-15.46
High	2472	-4.96	8	-12.96

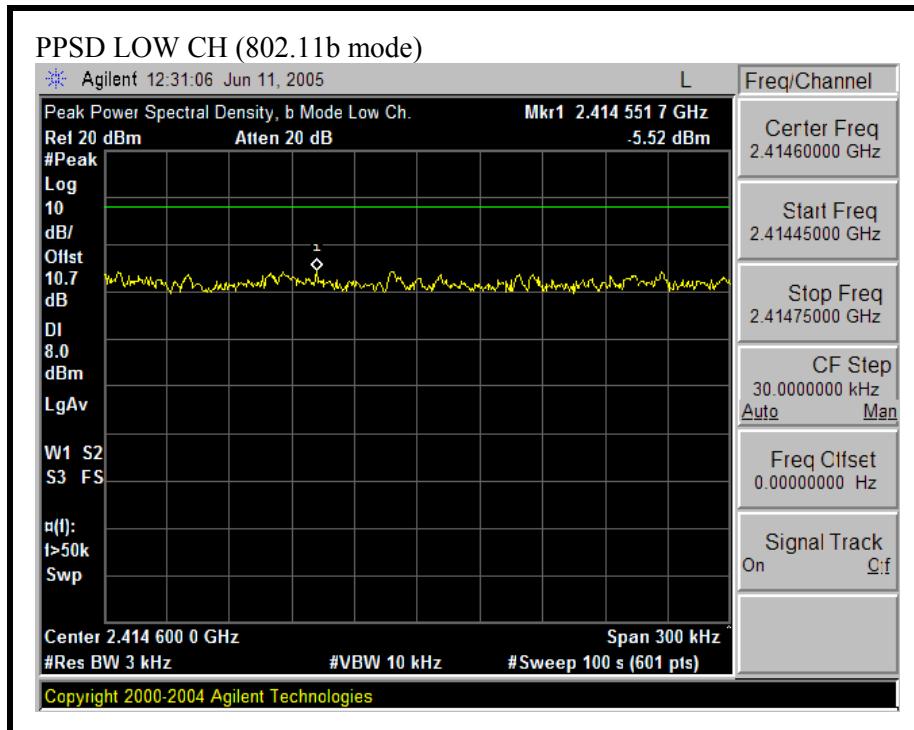
PEAK POWER SPECTRAL DENSITY (802.11b MODE), CH 1, 2412 MHz, Power = 19dBm

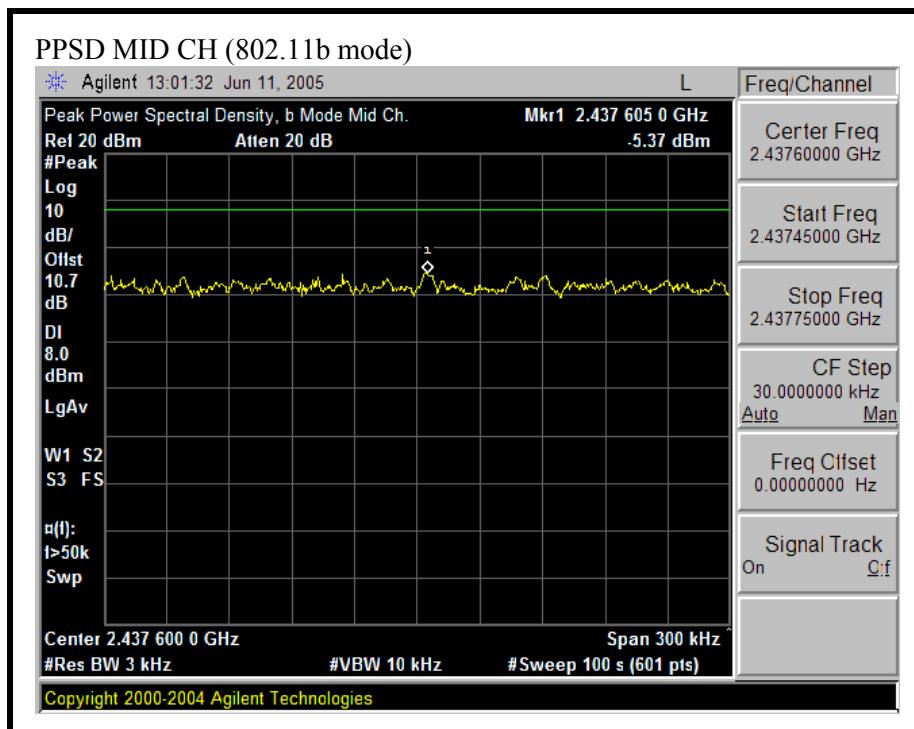
PEAK POWER SPECTRAL DENSITY (802.11b MODE), CH 6, 2437 MHz, Power = 19dBm

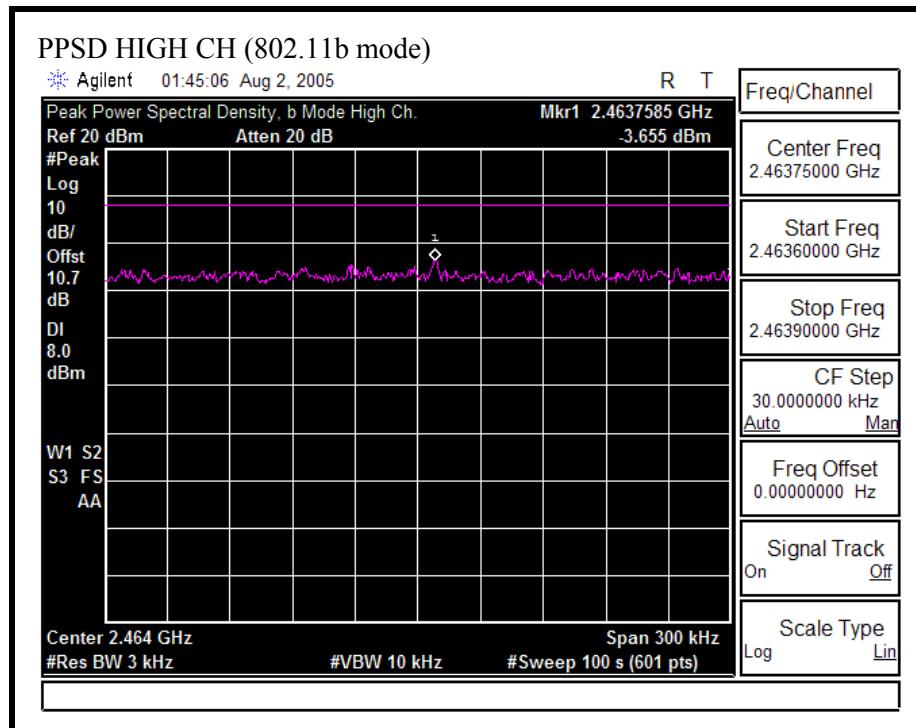
PEAK POWER SPECTRAL DENSITY (802.11b MODE), CH 11, 2462 MHz, Power = 19dBm

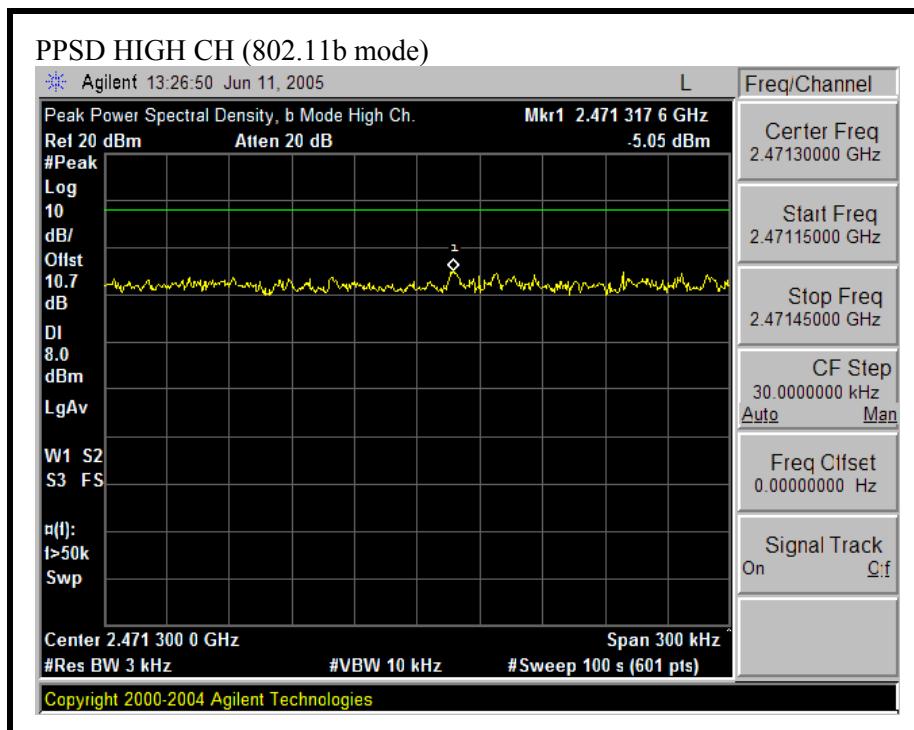
PEAK POWER SPECTRAL DENSITY (802.11b MODE), CH 13, 2472 MHz, Power = 10dBm

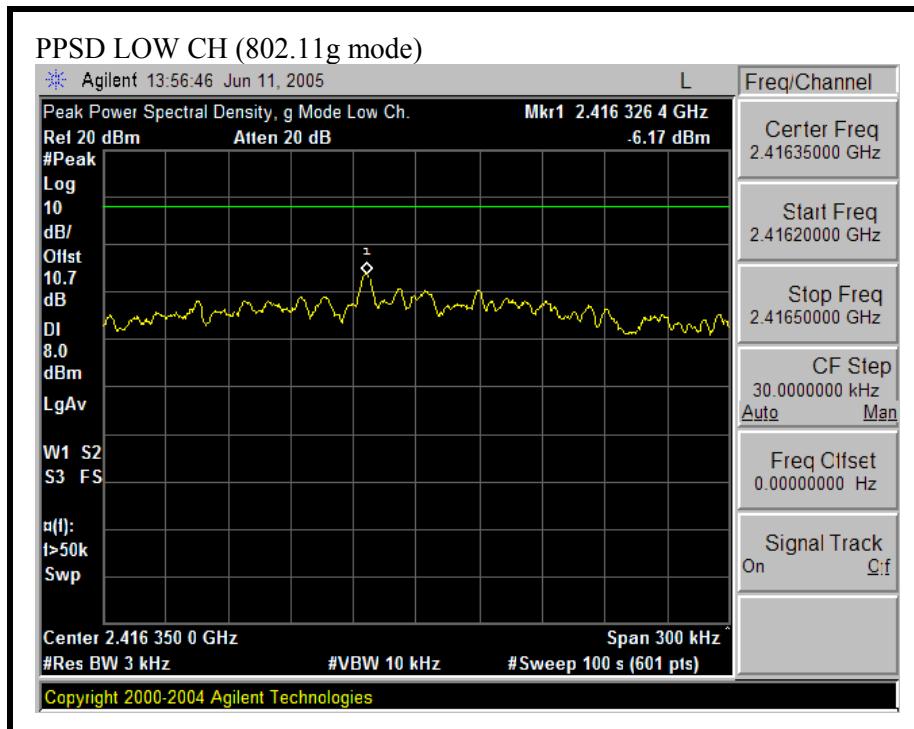
PEAK POWER SPECTRAL DENSITY (802.11g MODE)CH1, 2412 MHz, Power = 18dBm

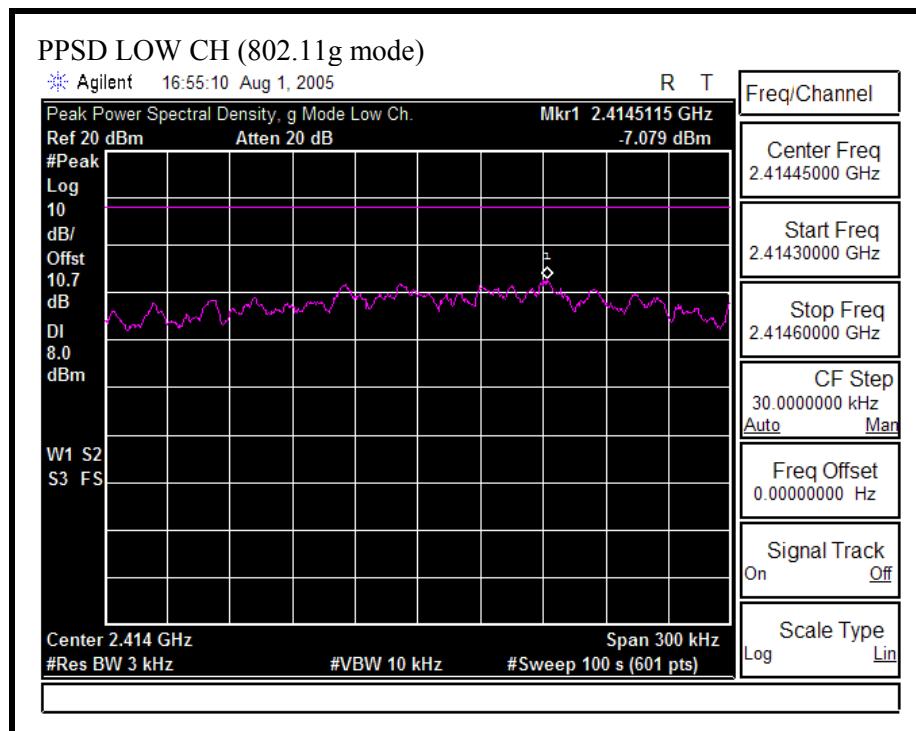PEAK POWER SPECTRAL DENSITY (802.11g MODE), CH 2, 2417 MHz, Power = 19dBm

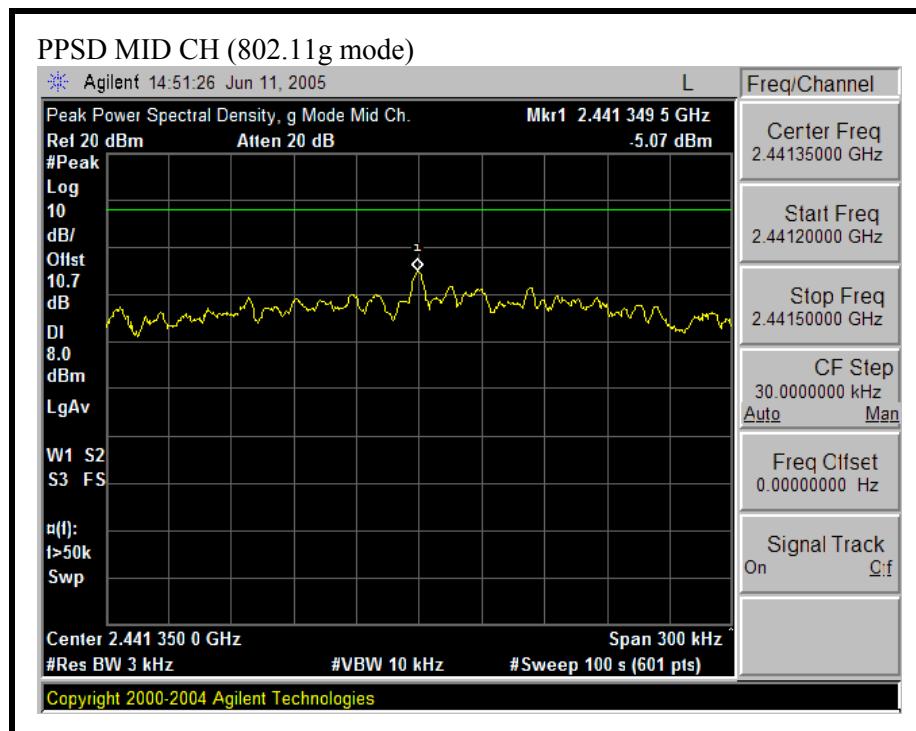PEAK POWER SPECTRAL DENSITY (802.11g MODE), CH 6, 2437 MHz, Power = 19dBm

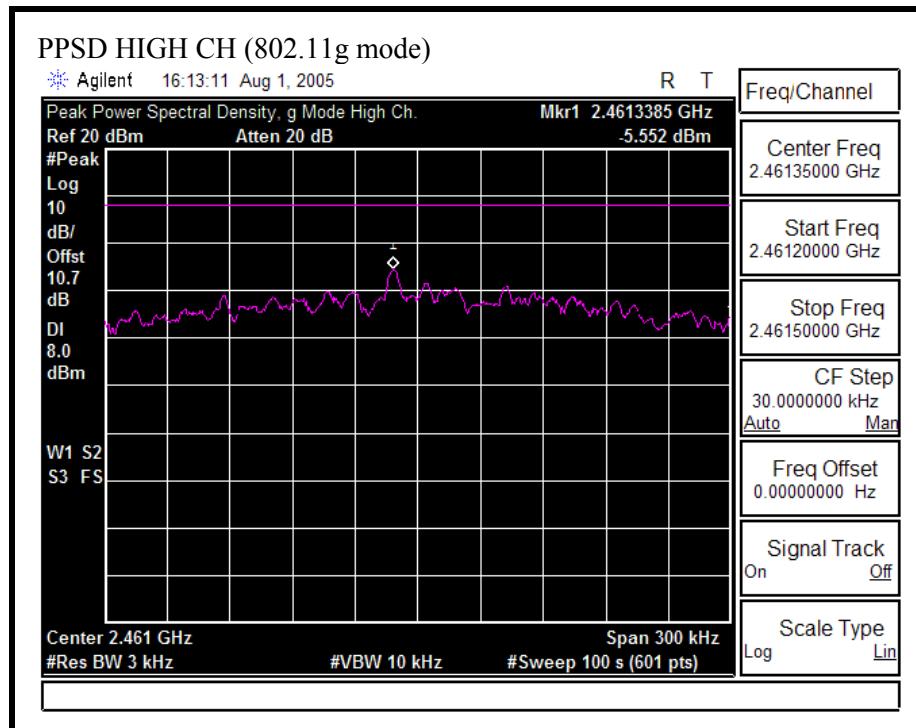PEAK POWER SPECTRAL DENSITY (802.11g MODE), CH 10, 2457 MHz, Power = 19dBm

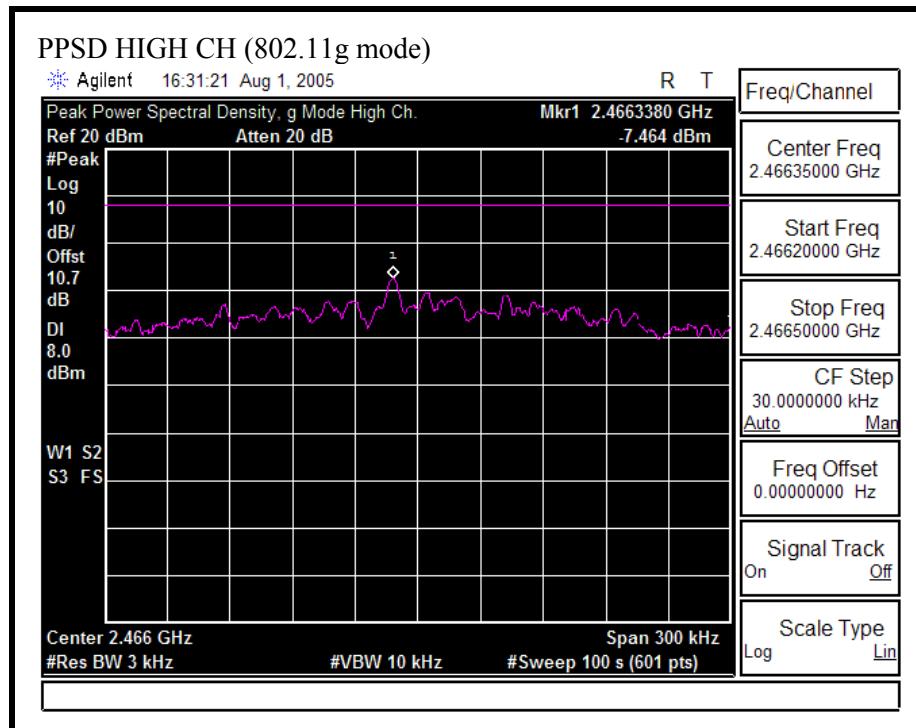PEAK POWER SPECTRAL DENSITY (802.11g MODE), CH 11, 2462 MHz, Power = 17dBm

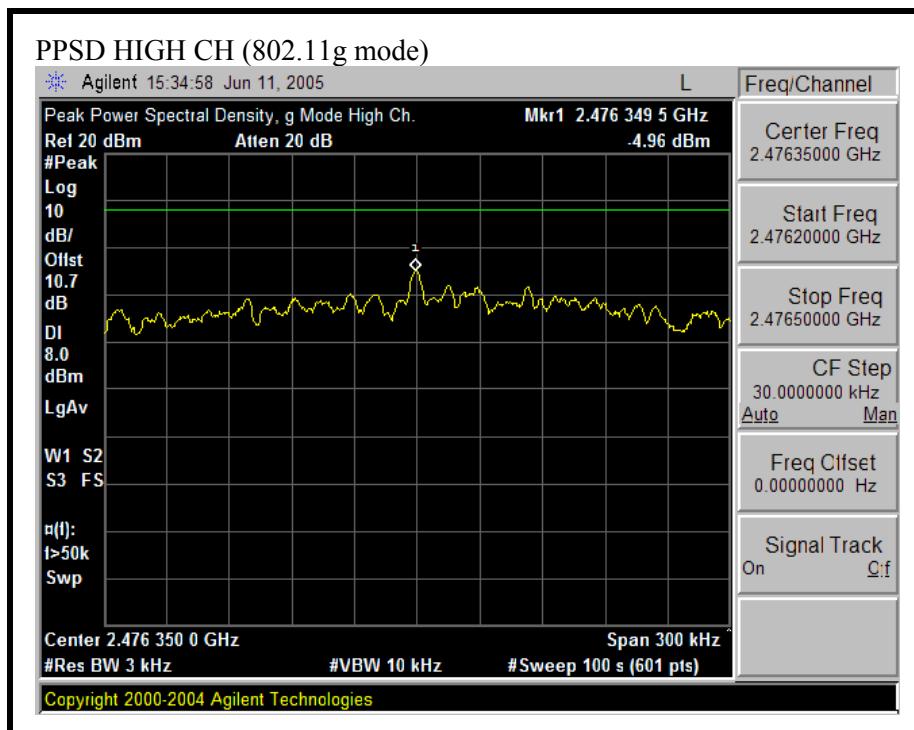PEAK POWER SPECTRAL DENSITY (802.11g MODE), CH 13, 2472 MHz, Power = 11dBm

8.1.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS


No non-compliance noted:

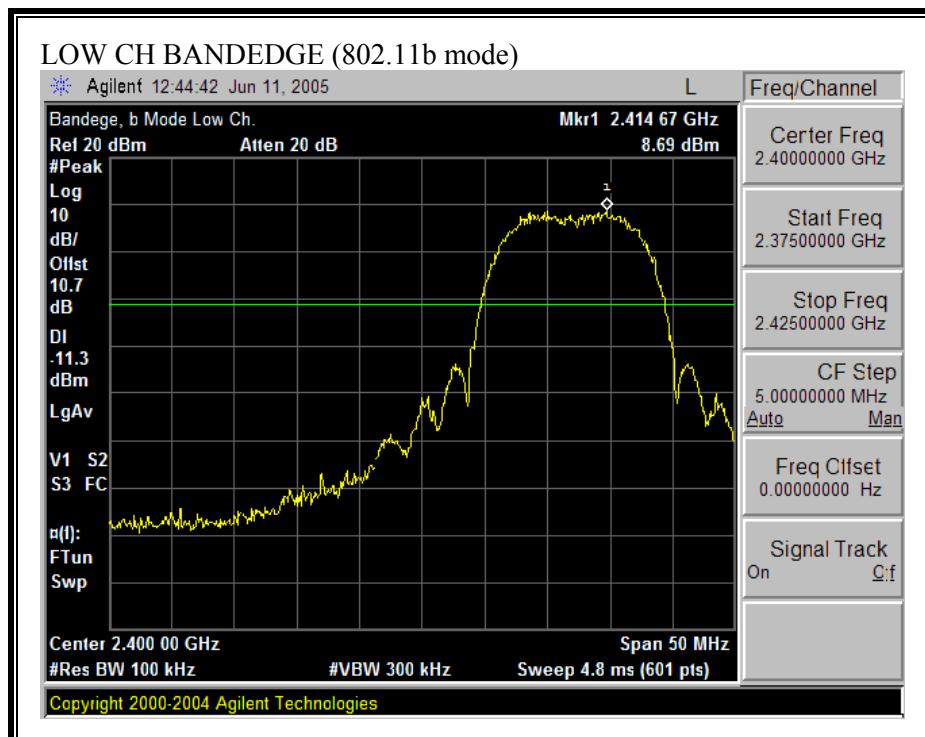
SPURIOUS EMISSIONS, LOW CHANNEL (802.11b MODE)

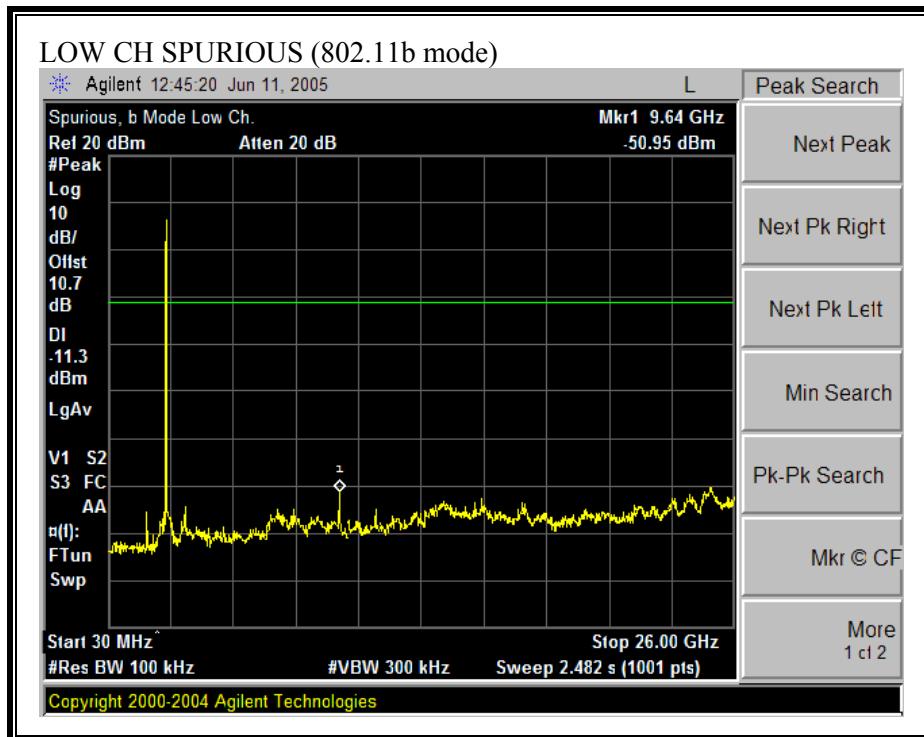


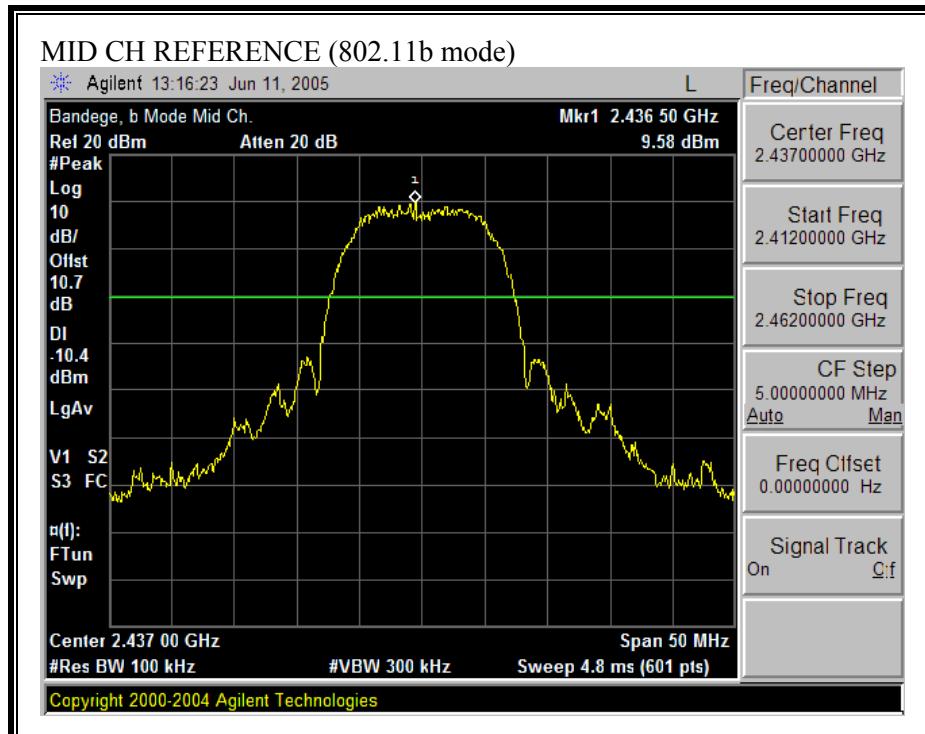
SPURIOUS EMISSIONS, MID CHANNEL (802.11b MODE)

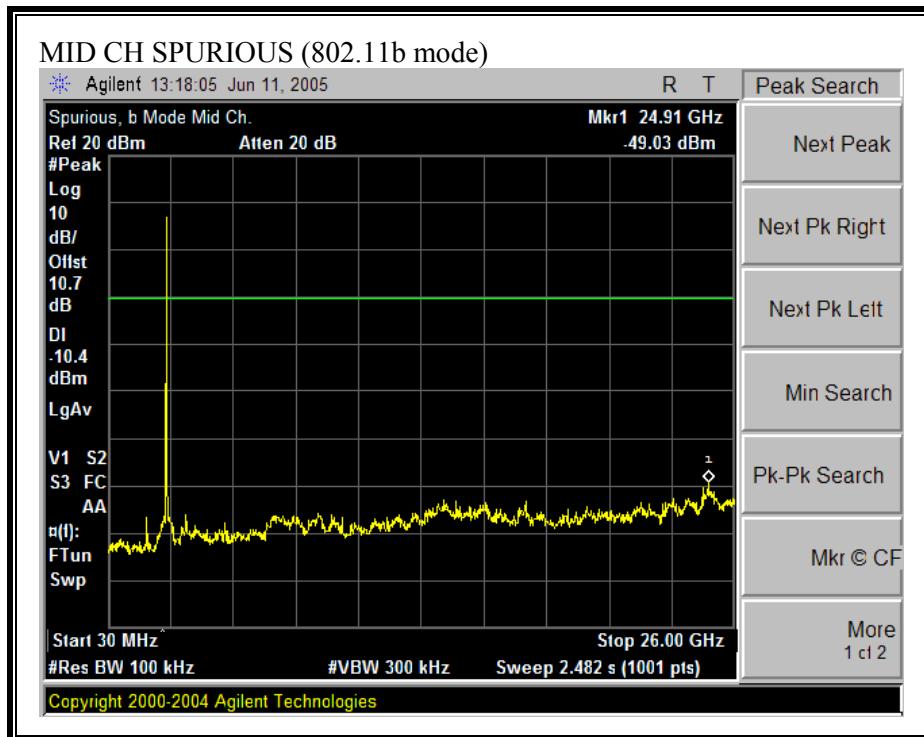


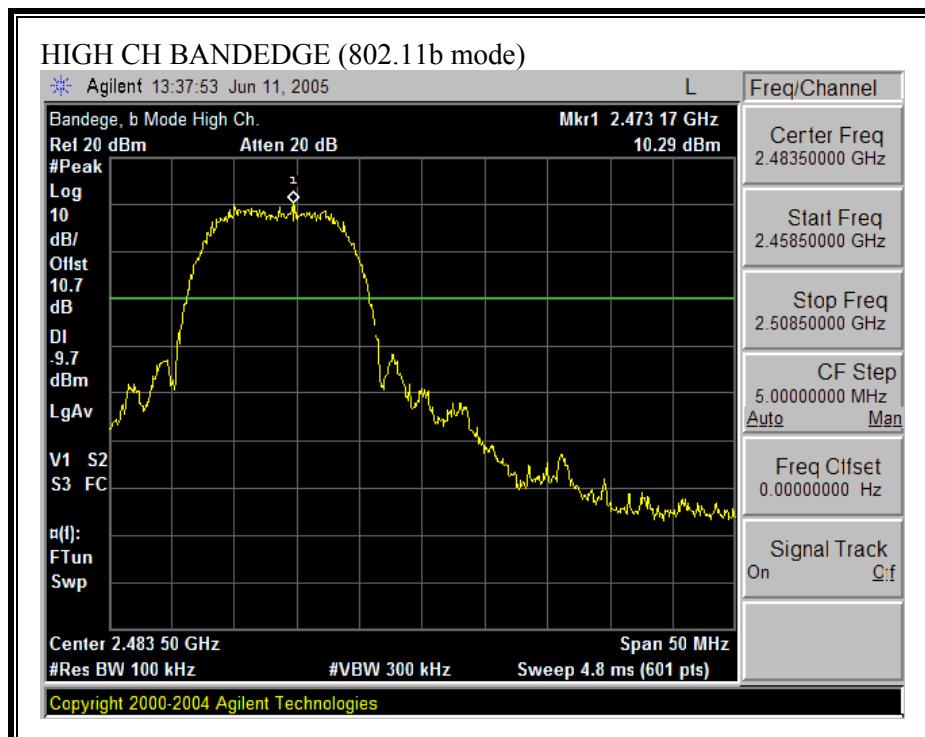
SPURIOUS EMISSIONS, HIGH CHANNEL (802.11b MODE)

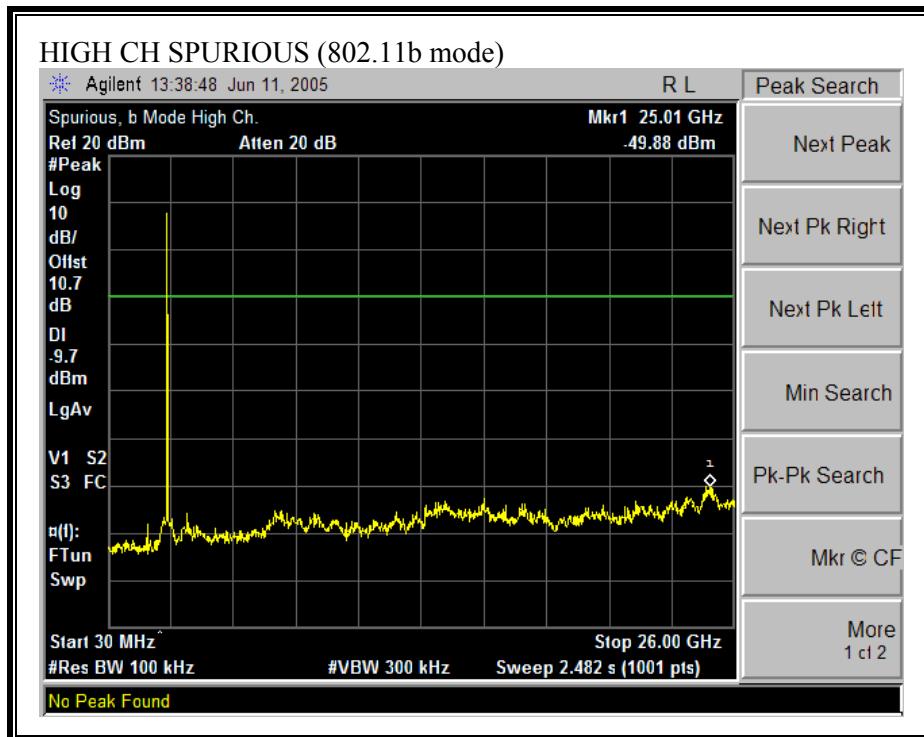


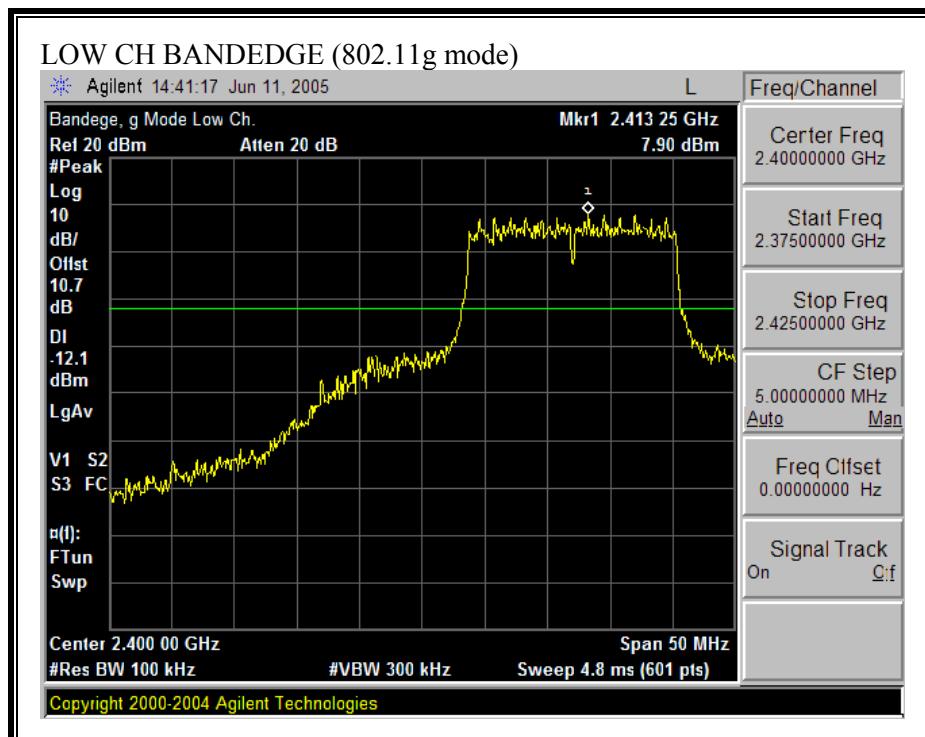
SPURIOUS EMISSIONS, LOW CHANNEL (802.11g MODE)

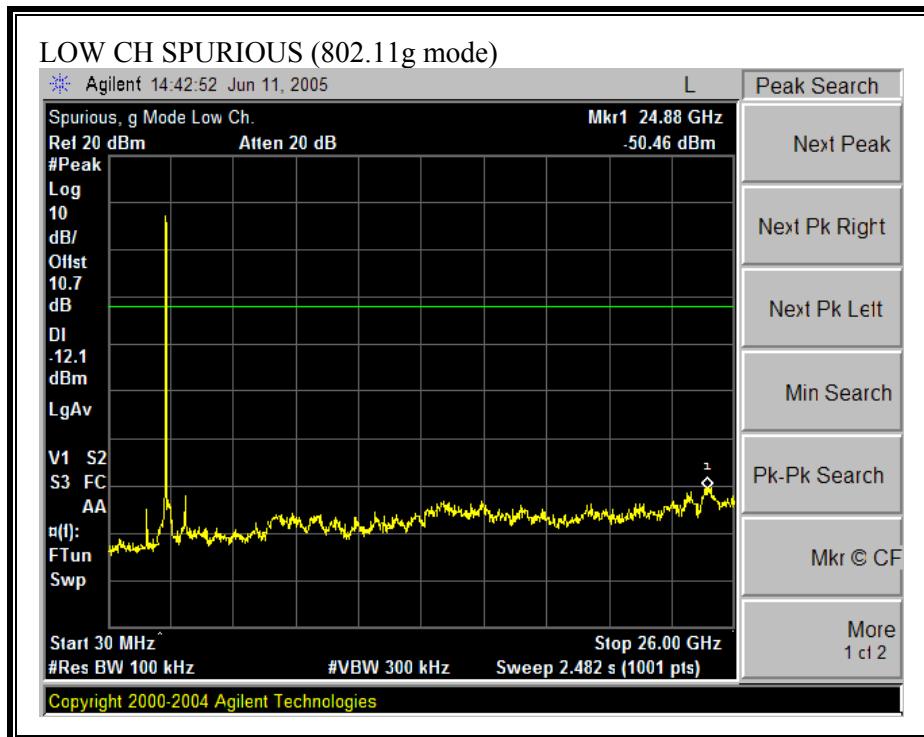

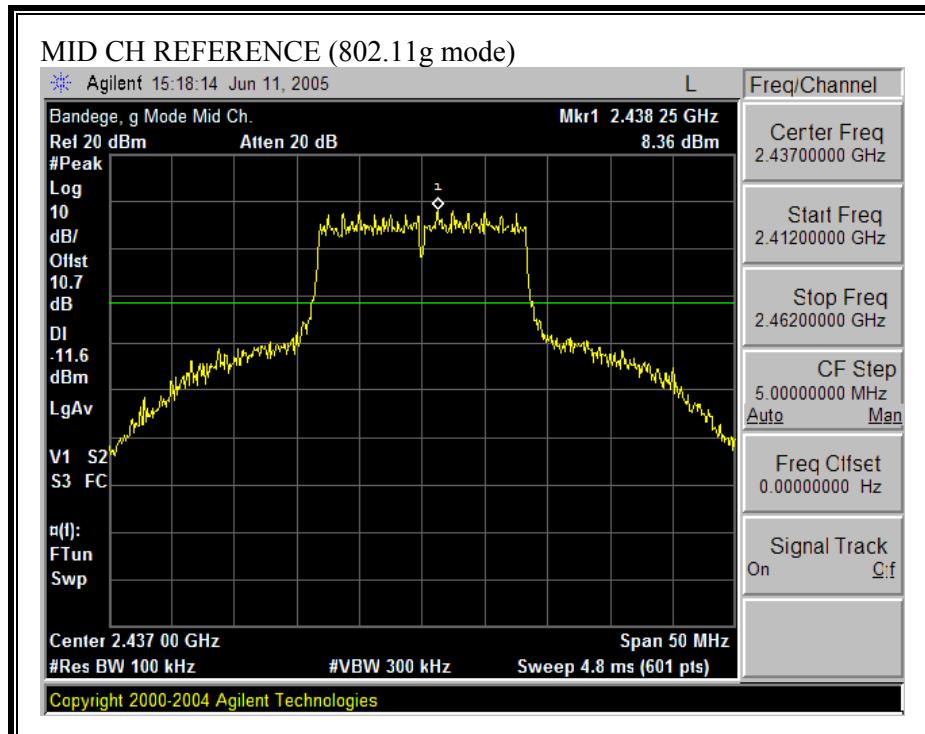SPURIOUS EMISSIONS, MID CHANNEL (802.11g MODE)

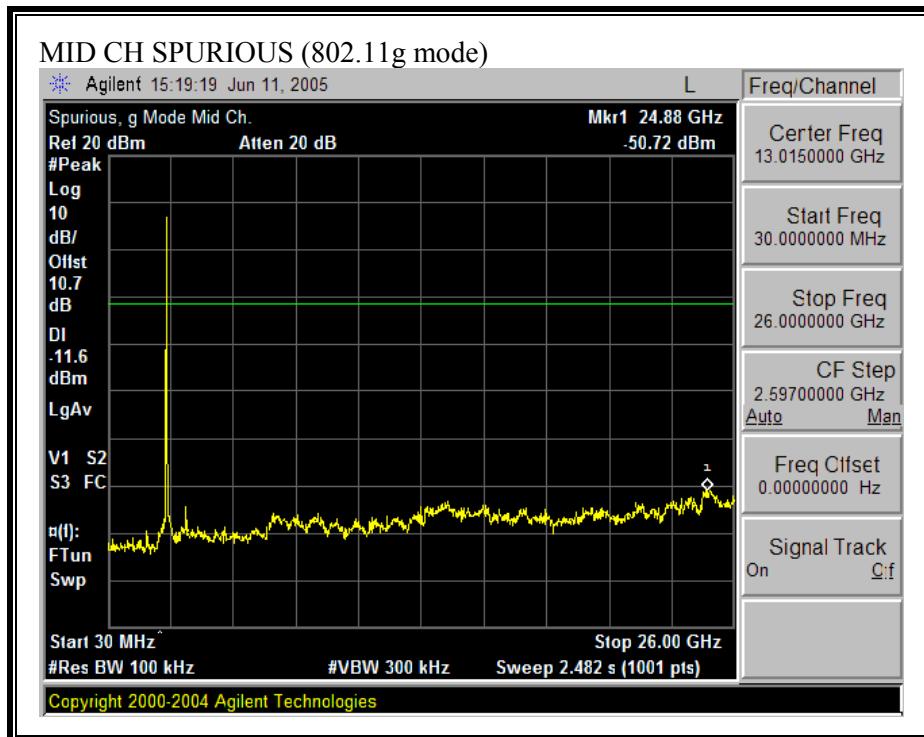

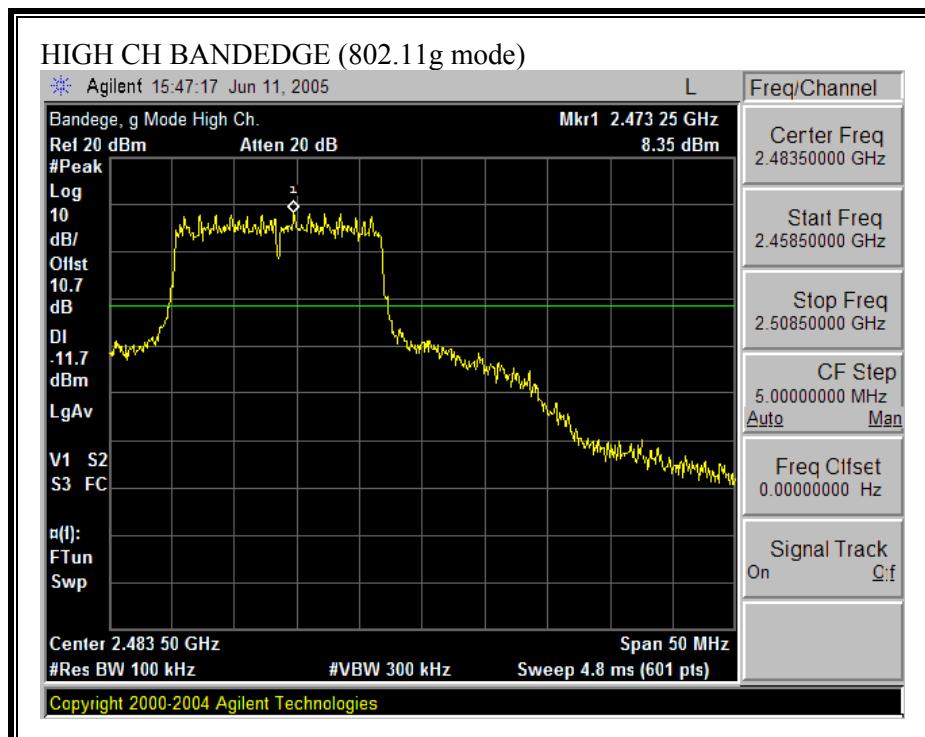SPURIOUS EMISSIONS, HIGH CHANNEL (802.11g MODE)

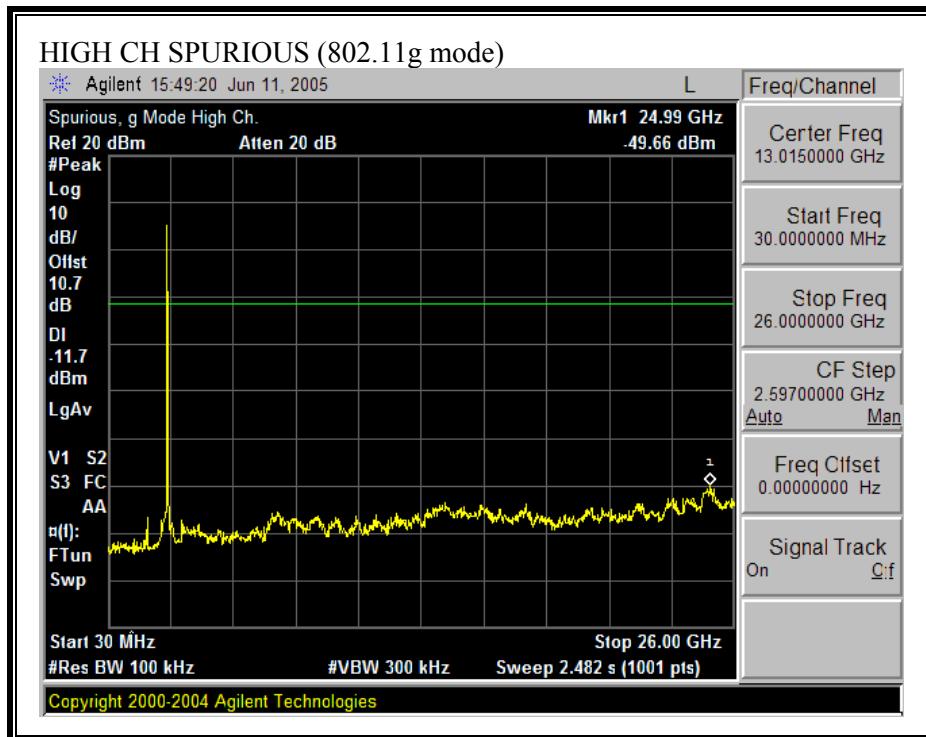

8.2. CHANNEL TESTS FOR THE 5725 TO 5850 MHz BAND

8.2.1. 6 dB BANDWIDTH

LIMIT

§15.247 (a) (2) For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.


RESULTS


No non-compliance noted:

802.11a Mode

Channel	Frequency (MHz)	6 dB Bandwidth (kHz)	Minimum Limit (kHz)	Margin (kHz)
Low	5745	16330	500	15830
Middle	5785	16420	500	15920
High	5825	16420	500	15920

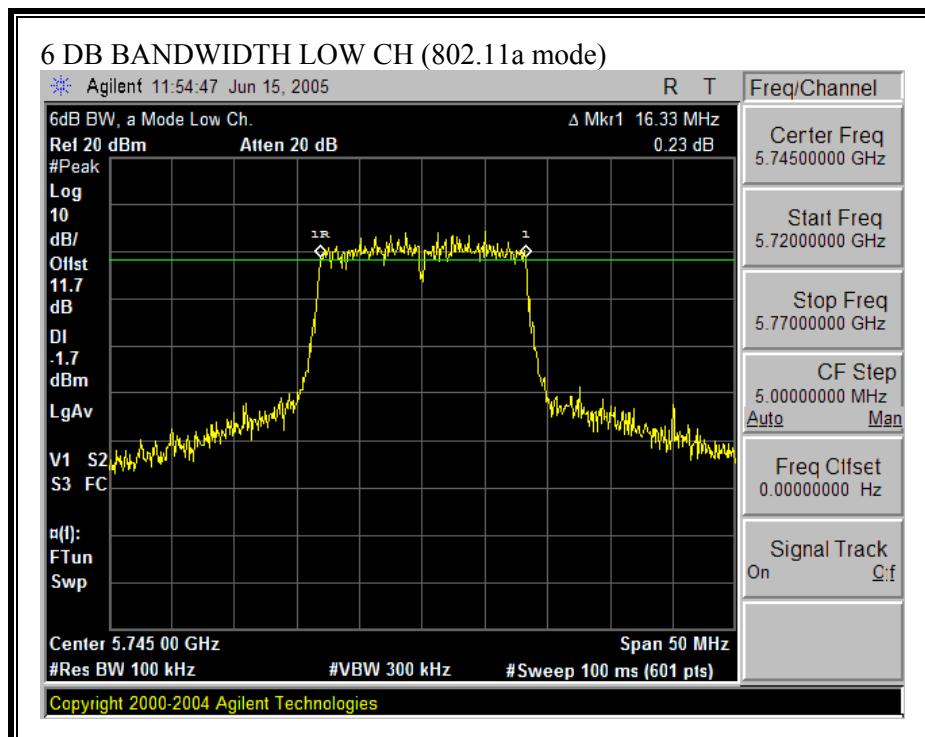6 DB BANDWIDTH (802.11a MODE)

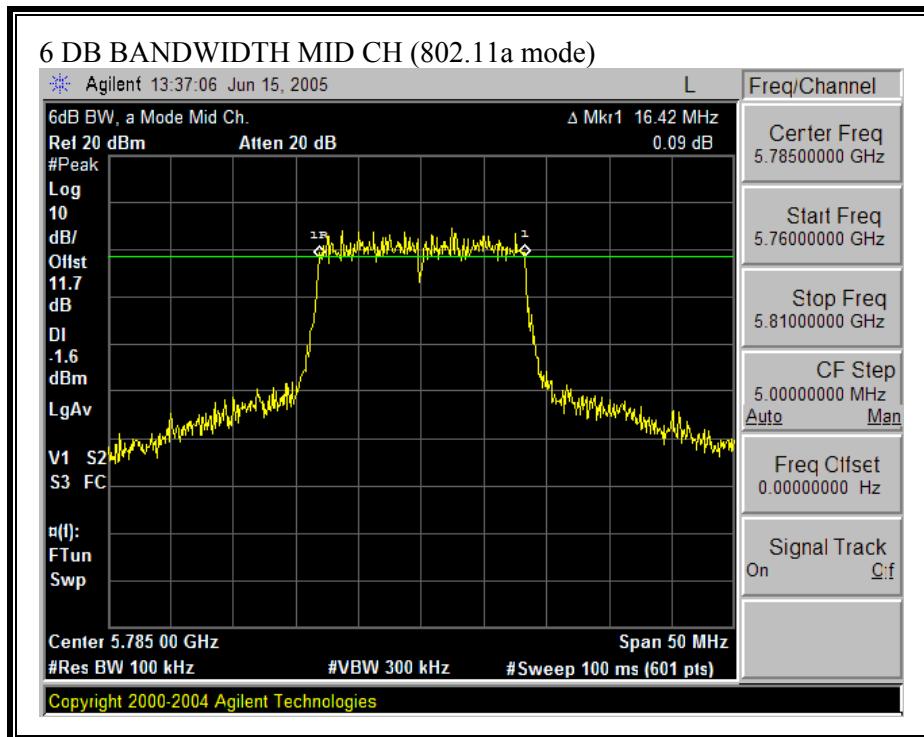

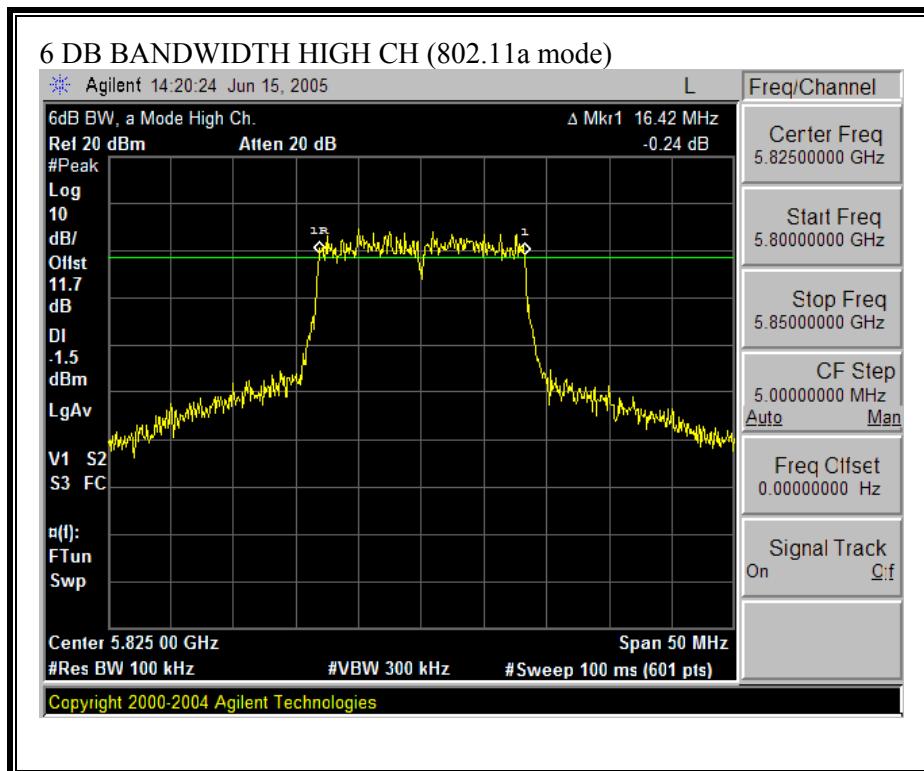

8.2.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.

TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.


RESULTS


No non-compliance noted:

802.11a Mode

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	5745	16.4289
Middle	5785	16.4664
High	5825	16.4446

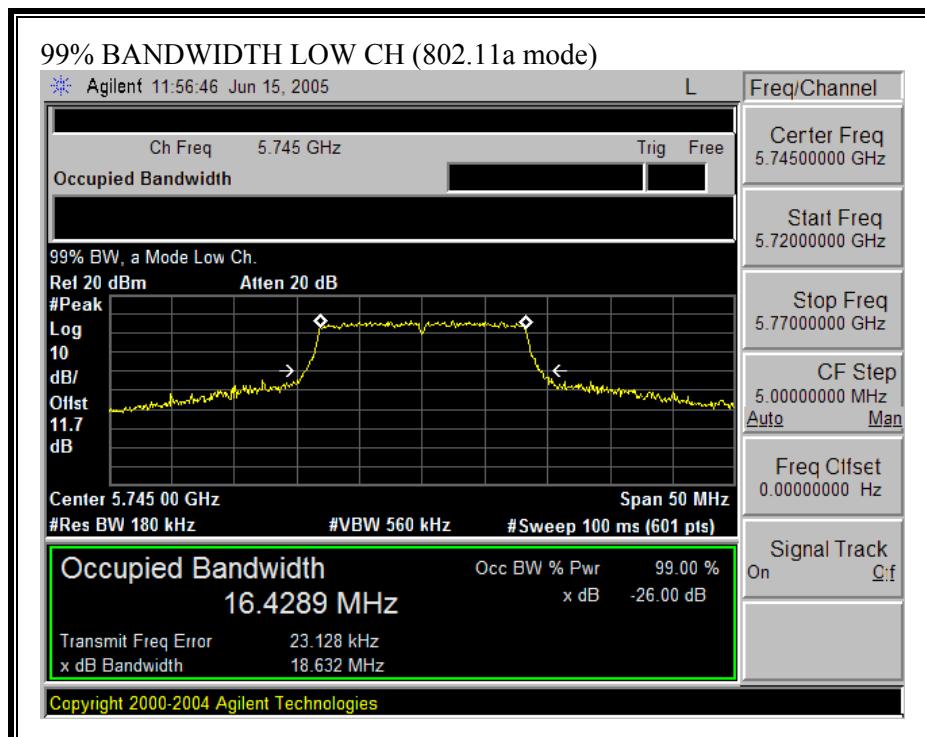99% BANDWIDTH (802.11a MODE)

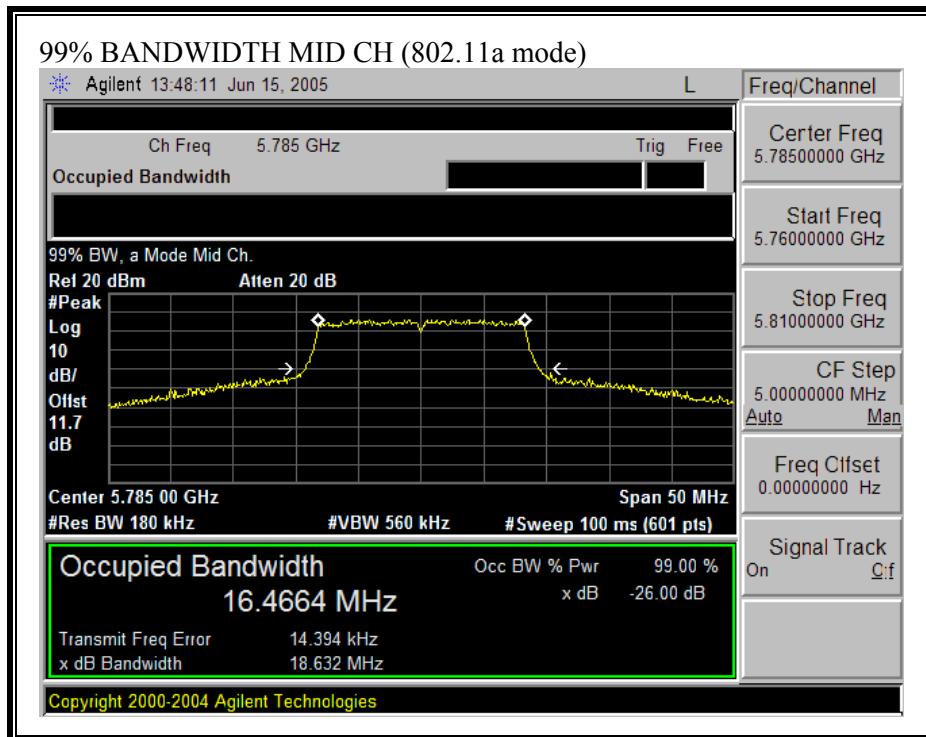

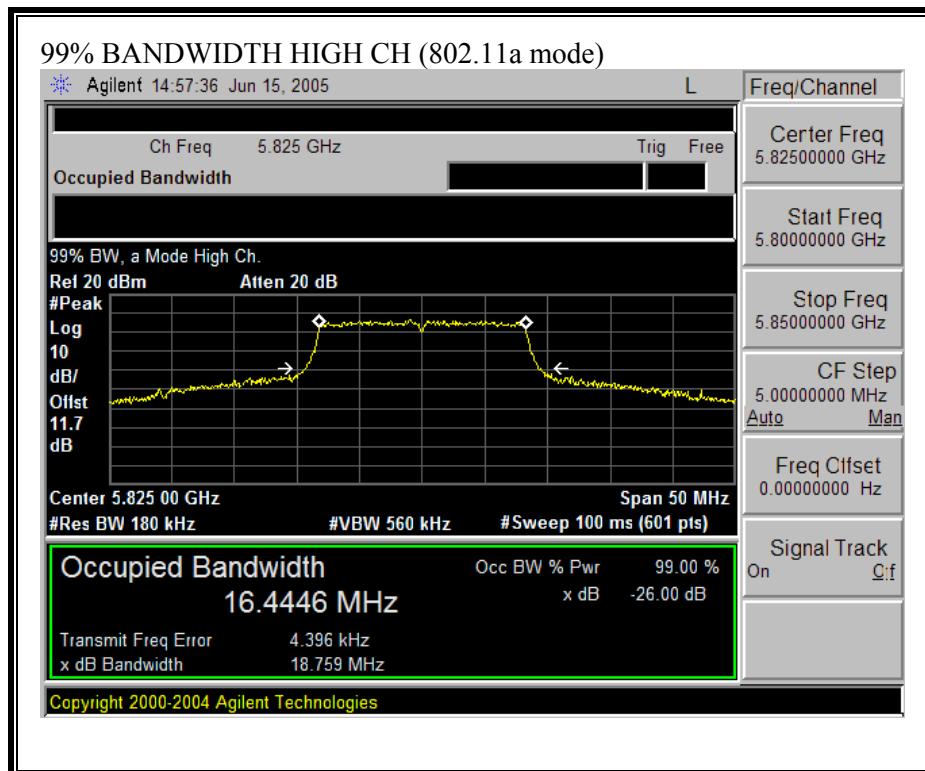

8.2.3. PEAK OUTPUT POWER

PEAK POWER LIMIT

§15.247 (b) The maximum peak output power of the intentional radiator shall not exceed the following:

§15.247 (b) (3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 watt.

§15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

§15.247 (b) (4) (ii) Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer and the analyzer's internal channel power integration function is used to integrate the power over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS

The maximum antenna gain is 5.7 dBi for other than fixed, point-to-point operations, therefore the limit is 30 dBm.


No non-compliance noted:

802.11a Mode


Channel	Frequency (MHz)	Peak Power (dBm)	Limit (dBm)	Margin (dB)
Low	5745	23.33	30	-6.67
Middle	5785	23.54	30	-6.46
High	5825	23.67	30	-6.33

OUTPUT POWER (802.11a MODE)


CHANNEL 149, 5745 MHz _ POWER = 17dBm (Gate Average Power)

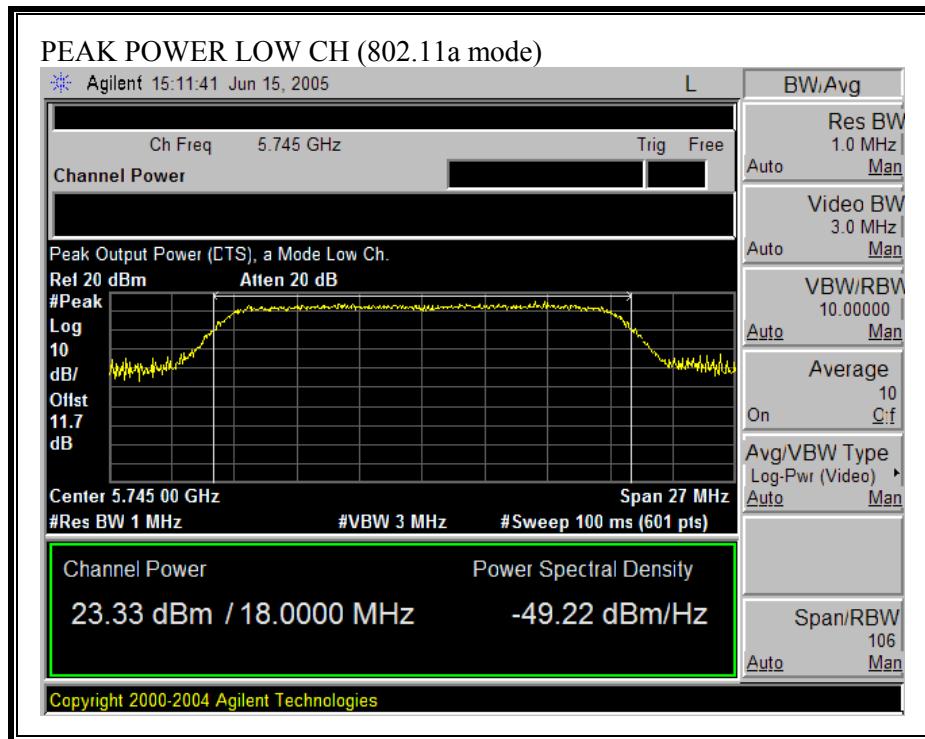

CHANNEL 157, 5785 MHz _ POWER = 17dBm (Gate Average Power)

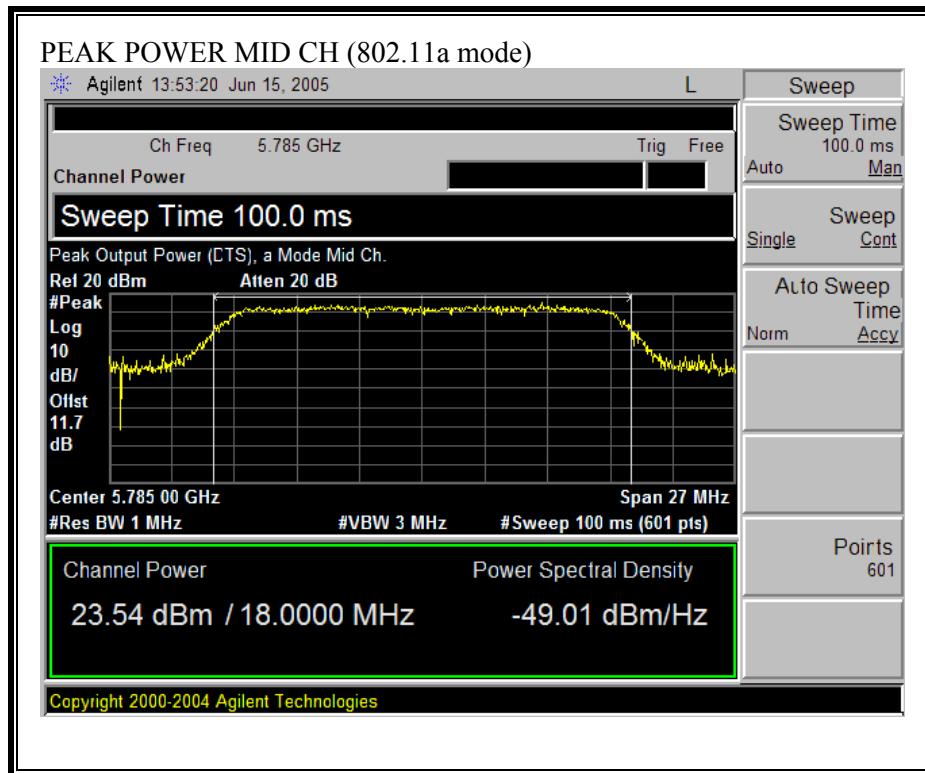

CHANNEL 165, 5825 MHz _ POWER = 17dBm (Gate Average Power)

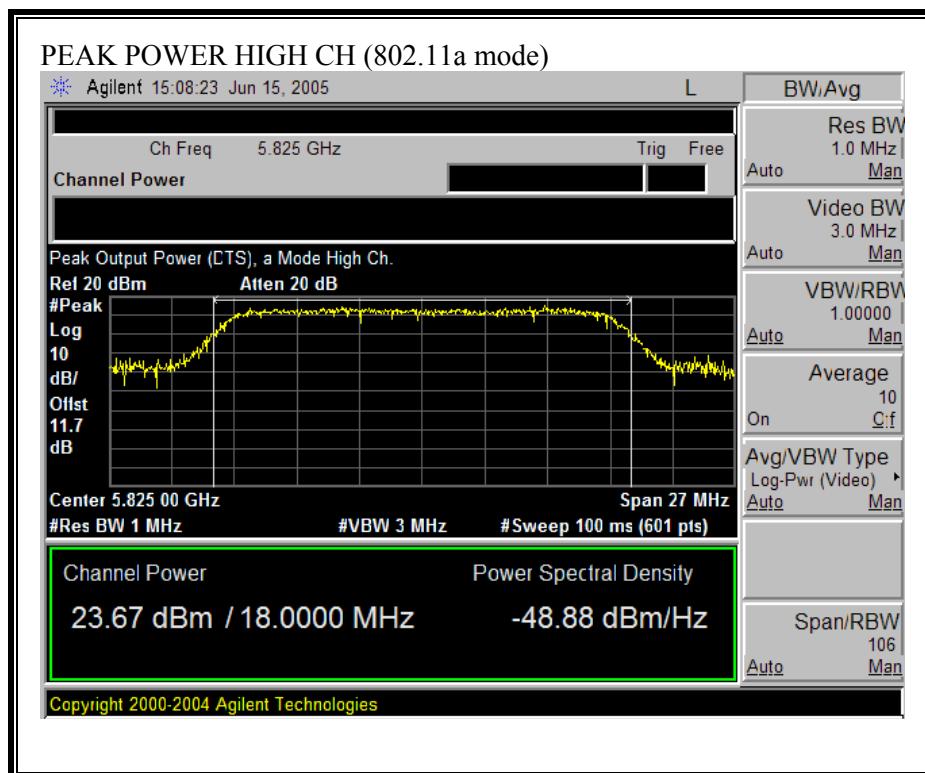

8.2.4. MAXIMUM PERMISSIBLE EXPOSURE

LIMITS

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations and rearranging the terms to express the distance as a function of the remaining variables yields:

$$d = \sqrt{((30 * P * G) / (3770 * S))}$$

Changing to units of Power to mW and Distance to cm, using:

$$P (\text{mW}) = P (\text{W}) / 1000 \text{ and}$$

$$d (\text{cm}) = 100 * d (\text{m})$$

yields

$$d = 100 * \sqrt{((30 * (P / 1000) * G) / (3770 * S))}$$

$$d = 0.282 * \sqrt{(P * G / S)}$$

where

d = distance in cm

P = Power in mW

G = Numeric antenna gain

S = Power Density in mW/cm²

Substituting the logarithmic form of power and gain using:

$$P (\text{mW}) = 10^{(P (\text{dBm}) / 10)} \text{ and}$$

$$G (\text{numeric}) = 10^{(G (\text{dBi}) / 10)}$$

yields

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

LIMITS

From §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

RESULTS

No non-compliance noted.

Mode	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	Power Density (mW/cm ²)
802.11a	20.0	23.67	5.70	0.17

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

8.2.5. AVERAGE POWER

AVERAGE POWER LIMIT

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

No non-compliance noted:

The cable assembly insertion loss of 11.7 dB (including 10 dB pad and 1.7 dB cable) was entered as an offset in the power meter to allow for direct reading of power.

READING OF POWER WAS TAKEN BY PEAK POWER METER WITH PACKET 45 Mbps

802.11a Mode (Gate Average Power)

Channel	Frequency (MHz)	Average Power (dBm)
Low	5745	17.00
Middle	5785	16.80
High	5825	16.84

8.2.6. PEAK POWER SPECTRAL DENSITY

LIMIT

§15.247 (d) For direct sequence systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer, the maximum level in a 3 kHz bandwidth is measured with the spectrum analyzer using RBW = 3 kHz and VBW > 3 kHz, sweep time = span / 3 kHz, and video averaging is turned off. The PPSD is the highest level found across the emission in any 3 kHz band.


RESULTS


No non-compliance noted:


802.11a Mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5745	-7.59	8	-15.59
Middle	5785	-7.65	8	-15.65
High	5825	-10.26	8	-18.26

POWER SPECTRAL DENSITY (802.11a MODE)

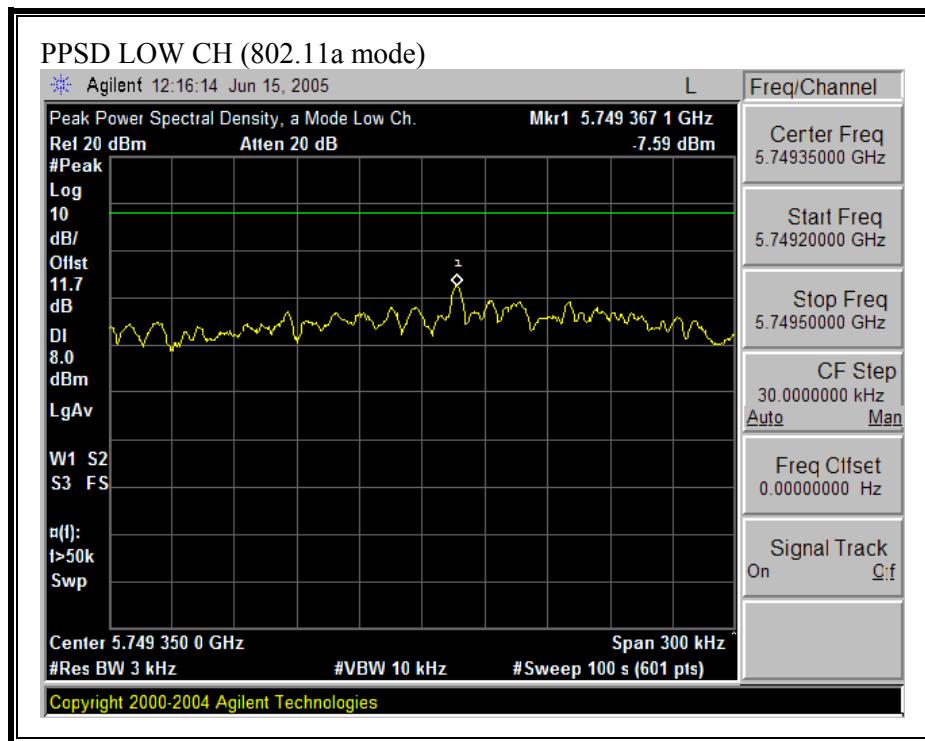

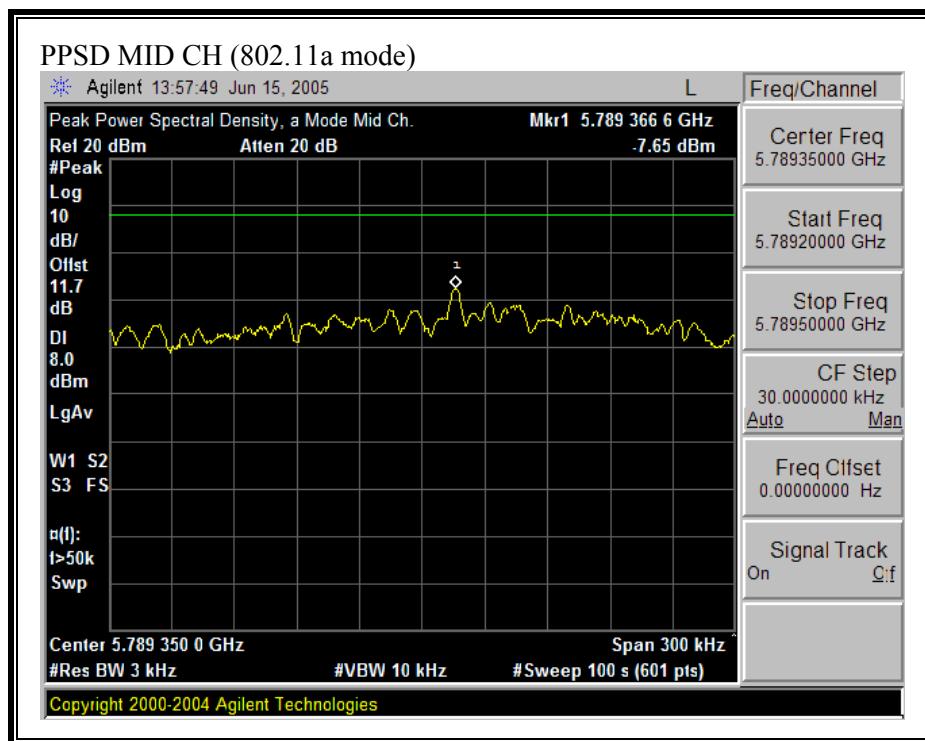

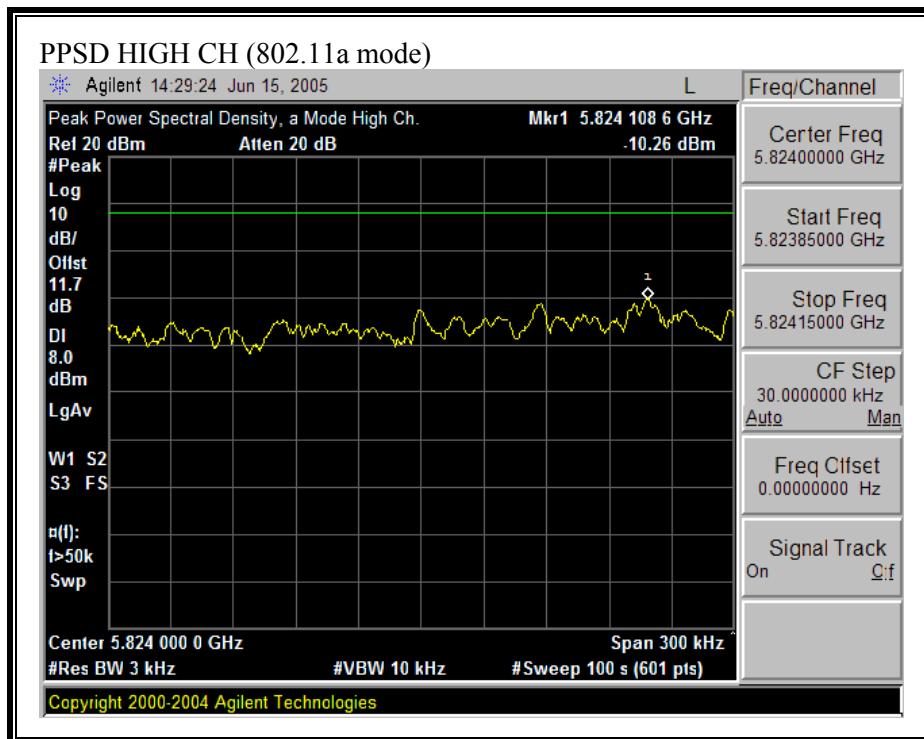

8.2.7. CONDUCTED SPURIOUS EMISSIONS

LIMITS

§15.247 (c) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


RESULTS

No non-compliance noted:

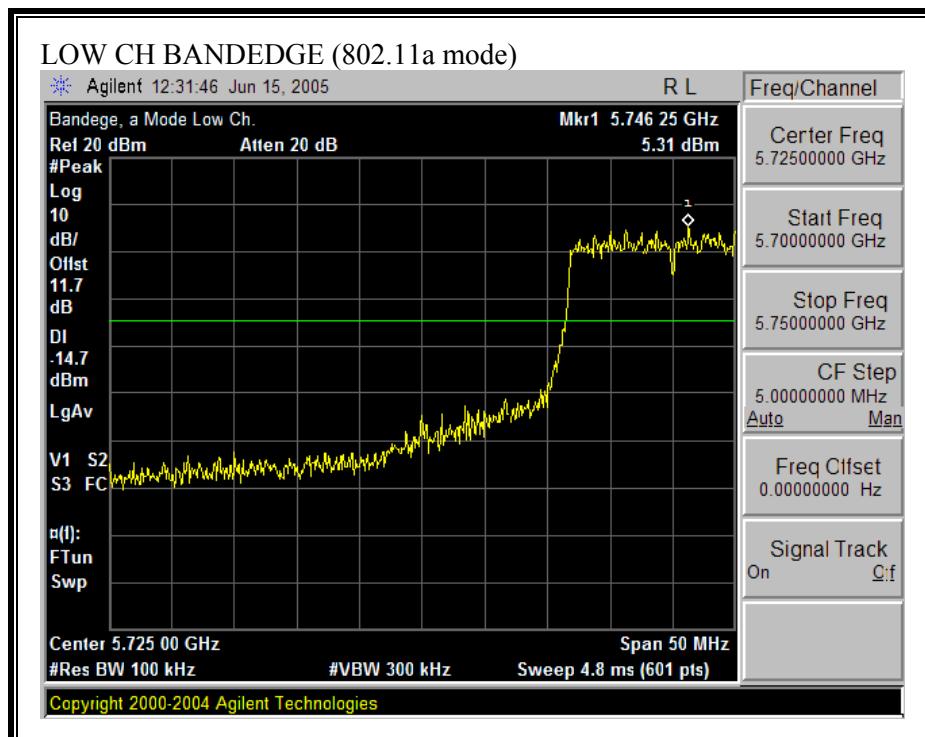
SPURIOUS EMISSIONS, LOW CHANNEL (802.11a MODE)

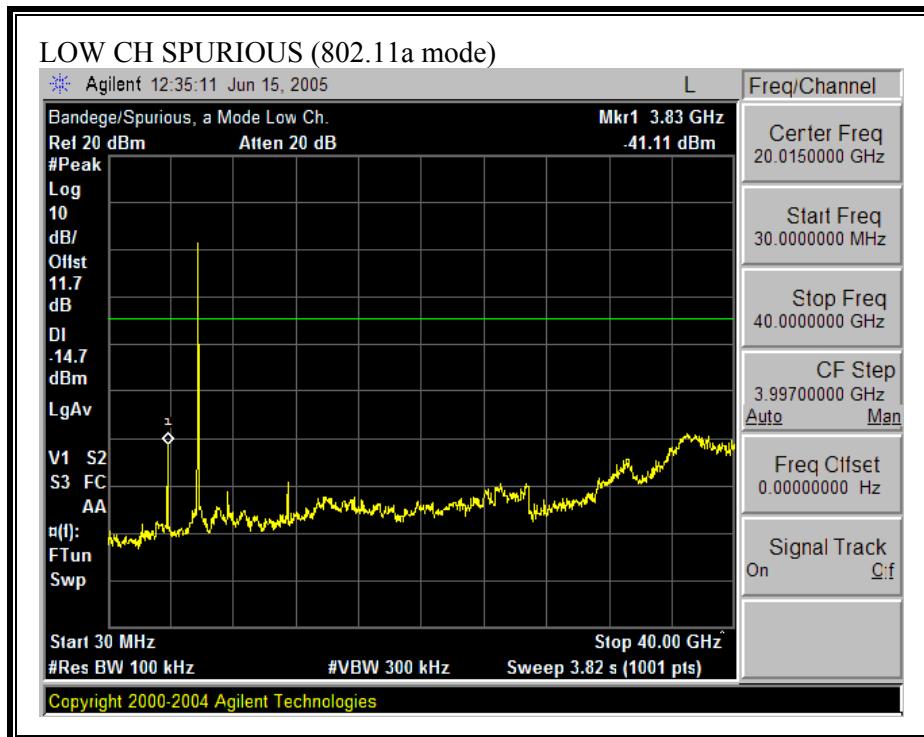


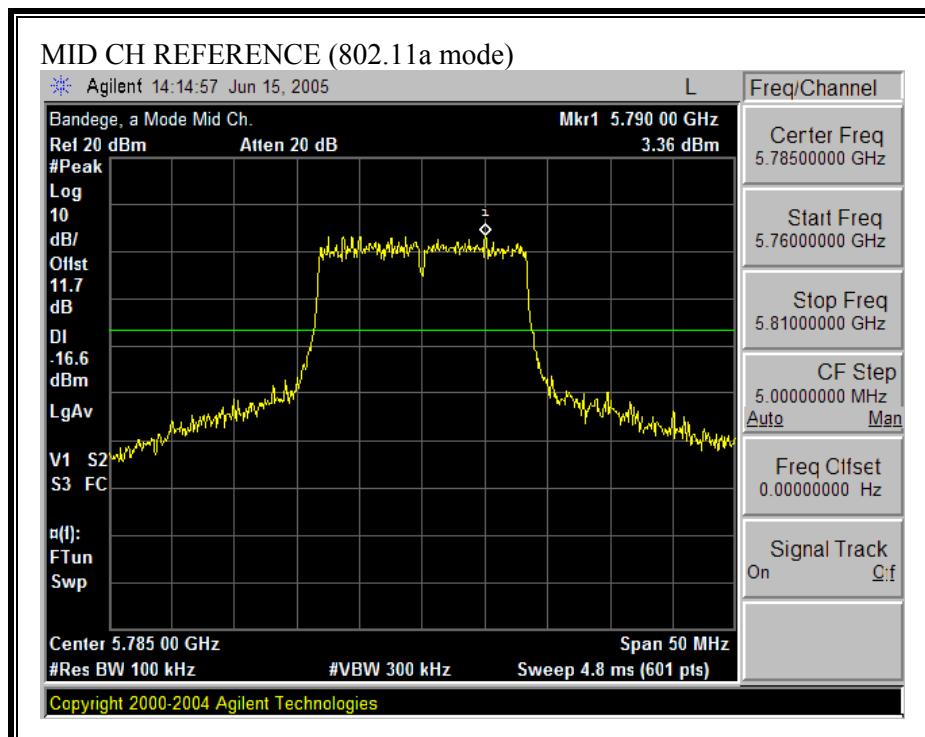SPURIOUS EMISSIONS, MID CHANNEL (802.11a MODE)

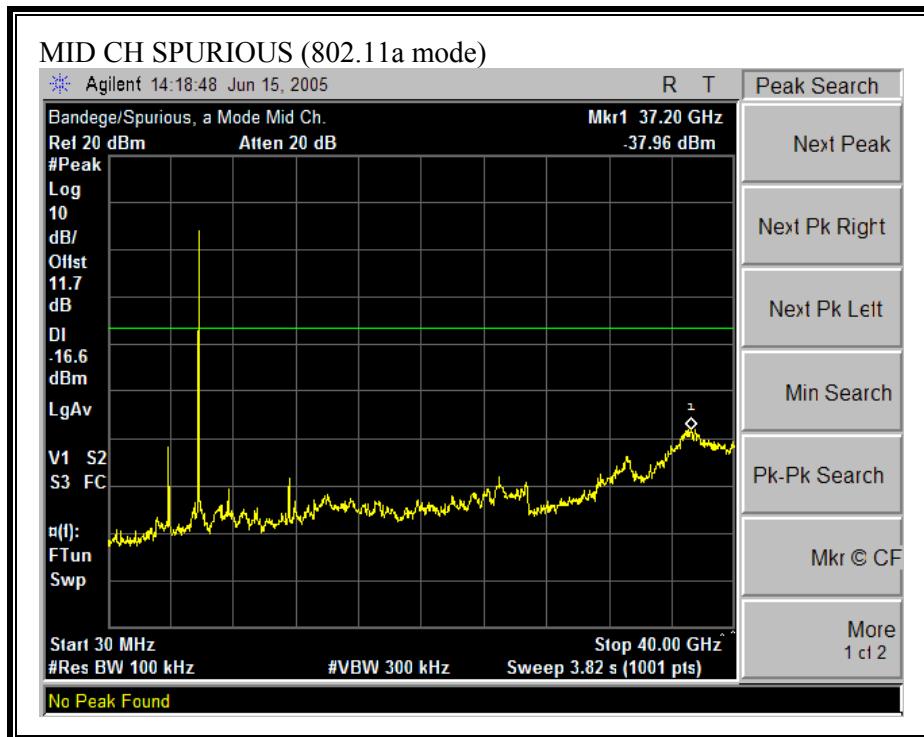

SPURIOUS EMISSIONS, HIGH CHANNEL (802.11a MODE)

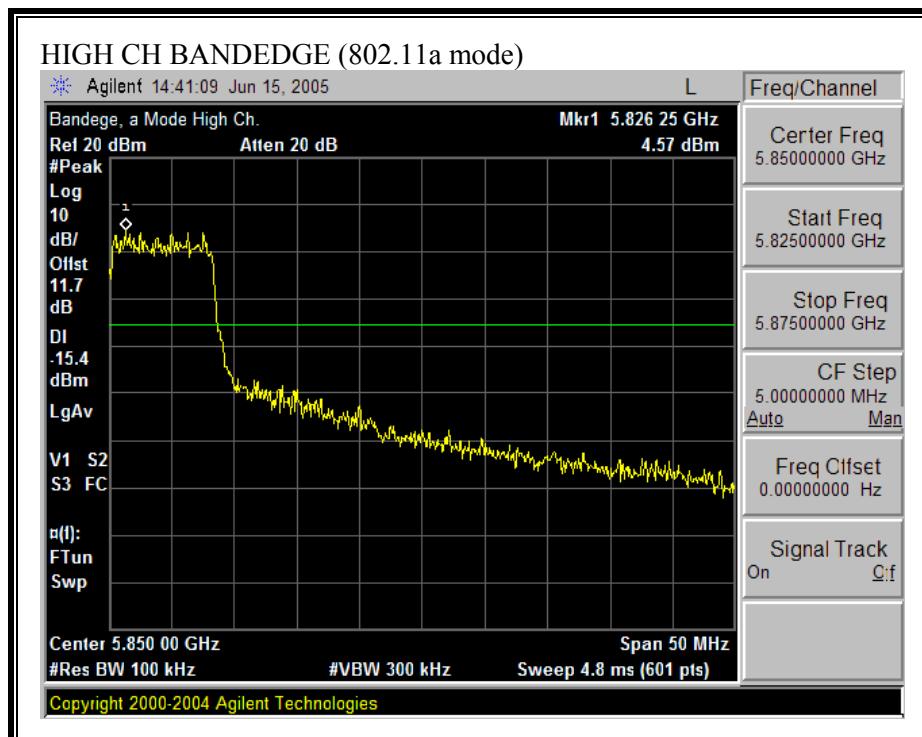

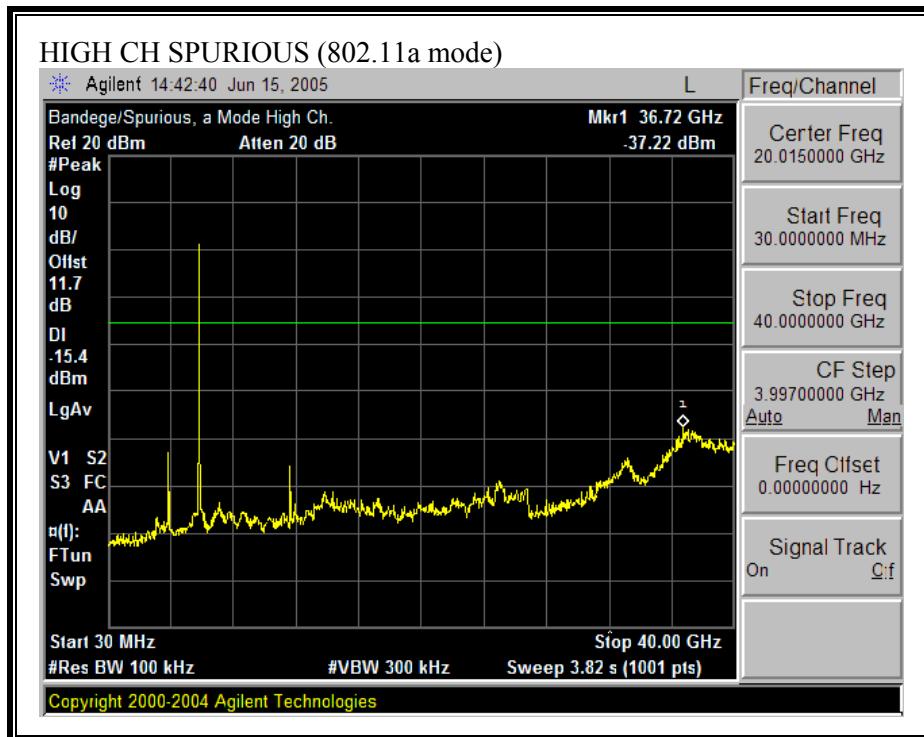

8.3. RADIATED EMISSIONS

8.3.1. TRANSMITTER RADIATED SPURIOUS EMISSIONS

LIMITS

§15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

§15.205 (b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

§15.209 (a) Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
30 - 88	100 **	3
88 - 216	150 **	3
216 - 960	200 **	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

§15.209 (b) In the emission table above, the tighter limit applies at the band edges.

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each 5 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.


8.3.2. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND_b Mode


CHANNEL 1, 2412 MHz - TRANSMITTING POWER = 19 dBm


RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, HORIZONTAL)

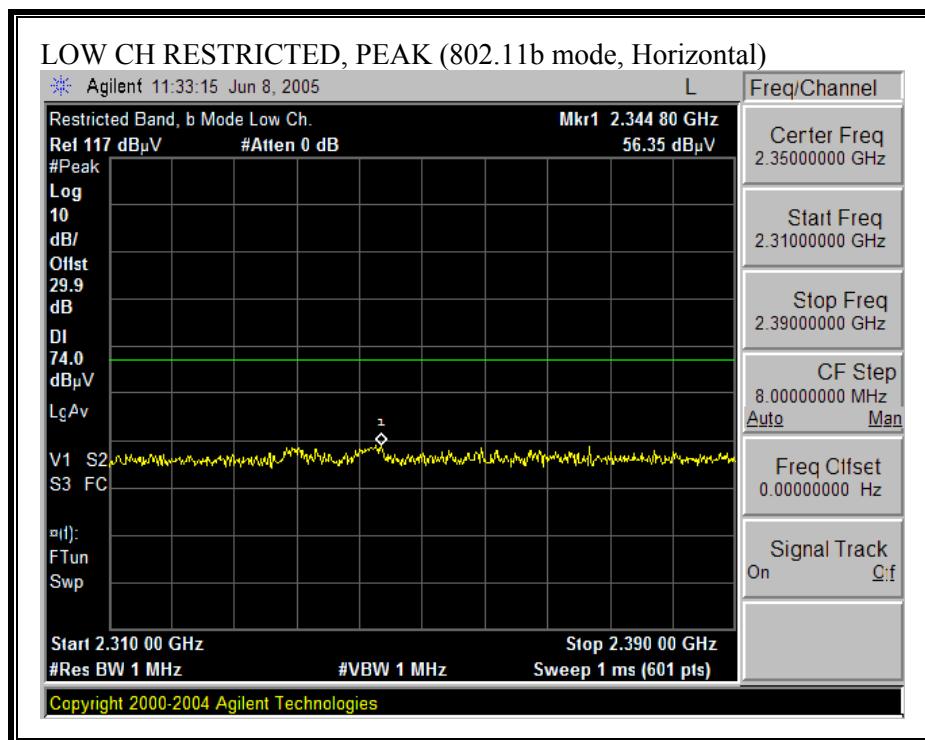


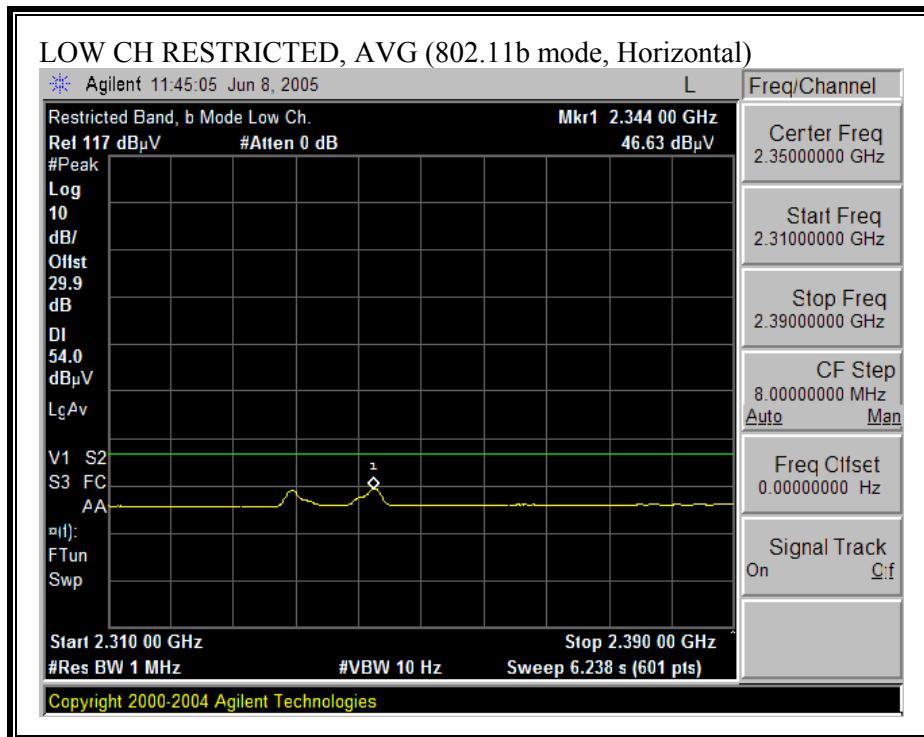


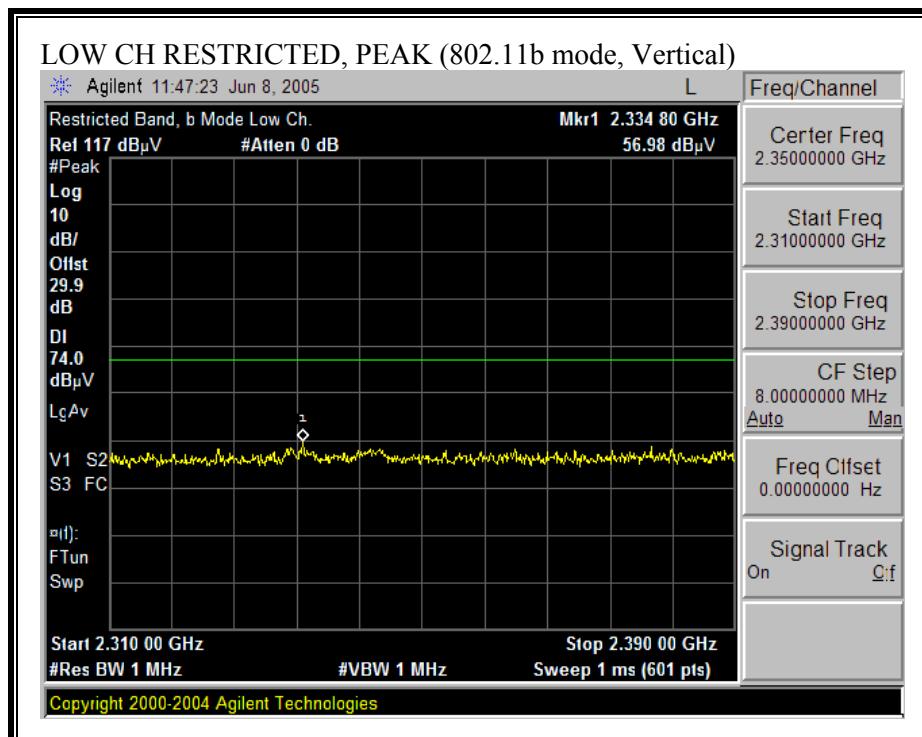
RESTRICTED BANDEDGE (b MODE, LOW CHANNEL, VERTICAL)

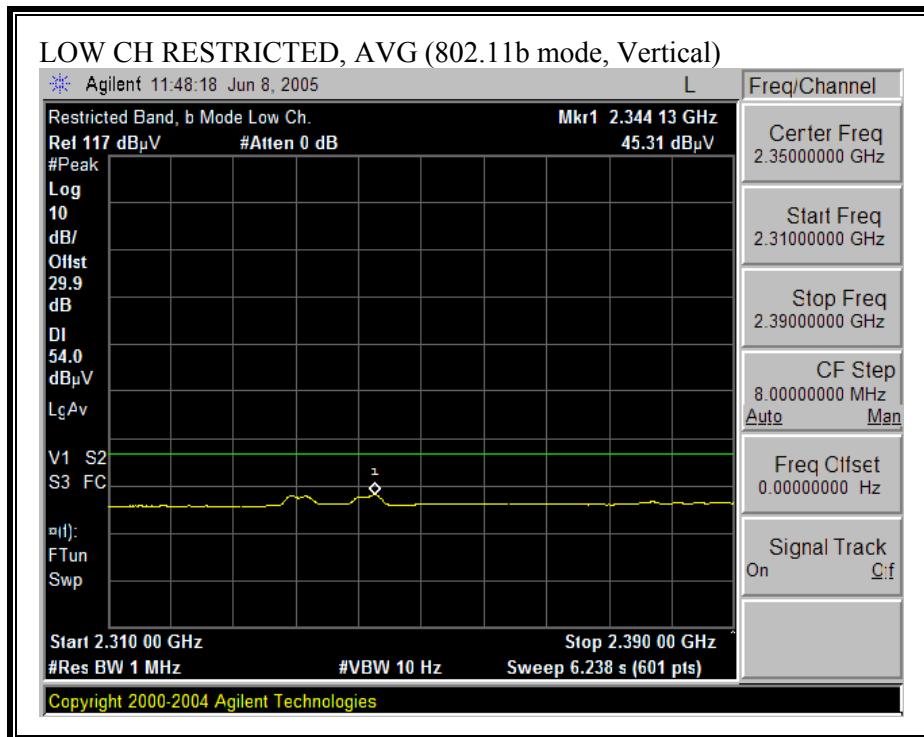


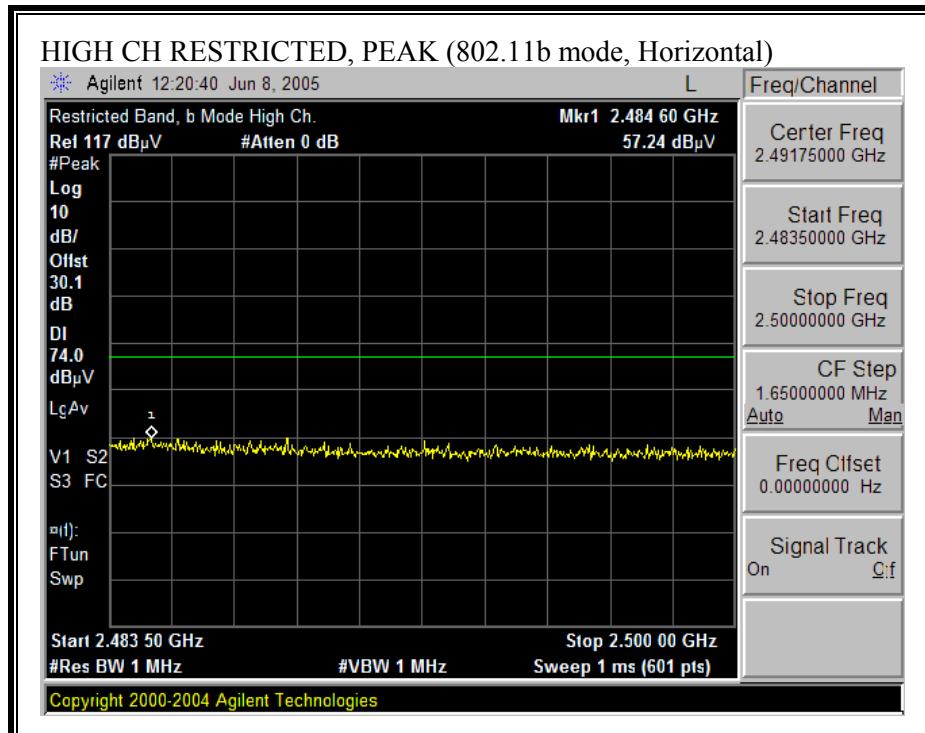
CHANNEL 11, TRANSMITTING = 19 dBm**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

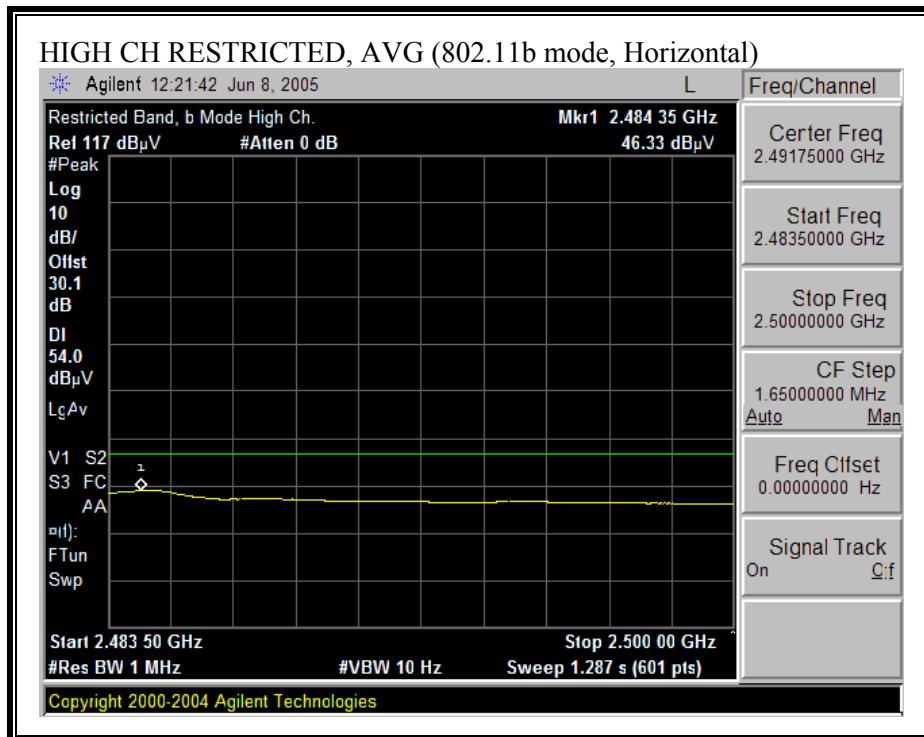


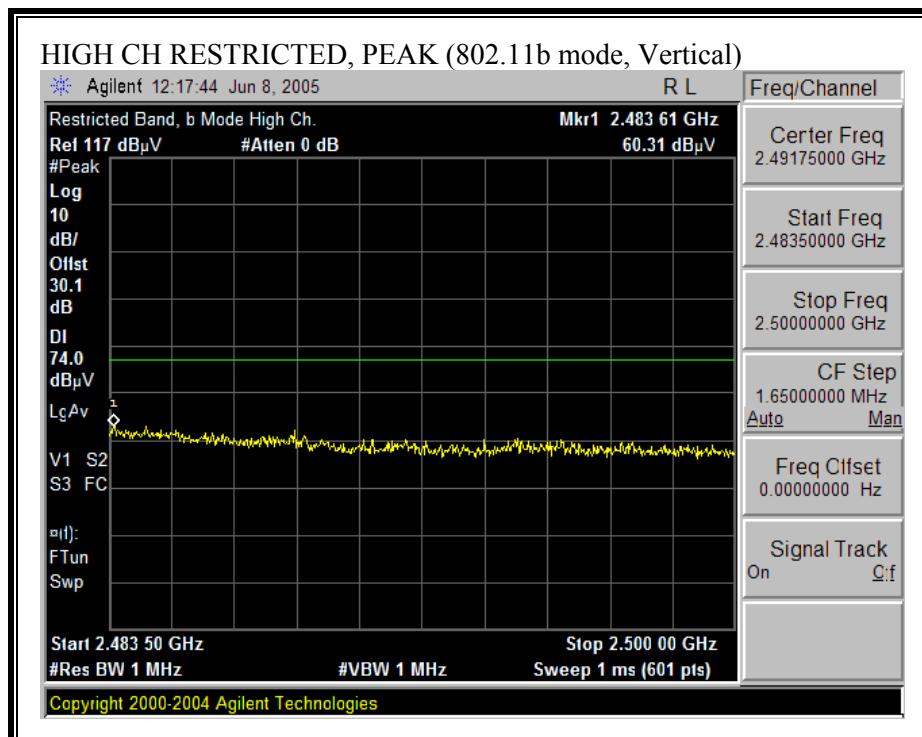
RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

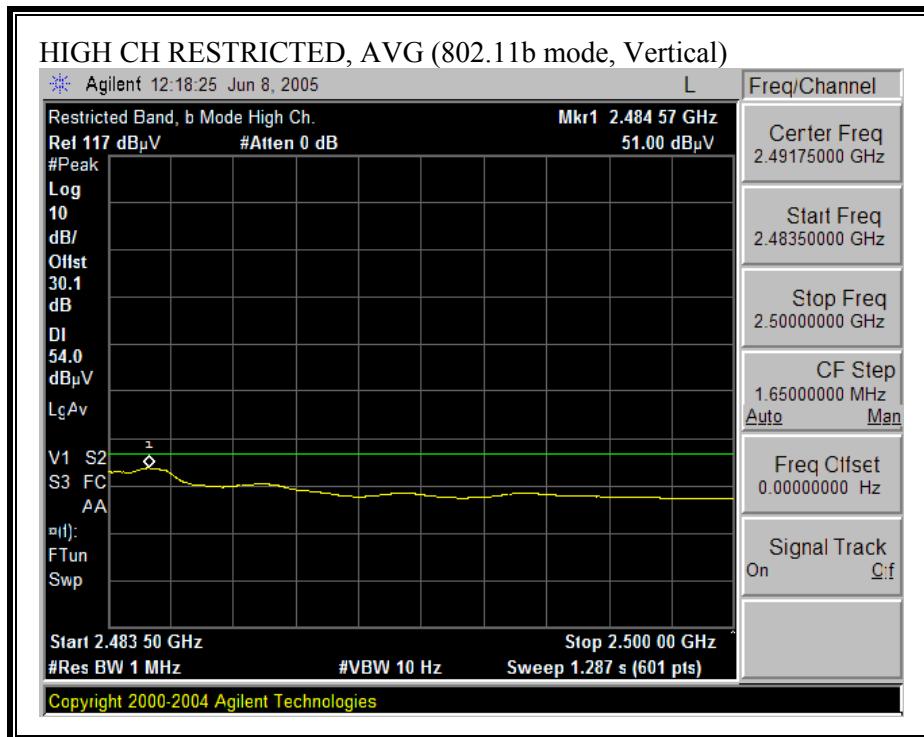

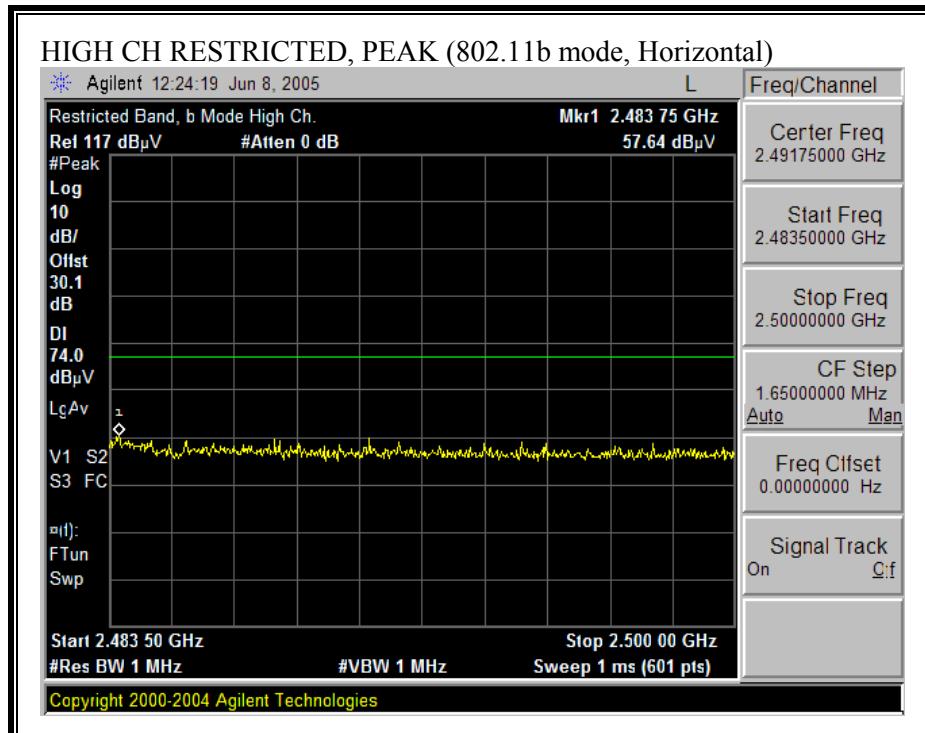CHANNEL 13, TRANSMITTING = 10 dBm**RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, HORIZONTAL)**

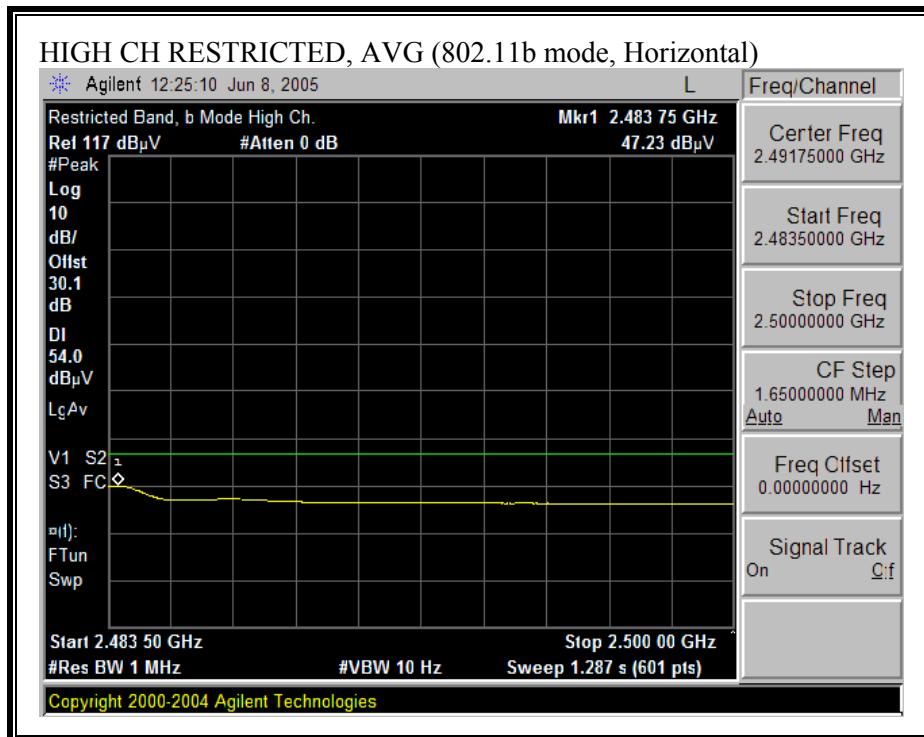

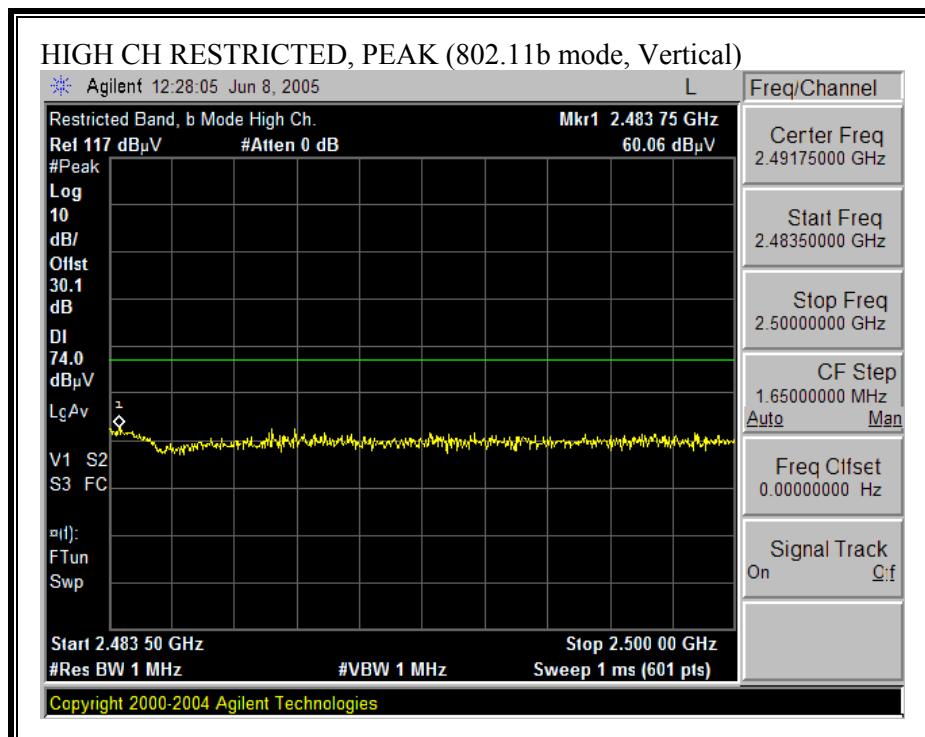RESTRICTED BANDEDGE (b MODE, HIGH CHANNEL, VERTICAL)

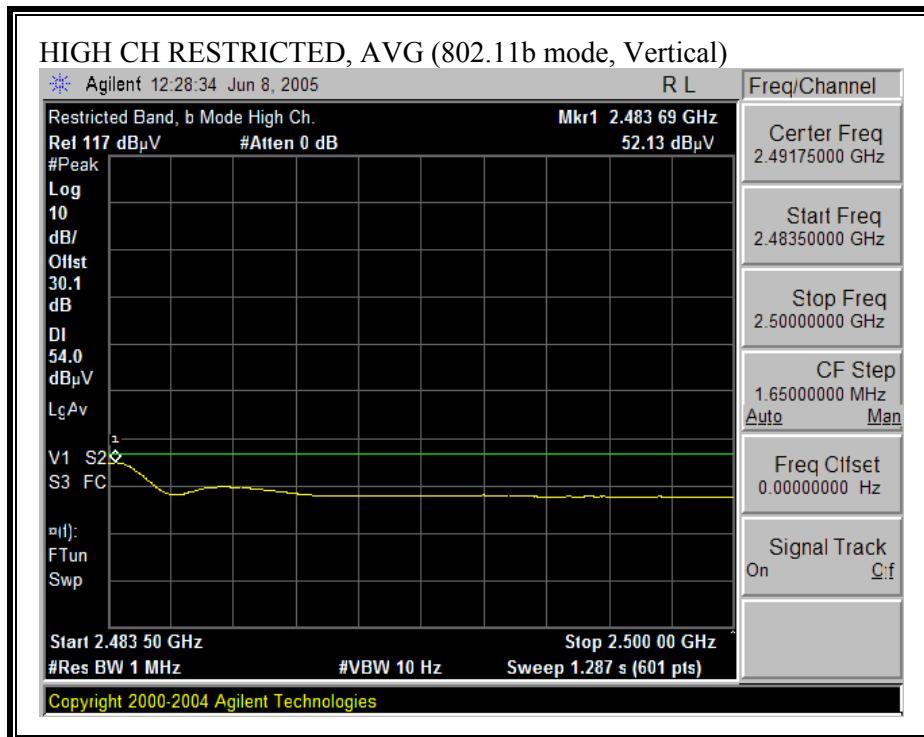

HARMONICS AND SPURIOUS EMISSIONS (802.11b MODE)


Power: Channel 1, 6, & 13 = 19dBm Bit Rate: 11Mbps for Peak and 1Mbps for Average reading.


06/21/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site															
Test Engr: VIEN TRAN Project #: 05U3487 Company: BROADCOM EUT Descrip.:802.11ag Mini PCI Express Card EUT M/N:BCM94311MCAG Test Target:FCC 15.247 Mode Oper:11b_TX LOW, MID, HI CHANNEL _ HARMONIC & SPUR Average Power Meter: Low = xx dBm, Mid = xx dBm, High = xx dBm															
Test Equipment:															
EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn >18GHz				Limit								
T73; S/N: 6717 @3m	T63 Miteq 646456													FCC 15.209	
Hi Frequency Cables															
2 foot cable	3 foot cable	4 foot cable	12 foot cable	HPF	RejectFilter	Peak Measurements RBW=VBW=1MHz									
2_Vien			12_Vien	HPF_4.0GHz	R_002	Average Measurements RBW=1MHz ; VBW=10Hz									
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
LOW CH=2412 MHz															
4.824	3.0	56.0	52.7	33.7	3.1	-37.9	0.0	0.6	55.5	52.2	74	54	-18.5	-1.8	H
7.236	3.0	49.0	44.4	35.4	3.7	-37.0	0.0	0.6	51.8	47.2	74	54	-22.2	-6.8	H
9.648	3.0	50.7	46.8	37.5	4.4	-36.2	0.0	0.8	57.2	53.3	74	54	-16.8	-0.7	H
12.060	3.0	45.8	35.5	38.5	5.6	-37.6	0.0	0.9	53.2	42.9	74	54	-20.8	-11.1	H
4.824	3.0	54.8	52.2	33.7	3.1	-37.9	0.0	0.6	54.3	51.7	74	54	-19.7	-2.3	V
7.236	3.0	47.0	39.0	35.4	3.7	-37.0	0.0	0.6	49.8	41.8	74	54	-24.2	-12.2	V
9.648	3.0	50.0	45.5	37.5	4.4	-36.2	0.0	0.8	56.5	52.0	74	54	-17.5	-2.0	V
12.060	3.0	46.7	36.0	38.5	5.6	-37.6	0.0	0.9	54.1	43.4	74	54	-19.9	-10.6	V
MID CH=2437MHz															
4.874	3.0	55.6	52.3	33.8	3.1	-37.9	0.0	0.6	55.2	51.9	74	54	-18.8	-2.1	H
7.311	3.0	51.0	44.7	35.5	3.7	-36.9	0.0	0.6	53.9	47.6	74	54	-20.1	-6.4	H
9.748	3.0	49.8	46.5	37.5	4.4	-36.1	0.0	0.8	56.4	53.1	74	54	-17.6	-0.9	H
12.185	3.0	46.6	35.0	38.5	5.6	-37.7	0.0	0.9	53.9	42.3	74	54	-20.1	-11.7	H
4.874	3.0	54.6	51.7	33.8	3.1	-37.9	0.0	0.6	54.2	51.3	74	54	-19.8	-2.7	V
7.311	3.0	50.0	41.5	35.5	3.7	-36.9	0.0	0.6	52.9	44.4	74	54	-21.1	-9.6	V
9.748	3.0	51.0	46.1	37.5	4.4	-36.1	0.0	0.8	57.6	52.7	74	54	-16.4	-1.3	V
12.185	3.0	44.0	33.0	38.5	5.6	-37.7	0.0	0.9	51.3	40.3	74	54	-22.7	-13.7	V
HI CH=2472MHz															
4.944	3.0	56.5	53.2	33.8	3.1	-37.9	0.0	0.6	56.2	52.9	74	54	-17.8	-1.1	H
7.416	3.0	50.0	44.0	35.6	3.8	-36.8	0.0	0.6	53.2	47.2	74	54	-20.8	-6.8	H
9.888	3.0	51.0	46.0	37.6	4.5	-36.1	0.0	0.8	57.9	52.9	74	54	-16.1	-1.1	H
12.360	3.0	44.0	33.0	38.5	5.6	-37.8	0.0	0.9	51.2	40.2	74	54	-22.8	-13.8	H
4.944	3.0	54.8	52.2	33.8	3.1	-37.9	0.0	0.6	54.5	51.9	74	54	-19.5	-2.1	V
7.416	3.0	45.6	36.0	35.6	3.8	-36.8	0.0	0.6	48.8	39.2	74	54	-25.2	-14.8	V
9.888	3.0	50.5	45.8	37.6	4.5	-36.1	0.0	0.8	57.4	52.7	74	54	-16.6	-1.3	V
12.360	3.0	46.4	35.5	38.5	5.6	-37.8	0.0	0.9	53.6	42.7	74	54	-20.4	-11.3	V
NO OTHER EMISSIONS WERE DETECTED AFTER 5TH HARMONIC															
f	Measurement Frequency	Amp	Preamp Gain												
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters												
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m												
AF	Antenna Factor	Peak	Calculated Peak Field Strength												
CL	Cable Loss	HPF	High Pass Filter												
				Avg Lim	Average Field Strength Limit										
				Pk Lim	Peak Field Strength Limit										
				Avg Mar	Margin vs. Average Limit										
				Pk Mar	Margin vs. Peak Limit										


8.3.3. TRANSMITTER ABOVE 1 GHz FOR 2400 TO 2483.5 MHz BAND_g Mode


CHANNEL 1, 2412 MHz - TRANSMITTING POWER = 18 dBm

RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

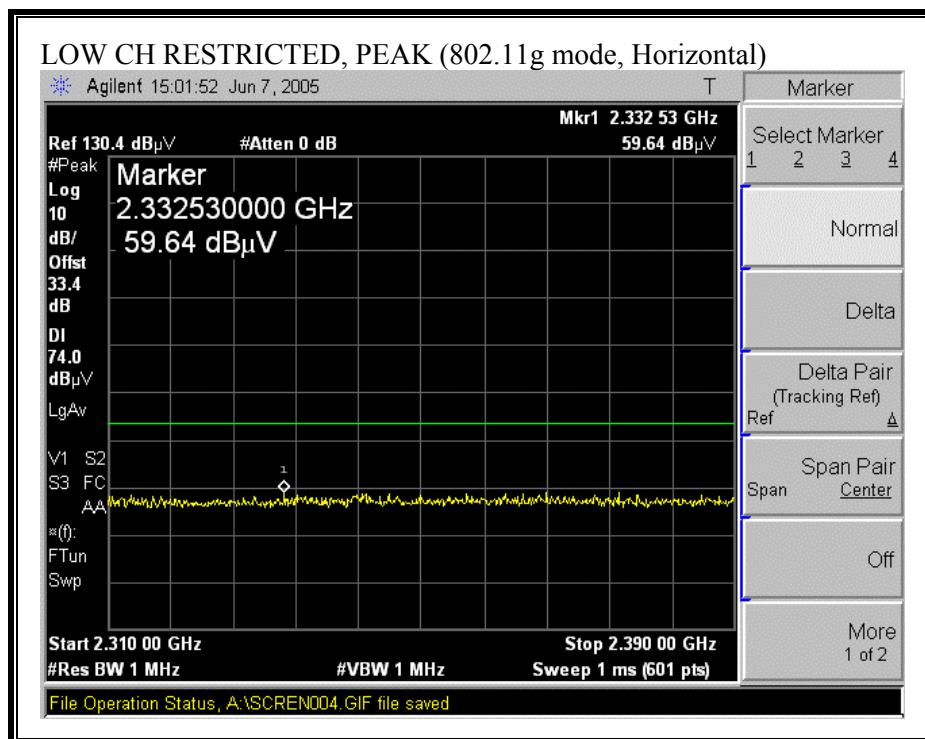

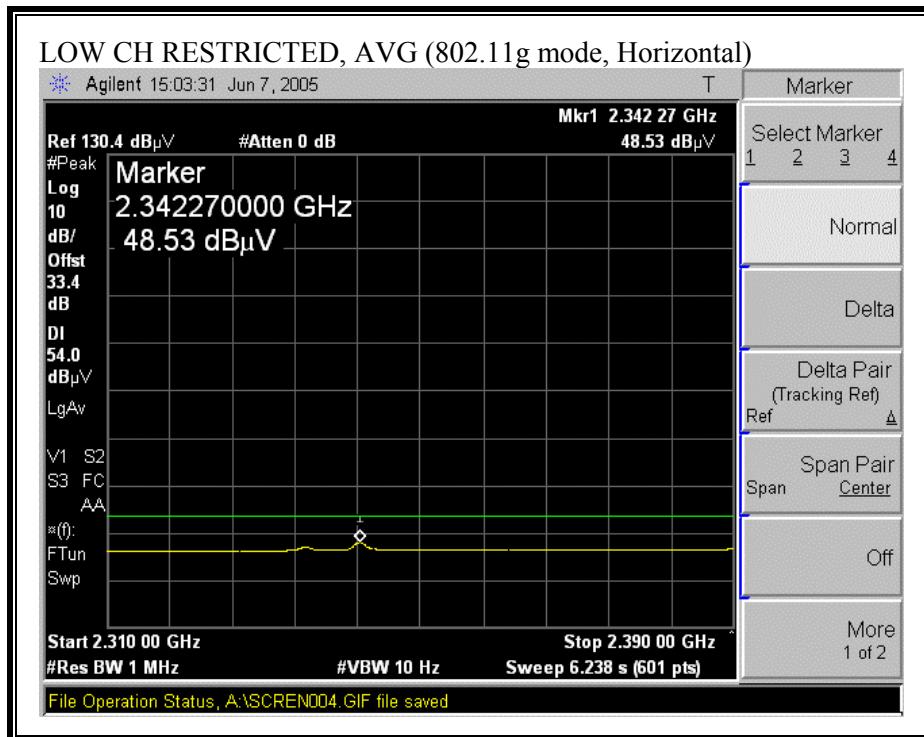


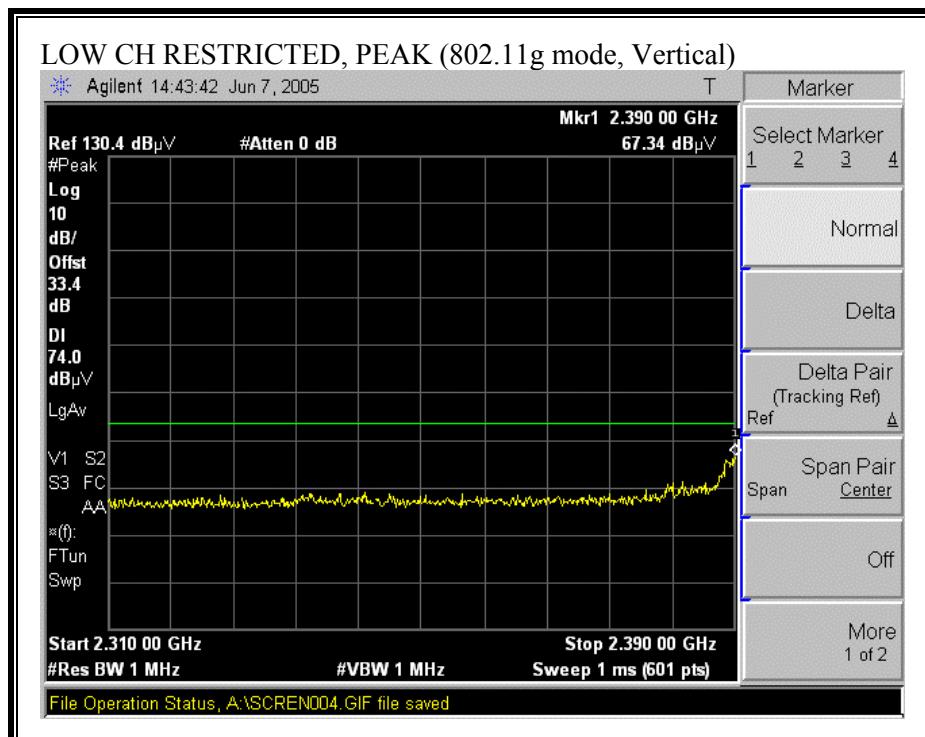
RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

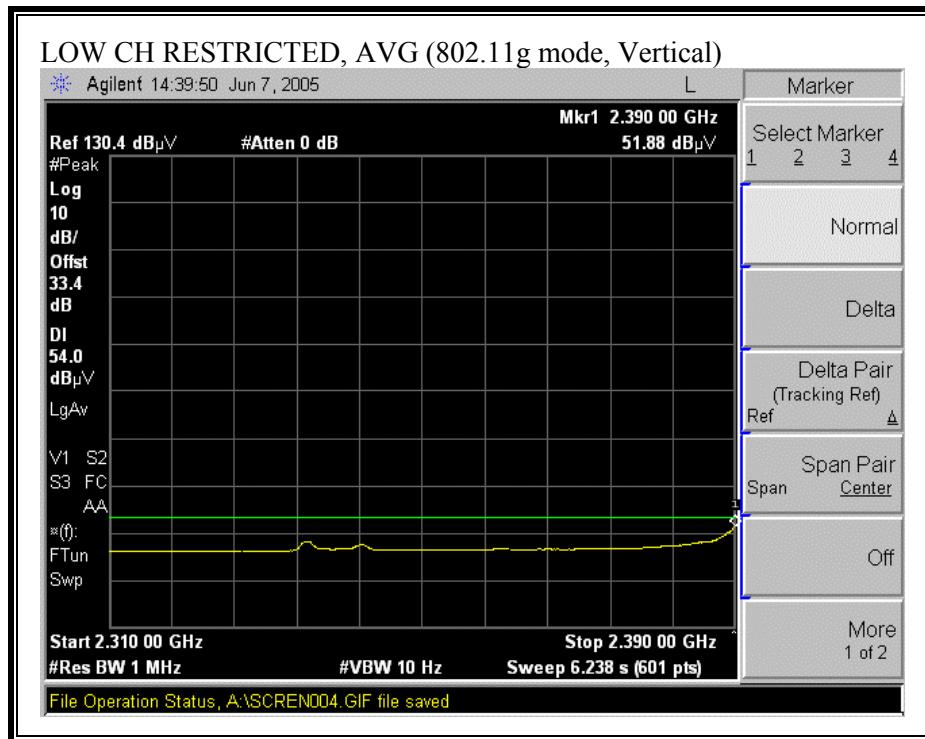



CHANNEL 2, 2417 MHZ - TRANSMITTING POWER = 19 dBm


RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, HORIZONTAL)

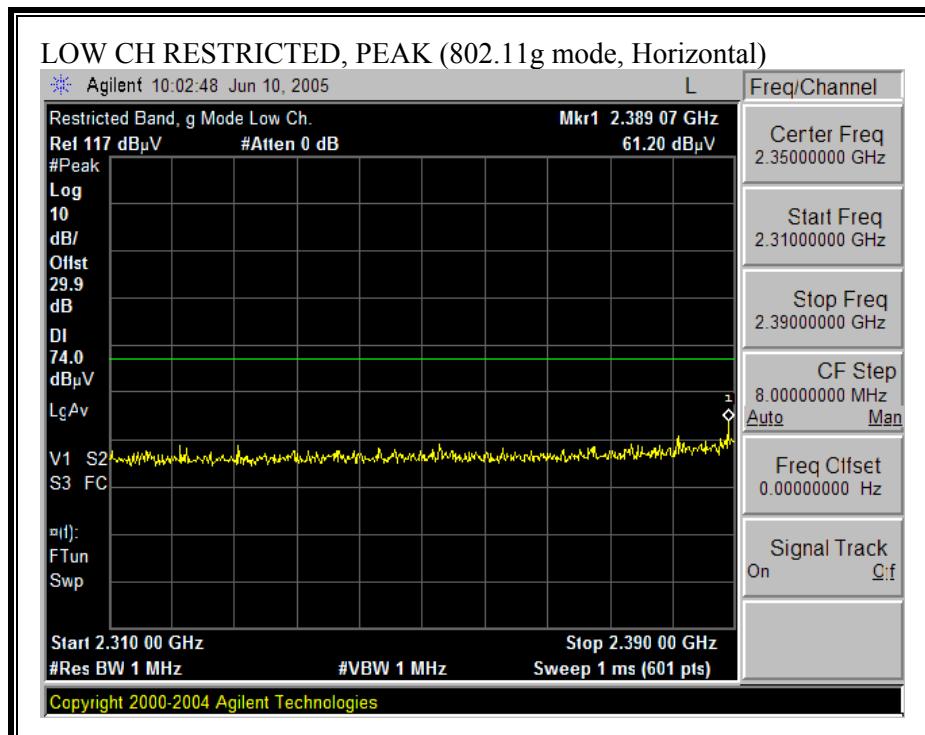


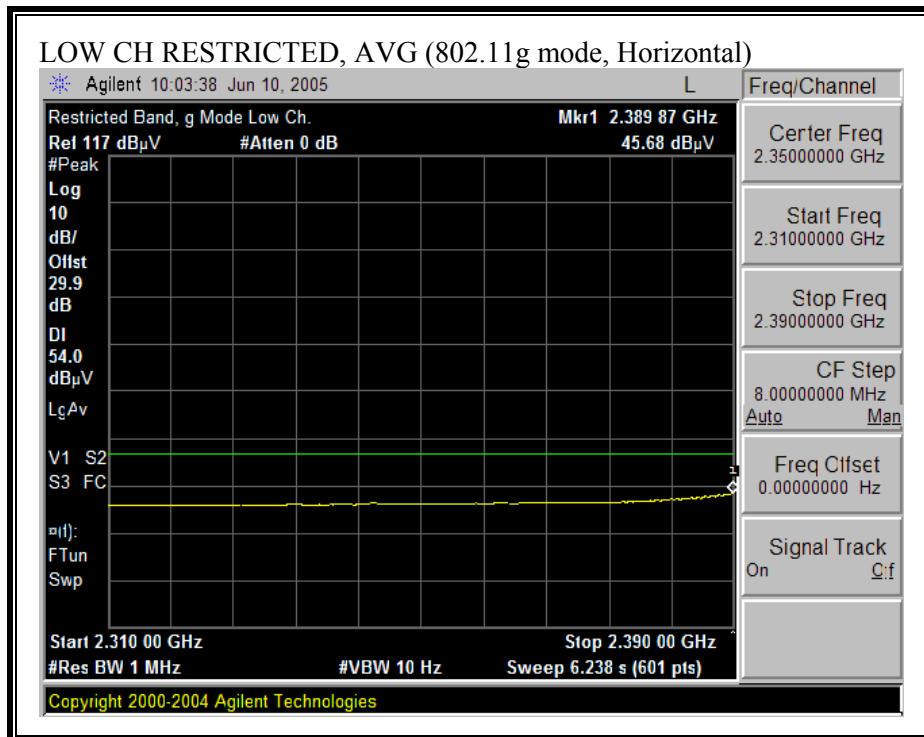


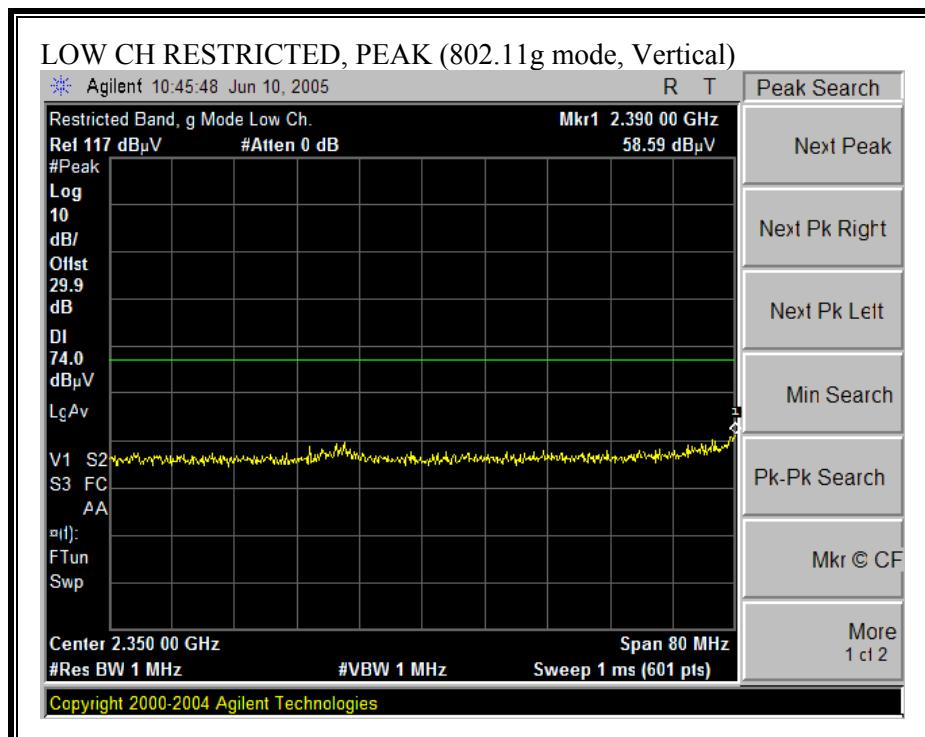
RESTRICTED BANDEDGE (g MODE, LOW CHANNEL, VERTICAL)

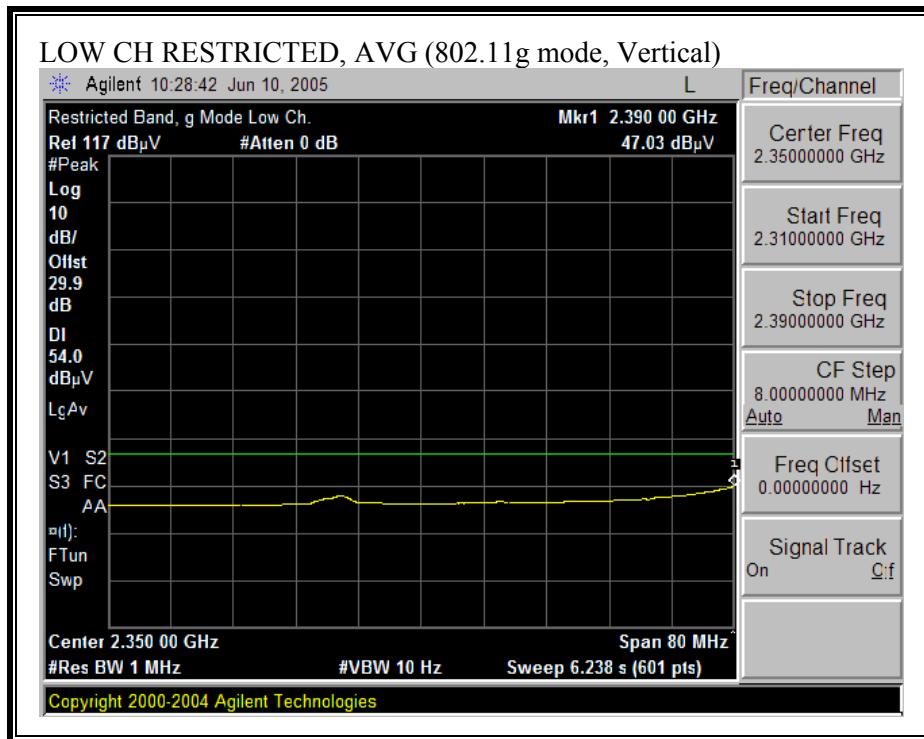


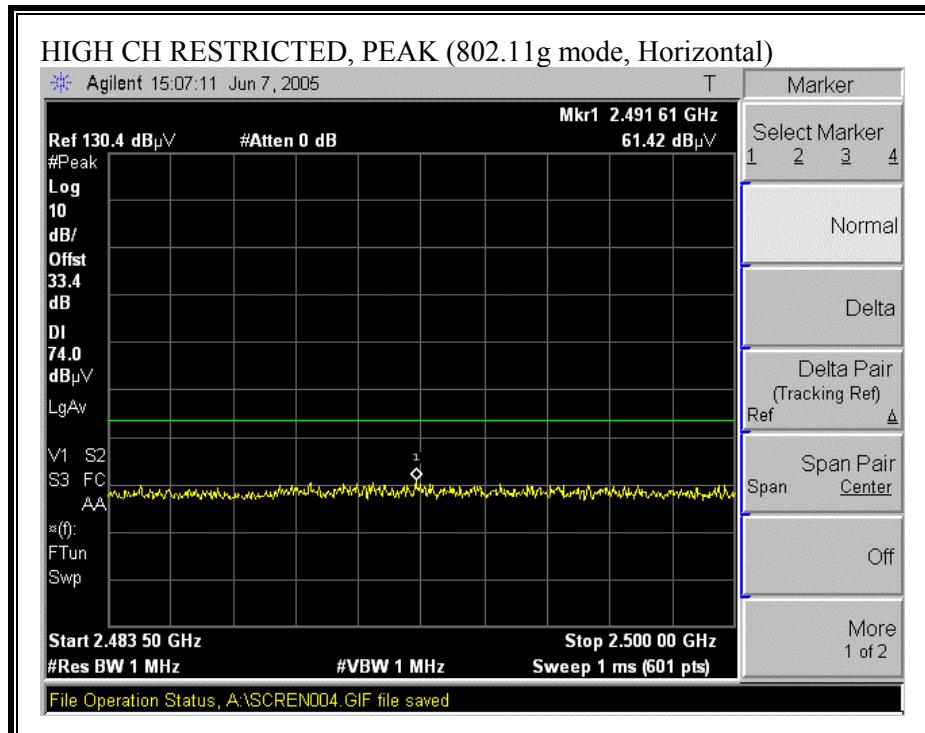
CHANNEL 10 MHz – TRANSMITTING POWER = 19 dBm**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

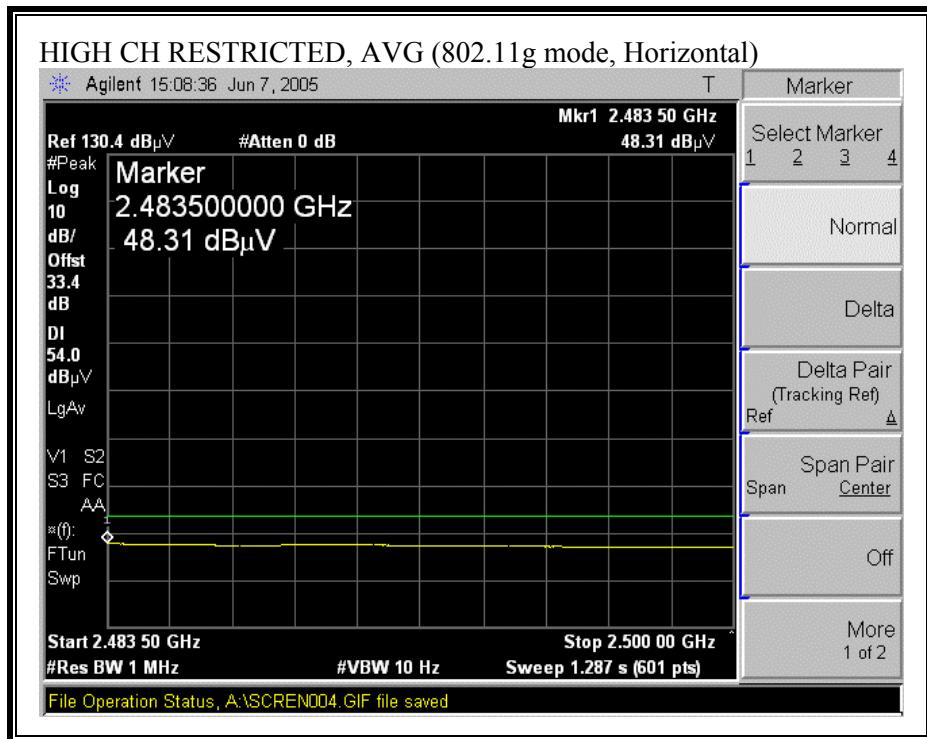


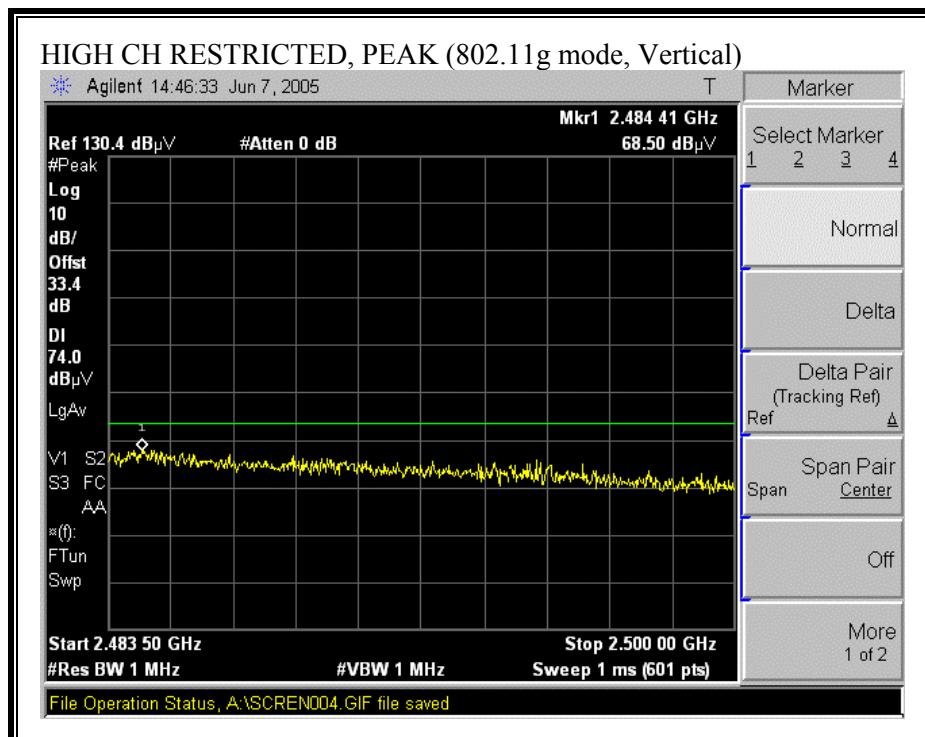
RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

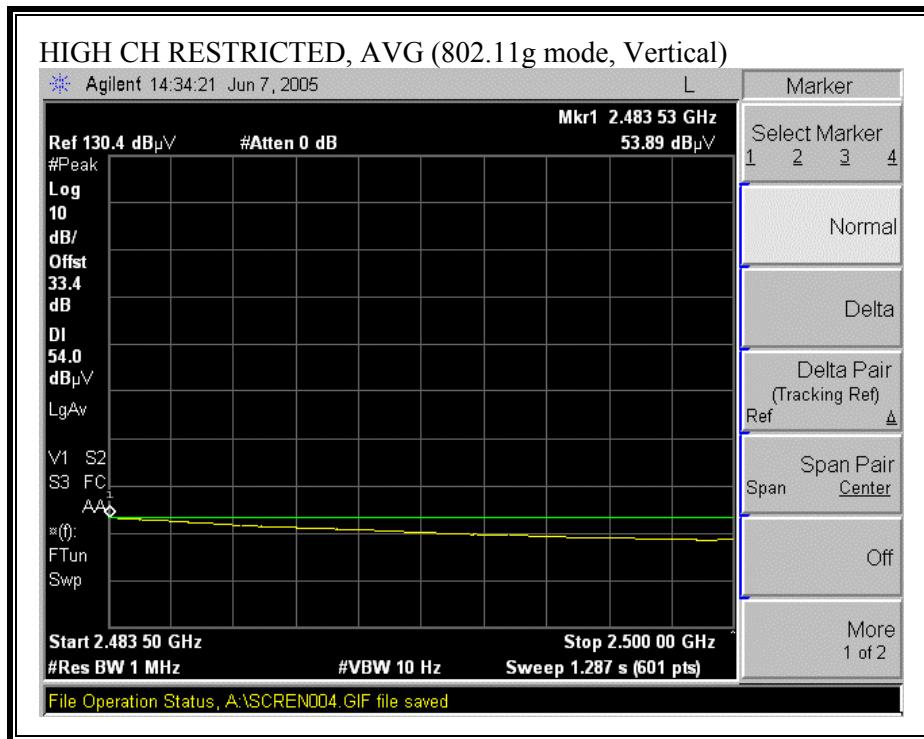


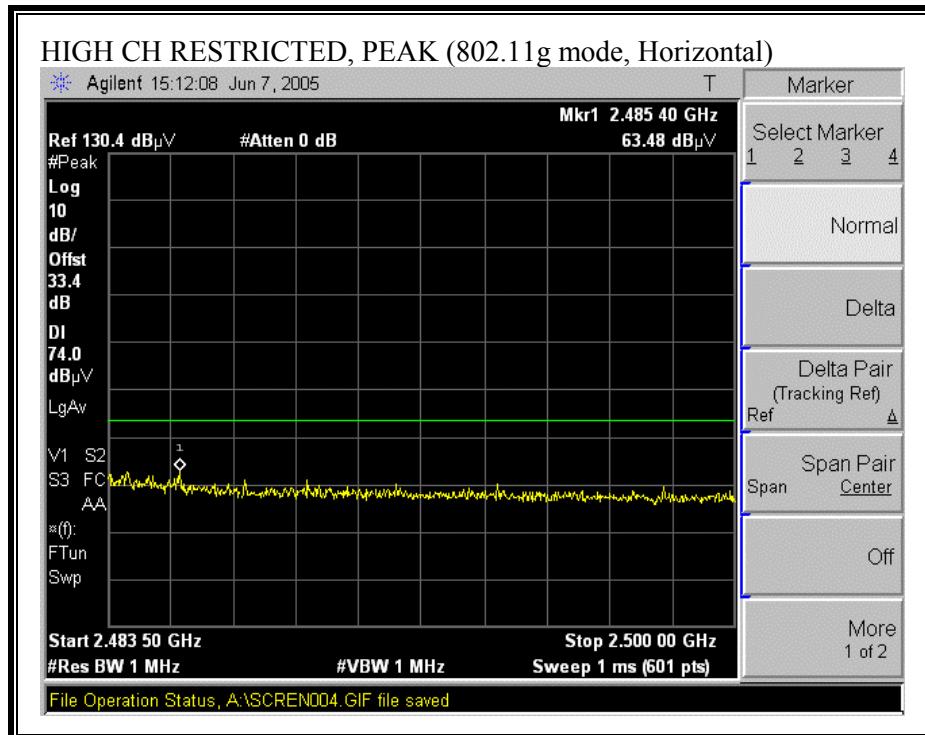
CHANNEL 11, 2462 MHz - TRANSMITTING = 17 dBm**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

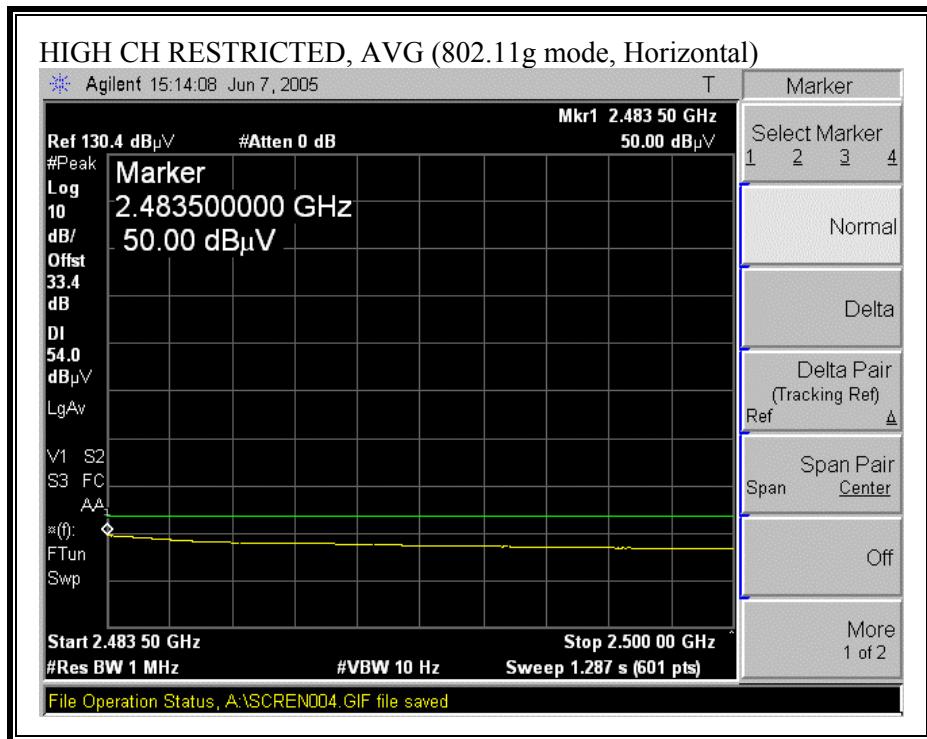


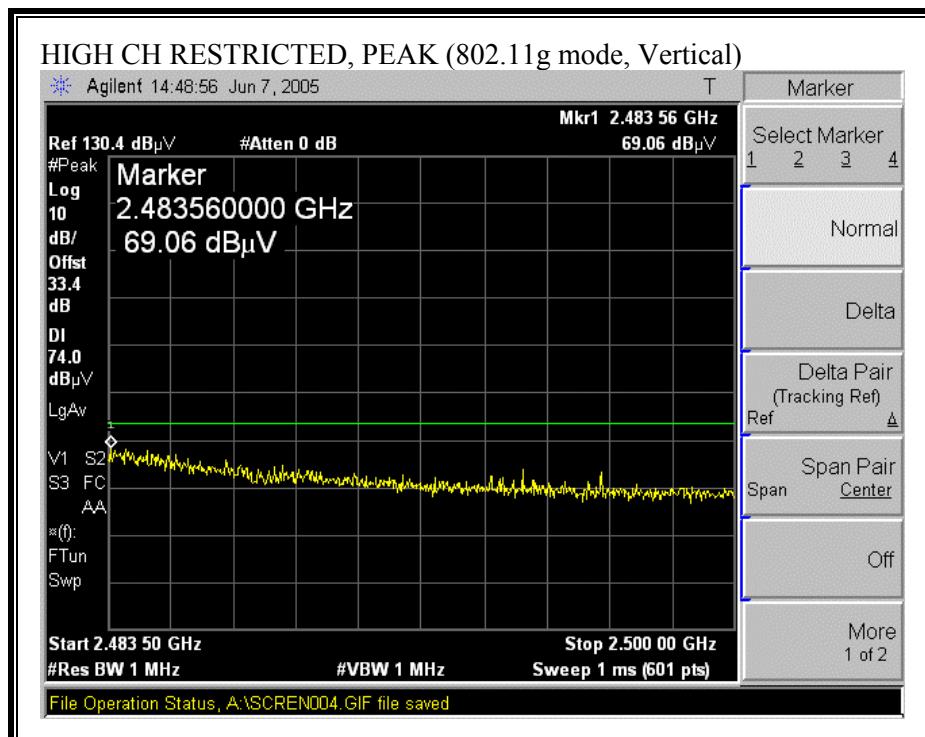
RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

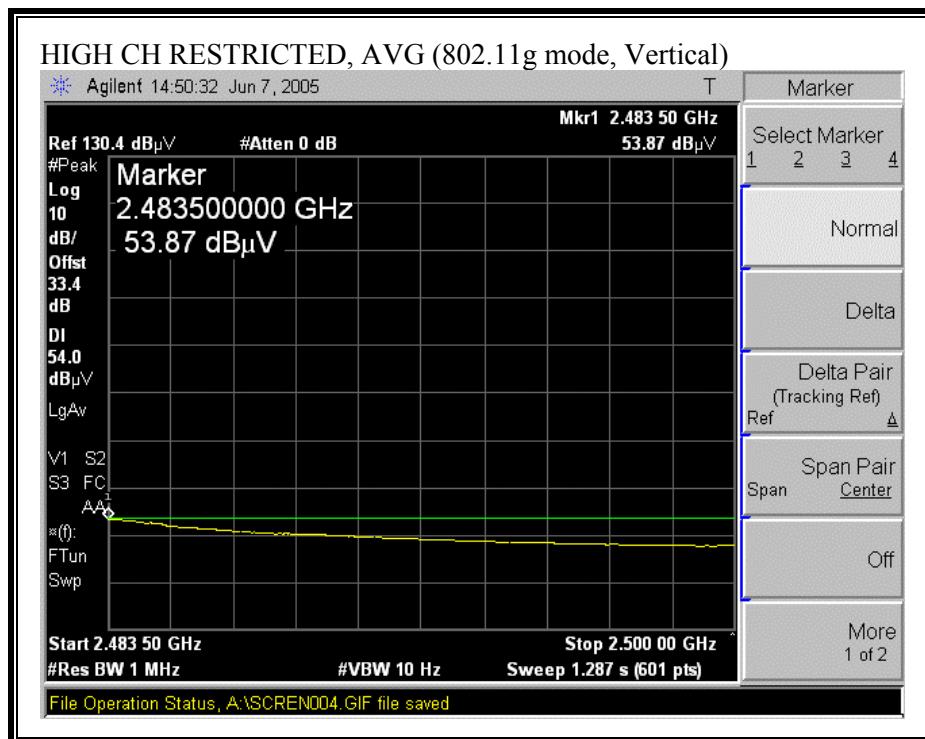

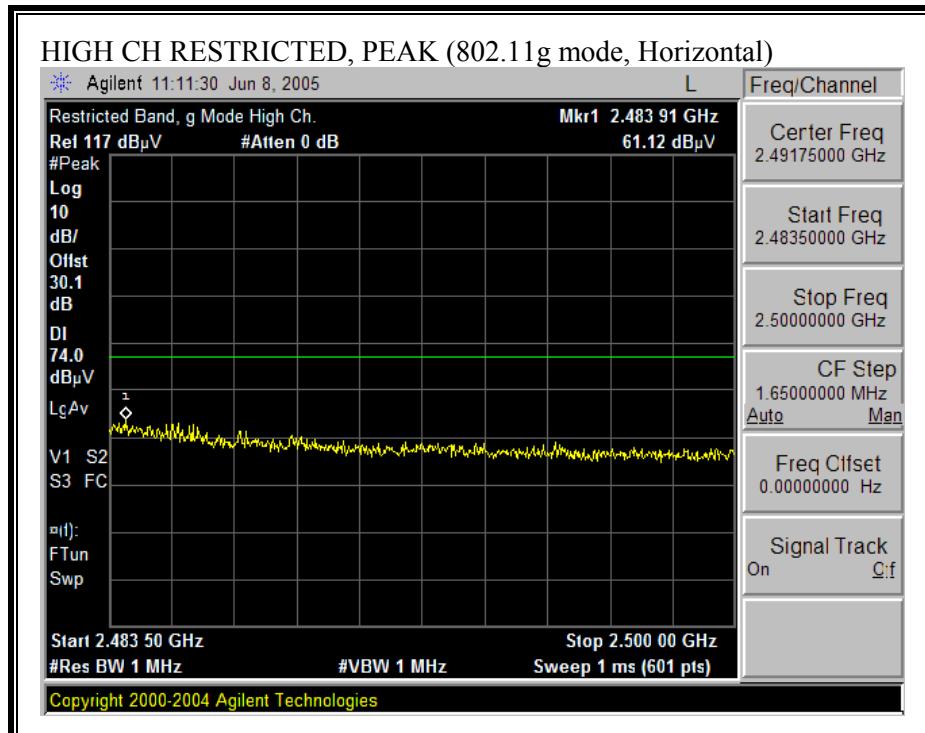CHANNEL 13, 2472 MHz - TRANSMITTING = 11 dBm**RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, HORIZONTAL)**

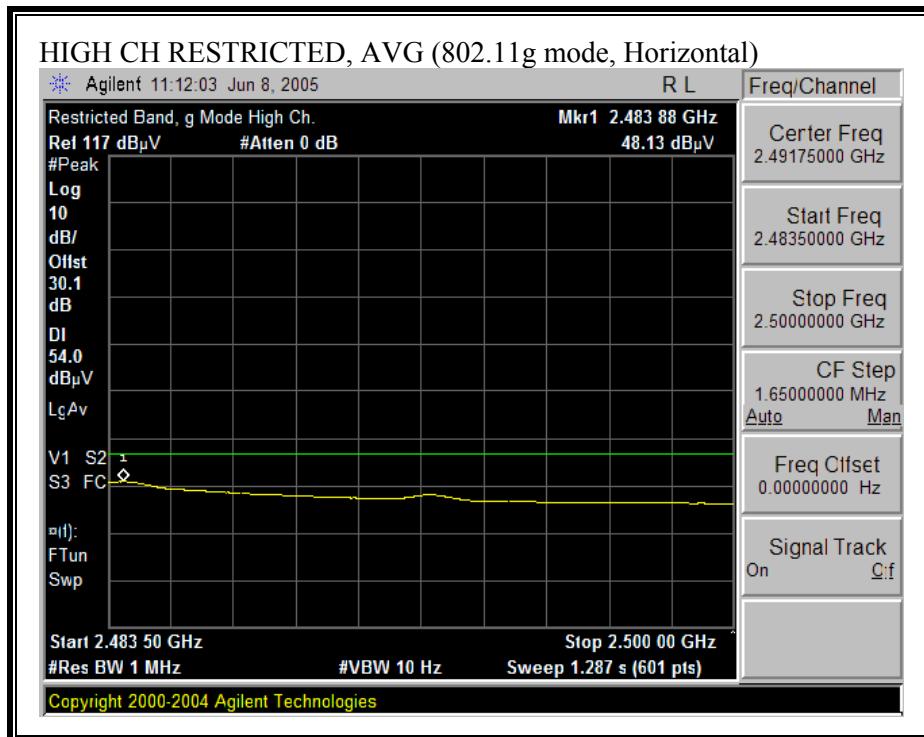

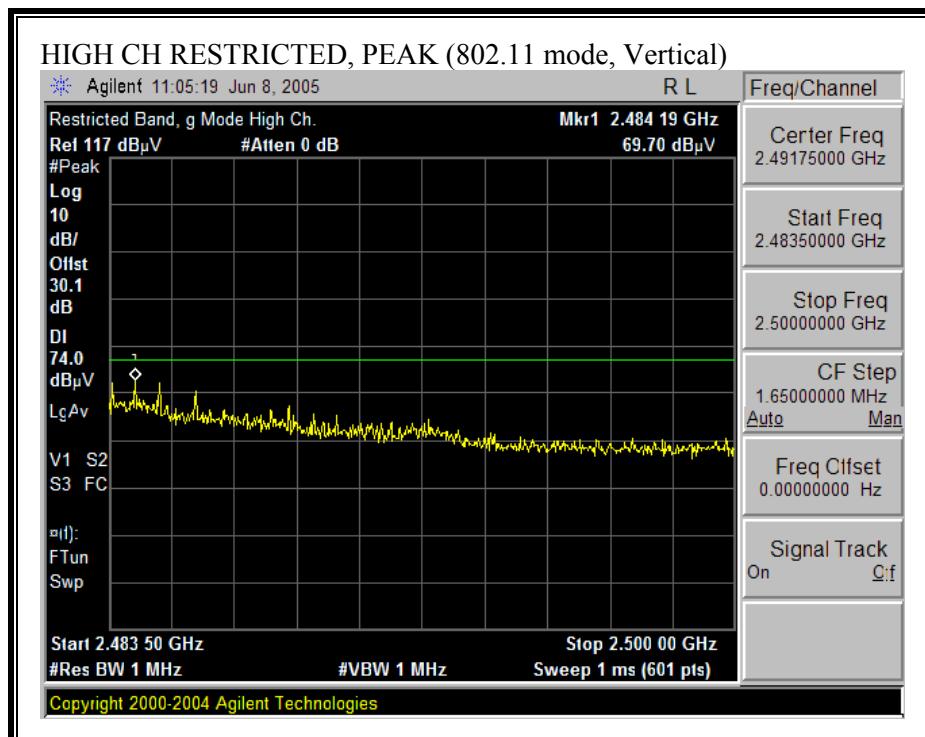RESTRICTED BANDEDGE (g MODE, HIGH CHANNEL, VERTICAL)

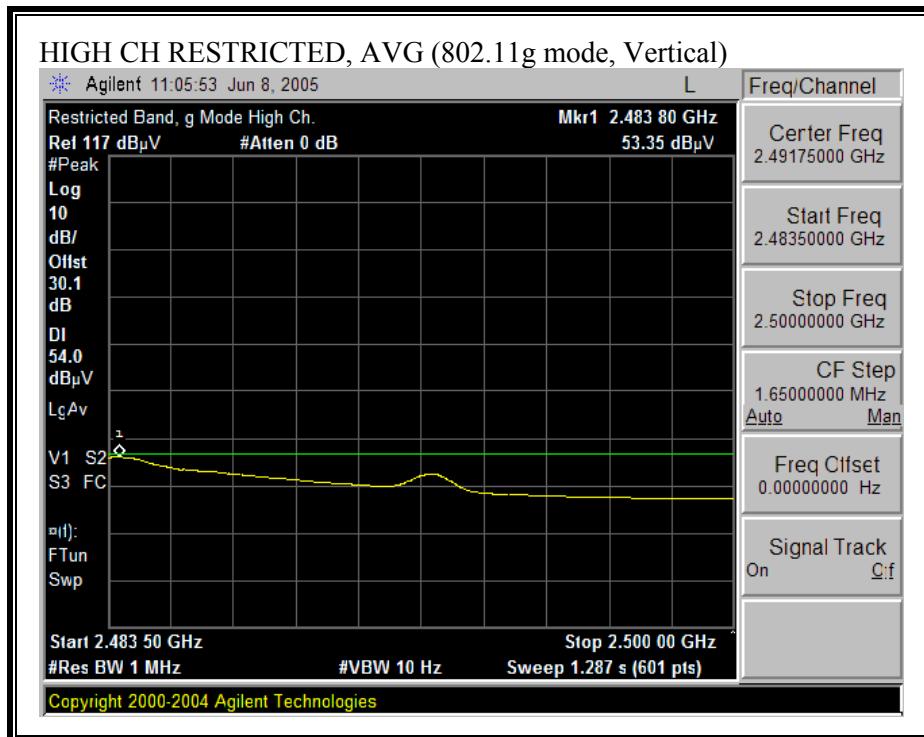

HARMONICS AND SPURIOUS EMISSIONS (802.11g MODE)

Power: Channel 1, 6, & 13 = 19dBm Bit Rate: 54Mbps for Peak and 6Mbps for Average reading.

06/09/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																																																																																																																																																																																																																																																																																																																																																																																																									
Test Engr: VIEN TRAN Project #: 05U3487 Company: BROADCOM EUT Descrip.:802.11ag Mini PCI Express Card EUT M/N:BCM94311MCAG Test Target:FCC 15.247 Mode Oper:11g_TX LOW, MID, HI CHANNEL _ HARMONIC & SPUR_3 meter Distance Average Power Meter = 19 dBm for Low, Mid, High Channels																																																																																																																																																																																																																																																																																																																																																																																																									
Test Equipment:																																																																																																																																																																																																																																																																																																																																																																																																									
EMCO Horn 1-18GHz T73; S/N: 6717 @3m				Pre-amplifier 1-26GHz T63 Miteq 646456			Pre-amplifier 26-40GHz			Horn >18GHz			Limit FCC 15.209																																																																																																																																																																																																																																																																																																																																																																																												
Hi Frequency Cables 2 foot cable 3 foot cable 4 foot cable 12 foot cable 2_Vien - - 12_Vien																																																																																																																																																																																																																																																																																																																																																																																																									
HPF Reject Filter HPF 4.0GHz R_002																																																																																																																																																																																																																																																																																																																																																																																																									
Peak Measurements RBW=VBW=1MHz																																																																																																																																																																																																																																																																																																																																																																																																									
Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																																																																																																																																																																																									
<table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr> <td colspan="15">LOW CH=2412 MHz</td> </tr> <tr> <td>4.824</td> <td>3.0</td> <td>57.0</td> <td>44.0</td> <td>33.7</td> <td>3.1</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>56.5</td> <td>43.5</td> <td>74</td> <td>54</td> <td>-17.5</td> <td>-10.5</td> <td>H</td> </tr> <tr> <td>7.236</td> <td>3.0</td> <td>52.0</td> <td>40.8</td> <td>35.4</td> <td>3.7</td> <td>-37.0</td> <td>0.0</td> <td>0.6</td> <td>54.8</td> <td>43.6</td> <td>74</td> <td>54</td> <td>-19.2</td> <td>-10.4</td> <td>H</td> </tr> <tr> <td>9.648</td> <td>3.0</td> <td>46.8</td> <td>35.3</td> <td>37.5</td> <td>4.4</td> <td>-36.2</td> <td>0.0</td> <td>0.8</td> <td>53.3</td> <td>41.8</td> <td>74</td> <td>54</td> <td>-20.7</td> <td>-12.2</td> <td>H, NOISE FLOOR</td> </tr> <tr> <td>4.824</td> <td>3.0</td> <td>63.5</td> <td>50.2</td> <td>33.7</td> <td>3.1</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>63.0</td> <td>49.7</td> <td>74</td> <td>54</td> <td>-11.0</td> <td>-4.3</td> <td>V</td> </tr> <tr> <td>7.236</td> <td>3.0</td> <td>50.1</td> <td>39.2</td> <td>35.4</td> <td>3.7</td> <td>-37.0</td> <td>0.0</td> <td>0.6</td> <td>52.9</td> <td>42.0</td> <td>74</td> <td>54</td> <td>-21.1</td> <td>-12.0</td> <td>V</td> </tr> <tr> <td>9.648</td> <td>3.0</td> <td>47.0</td> <td>36.4</td> <td>37.5</td> <td>4.4</td> <td>-36.2</td> <td>0.0</td> <td>0.8</td> <td>53.5</td> <td>42.9</td> <td>74</td> <td>54</td> <td>-20.5</td> <td>-11.1</td> <td>V, NOISE FLOOR</td> </tr> <tr> <td colspan="15">MID CH=2437MHz</td> </tr> <tr> <td>4.874</td> <td>3.0</td> <td>56.1</td> <td>42.8</td> <td>33.8</td> <td>3.1</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>55.7</td> <td>42.4</td> <td>74</td> <td>54</td> <td>-18.3</td> <td>-11.6</td> <td>H</td> </tr> <tr> <td>7.311</td> <td>3.0</td> <td>53.0</td> <td>41.6</td> <td>35.5</td> <td>3.7</td> <td>-36.9</td> <td>0.0</td> <td>0.6</td> <td>55.9</td> <td>44.5</td> <td>74</td> <td>54</td> <td>-18.1</td> <td>-9.5</td> <td>H</td> </tr> <tr> <td>9.748</td> <td>3.0</td> <td>47.1</td> <td>35.9</td> <td>37.5</td> <td>4.4</td> <td>-36.1</td> <td>0.0</td> <td>0.8</td> <td>53.7</td> <td>42.5</td> <td>74</td> <td>54</td> <td>-20.3</td> <td>-11.5</td> <td>H, NOISE FLOOR</td> </tr> <tr> <td>4.874</td> <td>3.0</td> <td>60.2</td> <td>49.1</td> <td>33.8</td> <td>3.1</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>59.8</td> <td>48.7</td> <td>74</td> <td>54</td> <td>-14.2</td> <td>-5.3</td> <td>V</td> </tr> <tr> <td>7.311</td> <td>3.0</td> <td>53.0</td> <td>41.6</td> <td>35.5</td> <td>3.7</td> <td>-36.9</td> <td>0.0</td> <td>0.6</td> <td>55.9</td> <td>44.5</td> <td>74</td> <td>54</td> <td>-18.1</td> <td>-9.5</td> <td>V</td> </tr> <tr> <td>9.748</td> <td>3.0</td> <td>45.0</td> <td>36.0</td> <td>37.5</td> <td>4.4</td> <td>-36.1</td> <td>0.0</td> <td>0.8</td> <td>51.6</td> <td>42.6</td> <td>74</td> <td>54</td> <td>-22.4</td> <td>-11.4</td> <td>V, NOISE FLOOR</td> </tr> <tr> <td colspan="15">HI CH=2472MHz</td> </tr> <tr> <td>4.944</td> <td>3.0</td> <td>46.0</td> <td>44.5</td> <td>33.8</td> <td>3.1</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>45.7</td> <td>44.2</td> <td>74</td> <td>54</td> <td>-28.3</td> <td>-9.8</td> <td>H</td> </tr> <tr> <td>7.416</td> <td>3.0</td> <td>50.0</td> <td>36.4</td> <td>35.6</td> <td>3.8</td> <td>-36.8</td> <td>0.0</td> <td>0.6</td> <td>53.2</td> <td>39.6</td> <td>74</td> <td>54</td> <td>-20.8</td> <td>-14.4</td> <td>H</td> </tr> <tr> <td>9.888</td> <td>3.0</td> <td>43.9</td> <td>33.0</td> <td>37.6</td> <td>4.5</td> <td>-36.1</td> <td>0.0</td> <td>0.8</td> <td>50.8</td> <td>39.9</td> <td>74</td> <td>54</td> <td>-23.2</td> <td>-14.1</td> <td>H, NOISE FLOOR</td> </tr> <tr> <td>4.944</td> <td>3.0</td> <td>63.0</td> <td>49.8</td> <td>33.8</td> <td>3.1</td> <td>-37.9</td> <td>0.0</td> <td>0.6</td> <td>62.7</td> <td>49.5</td> <td>74</td> <td>54</td> <td>-11.3</td> <td>-4.5</td> <td>V</td> </tr> <tr> <td>7.416</td> <td>3.0</td> <td>45.6</td> <td>35.2</td> <td>35.6</td> <td>3.8</td> <td>-36.8</td> <td>0.0</td> <td>0.6</td> <td>48.8</td> <td>38.4</td> <td>74</td> <td>54</td> <td>-25.2</td> <td>-15.6</td> <td>V</td> </tr> <tr> <td>9.888</td> <td>3.0</td> <td>45.5</td> <td>35.7</td> <td>37.6</td> <td>4.5</td> <td>-36.1</td> <td>0.0</td> <td>0.8</td> <td>52.4</td> <td>42.6</td> <td>74</td> <td>54</td> <td>-21.6</td> <td>-11.4</td> <td>V, NOISE FLOOR</td> </tr> <tr> <td colspan="15">NO OTHER EMISSIONS WERE DETECTED AFTER 5TH HARMONIC</td> </tr> <tr> <td colspan="5"> f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss </td> <td colspan="5"> Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter </td> <td colspan="5"> Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit </td> </tr> </tbody> </table>															f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	LOW CH=2412 MHz															4.824	3.0	57.0	44.0	33.7	3.1	-37.9	0.0	0.6	56.5	43.5	74	54	-17.5	-10.5	H	7.236	3.0	52.0	40.8	35.4	3.7	-37.0	0.0	0.6	54.8	43.6	74	54	-19.2	-10.4	H	9.648	3.0	46.8	35.3	37.5	4.4	-36.2	0.0	0.8	53.3	41.8	74	54	-20.7	-12.2	H, NOISE FLOOR	4.824	3.0	63.5	50.2	33.7	3.1	-37.9	0.0	0.6	63.0	49.7	74	54	-11.0	-4.3	V	7.236	3.0	50.1	39.2	35.4	3.7	-37.0	0.0	0.6	52.9	42.0	74	54	-21.1	-12.0	V	9.648	3.0	47.0	36.4	37.5	4.4	-36.2	0.0	0.8	53.5	42.9	74	54	-20.5	-11.1	V, NOISE FLOOR	MID CH=2437MHz															4.874	3.0	56.1	42.8	33.8	3.1	-37.9	0.0	0.6	55.7	42.4	74	54	-18.3	-11.6	H	7.311	3.0	53.0	41.6	35.5	3.7	-36.9	0.0	0.6	55.9	44.5	74	54	-18.1	-9.5	H	9.748	3.0	47.1	35.9	37.5	4.4	-36.1	0.0	0.8	53.7	42.5	74	54	-20.3	-11.5	H, NOISE FLOOR	4.874	3.0	60.2	49.1	33.8	3.1	-37.9	0.0	0.6	59.8	48.7	74	54	-14.2	-5.3	V	7.311	3.0	53.0	41.6	35.5	3.7	-36.9	0.0	0.6	55.9	44.5	74	54	-18.1	-9.5	V	9.748	3.0	45.0	36.0	37.5	4.4	-36.1	0.0	0.8	51.6	42.6	74	54	-22.4	-11.4	V, NOISE FLOOR	HI CH=2472MHz															4.944	3.0	46.0	44.5	33.8	3.1	-37.9	0.0	0.6	45.7	44.2	74	54	-28.3	-9.8	H	7.416	3.0	50.0	36.4	35.6	3.8	-36.8	0.0	0.6	53.2	39.6	74	54	-20.8	-14.4	H	9.888	3.0	43.9	33.0	37.6	4.5	-36.1	0.0	0.8	50.8	39.9	74	54	-23.2	-14.1	H, NOISE FLOOR	4.944	3.0	63.0	49.8	33.8	3.1	-37.9	0.0	0.6	62.7	49.5	74	54	-11.3	-4.5	V	7.416	3.0	45.6	35.2	35.6	3.8	-36.8	0.0	0.6	48.8	38.4	74	54	-25.2	-15.6	V	9.888	3.0	45.5	35.7	37.6	4.5	-36.1	0.0	0.8	52.4	42.6	74	54	-21.6	-11.4	V, NOISE FLOOR	NO OTHER EMISSIONS WERE DETECTED AFTER 5TH HARMONIC															f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss					Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter					Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit				
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																																																																																																																																																																										
LOW CH=2412 MHz																																																																																																																																																																																																																																																																																																																																																																																																									
4.824	3.0	57.0	44.0	33.7	3.1	-37.9	0.0	0.6	56.5	43.5	74	54	-17.5	-10.5	H																																																																																																																																																																																																																																																																																																																																																																																										
7.236	3.0	52.0	40.8	35.4	3.7	-37.0	0.0	0.6	54.8	43.6	74	54	-19.2	-10.4	H																																																																																																																																																																																																																																																																																																																																																																																										
9.648	3.0	46.8	35.3	37.5	4.4	-36.2	0.0	0.8	53.3	41.8	74	54	-20.7	-12.2	H, NOISE FLOOR																																																																																																																																																																																																																																																																																																																																																																																										
4.824	3.0	63.5	50.2	33.7	3.1	-37.9	0.0	0.6	63.0	49.7	74	54	-11.0	-4.3	V																																																																																																																																																																																																																																																																																																																																																																																										
7.236	3.0	50.1	39.2	35.4	3.7	-37.0	0.0	0.6	52.9	42.0	74	54	-21.1	-12.0	V																																																																																																																																																																																																																																																																																																																																																																																										
9.648	3.0	47.0	36.4	37.5	4.4	-36.2	0.0	0.8	53.5	42.9	74	54	-20.5	-11.1	V, NOISE FLOOR																																																																																																																																																																																																																																																																																																																																																																																										
MID CH=2437MHz																																																																																																																																																																																																																																																																																																																																																																																																									
4.874	3.0	56.1	42.8	33.8	3.1	-37.9	0.0	0.6	55.7	42.4	74	54	-18.3	-11.6	H																																																																																																																																																																																																																																																																																																																																																																																										
7.311	3.0	53.0	41.6	35.5	3.7	-36.9	0.0	0.6	55.9	44.5	74	54	-18.1	-9.5	H																																																																																																																																																																																																																																																																																																																																																																																										
9.748	3.0	47.1	35.9	37.5	4.4	-36.1	0.0	0.8	53.7	42.5	74	54	-20.3	-11.5	H, NOISE FLOOR																																																																																																																																																																																																																																																																																																																																																																																										
4.874	3.0	60.2	49.1	33.8	3.1	-37.9	0.0	0.6	59.8	48.7	74	54	-14.2	-5.3	V																																																																																																																																																																																																																																																																																																																																																																																										
7.311	3.0	53.0	41.6	35.5	3.7	-36.9	0.0	0.6	55.9	44.5	74	54	-18.1	-9.5	V																																																																																																																																																																																																																																																																																																																																																																																										
9.748	3.0	45.0	36.0	37.5	4.4	-36.1	0.0	0.8	51.6	42.6	74	54	-22.4	-11.4	V, NOISE FLOOR																																																																																																																																																																																																																																																																																																																																																																																										
HI CH=2472MHz																																																																																																																																																																																																																																																																																																																																																																																																									
4.944	3.0	46.0	44.5	33.8	3.1	-37.9	0.0	0.6	45.7	44.2	74	54	-28.3	-9.8	H																																																																																																																																																																																																																																																																																																																																																																																										
7.416	3.0	50.0	36.4	35.6	3.8	-36.8	0.0	0.6	53.2	39.6	74	54	-20.8	-14.4	H																																																																																																																																																																																																																																																																																																																																																																																										
9.888	3.0	43.9	33.0	37.6	4.5	-36.1	0.0	0.8	50.8	39.9	74	54	-23.2	-14.1	H, NOISE FLOOR																																																																																																																																																																																																																																																																																																																																																																																										
4.944	3.0	63.0	49.8	33.8	3.1	-37.9	0.0	0.6	62.7	49.5	74	54	-11.3	-4.5	V																																																																																																																																																																																																																																																																																																																																																																																										
7.416	3.0	45.6	35.2	35.6	3.8	-36.8	0.0	0.6	48.8	38.4	74	54	-25.2	-15.6	V																																																																																																																																																																																																																																																																																																																																																																																										
9.888	3.0	45.5	35.7	37.6	4.5	-36.1	0.0	0.8	52.4	42.6	74	54	-21.6	-11.4	V, NOISE FLOOR																																																																																																																																																																																																																																																																																																																																																																																										
NO OTHER EMISSIONS WERE DETECTED AFTER 5TH HARMONIC																																																																																																																																																																																																																																																																																																																																																																																																									
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss					Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter					Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit																																																																																																																																																																																																																																																																																																																																																																																															

8.3.4. TRANSMITTER ABOVE 1 GHz FOR 5725 TO 5850 MHz BAND_a Mode


HARMONICS AND SPURIOUS EMISSIONS (802.11a MODE)

Power: Channel 36, 52, & 64 = 17dBm Bit Rate: 54Mbps for Peak and 6Mbps for Average reading.

06/09/05 High Frequency Measurement Compliance Certification Services, Morgan Hill Open Field Site																																																																																																																																																																																																																																																																																																	
Test Engr: VIEN TRAN Project #: 05U3487 Company: BROADCOM EUT Descrip.:802.11ag Mini PCI Express Card EUT M/N:BCM94311MCAG Test Target:FCC 15.247 Mode Oper:11a_5745 - 5825 MHz_TX LOW, MID, HI CHANNEL _ HARMONIC & SPUR Average Power Meter: Low = xx dBm, Mid = xx dBm, High = xx dBm																																																																																																																																																																																																																																																																																																	
Test Equipment: <table border="1"> <tr> <td>EMCO Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="4">Horn > 18GHz</td> <td>Limit</td> </tr> <tr> <td>T73; S/N: 6717 @3m</td> <td>T63 Miteq 646456</td> <td></td> <td colspan="4"></td> <td>FCC 15.209</td> </tr> <tr> <td colspan="6"> Hi Frequency Cables 2 foot cable 3 foot cable 4 foot cable 12 foot cable HPF Reject Filter </td> <td colspan="3"> Peak Measurements RBW=VBW=1MHz </td> </tr> <tr> <td colspan="6"> 2_Vien 3_Vien 4_Vien 12_Vien HPF_7.6GHz R_001 </td> <td colspan="3"> Average Measurements RBW=1MHz ; VBW=10Hz </td> </tr> </table>														EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T73; S/N: 6717 @3m	T63 Miteq 646456						FCC 15.209	Hi Frequency Cables 2 foot cable 3 foot cable 4 foot cable 12 foot cable HPF Reject Filter						Peak Measurements RBW=VBW=1MHz			2_Vien 3_Vien 4_Vien 12_Vien HPF_7.6GHz R_001						Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																																				
EMCO Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																																																																										
T73; S/N: 6717 @3m	T63 Miteq 646456						FCC 15.209																																																																																																																																																																																																																																																																																										
Hi Frequency Cables 2 foot cable 3 foot cable 4 foot cable 12 foot cable HPF Reject Filter						Peak Measurements RBW=VBW=1MHz																																																																																																																																																																																																																																																																																											
2_Vien 3_Vien 4_Vien 12_Vien HPF_7.6GHz R_001						Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																																																																											
<table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr> <td colspan="14">CH 149=5745 MHz</td> </tr> <tr> <td>11.490</td> <td>3.0</td> <td>47.1</td> <td>34.5</td> <td>38.3</td> <td>5.3</td> <td>-37.2</td> <td>0.0</td> <td>0.7</td> <td>54.3</td> <td>41.7</td> <td>74</td> <td>54</td> <td>-19.7</td> <td>-12.3</td> <td>V</td> </tr> <tr> <td>17.235</td> <td>3.0</td> <td>44.0</td> <td>33.0</td> <td>42.4</td> <td>6.1</td> <td>-35.9</td> <td>0.0</td> <td>0.6</td> <td>57.2</td> <td>46.2</td> <td>74</td> <td>54</td> <td>-16.8</td> <td>-7.8</td> <td>V</td> </tr> <tr> <td>11.490</td> <td>3.0</td> <td>46.0</td> <td>33.7</td> <td>38.3</td> <td>5.3</td> <td>-37.2</td> <td>0.0</td> <td>0.7</td> <td>53.2</td> <td>40.9</td> <td>74</td> <td>54</td> <td>-20.8</td> <td>-13.1</td> <td>H</td> </tr> <tr> <td>17.235</td> <td>3.0</td> <td>44.0</td> <td>33.7</td> <td>42.4</td> <td>6.1</td> <td>-35.9</td> <td>0.0</td> <td>0.6</td> <td>57.2</td> <td>46.9</td> <td>74</td> <td>54</td> <td>-16.8</td> <td>-7.1</td> <td>H</td> </tr> <tr> <td colspan="14">CH 157=5785 MHz</td> </tr> <tr> <td>11.570</td> <td>3.0</td> <td>51.2</td> <td>37.9</td> <td>38.3</td> <td>5.4</td> <td>-37.2</td> <td>0.0</td> <td>0.7</td> <td>58.4</td> <td>45.1</td> <td>74</td> <td>54</td> <td>-15.6</td> <td>-8.9</td> <td>V</td> </tr> <tr> <td>17.355</td> <td>3.0</td> <td>46.0</td> <td>36.5</td> <td>43.0</td> <td>6.1</td> <td>-35.8</td> <td>0.0</td> <td>0.6</td> <td>60.0</td> <td>50.5</td> <td>74</td> <td>54</td> <td>-14.0</td> <td>-3.5</td> <td>V</td> </tr> <tr> <td>11.570</td> <td>3.0</td> <td>50.0</td> <td>37.4</td> <td>38.3</td> <td>5.4</td> <td>-37.2</td> <td>0.0</td> <td>0.7</td> <td>57.2</td> <td>44.6</td> <td>74</td> <td>54</td> <td>-16.8</td> <td>-9.4</td> <td>H</td> </tr> <tr> <td>17.355</td> <td>3.0</td> <td>44.0</td> <td>33.0</td> <td>43.0</td> <td>6.1</td> <td>-35.8</td> <td>0.0</td> <td>0.6</td> <td>58.0</td> <td>47.0</td> <td>74</td> <td>54</td> <td>-16.0</td> <td>-7.0</td> <td>H</td> </tr> <tr> <td colspan="14">CH 165=5825 MHz</td> </tr> <tr> <td>11.650</td> <td>3.0</td> <td>53.2</td> <td>41.1</td> <td>38.4</td> <td>5.4</td> <td>-37.3</td> <td>0.0</td> <td>0.7</td> <td>60.4</td> <td>48.3</td> <td>74</td> <td>54</td> <td>-13.6</td> <td>-5.7</td> <td>V</td> </tr> <tr> <td>17.475</td> <td>3.0</td> <td>44.0</td> <td>32.4</td> <td>43.7</td> <td>6.1</td> <td>-35.8</td> <td>0.0</td> <td>0.6</td> <td>58.7</td> <td>47.1</td> <td>74</td> <td>54</td> <td>-15.3</td> <td>-6.9</td> <td>V</td> </tr> <tr> <td>11.650</td> <td>3.0</td> <td>51.6</td> <td>40.5</td> <td>38.4</td> <td>5.4</td> <td>-37.3</td> <td>0.0</td> <td>0.7</td> <td>58.8</td> <td>47.7</td> <td>74</td> <td>54</td> <td>-15.2</td> <td>-6.3</td> <td>H</td> </tr> <tr> <td>17.475</td> <td>3.0</td> <td>43.9</td> <td>33.4</td> <td>43.7</td> <td>6.1</td> <td>-35.8</td> <td>0.0</td> <td>0.6</td> <td>58.6</td> <td>48.1</td> <td>74</td> <td>54</td> <td>-15.4</td> <td>-5.9</td> <td>H</td> </tr> <tr> <td colspan="14">NO OTHER EMISSIONS WERE DETECTED ABOVE NOISE FLOOR AFTER 3rd HARMONIC</td> </tr> <tr> <td colspan="4"> f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss </td> <td colspan="4"> Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter </td> <td colspan="4"> Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit </td> </tr> </tbody> </table>														f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	CH 149=5745 MHz														11.490	3.0	47.1	34.5	38.3	5.3	-37.2	0.0	0.7	54.3	41.7	74	54	-19.7	-12.3	V	17.235	3.0	44.0	33.0	42.4	6.1	-35.9	0.0	0.6	57.2	46.2	74	54	-16.8	-7.8	V	11.490	3.0	46.0	33.7	38.3	5.3	-37.2	0.0	0.7	53.2	40.9	74	54	-20.8	-13.1	H	17.235	3.0	44.0	33.7	42.4	6.1	-35.9	0.0	0.6	57.2	46.9	74	54	-16.8	-7.1	H	CH 157=5785 MHz														11.570	3.0	51.2	37.9	38.3	5.4	-37.2	0.0	0.7	58.4	45.1	74	54	-15.6	-8.9	V	17.355	3.0	46.0	36.5	43.0	6.1	-35.8	0.0	0.6	60.0	50.5	74	54	-14.0	-3.5	V	11.570	3.0	50.0	37.4	38.3	5.4	-37.2	0.0	0.7	57.2	44.6	74	54	-16.8	-9.4	H	17.355	3.0	44.0	33.0	43.0	6.1	-35.8	0.0	0.6	58.0	47.0	74	54	-16.0	-7.0	H	CH 165=5825 MHz														11.650	3.0	53.2	41.1	38.4	5.4	-37.3	0.0	0.7	60.4	48.3	74	54	-13.6	-5.7	V	17.475	3.0	44.0	32.4	43.7	6.1	-35.8	0.0	0.6	58.7	47.1	74	54	-15.3	-6.9	V	11.650	3.0	51.6	40.5	38.4	5.4	-37.3	0.0	0.7	58.8	47.7	74	54	-15.2	-6.3	H	17.475	3.0	43.9	33.4	43.7	6.1	-35.8	0.0	0.6	58.6	48.1	74	54	-15.4	-5.9	H	NO OTHER EMISSIONS WERE DETECTED ABOVE NOISE FLOOR AFTER 3rd HARMONIC														f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss				Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter				Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit			
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																																																																		
CH 149=5745 MHz																																																																																																																																																																																																																																																																																																	
11.490	3.0	47.1	34.5	38.3	5.3	-37.2	0.0	0.7	54.3	41.7	74	54	-19.7	-12.3	V																																																																																																																																																																																																																																																																																		
17.235	3.0	44.0	33.0	42.4	6.1	-35.9	0.0	0.6	57.2	46.2	74	54	-16.8	-7.8	V																																																																																																																																																																																																																																																																																		
11.490	3.0	46.0	33.7	38.3	5.3	-37.2	0.0	0.7	53.2	40.9	74	54	-20.8	-13.1	H																																																																																																																																																																																																																																																																																		
17.235	3.0	44.0	33.7	42.4	6.1	-35.9	0.0	0.6	57.2	46.9	74	54	-16.8	-7.1	H																																																																																																																																																																																																																																																																																		
CH 157=5785 MHz																																																																																																																																																																																																																																																																																																	
11.570	3.0	51.2	37.9	38.3	5.4	-37.2	0.0	0.7	58.4	45.1	74	54	-15.6	-8.9	V																																																																																																																																																																																																																																																																																		
17.355	3.0	46.0	36.5	43.0	6.1	-35.8	0.0	0.6	60.0	50.5	74	54	-14.0	-3.5	V																																																																																																																																																																																																																																																																																		
11.570	3.0	50.0	37.4	38.3	5.4	-37.2	0.0	0.7	57.2	44.6	74	54	-16.8	-9.4	H																																																																																																																																																																																																																																																																																		
17.355	3.0	44.0	33.0	43.0	6.1	-35.8	0.0	0.6	58.0	47.0	74	54	-16.0	-7.0	H																																																																																																																																																																																																																																																																																		
CH 165=5825 MHz																																																																																																																																																																																																																																																																																																	
11.650	3.0	53.2	41.1	38.4	5.4	-37.3	0.0	0.7	60.4	48.3	74	54	-13.6	-5.7	V																																																																																																																																																																																																																																																																																		
17.475	3.0	44.0	32.4	43.7	6.1	-35.8	0.0	0.6	58.7	47.1	74	54	-15.3	-6.9	V																																																																																																																																																																																																																																																																																		
11.650	3.0	51.6	40.5	38.4	5.4	-37.3	0.0	0.7	58.8	47.7	74	54	-15.2	-6.3	H																																																																																																																																																																																																																																																																																		
17.475	3.0	43.9	33.4	43.7	6.1	-35.8	0.0	0.6	58.6	48.1	74	54	-15.4	-5.9	H																																																																																																																																																																																																																																																																																		
NO OTHER EMISSIONS WERE DETECTED ABOVE NOISE FLOOR AFTER 3rd HARMONIC																																																																																																																																																																																																																																																																																																	
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss				Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter				Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit																																																																																																																																																																																																																																																																																									

**8.3.5. TRANSMITTER BELOW 1 GHz FOR 2400 TO 2483.5 MHz BAND_b Mode
11b Mode**

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

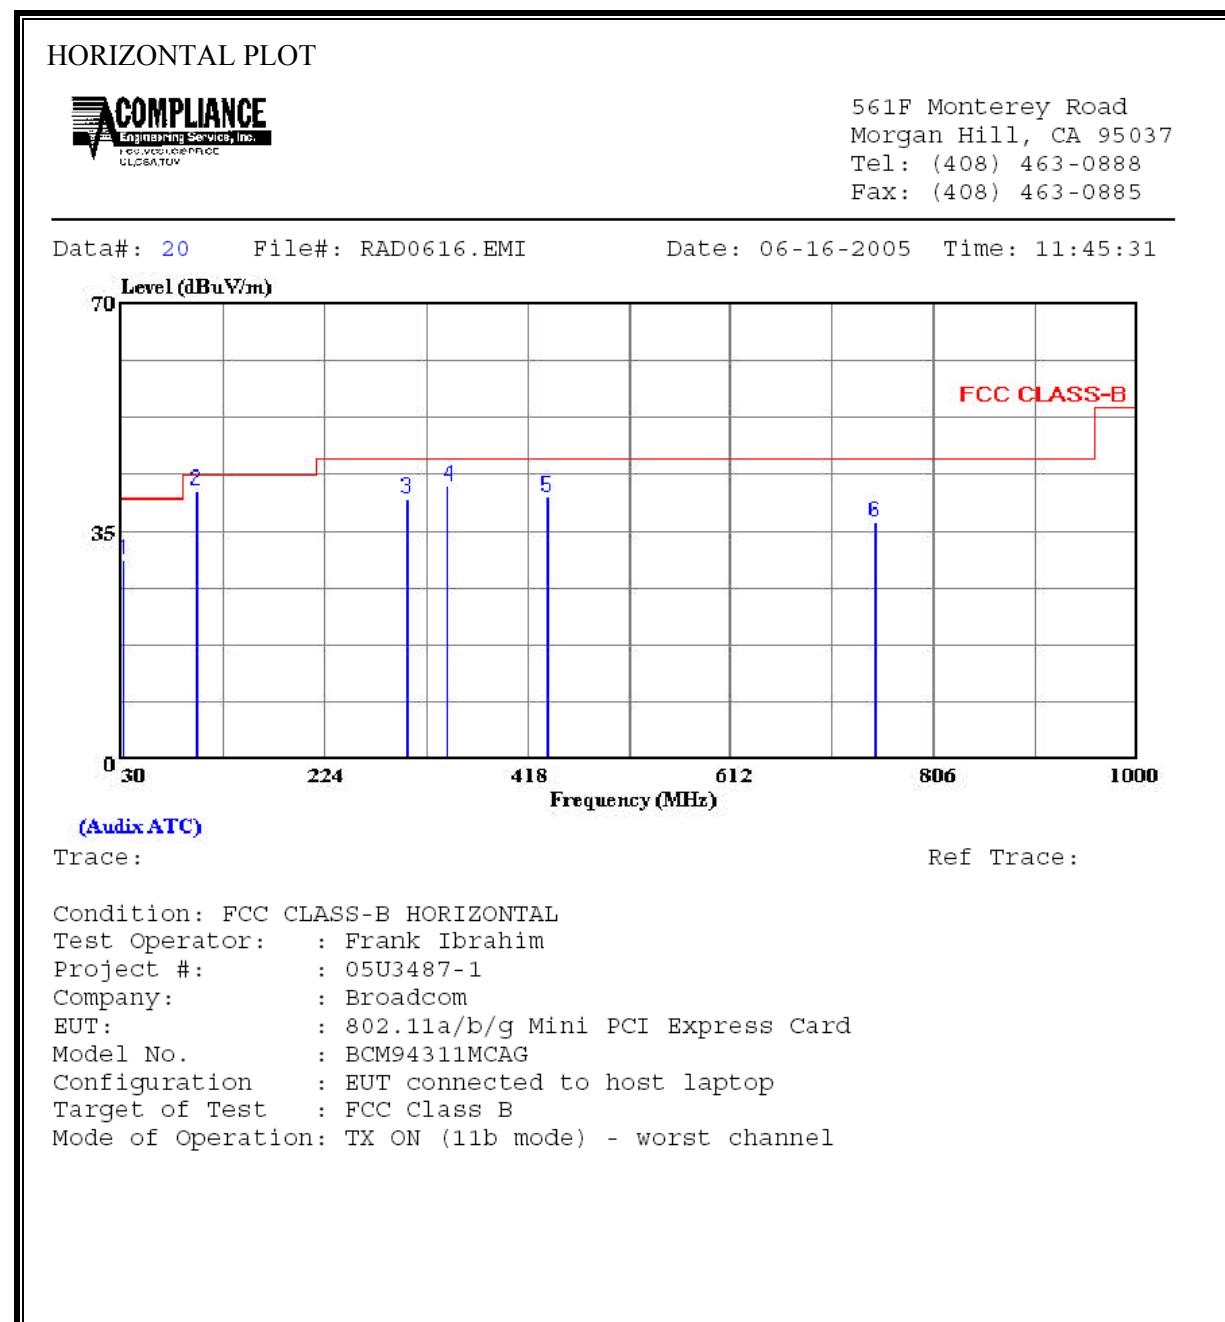

HORIZONTAL DATA

Freq	Read		Level	Limit	Over	Limit	Remark
	Level	Factor					
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	
1	31.940	10.66	19.94	30.60	40.00	-9.40	Peak
2	101.780	29.41	11.77	41.18	43.50	-2.32	Peak
3	302.570	24.16	15.72	39.89	46.00	-6.11	Peak
4	342.340	25.13	16.68	41.81	46.00	-4.19	Peak
5	436.430	21.26	18.89	40.15	46.00	-5.85	Peak
6	750.000	12.40	23.84	36.24	46.00	-9.76	QP


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 16 File#: RAD0616.EMI Date: 06-16-2005 Time: 11:35:48

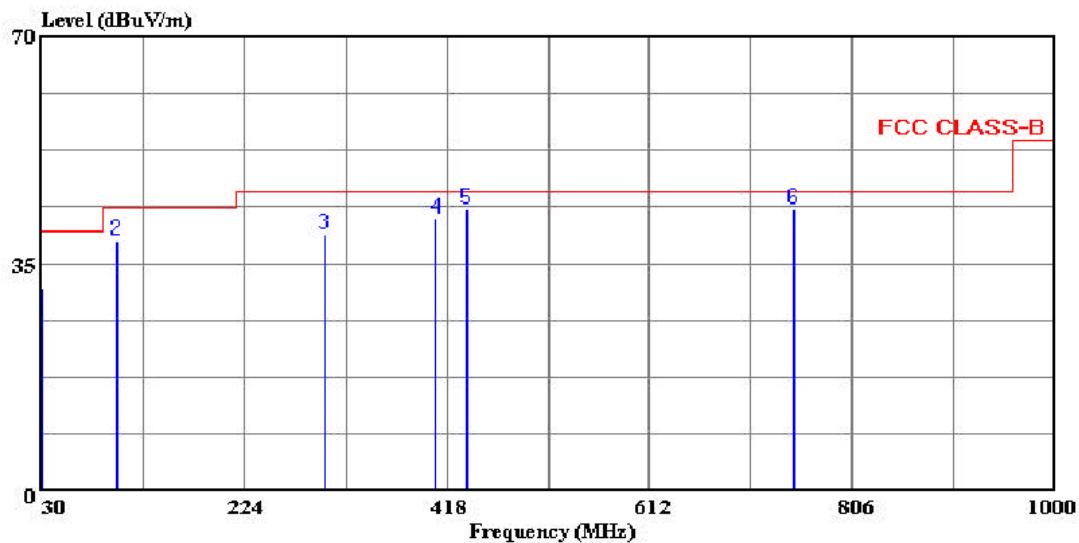

(Audix ATC)

Trace:

Ref Trace:

Condition: FCC CLASS-B VERTICAL
 Test Operator: : Frank Ibrahim
 Project #: : 05U3487-1
 Company: : Broadcom
 EUT: : 802.11a/b/g Mini PCI Express Card
 Model No. : BCM94311MCAG
 Configuration : EUT connected to host laptop
 Target of Test : FCC Class B
 Mode of Operation: TX ON (11b mode) - worst channel

VERTICAL DATA

Freq	Read		Level	Limit	Over	Line	Limit	Remark
	Level	Factor						
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	30.000	10.85	20.45	31.30	40.00	-8.70	Peak	
2	101.780	26.70	11.77	38.47	43.50	-5.03	Peak	
3	300.630	23.82	15.67	39.49	46.00	-6.51	Peak	
4	407.330	23.76	18.21	41.97	46.00	-4.03	Peak	
5	436.430	24.41	18.89	43.30	46.00	-2.70	Peak	
6	750.000	19.50	23.84	43.34	46.00	-2.66	QP	

**8.3.6. TRANSMITTER BELOW 1 GHz FOR 2400 TO 2483.5 MHz BAND_g Mode
11g Mode**


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 12 File#: RAD0616.EMI Date: 06-16-2005 Time: 11:23:58

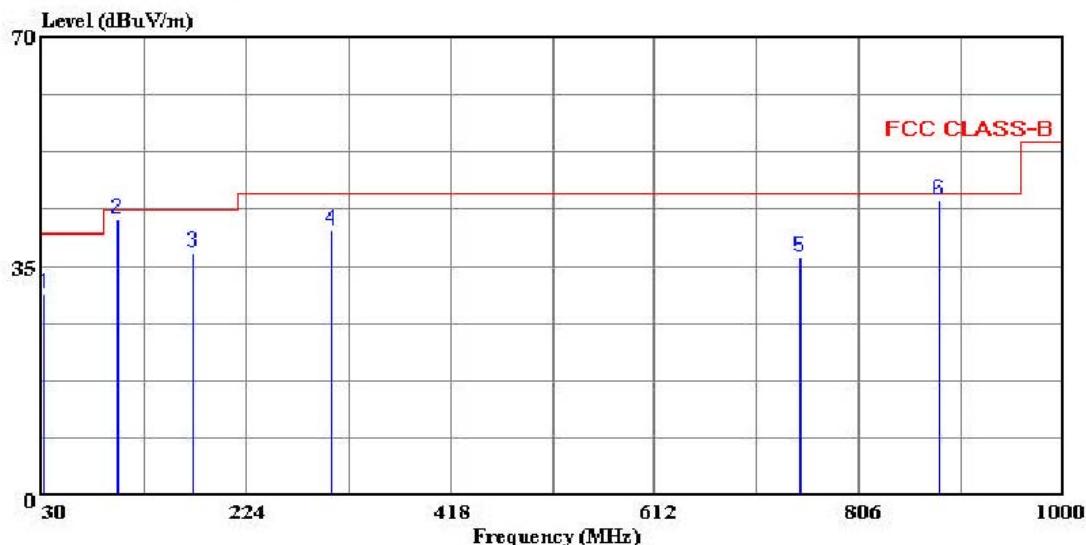

(Audix ATC)

Trace:

Ref Trace:

Condition: FCC CLASS-B HORIZONTAL
Test Operator: : Frank Ibrahim
Project #: : 05U3487-1
Company: : Broadcom
EUT: : 802.11a/b/g Mini PCI Express Card
Model No.: : BCM94311MCAG
Configuration : EUT connected to host laptop
Target of Test : FCC Class B
Mode of Operation: TX ON (11g mode) - worst channel

HORIZONTAL DATA

Freq	Read		Level	Limit	Over	Limit	Remark
	MHz	dBuV					
1	31.940	10.86	19.94	30.80	40.00	-9.20	Peak
2	101.780	30.40	11.77	42.17	43.50	-1.33	Peak
3	173.560	23.82	13.25	37.07	43.50	-6.43	Peak
4	304.510	24.78	15.78	40.55	46.00	-5.45	Peak
5	750.000	12.60	23.84	36.44	46.00	-9.56	QP
6	882.630	19.36	25.73	45.09	46.00	-0.91	Peak


SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT



561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 8 File#: RAD0616.EMI Date: 06-16-2005 Time: 11:09:59

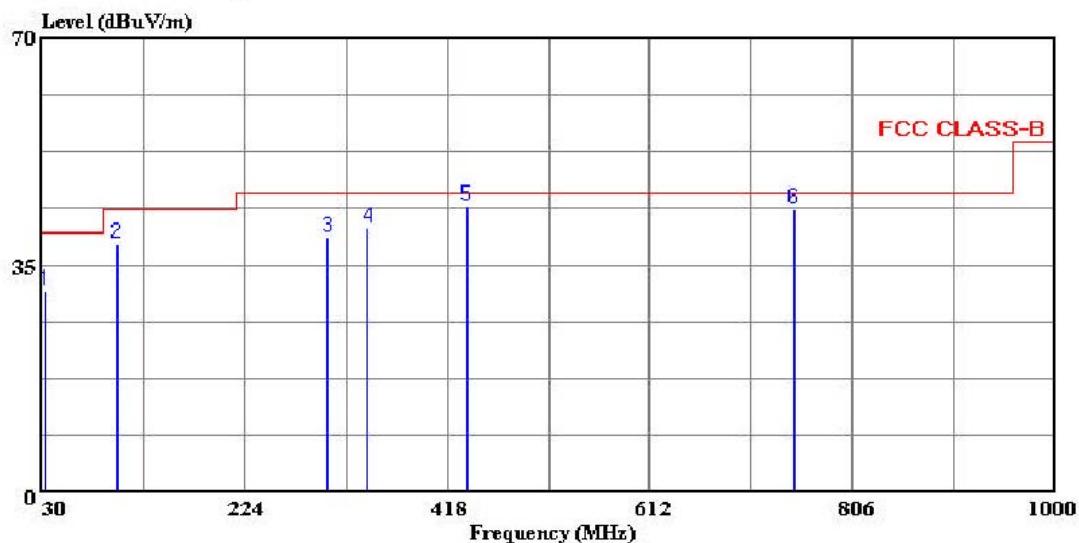

(Audix ATC)
Trace:

Ref Trace:


Condition: FCC CLASS-B VERTICAL
Test Operator: : Frank Ibrahim
Project #: : 05U3487-1
Company: : Broadcom
EUT: : 802.11a/b/g Mini PCI Express Card
Model No. : BCM94311MCAG
Configuration : EUT connected to host laptop
Target of Test : FCC Class B
Mode of Operation: TX ON (11g mode) - worst channel

VERTICAL DATA

Freq	Read		Level	Limit	Over	Limit	Remark
	MHz	dBuV					
1	32.910	11.00	19.94	30.93	40.00	-9.07	Peak
2	101.780	26.52	11.77	38.29	43.50	-5.21	Peak
3	303.540	23.46	15.75	39.21	46.00	-6.79	Peak
4	342.340	24.10	16.68	40.78	46.00	-5.22	Peak
5	436.430	25.16	18.89	44.05	46.00	-1.95	Peak
6	750.000	19.80	23.84	43.64	46.00	-2.36	QP

8.3.7. TRANSMITTER BELOW 1 GHz FOR 5725 TO 5850 MHz BAND_a Mode
11a Mode

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

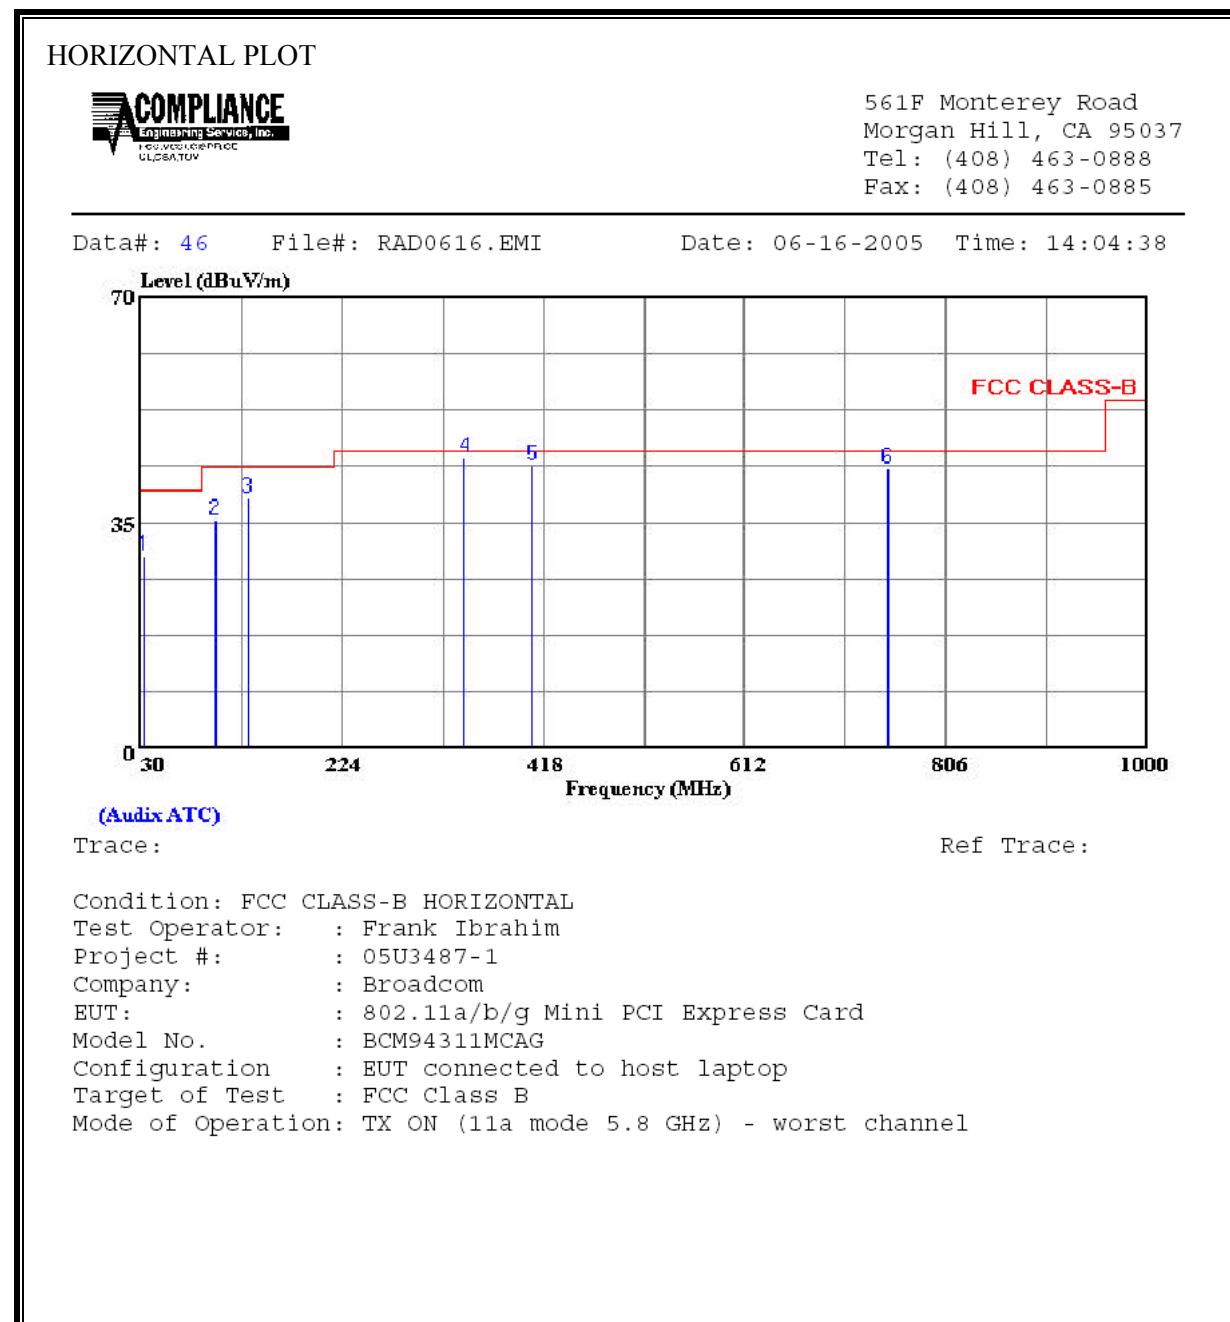


HORIZONTAL DATA

Freq	Read		Level	Limit	Over	Line	Limit	Remark
	MHz	dBuV						
			dB	dBuV/m	dBuV/m	dB		
1	32.910	9.81	19.94	29.74	40.00	-10.26	Peak	
2	101.780	23.70	11.77	35.47	43.50	-8.03	Peak	
3	133.790	23.82	15.02	38.84	43.50	-4.66	Peak	
4	342.340	28.49	16.68	45.17	46.00	-0.83	Peak	
5	407.330	25.53	18.21	43.74	46.00	-2.26	Peak	
6	750.000	19.60	23.84	43.44	46.00	-2.56	QP	

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**VERTICAL PLOT**

561F Monterey Road
Morgan Hill, CA 95037
Tel: (408) 463-0888
Fax: (408) 463-0885

Data#: 42 File#: RAD0616.EMI Date: 06-16-2005 Time: 13:56:26

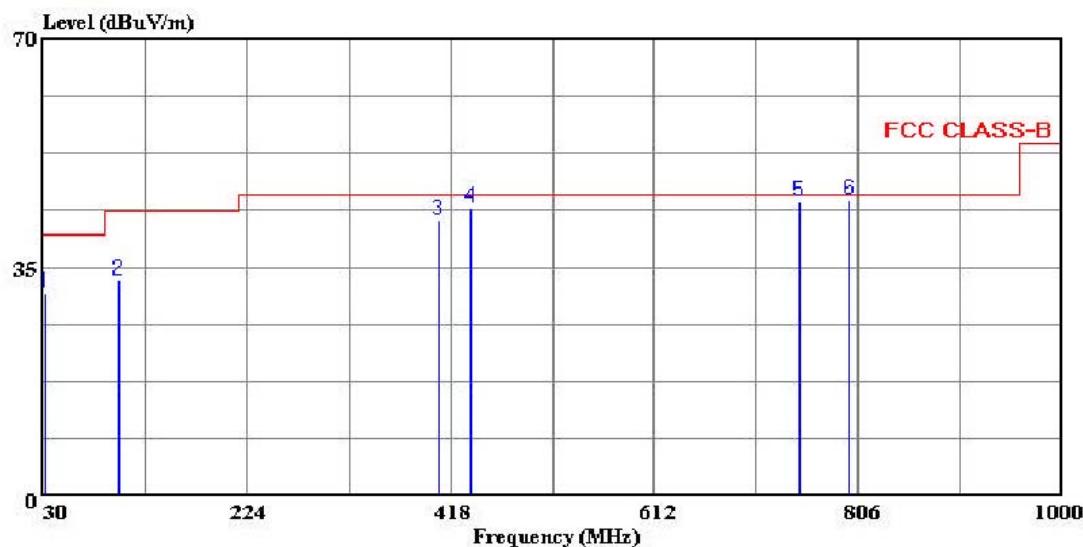

(Audix ATC)

Trace:

Ref Trace:

Condition: FCC CLASS-B VERTICAL
 Test Operator: : Frank Ibrahim
 Project #: : 05U3487-1
 Company: : Broadcom
 EUT: : 802.11a/b/g Mini PCI Express Card
 Model No. : BCM94311MCAG
 Configuration : EUT connected to host laptop
 Target of Test : FCC Class B
 Mode of Operation: TX ON (11a mode 5.8 GHz) - worst channel

VERTICAL DATA

Freq	Read		Level	Limit	Over	Limit	Remark
	MHz	dBuV					
			dB	dBuV/m	dBuV/m	dB	
1	30.970	10.49	20.45	30.94	40.00	-9.06	Peak
2	101.780	21.15	11.77	32.92	43.50	-10.58	Peak
3	406.360	23.90	18.20	42.09	46.00	-3.91	Peak
4	436.430	25.21	18.89	44.10	46.00	-1.90	Peak
5	750.000	21.30	23.84	45.14	46.00	-0.86	QP
6	797.600	20.80	24.51	45.31	46.00	-0.69	QP

8.4. POWERLINE CONDUCTED EMISSIONS

LIMIT

§15.207 (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal.

The lower limit applies at the boundary between the frequency ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The resolution bandwidth is set to 9 kHz for both peak detection and quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


No non-compliance noted:

6 WORST EMISSIONS


CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	53.36	--	--	0.00	66.00	56.00	-12.64	-2.64	L1
0.22	50.74	--	--	0.00	62.97	52.97	-12.23	-2.23	L1
0.53	42.90	--	--	0.00	56.00	46.00	-13.10	-3.10	L1
0.15	49.70	--	--	0.00	66.00	56.00	-16.30	-6.30	L2
0.21	48.98	--	--	0.00	63.05	53.05	-14.07	-4.07	L2
0.53	41.96	--	--	0.00	56.00	46.00	-14.04	-4.04	L2
6 Worst Data									

11a, 5.8 GHz mode

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.15	53.36	--	--	0.00	66.00	56.00	-12.64	-2.64	L1
0.22	50.74	--	--	0.00	62.97	52.97	-12.23	-2.23	L1
0.53	42.90	--	--	0.00	56.00	46.00	-13.10	-3.10	L1
0.15	49.70	--	--	0.00	66.00	56.00	-16.30	-6.30	L2
0.21	48.98	--	--	0.00	63.05	53.05	-14.07	-4.07	L2
0.53	41.96	--	--	0.00	56.00	46.00	-14.04	-4.04	L2
6 Worst Data									

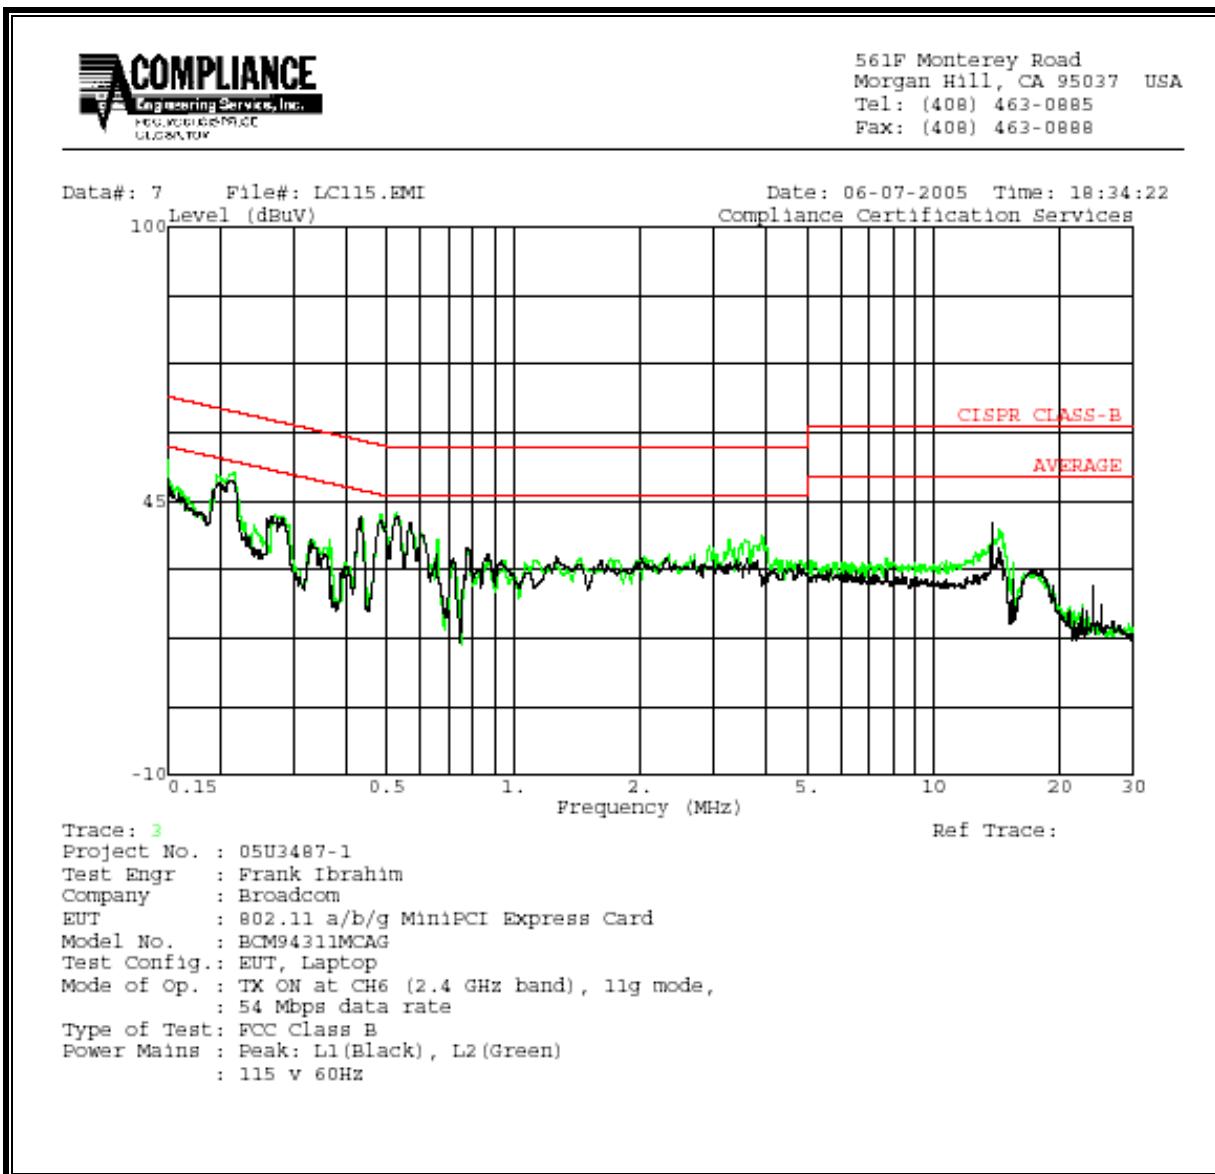
LINE 1 AND LINE 2 RESULTS (11g mode)

LINE 1 AND LINE 2 RESULTS (11a, 5.8 GHz mode)

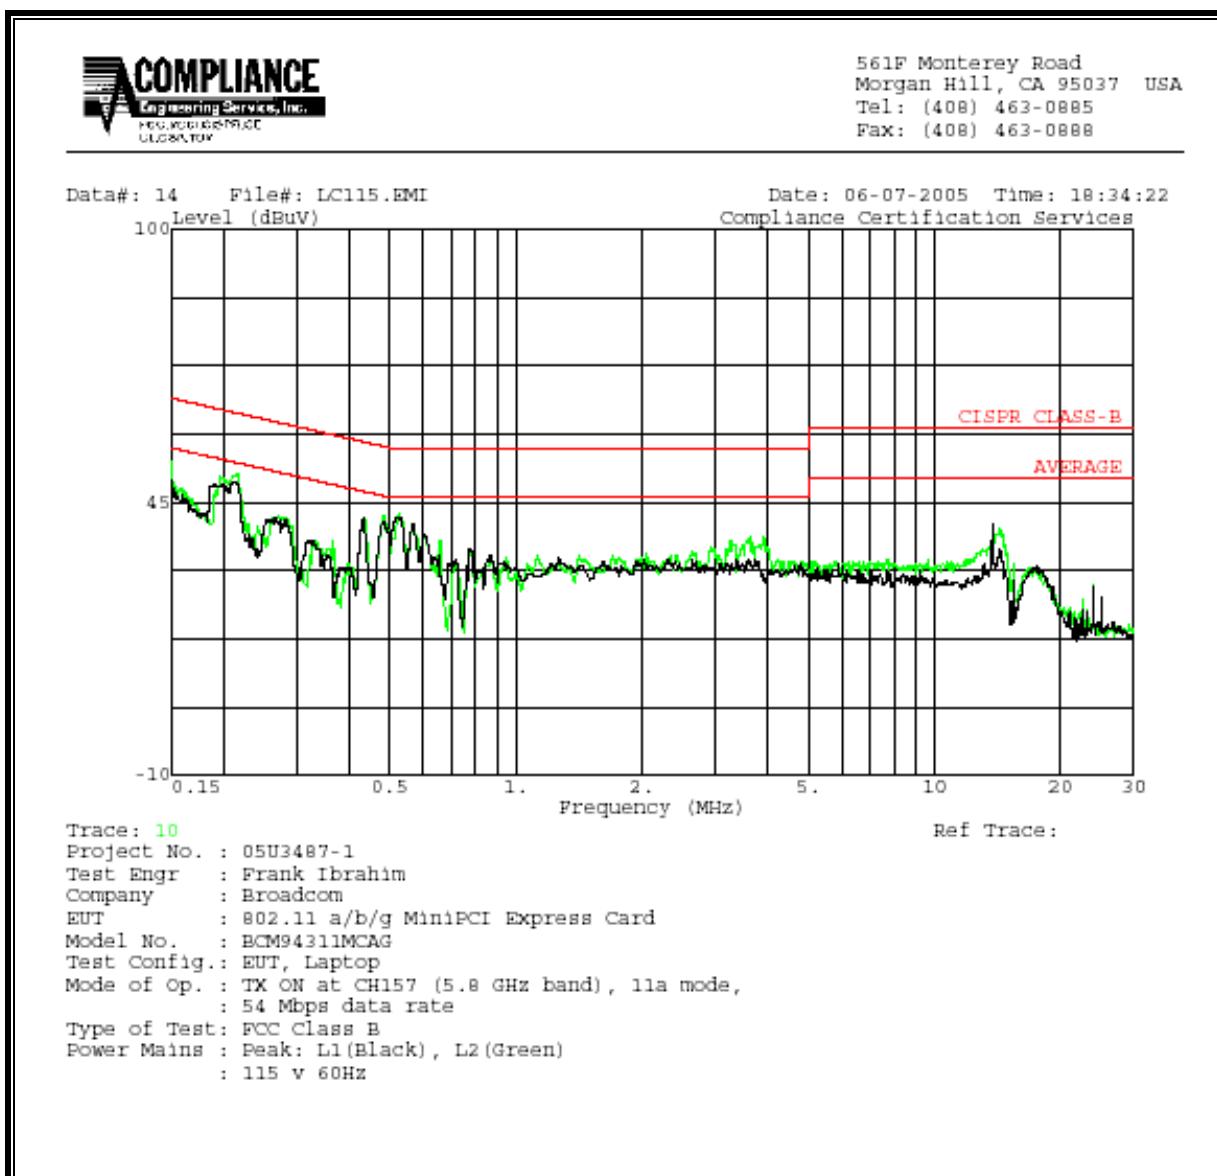

9. SETUP PHOTOS

ANTENNA PORT CONDUCTED RF MEASUREMENT SETUP

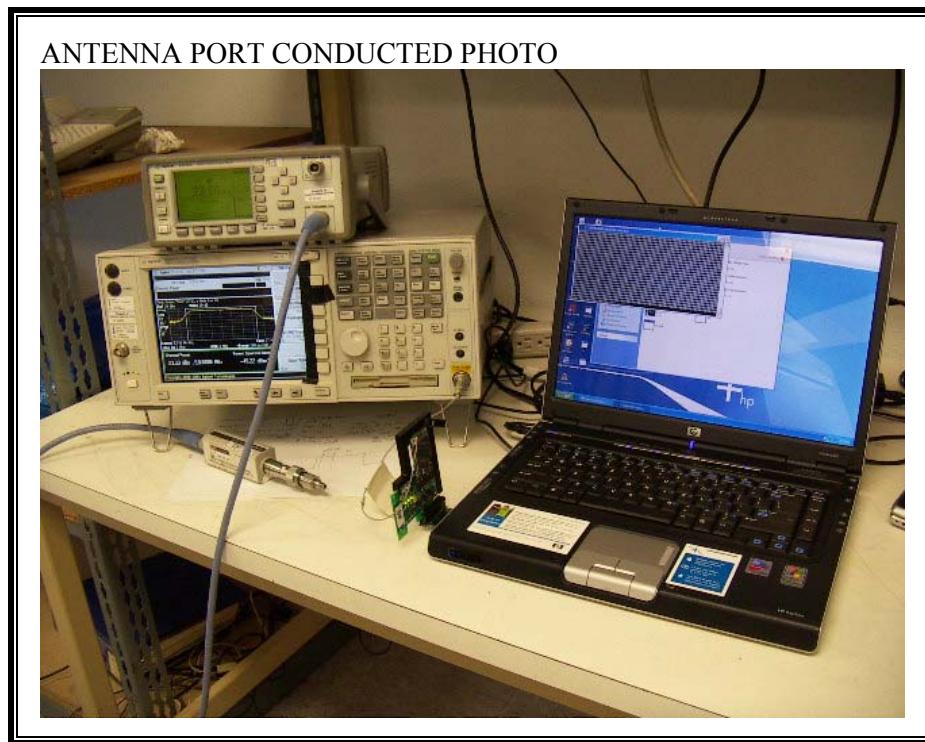



RADIATED RF MEASUREMENT SETUP

RADIATED FRONT PHOTO



RADIATED BACK PHOTO

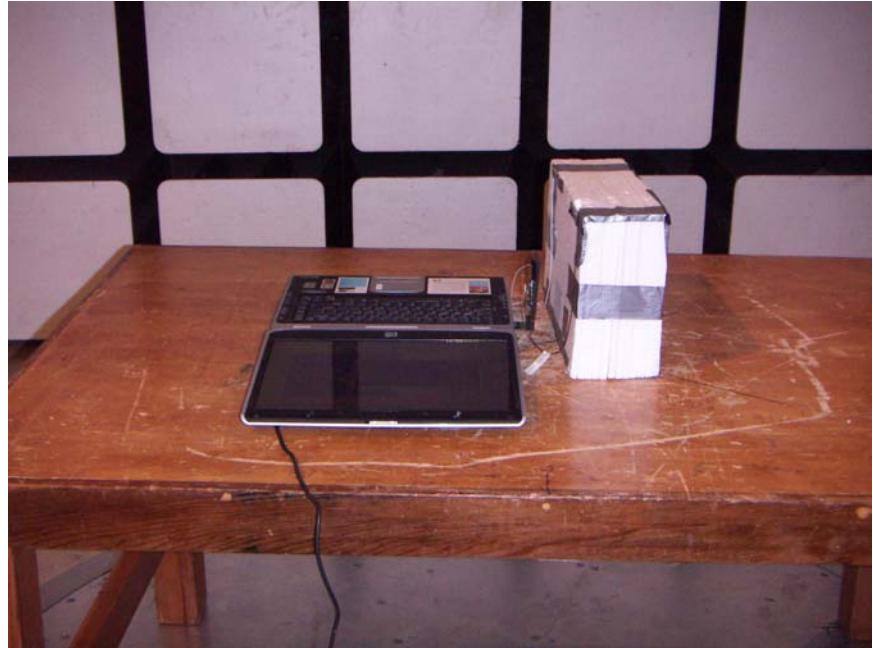

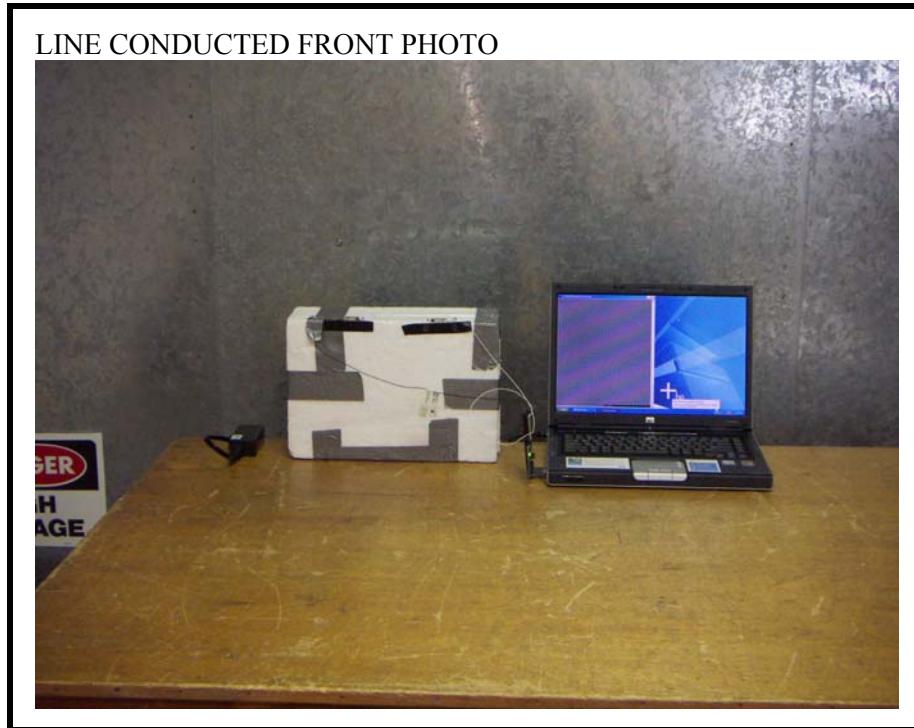POWERLINE CONDUCTED EMISSIONS MEASUREMENT SETUP

LINE CONDUCTED BACK PHOTO

**END OF REPORT**