



System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/16/2005 11:49:16 AM	DUT Battery Model/No:	
Filename:	2412aux_tab_lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BCM94311MCAG	Relative Permittivity:	51.0
Relative Humidity:	50%	Conductivity:	1.858
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-26.00 mm
DUT Position:	Tablet Lap	Max SAR Z-axis Location:	-182.60 mm
Antenna Configuration:	Auxiliary	Max E Field:	7.66 V/m
Test Frequency:	2412MHz	SAR 1g:	0.087 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.045 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.015 W/kg
Type of Modulation:		SAR End:	0.015 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

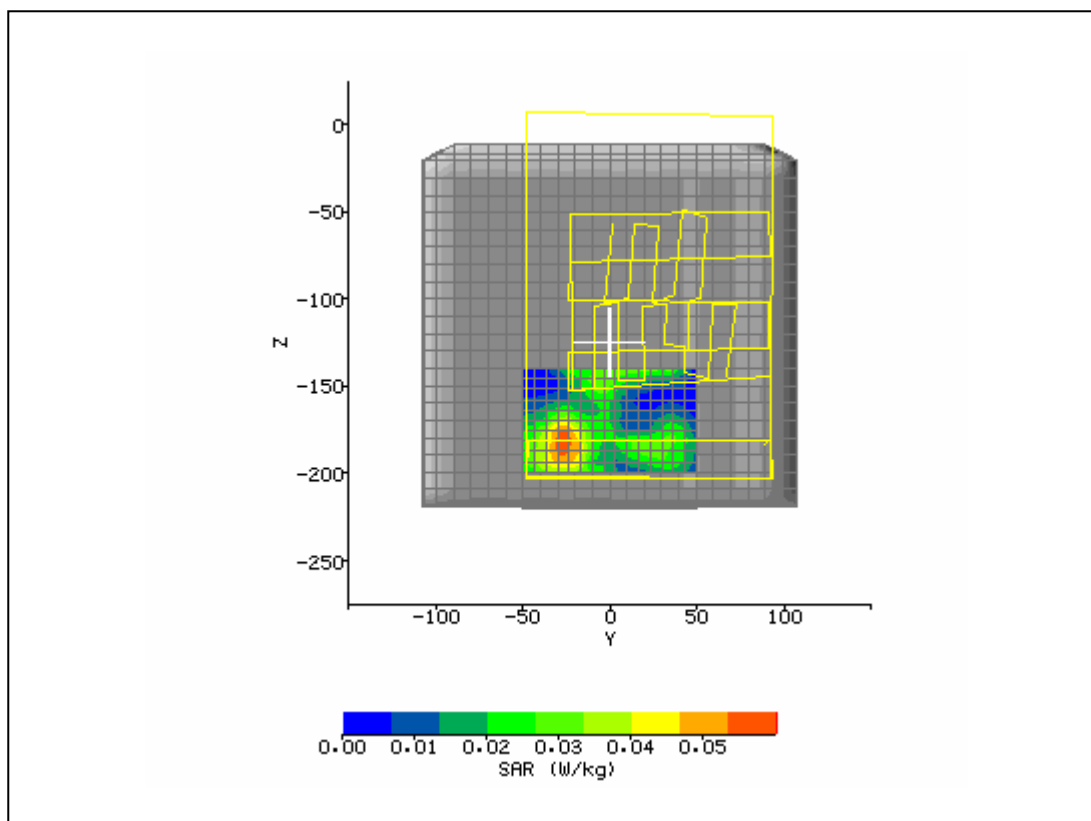

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/16/2005 12:22:58 PM	DUT Battery Model/No:	
Filename:	2442aux_tab_lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BCM94311MCAG	Relative Permittivity:	50.91
Relative Humidity:	50%	Conductivity:	1.896
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-12.00 mm
DUT Position:	Tablet Lap	Max SAR Z-axis Location:	-182.60 mm
Antenna Configuration:	Auxiliary	Max E Field:	7.63 V/m
Test Frequency:	2442MHz	SAR 1g:	0.087 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.044 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.018 W/kg
Type of Modulation:		SAR End:	0.018 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

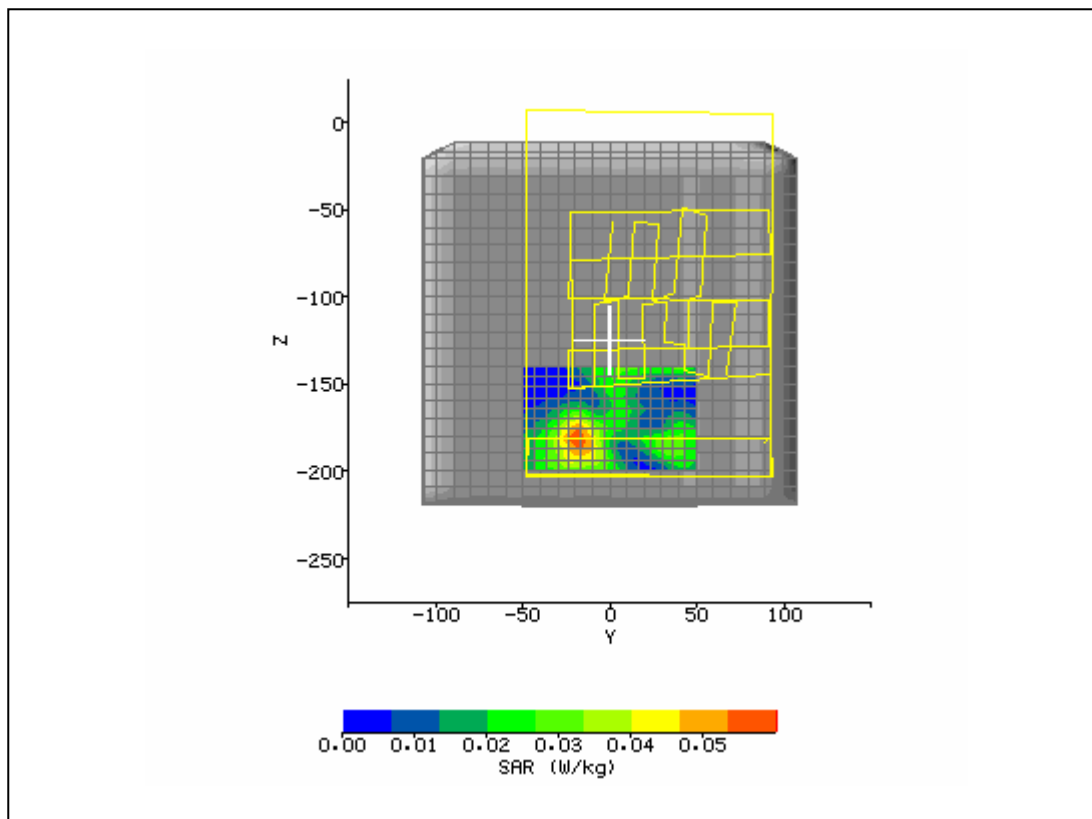

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/16/2005 12:56:20 PM	DUT Battery Model/No:	
Filename:	2472aux_tab_lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	2450
Device Under Test:	Broadcom BCM94311MCAG	Relative Permittivity:	50.79
Relative Humidity:	50%	Conductivity:	1.932
Phantom S/No:	HeadBox_new_spout.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-16.67 mm
DUT Position:	Tablet Lap	Max SAR Z-axis Location:	-184.40 mm
Antenna Configuration:	Auxiliary	Max E Field:	7.74 V/m
Test Frequency:	2472MHz	SAR 1g:	0.086 W/kg
Air Factors:	346 / 318 / 386	SAR 10g:	0.045 W/kg
Conversion Factors:	0.705 / 0.705 / 0.705	SAR Start:	0.020 W/kg
Type of Modulation:		SAR End:	0.020 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.01 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

