




System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/16/2005 2:46:31 PM	DUT Battery Model/No:	
Filename:	5180aux_tab_lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Broadcom BCM94311MCAG	Relative Permittivity:	48.11
Relative Humidity:	50%	Conductivity:	5.40
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	2.67 mm
DUT Position:	Tablet Lap	Max SAR Z-axis Location:	-167.07 mm
Antenna Configuration:	Auxiliary	Max E Field:	4.39 V/m
Test Frequency:	5180MHz	SAR 1g:	0.105 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.840 / 0.840 / 0.840	SAR Start:	0.090 W/kg
Type of Modulation:		SAR End:	0.090 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.00 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

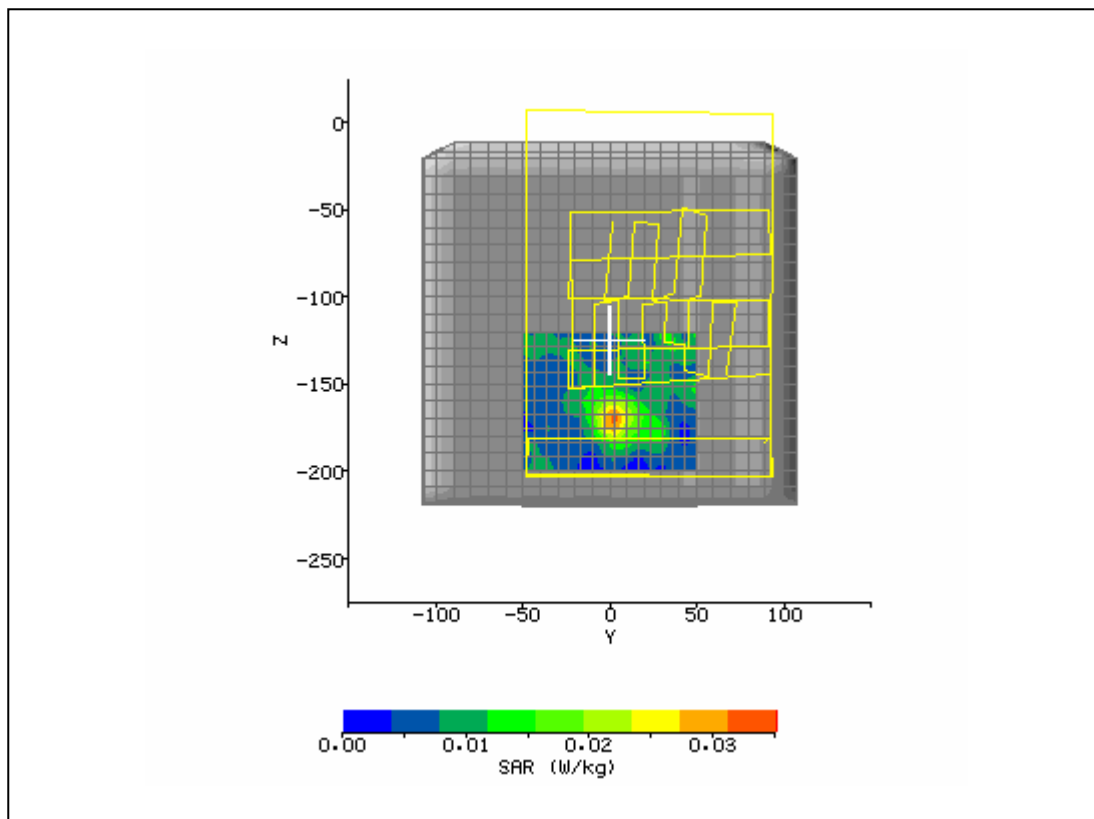


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/16/2005 3:15:12 PM	DUT Battery Model/No:	
Filename:	5260aux_tab_lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Broadcom BCM94311MCAG	Relative Permittivity:	47.72
Relative Humidity:	50%	Conductivity:	5.495
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	2.00 mm
DUT Position:	Tablet Lap	Max SAR Z-axis Location:	-168.00 mm
Antenna Configuration:	Auxiliary	Max E Field:	4.75 V/m
Test Frequency:	5260MHz	SAR 1g:	0.113 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.840 / 0.840 / 0.840	SAR Start:	0.112 W/kg
Type of Modulation:		SAR End:	0.111 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.03 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

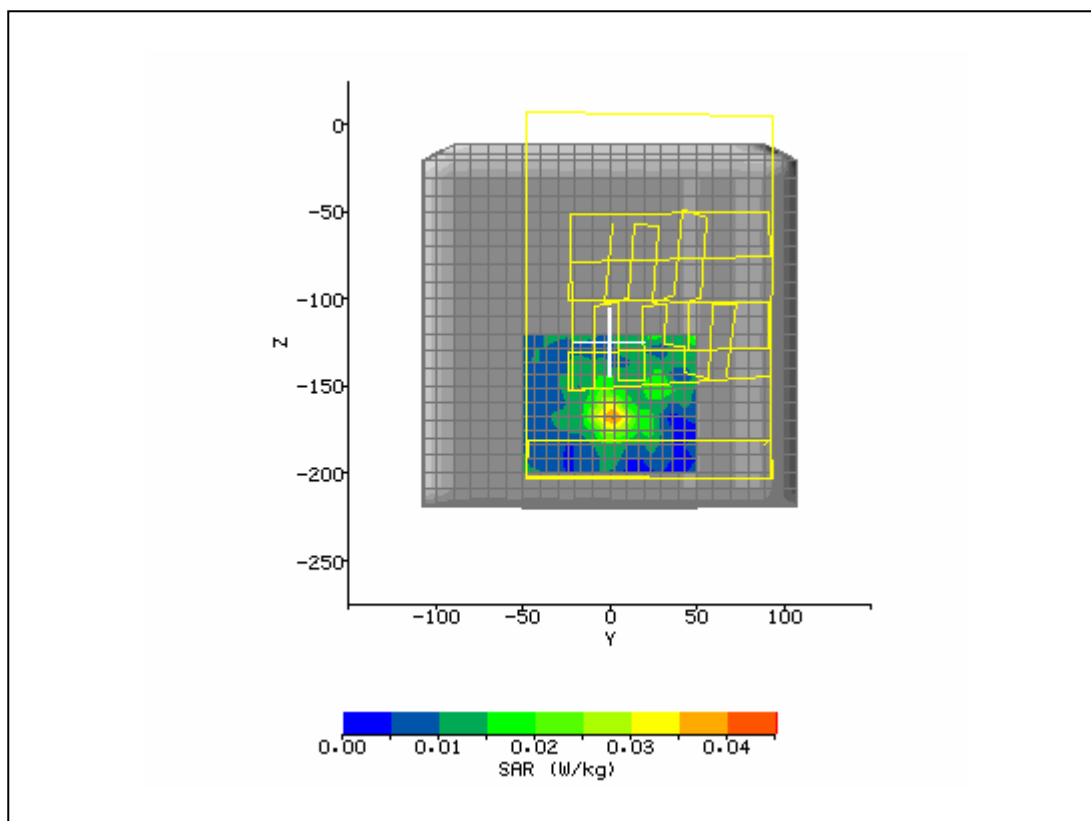


System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/16/2005 3:43:26 PM	DUT Battery Model/No:	
Filename:	5320aux_tab_lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5200
Device Under Test:	Broadcom BCM94311MCAG	Relative Permittivity:	47.89
Relative Humidity:	50%	Conductivity:	5.491
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-3.33 mm
DUT Position:	Tablet Lap	Max SAR Z-axis Location:	-169.73 mm
Antenna Configuration:	Auxiliary	Max E Field:	5.19 V/m
Test Frequency:	5320MHz	SAR 1g:	0.133 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.840 / 0.840 / 0.840	SAR Start:	0.132 W/kg
Type of Modulation:		SAR End:	0.131 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.04 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

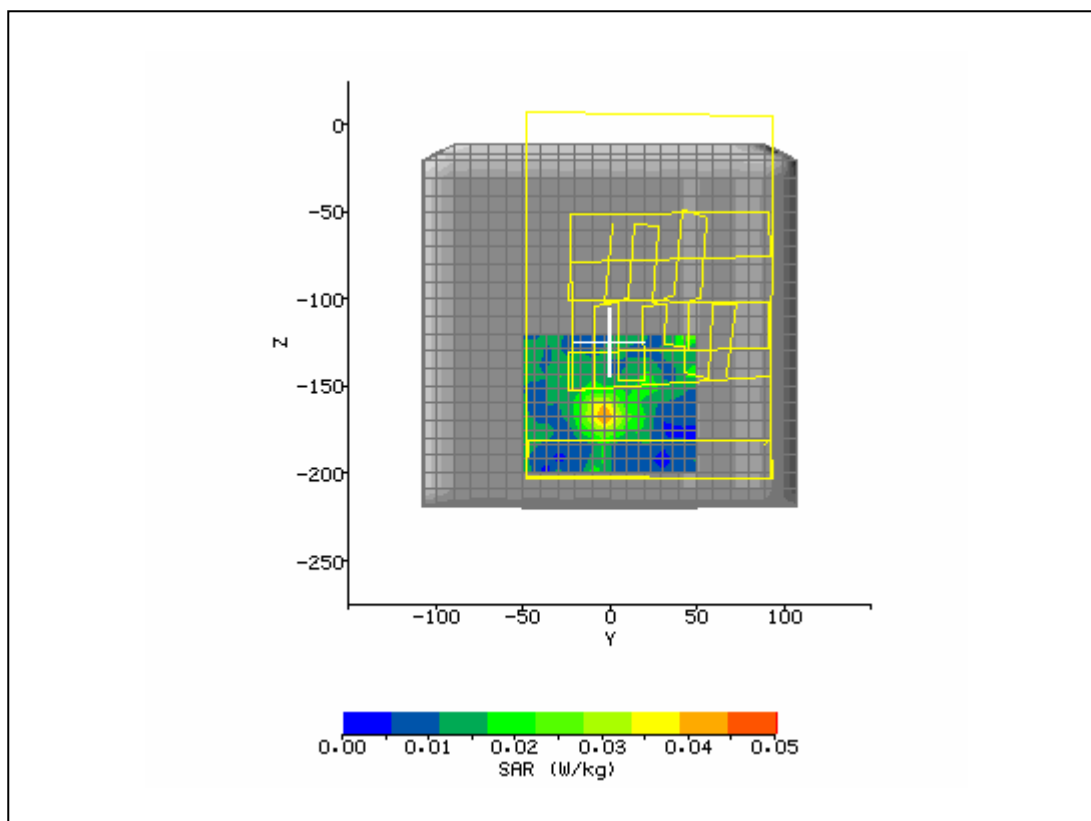

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/16/2005 4:27:26 PM	DUT Battery Model/No:	
Filename:	5745aux_tab_lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Broadcom BCM94311MCAG	Relative Permittivity:	47.36
Relative Humidity:	50%	Conductivity:	6.442
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	-7.33 mm
DUT Position:	Tablet Lap	Max SAR Z-axis Location:	-164.80 mm
Antenna Configuration:	Auxiliary	Max E Field:	4.22 V/m
Test Frequency:	5745MHz	SAR 1g:	0.100 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.750 / 0.750 / 0.750	SAR Start:	0.095 W/kg
Type of Modulation:		SAR End:	0.092 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.13 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

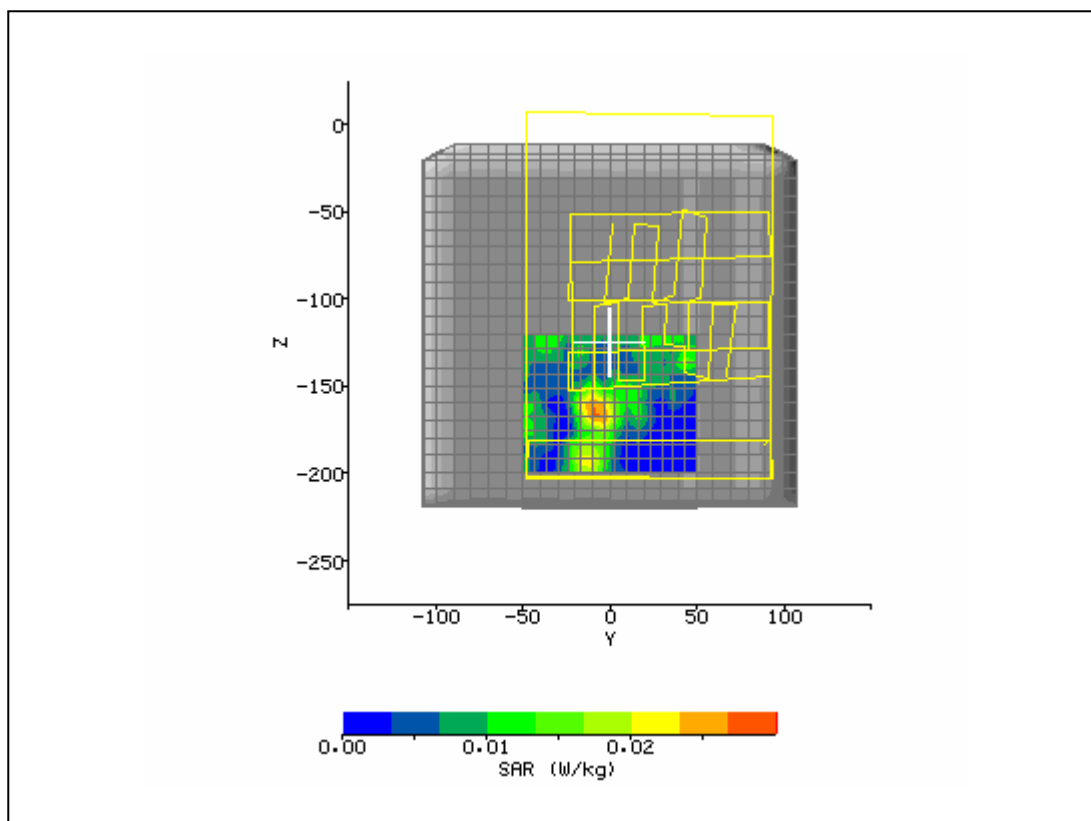

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/16/2005 5:01:41 PM	DUT Battery Model/No:	
Filename:	5765aux_tab_lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Broadcom BCM94311MCAG	Relative Permittivity:	46.95
Relative Humidity:	50%	Conductivity:	6.440
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	1.33 mm
DUT Position:	Tablet Lap	Max SAR Z-axis Location:	-166.53 mm
Antenna Configuration:	Auxiliary	Max E Field:	4.19 V/m
Test Frequency:	5765MHz	SAR 1g:	0.108 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.750 / 0.750 / 0.750	SAR Start:	0.091 W/kg
Type of Modulation:		SAR End:	0.093 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.10 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

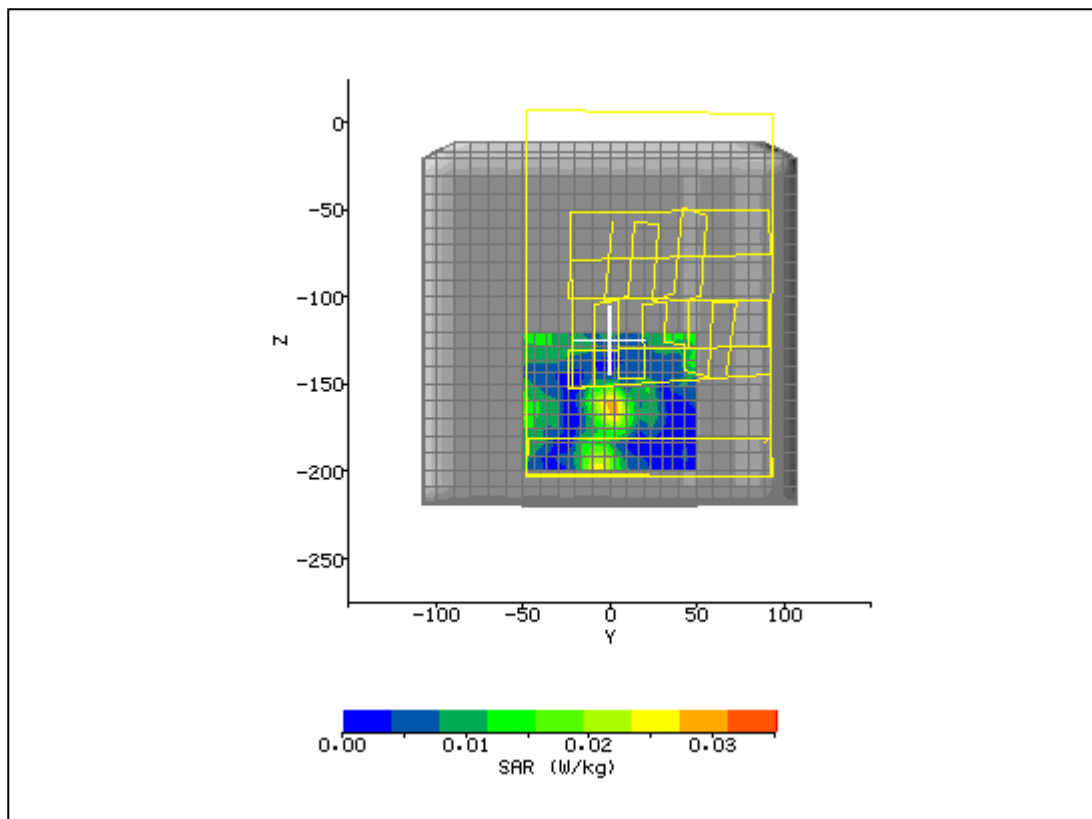

System / software:	SARA2 / 2.3 VPM	Input Power Drift:	
Date / Time:	12/16/2005 5:29:48 PM	DUT Battery Model/No:	
Filename:	5825aux_tab_lap_3d.txt	Probe Serial Number:	0123
Ambient Temperature:	22.0°C	Liquid Simulant:	5800
Device Under Test:	Broadcom BCM94311MCAG	Relative Permittivity:	46.88
Relative Humidity:	50%	Conductivity:	6.444
Phantom S/No:	HeadBox_new_spout.c sv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR Y-axis Location:	0.00 mm
DUT Position:	Tablet Lap	Max SAR Z-axis Location:	-164.80 mm
Antenna Configuration:	Auxiliary	Max E Field:	3.82 V/m
Test Frequency:	5825MHz	SAR 1g:	0.095 W/kg
Air Factors:	346 / 318 / 386		
Conversion Factors:	0.750 / 0.750 / 0.750	SAR Start:	0.078 W/kg
Type of Modulation:		SAR End:	0.077 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.06 dB
Diode Compression Factors (V*200):	19 / 19 / 19	Probe battery last changed:	11/18/2005
Input Power Level:	max	Extrapolation:	poly4

