

FCC Test Report

FCC Part 15.247 for DSSS systems

For
802.11ag Wireless LAN PCI-E Mini Card

Model #: BCM94311MCAG

**Broadcom Corporation
190 Mathilda Place
Sunnyvale, CA 94086
U.S.A**

FCC ID: QDS-BRCM1019

**TEST REPORT #: EMC_BROAD_033_07002_FCC15_247_b_g_BRCM1019
DATE: 2007-7-23**



 **Bluetooth™**
Bluetooth
Qualification Test
Facility
(BQTF)

 **CTIA Authorized Test Lab**
LAB CODE 20020328-00

**FCC listed:
A2LA
accredited**

**IC recognized

3925**

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686
Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

TABLE OF CONTENTS

1 ASSESSMENT	3
TECHNICAL RESPONSIBILITY FOR AREA OF TESTING:.....	3
EMC & Radio	3
THIS REPORT IS PREPARED BY:.....	3
EMC & Radio	3
2 ADMINISTRATIVE DATA	4
2.1 IDENTIFICATION OF THE TESTING LABORATORY	4
2.2 IDENTIFICATION OF THE CLIENT	4
2.3 IDENTIFICATION OF THE MANUFACTURER	4
SAME AS ABOVE APPLICANT.	4
3 EQUIPMENT UNDER TEST (EUT).....	5
3.1 SPECIFICATION OF THE EQUIPMENT UNDER TEST	5
3.2 SPECIFICATION OF THE SUPPORTING PORTABLE PLATFORM.....	5
4 SUBJECT OF INVESTIGATION	6
5 MEASUREMENTS	7
5.1 MAXIMUM PEAK OUTPUT POWER § 15.247 (B) (1).....	7
5.2 RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205.....	20
5.2.1 <i>LIMITS</i>	20
5.2.2 <i>Results Lower Restricted Band 2310 MHz to 2390 MHz</i>	21
5.2.3 <i>Results Upper Restricted Band 2483.5 MHz to 2500 MHz</i>	29
5.3 TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209	37
5.3.1 <i>LIMITS</i>	37
5.3.2 <i>RESULTS</i>	38
5.4 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207	50
5.4.1 <i>Limits</i>	50
5.4.2 <i>Results, Line:</i>	51
6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS	53
7 BLOCK DIAGRAMS	54

1 Assessment

The following is in compliance with the applicable criteria specified in FCC rules Part 15.247 of the Code of Federal Regulations.

Company	Description	Model #
Broadcom Corporation	802.11ag Wireless LAN PCI-E Mini Card	BCM94311MCAG

Technical responsibility for area of testing:

Lothar Schmidt
(Director Regulatory and

2007-7-23 EMC & Radio Antenna Services)

Date	Section	Name	Signature
------	---------	------	-----------

This report is prepared by:

Peter Mu

2007-7-23 EMC & Radio (EMC Project Engineer)

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Responsible Test Lab Manager:	Lothar Schmidt

2.2 Identification of the Client

Applicant's Name:	Broadcom Corporation
Address Line 1:	190 Mathilda Place
Address Line 2:	
City/ Zip Code	Sunnyvale, California 94086
Country:	U.S.A
Contact Person:	Daniel Lawless
Phone No.:	408 922 5870
Fax:	408 543 3399
e-mail:	dlawless@broadcom.com

2.3 Identification of the Manufacturer

Same as above applicant.

3 Equipment under Test (EUT)

3.1 Specification of the Equipment under Test

Product Type	Mini PCI Card
Marketing Name:	802.11ag Wireless LAN PCI-E Mini Card
Model No:	BCM94311MCAG
Operating Frequency:	2400MHz – 2483.5MHz
Date of Test:	2007-6-27 to 2007-7-18
Type(s) of Modulation:	CCK, OFDM
Antenna Type:	WDAN-DWDS1-001-DF and Amphenol antenna WT0581-11 23.45 dBm (0.221W)
Output Power¹:	EIRP WLAN 802.11b Chain A 2462MHz 27.61 dBm (0.577W) EIRP WLAN 802.11g Chain A 2462MHz

3.2 Specification of the Supporting Portable Platform

Product Type	Notebook PC
Marketing Name:	Dell XPS M1730
Model No:	Dell PP06XA

4 Subject Of Investigation

All testing was performed on the product referred to in Section 3 as EUT. EUT contains Broadcom BCM94311MCAG WLAN module, FCC ID: QDS-BRCM1019 that supports the following mode and frequency bands:

2400-2483.4MHz: 802.11b, 802.11g

5150-5350MHz: 802.11a

5725-5850MHz: 802.11a

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT operating under 802.11b/g mode in the 2400-2483.4MHz range as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations. The maximization of portable equipment is conducted in accordance with ANSI C63.4.

5 Measurements**5.1 MAXIMUM PEAK OUTPUT POWER (RADIATED)****§ 15.247 (b) (1)****EIRP:****802.11b**

TEST CONDITIONS			MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)			2412	2437	2462
Chain A	T _{nom} (23)°C	V _{nom}	14.76	21.36	23.45
Chain B	T _{nom} (23)°C	V _{nom}	17.07	19.68	19.29
Measurement uncertainty			±0.5dBm		

802.11g

TEST CONDITIONS			MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)			2412	2437	2462
Chain A	T _{nom} (23)°C	V _{nom}	20.1	25.45	27.61
Chain B	T _{nom} (23)°C	V _{nom}	22.7	24.12	20.73
Measurement uncertainty			±0.5dBm		

EIRP: 2412MHz (802.11b) Chain A


EUT: Dell Siberia
Customer: Broadcom
Test Mode: 802.11b, ch 1, chain a
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEET TABLE: "EIRP RLAN CH1"

Short Description:		EIRP RLAN channel-2412 MHz		
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
2.4 GHz	2.4 GHz	MaxPeak	Coupled	10 MHz DUMMY-DBM
		MaxPeak		

Marker: 2.414655311 GHz 14.76 dBm

Level [dBm]

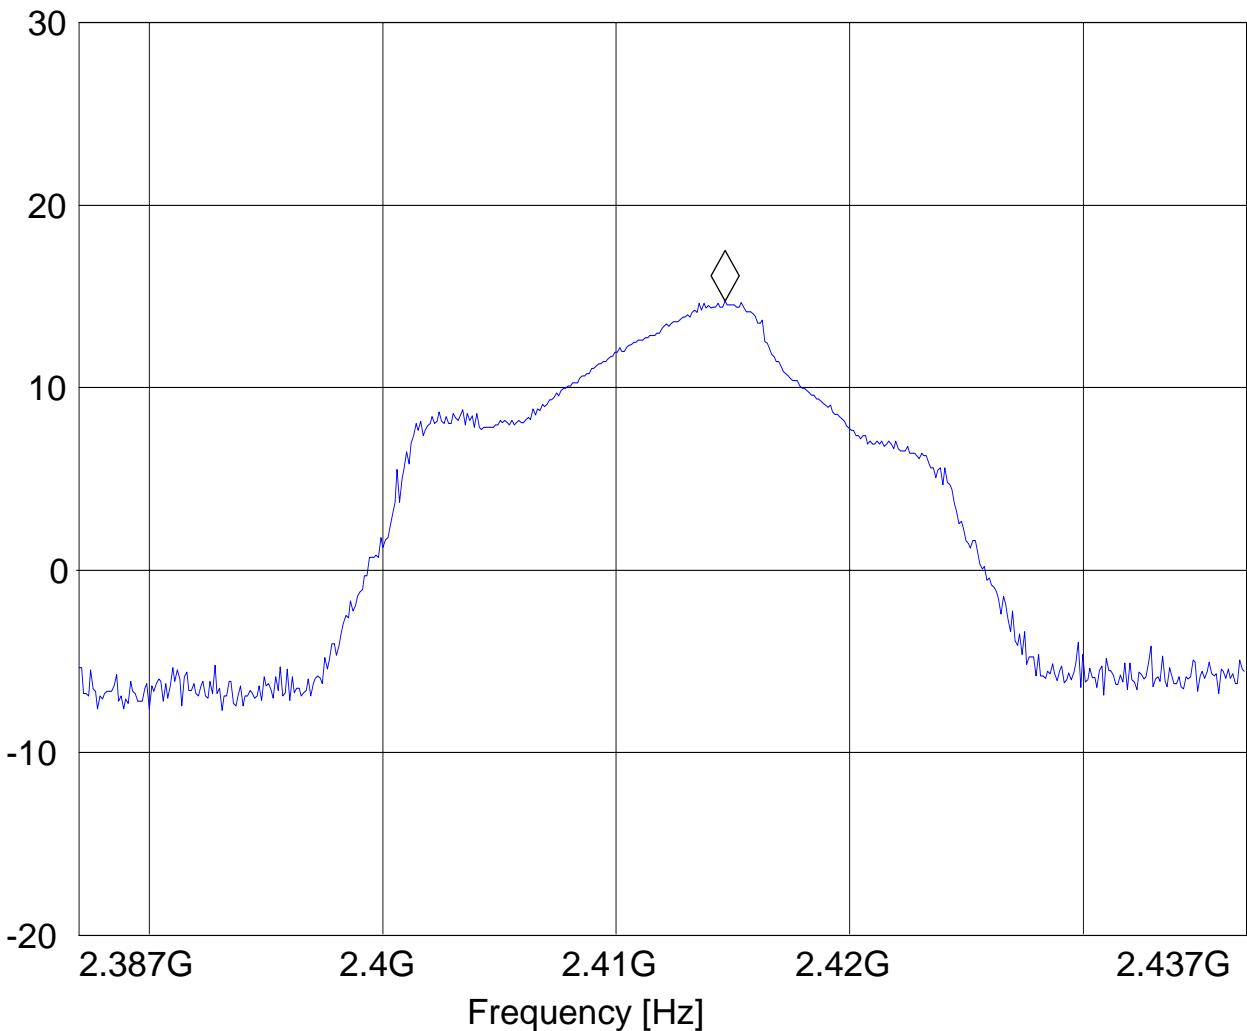

EIRP: 2412MHz (802.11b) Chain B


EUT: Dell Siberia
Customer: Broadcom
Test Mode: 802.11b, Ch 1, chain b
ANT Orientation: V
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEEP TABLE: "EIRP RLAN CH1"

Short Description:		EIRP RLAN channel-2412 MHz		
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
2.4 GHz	2.4 GHz	MaxPeak	Coupled	10 MHz DUMMY-DBM
		MaxPeak		

Marker: 2.41445491 GHz 17.07 dBm

Level [dBm]

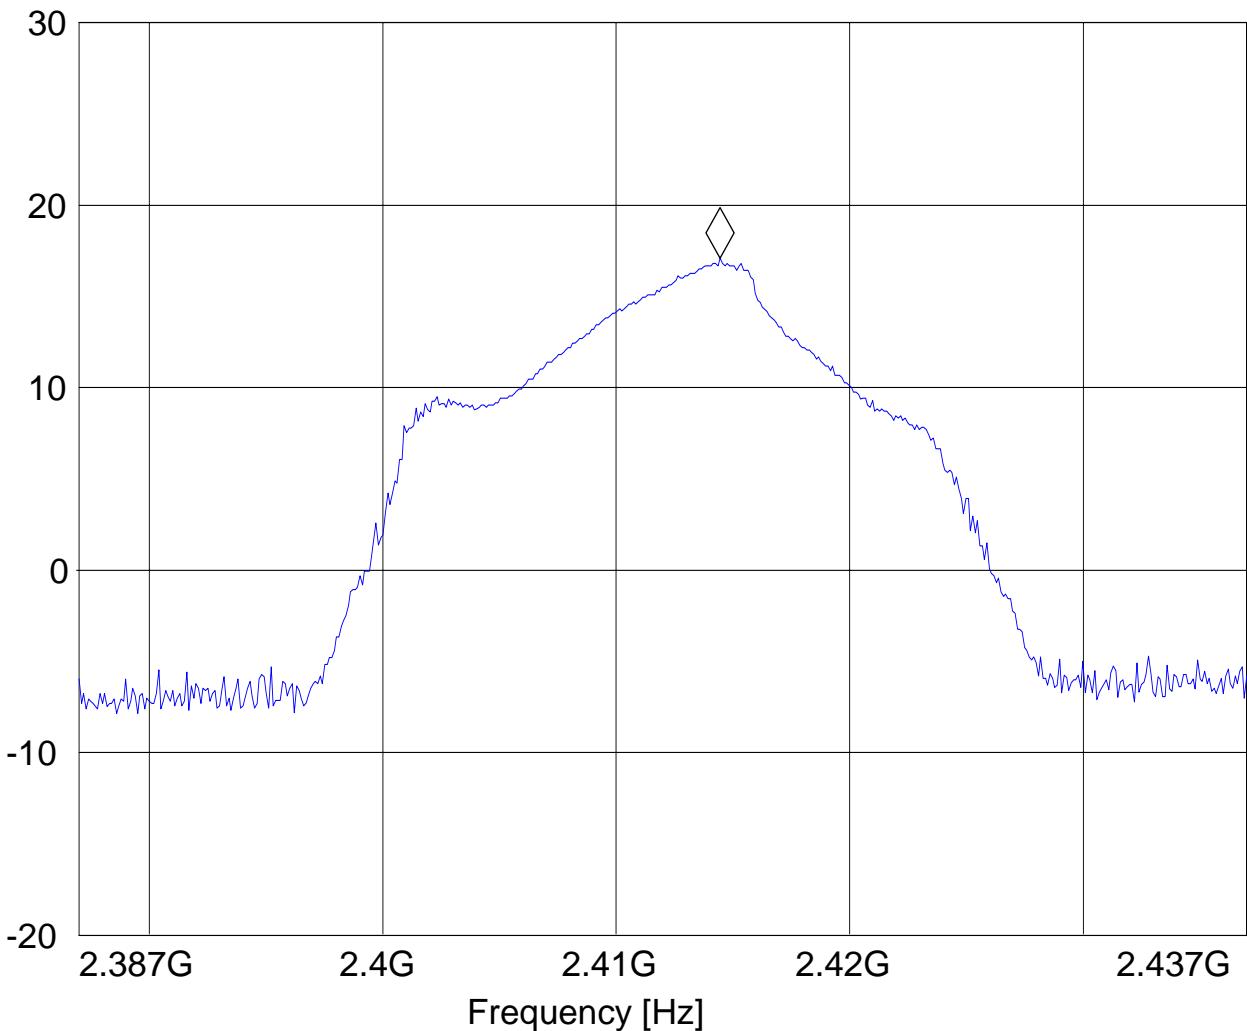

EIRP: 2437MHz (802.11b) Chain A


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11b, ch 6, chain a
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "EIRP RLAN CH6"

Short Description: EIRP RLAN channel-2437 MHz
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 2.4 GHz 2.5 GHz MaxPeak Coupled 10 MHz DUMMY-DBM

Marker: 2.43945491 GHz 21.36 dBm

Level [dBm]

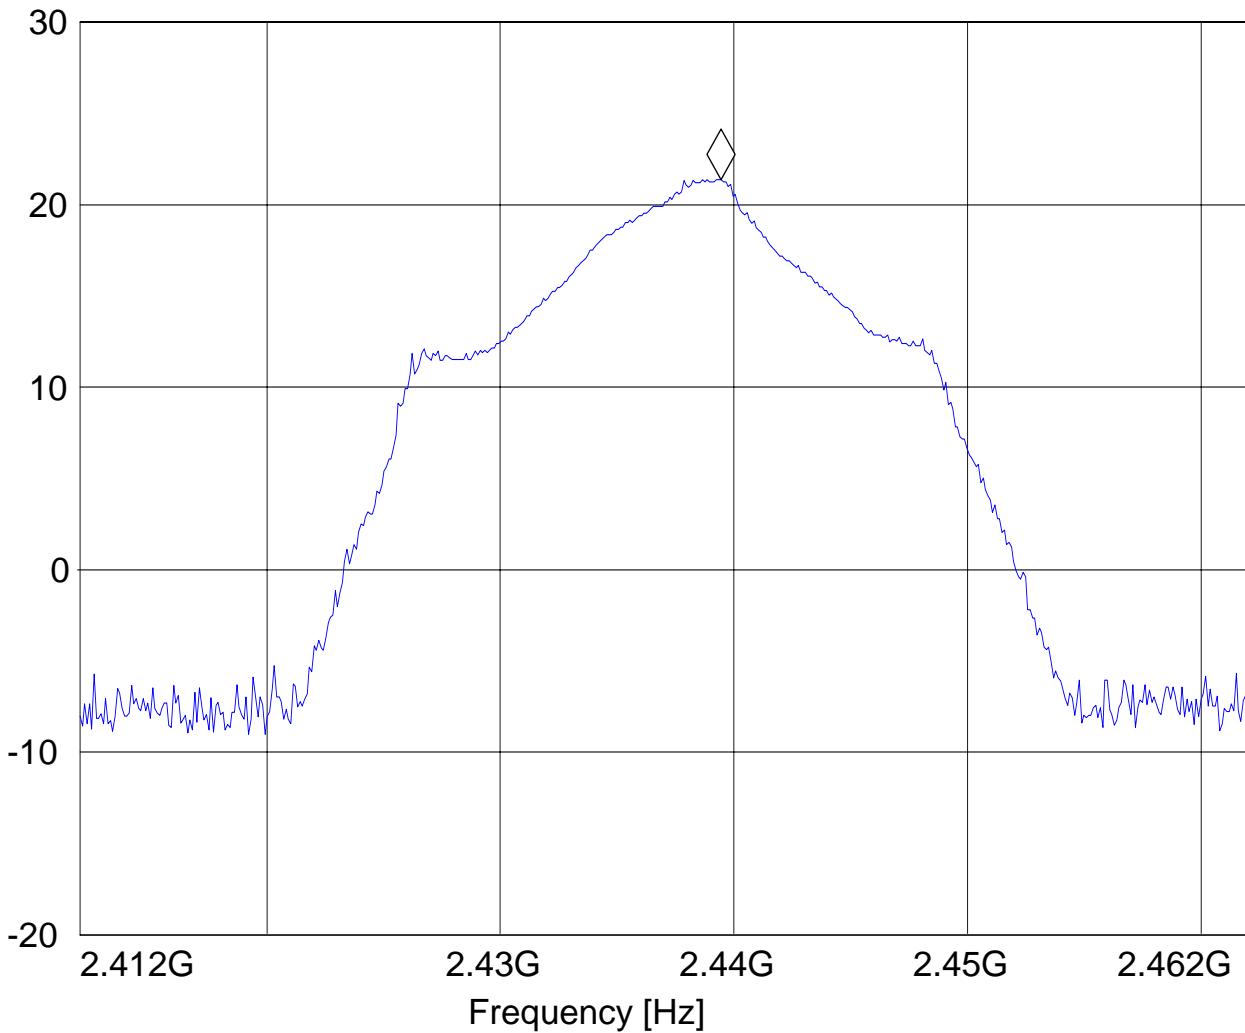

EIRP: 2437MHz (802.11b) Chain B


EUT: Dell Siberia
Customer: Broadcom
Test Mode: 802.11b, Ch 6, chain b
ANT Orientation: V
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEET TABLE: "EIRP RLAN CH6"

Short Description:		EIRP RLAN channel-2437 MHz		
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
2.4 GHz	2.5 GHz	MaxPeak	Coupled	10 MHz DUMMY-DBM

Marker: 2.439054108 GHz 19.68 dBm

Level [dBm]

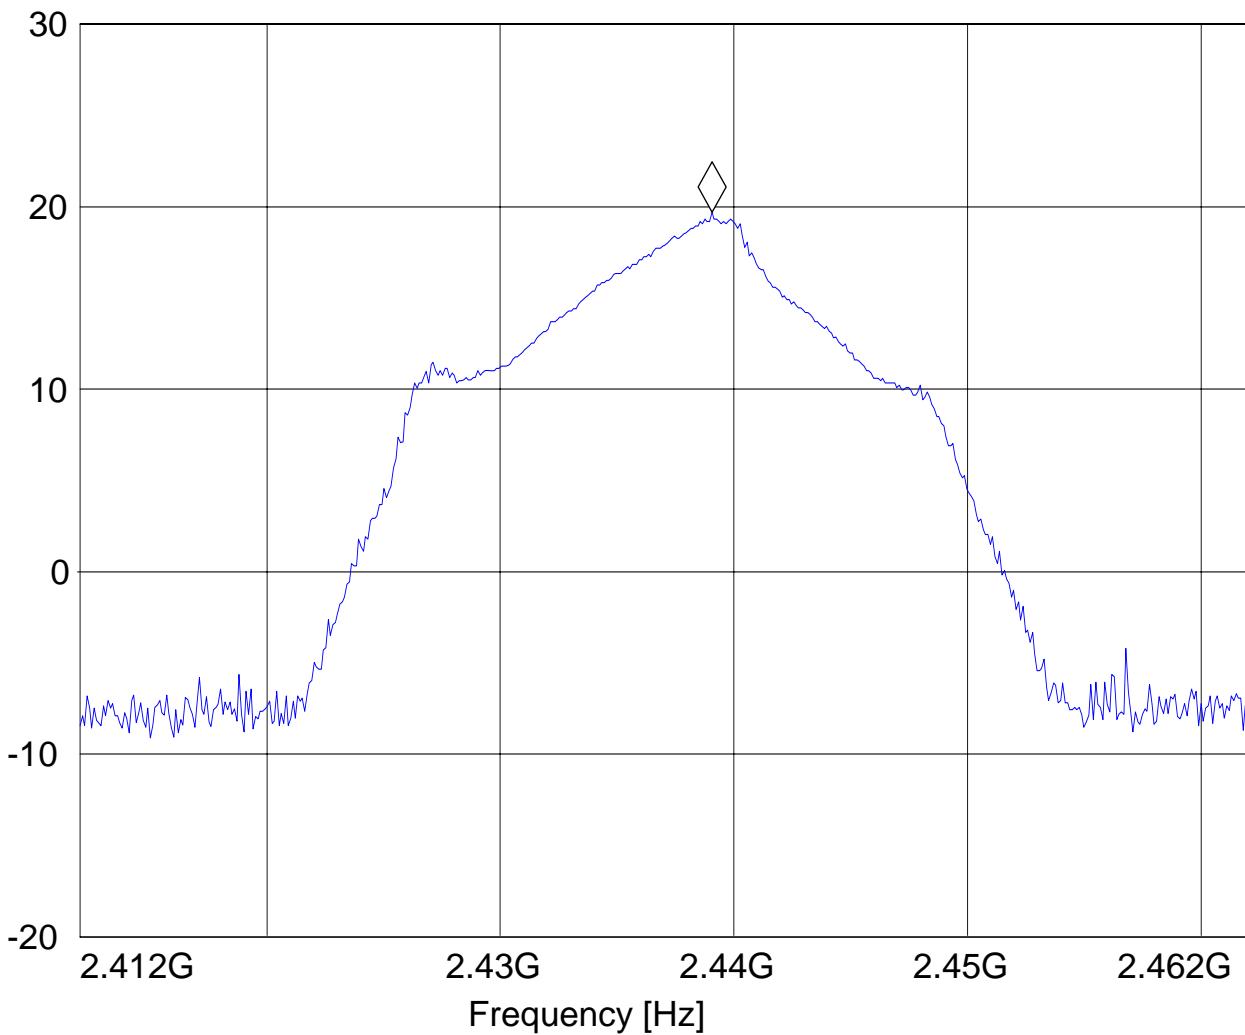

EIRP: 2462MHz (802.11b) Chain A


Customer: Broadcom
 Test Mode: 802.11b, ch 11, chain a
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "EIRP RLAN CH11"

Short Description: EIRP RLAN channel-2462 MHz				
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
2.4 GHz	2.5 GHz	MaxPeak	Coupled	10 MHz DUMMY-DBM
		MaxPeak		

Marker: 2.46455511 GHz 23.45 dBm

Level [dBm]

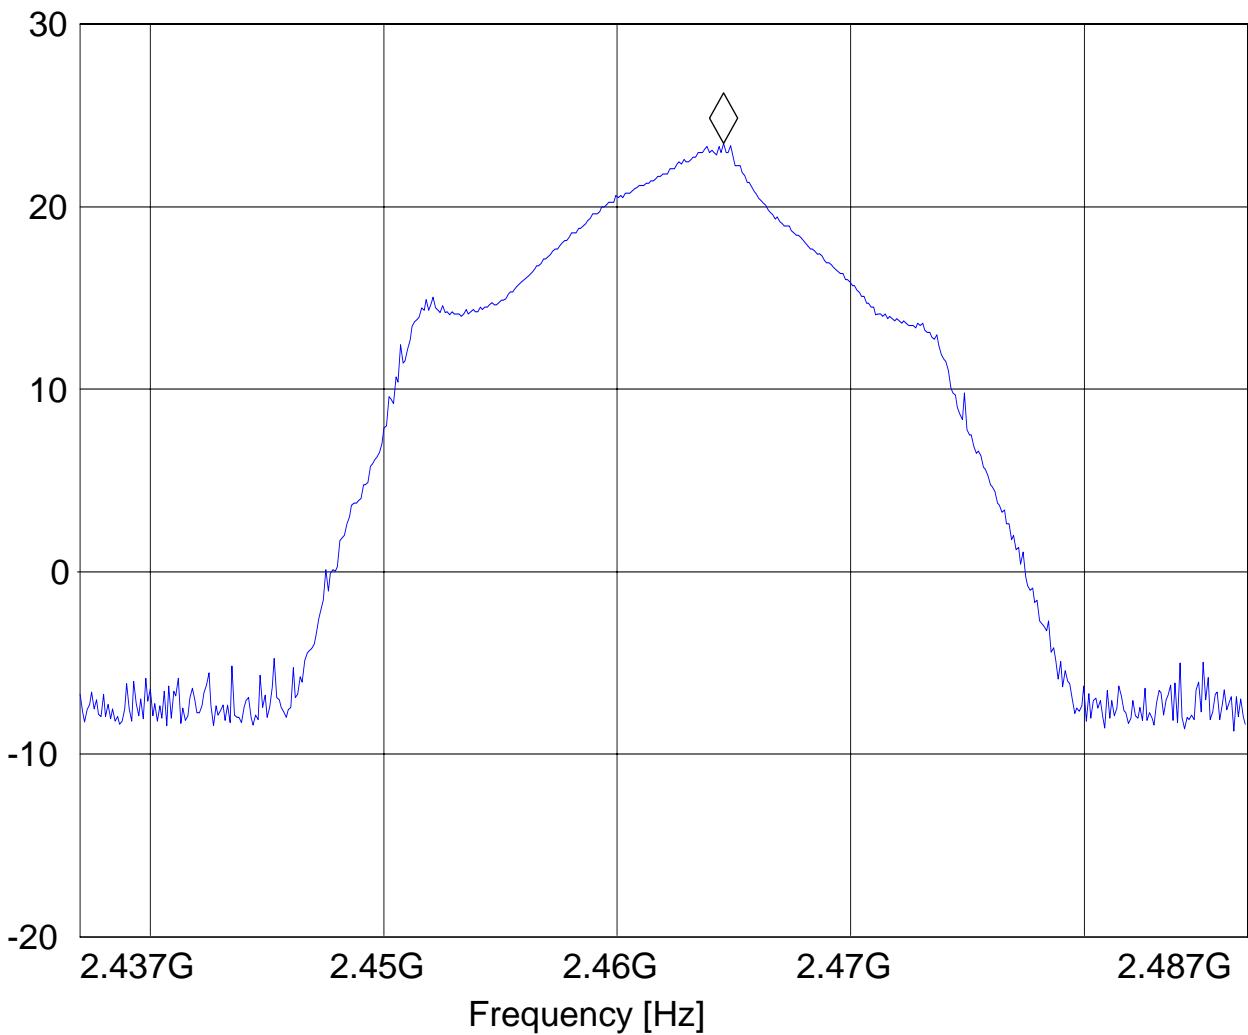

EIRP: 2462MHz (802.11b) Chain B


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11b, Ch 11, chain b
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "EIRP RLAN CH11"

Short Description:		EIRP RLAN channel-2462 MHz		
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
2.4 GHz	2.5 GHz	MaxPeak	Coupled	10 MHz DUMMY-DBM
		MaxPeak		

Marker: 2.464254509 GHz 19.29 dBm

Level [dBm]

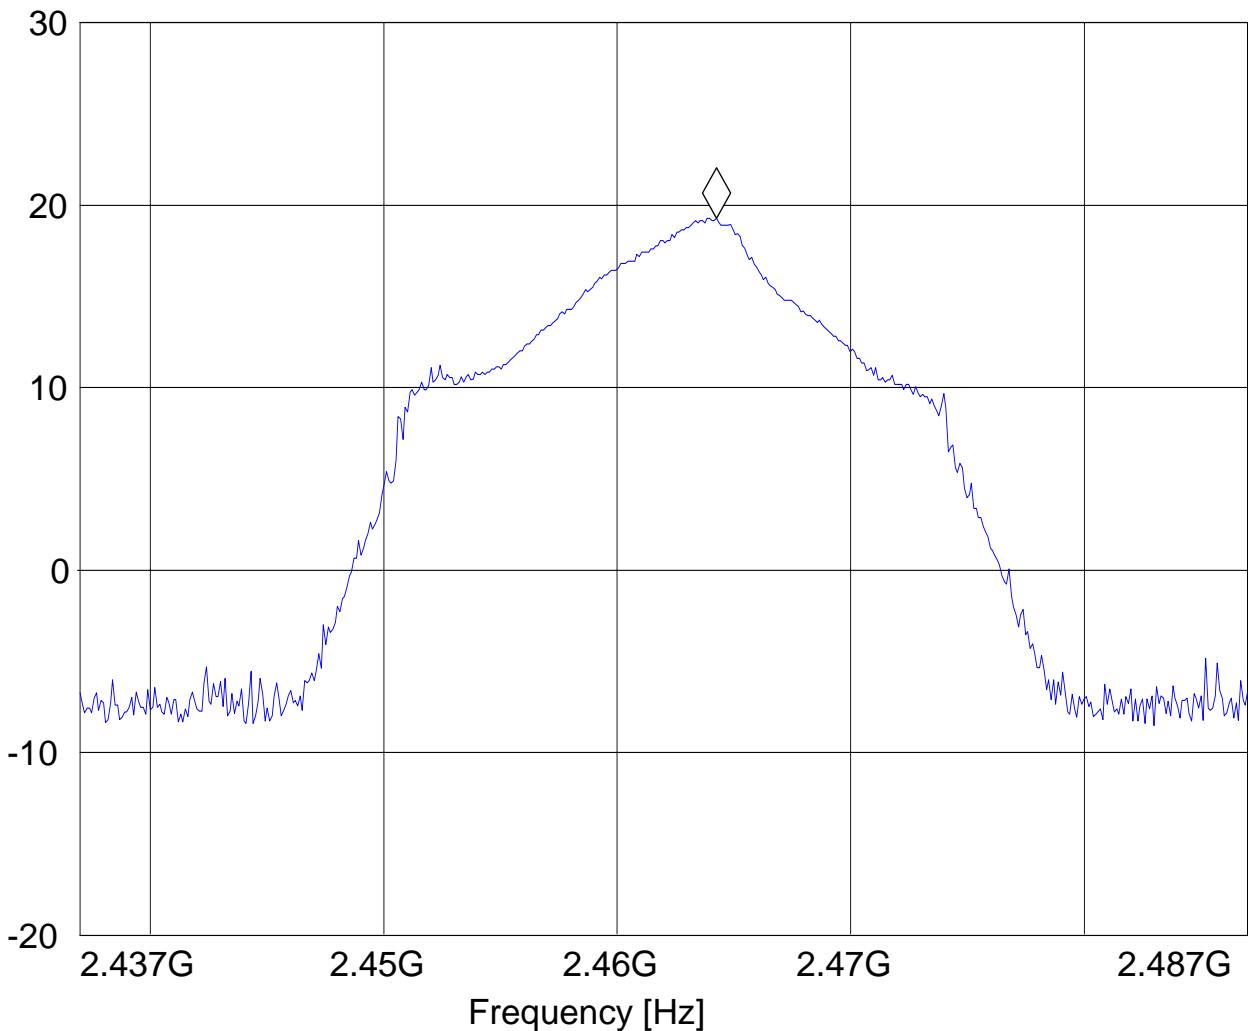

EIRP: 2412MHz (802.11g) Chain A


EUT: Dell Siberia
Customer: Broadcom
Test Mode: 802.11g, ch 1, chain a
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEET TABLE: "EIRP RLAN CH1"

Short Description:		EIRP RLAN channel-2412 MHz		
Start Frequency	Stop Frequency	Detector	Meas.	IF
2.4 GHz	2.4 GHz	MaxPeak	Coupled	10 MHz
				DUMMY-DBM
		MaxPeak		

Marker: 2.409845691 GHz 20.1 dBm

Level [dBm]

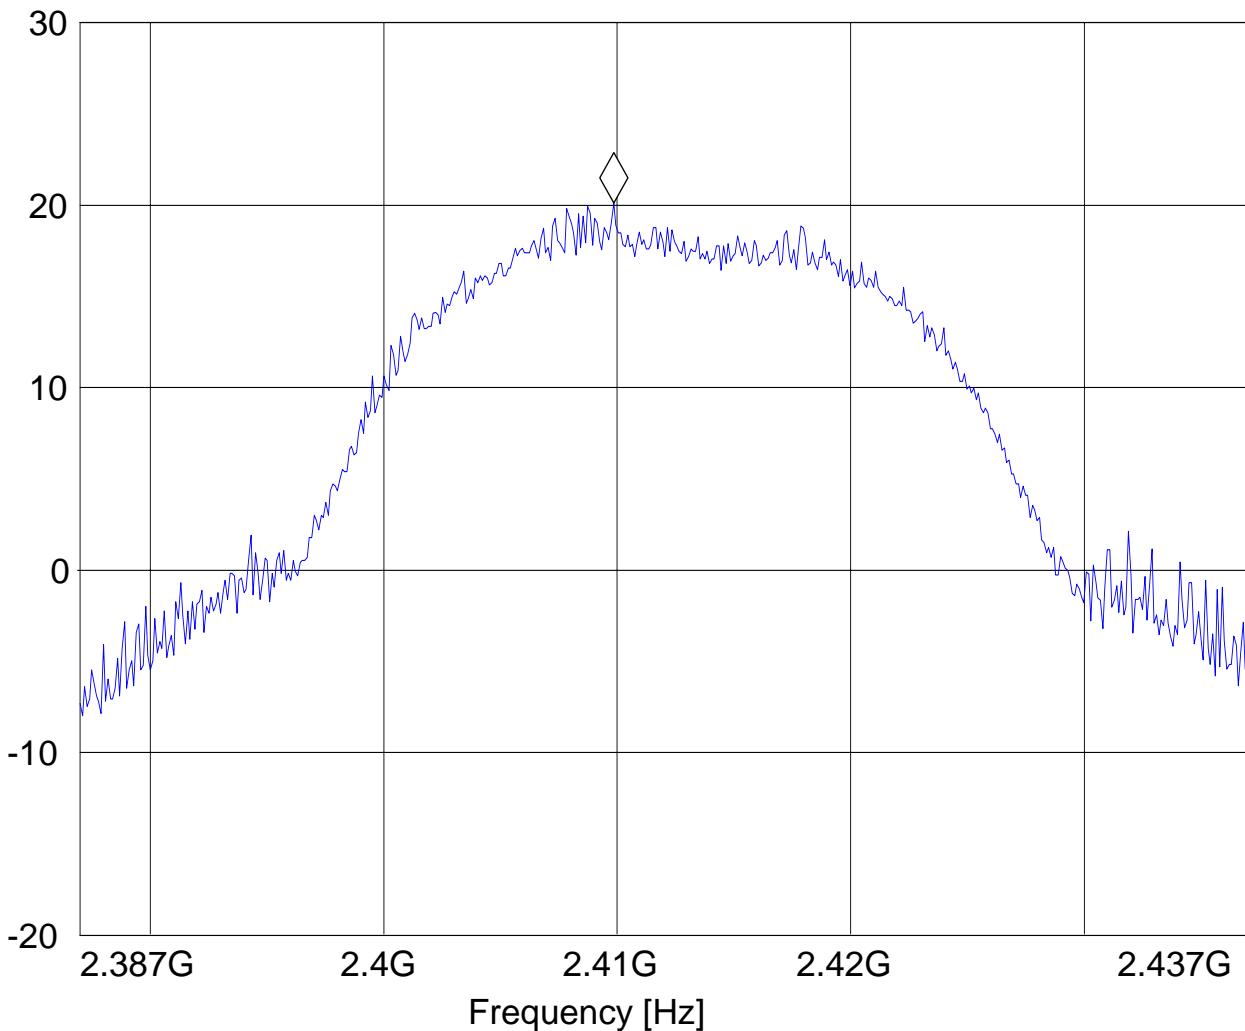

EIRP: 2412MHz (802.11g) Chain B


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11g, Ch 1, chain b
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "EIRP RLAN CH1"

Short Description:		EIRP RLAN channel-2412 MHz		
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
2.4 GHz	2.4 GHz	MaxPeak	Coupled	10 MHz DUMMY-DBM
		MaxPeak		

Marker: 2.408042084 GHz 22.7 dBm

Level [dBm]

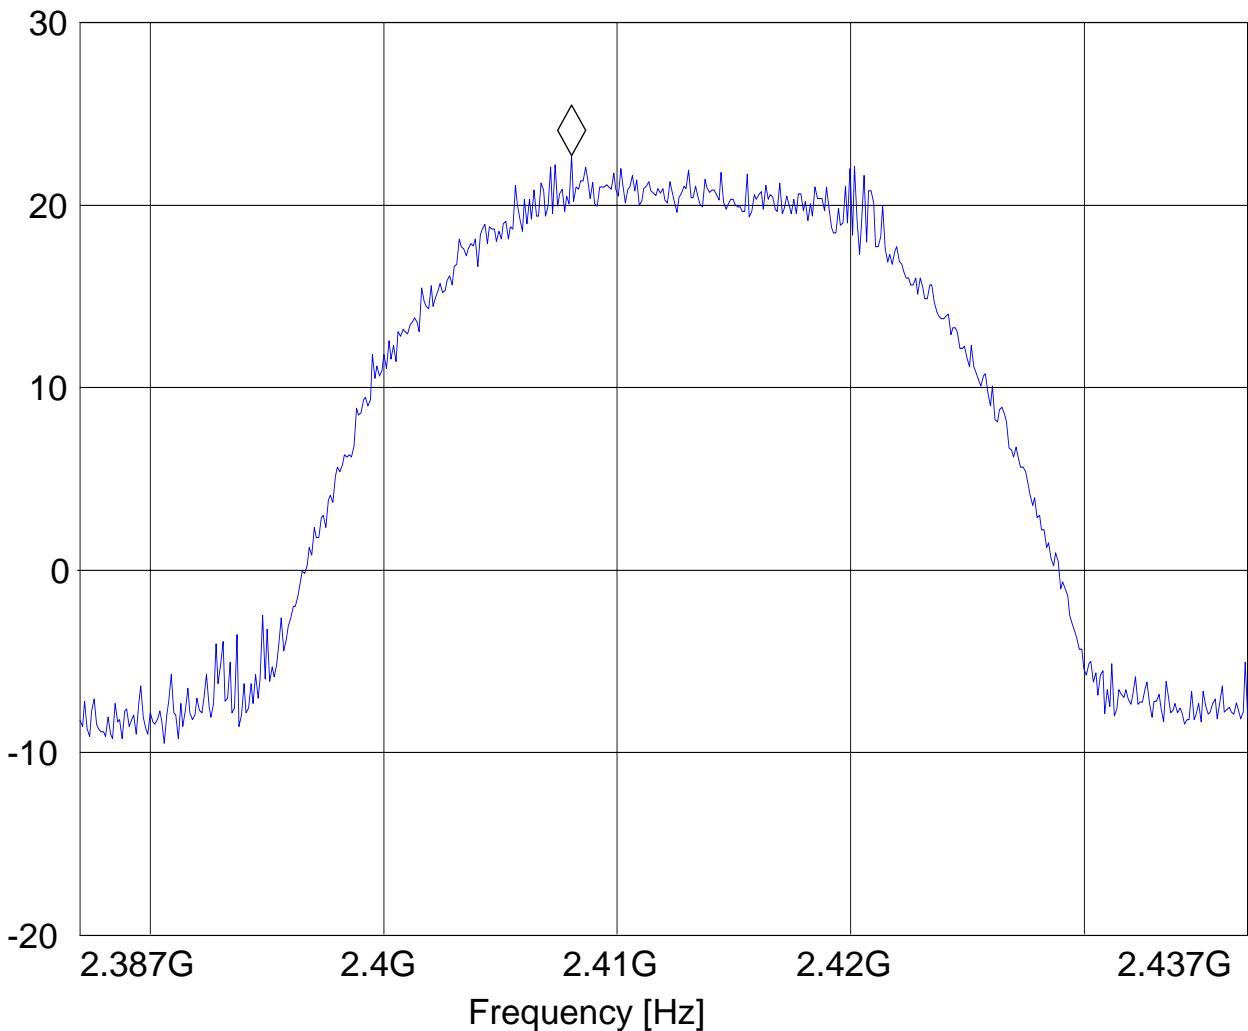

EIRP: 2437MHz (802.11g) Chain A


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11g, ch 6, chain a
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "EIRP RLAN CH6"

Short Description:		EIRP RLAN channel-2437 MHz		
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
2.4 GHz	2.5 GHz	MaxPeak	Coupled	10 MHz DUMMY-DBM

Marker: 2.437250501 GHz 25.45 dBm

Level [dBm]

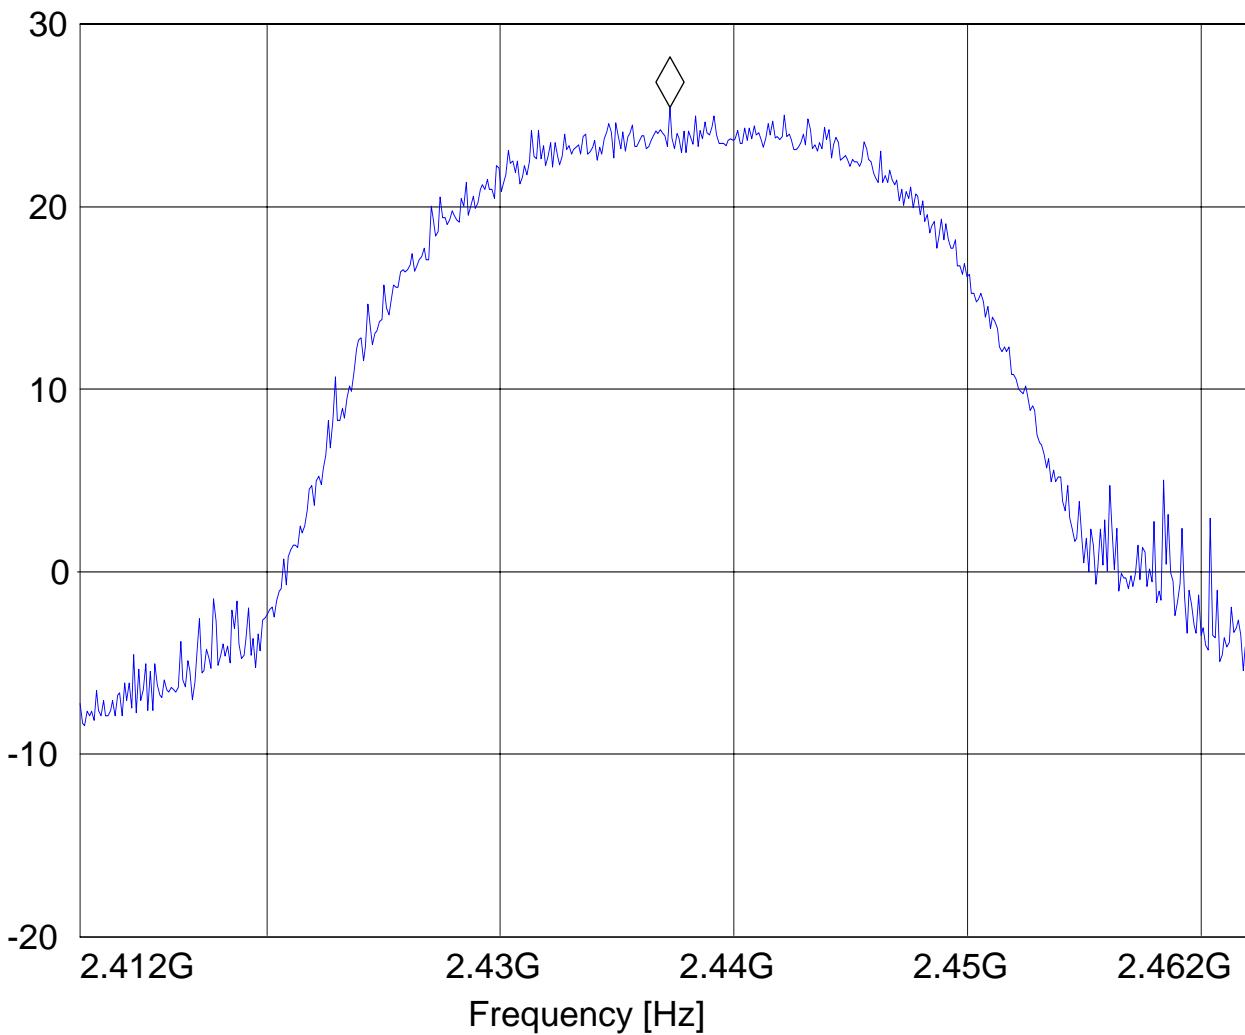

EIRP: 2437MHz (802.11g) Chain B


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11g, Ch 6, chain b
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "EIRP RLAN CH6"

Short Description: EIRP RLAN channel-2437 MHz
 Start Stop Detector Meas. IF Transducer
 Frequency Frequency Time Bandw.
 2.4 GHz 2.5 GHz MaxPeak Coupled 10 MHz DUMMY-DBM

Marker: 2.436348697 GHz 24.12 dBm

Level [dBm]

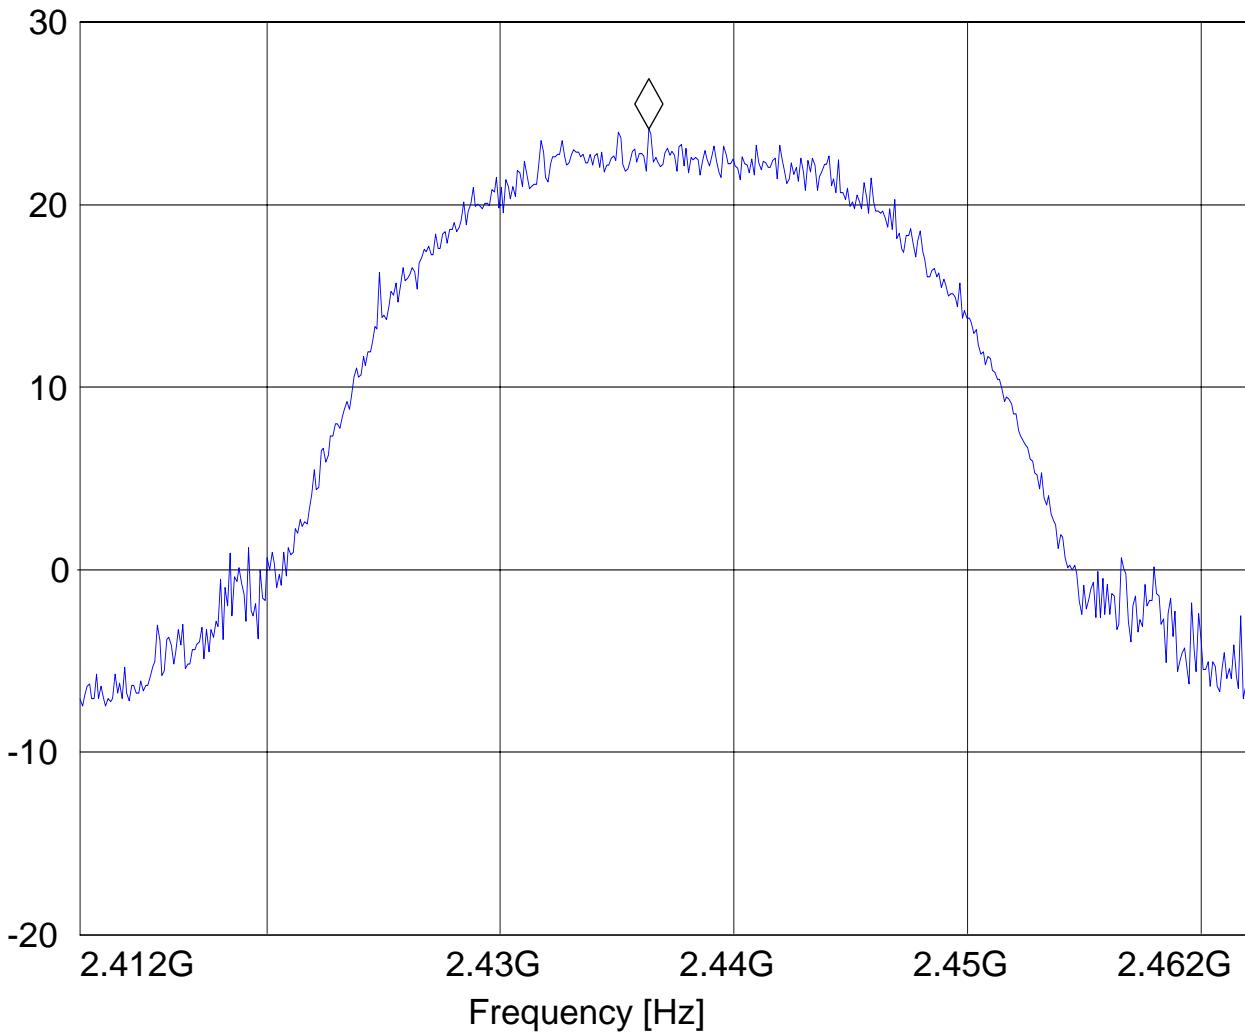

EIRP: 2462MHz (802.11g) Chain A


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11g, ch 11, chain a
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "EIRP RLAN CH11"

Short Description:		EIRP RLAN channel-2462 MHz		
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
2.4 GHz	2.5 GHz	MaxPeak	Coupled	10 MHz DUMMY-DBM
		MaxPeak		

Marker: 2.461048096 GHz 27.61 dBm

Level [dBm]

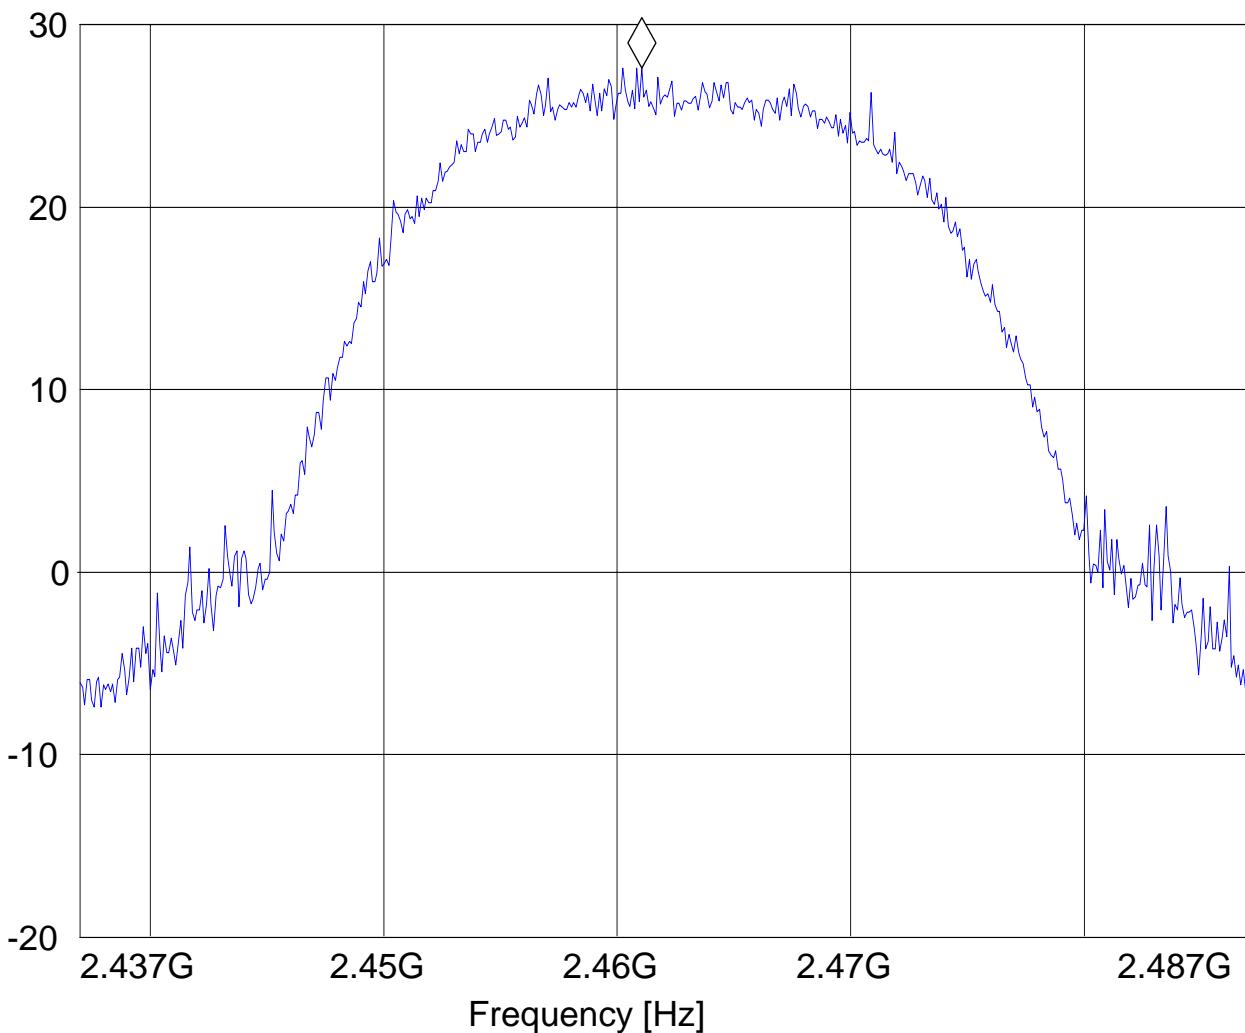

EIRP: 2462MHz (802.11g) Chain B


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11g, Ch 11, chain b
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "EIRP RLAN CH11"

Short Description:		EIRP RLAN channel-2462 MHz		
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
2.4 GHz	2.5 GHz	MaxPeak	Coupled	10 MHz DUMMY-DBM
		MaxPeak		

Marker: 2.459144289 GHz 20.73 dBm

Level [dBm]

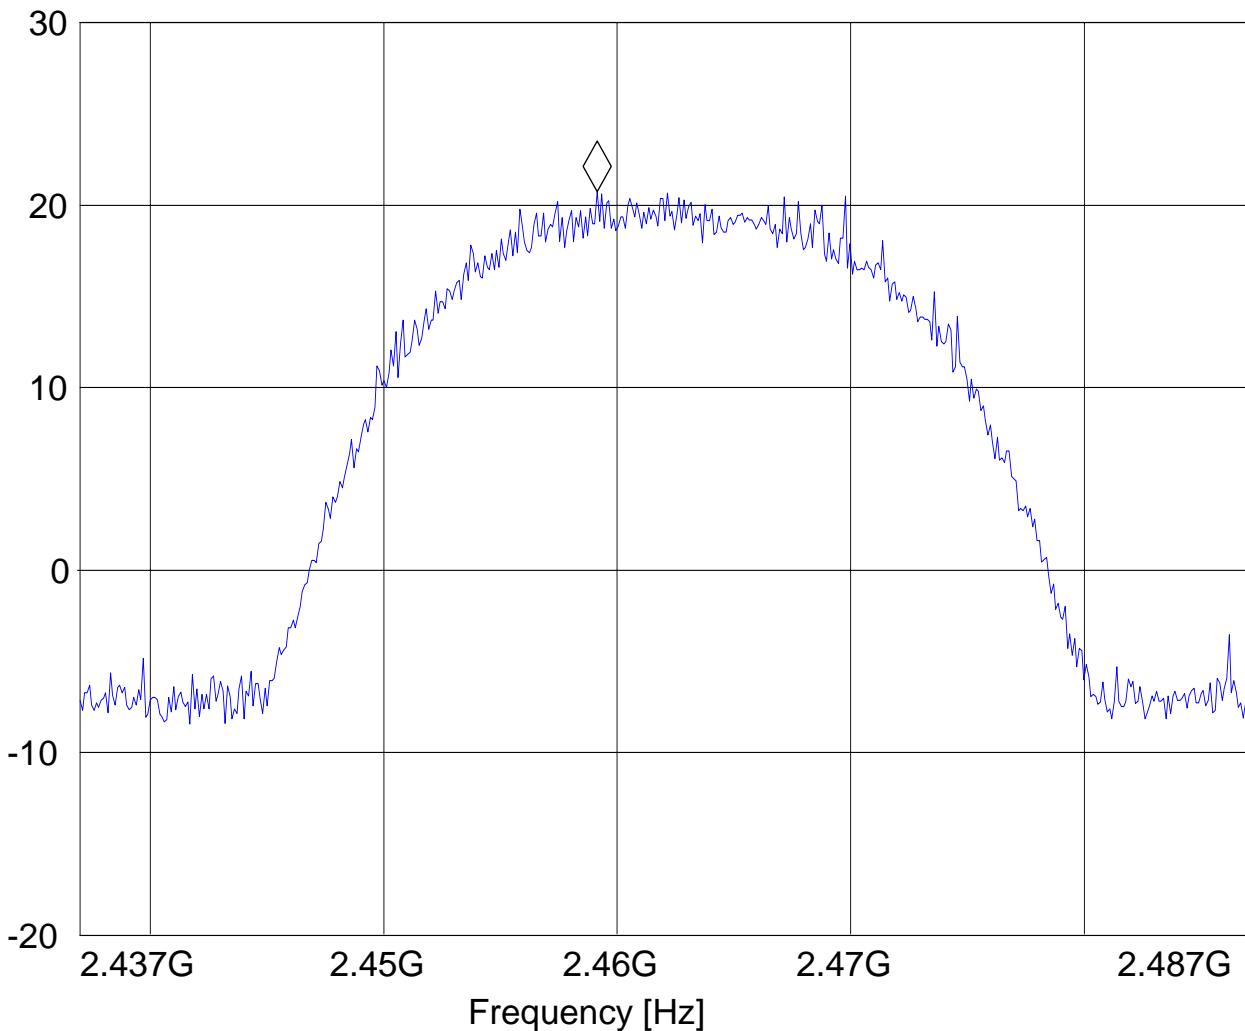

5.2 RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.247/15.205**5.2.1 LIMITS**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

***PEAK LIMIT= 74dBuV/m**

***AVG. LIMIT= 54dBuV/m**

Notes:

1. Radiated emissions are maximized by rotating the EUT 360° at 0.5 meter height increments between 1 and 4 meters.
2. Measurements were performed with the EUT in X, Y and Z orientations with the measurement antenna in both horizontal and vertical polarity. The plots below show the results of the worst case orientation and polarity.

5.2.2 Results Lower Restricted Band 2310 MHz to 2390 MHz**802.11b (2412MHz) PEAK Chain A**


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11b, ch 1, chain a
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247 LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.386184369 GHz 57.47 dB μ V/m

Level [dB μ V/m]

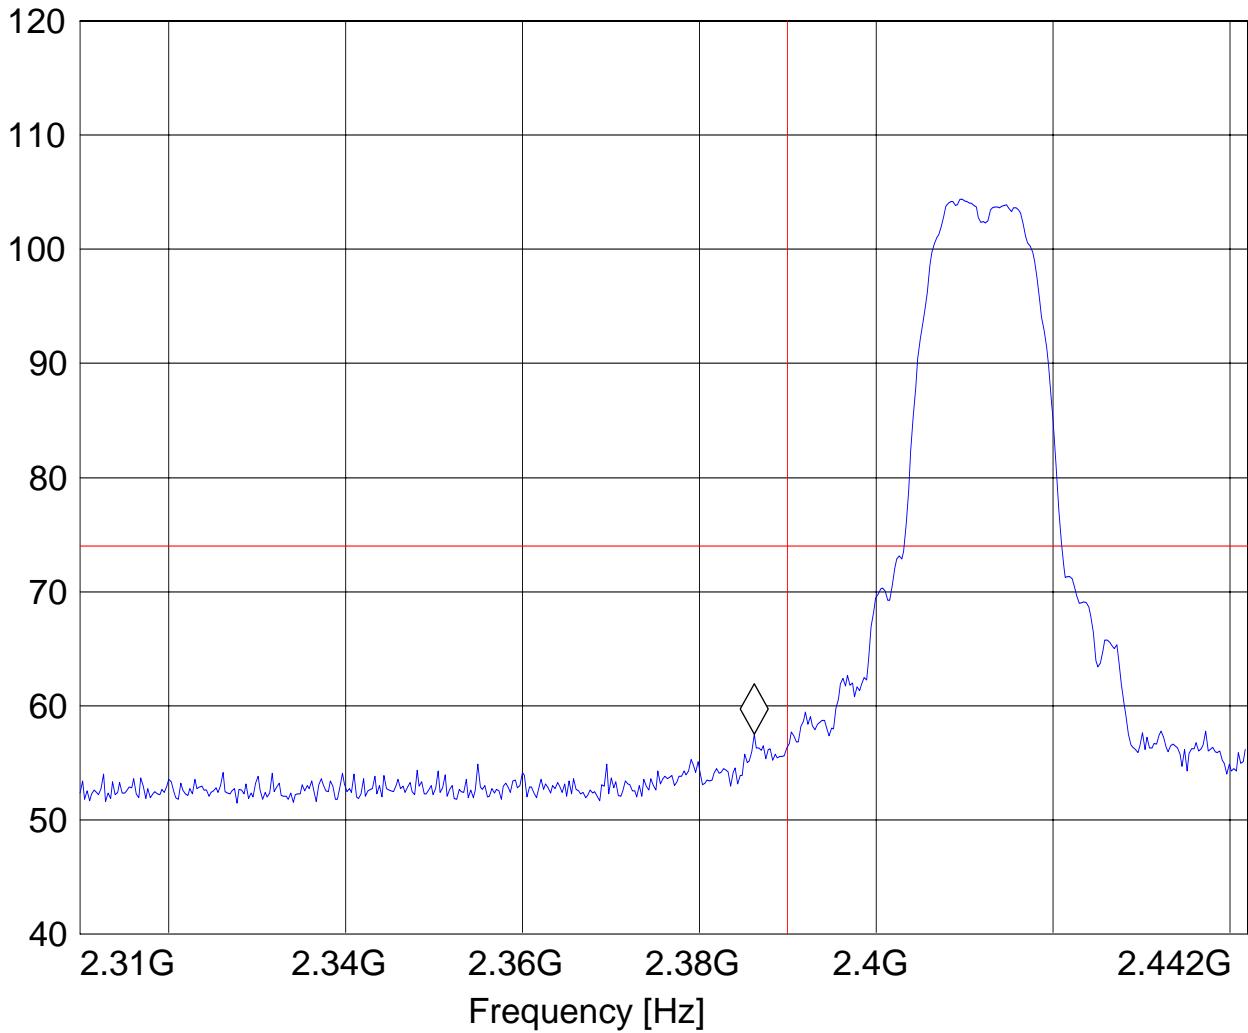

802.11b (2412MHz) AVG Chain A


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11b, ch 1, chain a
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247 LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.387374749 GHz 47.99 dB μ V/m

Level [dB μ V/m]

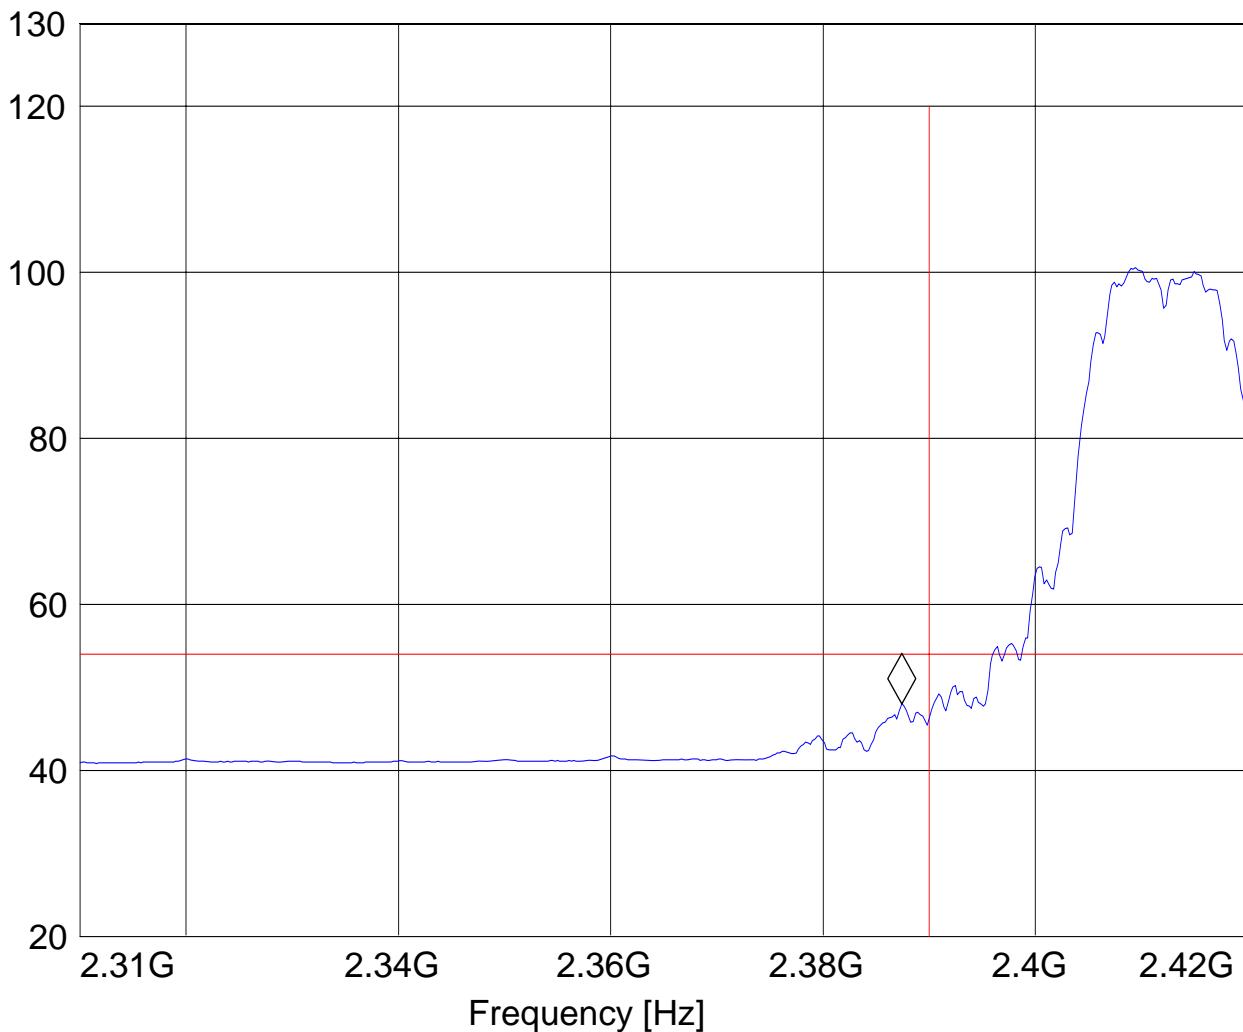

802.11b (2412MHz) PEAK Chain B


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11b, Ch 1, chain b
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247 LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Time Coupled	1 MHz	#326horn_AF_vert

Marker: 2.387242485 GHz 55.99 dB μ V/m

Level [dB μ V/m]

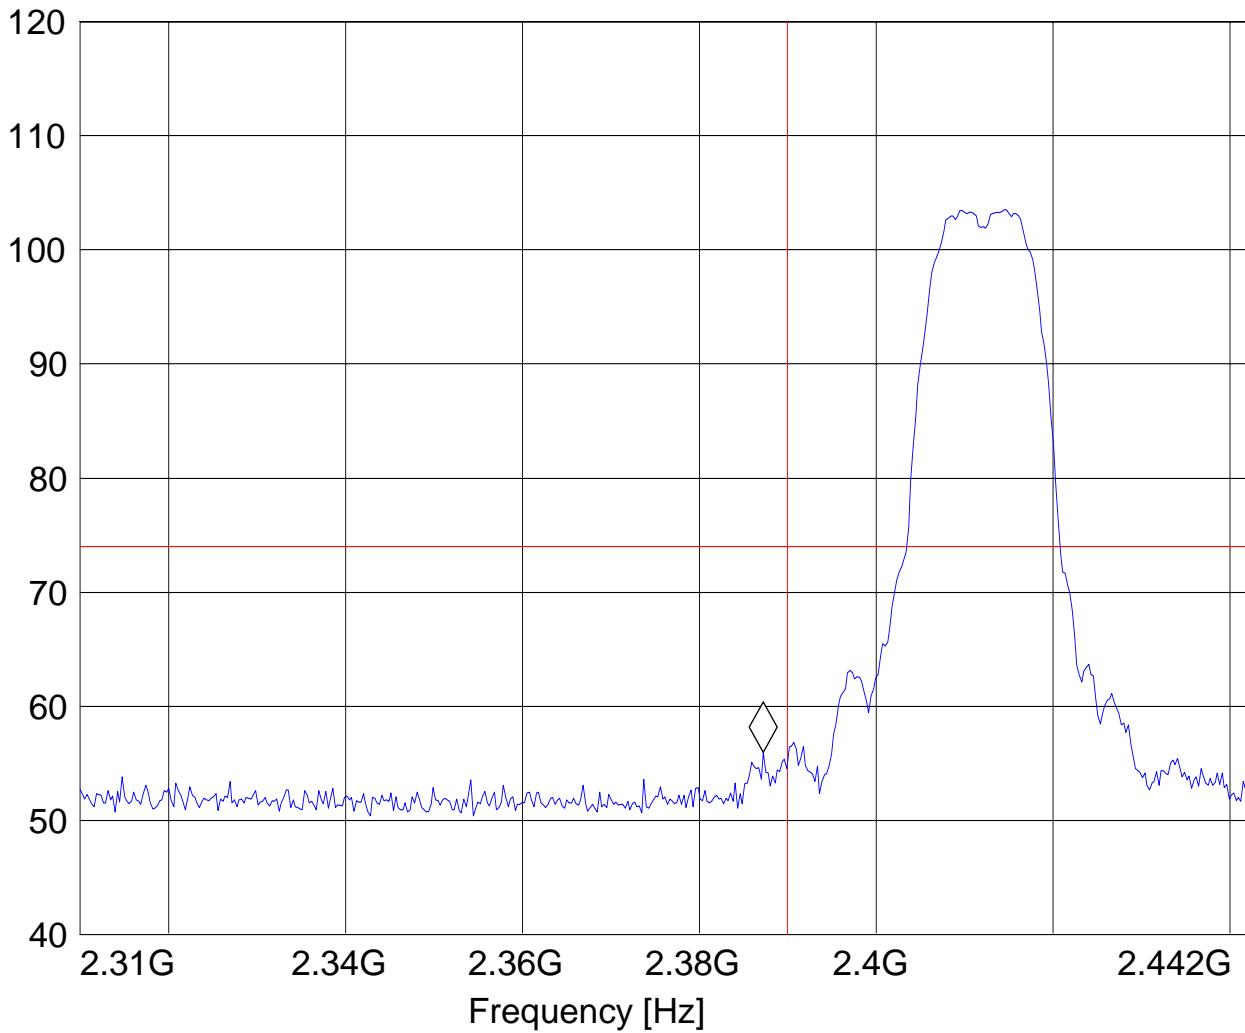

802.11b (2412MHz) AVG Chain B


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11b, Ch 1, chain b
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.39002004 GHz 46.4 dB μ V/m

Level [dB μ V/m]

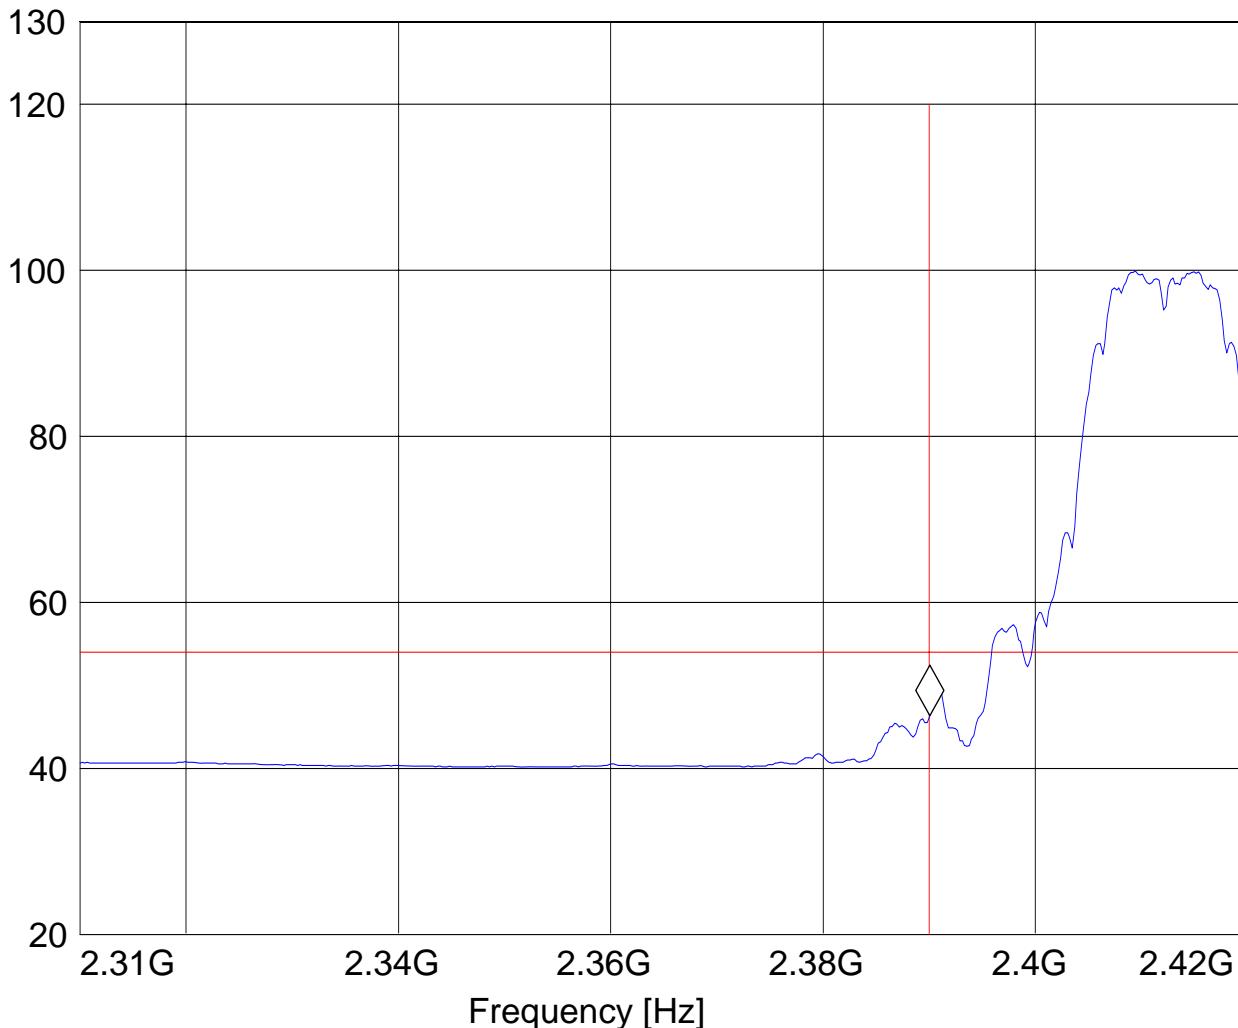

802.11g (2412MHz) PEAK Chain A


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11G, ch 1, chain a
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC15.247 LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.389623246 GHz 69.93 dB μ V/m

Level [dB μ V/m]

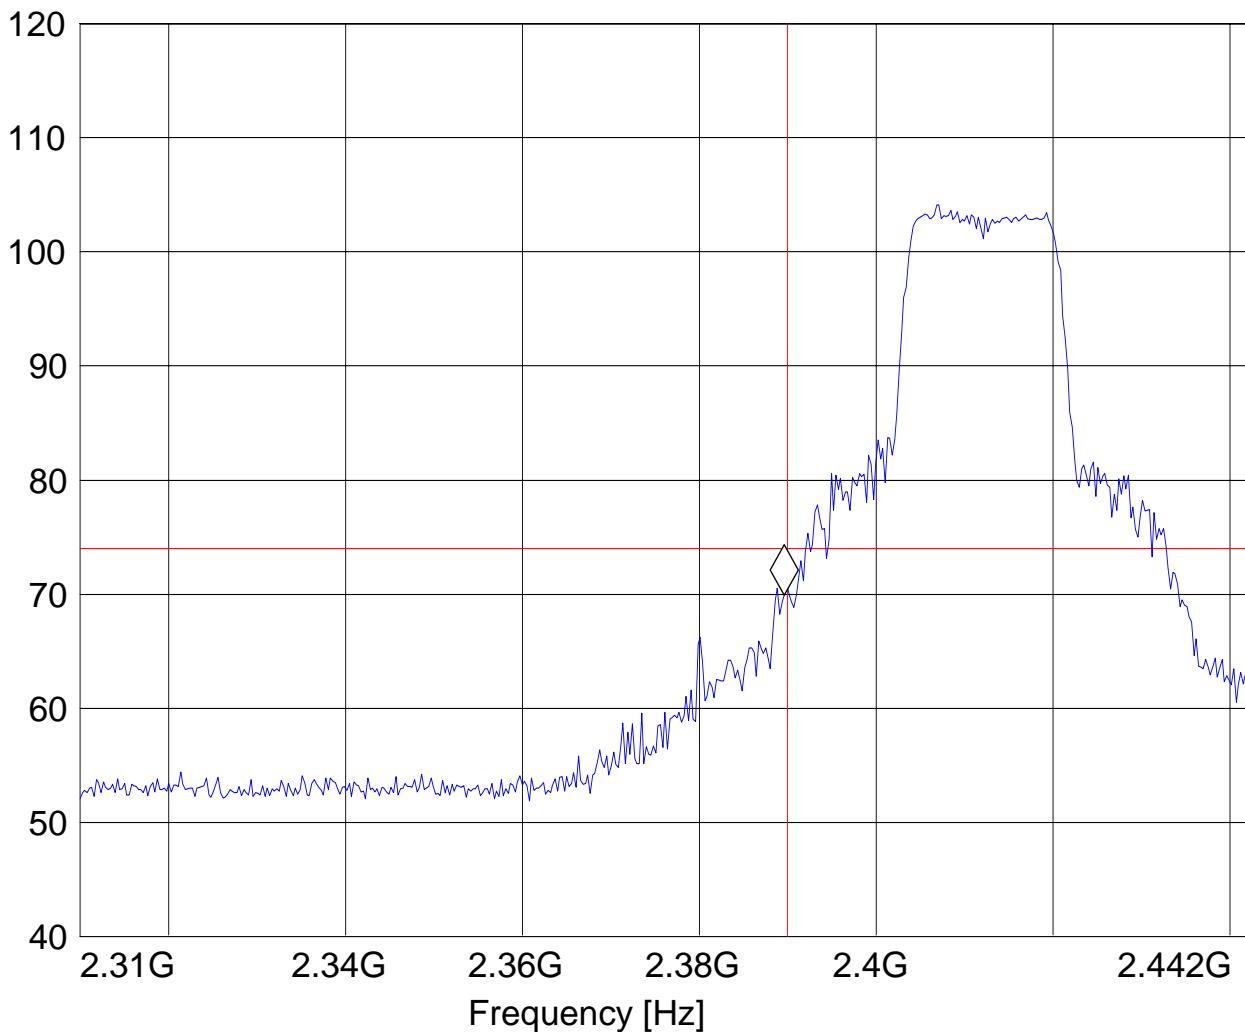

802.11g (2412MHz) AVG Chain A


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11G, ch 1, chain a
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.389799599 GHz 48.71 dB μ V/m

Level [dB μ V/m]

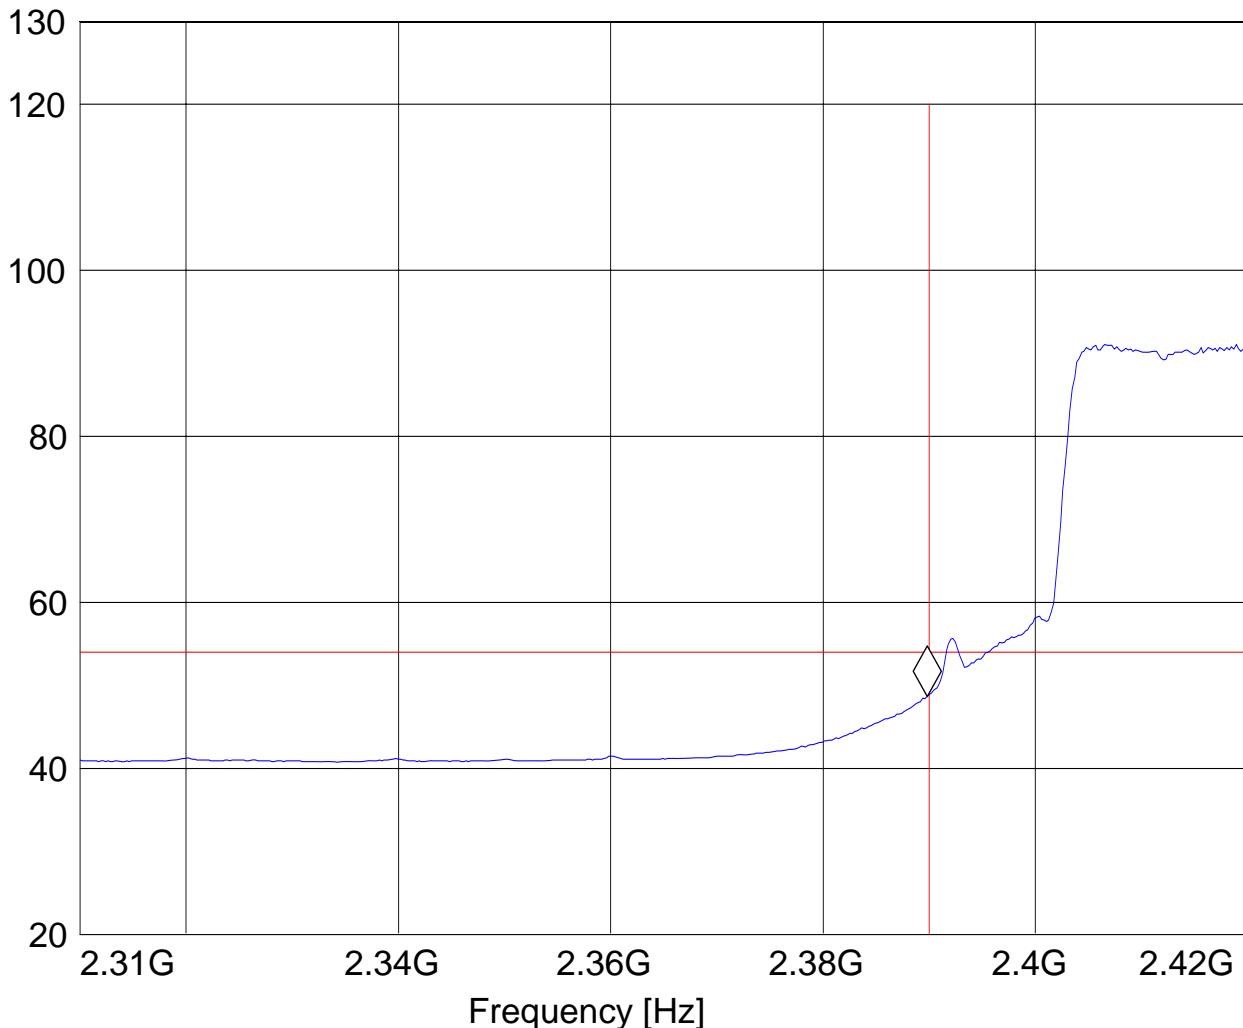

802.11g (2412MHz) PEAK Chain B


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11g, Ch 1, chain b
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247 LBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.390152305 GHz 69.26 dB μ V/m

Level [dB μ V/m]

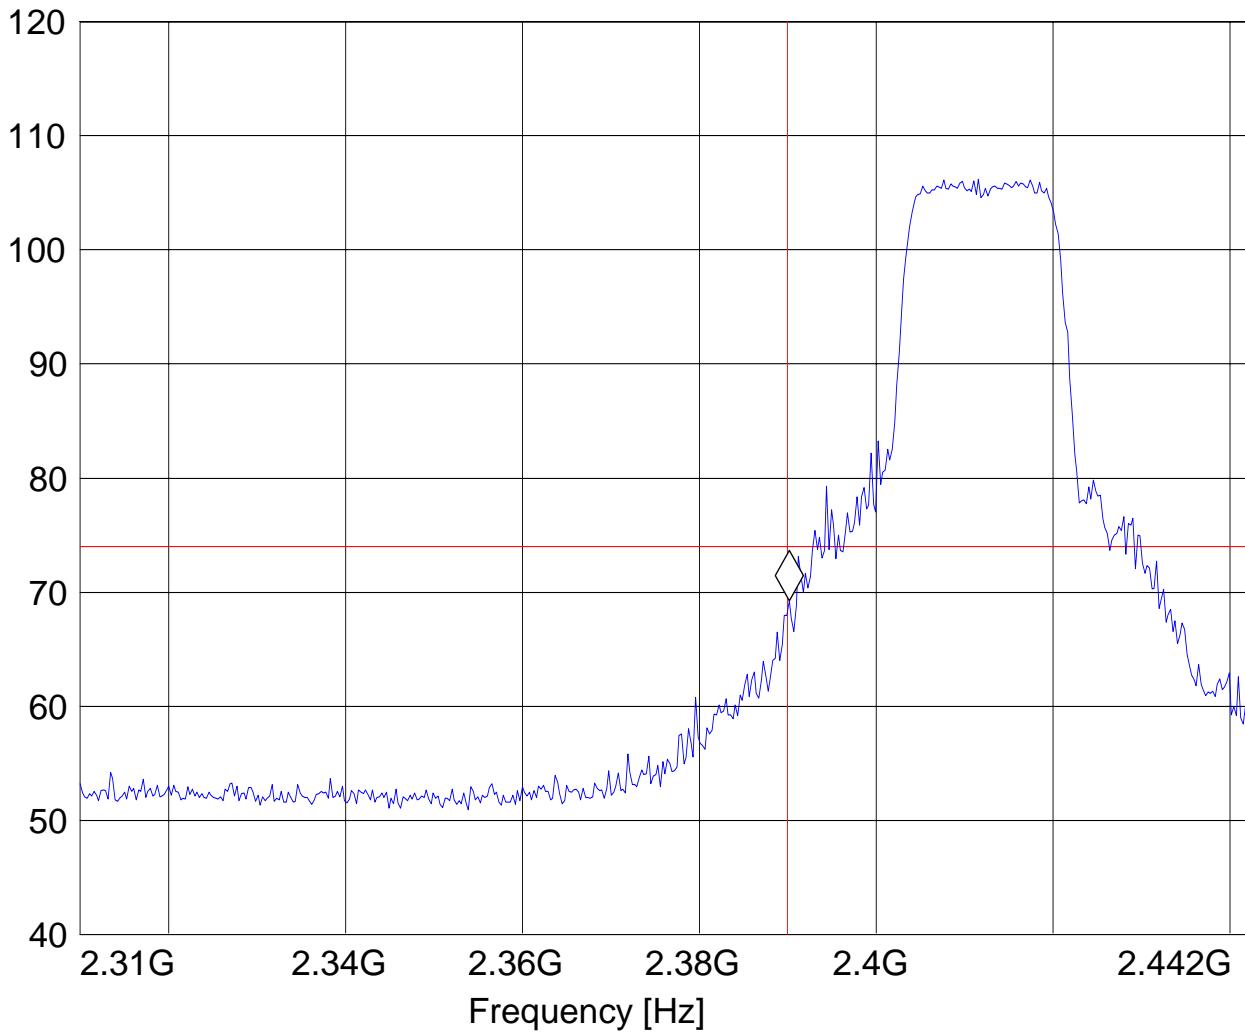

802.11g (2412MHz) AVG Chain B


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11g, Ch 1, chain b
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEEP TABLE: "FCC15.247 LBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
2.3 GHz	2.4 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.389138277 GHz 48.85 dB μ V/m

Level [dB μ V/m]

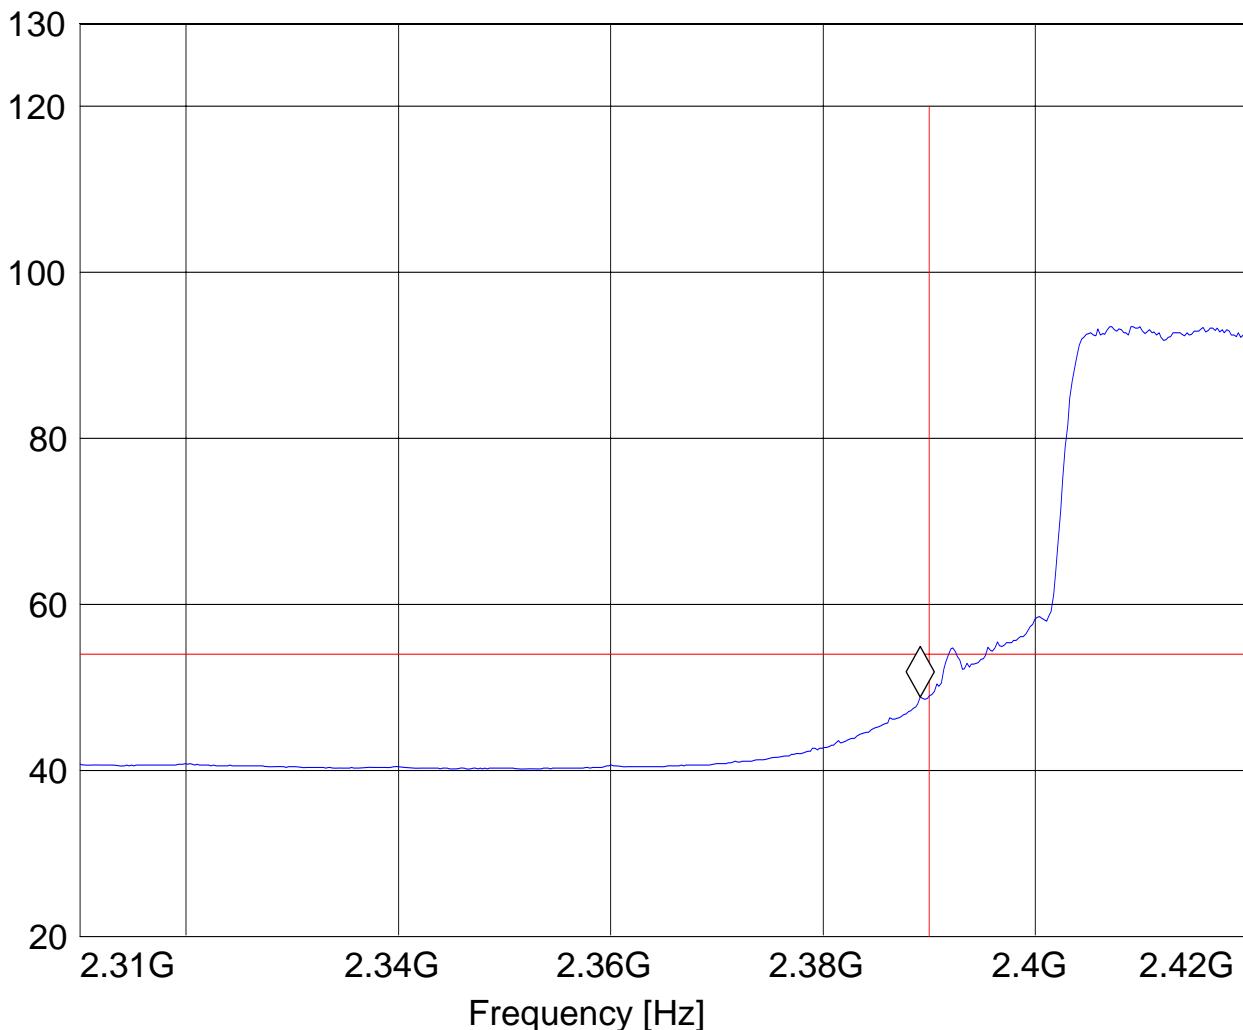

5.2.3 Results Upper Restricted Band 2483.5 MHz to 2500 MHz**802.11b (2462MHz) PEAK Chain A**


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11b, ch 11, chain a
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247 HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.48446493 GHz 65.5 dB μ V/m

Level [dB μ V/m]

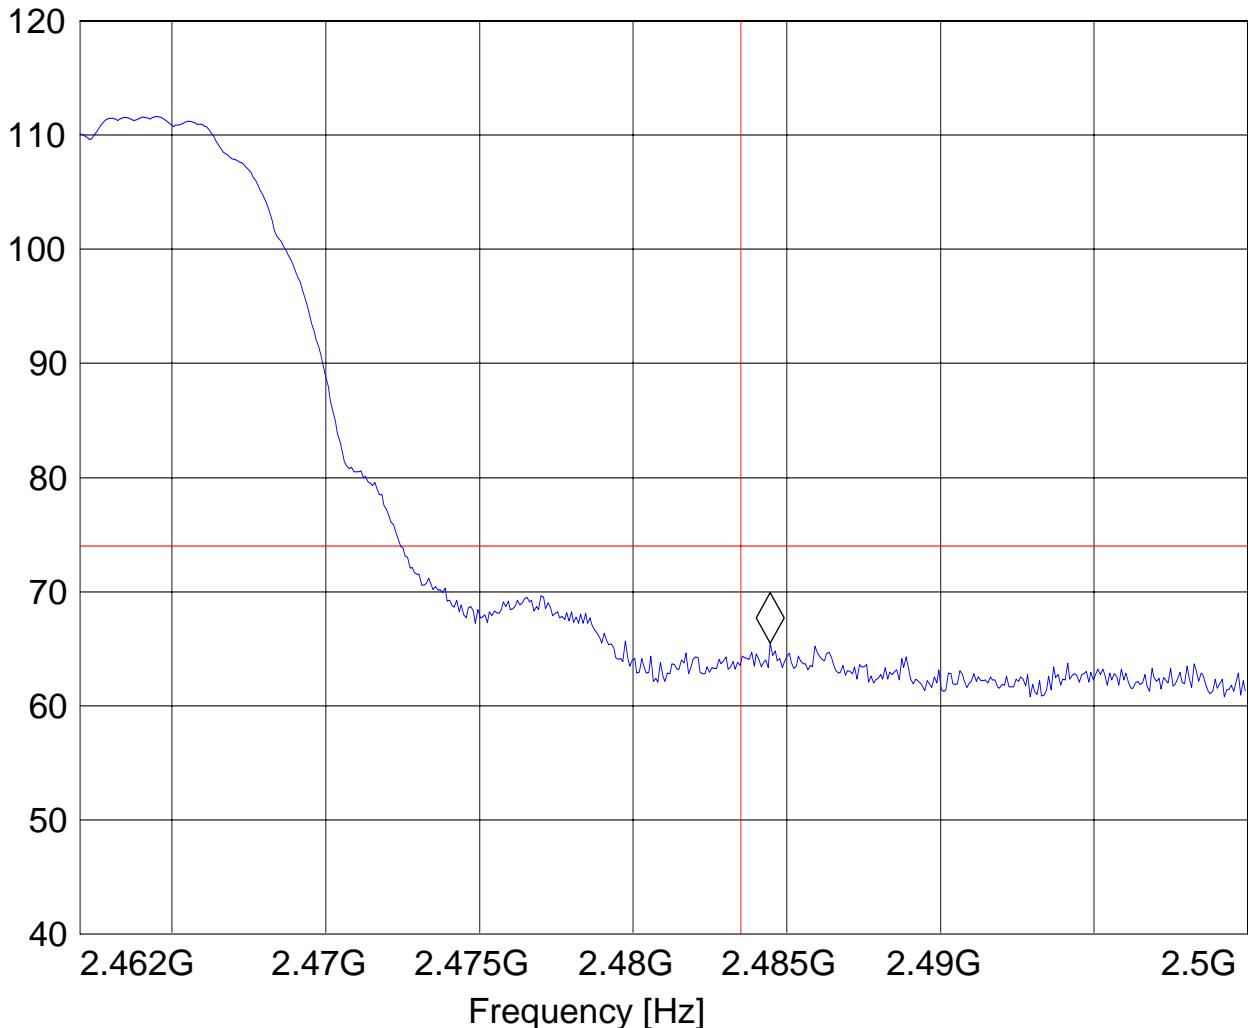

802.11b (2462MHz) AVG Chain A


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11b, ch 11, chain a
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247 HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 2.483703407 GHz 50.2 dB μ V/m

Level [dB μ V/m]

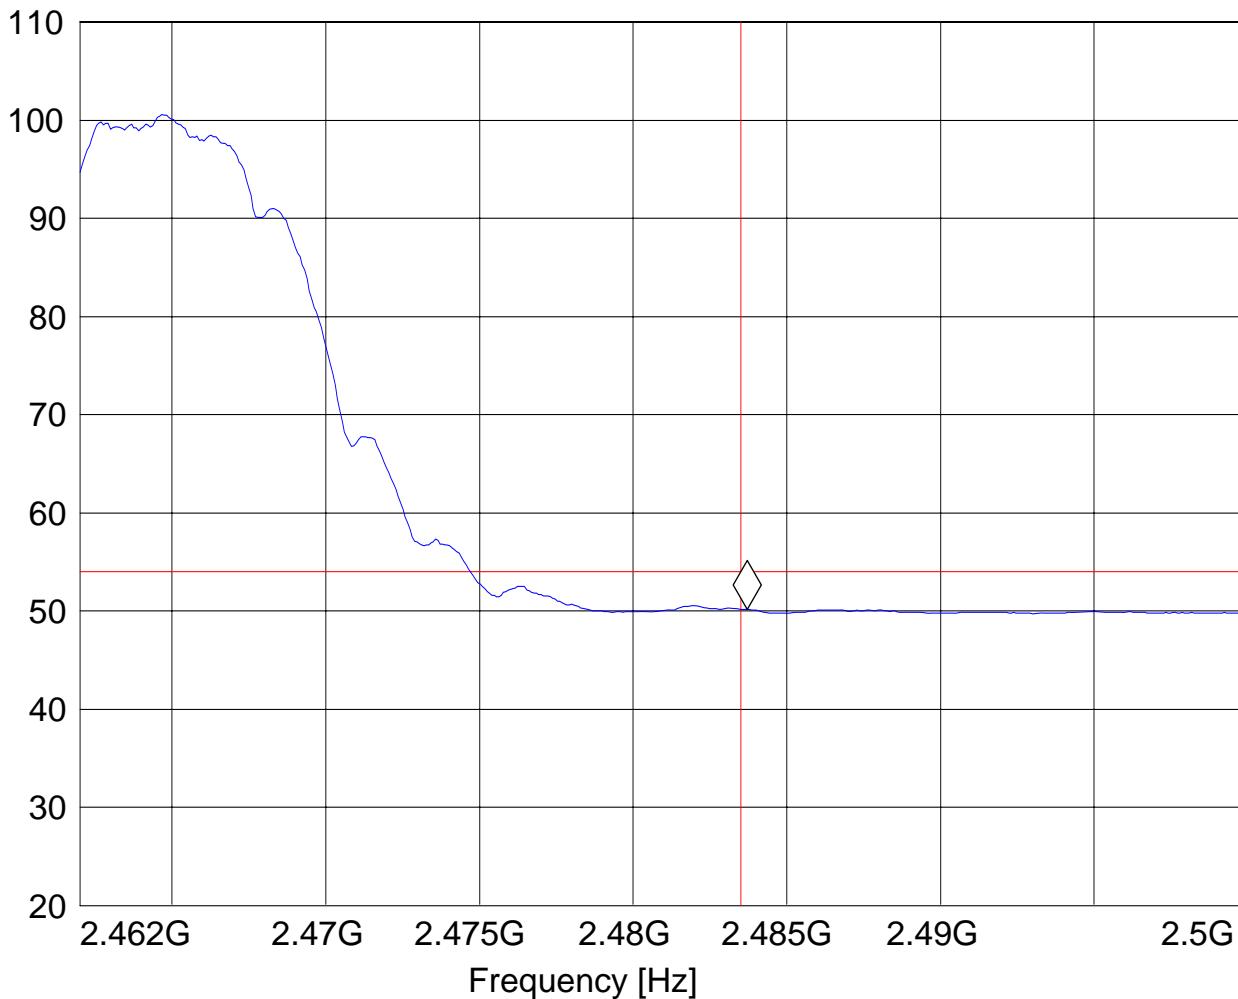

802.11b (2462MHz) PEAK Chain B


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11b, Ch 11, chain b
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247 HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.483551102 GHz 63.94 dB μ V/m

Level [dB μ V/m]

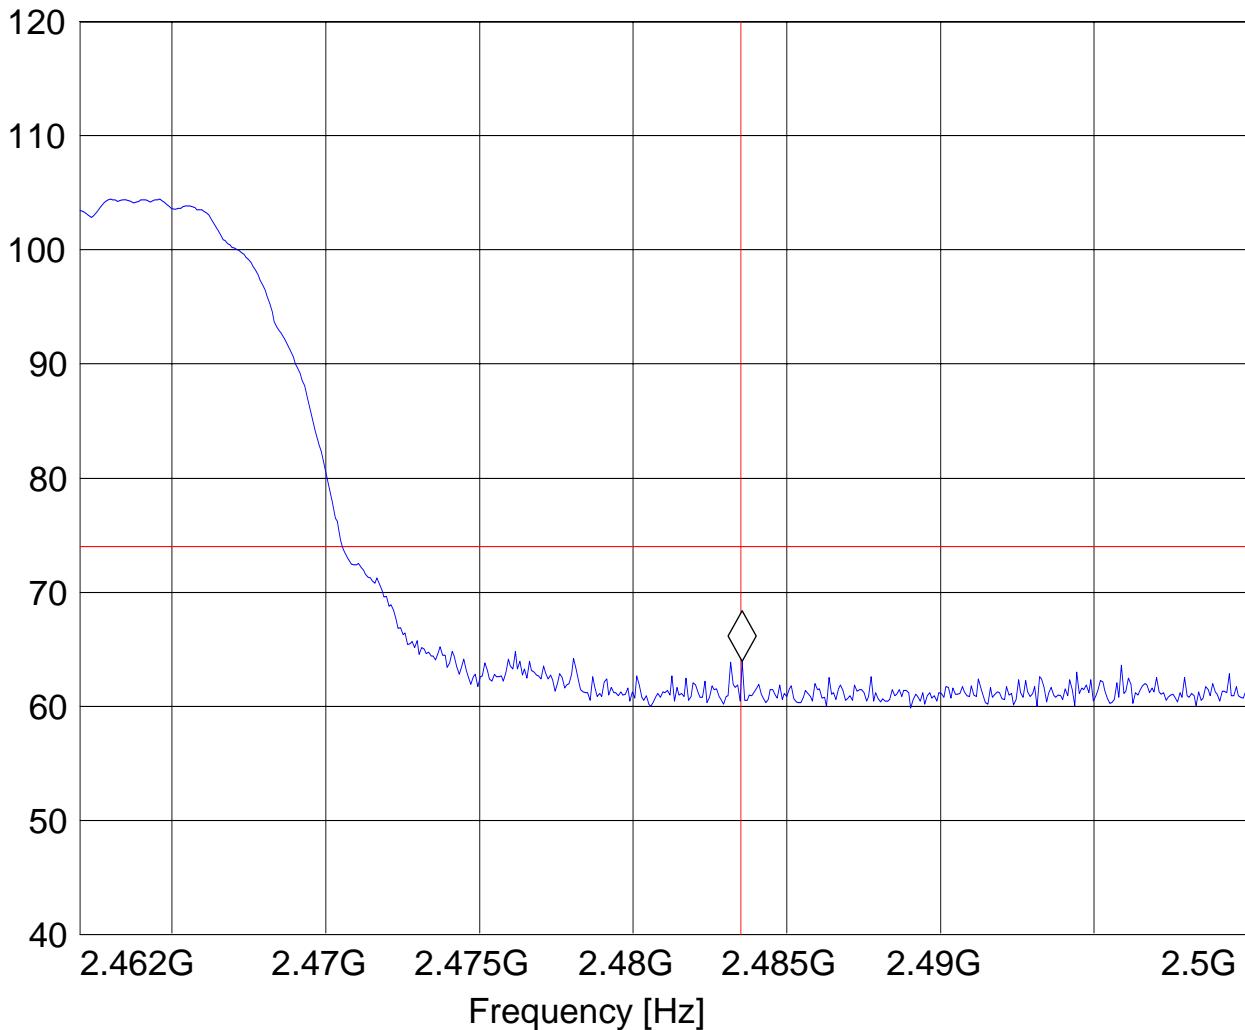

802.11b (2462MHz) AVG Chain B


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11b, Ch 11, chain b
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247 HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 2.483551102 GHz 49.99 dB μ V/m

Level [dB μ V/m]

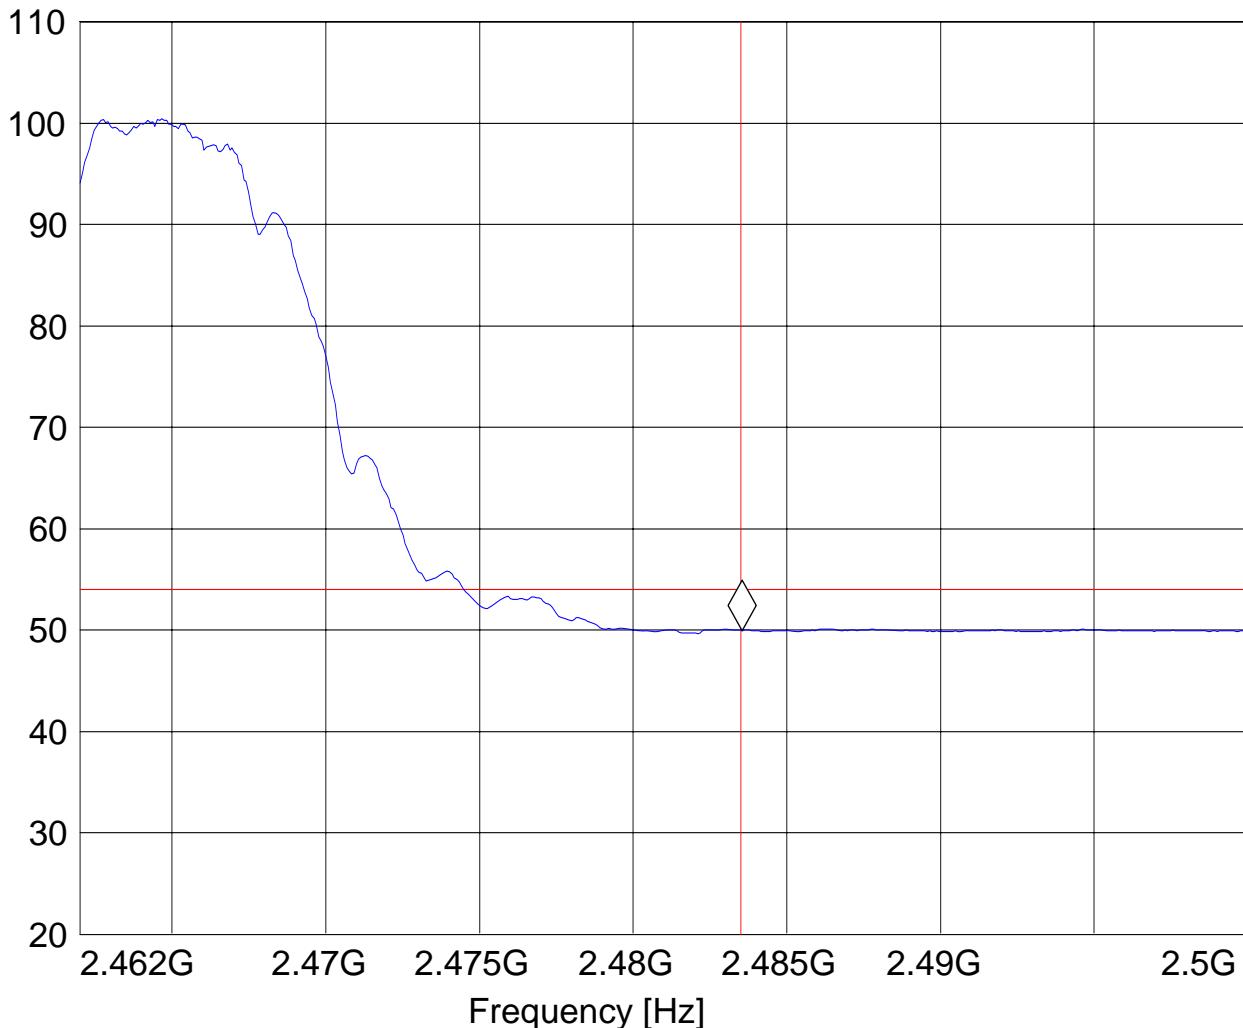

802.11g (2462MHz) PEAK Chain A


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11g, ch 11, chain a
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247 HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.484693387 GHz 69.09 dB μ V/m

Level [dB μ V/m]

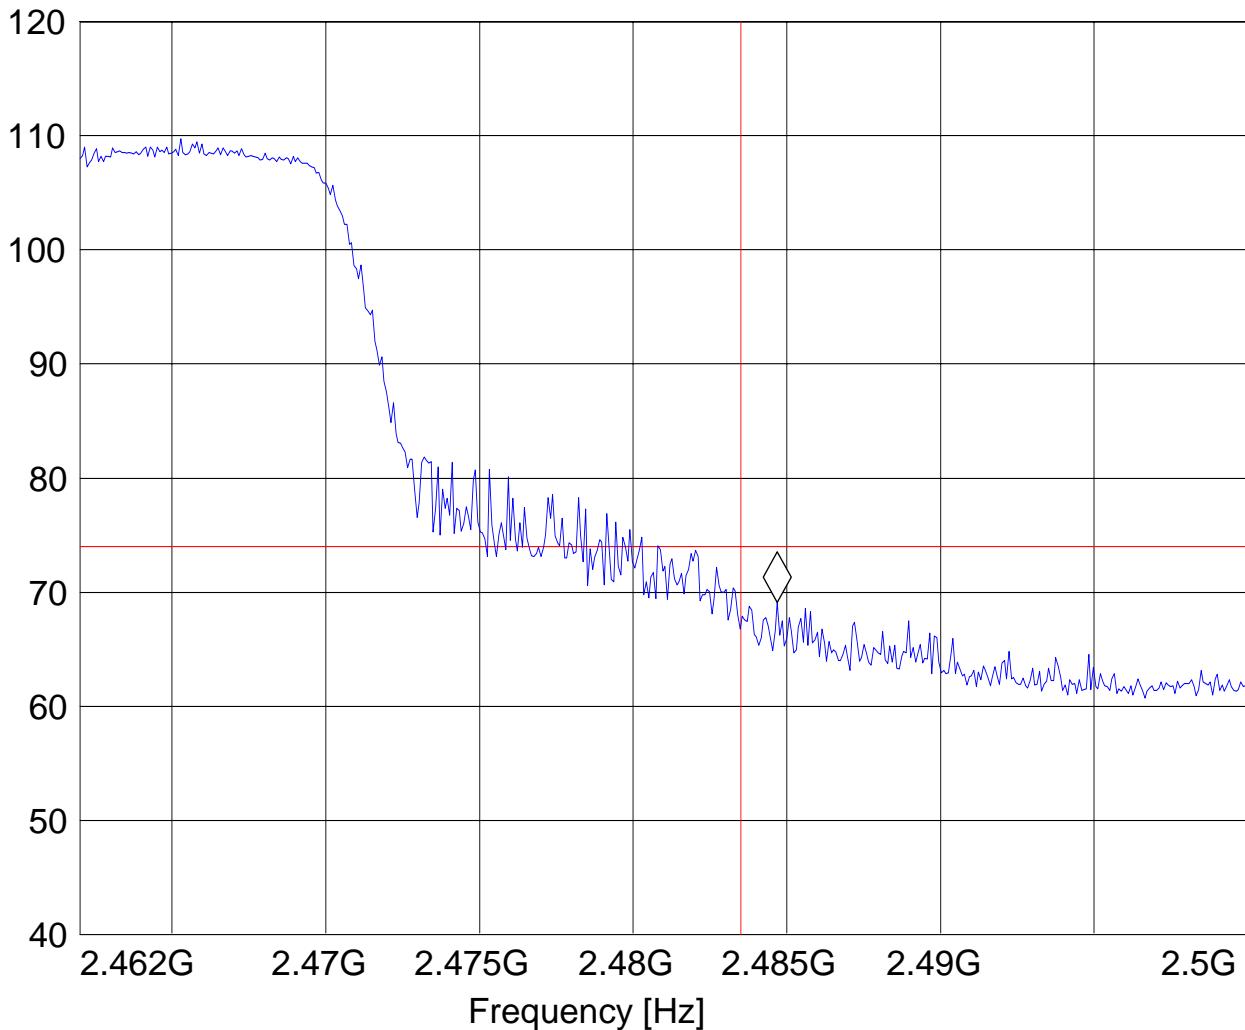

802.11g (2462MHz) AVG Chain A


EUT: Dell Siberia
Customer: Broadcom
Test Mode: 802.11g, ch 11, chain a
ANT Orientation: H
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEET TABLE: "FCC15.247 HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 2.483551102 GHz 52.89 dB μ V/m

Level [dB μ V/m]

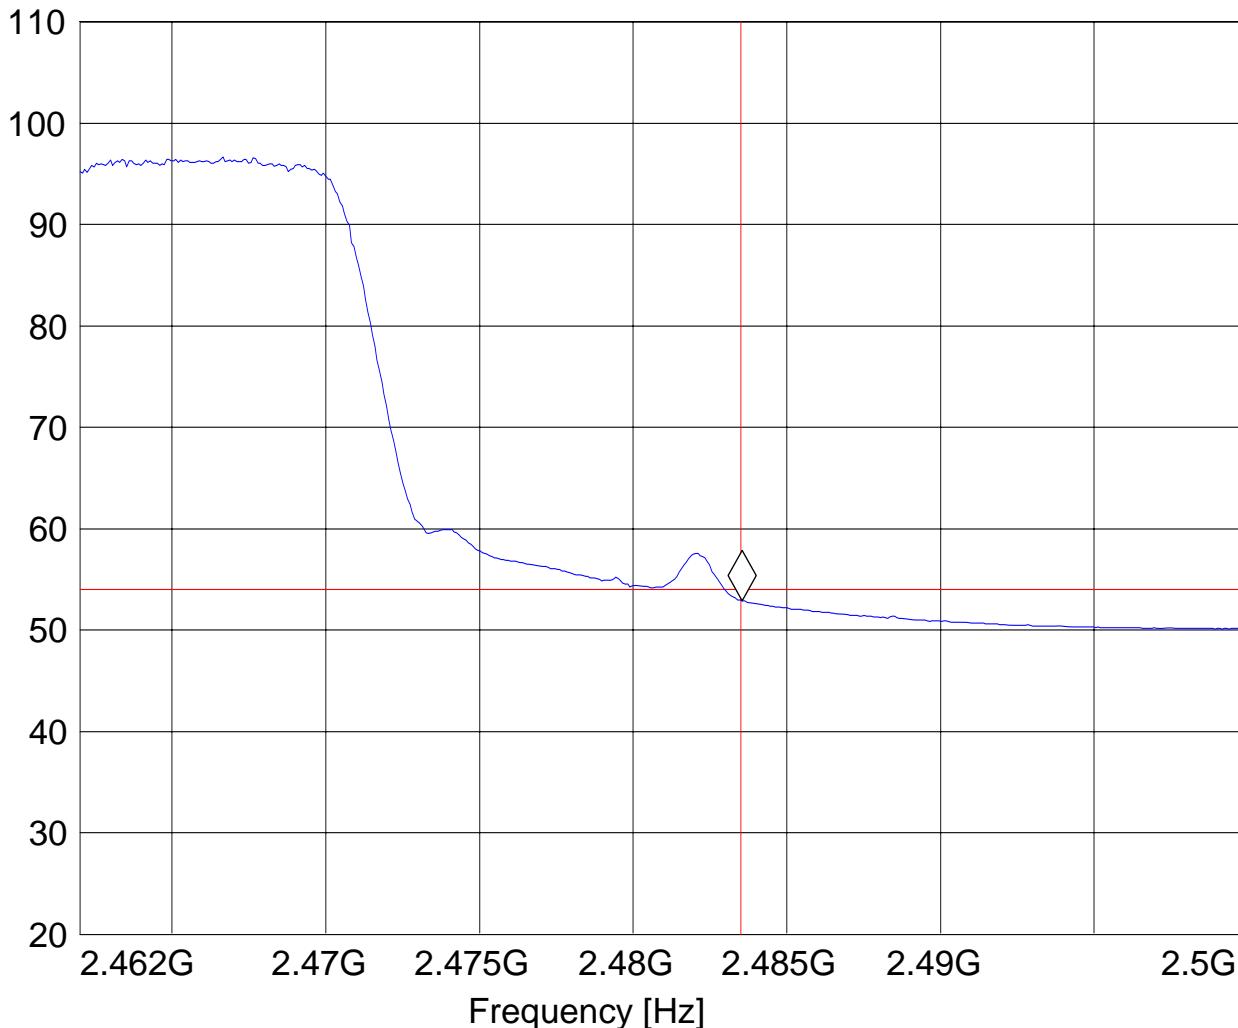

802.11g (2462MHz) PEAK Chain B


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11g, Ch 11, chain b
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247 HBE_PK"

Start Frequency	Stop Frequency	Detector	Meas. Time	IF Bandw.	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 2.483779559 GHz 63.61 dB μ V/m

Level [dB μ V/m]

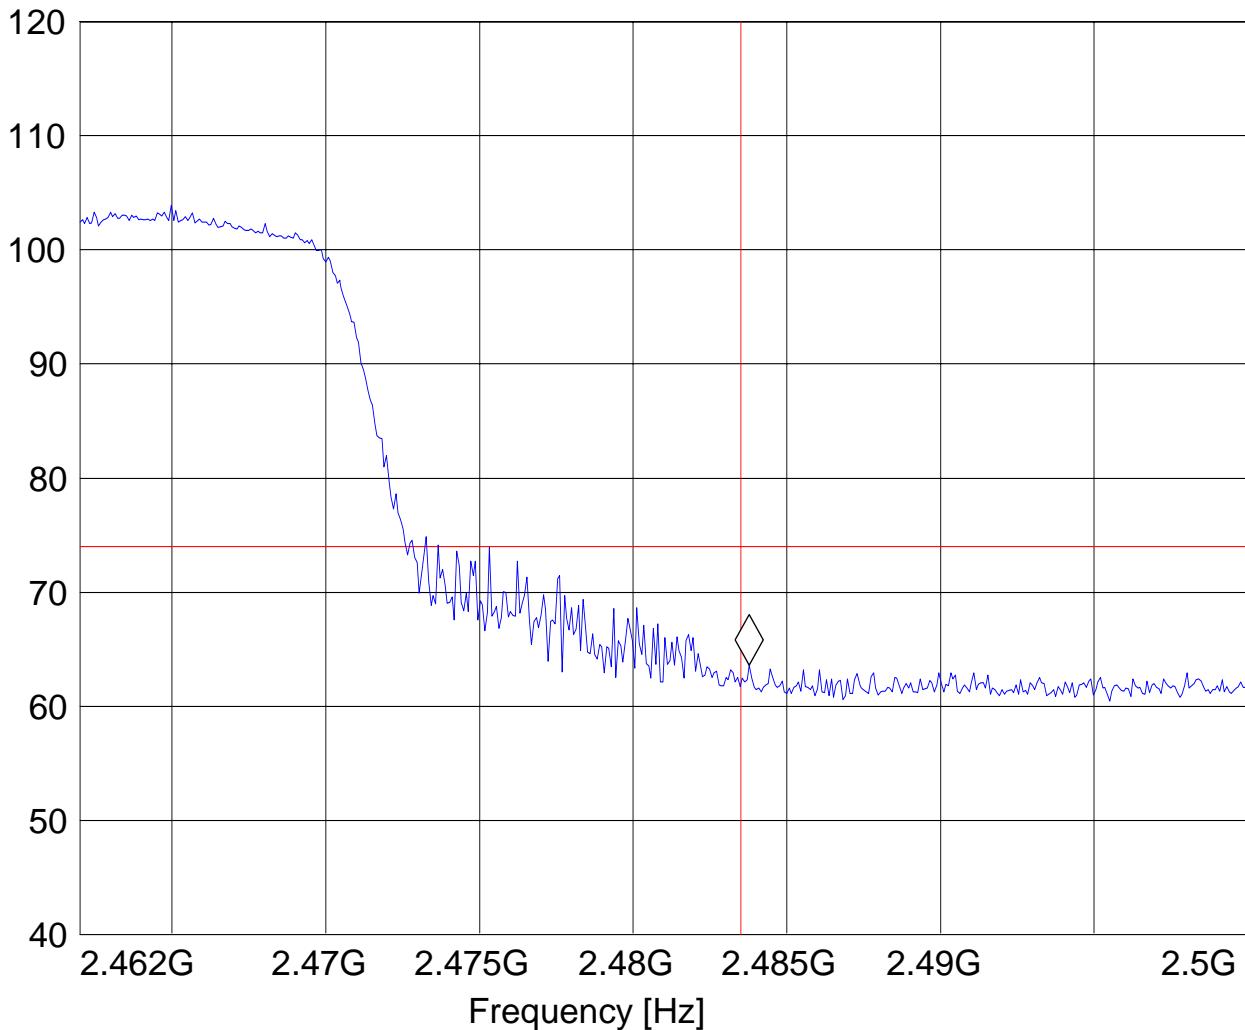

802.11g (2462MHz) AVG Chain B


EUT: Dell Siberia
Customer: Broadcom
Test Mode: 802.11g, Ch 11, chain b
ANT Orientation: V
EUT Orientation: H
Test Engineer: Ed
Power Supply: AC Adapter
Comments:

SWEET TABLE: "FCC15.247 HBE_AVG"

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
2.5 GHz	2.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 2.483627255 GHz 50.15 dB μ V/m

Level [dB μ V/m]

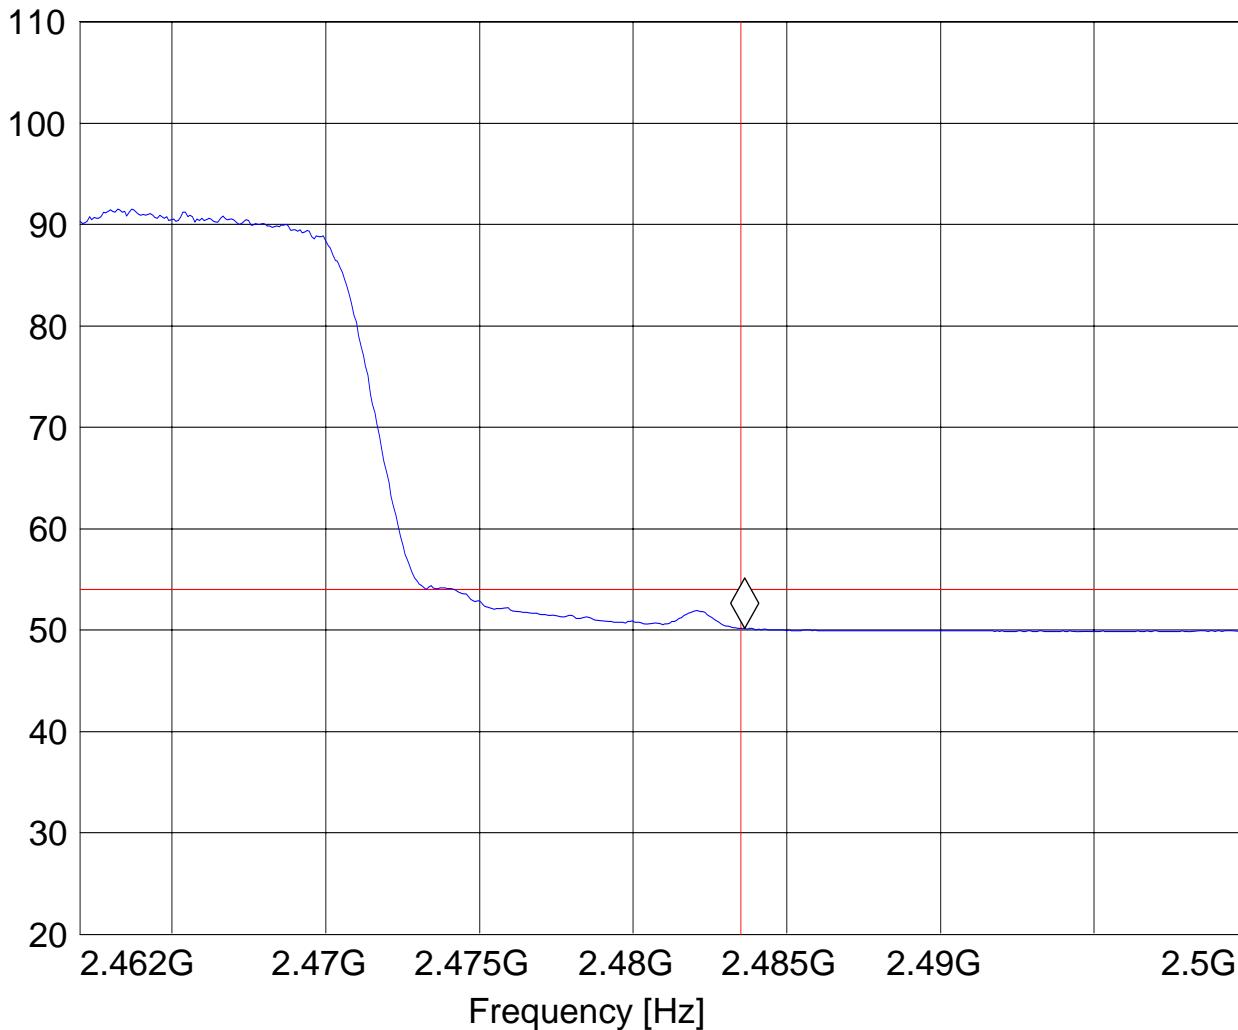

5.3 TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.247/15.205/15.209**5.3.1 LIMITS**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(²)
13.36 - 13.41			

***PEAK LIMIT= 74dBuV/m AVG. LIMIT= 54dBuV/m**

Notes:

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.
2. All measurements are done in peak mode using an average limit , unless specified with the plots.
3. Radiated emissions are maximized by rotating the EUT 360° at 0.5 meter height increments between 1 and 4 meters.
4. Measurements were performed with the EUT in X, Y and Z orientations with the measurement antenna in both horizontal and vertical polarity. The plots below show the results of the worst case orientation and polarity
5. After maximization it is determined that 802.11g mode has worse case emission and only this mode is reported here.

Results for the radiated measurements below 30MHz according § 15.33

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

5.3.2 RESULTS

30MHz – 1GHz Chain A, Antenna: vertical

Note: This plot is valid for low, mid, high channels (worst-case plot)


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11b, Ch 1, chain a
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

Marker: 280.761523 MHz 43.38 dB μ V/m

Level [dB μ V/m]

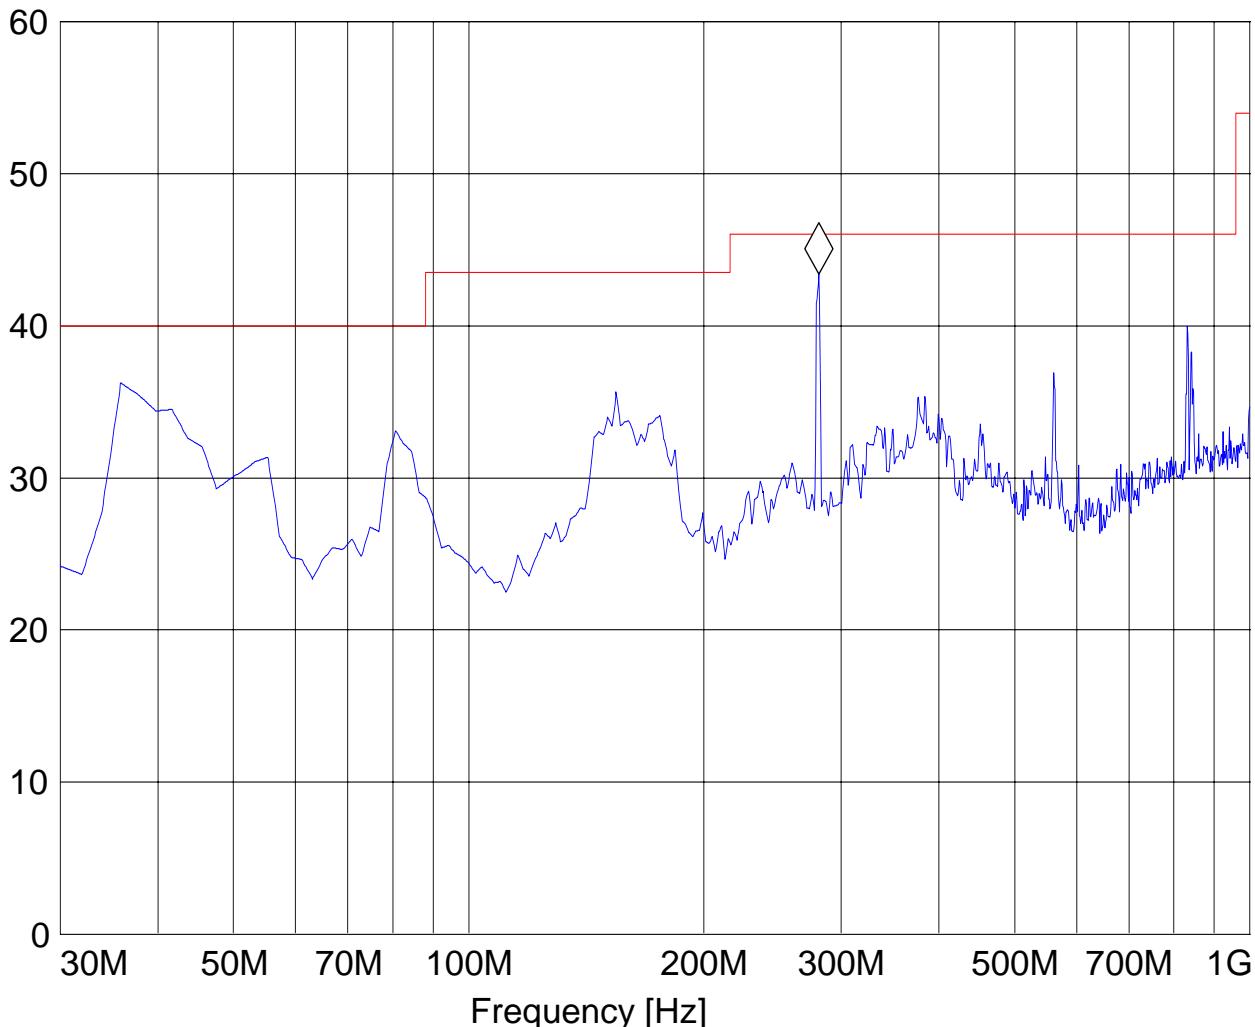

30MHz – 1GHz Chain A, Antenna: horizontal


Note: This plot is valid for low, mid, high channels (worst-case plot)

EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11b, Ch 1, chain a
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horiz

Marker: 842.54509 MHz 39.44 dB μ V/m

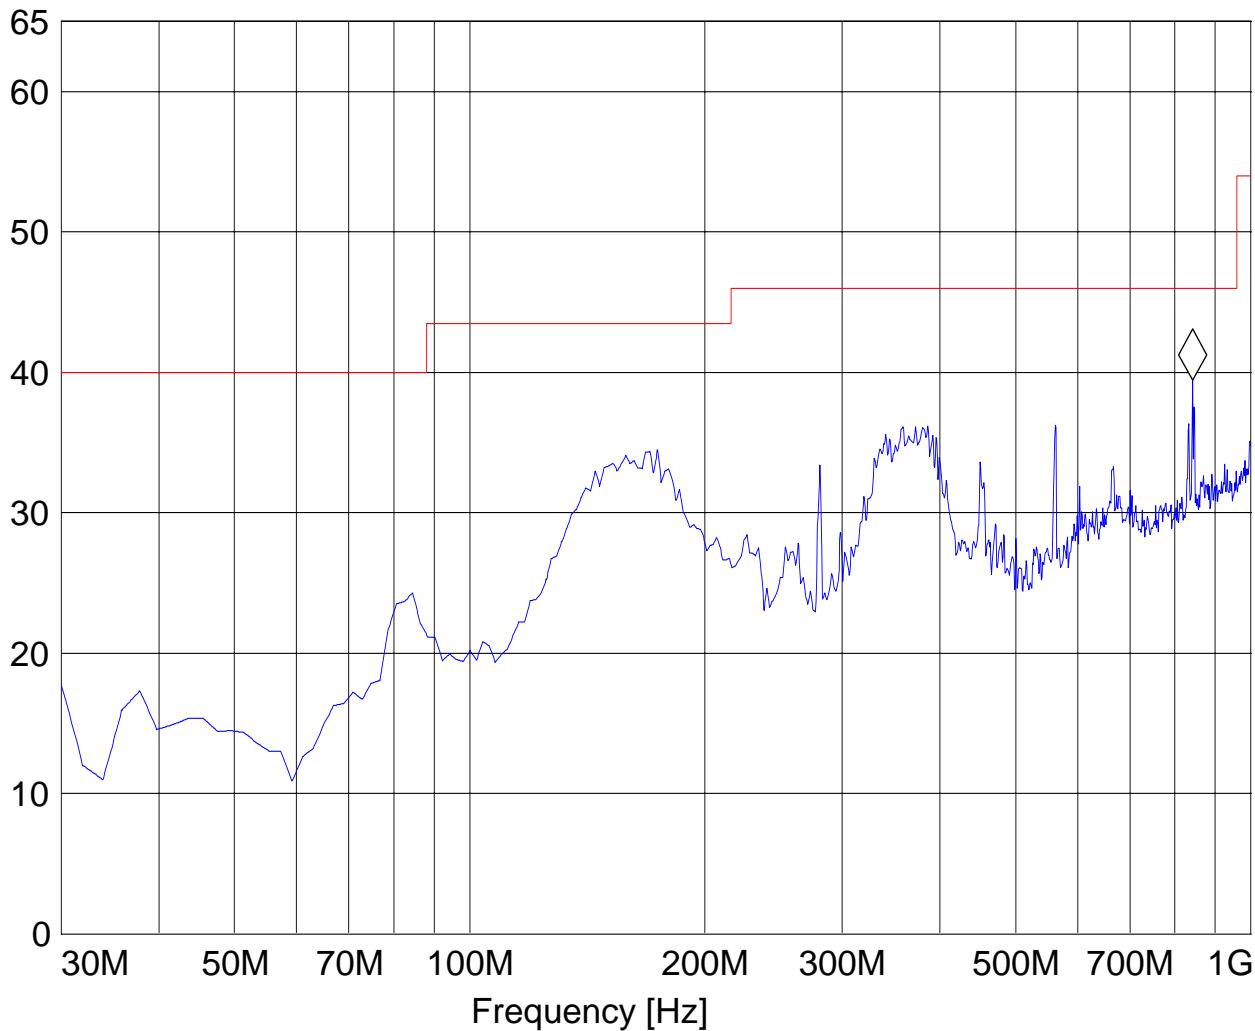Level [dB μ V/m]

1-18GHz (2412MHz) Chain A**Note:**The peak above the limit line is the carrier freq. **Note:**Peak Reading vs. Average limit

EUT / Description: Dell Siberia

Manufacturer: Broadcom

Test mode: 802.11b, ch 1, chain a

ANT Orientation: : H

EUT Orientation:: H


Test Engineer: Ed

Voltage: AC Adapter

Comments:: marker is on uplink sig.

SWEET TABLE: "FCC 15.407 1-18G"

Start Frequency	Stop Frequency	Detector	Meas.	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

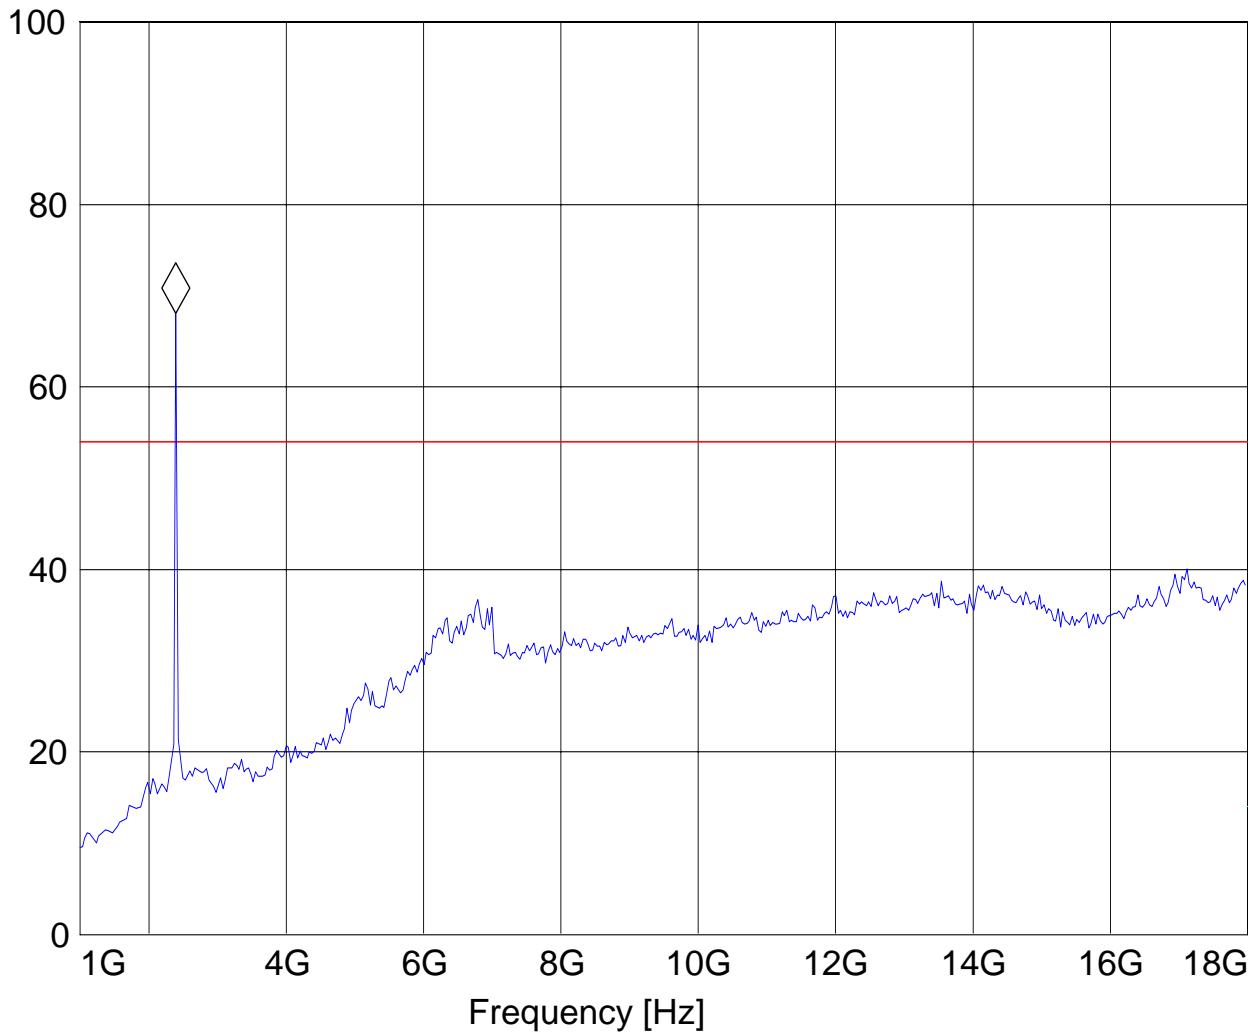Marker: 2.396793587 GHz 68.1 dB μ V/mLevel [dB μ V/m]

1-18GHz (2437MHz) Chain ANote:The peak above the limit line is the carrier freq.Note:Peak Reading vs. Average limit

EUT / Description: Dell Siberia

Manufacturer: Broadcom

Test mode: 802.11b, ch 6, chain a

ANT Orientation: : H

EUT Orientation:: H


Test Engineer: Ed

Voltage: AC Adapter

Comments:: marker is on uplink sig.

SWEEP TABLE: "FCC 15.407 1-18G"

Start Frequency	Stop Frequency	Detector	Meas.	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

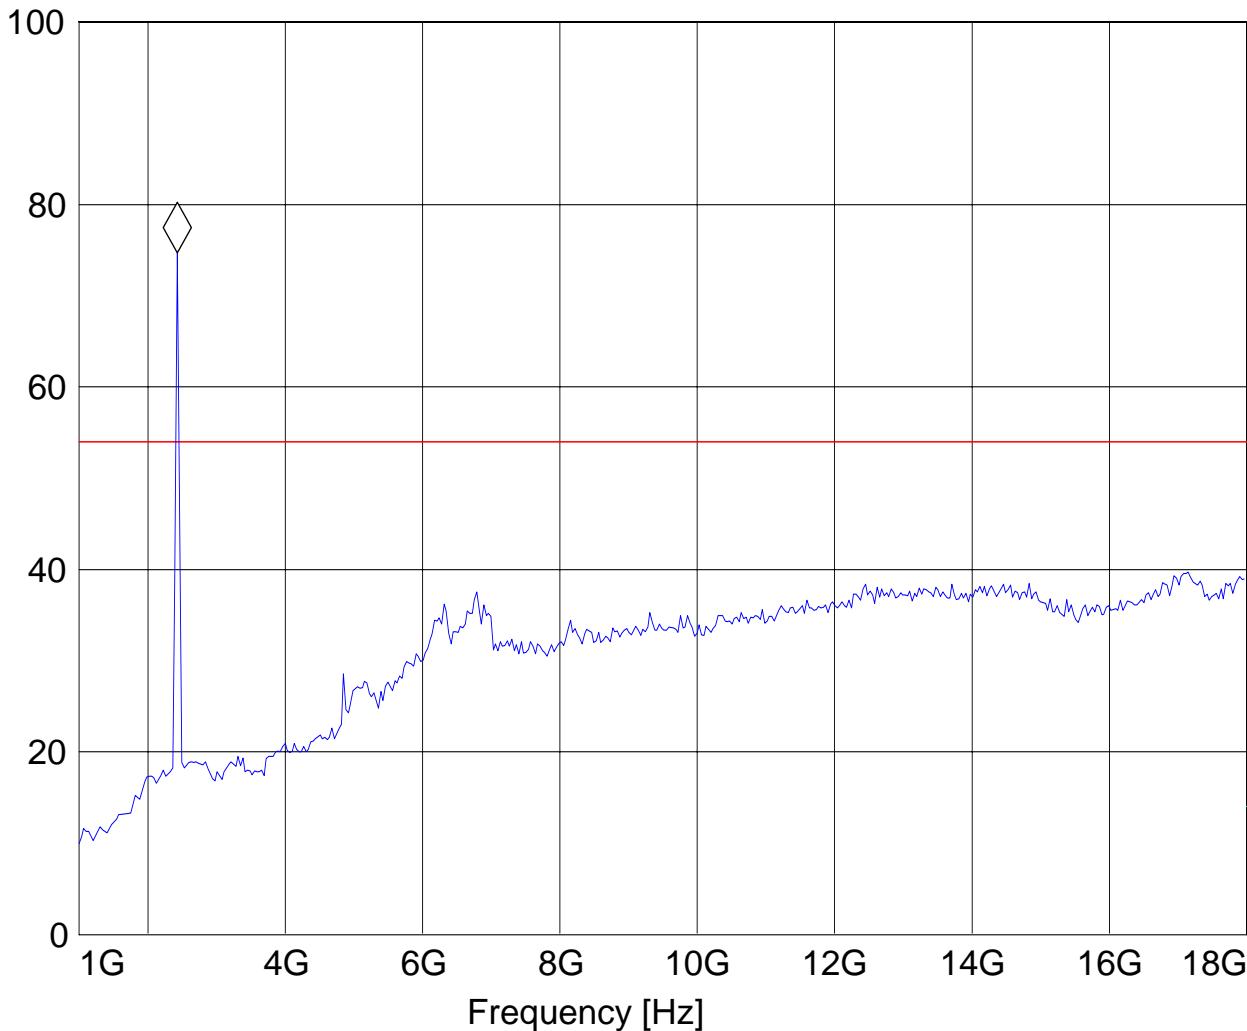Marker: 2.430861723 GHz 74.68 dB μ V/mLevel [dB μ V/m]

1-18GHz (2462MHz) Chain ANote:The peak above the limit line is the carrier freq.Note:Peak Reading vs. Average limit


EUT / Description: Dell Siberia
 Manufacturer: Broadcom
 Test mode: 802.11b, ch 11, chain a
 ANT Orientation: : H
 EUT Orientation:: H
 Test Engineer: Ed
 Voltage: AC Adapter
 Comments:: marker is on uplink sig.

SWEET TABLE: "FCC 15.407 1-18G"

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 2.430861723 GHz 76.07 dB μ V/m

Level [dB μ V/m]

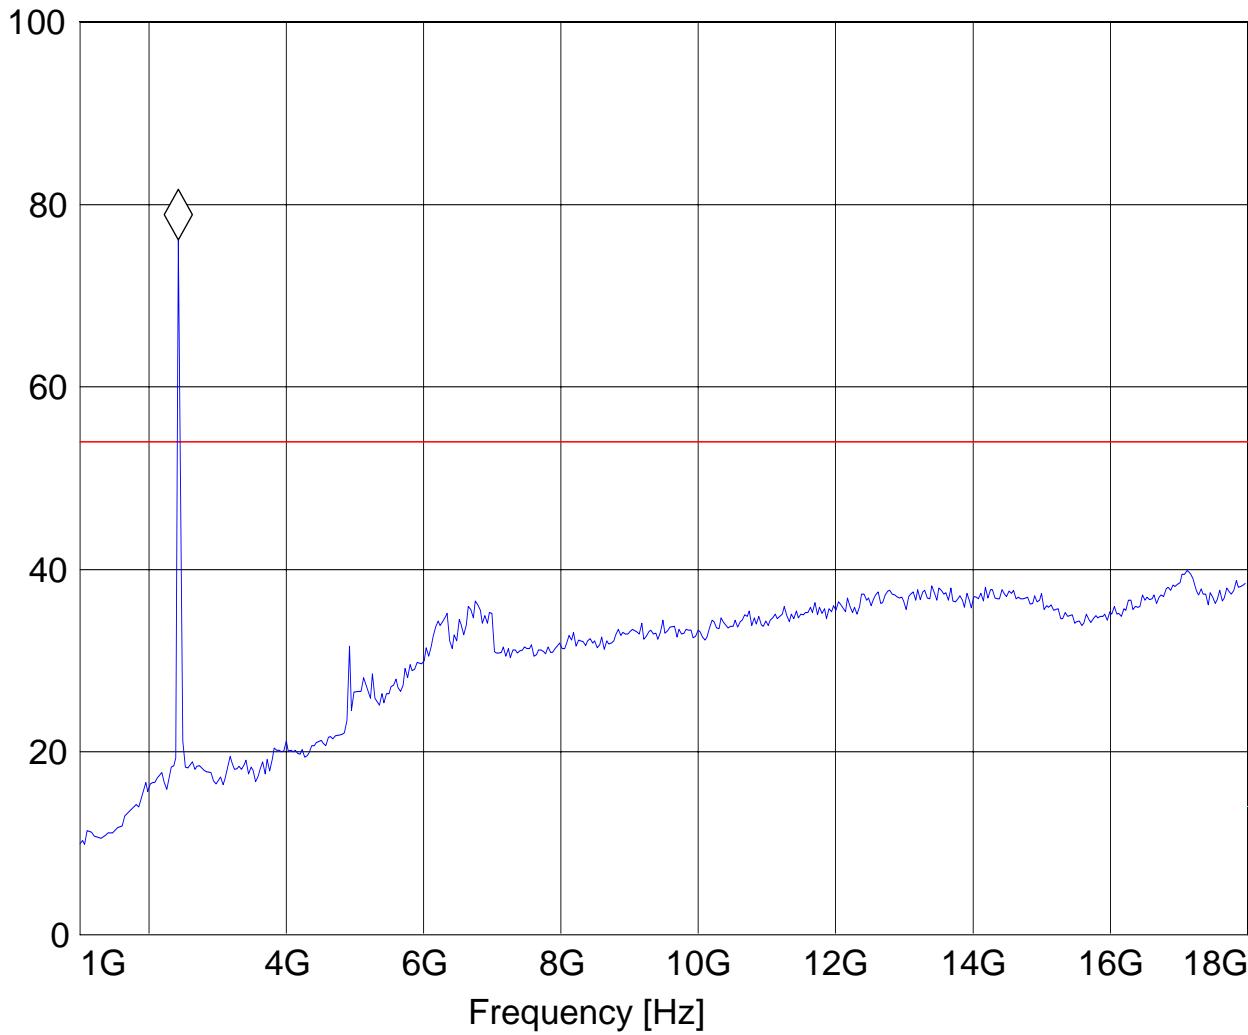

18-25GHz Chain A

Note: This plot is valid for low, mid, high channels (worst-case plot) **Note:** Peak Reading vs. Average limit


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11b, ch 1, chain a
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	#572 horn AF

Marker: 22.93987976 GHz 27.82 dB μ V/m

Level [dB μ V/m]

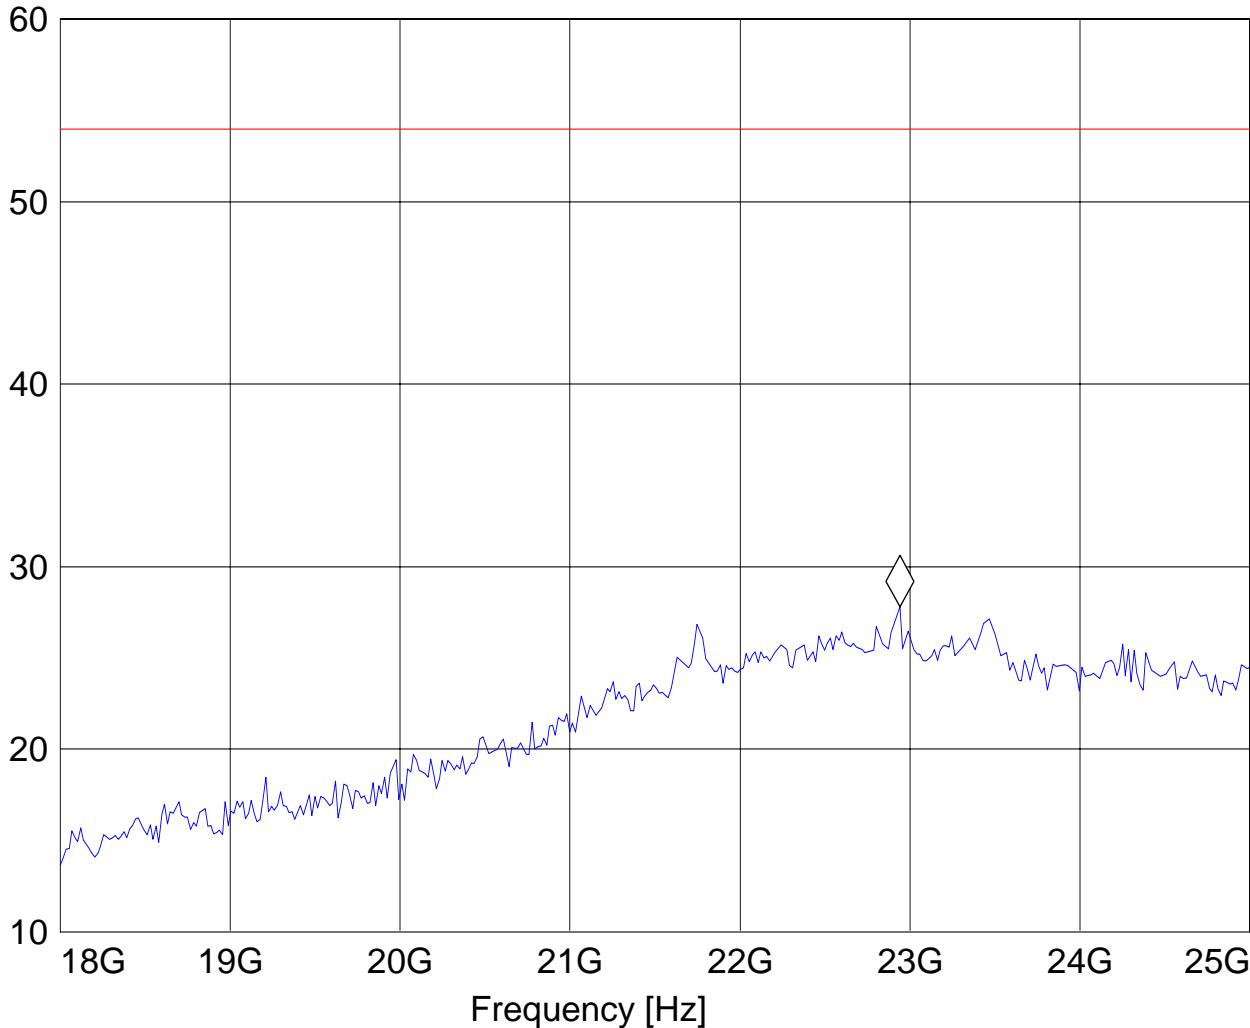


30MHz – 1GHz Chain B**Antenna: vertical**

Note: This plot is valid for low, mid, high channels (worst-case plot)

EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11g, ch 11, chain b
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments: new module from Broadcom

SWEET TABLE: "FCC15.247_30M-1G_Ver"

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

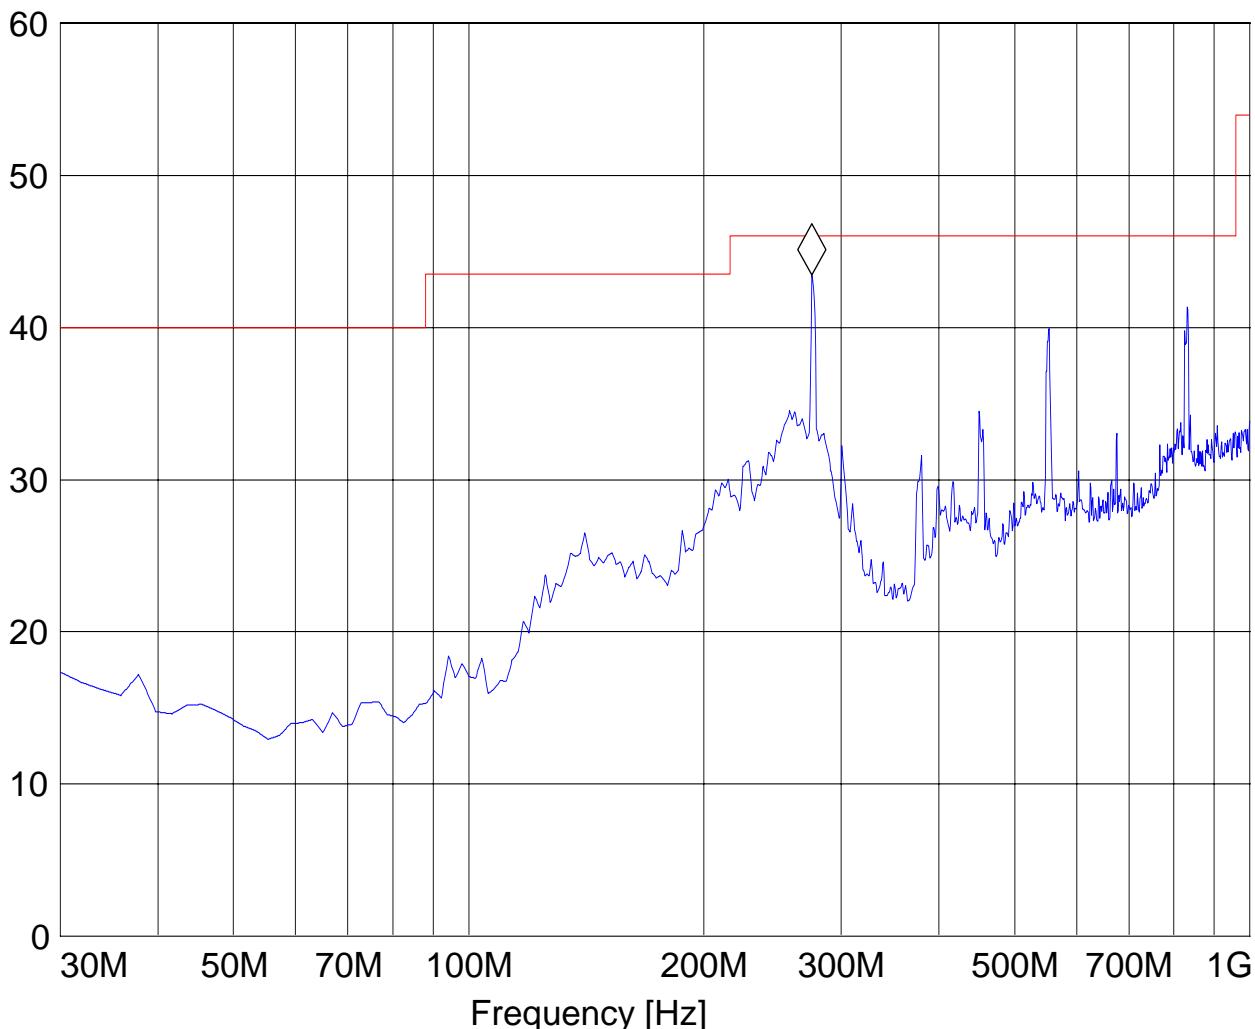Marker: 274.92986 MHz 43.48 dB μ V/mLevel [dB μ V/m]


30MHz – 1GHz Chain B**Antenna: horizontal**

Note: This plot is valid for low, mid, high channels (worst-case plot)

EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11g, Ch 6, chain b
 ANT Orientation: H
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247_30M-1G_Hor"

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

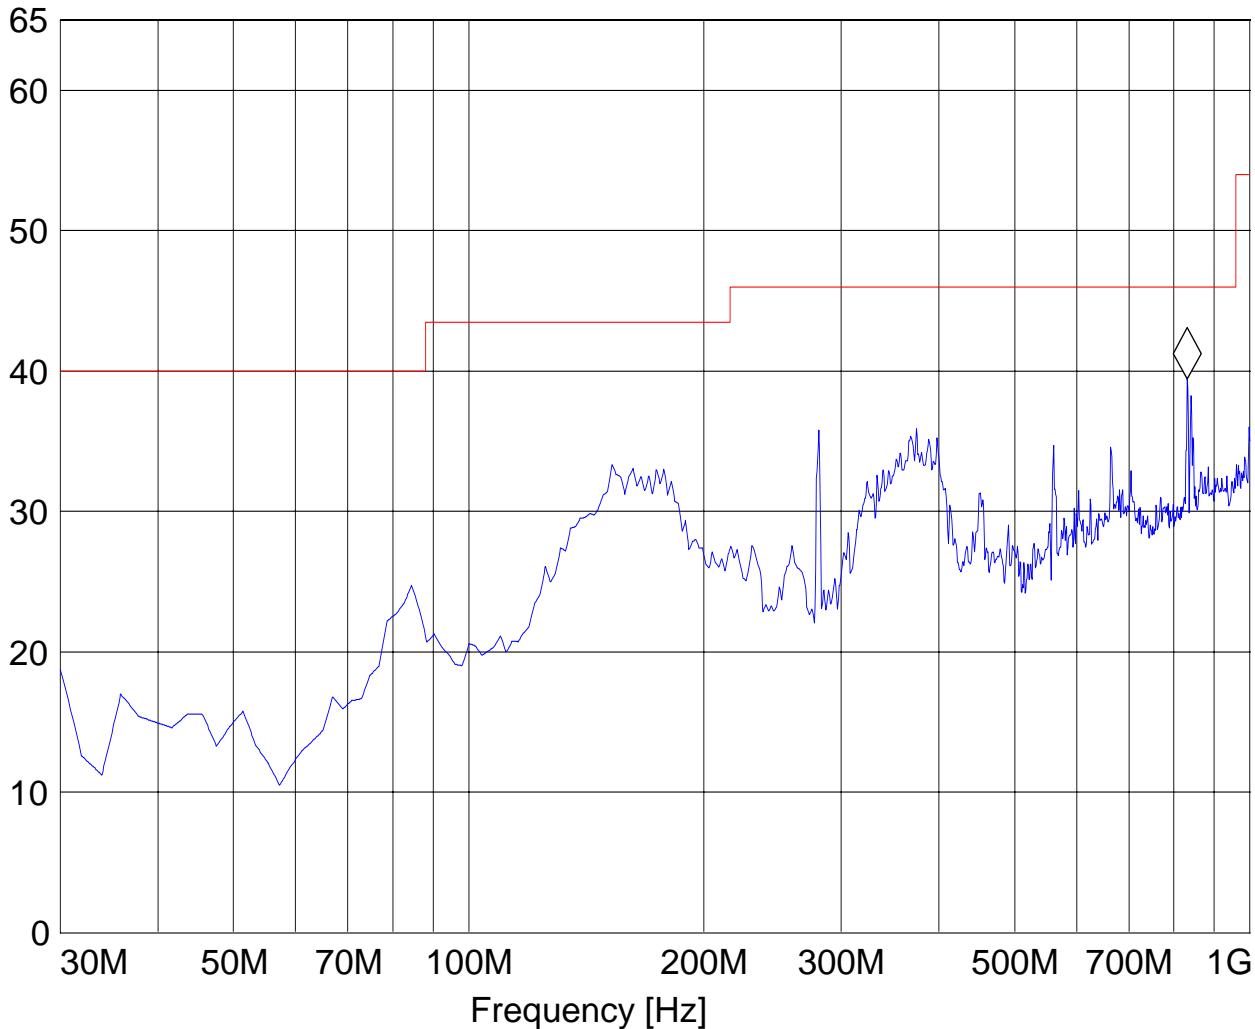Marker: 830.881764 MHz 39.43 dB μ V/mLevel [dB μ V/m]

1-18GHz (2412MHz) Chain BNote:The peak above the limit line is the carrier freq.Note:Peak Reading vs. Average limit

EUT / Description: Dell Siberia

Manufacturer: Broadcom

Test mode: 802.11g, ch 1, chain b

ANT Orientation: : V

EUT Orientation:: H


Test Engineer: Ed

Voltage: AC Adapter

Comments:: marker is on uplink sig.

SWEET TABLE: "FCC 15.407 1-18G"

Start Frequency	Stop Frequency	Detector	Meas.	IF Bandw.	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

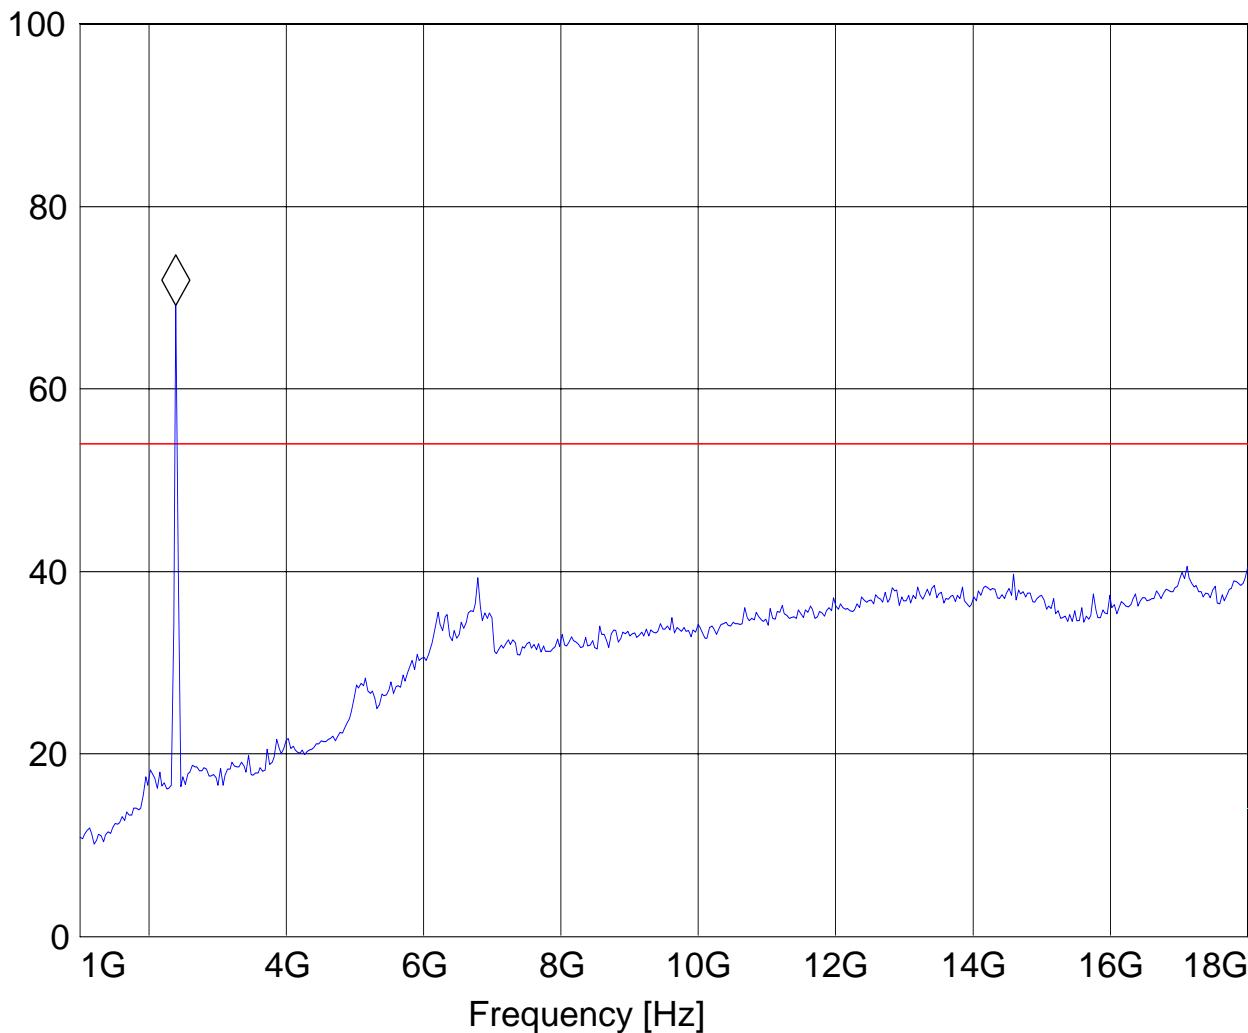Marker: 2.396793587 GHz 69.17 dB μ V/mLevel [dB μ V/m]

1-18GHz (2437MHz) Chain B

Note:The peak above the limit line is the carrier freq.Note:Peak Reading vs. Average limit
CETECOM Inc., 411 Dixon Landing Road; Milpitas, CA 95035


EUT / Description: Dell Siberia
 Manufacturer: Broadcom
 Test mode: 802.11g, ch 6, chain b
 ANT Orientation: : V
 EUT Orientation:: H
 Test Engineer: Ed
 Voltage: AC Adapter
 Comments:: marker is on uplink sig.

SWEET TABLE: "FCC 15.407 1-18G"

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Time Coupled	1 MHz	#326horn_AF_horz

Marker: 2.430861723 GHz 71.88 dB μ V/m

Level [dB μ V/m]

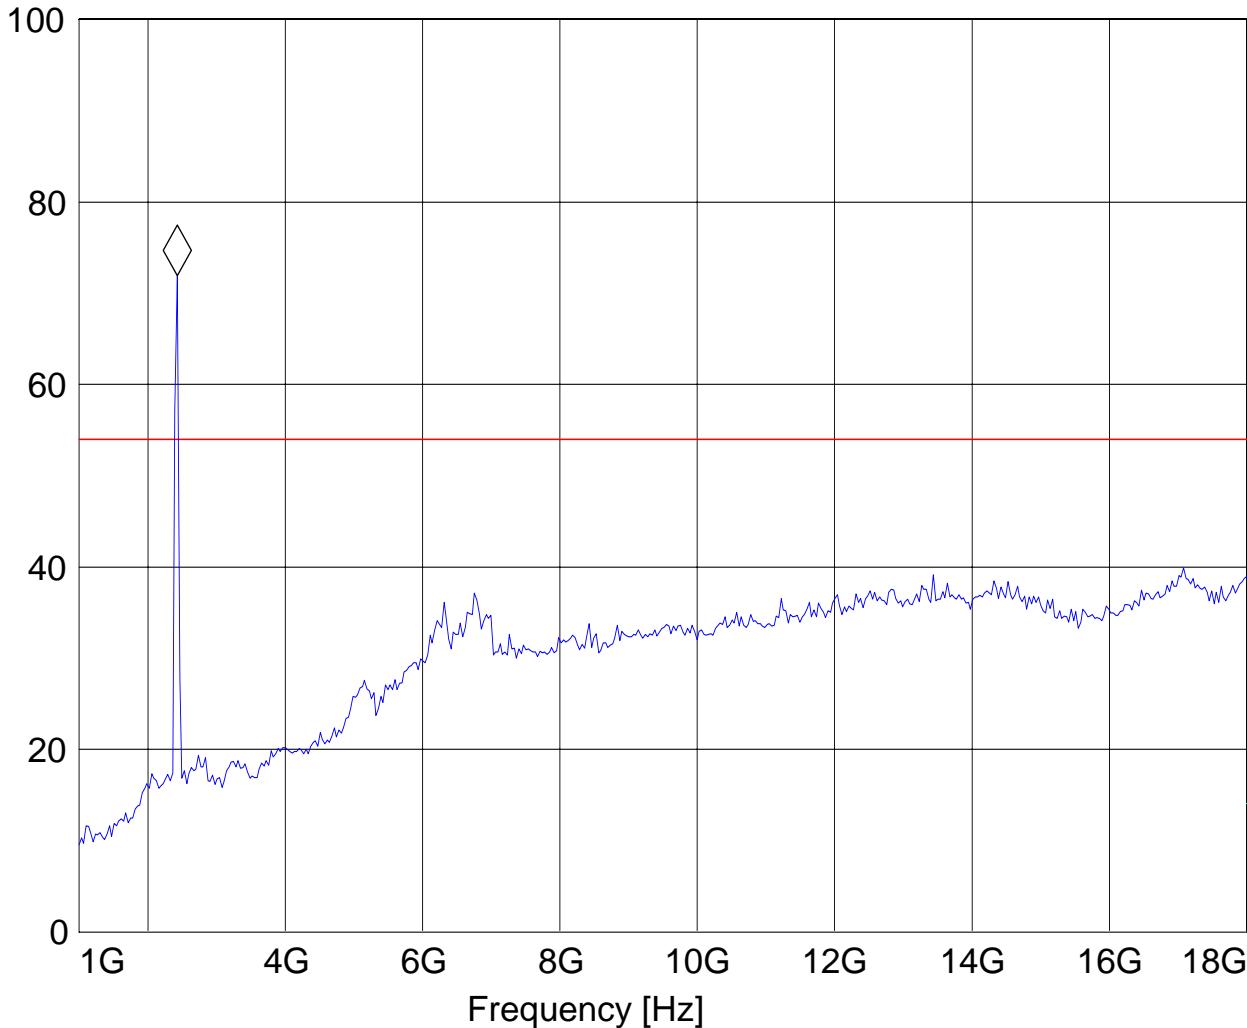

1-18GHz (2462MHz) Chain BNote:The peak above the limit line is the carrier freq.Note:Peak Reading vs. Average limit

EUT / Description: Dell Siberia

Manufacturer: Broadcom

Test mode: 802.11g, ch 11, chain b

ANT Orientation: : V

EUT Orientation:: H


Test Engineer: Ed

Voltage: AC Adapter

Comments:: marker is on uplink sig.

SWEET TABLE: "FCC 15.407 1-18G"

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

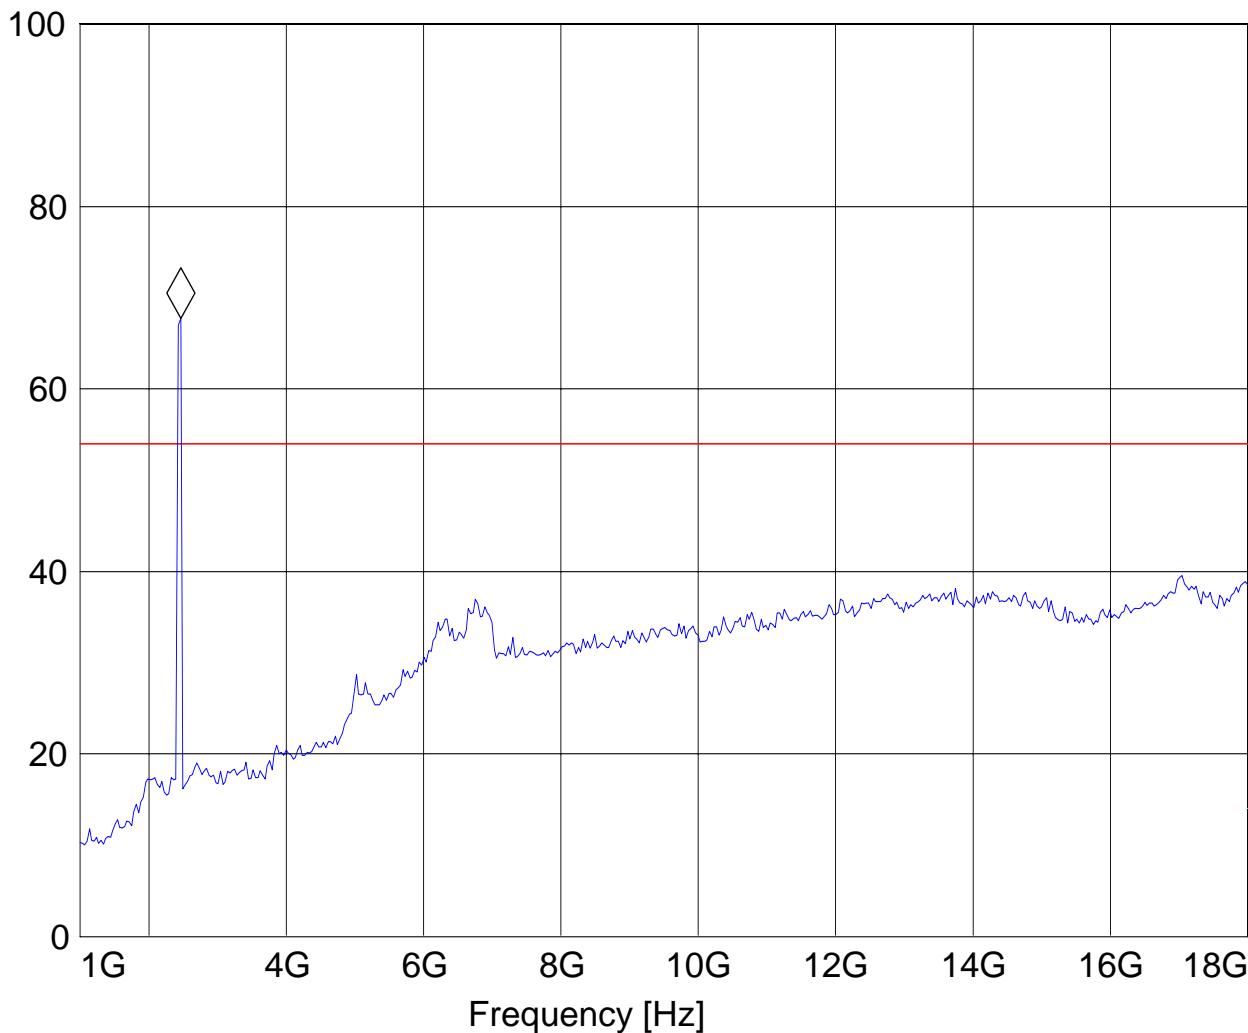Marker: 2.46492986 GHz 67.74 dB μ V/mLevel [dB μ V/m]

18-25GHz Chain B

Note: This plot is valid for low, mid, high channels (worst-case plot) **Note:** Peak Reading vs. Average limit


EUT: Dell Siberia
 Customer: Broadcom
 Test Mode: 802.11g, Ch 1, chain b
 ANT Orientation: V
 EUT Orientation: H
 Test Engineer: Ed
 Power Supply: AC Adapter
 Comments:

SWEET TABLE: "FCC15.247_18-26.5G"

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
18.0 GHz	26.5 GHz	MaxPeak	Coupled	1 MHz	#572 horn AF

Marker: 22.599198397 GHz 27.05 dB μ V/m

Level [dB μ V/m]

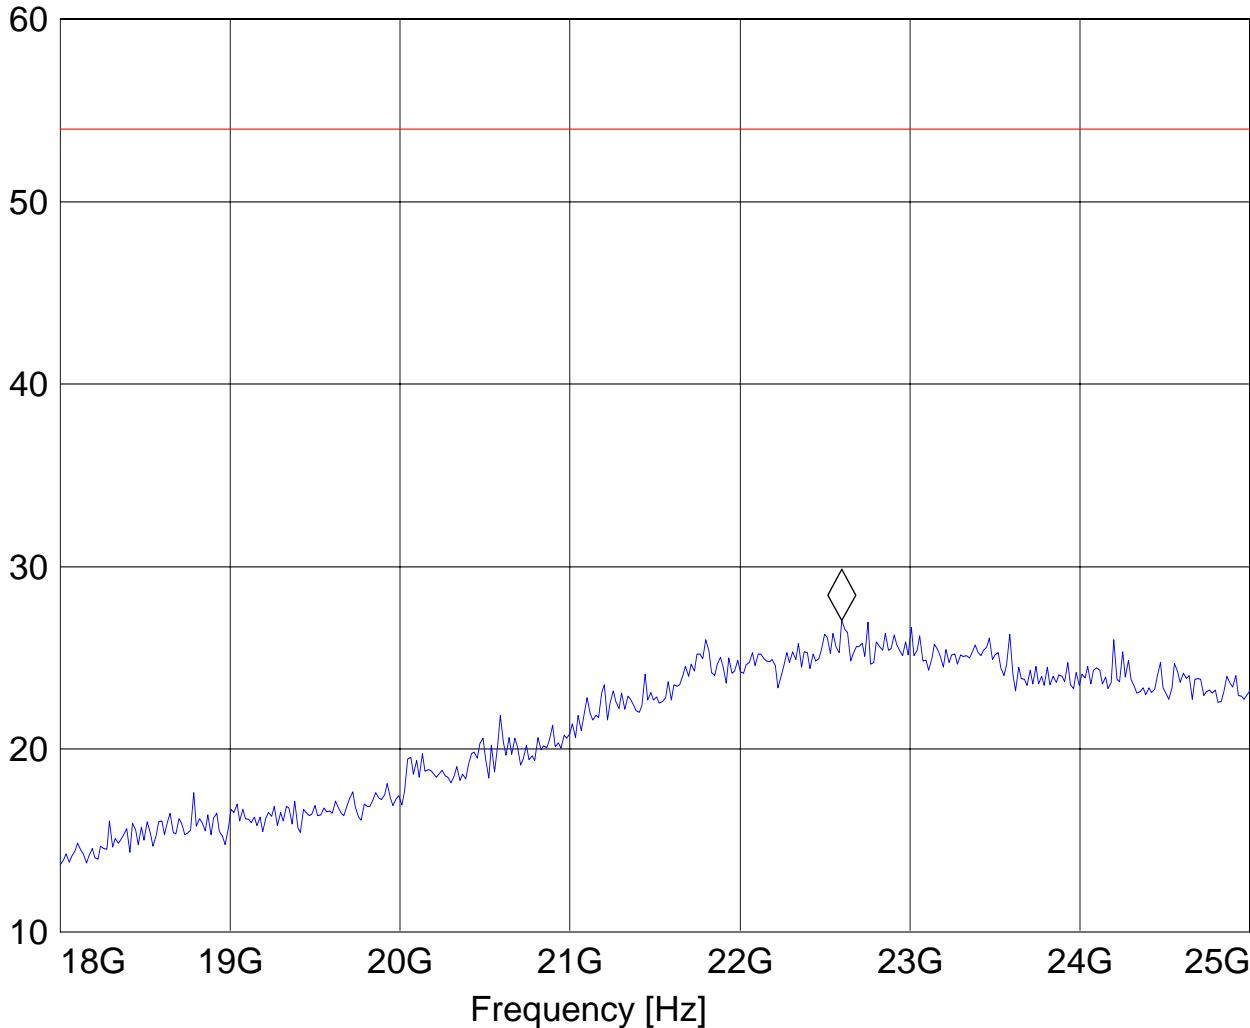

5.4 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207**5.4.1 Limits****Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)**

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Limit

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz


5.4.2 Results, Line:

EUT: Dell Siberia
 Manufacturer: Broadcom
 Operating Condition: WLAN
 ANT Orientation:: CONDUCTED
 EUT Orientation:: H
 Test Engineer:: Peter Mu
 Power Supply: AC Adaptor
 Comments: LINE

SWEET TABLE: "55022 cond"

Short Description: EN 55022 for 150KHz-30MHz
 Unit: dB μ V

Detector: Mode:

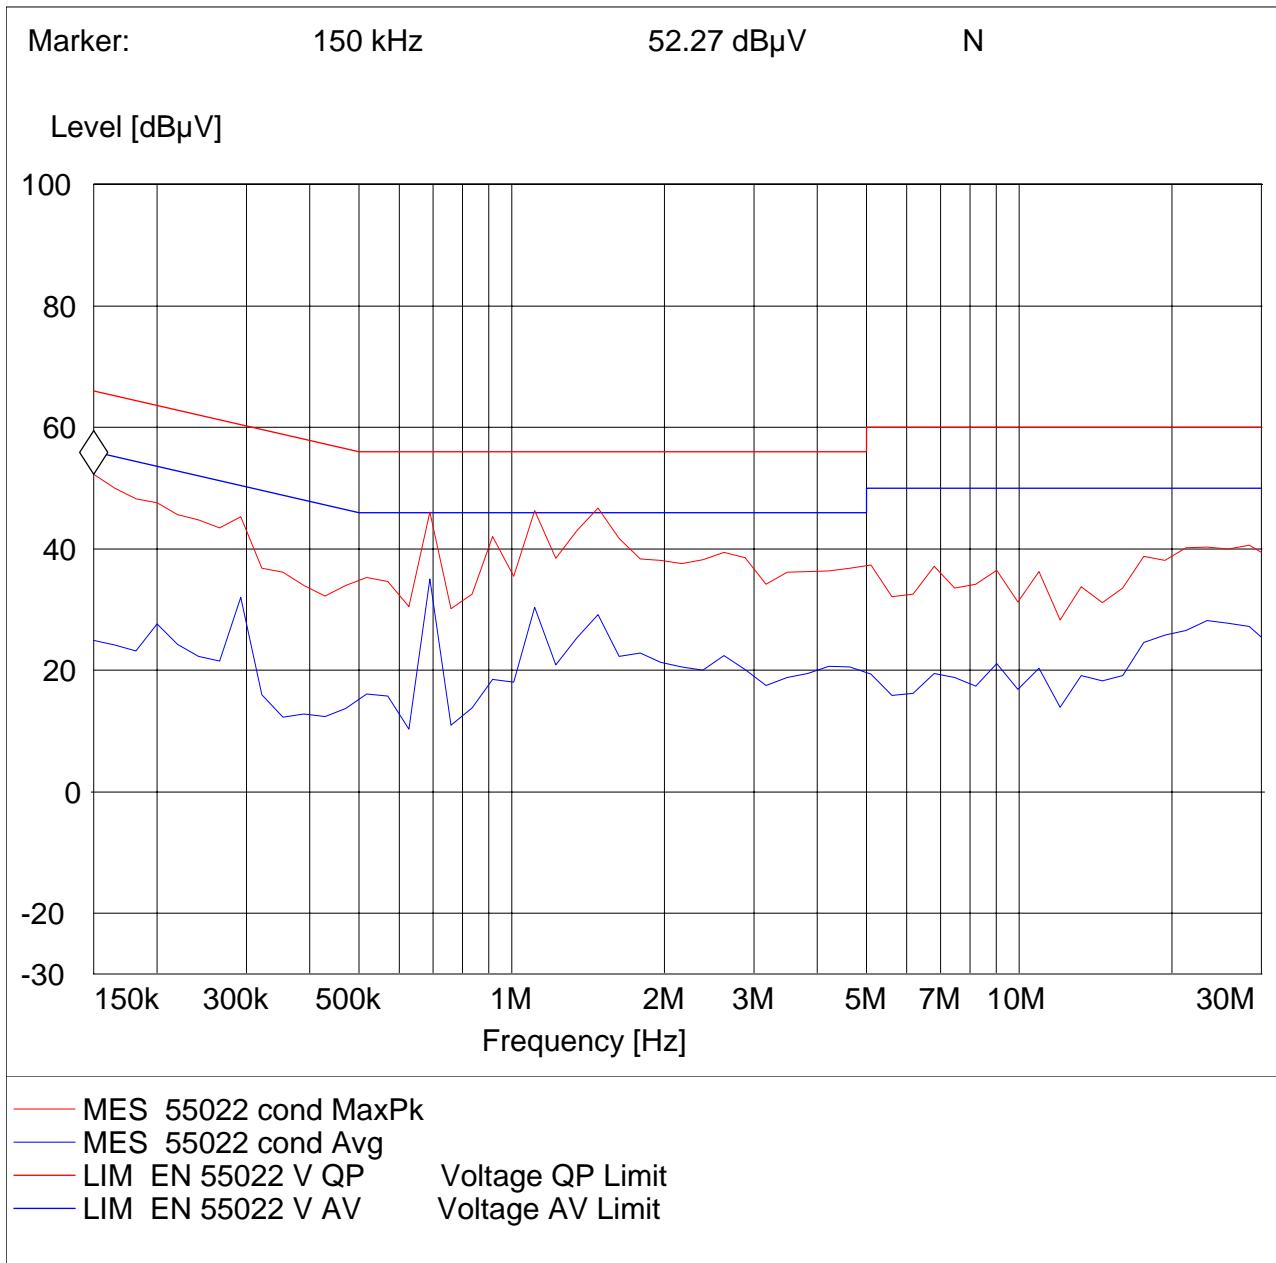


Neutral:

EUT: Dell Siberia
 Manufacturer: Broadcom
 Operating Condition: WLAN
 ANT Orientation:: CONDUCTED
 EUT Orientation:: H
 Test Engineer:: Peter Mu
 Power Supply: AC Adaptor
 Comments: N

SWEET TABLE: "55022 cond"

Short Description: EN 55022 for 150KHz-30MHz
 Unit: dB μ V

Detector: Mode:

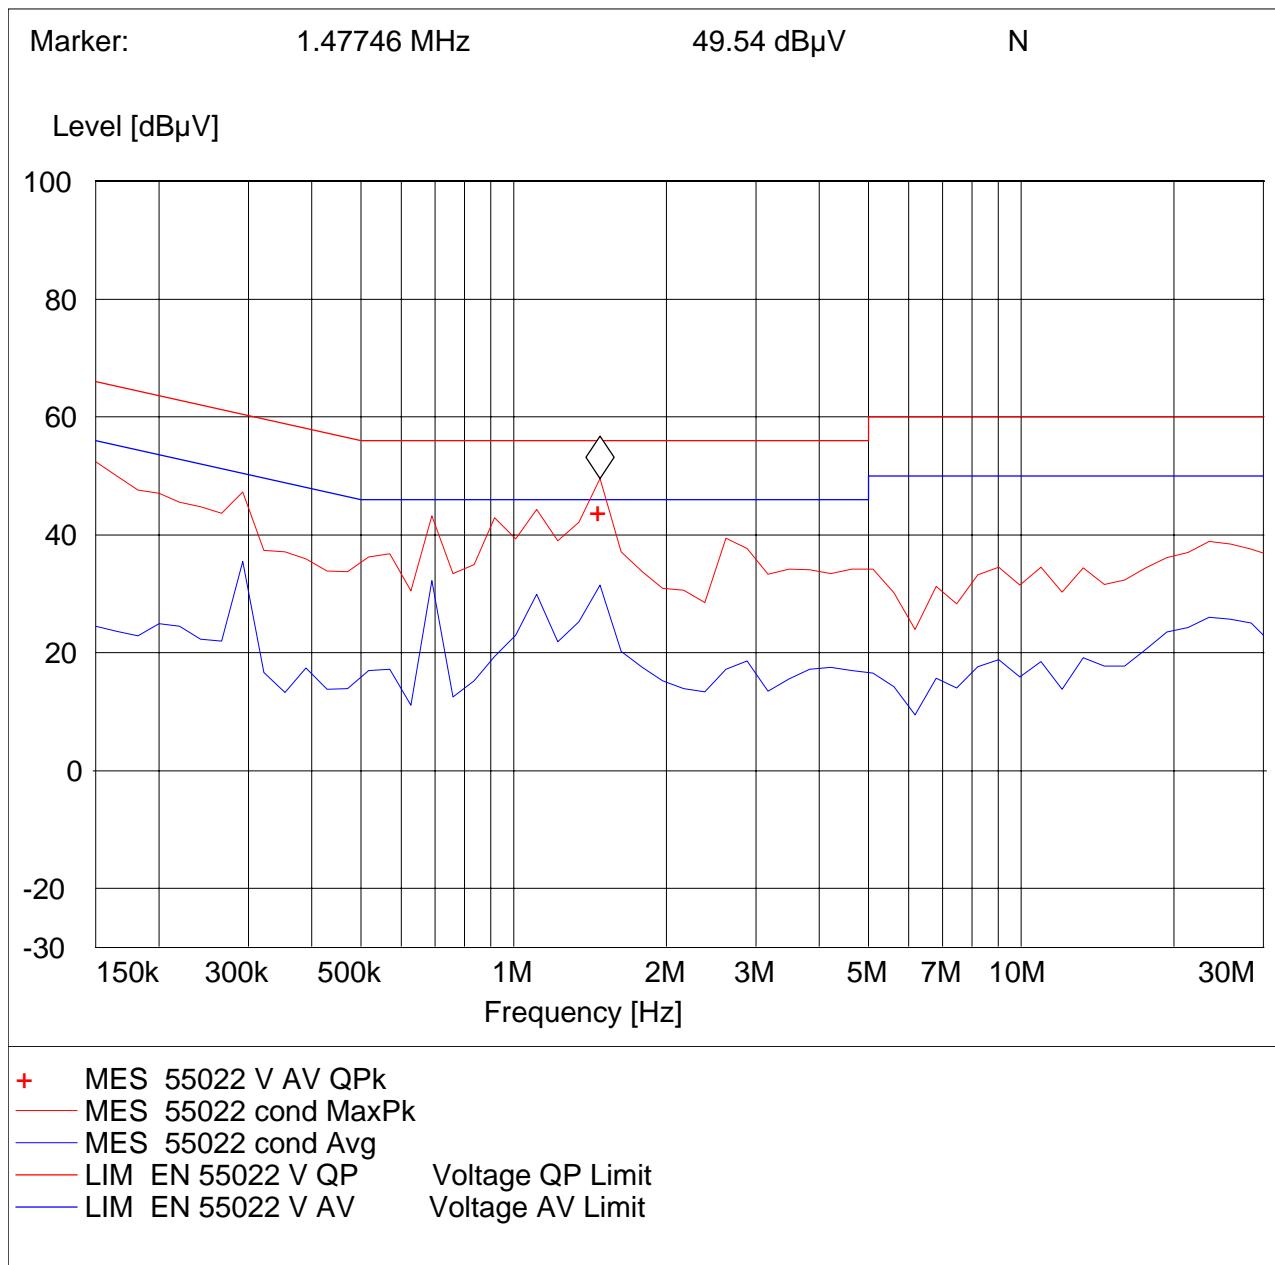

6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2008	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2008	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2008	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2008	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2008	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2008	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2008	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2008	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2008	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2008	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2008	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2008	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2008	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2008	2 years

7 BLOCK DIAGRAMS

Radiated Testing

ANECHOIC CHAMBER

