



# FCC Test Report

## FCC Part 15.407 for UNII Devices

**802.11ag Wireless LAN PCI-E Mini Card**

**Model #: BCM94311MCAG**

**Broadcom Corporation  
190 Mathilda Place  
Sunnyvale, CA 94086  
U.S.A  
FCC ID: QDS-BRCM1019**

**TEST REPORT #: EMC\_BROAD\_033\_07002\_FCC15.407\_a\_BRCM1019  
DATE: 2007-7-23**



Certificate # 2135.01

**Bluetooth™  
Bluetooth  
Qualification Test  
Facility  
(BQTF)**

**CTIA Authorized Test Lab**  
LAB CODE 20020328-00

**FCC listed:  
A2LA  
accredited**

**IC recognized #  
3925A**

**CETECOM Inc.**

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: [info@cetecomusa.com](mailto:info@cetecomusa.com) • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2113686

Board of Directors: Dr. Harald Ansorge, Dr. Klaus Matkey, Hans Peter May

© Copyright by CETECOM

**TABLE OF CONTENTS**

<b>1</b>	<b><i>Assessment</i></b>	<b>3</b>
<b>Technical responsibility for area of testing:</b>		<b>3</b>
EMC & Radio		3
<b>This report is prepared by:</b>		<b>3</b>
EMC & Radio		3
<b>2</b>	<b><i>Administrative Data</i></b>	<b>4</b>
<b>2.1</b>	<b>Identification of the Testing Laboratory</b>	<b>4</b>
<b>2.2</b>	<b>Identification of the Client</b>	<b>4</b>
<b>2.3</b>	<b>Identification of the Manufacturer</b>	<b>4</b>
<b>3</b>	<b><i>Equipment under Test (EUT)</i></b>	<b>5</b>
<b>3.1</b>	<b>Specification of the Equipment under Test</b>	<b>5</b>
<b>3.2</b>	<b>Specification of the Supporting Portable Platform</b>	<b>5</b>
<b>4</b>	<b><i>Subject Of Investigation</i></b>	<b>6</b>
<b>5</b>	<b><i>Measurements</i></b>	<b>7</b>
<b>5.1</b>	<b>MAXIMUM PEAK OUTPUT POWER § 15.407 (RADIATED)</b>	<b>7</b>
<b>5.1.1</b>	<b>EIRP 802.11 (a) MODE:</b>	<b>7</b>
<b>5.2</b>	<b>RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.407(b)/15.205</b>	<b>11</b>
<b>5.2.1</b>	<b>LIMITS</b>	<b>11</b>
<b>5.2.2</b>	<b>802.11 (a) MODE (5180MHz) Aux PEAK</b>	<b>12</b>
<b>5.2.3</b>	<b>802.11 (a) MODE (5180MHz) Aux AVG</b>	<b>13</b>
<b>5.2.4</b>	<b>802.11 (a) MODE (5320MHz) Aux PEAK</b>	<b>14</b>
<b>5.2.5</b>	<b>802.11 (a) MODE (5320MHz) Aux AVG</b>	<b>15</b>
<b>5.3</b>	<b>TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.407(b)/15.205/15.209</b>	<b>16</b>
<b>5.3.1</b>	<b>LIMITS</b>	<b>16</b>
<b>5.3.2</b>	<b>RESULTS 802.11 (a) MODE Aux</b>	<b>17</b>
<b>5.4</b>	<b>AC POWER LINE CONDUCTED EMISSIONS § 15.107/207</b>	<b>26</b>
<b>5.4.1</b>	<b>LIMITS</b>	<b>26</b>
<b>5.4.2</b>	<b>RESULTS</b>	<b>27</b>
<b>6</b>	<b><i>TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS</i></b>	<b>29</b>
<b>7</b>	<b><i>BLOCK DIAGRAMS</i></b>	<b>30</b>

**1 Assessment**

**The following is in compliance with the applicable criteria specified in FCC rules Part 15.407 of the Code of Federal Regulations.**

Company	Description	Model #
<b>Broadcom Corporation</b>	<b>802.11ag Wireless LAN PCI-E Mini Card</b>	<b>BCM94311MCAG</b>

**Technical responsibility for area of testing:**

**Lothar Schmidt**  
(Director Regulatory and  
Antenna Services)

**2007-7-23 EMC & Radio**

Date	Section	Name	Signature
------	---------	------	-----------

**This report is prepared by:**

**Peter Mu**

**2007-7-23 EMC & Radio (EMC Project Engineer)**

Date	Section	Name	Signature
------	---------	------	-----------

The test results of this test report relate exclusively to the test item specified in Identification of the Equipment under Test. The CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of the CETECOM Inc USA.

## 2 Administrative Data

### 2.1 Identification of the Testing Laboratory

Company Name:	CETECOM Inc.
Department:	EMC
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Director Regulatory and Antenna Services :	Lothar Schmidt

### 2.2 Identification of the Client

Applicant's Name:	Broadcom Corporation
Address Line 1:	190 Mathilda Place
Address Line 2:	
City/ Zip Code	Sunnyvale, California 94086
Country:	U.S.A
Contact Person:	Daniel Lawless
Phone No.:	408 922 5870
Fax:	408 543 3399
e-mail:	dlawless@broadcom.com

### 2.3 Identification of the Manufacturer

Same as above client.

### 3 Equipment under Test (EUT)

#### 3.1 Specification of the Equipment under Test

<b>Product Type</b>	Mini PCI Card
<b>Marketing Name:</b>	802.11ag Wireless LAN PCI-E Mini Card
<b>Model No:</b>	BCM94311MCAG
<b>Operating Frequency:</b>	5150-5350MHz
<b>Date of Test:</b>	2007-6-27 to 2007-7-18
<b>Type(s) of Modulation:</b>	OFDM
<b>Antenna Type:</b>	WDAN-DWDS1-001-DF and Amphenol antenna WT0581-11
<b>Output Power<sup>1</sup>:</b>	23.03 dBm (0.201W) EIRP WLAN 802.11a 2412MHz

#### 3.2 Specification of the Supporting Portable Platform

<b>Product Type</b>	Notebook PC
<b>Marketing Name:</b>	Dell XPS M1730
<b>Model No:</b>	Dell PP06XA

#### **4 Subject Of Investigation**

All testing was performed on the product referred to in Section 3 as EUT. EUT contains Broadcom BCM94311MCAG WLAN module, FCC ID: QDS-BRCM1019 that supports the following mode and frequency bands:

2400-2483.4MHz: 802.11b, 802.11g

5150-5350MHz: 802.11a

5725-5850MHz: 802.11a

The objective of the measurements done by Cetecom Inc. was to measure the performance of the EUT operating under 802.11a mode in the 5150-5350 MHz range as specified by requirements listed in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations. The maximization of portable equipment is conducted in accordance with ANSI C63.4.

Only the auxiliary antenna is tested for compliance because the distance from the main antenna to the body of the user is greater than 20cm and is therefore not a portable device according to FCC rule 2.1093.

## 5 Measurements

### 5.1 MAXIMUM PEAK OUTPUT POWER § 15.407 (RADIATED)

#### 5.1.1 EIRP 802.11 (a) MODE:

TEST CONDITIONS			MAXIMUM PEAK OUTPUT POWER (dBm)		
Frequency (MHz)			5180	5260	5320
Aux	T <sub>nom</sub> (23)°C	V <sub>nom</sub> VDC	23.03	21.53	18.24
Measurement uncertainty			±0.5dBm		

**EIRP 802.11 (a) Mode (5180) Aux**

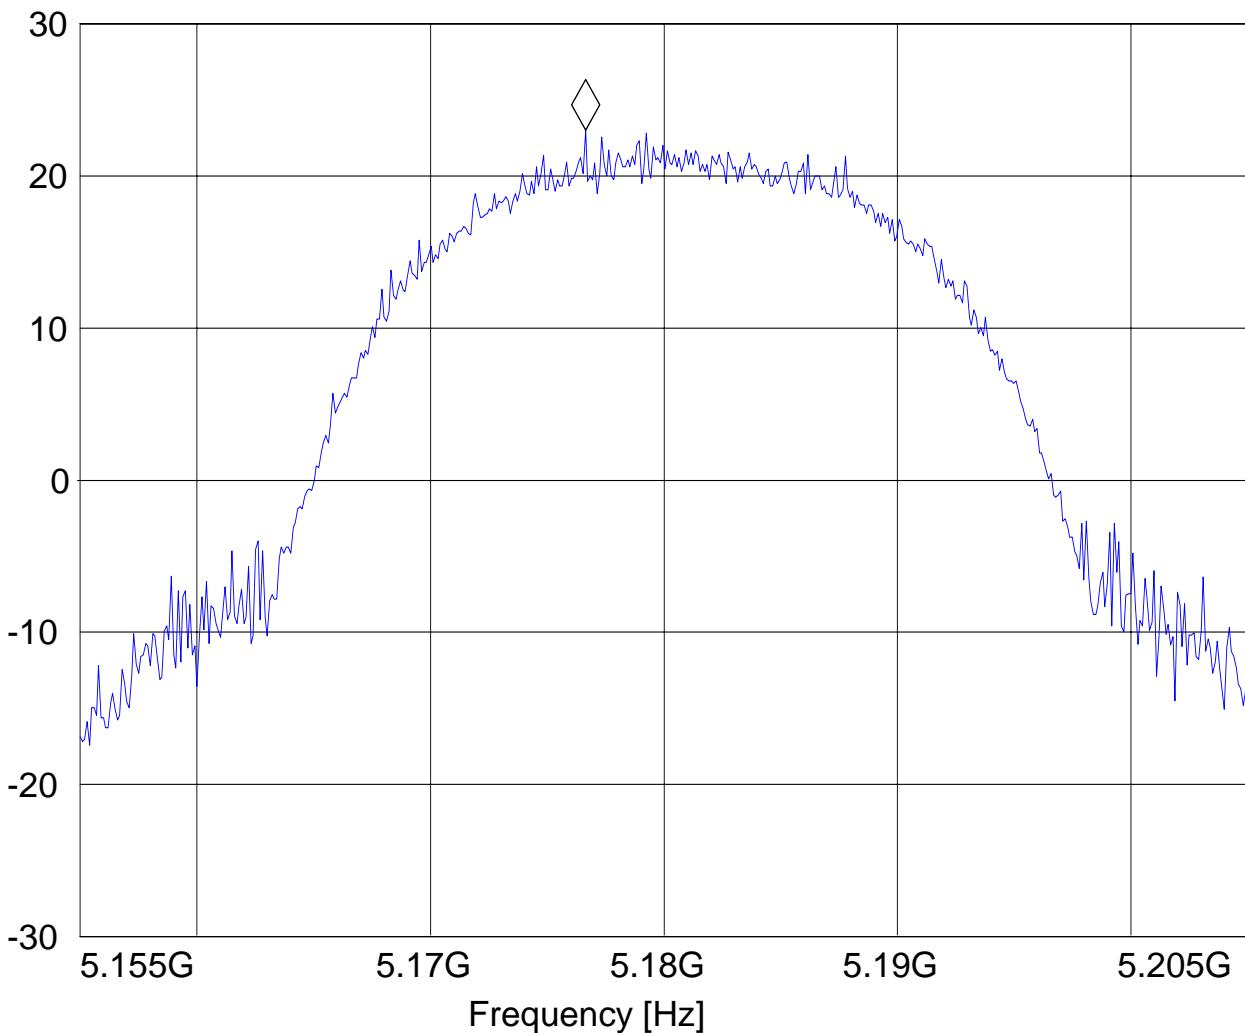
EUT: Dell Siberia, BRCM1019  
 Customer: Broadcom  
 Test Mode: 801.11a 5.1G  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Peter Mu  
 Power Supply: AC Adaptor  
 Comments: TT180°

**SWEEP TABLE: "EIRP 802.11a 36"**

Short Description:		EIRP channel-5180 MHz		
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
5.2 GHz	5.2 GHz	MaxPeak	Coupled	10 MHz DUMMY-DBM
		MaxPeak		

Marker: 5.176643287 GHz 23.03 dBm

Level [dBm]



**EIRP 802.11 (a) Mode (5260MHz) Aux**

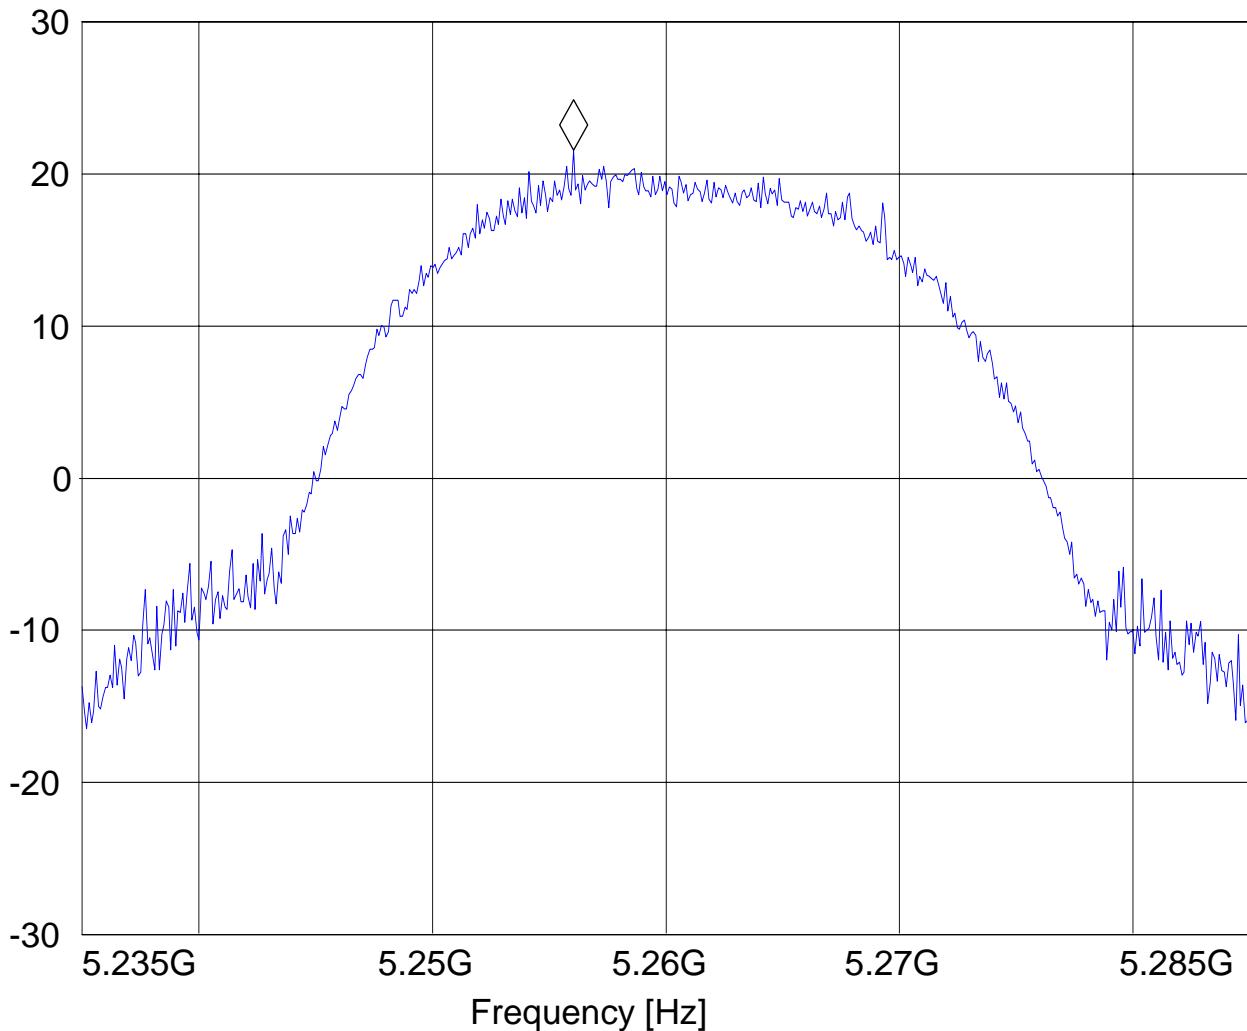
EUT: Dell Siberia, BRCM1019  
 Customer: Broadcom  
 Test Mode: 801.11a 5.1G  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Peter Mu  
 Power Supply: AC Adaptor  
 Comments:

***SWEEP TABLE: "EIRP 802.11a 52"***

Short Description: EIRP channel-5260 MHz				
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
5.2 GHz	5.3 GHz	MaxPeak	Coupled	10 MHz DUMMY-DBM

Marker: 5.256042084 GHz 21.53 dBm

Level [dBm]



**EIRP 802.11 (a) Mode (5320MHz) Aux**

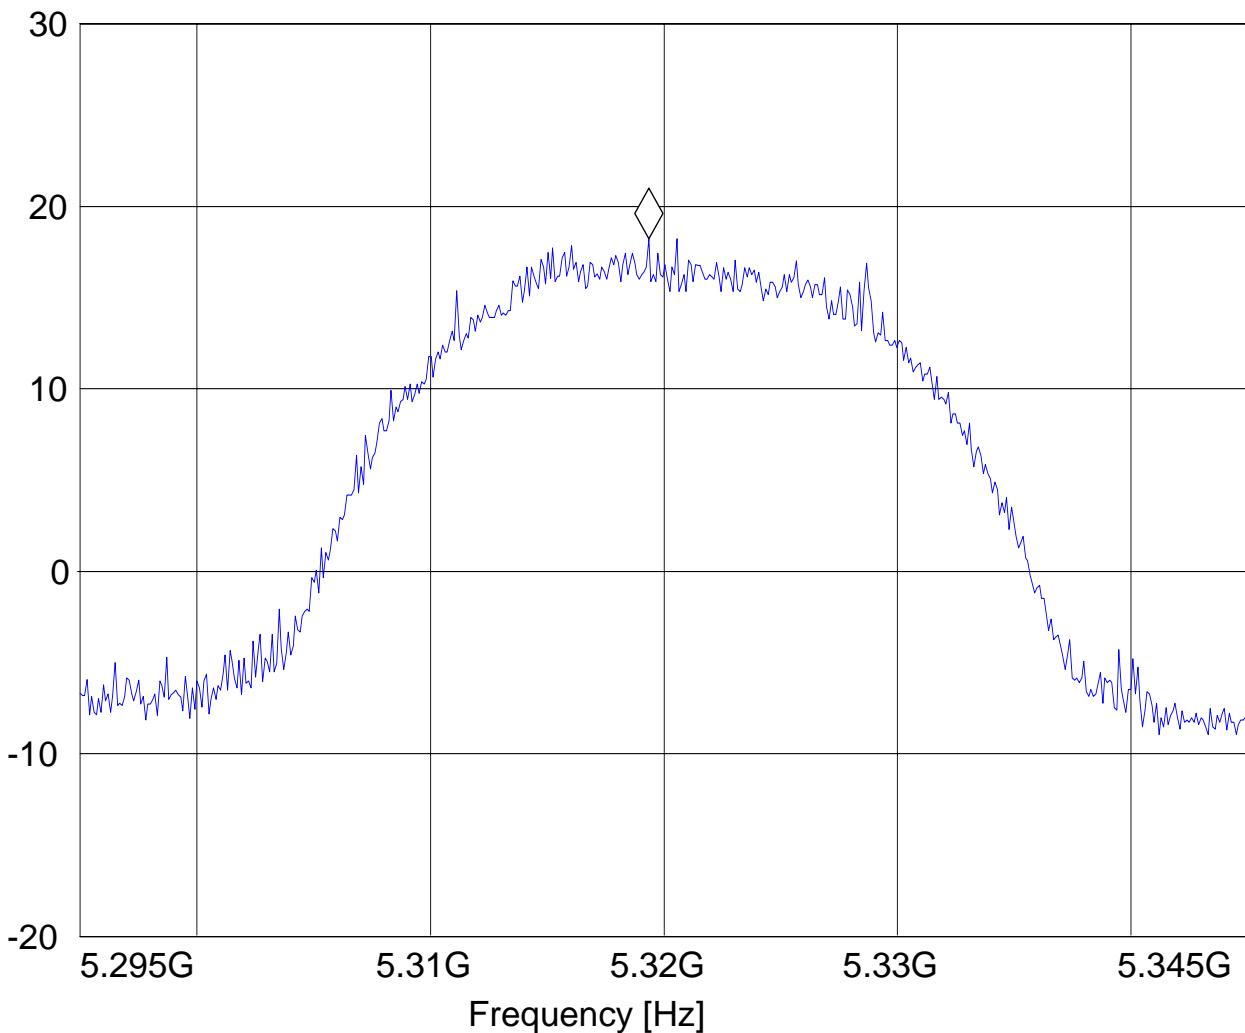
EUT: Dell Siberia, BRCM1019  
 Customer: Broadcom  
 Test Mode: 801.11a 5.1G  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Peter Mu  
 Power Supply: AC Adaptor  
 Comments:

***SWEET TABLE: "EIRP 802.11a 64"***

Short Description:		EIRP channel-5320 MHz		
Start Frequency	Stop Frequency	Detector	Meas.	IF Transducer
5.3 GHz	5.3 GHz	MaxPeak	Coupled	10 MHz DUMMY-DBM

Marker: 5.319348697 GHz 18.24 dBm

Level [dBm]



**5.2 RESTRICTED BAND EDGE COMPLIANCE RADIATED §15.407(b)/15.205****5.2.1 LIMITS**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

**\*PEAK LIMIT= 74dB $\mu$ V/m****\*AVG. LIMIT= 54dB $\mu$ V/m**

**5.2.2 802.11 (a) MODE (5180MHz) Aux PEAK**

EUT: Dell Siberia, BRCM1019

Customer: Broadcom

Test Mode: 801.11a 5.1G

ANT Orientation: V

EUT Orientation: H

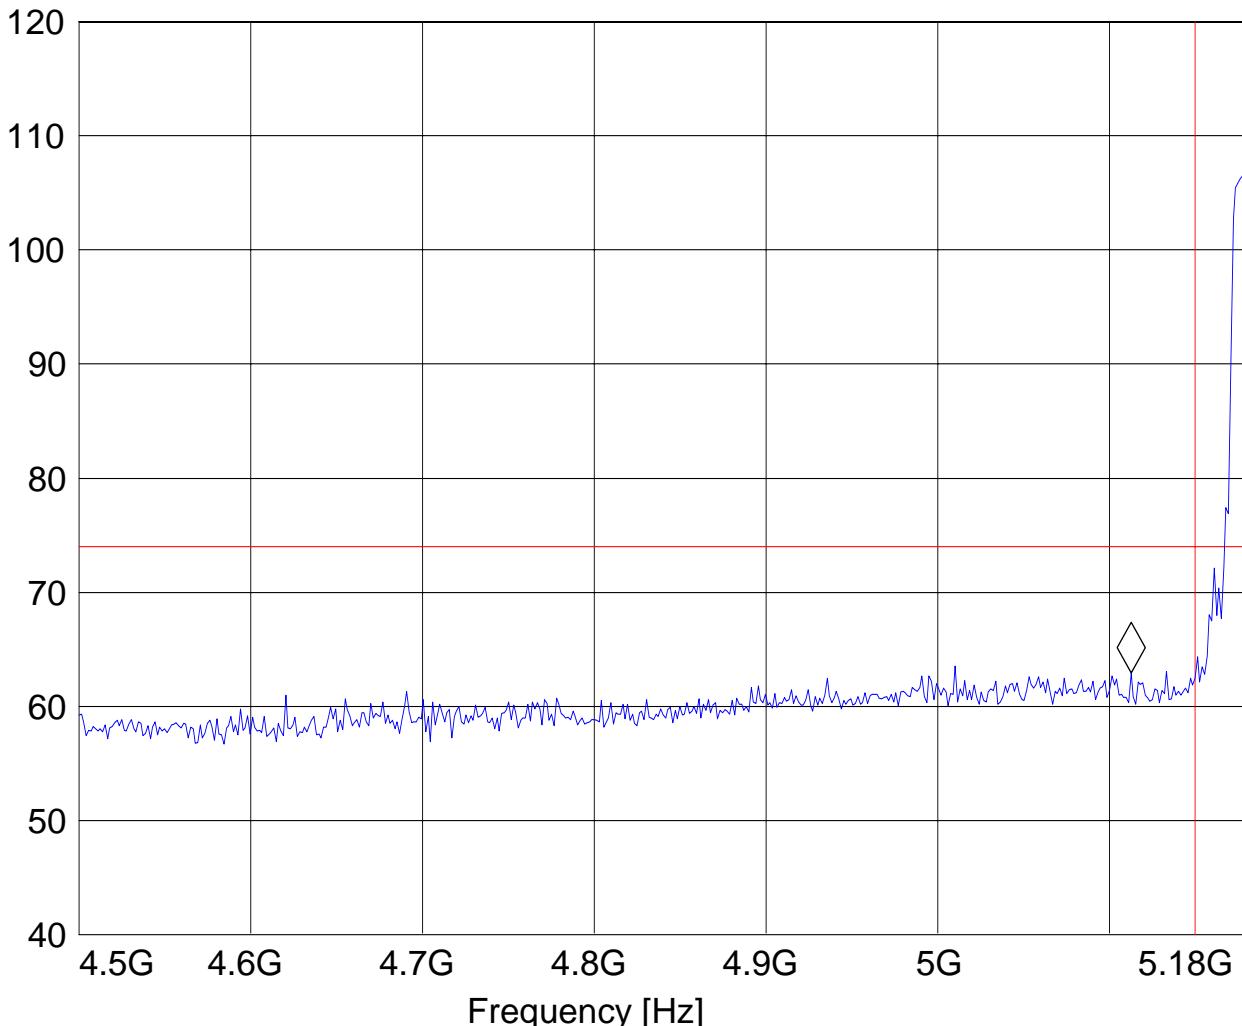
Test Engineer: Peter Mu

Power Supply: AC Adaptor

Comments:

***SWEET TABLE: "FCC15.407 A\_LBE\_PK"***

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
4.5 GHz	5.2 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 5.11256513 GHz 62.95 dB $\mu$ V/mLevel [dB $\mu$ V/m]

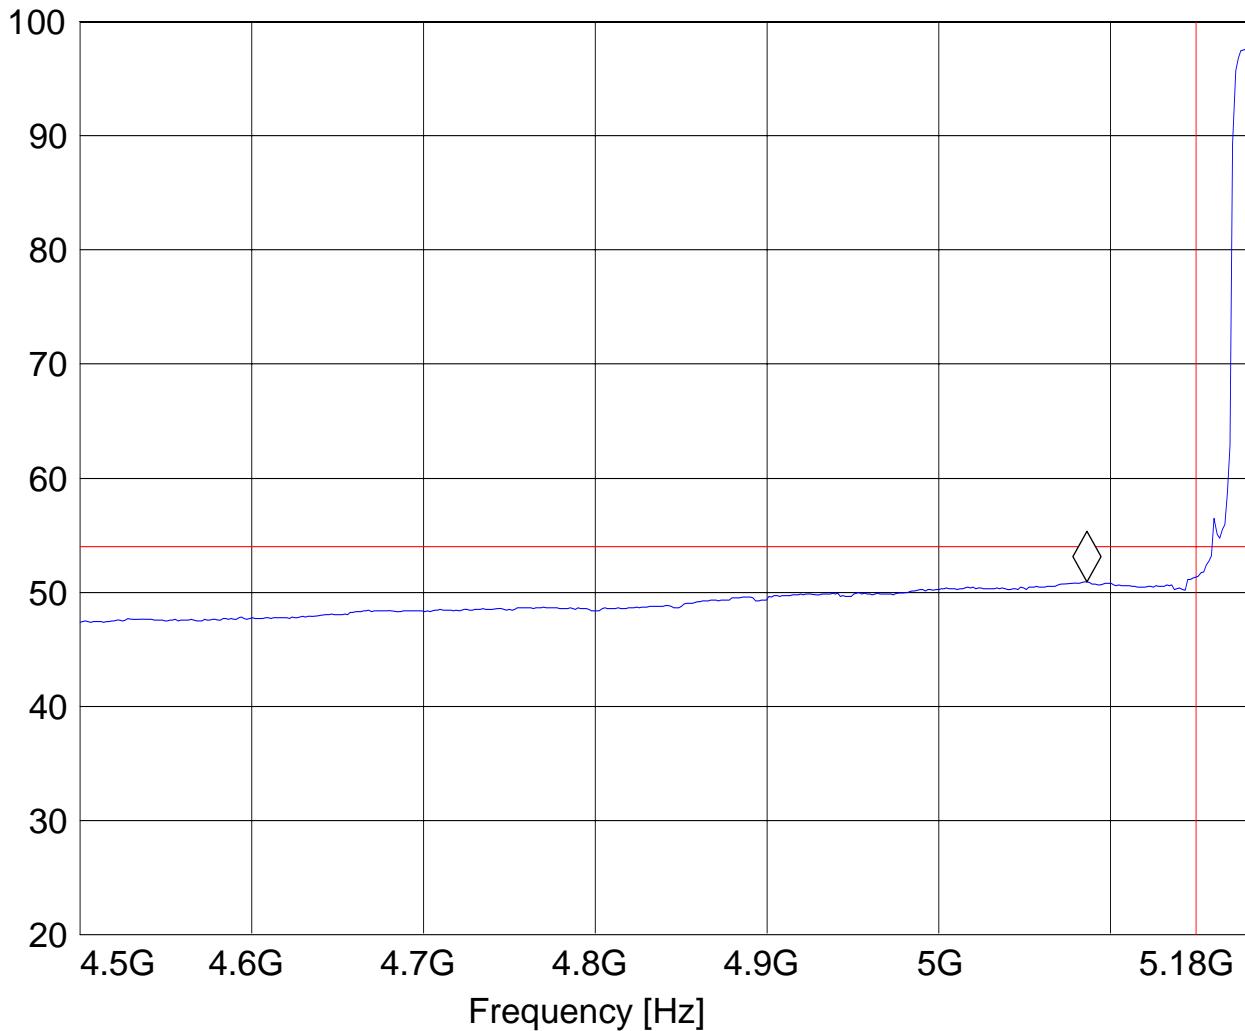
**5.2.3 802.11 (a) MODE (5180MHz) Aux AVG**

EUT: Dell Siberia, BRCM1019  
 Customer: Broadcom  
 Test Mode: 801.11a 5.1G  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Peter Mu  
 Power Supply: AC Adaptor  
 Comments:

***SWEET TABLE: "FCC15.407 A\_LBE\_AVG"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
4.5 GHz	5.3 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_vert

Marker: 5.086372745 GHz 50.91 dB $\mu$ V/m

Level [dB $\mu$ V/m]

**5.2.4 802.11 (a) MODE (5320MHz) Aux PEAK**

EUT: Dell Siberia, BRCM1019

Customer: Broadcom

Test Mode: 801.11a 5.1G

ANT Orientation: V

EUT Orientation: H

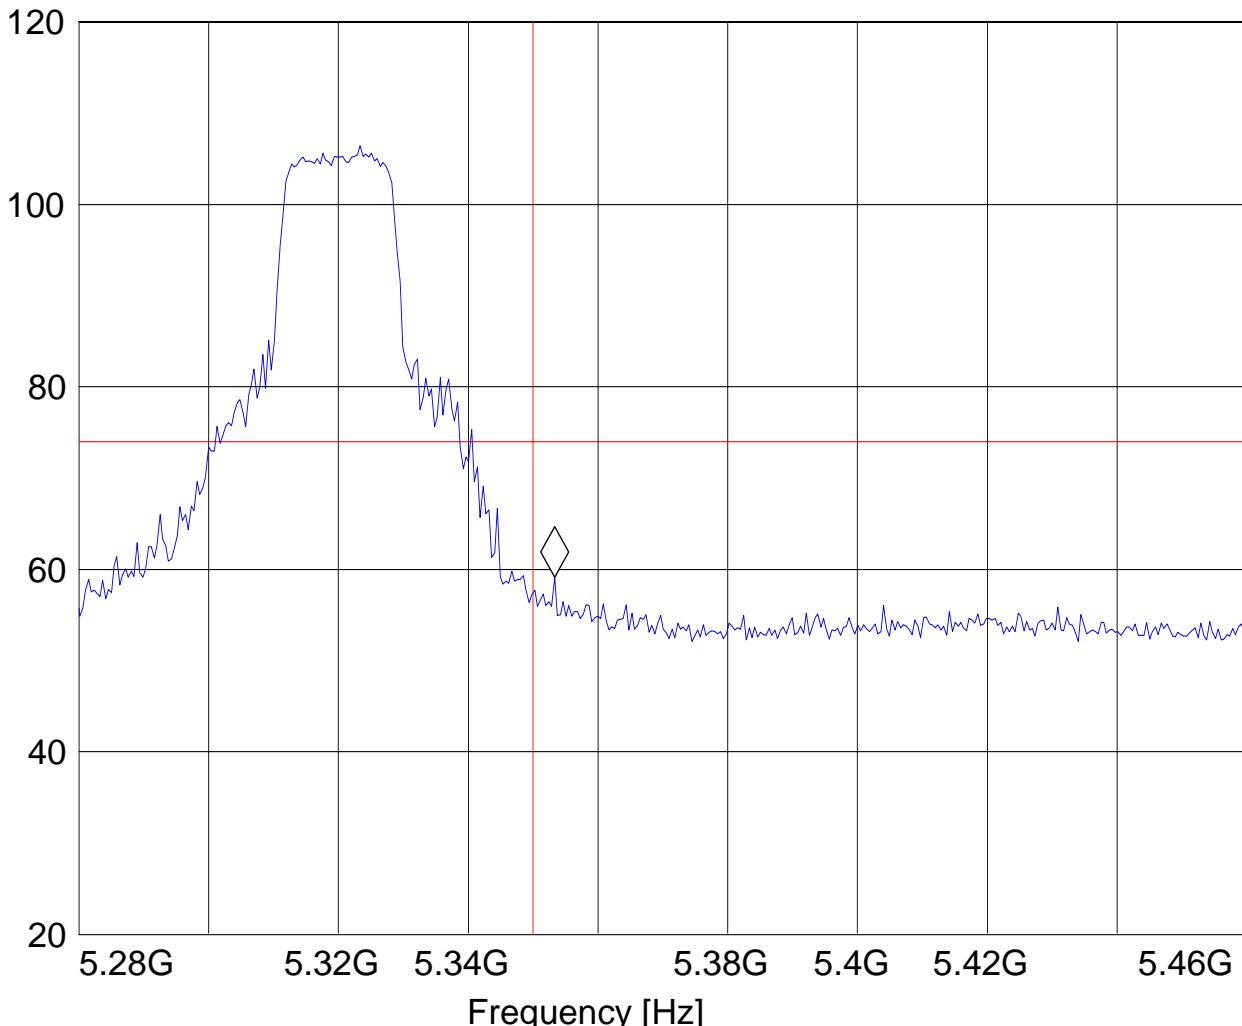
Test Engineer: Peter Mu

Power Supply: AC Adaptor

Comments:

***SWEET TABLE: "FCC15.407 A\_HBE\_PK"***

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
5.2 GHz	5.5 GHz	MaxPeak	Time Coupled	1 MHz	#326horn_AF_horz

Marker: 5.353306613 GHz 59.17 dB $\mu$ V/mLevel [dB $\mu$ V/m]

Date of 2007-7-23  
Report :

Page 15 of 31

**5.2.5 802.11 (a) MODE (5320MHz) Aux AVG**

EUT: Dell Siberia, BRCM1019

Customer: Broadcom

Test Mode: 801.11a 5.1G

ANT Orientation: V

EUT Orientation: H

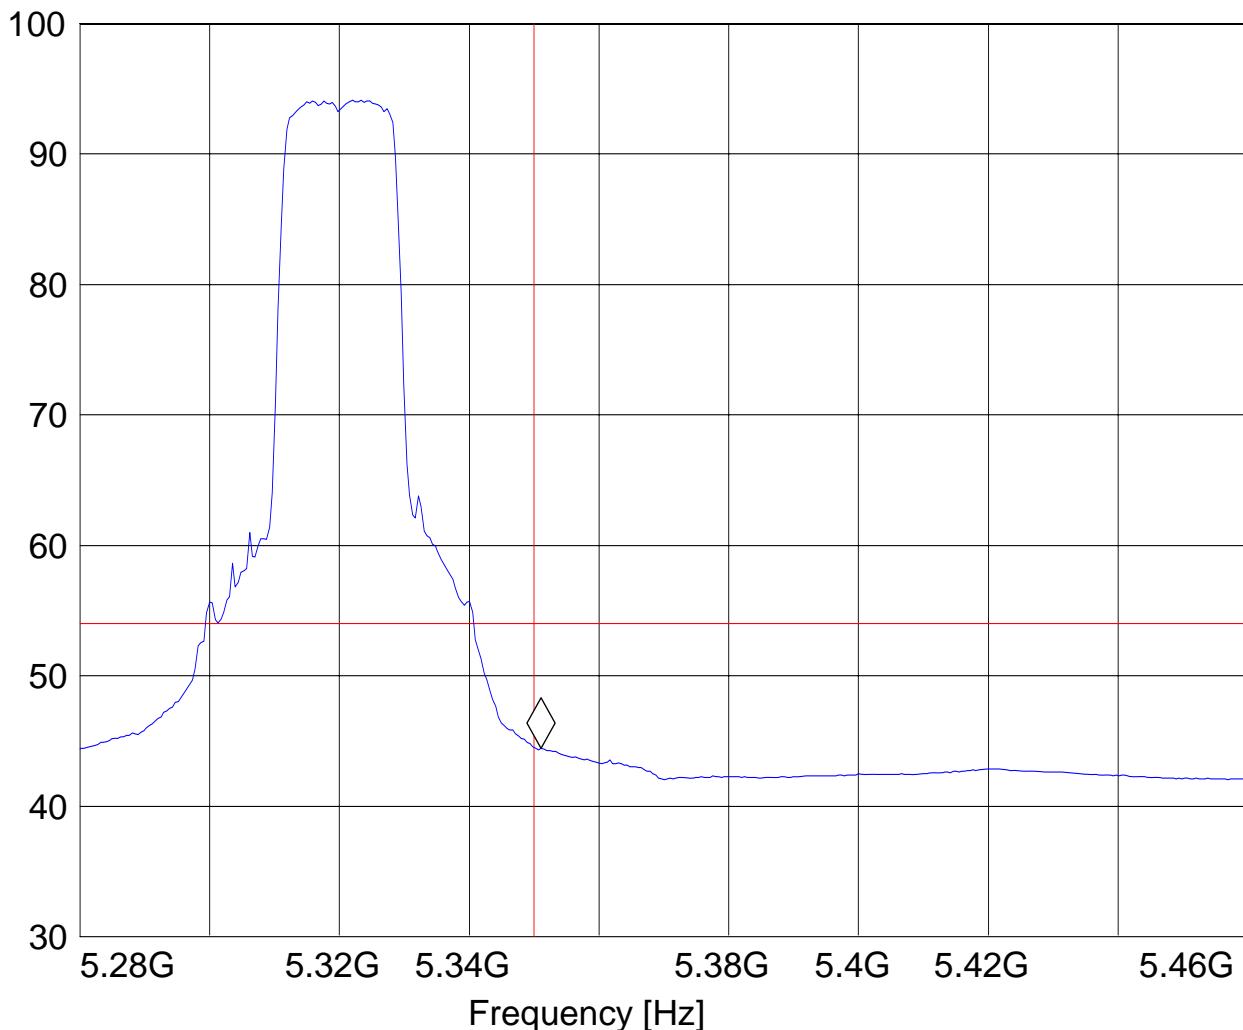
Test Engineer: Peter Mu

Power Supply: AC Adaptor

Comments:

***SWEET TABLE: "FCC15.407 A\_HBE\_AVG"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
5.2 GHz	5.5 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 5.351102204 GHz 44.42 dB $\mu$ V/mLevel [dB $\mu$ V/m]

**5.3 TRANSMITTER SPURIOUS EMISSIONS RADIATED § 15.407(b)/15.205/15.209****5.3.1 LIMITS**

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

\*PEAK LIMIT= 74dB $\mu$ V/m for spurious in restricted bands

\*AVG. LIMIT= 54dB $\mu$ V/m for spurious in restricted bands

\*PEAK LIMIT= 68.2dB $\mu$ V/m for spurious NOT in restricted bands

**NOTE:**

1. The radiated emissions were done with different settings, using the relevant pre-amplifiers for the relevant frequency ranges. This is the reason that the graphs show different noise levels. In the range between 3 and 25 GHz very short cable connections to the antenna was used to minimize the noise level.

2. All measurements are done in peak mode using an average limit , unless specified with the plots.

**Results for the radiated measurements below 30MHz according § 15.33**

Frequency	Measured values	Remarks
9KHz – 30MHz	No emissions found, caused by the EUT	This is valid for all the tested channels

**5.3.2 RESULTS 802.11 (a) MODE Aux****30MHz – 1GHz Antenna: Horizontal**

**Note:** This plot is valid for low, mid, high channels horizontal and vertical polarities (worst-case plot).

EUT: Dell Siberia, BRCM1019

Customer: Broadcom

Test Mode: 801.11a 5.1G

ANT Orientation: H

EUT Orientation: H

Test Engineer: Peter Mu

Power Supply: AC Adaptor

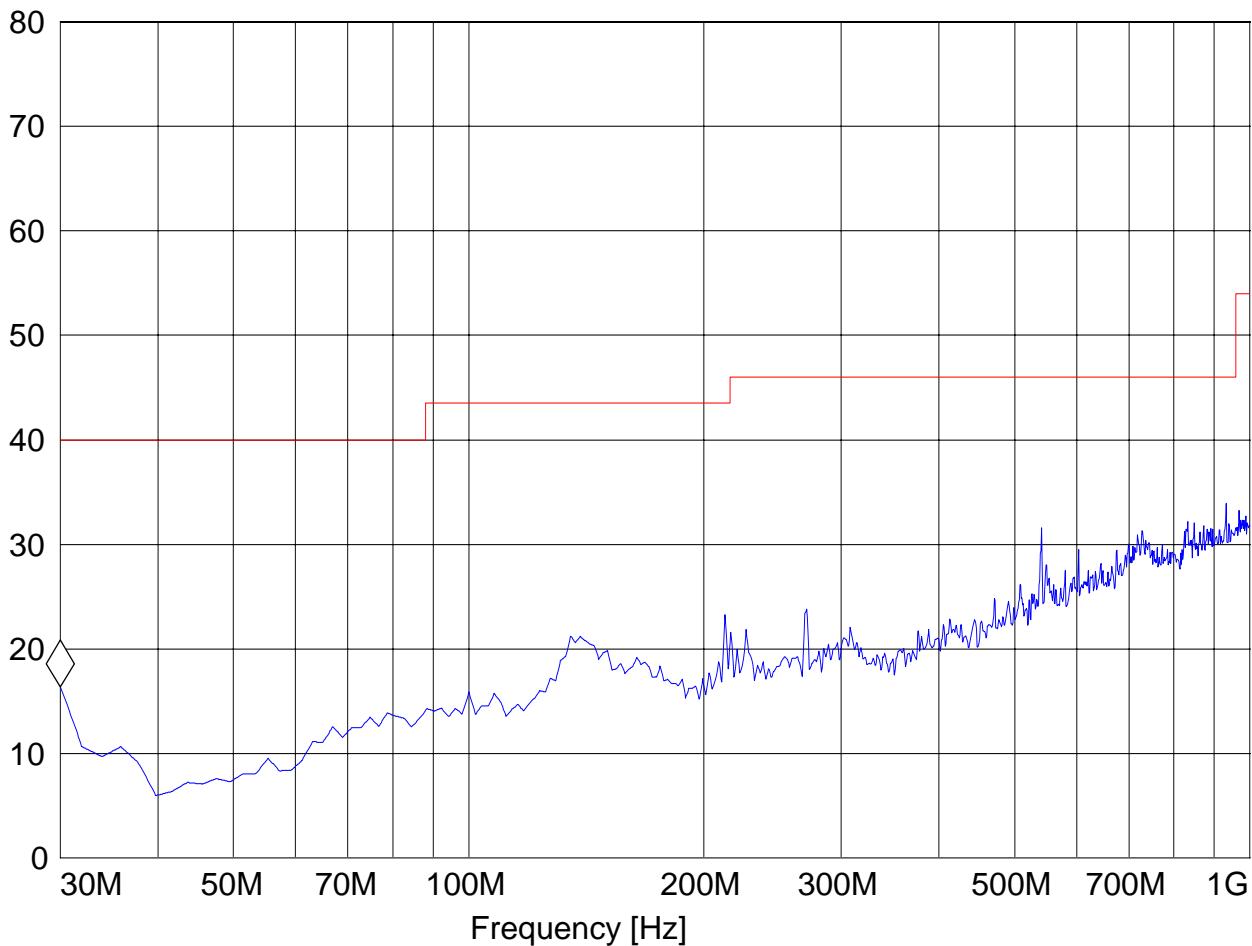
Comments:

***SWEEP TABLE: "FCC15.247\_30M-1G\_Hor"***

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Horz

Marker: 30 MHz 16.36 dB $\mu$ V/m

Level [dB $\mu$ V/m]



Date of 2007-7-23  
Report :

Page 18 of 31

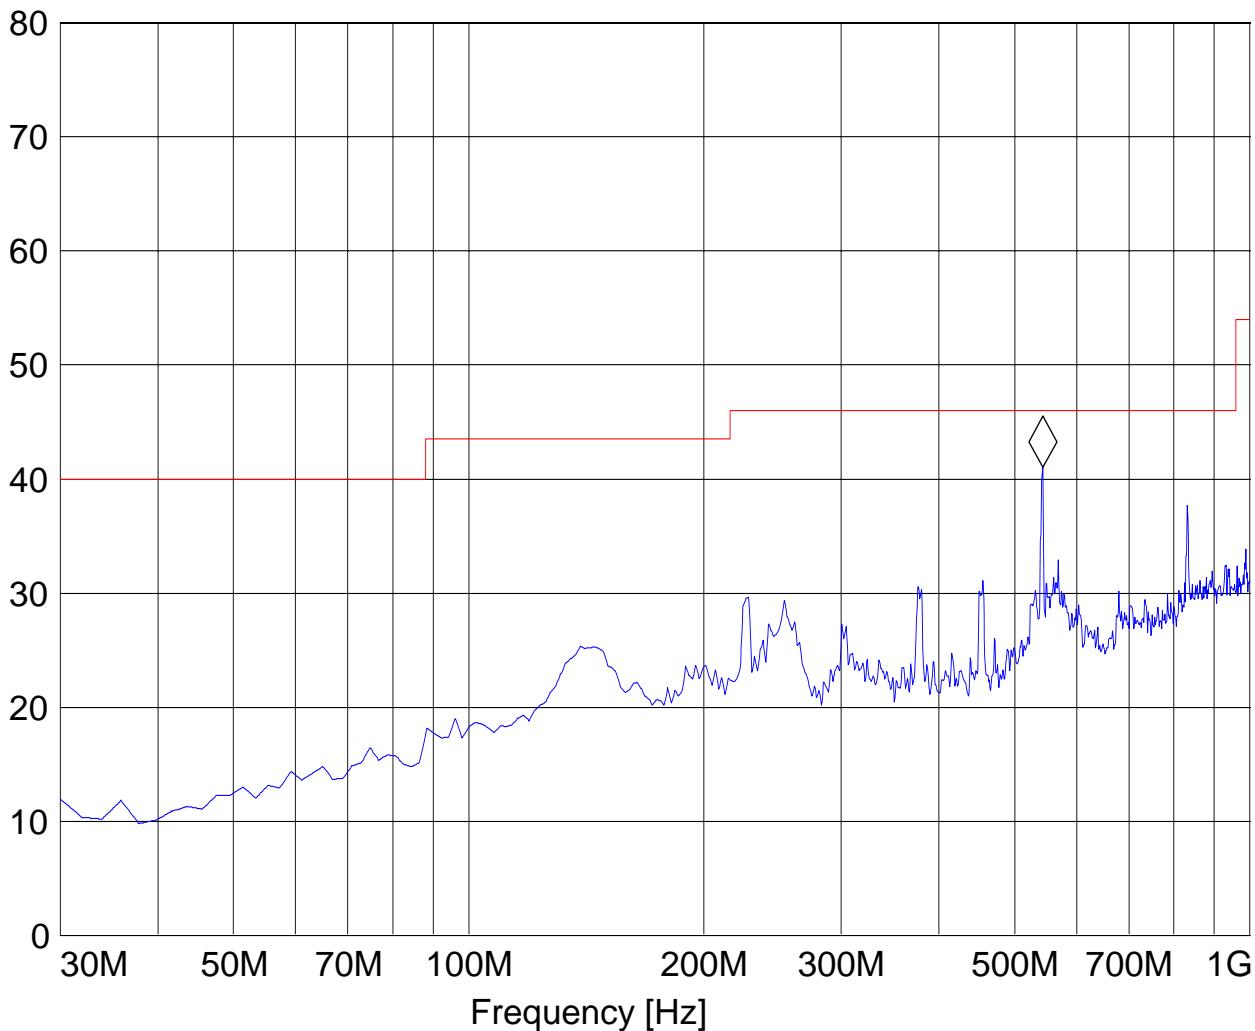
## 30MHz – 1GHz Antenna: Vertical

Note: This plot is valid for low, mid, high channels horizontal and vertical polarities (worst-case plot).

EUT: Dell Siberia, BRCM1019  
 Customer: Broadcom  
 Test Mode: 801.11a 5.1G  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Peter Mu  
 Power Supply: AC Adaptor  
 Comments:

**SWEEP TABLE: "FCC15.247\_30M-1G\_Ver"**

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	MaxPeak	Coupled	100 kHz	3141-#1186_Vert

Marker: 543.186373 MHz 41.03 dB $\mu$ V/mLevel [dB $\mu$ V/m]

Date of 2007-7-23  
Report :

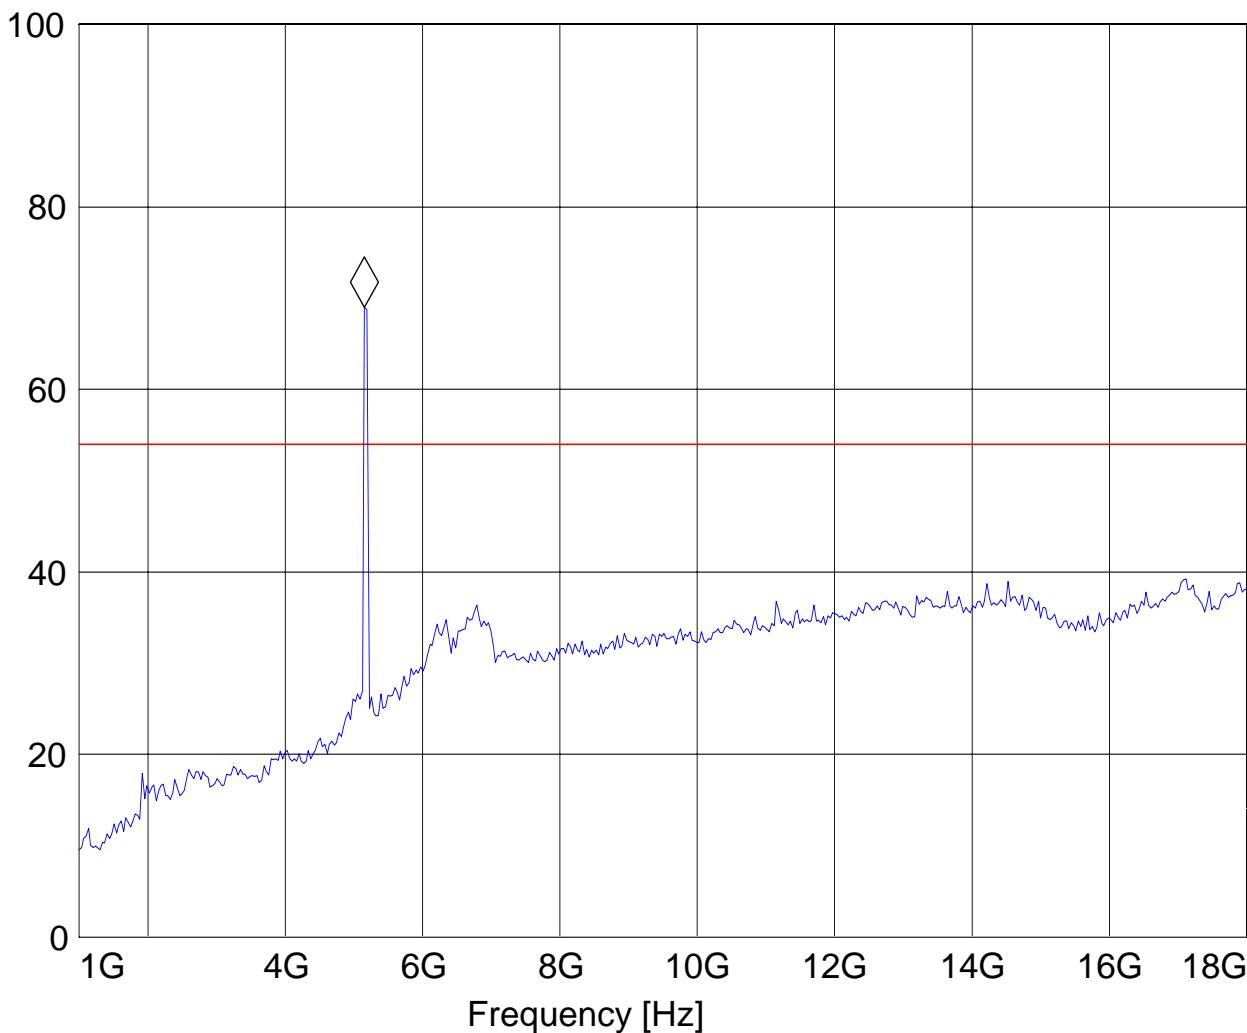
Page 19 of 31

**1-18GHz (5180MHz) Aux**

Manufacturer: Broadcom  
 Test mode: 801.11a 5.1G  
 ANT Orientation: : V  
 EUT Orientation:: H  
 Test Engineer: Peter Mu  
 Voltage: AC Adaptor  
 Comments::

***SWEET TABLE: "FCC 15.407 1-18G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 5.156312625 GHz 68.97 dB $\mu$ V/mLevel [dB $\mu$ V/m]

Date of 2007-7-23  
Report :

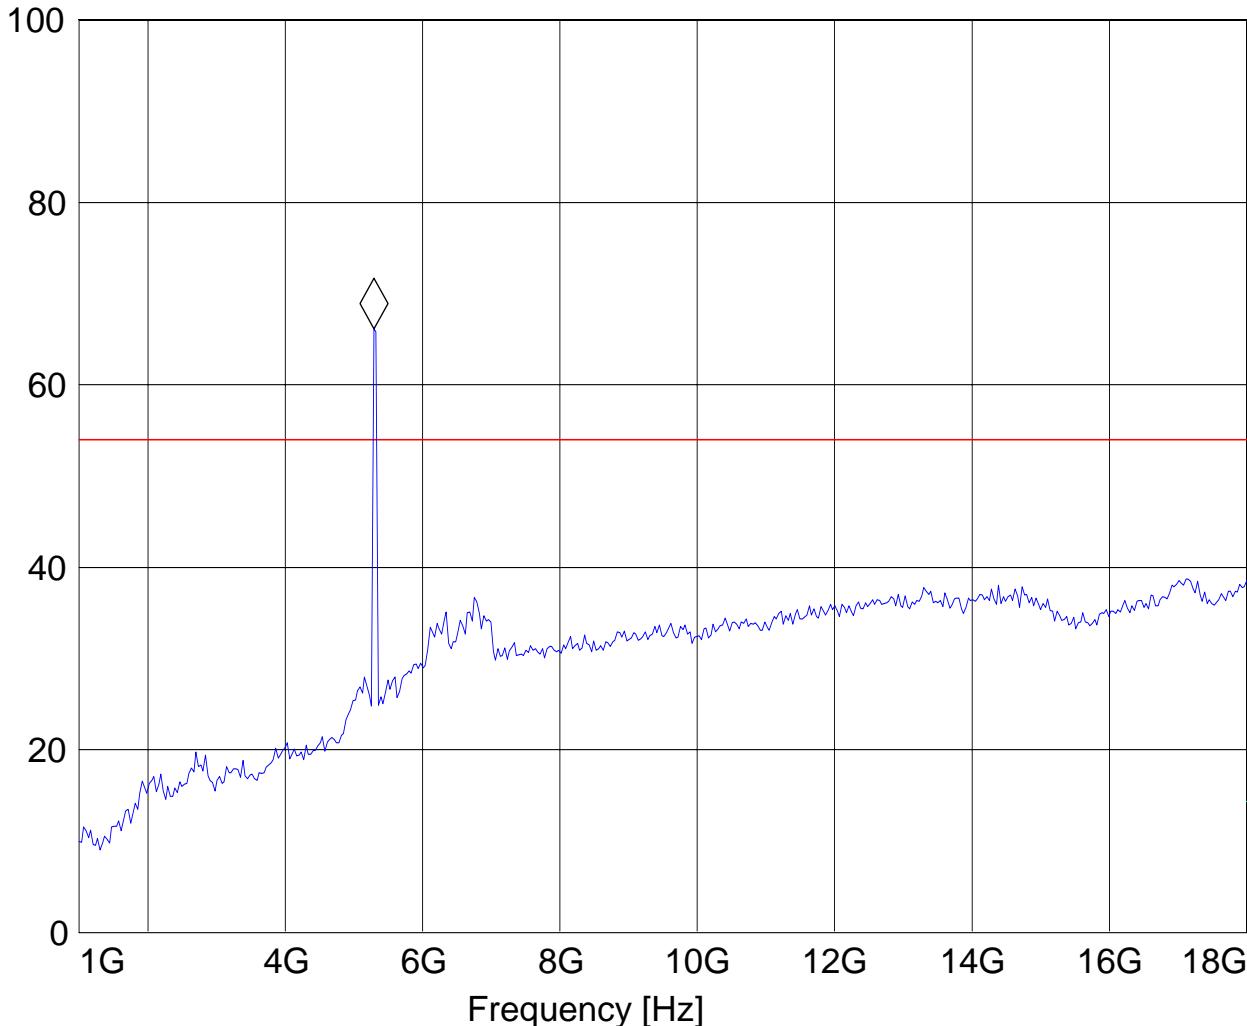
Page 20 of 31

**1-18GHz (5260MHz) Aux**

EUT / Description: Dell Siberia, BRCM1019  
 Manufacturer: Broadcom  
 Test mode: 801.11a 5.1G  
 ANT Orientation: : V  
 EUT Orientation:: H  
 Test Engineer: Peter Mu  
 Voltage: AC Adaptor  
 Comments::

***SWEET TABLE: "FCC 15.407 1-18G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 5.29258517 GHz 66.11 dB $\mu$ V/mLevel [dB $\mu$ V/m]

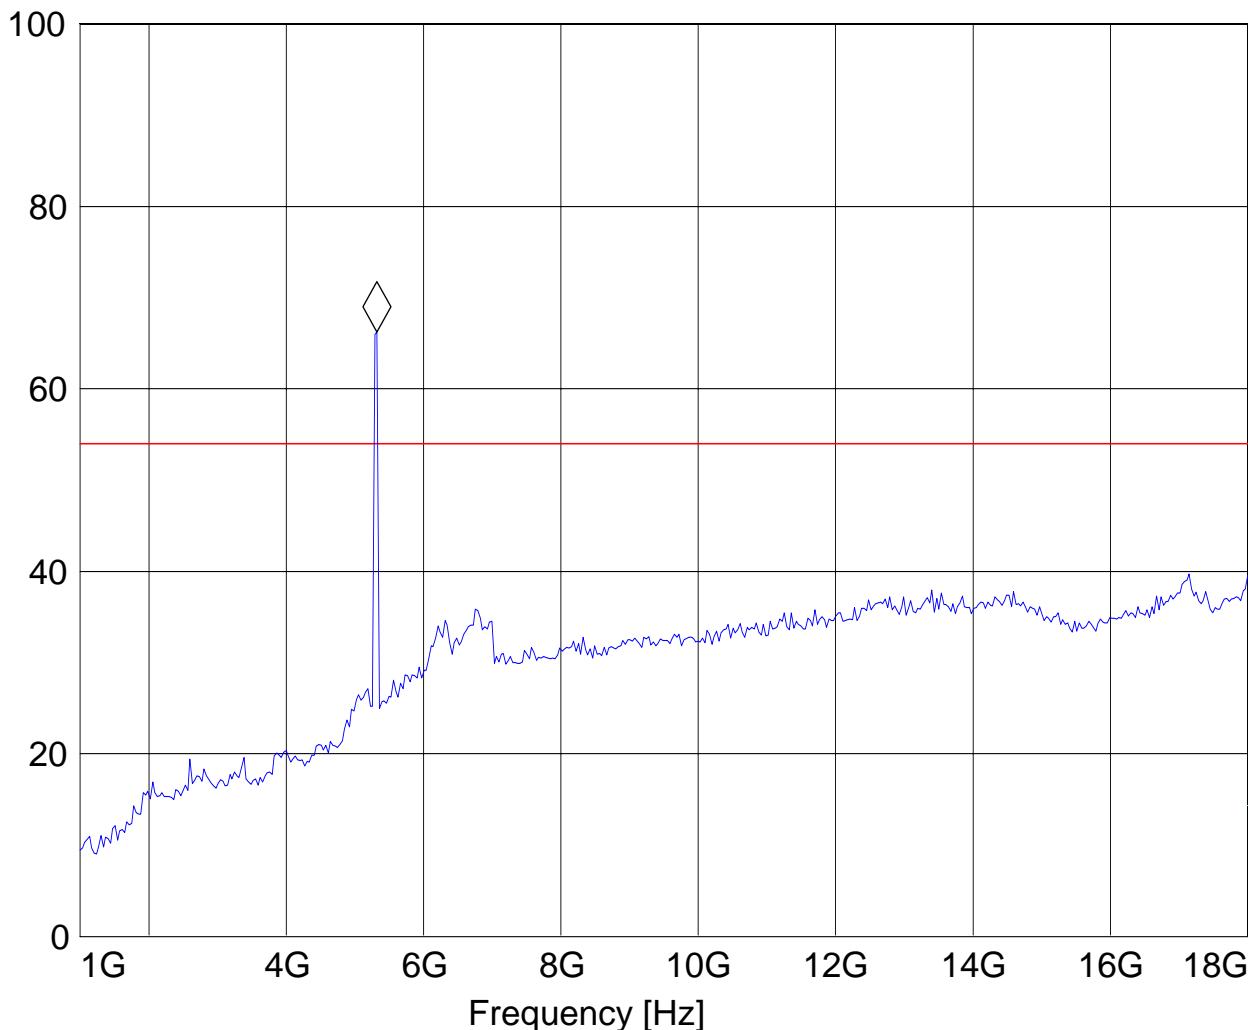
**1-18GHz (5320MHz) Aux**

EUT / Description: Dell Siberia, BRCM1019  
 Manufacturer: Broadcom  
 Test mode: 801.11a 5.1G  
 ANT Orientation: : V  
 EUT Orientation:: H  
 Test Engineer: Peter Mu  
 Voltage: AC Adaptor  
 Comments::

***SWEET TABLE: "FCC 15.407 1-18G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
1.0 GHz	18.0 GHz	MaxPeak	Coupled	1 MHz	#326horn_AF_horz

Marker: 5.326653307 GHz 66.2 dB $\mu$ V/m

Level [dB $\mu$ V/m]

Date of 2007-7-23  
Report :

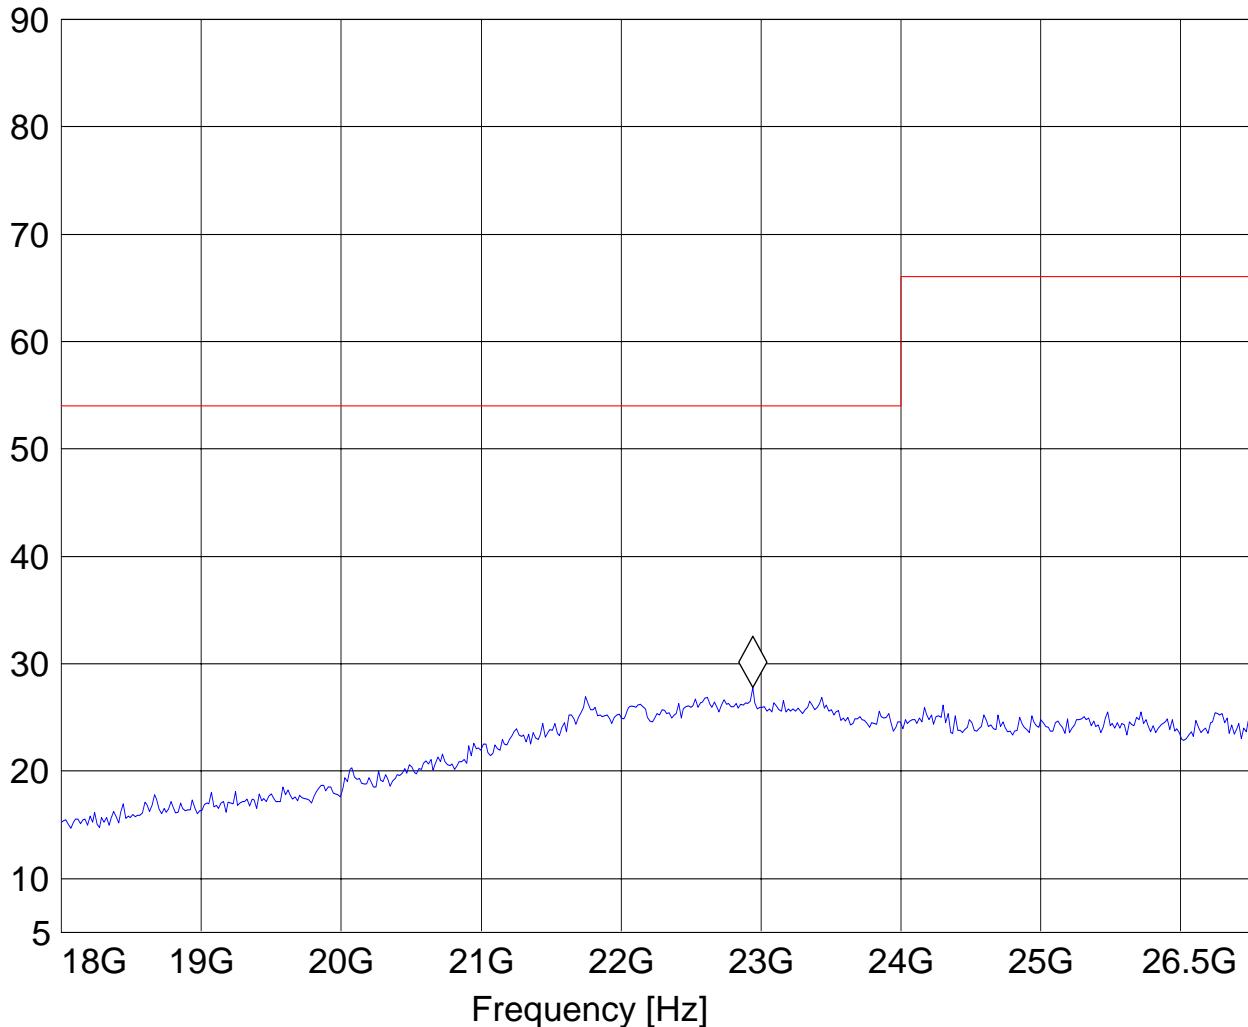
Page 22 of 31

**18-26.5GHz (5180MHz) Aux****Note: Peak Reading vs. Average limit**

EUT: Dell Siberia, BRCM1019  
 Customer: Broadcom  
 Test Mode: 801.11a 5.1G  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Peter Mu  
 Power Supply: AC Adaptor  
 Comments:

***SWEET TABLE: "FCC 15.407 18-26.5G"***

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
18.0 GHz	26.5 GHz	MaxPeak	10.0 s	1 MHz	#572 horn AF

Marker: 22.93987976 GHz 27.83 dB $\mu$ V/mLevel [dB $\mu$ V/m]

Date of 2007-7-23  
Report :

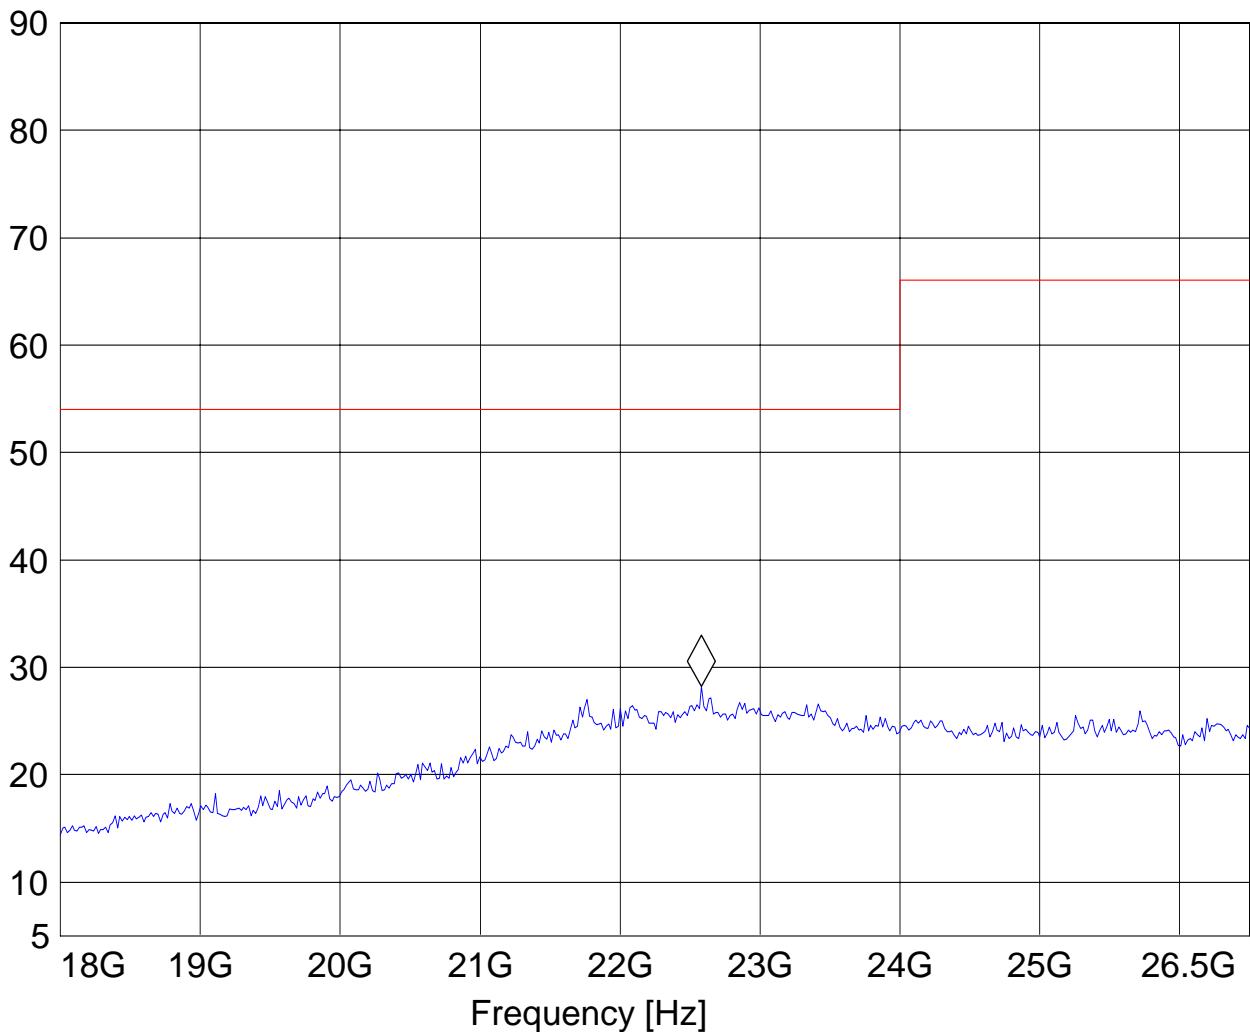
Page 23 of 31

**18-26.5GHz (5260MHz) Aux****Note: Peak Reading vs. Average limit**

EUT: Dell Siberia, BRCM1019  
 Customer: Broadcom  
 Test Mode: 801.11a 5.1G  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Peter Mu  
 Power Supply: AC Adaptor  
 Comments:

**SWEEP TABLE: "FCC 15.407 18-26.5G"**

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
18.0 GHz	26.5 GHz	MaxPeak	10.0 s	1 MHz	#572 horn AF

Marker: 22.582164329 GHz 28.23 dB $\mu$ V/mLevel [dB $\mu$ V/m]

Date of 2007-7-23  
Report :

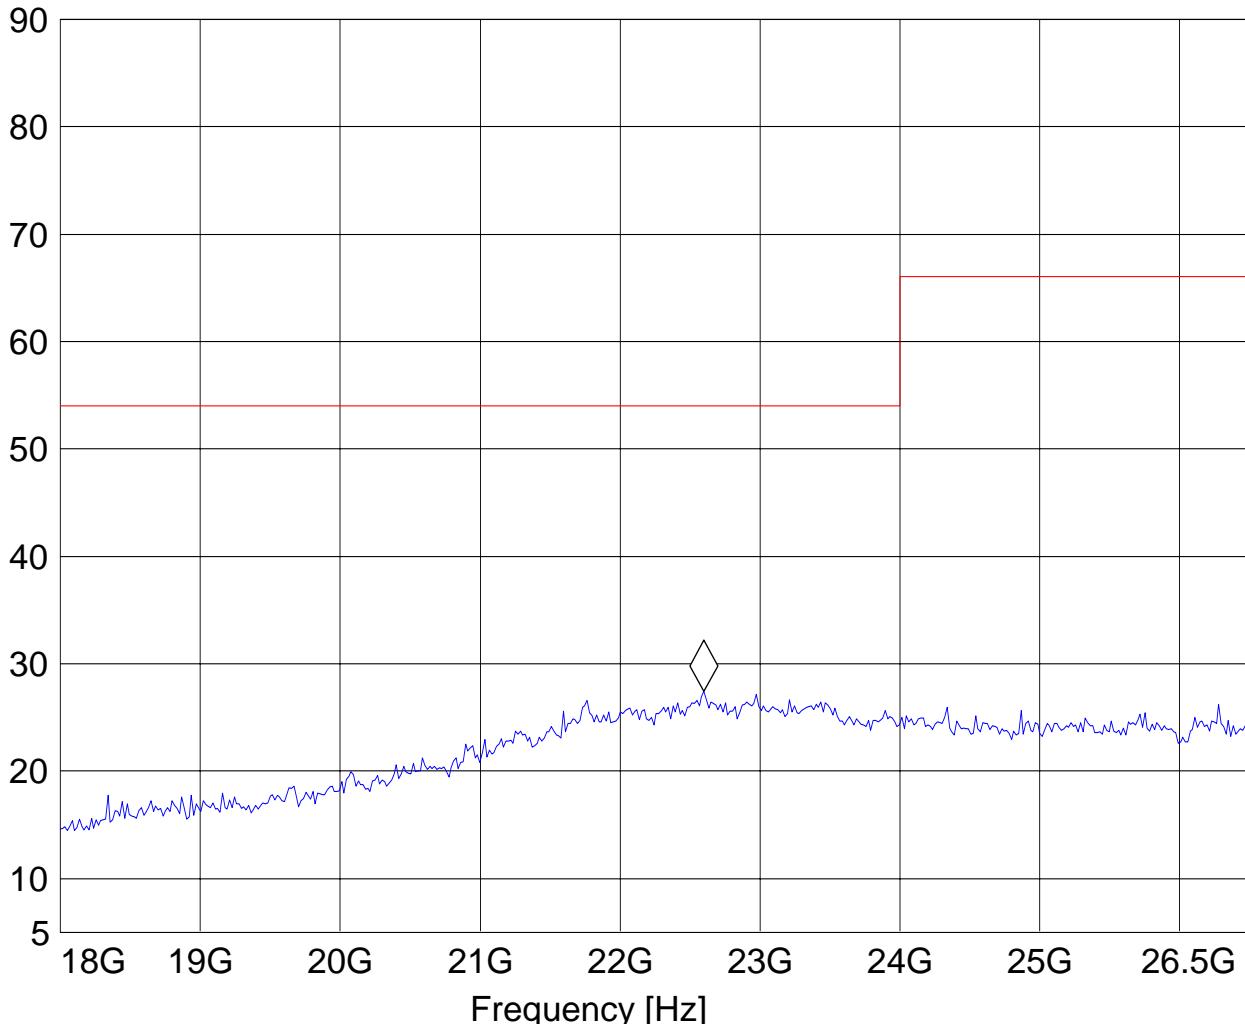
Page 24 of 31

**18-26.5GHz (5320MHz) Aux****Note: Peak Reading vs. Average limit**

EUT: Dell Siberia, BRCM1019  
 Customer: Broadcom  
 Test Mode: 801.11a 5.1G  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Peter Mu  
 Power Supply: AC Adaptor  
 Comments:

**SWEEP TABLE: "FCC 15.407 18-26.5G"**

Start Frequency	Stop Frequency	Detector	Meas.	IF	Transducer
18.0 GHz	26.5 GHz	MaxPeak	10.0 s	1 MHz	#572 horn AF

Marker: 22.599198397 GHz 27.41 dB $\mu$ V/mLevel [dB $\mu$ V/m]

**26-40GHz Aux**

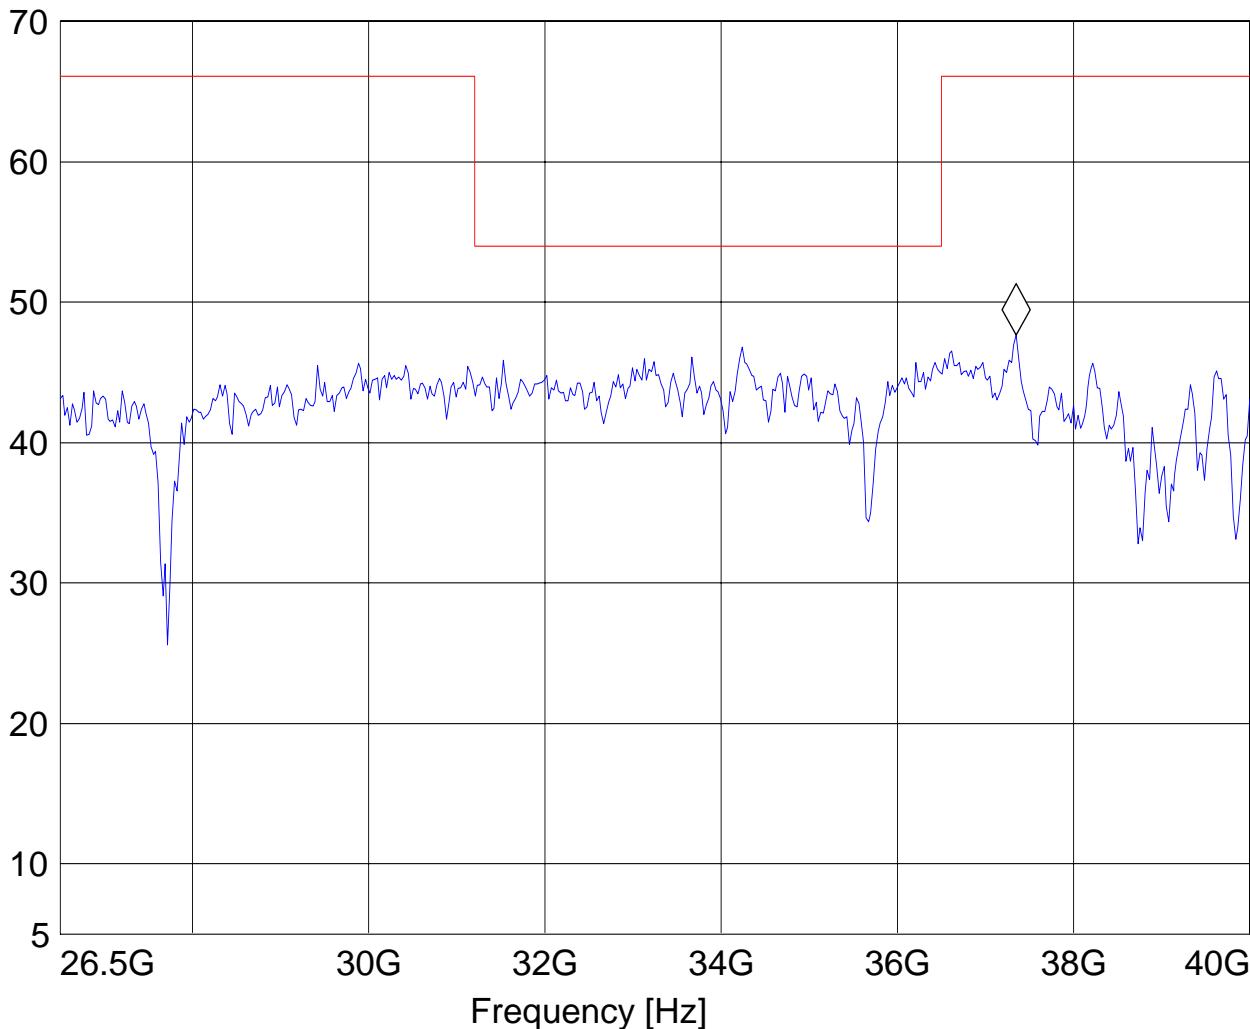
Note:This plot is valid for low, mid, high channels (worst-case plot) Note:Peak Reading vs. Average limit

EUT: Dell Siberia, BRCM1019  
 Customer: Broadcom  
 Test Mode: 801.11a 5.1G  
 ANT Orientation: V  
 EUT Orientation: H  
 Test Engineer: Peter Mu  
 Power Supply: AC Adaptor  
 Comments:

**SWEEP TABLE: "FCC 15.407 26.5-40G"**

Start Frequency	Stop Frequency	Detector	Meas.	IF Time	Transducer
26.5 GHz	40.0 GHz	MaxPeak	Coupled	1 MHz	3160 Horn 26.5-40G

Marker: 37.348697395 GHz 47.65 dB $\mu$ V/m

Level [dB $\mu$ V/m]

**5.4 AC POWER LINE CONDUCTED EMISSIONS § 15.107/207****5.4.1 LIMITS****Technical specification: 15.107 / 15.207 (Revised as of August 20, 2002)**

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

**Limit**

Frequency of Emission (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-Peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

\* Decreases with logarithm of the frequency

ANALYZER SETTINGS: RBW = 10KHz

VBW = 10KHz

### 5.4.2 RESULTS

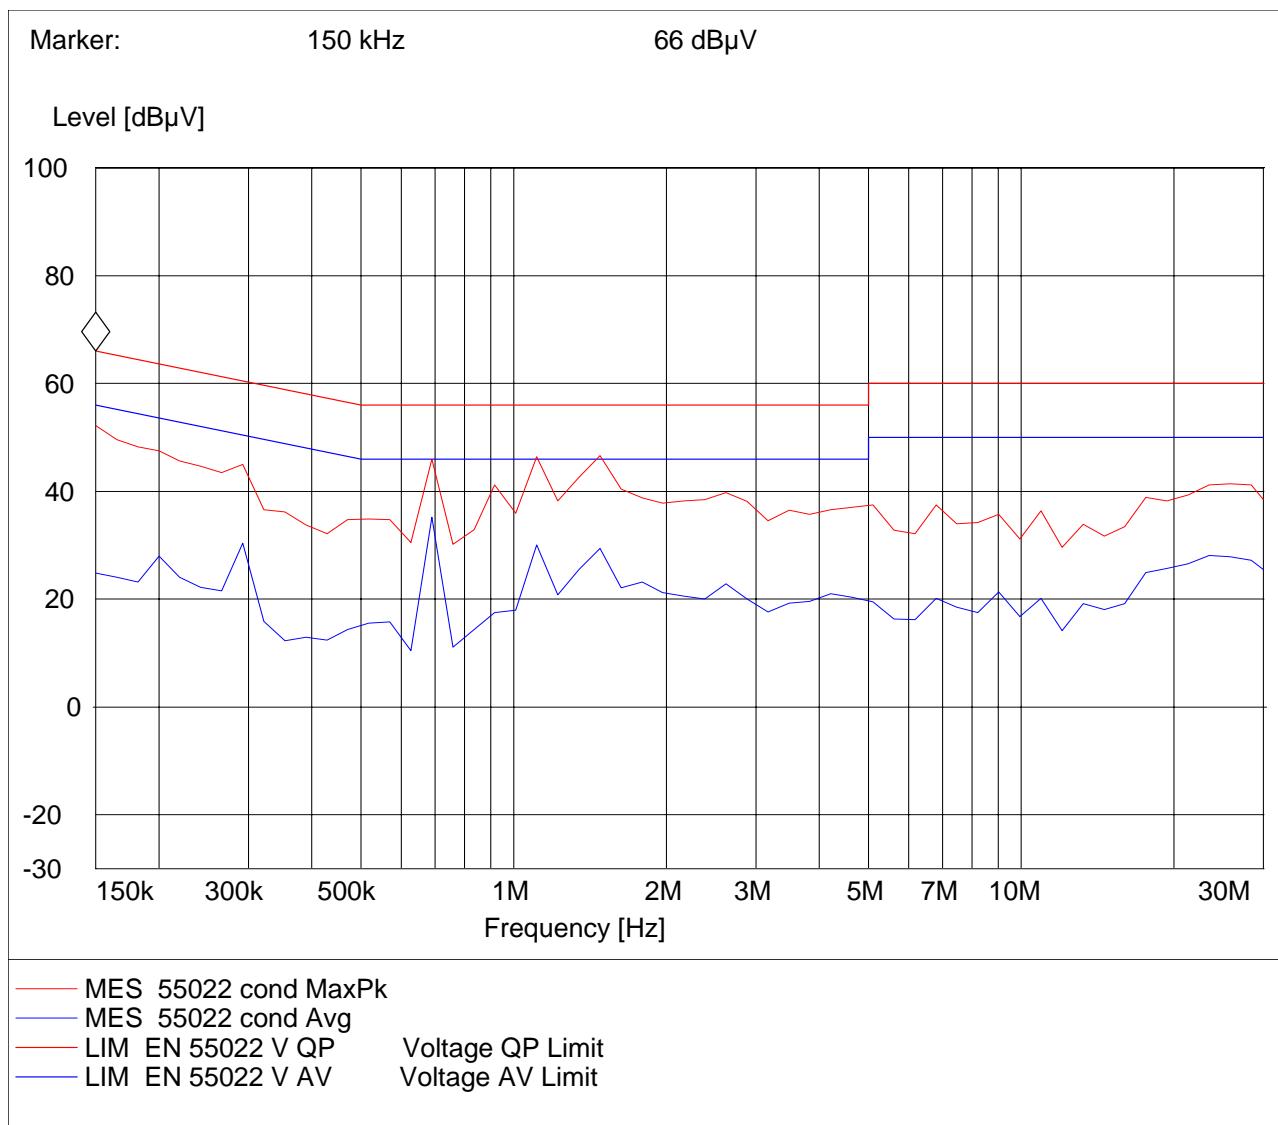
**Line:**

EUT: Dell Siberia, BRCM1019  
 Manufacturer: Broadcom  
 Operating Condition: 801.11a 5.1G  
 ANT Orientation:: CONDUCTED  
 EUT Orientation:: H  
 Test Engineer:: Peter Mu  
 Power Supply: AC Adaptor  
 Comments: LINE

***SWEEP TABLE: "55022 cond"***

Short Description: EN 55022 for 150KHz-30MHz  
 Unit: dB $\mu$ V

Detector: Mode:



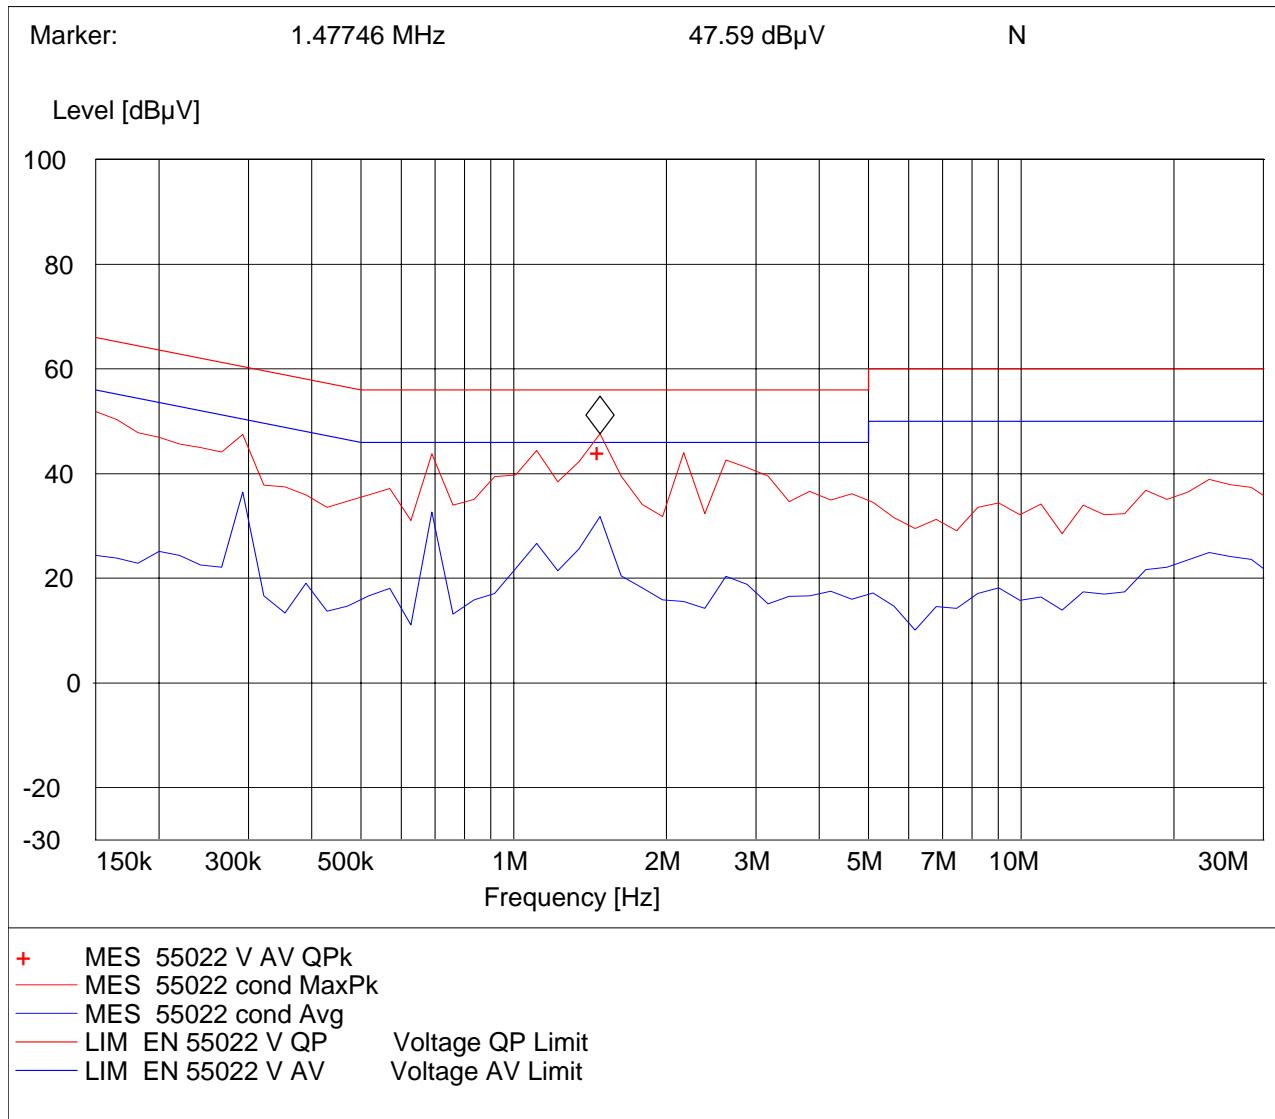
**Neutral:**

EUT: Dell Siberia, BRCM1019  
 Manufacturer: Broadcom  
 Operating Condition: 801.11a 5.1G  
 ANT Orientation:: CONDUCTED  
 EUT Orientation:: H  
 Test Engineer:: Peter Mu  
 Power Supply: AC Adaptor  
 Comments: N

***SWEET TABLE: "55022 cond"***

Short Description: EN 55022 for 150KHz-30MHz  
 Unit: dB $\mu$ V

Detector: Mode:



**6 TEST EQUIPMENT AND ANCILLARIES USED FOR TESTS**

No	Instrument/Ancillary	Type	Manufacturer	Serial No.	Cal Due	Interval
01	Spectrum Analyzer	ESIB 40	Rohde & Schwarz	100107	May 2008	1 year
02	Spectrum Analyzer	FSEM 30	Rohde & Schwarz	100017	August 2008	1 year
03	Signal Generator	SMY02	Rohde & Schwarz	836878/011	May 2008	1 year
04	Power-Meter	NRVD	Rohde & Schwarz	0857.8008.02	May 2008	1 year
05	Biconilog Antenna	3141	EMCO	0005-1186	June 2008	1 year
06	Horn Antenna (1-18GHz)	SAS-200/571	AH Systems	325	June 2008	1 year
07	Horn Antenna (18-26.5GHz)	3160-09	EMCO	1240	June 2008	1 year
08	Power Splitter	11667B	Hewlett Packard	645348	n/a	n/a
09	Climatic Chamber	VT4004	Voltsch	G1115	May 2008	1 year
10	High Pass Filter	5HC2700	Trilithic Inc.	9926013	n/a	n/a
11	High Pass Filter	4HC1600	Trilithic Inc.	9922307	n/a	n/a
12	Pre-Amplifier	JS4-00102600	Miteq	00616	May 2008	1 year
13	Power Sensor	URV5-Z2	Rohde & Schwarz	DE30807	May 2008	1 year
14	Digital Radio Comm. Tester	CMD-55	Rohde & Schwarz	847958/008	May 2008	1 year
15	Universal Radio Comm. Tester	CMU 200	Rohde & Schwarz	832221/06	May 2008	1 year
16	LISN	ESH3-Z5	Rohde & Schwarz	836679/003	May 2008	1 year
17	Loop Antenna	6512	EMCO	00049838	July 2008	2 years

## 7 BLOCK DIAGRAMS

### Radiated Testing

