

FCC TEST REPORT

REPORT NO.: RF960510H03

MODEL NO.: BCM94311MCG

RECEIVED: May 11, 2007

TESTED: May 28 to July 13, 2007

ISSUED: July 16, 2007

APPLICANT: Broadcom Corp.

ADDRESS: 190 Mathilda Place Sunnyvale, CA 94086,
USA

ISSUED BY: Advance Data Technology Corporation

TEST LOCATION: No. 81-1, Lu Liao Keng, 9 Ling, Wu Lung
Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien,
Taiwan, R.O.C.

This test report consists of 55 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF, A2LA or any government agencies. The test results in the report only apply to the tested sample.



No. 2177-01

Table of Contents

1.	CERTIFICATION.....	4
2.	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY.....	6
3.	GENERAL INFORMATION	7
3.1	GENERAL DESCRIPTION OF EUT.....	7
3.2	DESCRIPTION OF TEST MODES.....	9
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:.....	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.4	DESCRIPTION OF SUPPORT UNITS.....	13
3.5	CONFIGURATION OF SYSTEM UNDER TEST	14
4.	TEST TYPES AND RESULTS.....	15
4.1	RADIATED EMISSION MEASUREMENT	15
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	15
4.1.2	TEST INSTRUMENTS.....	16
4.1.3	TEST PROCEDURES.....	17
4.1.4	DEVIATION FROM TEST STANDARD	17
4.1.5	TEST SETUP.....	18
4.1.6	EUT OPERATING CONDITIONS.....	18
4.1.7	TEST RESULTS	19
4.2	MAXIMUM PEAK OUTPUT POWER	43
4.2.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT.....	43
4.2.2	INSTRUMENTS.....	43
4.2.3	TEST PROCEDURES.....	43
4.2.4	DEVIATION FROM TEST STANDARD	43
4.2.5	TEST SETUP.....	44
4.2.6	EUT OPERATING CONDITIONS.....	44
4.2.7	TEST RESULTS	45
4.3	BAND EDGES MEASUREMENT	47
4.3.1	LIMITS OF BAND EDGES MEASUREMENT.....	47
4.3.2	TEST INSTRUMENTS.....	47
4.3.3	TEST PROCEDURE.....	47

4.3.4	EUT OPERATING CONDITION	47
4.3.5	TEST RESULTS	48
4.4	ANTENNA REQUIREMENT	53
4.4.1	STANDARD APPLICABLE	53
4.4.2	ANTENNA CONNECTED CONSTRUCTION	53
5.	INFORMATION ON THE TESTING LABORATORIES	54
6.	APPENDIX-A MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	55

1. CERTIFICATION

PRODUCT: Broadcom 802.11g Wireless LAN PCI-E Mini Card
BRAND NAME: Broadcom
MODEL NO.: BCM94311MCG
TEST SAMPLE: R&D SAMPLE
TESTED: May 28 to July 13, 2007
APPLICANT: Broadcom Corp.
STANDARDS: 47 CFR Part 15, Subpart C (Section 15.247)
ANSI C63.4-2003

The above equipment (Model: BCM94311MCG) has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Carol Liao , **DATE:** July 16, 2007
(Carol Liao, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** July 16, 2007
Responsible for RF (Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** July 16, 2007
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -0.20dB at 2390.0MHz
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

NOTE:

1. This report is prepared for FCC class II permissive change. Only radiated emission, Maximum Peak Output Power and Band Edge Measurement were presented in this test report.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Radiated emissions (30MHz-1GHz)	3.89 dB
Radiated emissions (1GHz -18GHz)	2.21 dB

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	Broadcom 802.11g Wireless LAN PCI-E Mini Card
MODEL NO.	BCM94311MCG
FCC ID	QDS-BRCM1020
POWER SUPPLY	DC 3.3 V from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps
FREQUENCY RANGE	2412 ~ 2462MHz
NUMBER OF CHANNEL	11
CHANNEL SPACING	5MHz
OUTPUT POWER	For 802.11b: 131.220mW For 802.11g: 390.841mW
DATA CABLE	NA
ANTENNA TYPE	Please see note 1
ASSOCIATED DEVICES	NA

NOTE:

1. This report is prepared for FCC class II permissive change. The difference compared with the original design is as the following:

u PA has been changed.

u Add two antennas as below.

No.	Antenna Type	Gain (dBi)	Connector
1	PIFA	3(Main)	UFL
2	PIFA	3(Aux)	UFL

2. The EUT operates in the 2.4GHz frequency spectrum with throughput of up to 54Mbps.
3. The EUT complies with IEEE 802.11g standards, and backwards compatible with IEEE 802.11b products.
4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g: Eleven channels are provided to this EUT.

Channel	Frequency	Channel	Frequency
1	2412 MHz	8	2447 MHz
2	2417 MHz	9	2452 MHz
3	2422 MHz	10	2457 MHz
4	2427 MHz	11	2462 MHz
5	2432 MHz		
6	2437 MHz		
7	2442 MHz		

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE ³ 1G	APCM	
-	x	√	√	√	NA

Where PLC: Power Line Conducted Emission

RE<1G RE: Radiated Emission below 1GHz

RE≥1G: Radiated Emission above 1GHz

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Below 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1	DSSS	CCK	1

Radiated Emission Test (Above 1 GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 10, 11	DSSS	CCK	1
802.11g	1 to 11	1, 2, 6, 10, 11	OFDM	BPSK	6

Channel 2 and 10 are required by manufacture.

Bandedge Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 10, 11	DSSS	CCK	1
802.11g	1 to 11	1, 2, 10, 11	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 10, 11	DSSS	CCK	11
802.11g	1 to 11	1, 2, 6, 10, 11	OFDM	BPSK	6

Channel 2 and 10 are required by manufacture.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Broadcom 802.11g Wireless LAN PCI-E Mini Card. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C. (15.247)

ANSI C63.4 : 2003

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Product	Brand	Model No.	Serial No.	FCC ID
1	PERSONAL COMPUTER	DELL	DCSM	194QL1S	FCC DoC
2	MONITOR	ADI	G1000	240058T00100081	FCC DoC
3	PRINTER	HP	C2642A	MY79J1D00G	B94C2642X
4	MODEM	ACEEX	1414	0206026779	IFAXDM1414
5	KEYBOARD	DELL	SK-8110	MY-05N456-71619-39U-1124	FCC DoC
6	MOUSE	DELL	M056UOA	FOROOSTO	FCC DoC

No.	Signal cable description
1	NA
2	1.4 m braid shielded wire, terminated with VGA connector via metallic frame, w/o core
3	1.8 m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
4	1.0 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.
5	2.0 m foil shielded wire, terminal by frame, PS2 Connector, w/o Core.
6	2.0 m foil shielded wire, terminated with PS2 connector via drain wire, w/o core.

Note: 1. The power cords of the above support units were unshielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

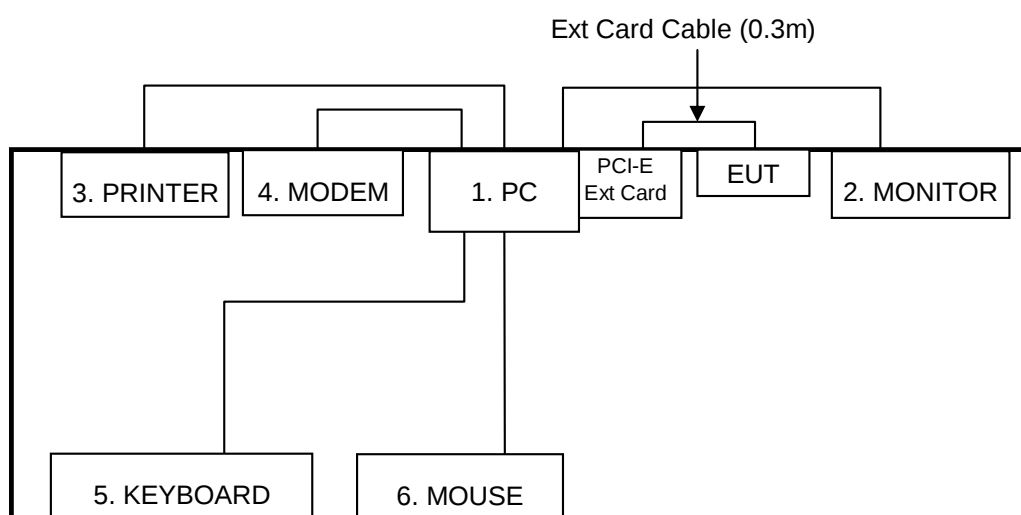

4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ADVANTEST Spectrum Analyzer	R3271A	85060311	July 03, 2008
HP Pre_Amplifier	8449B	3008A01922	Sep. 18, 2007
ROHDE & SCHWARZ Test Receiver	ESCS30	100375	Sep. 20, 2007
CHASE Broadband Antenna	VULB9168	138	Dec. 10, 2007
Schwarzbeck Horn_Antenna	BBHA9120	D124	Jan. 01, 2008
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 04, 2008
SCHWARZBECK Biconical Antenna	VHBA9123	459	Jun. 08, 2009
SCHWARZBECK Periodic Antenna	UPA6108	1148	Jun. 08, 2009
RF Switches (ARNITSU)	CS-201	1565157	NA
RF CABLE (Chaintek)	SF102	22054-2	Nov. 14, 2007
RF Cable(RICHTEC)	9913-30M N-N Cable	STCCAB-30M-1 GHz	July 15, 2007
Software	ADT_Radiated_V 7.6.15.7	NA	NA
CHANCE MOST Antenna Tower	AT-100	0203	NA
CHANCE MOST Turn Table	TT-100	0203	NA

- Note: 1. The calibration interval of the above test instruments is 12 months (36 months for Biconical and Periodic Antenna) and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, HP preamplifier (model: 8449B) and Spectrum Analyzer (model: R3271A) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in ADT Open Site No. C.
4. The FCC Site Registration No. is 656396.
5. The VCCI Site Registration No. is R-1626.
6. The CANADA Site Registration No. is IC 4824A-3.

4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using the quasi-peak method or average method as specified and then reported in Data sheet peak mode and QP mode.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

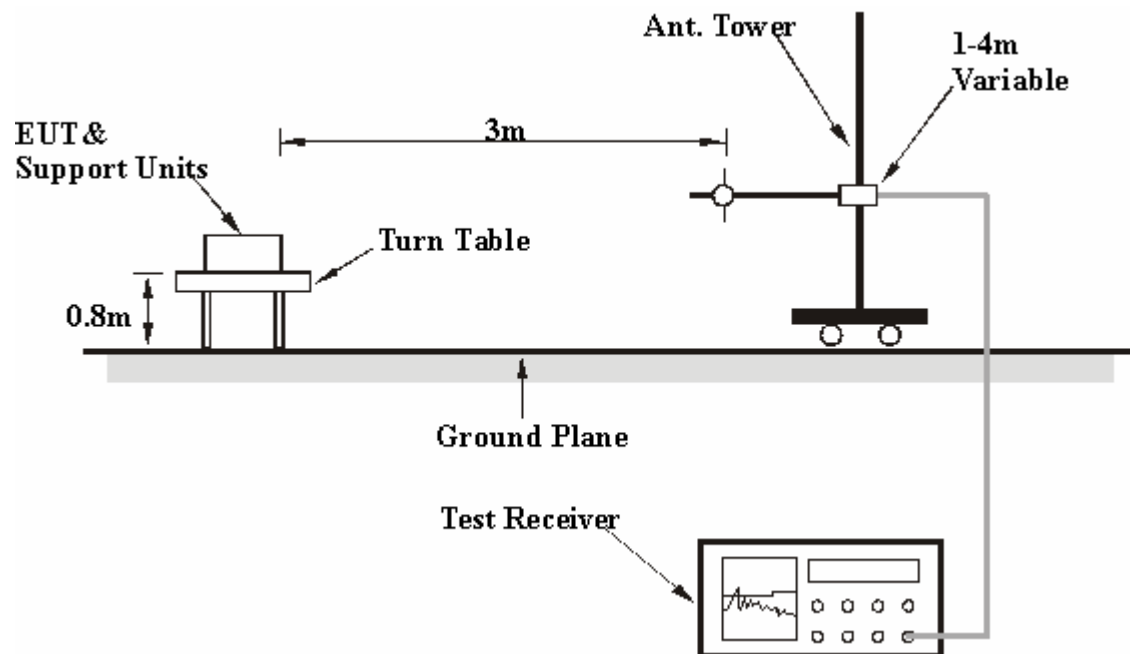

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Turn on the power of all equipment.
- b. PC runs “MFGTEST” test program to enable the EUT under transmission condition continuously.

4.1.7 TEST RESULTS

Below 1GHz Worst-Case Data

MODULATION TYPE	CCK	FREQUENCY RANGE	Below 1000MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	TRANSFER RATE	1Mbps
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	DETECTOR FUNCTION	Quasi-Peak
TESTED BY	Phoenix Huang		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	175.10	28.50 QP	43.50	-15.00	1.00 H	288	15.24	13.26
2	366.41	36.86 QP	46.00	-9.14	1.00 H	56	18.94	17.92
3	480.00	37.44 QP	46.00	-8.56	1.20 H	51	16.19	21.25
4	500.00	39.42 QP	46.00	-6.58	1.43 H	138	17.66	21.76
5	639.23	32.83 QP	46.00	-13.17	1.08 H	143	7.92	24.91
6	696.00	29.11 QP	46.00	-16.89	1.09 H	37	3.37	25.74
7	800.00	32.85 QP	46.00	-13.15	1.00 H	190	5.29	27.56
8	998.96	35.12 QP	54.00	-18.88	1.00 H	356	5.19	29.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.59	37.39 QP	40.00	-2.61	1.00 V	297	25.20	12.19
2	70.85	32.18 QP	40.00	-7.82	1.00 V	108	19.82	12.36
3	78.23	32.70 QP	40.00	-7.30	1.00 V	126	22.13	10.57
4	365.60	31.43 QP	46.00	-14.57	1.00 V	313	13.54	17.89
5	499.99	38.07 QP	46.00	-7.93	1.41 V	130	16.31	21.76
6	504.00	37.96 QP	46.00	-8.04	1.00 V	323	16.08	21.88
7	639.23	31.55 QP	46.00	-14.45	1.45 V	71	6.64	24.91
8	800.00	31.38 QP	46.00	-14.62	1.34 V	322	3.82	27.56
9	998.96	37.84 QP	54.00	-16.16	1.33 V	333	7.91	29.93

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11b DSSS modulation

CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.00	58.30 PK	74.00	-15.70	1.26 H	258	27.99	30.31
2	2389.00	47.20 AV	54.00	-6.80	1.26 H	258	16.89	30.31
3	*2412.00	107.30 PK			1.44 H	230	76.89	30.41
4	*2412.00	102.40 AV			1.44 H	230	71.99	30.41
5	4824.00	50.80 PK	74.00	-23.20	1.62 H	240	15.01	35.79
6	4824.00	45.80 AV	54.00	-8.20	1.62 H	240	10.01	35.79
7	7236.00	52.60 PK	74.00	-21.40	1.44 H	24	11.00	41.60
8	7236.00	38.80 AV	54.00	-15.20	1.44 H	24	-2.80	41.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.00	57.70 PK	74.00	-16.30	1.40 V	277	27.39	30.31
2	2389.00	45.30 AV	54.00	-8.70	1.40 V	277	14.99	30.31
3	*2412.00	101.80 PK			1.55 V	169	71.39	30.41
4	*2412.00	96.20 AV			1.55 V	169	65.79	30.41
5	4824.00	50.60 PK	74.00	-23.40	1.22 V	358	14.81	35.79
6	4824.00	46.60 AV	54.00	-7.40	1.22 V	358	10.81	35.79
7	7236.00	53.10 PK	74.00	-20.90	1.74 V	156	11.50	41.60
8	7236.00	40.50 AV	54.00	-13.50	1.74 V	156	-1.10	41.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	107.50 PK			1.42 H	222	76.98	30.52
2	*2437.00	102.50 AV			1.42 H	222	71.98	30.52
3	4874.00	50.80 PK	74.00	-23.20	1.50 H	206	14.88	35.92
4	4874.00	45.60 AV	54.00	-8.40	1.50 H	206	9.68	35.92
5	7311.00	52.50 PK	74.00	-21.50	1.26 H	15	10.69	41.81
6	7311.00	38.60 AV	54.00	-15.40	1.26 H	15	-3.21	41.81

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	102.00 PK			1.12 V	186	71.48	30.52
2	*2437.00	96.60 AV			1.12 V	186	66.08	30.52
3	4874.00	51.20 PK	74.00	-22.80	1.28 V	2	15.28	35.92
4	4874.00	47.00 AV	54.00	-7.00	1.28 V	2	11.08	35.92
5	7311.00	54.40 PK	74.00	-19.60	1.62 V	146	12.59	41.81
6	7311.00	41.60 AV	54.00	-12.40	1.62 V	146	-0.21	41.81

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

CHANNEL	Channel 10	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	106.70 PK			1.45 H	238	76.09	30.61
2	*2457.00	101.60 AV			1.45 H	238	70.99	30.61
3	2493.89	63.50 PK	74.00	-10.50	1.25 H	260	32.74	30.76
4	2493.89	49.01 AV	54.00	-4.99	1.25 H	260	18.25	30.76
5	4914.00	50.60 PK	74.00	-23.40	1.52 H	205	14.57	36.03
6	4914.00	45.80 AV	54.00	-8.20	1.52 H	205	9.77	36.03
7	7416.00	52.80 PK	74.00	-21.20	1.38 H	64	10.71	42.09
8	7416.00	38.80 AV	54.00	-15.20	1.38 H	64	-3.29	42.09

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	102.30 PK			1.03 V	200	71.69	30.61
2	*2457.00	97.00 AV			1.03 V	200	66.39	30.61
3	2494.02	60.53 PK	74.00	-13.47	1.15 V	228	29.77	30.76
4	2494.02	47.10 AV	54.00	-6.90	1.15 V	228	16.34	30.76
5	4914.00	50.40 PK	74.00	-23.60	1.18 V	16	14.37	36.03
6	4914.00	46.40 AV	54.00	-7.60	1.18 V	16	10.37	36.03
7	7461.00	53.80 PK	74.00	-20.20	1.55 V	202	11.59	42.21
8	7461.00	40.80 AV	54.00	-13.20	1.55 V	202	-1.41	42.21

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	CCK	TRANSFER RATE	1Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M



No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.60 PK			1.44 H	238	75.97	30.63
2	*2462.00	101.30 AV			1.44 H	238	70.67	30.63
3	2494.09	63.34 PK	74.00	-10.66	1.42 H	258	32.58	30.76
4	2494.09	48.90 AV	54.00	-5.10	1.42 H	258	18.14	30.76
5	4924.00	50.80 PK	74.00	-23.20	1.36 H	185	14.74	36.06
6	4924.00	45.50 AV	54.00	-8.50	1.36 H	185	9.44	36.06
7	7386.00	53.20 PK	74.00	-20.80	1.48 H	25	11.19	42.01
8	7386.00	39.40 AV	54.00	-14.60	1.48 H	25	-2.61	42.01

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M



No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.20 PK			1.24 V	274	71.57	30.63
2	*2462.00	97.10 AV			1.24 V	274	66.47	30.63
3	2493.80	63.47 PK	74.00	-10.53	1.20 V	248	32.71	30.76
4	2493.80	48.68 AV	54.00	-5.32	1.20 V	248	17.92	30.76
5	4924.00	51.20 PK	74.00	-22.80	1.36 V	16	15.14	36.06
6	4924.00	46.80 AV	54.00	-7.20	1.36 V	16	10.74	36.06
7	7386.00	54.20 PK	74.00	-19.80	1.58 V	182	12.19	42.01
8	7386.00	41.20 AV	54.00	-12.80	1.58 V	182	-0.81	42.01

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency



RESTRICTED BANDEDGE (802.11b MODE,CH1, HORIZONTAL)

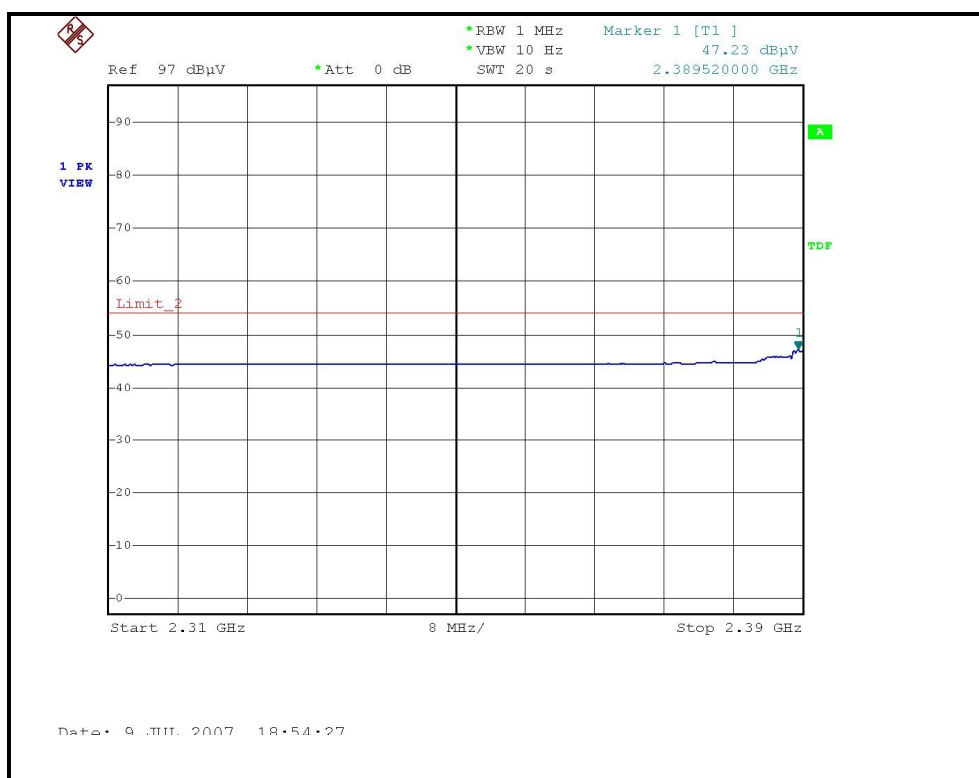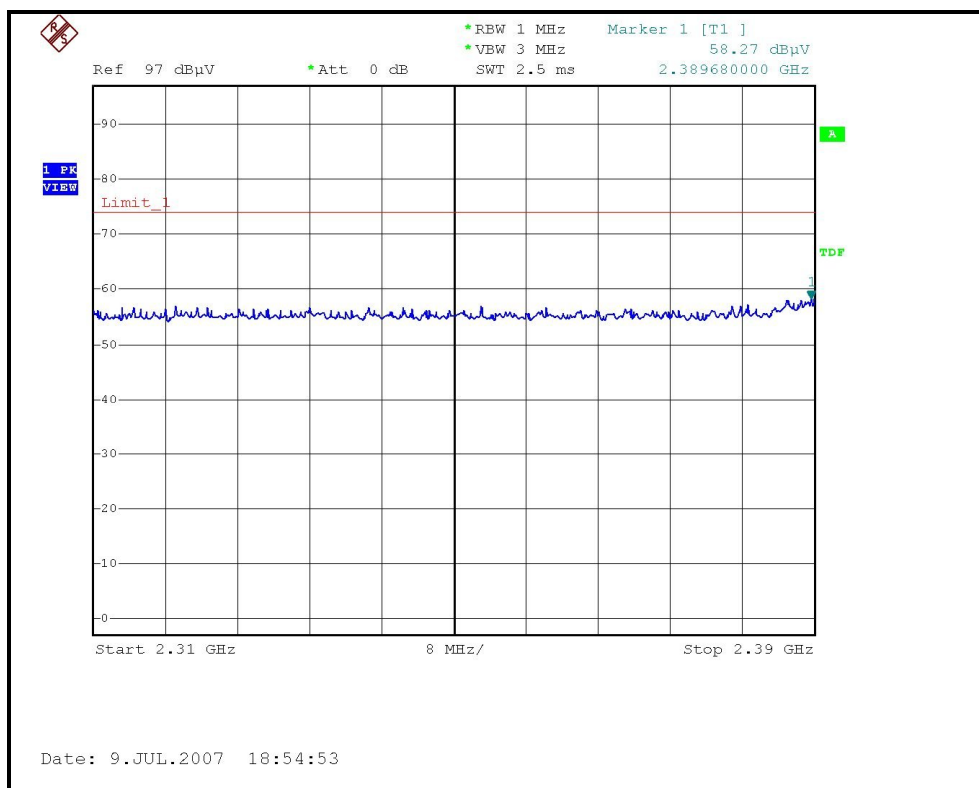



RESTRICTED BANDEDGE (802.11b MODE,CH1, VERTICAL)

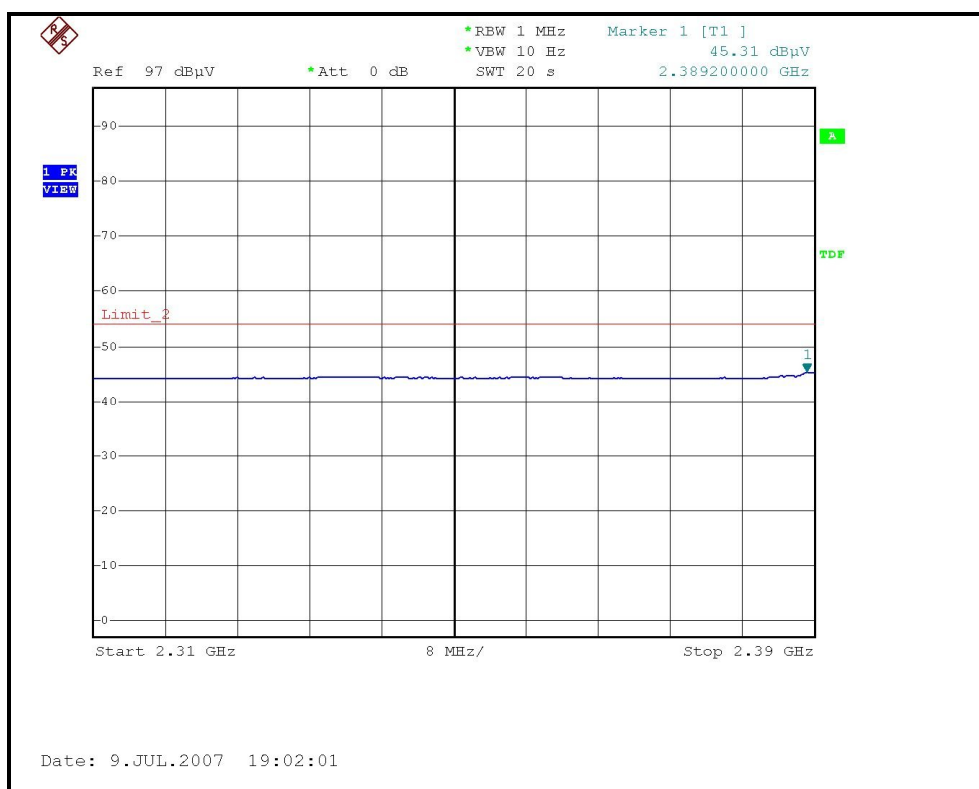
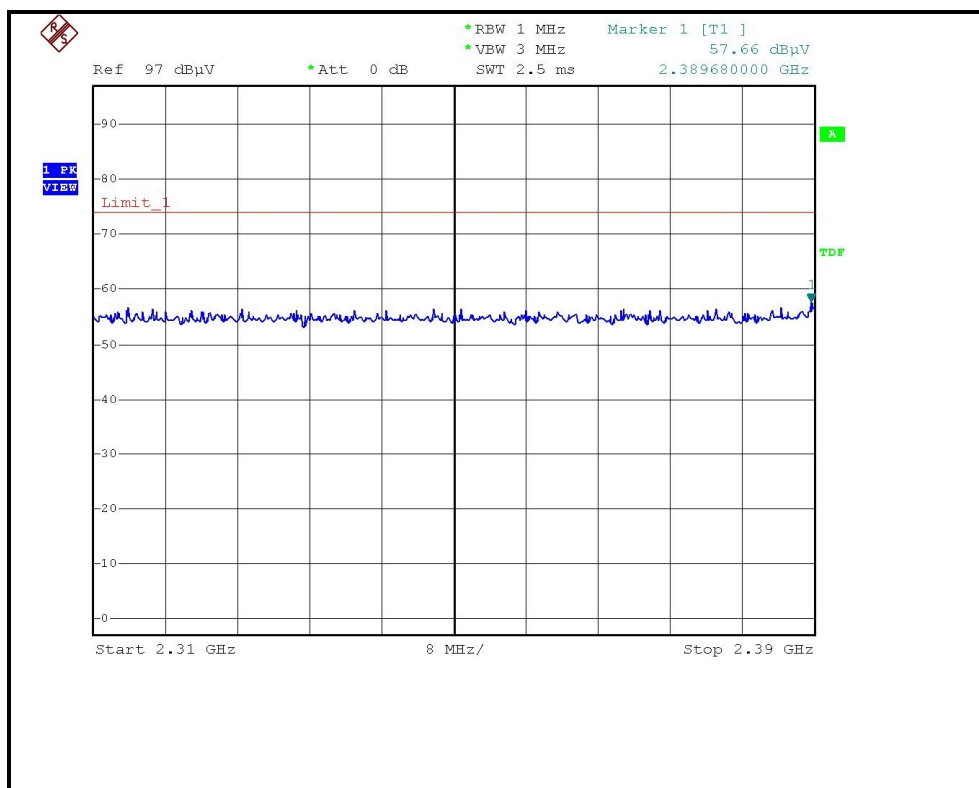


RESTRICTED BANDEDGE (802.11b MODE, CH10, HORIZONTAL)

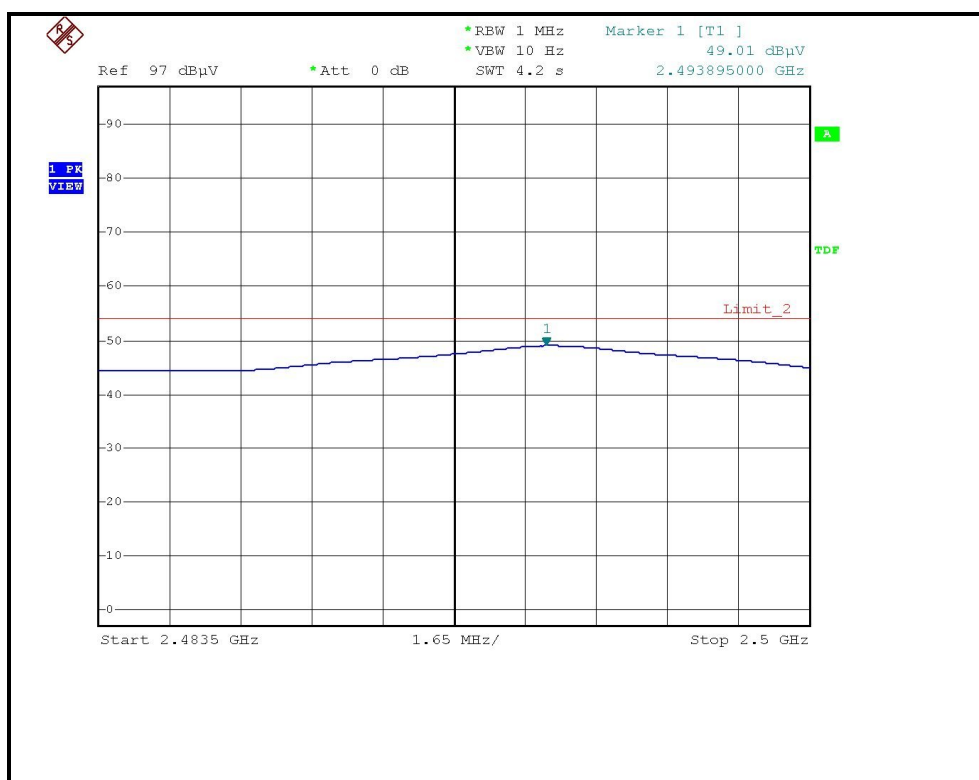
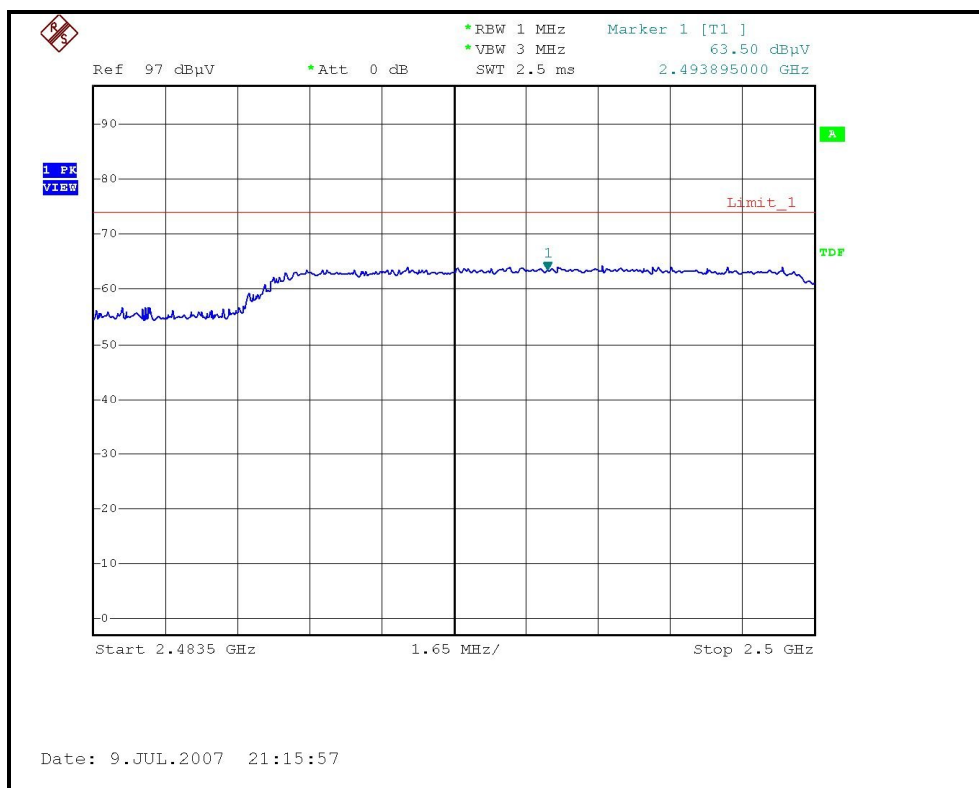


RESTRICTED BANDEDGE (802.11b MODE,CH10, VERTICAL)

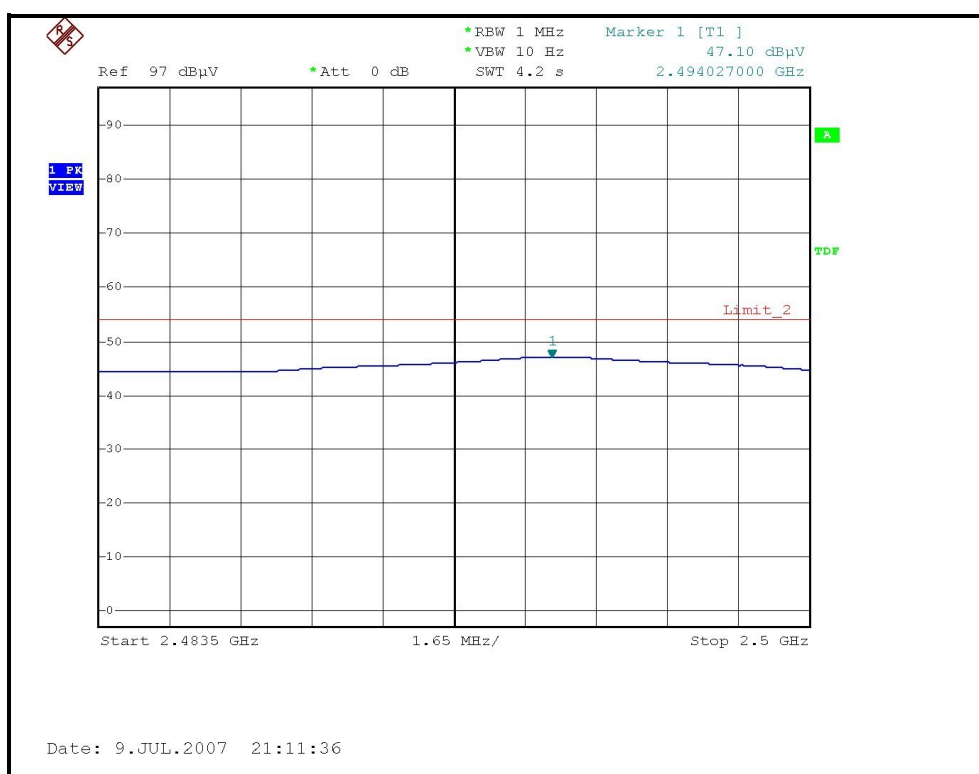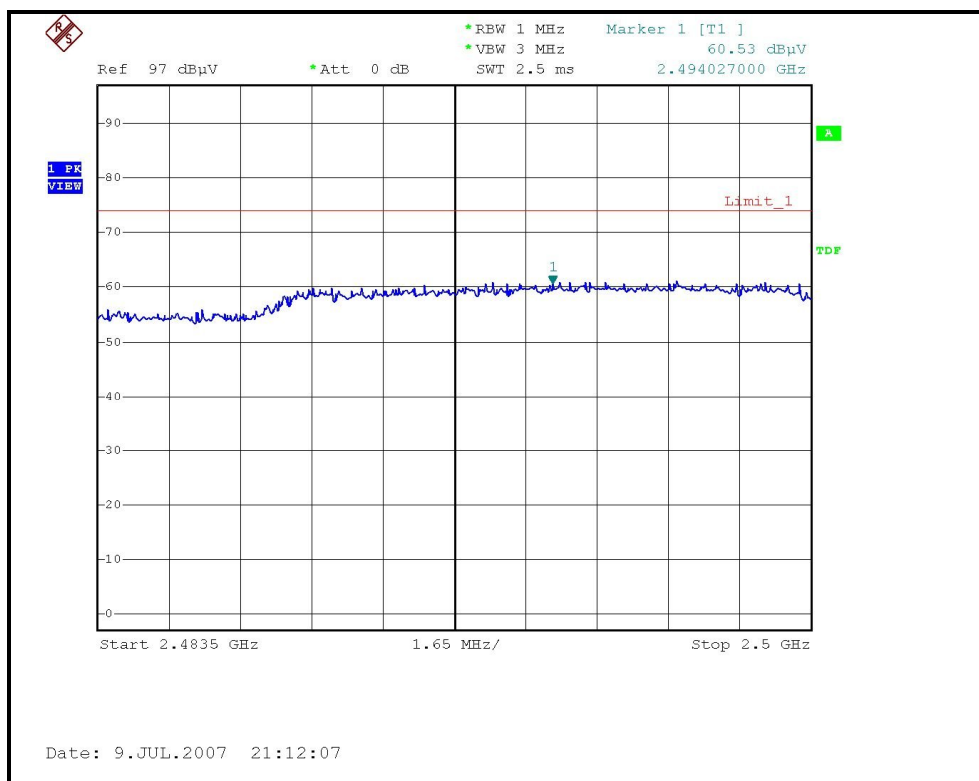

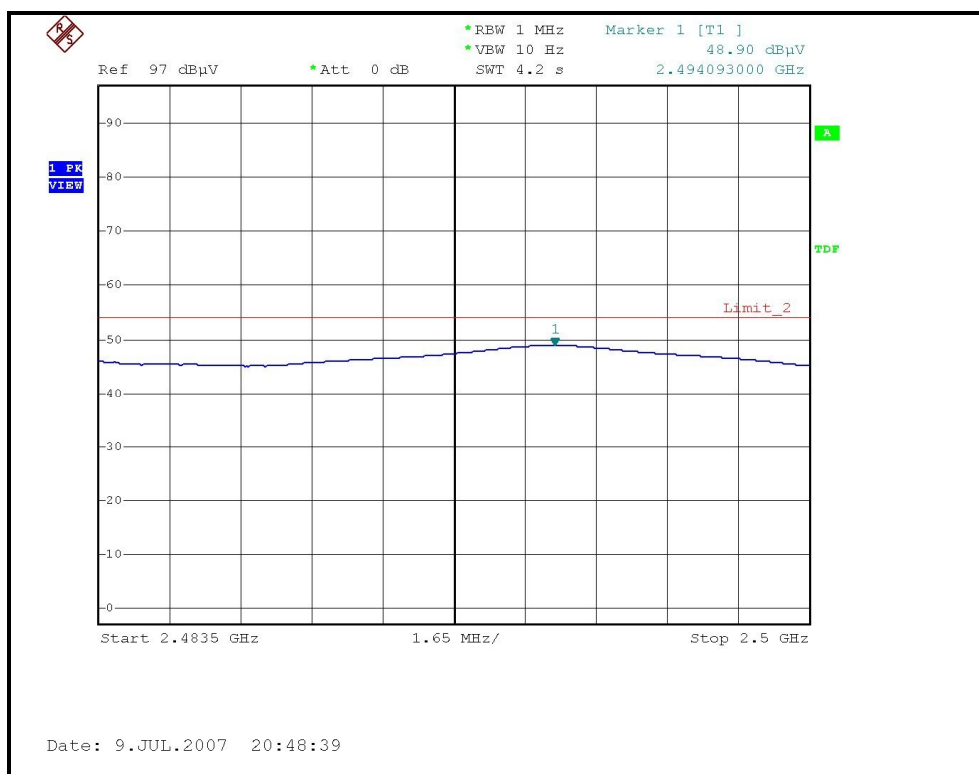

RESTRICTED BANDEDGE (802.11b MODE,CH11, VERTICAL)

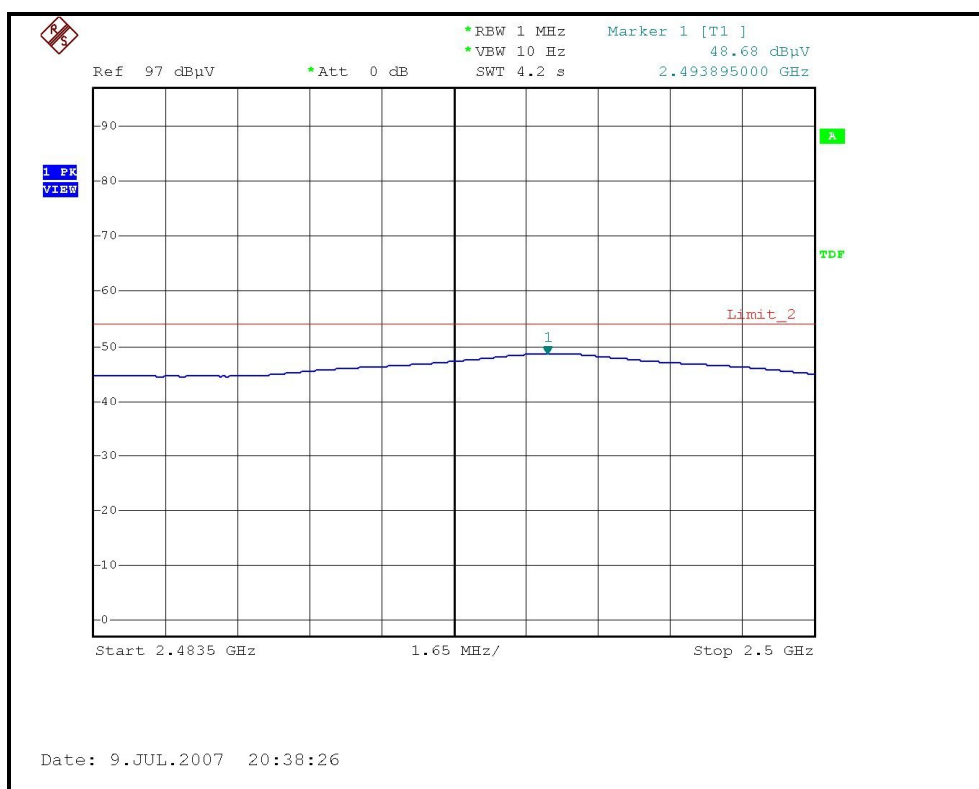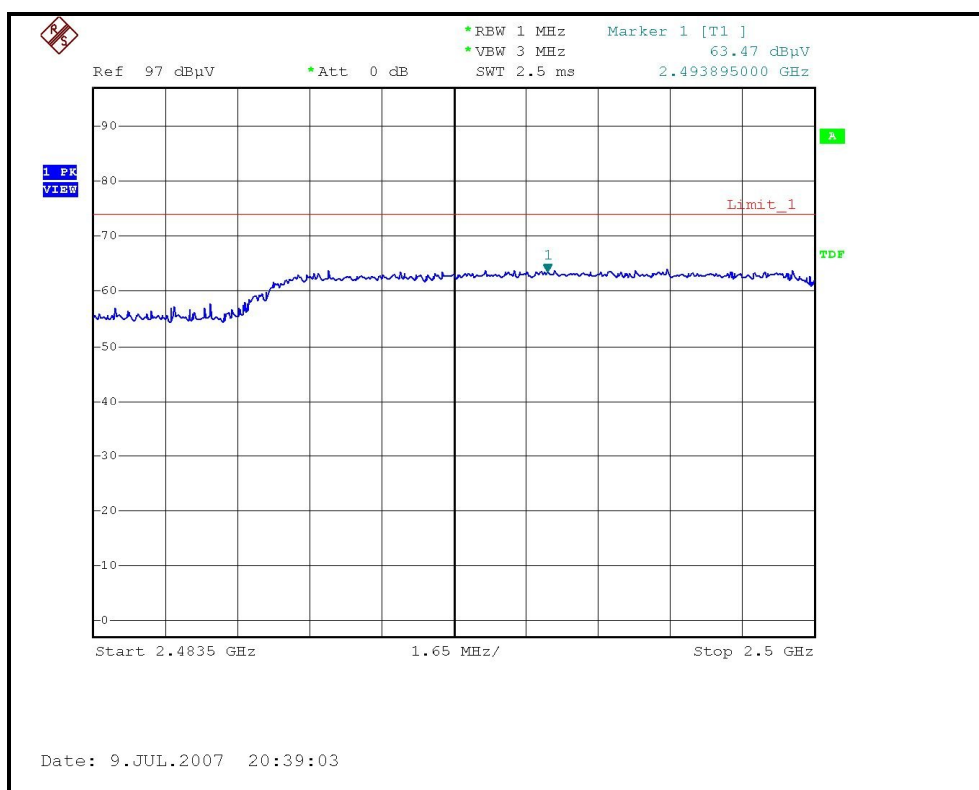

802.11g OFDM modulation

CHANNEL	Channel 1	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	73.61 PK	74.00	-0.39	1.25 H	25	43.29	30.32
2	2390.00	53.80 AV	54.00	-0.20	1.25 H	25	23.48	30.32
3	2412.00	109.00 PK			1.45 H	265	78.59	30.41
4	2412.00	96.20 AV			1.45 H	265	65.79	30.41
5	4824.00	48.00 PK	74.00	-26.00	1.05 H	52	12.21	35.79
6	4824.00	34.00 AV	54.00	-20.00	1.05 H	52	-1.79	35.79
7	7236.00	51.40 PK	74.00	-22.60	1.48 H	33	9.80	41.60
8	7236.00	38.20 AV	54.00	-15.80	1.48 H	33	-3.40	41.60

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	72.41 PK	74.00	-1.59	1.30 V	227	42.09	30.32
2	2390.00	52.40 AV	54.00	-1.60	1.30 V	227	22.08	30.32
3	*2412.00	108.10 PK			1.58 V	3	77.69	30.41
4	*2412.00	95.50 AV			1.58 V	3	65.09	30.41
5	4824.00	53.00 PK	74.00	-21.00	1.06 V	292	17.21	35.79
6	4824.00	37.20 AV	54.00	-16.80	1.06 V	292	1.41	35.79
7	7236.00	51.20 PK	74.00	-22.80	1.44 V	208	9.60	41.60
8	7236.00	38.00 AV	54.00	-16.00	1.44 V	208	-3.60	41.60

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

CHANNEL	Channel 2	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.84	68.64 PK	74.00	-5.36	1.46 H	288	38.32	30.32
2	2389.84	53.66 AV	54.00	-0.34	1.46 H	288	23.34	30.32
3	*2417.00	109.60 PK			1.50 H	288	79.17	30.43
4	*2417.00	96.80 AV			1.50 H	288	66.37	30.43
5	4834.00	48.40 PK	74.00	-25.60	1.26 H	2	12.58	35.82
6	4834.00	34.20 AV	54.00	-19.80	1.26 H	2	-1.62	35.82
7	7251.00	51.20 PK	74.00	-22.80	1.16 H	46	9.56	41.64
8	7251.00	38.00 AV	54.00	-16.00	1.16 H	46	-3.64	41.64

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2389.94	68.94 PK	74.00	-5.06	1.63 V	6	38.62	30.32
2	2389.94	53.48 AV	54.00	-0.52	1.63 V	6	23.16	30.32
3	*2417.00	110.40 PK			1.35 V	3	79.97	30.43
4	*2417.00	97.70 AV			1.35 V	3	67.27	30.43
5	4834.00	53.50 PK	74.00	-20.50	1.08 V	302	17.68	35.82
6	4834.00	37.60 AV	54.00	-16.40	1.08 V	302	1.78	35.82
7	7251.00	51.60 PK	74.00	-22.40	1.50 V	222	9.96	41.64
8	7251.00	38.00 AV	54.00	-16.00	1.50 V	222	-3.64	41.64

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

CHANNEL	Channel 6	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.80 PK			1.40 H	222	82.28	30.52
2	*2437.00	100.00 AV			1.40 H	222	69.48	30.52
3	4874.00	49.00 PK	74.00	-25.00	1.45 H	70	13.08	35.92
4	4874.00	34.50 AV	54.00	-19.50	1.45 H	70	-1.42	35.92
5	7311.00	51.70 PK	74.00	-22.30	1.05 H	20	9.89	41.81
6	7311.00	38.40 AV	54.00	-15.60	1.05 H	20	-3.41	41.81

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	106.50 PK			1.20 V	262	75.98	30.52
2	*2437.00	93.80 AV			1.20 V	262	63.28	30.52
3	4874.00	54.10 PK	74.00	-19.90	1.00 V	334	18.18	35.92
4	4874.00	38.00 AV	54.00	-16.00	1.00 V	334	2.08	35.92
5	7311.00	52.00 PK	74.00	-22.00	1.75 V	280	10.19	41.81
6	7311.00	38.40 AV	54.00	-15.60	1.75 V	280	-3.41	41.81

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

CHANNEL	Channel 10	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Sky Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	112.10 PK			1.45 H	250	81.49	30.61
2	*2457.00	99.40 AV			1.45 H	250	68.79	30.61
3	2483.50	69.16 PK	74.00	-4.84	1.43 H	250	38.44	30.72
4	2483.50	52.21 AV	54.00	-1.79	1.43 H	250	21.49	30.72
5	4914.00	48.60 PK	74.00	-25.40	1.28 H	96	12.57	36.03
6	4914.00	34.40 AV	54.00	-19.60	1.28 H	96	-1.63	36.03
7	7371.00	51.50 PK	74.00	-22.50	1.08 H	36	9.53	41.97
8	7371.00	38.20 AV	54.00	-15.80	1.08 H	36	-3.77	41.97

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2457.00	105.70 PK			1.27 V	270	75.09	30.61
2	*2457.00	93.40 AV			1.27 V	270	62.79	30.61
3	2493.99	64.07 PK	74.00	-9.93	1.38 V	266	33.31	30.76
4	2493.99	49.70 AV	54.00	-4.30	1.38 V	266	18.94	30.76
5	4914.00	53.60 PK	74.00	-20.40	1.02 V	305	17.57	36.03
6	4914.00	37.20 AV	54.00	-16.80	1.02 V	305	1.17	36.03
7	7371.00	51.40 PK	74.00	-22.60	1.56 V	265	9.43	41.97
8	7371.00	38.00 AV	54.00	-16.00	1.56 V	265	-3.97	41.97

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * ” : Fundamental frequency

CHANNEL	Channel 11	FREQUENCY RANGE	1 ~ 25GHz
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20deg. C, 65%RH, 960hPa	TESTED BY	Sky Liao



ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.90 PK			1.46 H	60	76.27	30.63
2	*2462.00	94.70 AV			1.46 H	60	64.07	30.63
3	2483.50	73.50 PK	74.00	-0.50	1.48 H	48	42.78	30.72
4	2483.50	51.30 AV	54.00	-2.70	1.48 H	48	20.58	30.72
5	4924.00	53.20 PK	74.00	-20.80	1.05 H	252	17.14	36.06
6	4924.00	36.80 AV	54.00	-17.20	1.05 H	252	0.74	36.06
7	7386.00	51.60 PK	74.00	-22.40	1.36 H	295	9.59	42.01
8	7386.00	38.20 AV	54.00	-15.80	1.36 H	295	-3.81	42.01

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	106.40 PK			1.05 V	13	75.77	30.63
2	*2462.00	93.80 AV			1.05 V	13	63.17	30.63
3	2483.50	73.00 PK	74.00	-1.00	1.33 V	163	42.28	30.72
4	2483.50	51.60 AV	54.00	-2.40	1.33 V	163	20.88	30.72
5	4924.00	48.20 PK	74.00	-25.80	1.02 V	36	12.14	36.06
6	4924.00	34.00 AV	54.00	-20.00	1.02 V	36	-2.06	36.06
7	7386.00	51.00 PK	74.00	-23.00	1.55 V	12	8.99	42.01
8	7386.00	38.00 AV	54.00	-16.00	1.55 V	12	-4.01	42.01



REMARKS:

1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. The limit value is defined as per 15.247
6. “ * “ : Fundamental frequency



RESTRICTED BANDEDGE (802.11g MODE, CH1, HORIZONTAL)

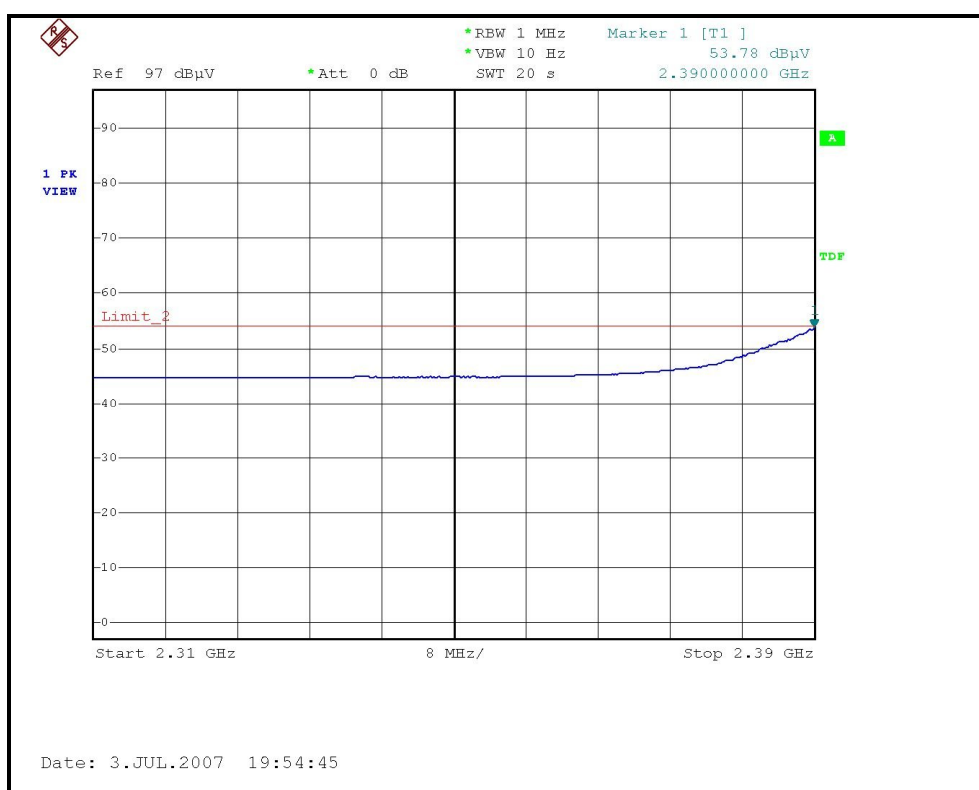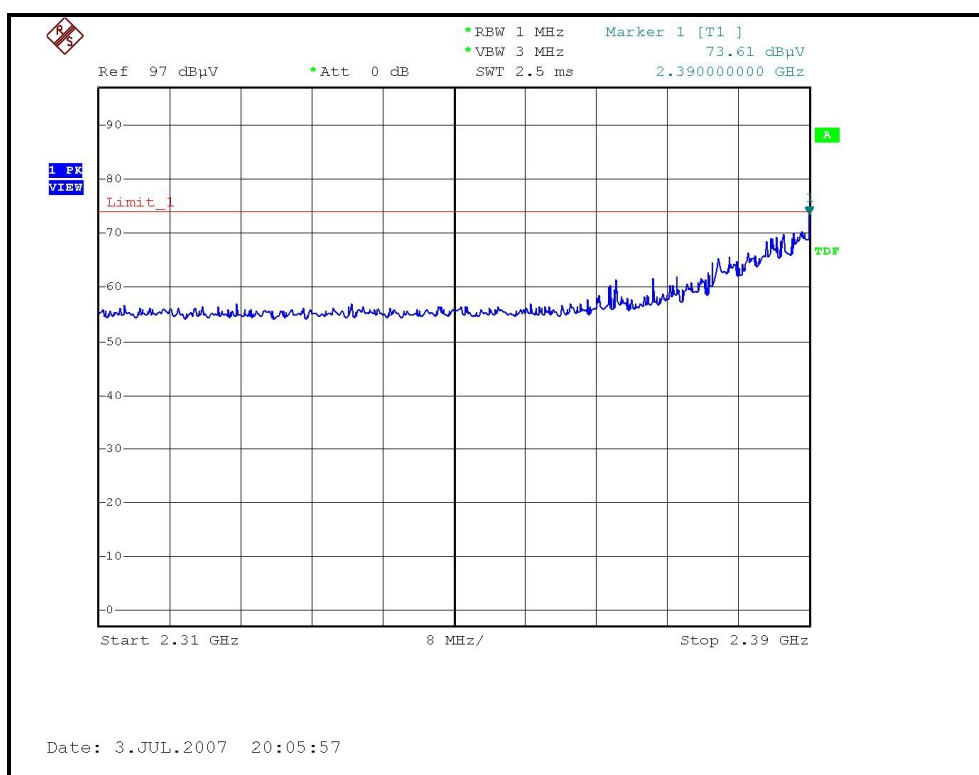



RESTRICTED BANDEDGE (802.11g MODE, CH1, VERTICAL)

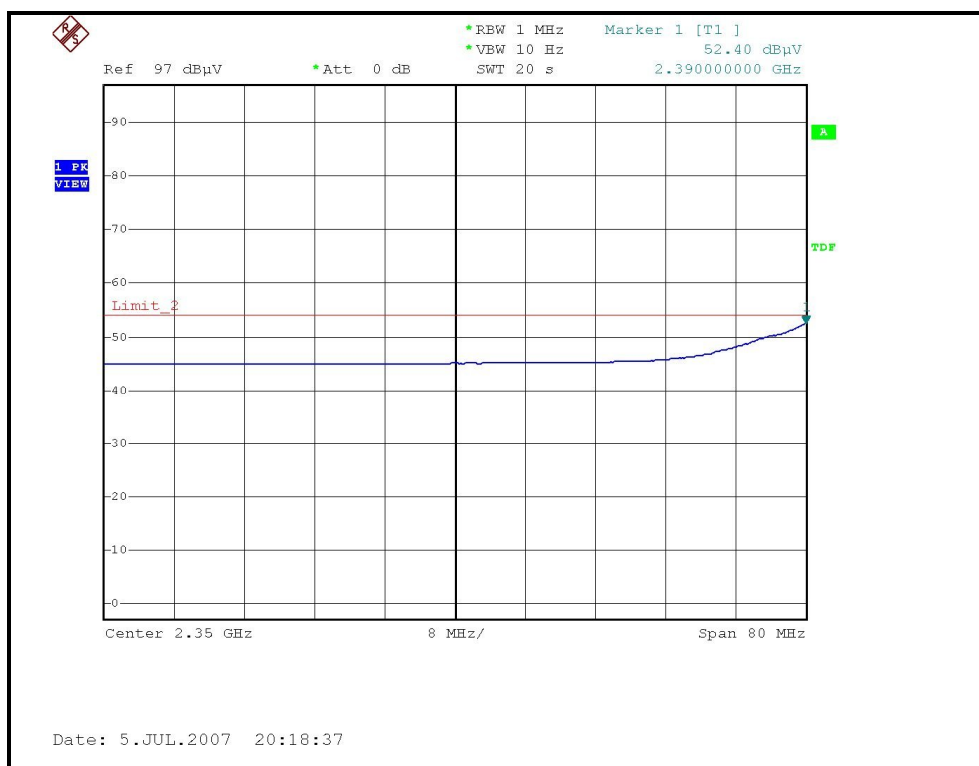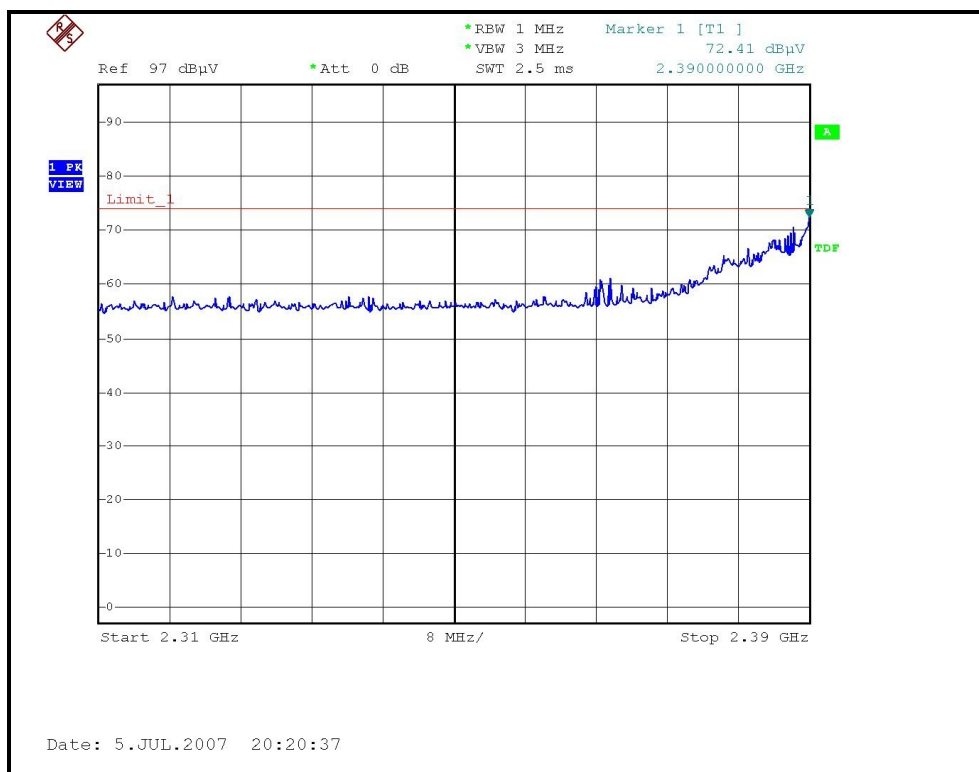



RESTRICTED BANDEDGE (802.11b MODE, CH2, HORIZONTAL)

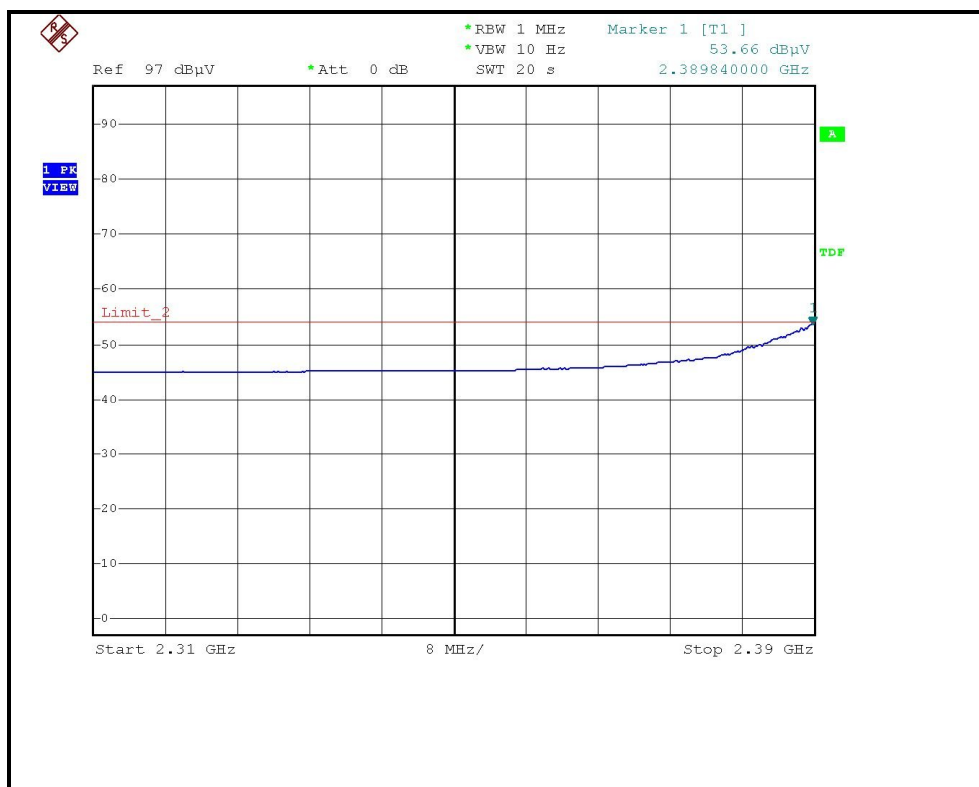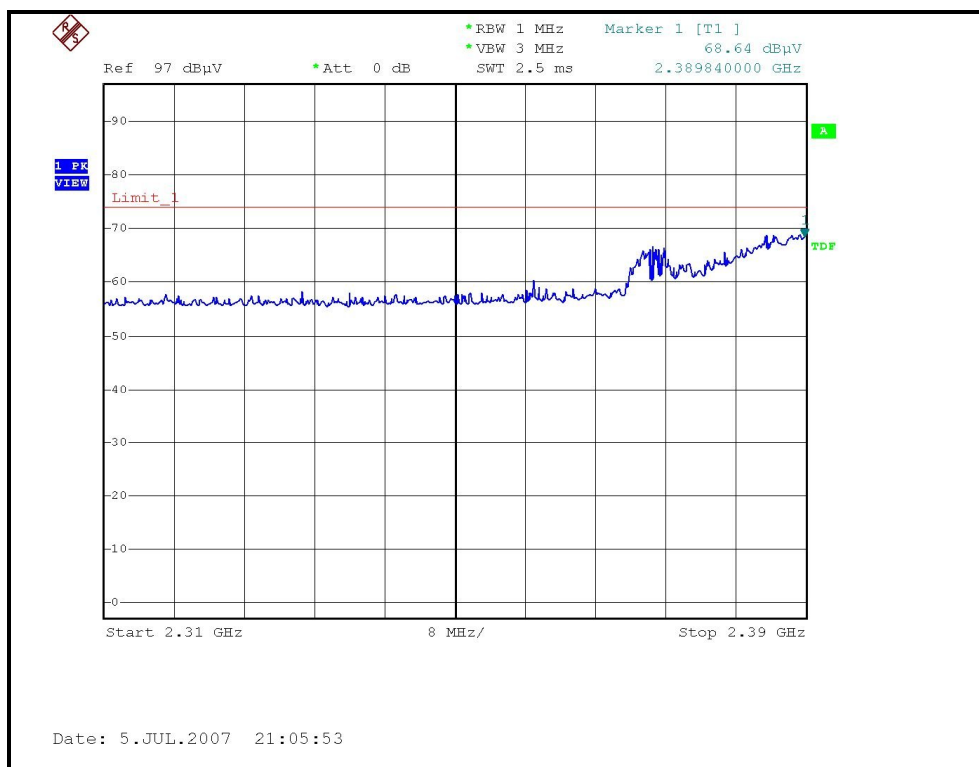



RESTRICTED BANDEDGE (802.11b MODE, CH2, VERTICAL)

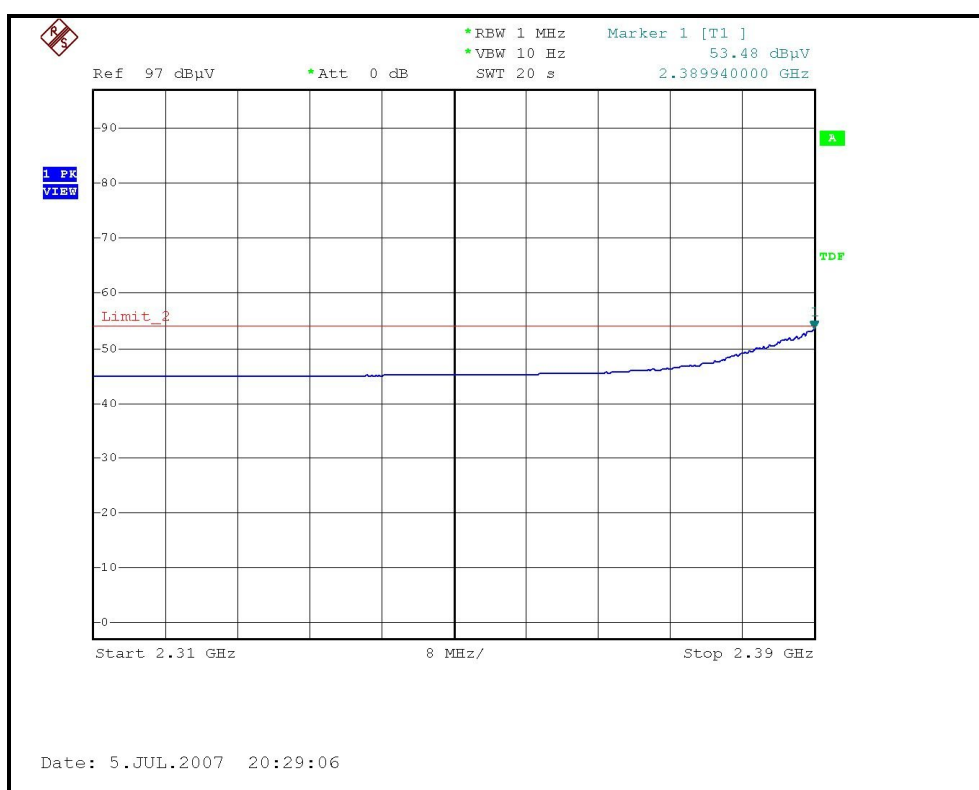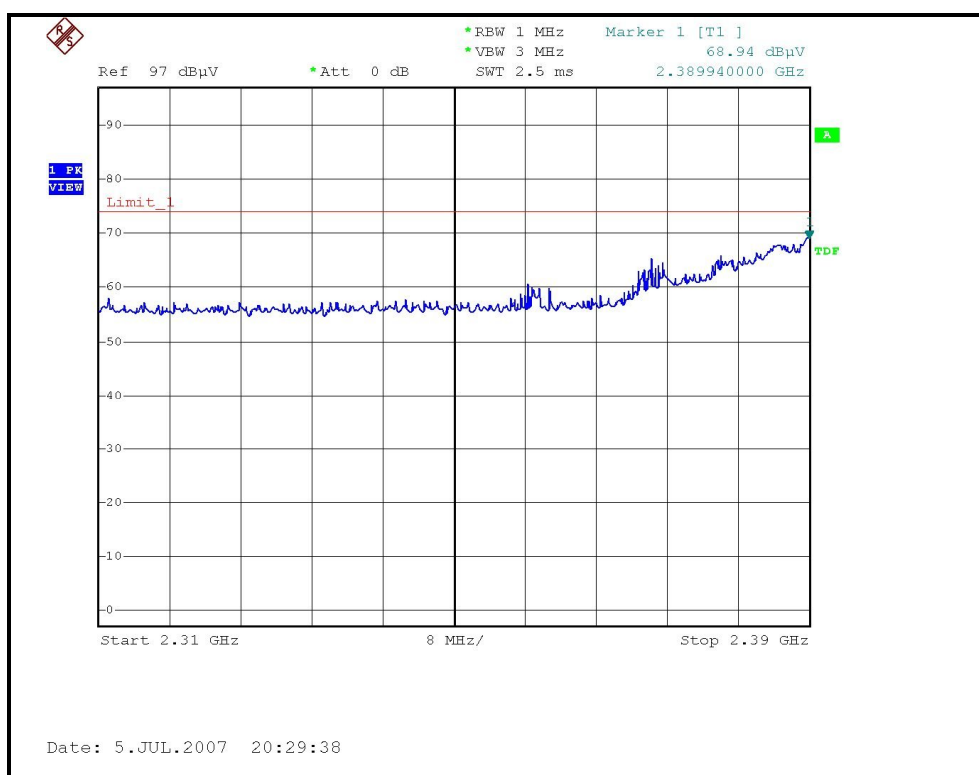



RESTRICTED BANDEDGE (802.11b MODE, CH10, HORIZONTAL)

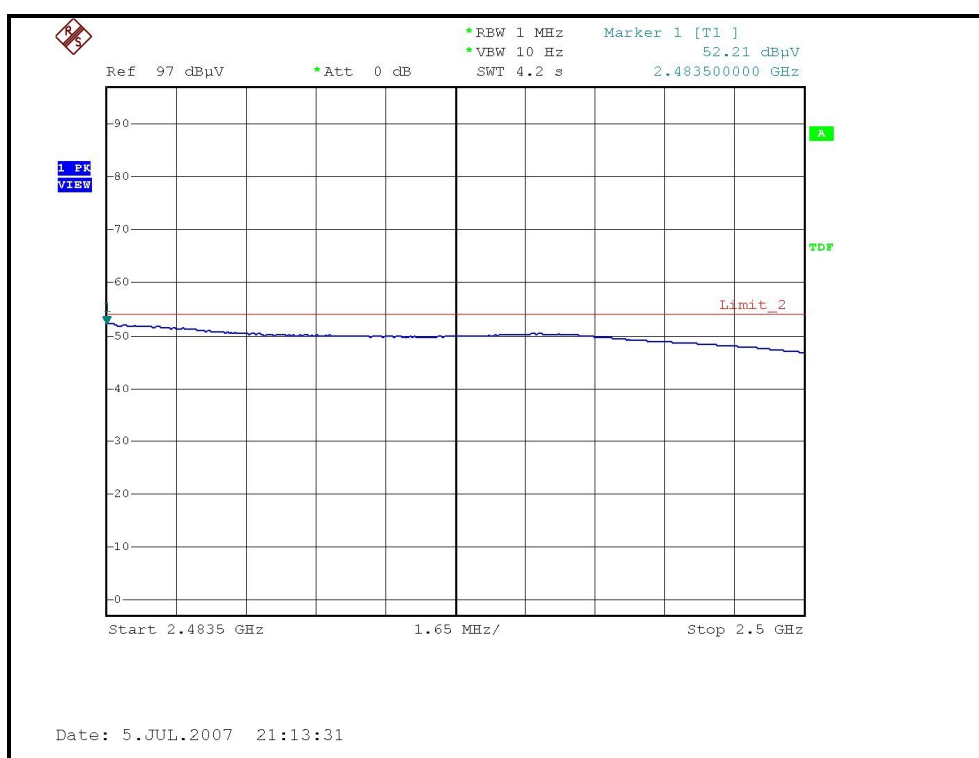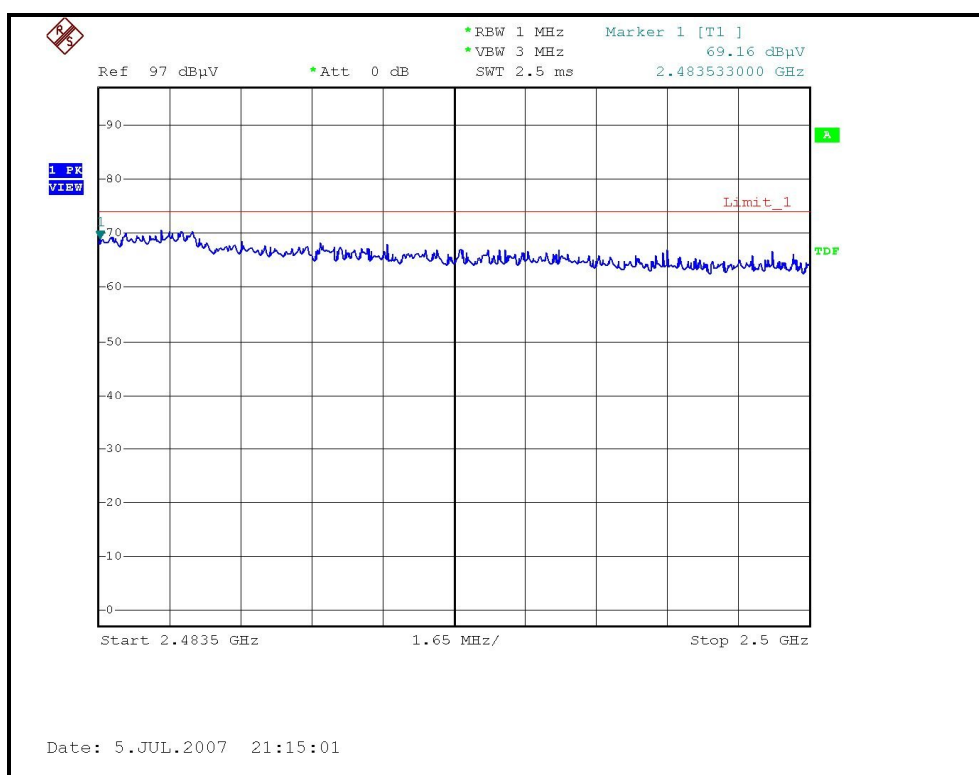



RESTRICTED BANDEDGE (802.11b MODE, CH10, VERTICAL)

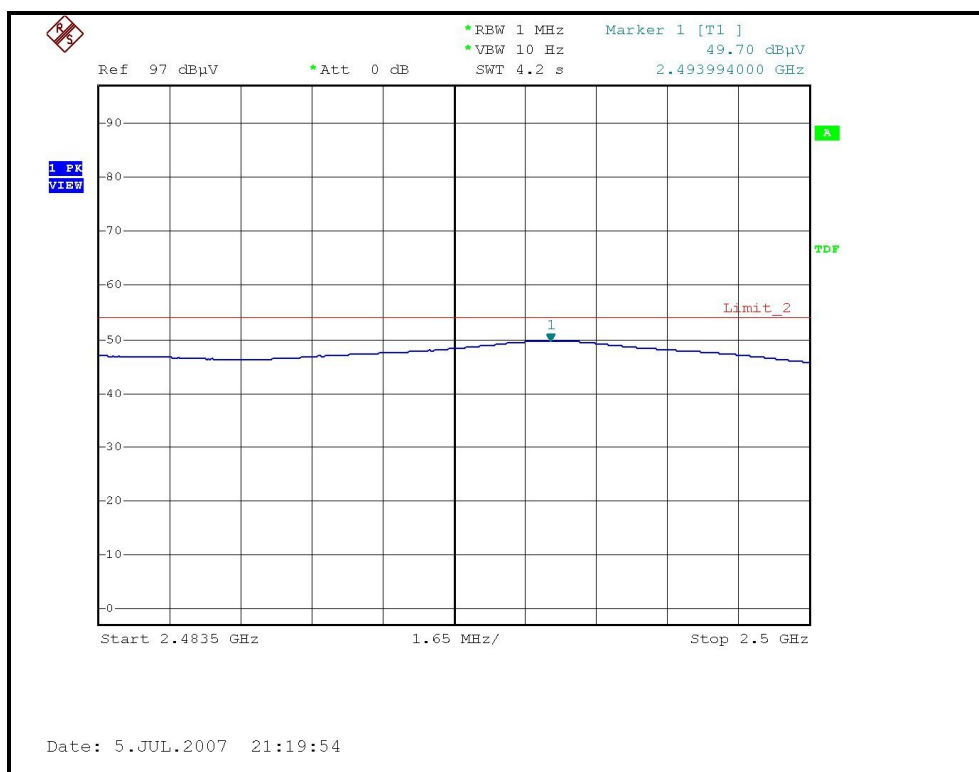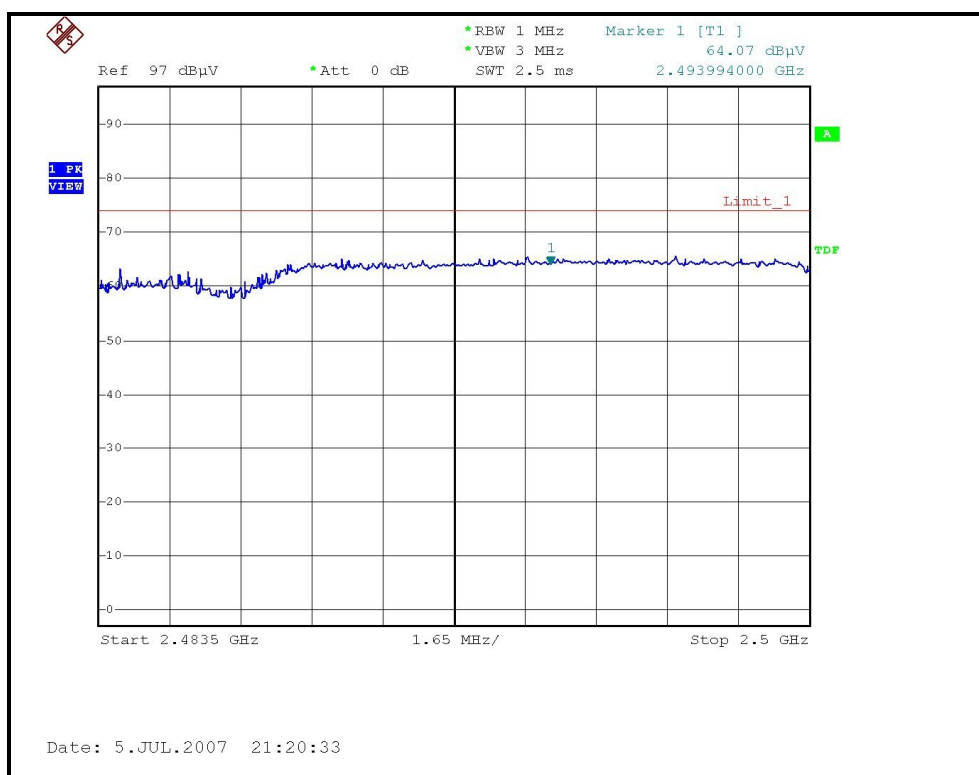

RESTRICTED BANDEDGE (802.11g MODE, CH11, HORIZONTAL)

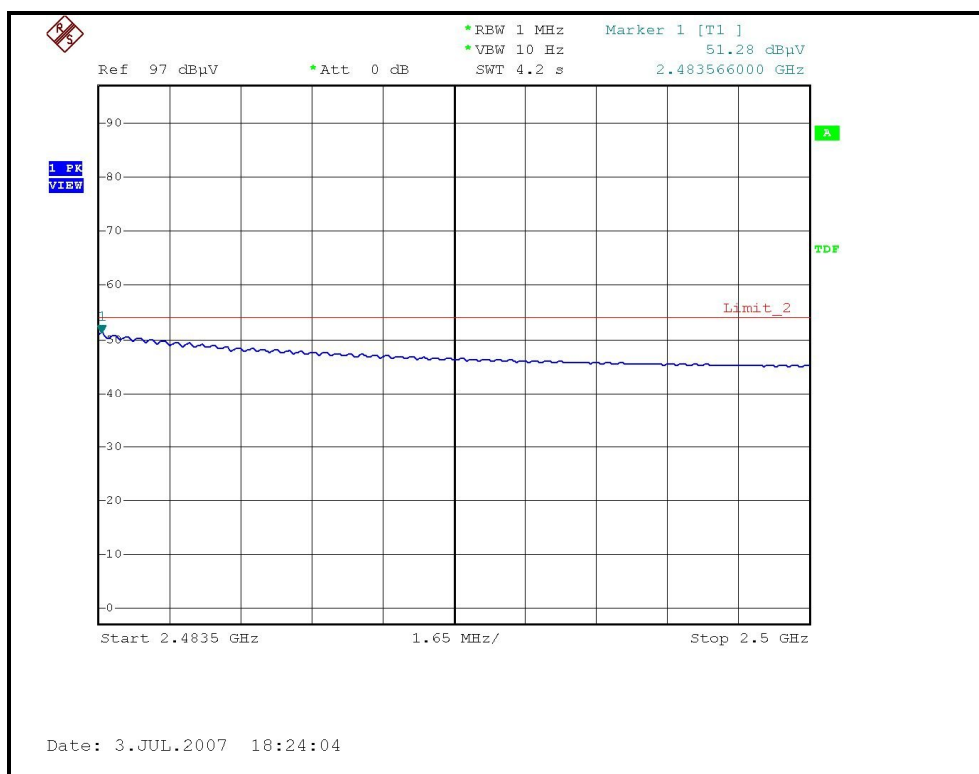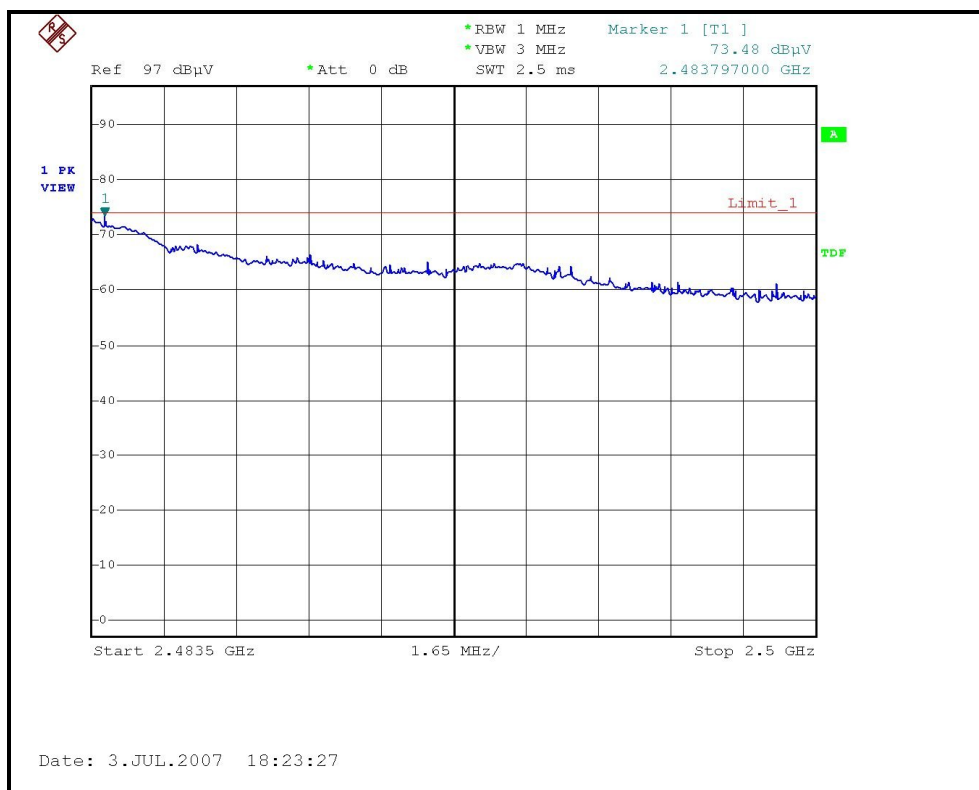

RESTRICTED BANDEDGE (802.11g MODE, CH11, VERTICAL)

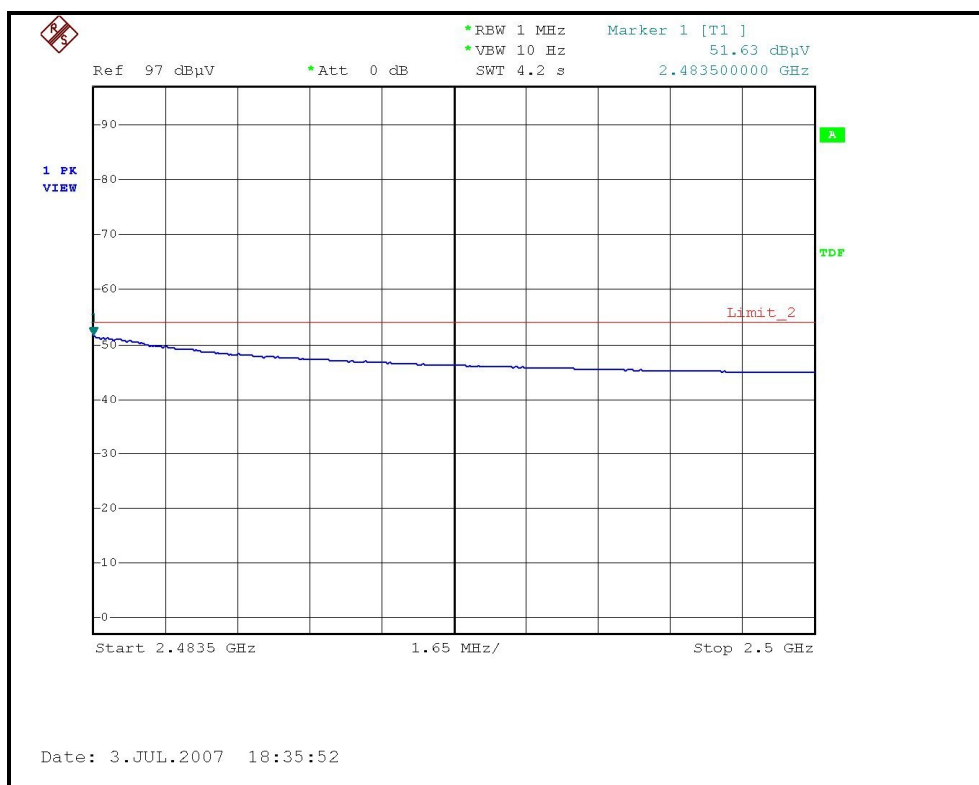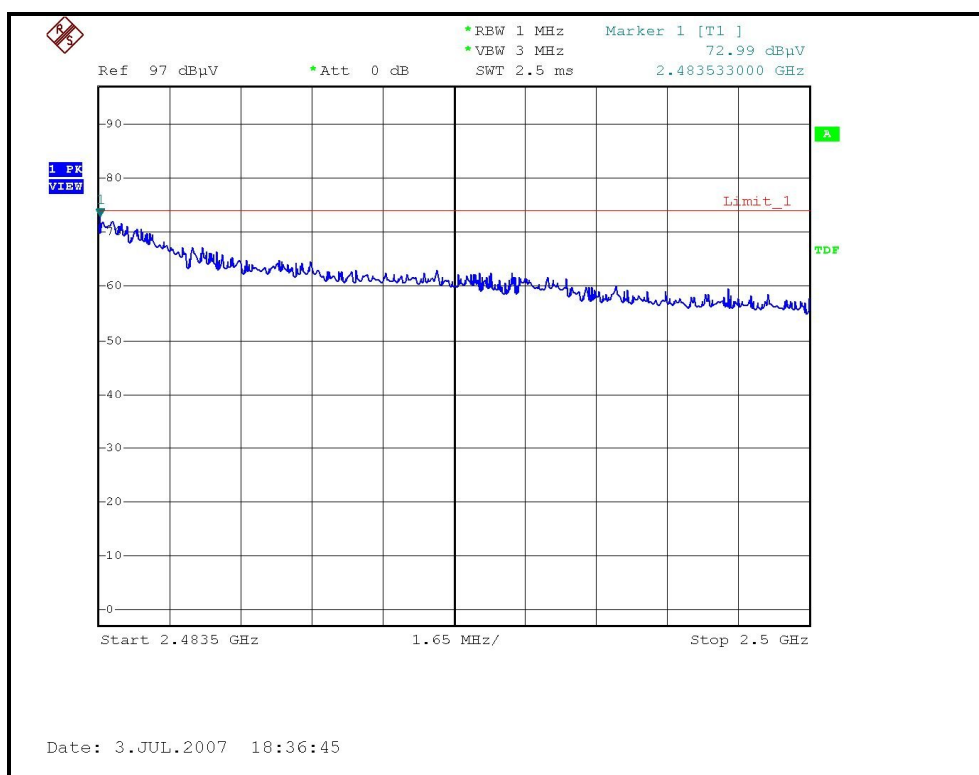

4.2 MAXIMUM PEAK OUTPUT POWER

4.2.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.2.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100036	Dec. 21, 2007

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.2.3 TEST PROCEDURES

The transmitter output was connected to the spectrum analyzer through an attenuator, the internal channel power was measured with the channel power function of spectrum analyzer that bandwidth greater than or equal to the 99% bandwidth. The maximum power was measured and recorded.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP



4.2.6 EUT OPERATING CONDITIONS

Same as Item 4.1.6

4.2.7 TEST RESULTS

802.11b DSSS modulation

MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 960hPa
TESTED BY	Sky Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	130.918	21.17	30	PASS
6	2437	131.220	21.18	30	PASS
10	2457	127.057	21.04	30	PASS
11	2462	118.304	20.73	30	PASS

802.11g OFDM modulation

MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	25deg. C, 62%RH, 960hPa
TESTED BY	Sky Liao		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	301.995	24.80	30	PASS
2	2417	376.704	25.76	30	PASS
6	2437	390.841	25.92	30	PASS
10	2457	353.997	25.49	30	PASS
11	2462	279.898	24.47	30	PASS

4.3 BAND EDGES MEASUREMENT

4.3.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 15, 2007

NOTE:

- 1.The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.
- 2.The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (RBW = VBW = 100kHz) are attached on the following pages.

4.3.4 EUT OPERATING CONDITION


Same as Item 4.1.6

4.3.5 TEST RESULTS


The spectrum plots are attached on the following 4 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS modulation:

CH1

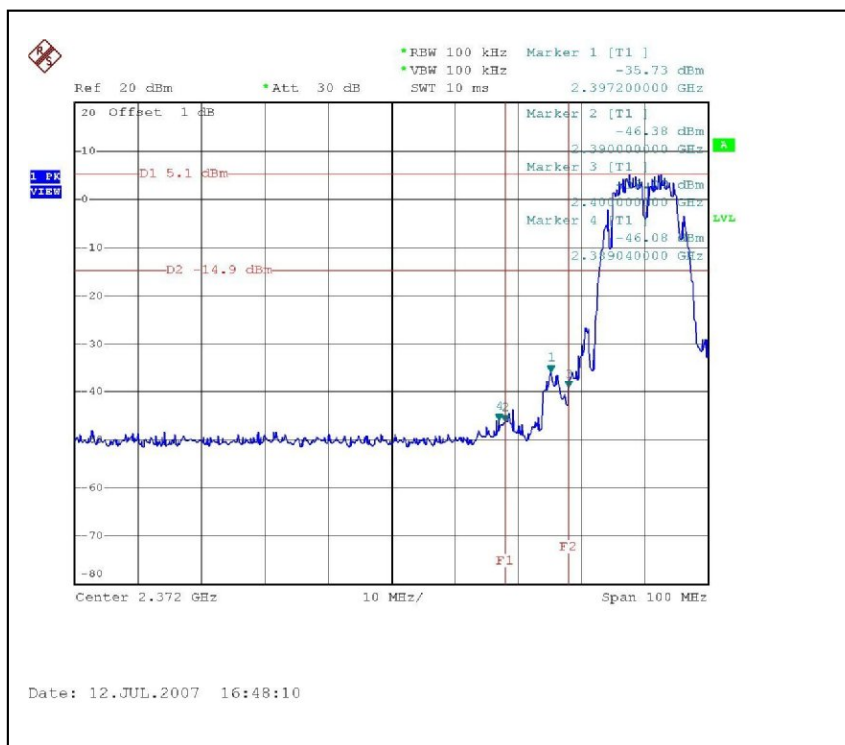


CH11

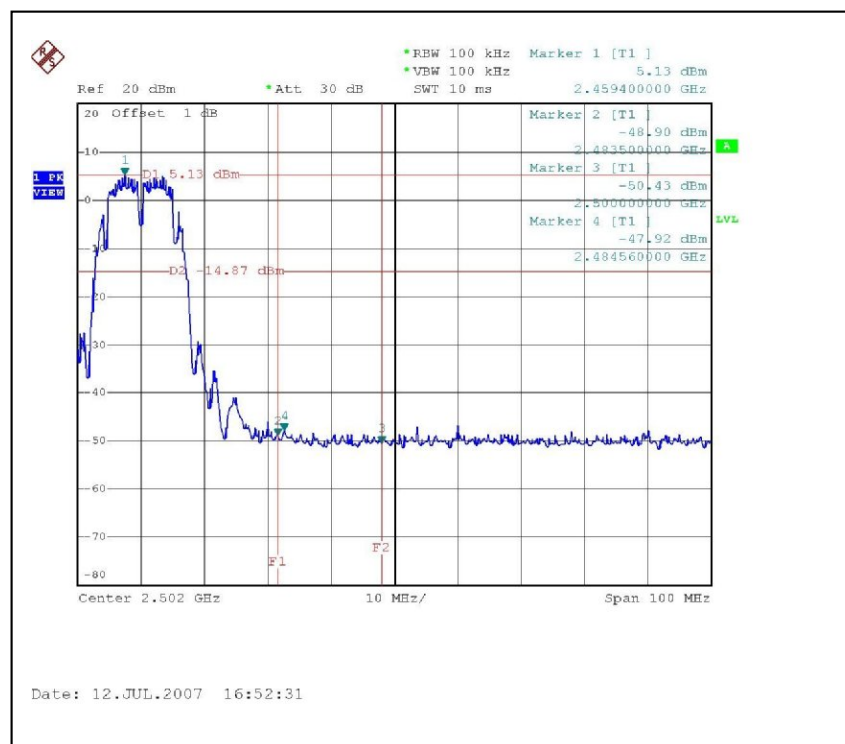


802.11b 10th conducted Harmonic

CH1

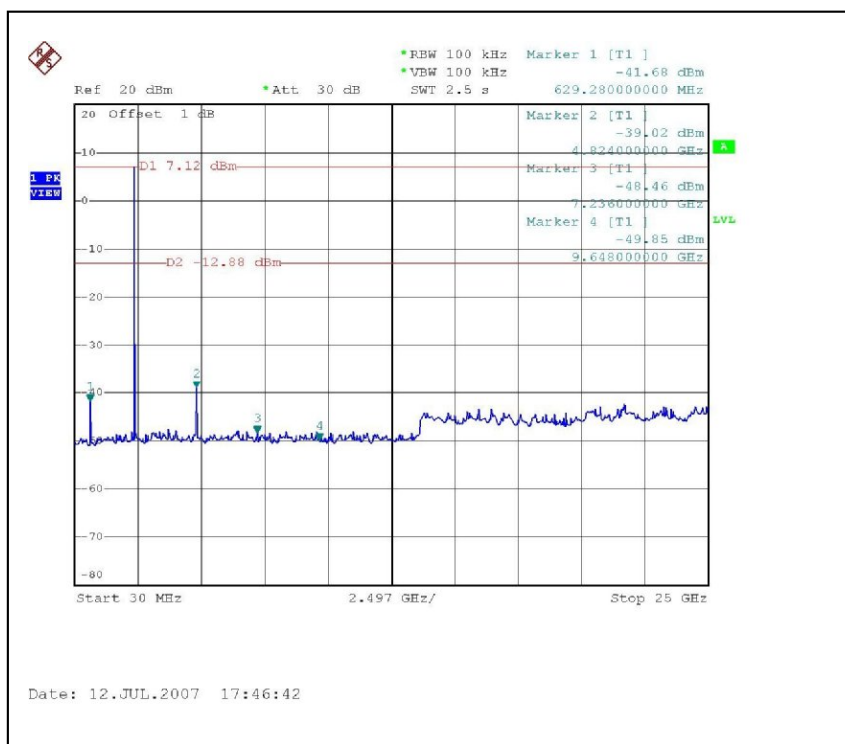


CH11

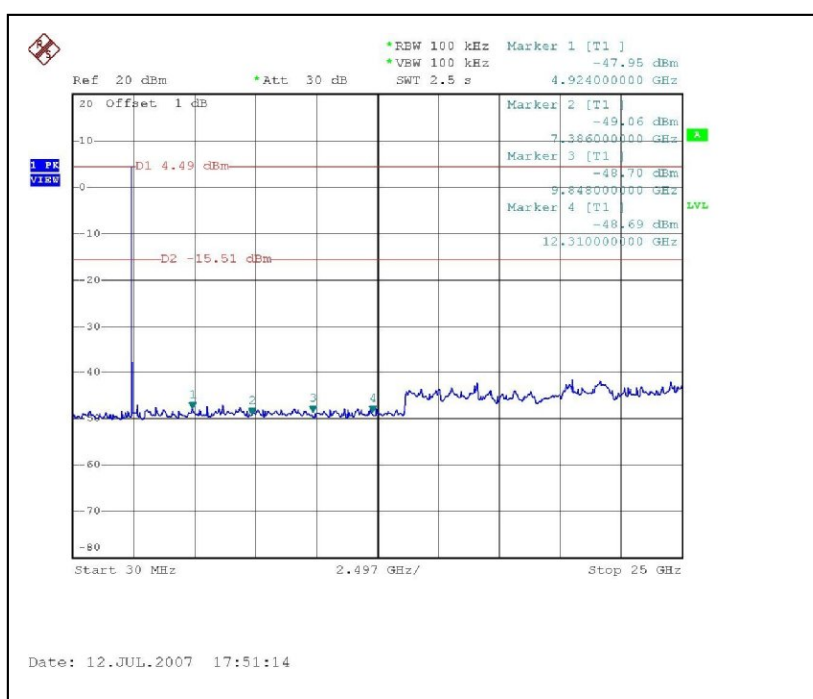


802.11g OFDM modulation:

CH1

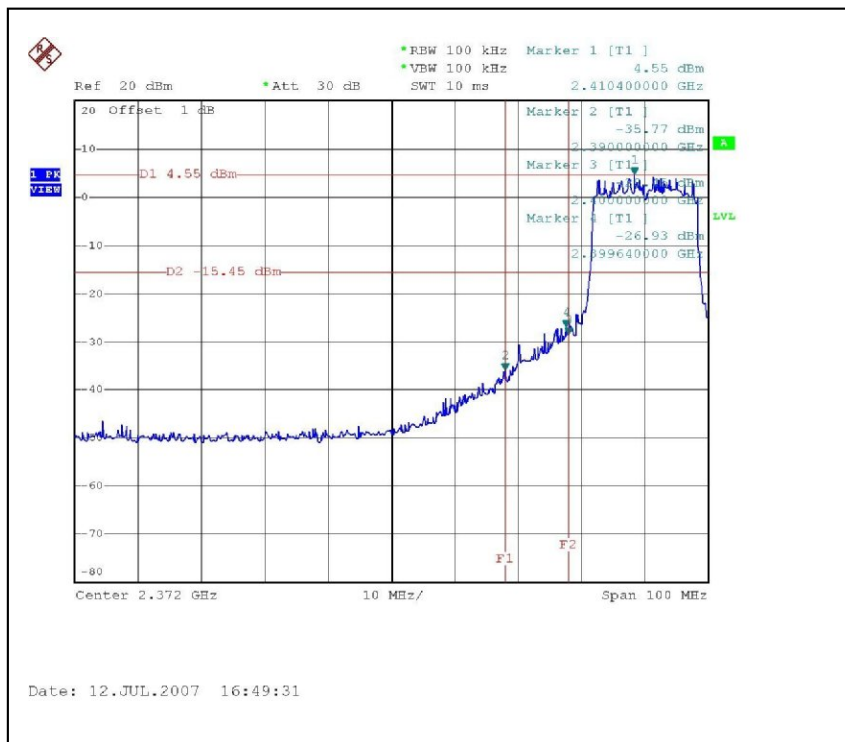


CH11

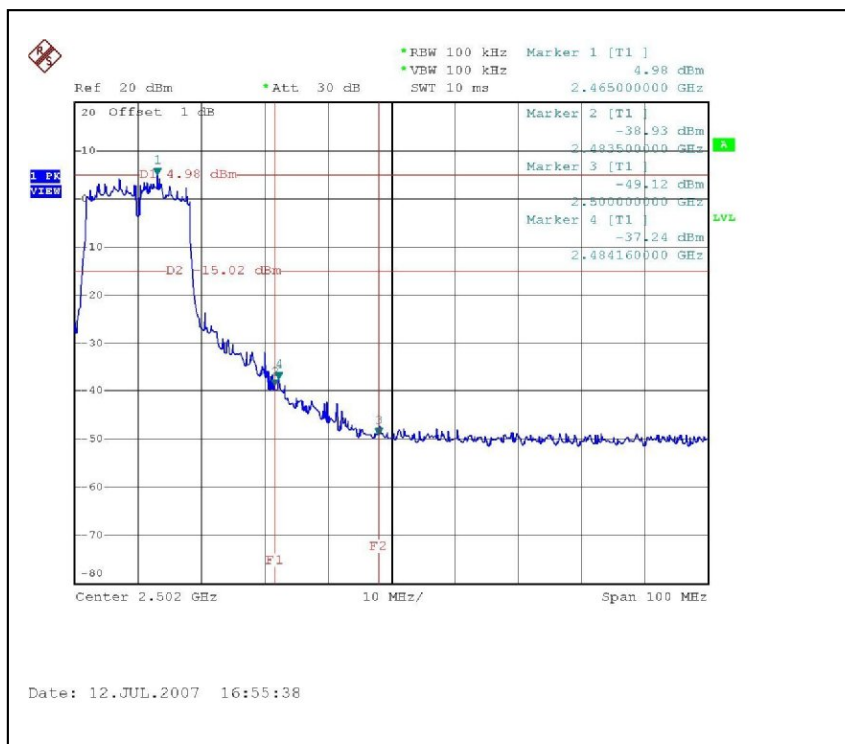


802.11g 10th conducted Harmonic

CH1

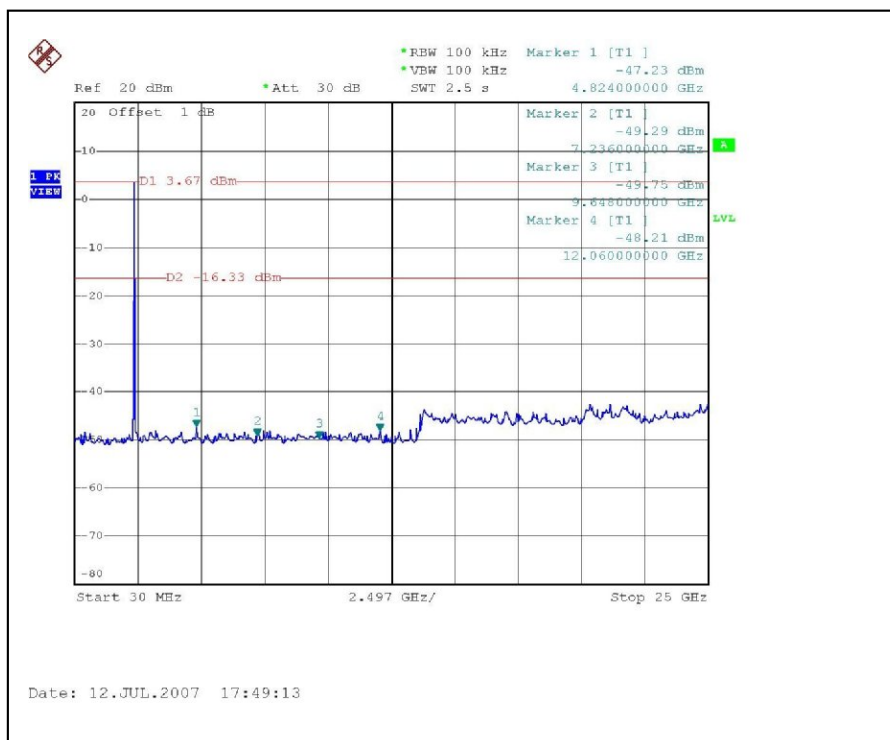

CH11

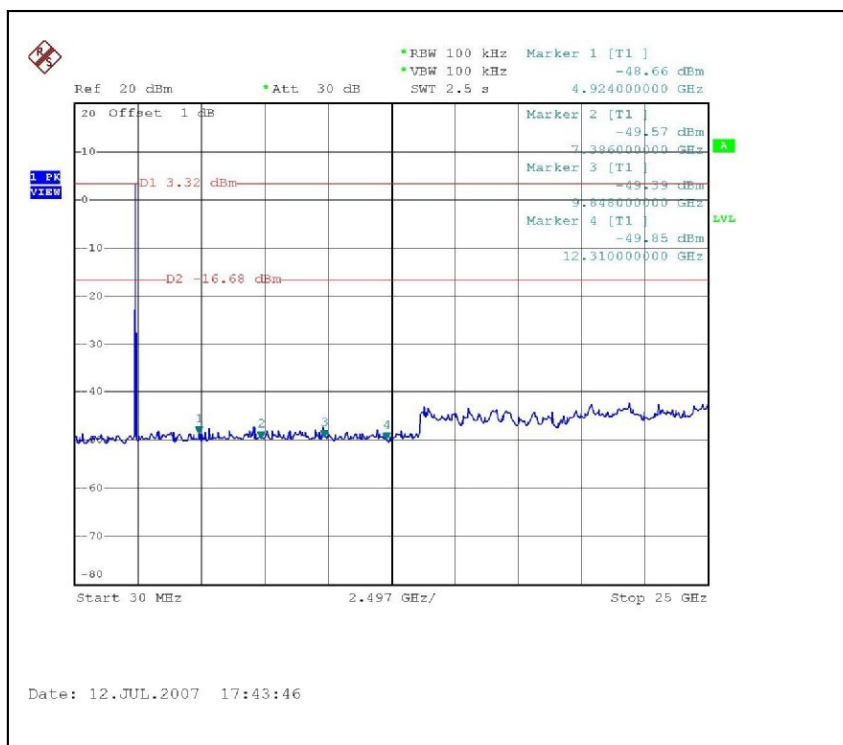

4.4 ANTENNA REQUIREMENT

4.4.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.4.2 ANTENNA CONNECTED CONSTRUCTION

There are two antennas provided to this EUT, please refer to the following table:

No.	Antenna Type	Gain (dBi)	Connector
1	PIFA	3(Main)	UFL
2	PIFA	3(Aux)	UFL

5. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also

6.APPENDIX-A MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.