



SAR Evaluation Report

IN ACCORDANCE WITH THE REQUIREMENTS OF
FCC OET BULLETIN 65 SUPPLEMENT C
IC RSS 102 ISSUE 1 : 1999

FOR

BROADCOM 802.11AG/DRAFT 802.11N WIRELESS LAN PCI-E MINI CARD

MODEL: BCM94321MC

FCC ID: QDS-BRCM1022

REPORT NUMBER: 07U11122-2, REVISION C

ISSUE DATE: JULY 20, 2007

Prepared for

BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, USA

Prepared by

COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET,
FREMONT, CA 94538, USA

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issued date	Revisions	Revised By
--	July 9, 2007	Initial issue	Sunny Shih
B	July 18, 2007	Revised host model name	T. Hong
C	July 20, 2007	Removed RF conducted measurement results	J. King

CERTIFICATE OF COMPLIANCE (SAR EVALUATION)**DATES OF TEST:** June 27, 28, 29, and July 9, 2007


APPLICANT:	Broadcom Corporation	
ADDRESS:	190 Mathilda Place, Sunnyvale CA 94086	
FCC ID:	QDS-BRCM1022	
MODEL:	BCM94321MC	
DEVICE CATEGORY:	Portable Device	
EXPOSURE CATEGORY:	General Population/Uncontrolled Exposure	

Broadcom 802.11ag/Draft 802.11n wireless LAN PCI-E Mini Card installed in Dell XPS Series (PP06XA) laptop.		
Test Sample is a:	Production unit	
Modulation type:	Direct Sequence Spread Spectrum (DSSS) for 802.11b Orthogonal Frequency Division Multiplexing (OFDM) for 802.11agn	
Rule Parts	Frequency Range [MHz]	The Highest SAR Values [1g_mW/g]
FCC 15.247	2412 - 2462	0.058
	5745 - 5825	0.113
FCC 15.407	5180 - 5320	0.048

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Std. C95.1-1992 and had been tested in accordance with the measurement procedures specified in FCC OET 65 Supplement C (Edition 01-01) and RSS 102

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



Hsin Fu Shih
Engineering Supervisor
Compliance Certification Services

Tested By:



Jonathan King
EMC Engineer
Compliance Certification Services

TABLE OF CONTENTS

1	DEVICE UNDER TEST (DUT) DESCRIPTION	5
2	FACILITIES AND ACCREDITATION	6
3	SYSTEM DESCRIPTION	7
3.1	COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS	8
4	SIMULATING LIQUID PARAMETERS CHECK.....	9
4.1	SIMULATING LIQUID PARAMETER CHECK RESULT.....	11
5	SYSTEM PERFORMANCE CHECK.....	16
5.1	SYSTEM PERFORMANCE CHECK RESULTS.....	18
6	SAR MEASURMENT PROCEDURE	19
6.1	DASY4 SAR MEASURMENT PROCEDURE	20
7	PROCEDURE USED TO ESTABLISH TEST SIGNAL.....	21
8	SAR MEASURMENT RESULTS.....	22
8.1	LAP-HELD - MIMO&AUX. ANTENNA – 2.4 GHZ BAND.....	22
8.2	LAP HELD POSITION – MIMO&AUX. ANTENNA - 5.2 GHZ BAND	23
8.3	LAP HELD POSITION – MIMO&AUX. ANTENNA - 5.8 GHZ BAND	24
9	MEASURMENT UNCERTAINTY	25
9.1	MEASURMENT UNCERTAINTY FOR 300 MHZ – 3000 MHZ	25
9.2	MEASURMENT UNCERTAINTY 3 GHZ – 6 GHZ	26
10	EQUIPMENT LIST AND CALIBRATION.....	27
11	PHOTOS	28
12	ATTACHMENTS.....	30

1 DEVICE UNDER TEST (DUT) DESCRIPTION

Broadcom 802.11ag/Draft 802.11n wireless LAN PCI-E Mini Card installed in Dell XPS Series (PP06XA) laptop.	
Normal operation:	Lap-held position
Duty cycle:	97%
Host Device(s):	Dell XPS Series (PP06XA) laptop
Antenna(s)	Amphenol PN# 60.4Q612.001 Hitachi, PN# HMGT02-DL12 Wistron (Foxcon) PN# 60.4Q612.011 Advanced Connectek PN# 60.4Q612.031 All SAR tests were performed on the Amphenol AUX & MIMO antennas, since this antenna has the highest antenna gain for both the 2.4 GHz and the 5 GHz bands.
Power supply:	Power supplied through the laptop computer (host device).

2 FACILITIES AND ACCREDITATION


The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, CA 94538 USA. The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."



CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

3 SYSTEM DESCRIPTION

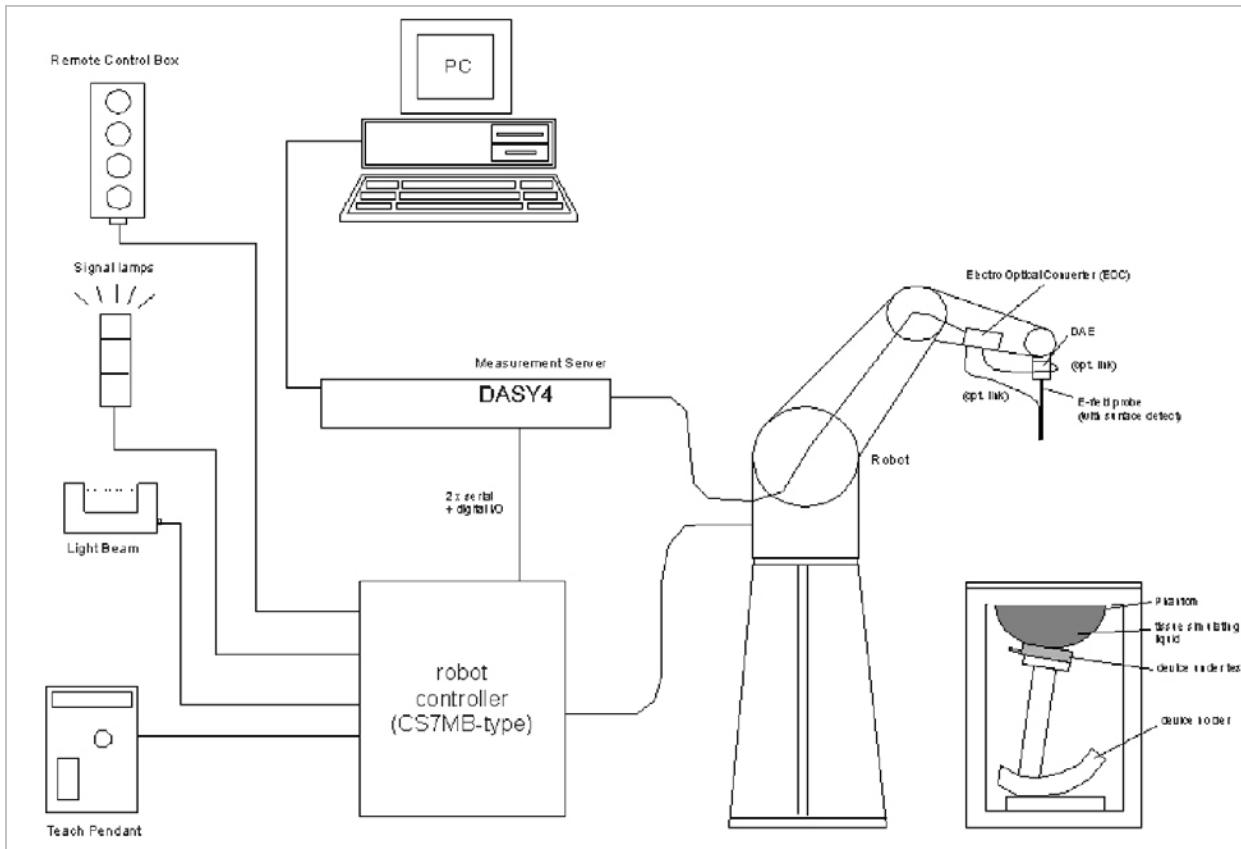

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.
- DASY4 software.
- Remote controls with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validate the proper functioning of the system.

3.1 COMPOSITION OF INGREDIENTS FOR TISSUE SIMULATING LIQUIDS

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Ingredients (% by weight)	Frequency (MHz)									
	450		835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78

Salt: 99+% Pure Sodium Chloride

Sugar: 98+% Pure Sucrose

Water: De-ionized, 16 MΩ+ resistivity


HEC: Hydroxyethyl Cellulose

DGBE: 99+% Di(ethylene glycol) butyl ether, [2-(2-butoxyethoxy)ethanol]

Triton X-100 (ultra pure): Polyethylene glycol mono [4-(1,1, 3, 3-tetramethylbutyl)phenyl]ether

4 SIMULATING LIQUID PARAMETERS CHECK

The simulating liquids should be checked at the beginning of a series of SAR measurements to determine if the dielectric parameters are within the tolerances of the specified target values. The relative permittivity and conductivity of the tissue material should be within $\pm 5\%$ of the values given in the table below.

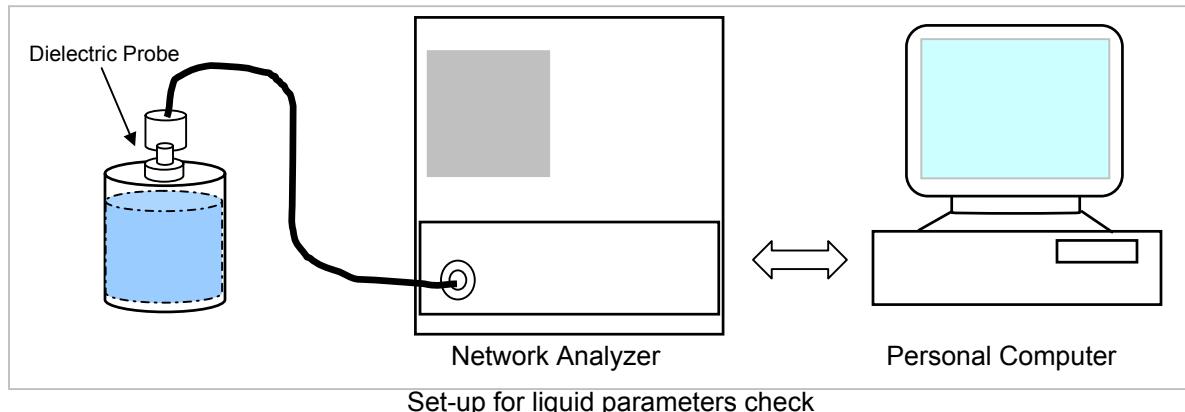

Reference Values of Tissue Dielectric Parameters for Head and Body Phantom (for 150 – 3000 MHz and 5800 MHz)

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in IEEE Standard 1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in IEEE Standard 1528.

Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800 – 2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

**Reference Values of Tissue Dielectric Parameters for Head and Body Phantom
(for 3000 MHz – 5800 MHz)**

In the current guidelines and draft standards for compliance testing of mobile phones (i.e., IEEE P1528, OET 65 Supplement C), the dielectric parameters suggested for head and body tissue simulating liquid are given only at 3.0 GHz and 5.8 GHz. As an intermediate solution, dielectric parameters for the frequencies between 5 to 5.8 GHz were obtained using linear interpolation (see table below).

SPEAG has developed suitable head and body tissue simulating liquids consisting of the following ingredients: de-ionized water, salt and a special composition including mineral oil and an emulgators. Dielectric parameters of these liquids were measured suing a HP 8570C Dielectric Probe Kit in conjunction with HP 8753ES Network Analyzer (30 kHz – 6G Hz). The differences with respect to the interpolated values were well within the desired $\pm 5\%$ for the whole 5 to 5.8 GHz range.

f (MHz)	Head Tissue		Body Tissue		Reference
	rel. permittivity	conductivity	rel. permittivity	conductivity	
3000	38.5	2.40	52.0	2.73	Standard
5800	35.3	5.27	48.2	6.00	Standard
5000	36.2	1.45	49.3	5.07	Interpolated
5100	36.1	4.55	49.1	5.18	Interpolated
5200	36.0	4.66	49.0	5.30	Interpolated
5300	35.9	4.76	48.9	5.42	Interpolated
5400	35.8	4.86	48.7	5.53	Interpolated
5500	35.6	4.96	48.6	5.65	Interpolated
5600	35.5	5.07	48.5	5.77	Interpolated
5700	35.4	5.17	48.3	5.88	Interpolated

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

4.1 SIMULATING LIQUID PARAMETER CHECK RESULT

Simulating Liquid Dielectric Parameter Check Result @ Muscle 2450 MHz

Room Ambient Temperature = 23°C; Relative humidity = 50% Measured by: Jonathan King

Simulating Liquid			Parameters			Measured	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	e'	52.0593	Relative Permittivity (ϵ_r):	52.0593	52.7	-1.22	± 5
2450	22	15	e'	52.0593	Relative Permittivity (ϵ_r):	52.0593	52.7	-1.22	± 5
			e''	14.7778	Conductivity (σ):	2.01416	1.95	3.29	± 5

Liquid Check

Ambient temperature: 23 deg. C; Liquid temperature: 22 deg C

July 09, 2007 10:29 AM

Frequency	e'	e''
2400000000.	52.2451	14.5784
2405000000.	52.2121	14.5962
2410000000.	52.2027	14.6113
2415000000.	52.1820	14.6292
2420000000.	52.1698	14.6594
2425000000.	52.1382	14.6650
2430000000.	52.1213	14.6939
2435000000.	52.1124	14.7318
2440000000.	52.1014	14.7498
2445000000.	52.0770	14.7509
2450000000.	52.0593	14.7778
2455000000.	52.0294	14.7978
2460000000.	52.0122	14.8244
2465000000.	52.0018	14.8502
2470000000.	51.9760	14.8578
2475000000.	51.9608	14.8672
2480000000.	51.9315	14.8951
2485000000.	51.9129	14.9132
2490000000.	51.9025	14.9284
2495000000.	51.8805	14.9551
2500000000.	51.8776	14.9991

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 \epsilon'' = 2 \pi f \epsilon_0 \epsilon''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

Simulating Liquid Parameter Check Result @ Muscle 5GHz

Room Ambient Temperature = 25°C; Relative humidity = 45%

Measured by: Jonathan King

Simulating Liquid			Parameters			Measured	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	e'	46.1409	Relative Permittivity (ϵ_r):	46.1409	49.0	-5.83	± 10
5200	24	15	e''	18.4330	Conductivity (σ):	5.33235	5.30	0.61	± 5

Liquid Check

Ambient temperature: 25 deg. C; Liquid temperature: 24 deg C

June 28, 2007 10:56 AM

Frequency	e'	e''
4600000000.	47.3073	17.6010
4650000000.	47.2246	17.6891
4700000000.	47.1313	17.7537
4750000000.	47.0326	17.8219
4800000000.	46.9496	17.9035
4850000000.	46.8327	17.9735
4900000000.	46.7585	18.0508
4950000000.	46.6525	18.1434
5000000000.	46.5473	18.1737
5050000000.	46.4406	18.2546
5100000000.	46.3557	18.2995
5150000000.	46.2352	18.3753
5200000000.	46.1409	18.4330
5250000000.	46.0411	18.4899
5300000000.	45.9395	18.5595
5350000000.	45.8473	18.6164
5400000000.	45.7397	18.6559
5450000000.	45.6338	18.7221
5500000000.	45.5601	18.7778
5550000000.	45.4411	18.8477
5600000000.	45.3456	18.8688
5650000000.	45.2423	18.9479
5700000000.	45.1773	18.9891
5750000000.	45.0683	19.0481
5800000000.	44.9892	19.1065
5850000000.	44.8655	19.1422
5900000000.	44.7914	19.2191
5950000000.	44.6813	19.2555
6000000000.	44.5821	19.3168

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

Simulating Liquid Parameter Check Result @ Muscle 5GHz

Room Ambient Temperature = 25°C; Relative humidity = 45%

Measured by: Jonathan King

Simulating Liquid			Parameters			Measured	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	e'	46.2525	Relative Permittivity (ϵ_r):	46.2525	49.0	-5.61	± 10
5200	24	15	e''	18.6021	Conductivity (σ):	5.38126	5.30	1.53	± 5

Liquid Check

Ambient temperature: 25 deg. C; Liquid temperature: 24 deg C

June 29, 2007 09:16 AM

Frequency	e'	e''
4600000000.	47.3751	17.7874
4650000000.	47.2472	17.8327
4700000000.	47.1972	17.9728
4750000000.	47.1080	17.9829
4800000000.	46.9963	18.0976
4850000000.	46.9511	18.1419
4900000000.	46.8272	18.2434
4950000000.	46.7206	18.3332
5000000000.	46.6339	18.3435
5050000000.	46.5305	18.4809
5100000000.	46.4461	18.4694
5150000000.	46.3094	18.6058
5200000000.	46.2525	18.6021
5250000000.	46.1313	18.7275
5300000000.	46.0484	18.7509
5350000000.	45.9260	18.8253
5400000000.	45.8241	18.8740
5450000000.	45.7338	18.9430
5500000000.	45.6430	19.0039
5550000000.	45.5281	19.0074
5600000000.	45.4288	19.0816
5650000000.	45.3499	19.1235
5700000000.	45.2232	19.2042
5750000000.	45.1607	19.2488
5800000000.	45.0167	19.2840
5850000000.	44.9832	19.3898
5900000000.	44.9039	19.4336
5950000000.	44.8064	19.4957
6000000000.	44.6600	19.4802

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

Simulating Liquid Parameter Check Result @ Muscle 5GHz

Room Ambient Temperature = 25°C; Relative humidity = 45%

Measured by: Jonathan King

Simulating Liquid			Parameters			Measured	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	e'	44.9892	Relative Permittivity (ϵ_r):	44.9892	48.2	-6.66	± 10
5800	24	15	e'	44.9892	Relative Permittivity (ϵ_r):	44.9892	48.2	-6.66	± 10
			e''	19.1065	Conductivity (σ):	6.16493	6.00	2.75	± 5

Liquid Check

Ambient temperature: 25 deg. C; Liquid temperature: 24 deg C

June 28, 2007 10:56 AM

Frequency	e'	e''
4600000000.	47.3073	17.6010
4650000000.	47.2246	17.6891
4700000000.	47.1313	17.7537
4750000000.	47.0326	17.8219
4800000000.	46.9496	17.9035
4850000000.	46.8327	17.9735
4900000000.	46.7585	18.0508
4950000000.	46.6525	18.1434
5000000000.	46.5473	18.1737
5050000000.	46.4406	18.2546
5100000000.	46.3557	18.2995
5150000000.	46.2352	18.3753
5200000000.	46.1409	18.4330
5250000000.	46.0411	18.4899
5300000000.	45.9395	18.5595
5350000000.	45.8473	18.6164
5400000000.	45.7397	18.6559
5450000000.	45.6338	18.7221
5500000000.	45.5601	18.7778
5550000000.	45.4411	18.8477
5600000000.	45.3456	18.8688
5650000000.	45.2423	18.9479
5700000000.	45.1773	18.9891
5750000000.	45.0683	19.0481
5800000000.	44.9892	19.1065
5850000000.	44.8655	19.1422
5900000000.	44.7914	19.2191
5950000000.	44.6813	19.2555
6000000000.	44.5821	19.3168

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

Simulating Liquid Parameter Check Result @ Muscle 5GHz

Room Ambient Temperature = 25°C; Relative humidity = 45%

Measured by: Jonathan King

Simulating Liquid			Parameters			Measured	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	e'	45.0167	Relative Permittivity (ϵ_r):	45.0167	48.2	-6.60	± 10
5800	24	15	e'	45.0167	Relative Permittivity (ϵ_r):	45.0167	48.2	-6.60	± 10
			e''	19.2840	Conductivity (σ):	6.22220	6.00	3.70	± 5

Liquid Check

Ambient temperature: 25 deg. C; Liquid temperature: 24 deg C

June 29, 2007 09:16 AM

Frequency	e'	e''
4600000000.	47.3751	17.7874
4650000000.	47.2472	17.8327
4700000000.	47.1972	17.9728
4750000000.	47.1080	17.9829
4800000000.	46.9963	18.0976
4850000000.	46.9511	18.1419
4900000000.	46.8272	18.2434
4950000000.	46.7206	18.3332
5000000000.	46.6339	18.3435
5050000000.	46.5305	18.4809
5100000000.	46.4461	18.4694
5150000000.	46.3094	18.6058
5200000000.	46.2525	18.6021
5250000000.	46.1313	18.7275
5300000000.	46.0484	18.7509
5350000000.	45.9260	18.8253
5400000000.	45.8241	18.8740
5450000000.	45.7338	18.9430
5500000000.	45.6430	19.0039
5550000000.	45.5281	19.0074
5600000000.	45.4288	19.0816
5650000000.	45.3499	19.1235
5700000000.	45.2232	19.2042
5750000000.	45.1607	19.2488
5800000000.	45.0167	19.2840
5850000000.	44.9832	19.3898
5900000000.	44.9039	19.4336
5950000000.	44.8064	19.4957
6000000000.	44.6600	19.4802

The conductivity (σ) can be given as:

$$\sigma = \omega \epsilon_0 e'' = 2 \pi f \epsilon_0 e''$$

where $f = \text{target } f * 10^6$

$$\epsilon_0 = 8.854 * 10^{-12}$$

5 SYSTEM PERFORMANCE CHECK

The system performance check is performed prior to any usage of the system in order to guarantee reproducible results. The system performance check verifies that the system operates within its specifications of $\pm 10\%$.

System Performance Check Measurement Conditions

- The measurements were performed in the flat section of the SAM twin phantom filled with Body simulating liquid of the following parameters.
- The DASY4 system with an Isotropic E-Field Probe EX3DV3-SN: 3531 was used for the measurements.
- The dipole was mounted on the small tripod so that the dipole feed point was positioned below the center marking of the flat phantom section and the dipole was oriented parallel to the body axis (the long side of the phantom). The standard measuring distance was 10 mm (above 1 GHz) and 15 mm (below 1 GHz) from dipole center to the simulating liquid surface.
- The coarse grid with a grid spacing of 15 mm was aligned with the dipole.
For 5 GHz band - The coarse grid with a grid spacing of 10 mm was aligned with the dipole.
- Special 5 x 5 x 7 fine cube was chosen for cube integration($dx=dy=7.5\text{mm}$; $dz=5\text{mm}$).
For 5 GHz band - Special 8x8x8 fine cube was chosen for cube integration($dx=dy=4.3\text{mm}$; $dz=3\text{mm}$)
- Distance between probe sensors and phantom surface was set to 4 mm.
For 5 GHz band - Distance between probe sensors and phantom surface was set to 2.0mm
- The dipole input power (forward power) was $250\text{ mW}\pm 3\%$.
- The results are normalized to 1 W input power.

Reference SAR Values for body-tissue

In the table below, the numerical reference SAR values of a SPEAG validation dipoles placed below the flat phantom filled with body-tissue simulating liquid are given. The reference SAR values were calculated using the finite-difference time-domain method and the geometry parameters.

Dipole Type	Distance (mm)	Frequency (MHz)	SAR (1g) [W/kg]	SAR (10g) [W/kg]	SAR (peak) [W/kg]
D450V2	15	450	5.01	3.36	7.22
D835V2	15	835	9.71	6.38	14.1
D900V2	15	900	11.1	7.17	16.3
D1450V2	10	1450	29.6	16.6	49.8
D1800V2	10	1800	38.5	20.3	67.5
D1900V2	10	1900	39.8	20.8	69.6
D2000V2	10	2000	40.9	21.2	71.5
D2450V2	10	2450	51.2	23.7	97.6

Note: All SAR values normalized to 1 W forward power.

Reference SAR Values for body-tissue

In the table below, the numerical reference SAR values of a SPEAG validation dipoles placed below the flat phantom filled with body-tissue simulating liquid are given. The reference SAR values were calculated using finite-difference time-domain FDTD method (feed point-impedance set to 50 ohms) and the mechanical dimensions of the D5GHzV2 dipole (manufactured by SPEAG).

f (MHz)	Head Tissue		Body Tissue		
	SAR _{1g}	SAR _{10g}	SAR _{1g}	SAR _{10g}	SAR _{Peak}
5000	72.9	20.7	68.1	19.2	260.3
5100	74.6	21.1	78.8	19.6	272.3
5200	76.5	21.6	71.8	20.1	284.7
5500	83.3	23.4	79.1	22.0	326.3
5800	78.0	21.9	74.1	20.5	324.7

Note: All SAR values normalized to 1 W forward power.

5.1 SYSTEM PERFORMANCE CHECK RESULTS

System Validation Dipole: D2450V2 SN: 706

Date: July 9, 2007

Ambient Temperature = 23°C; Relative humidity = 50%

Measured by: Jonathan King

Body Simulating Liquid			SAR (mW/g)		Normalized to 1 W	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	1g	13.90	55.6	51.2	8.59	± 10
2450	22	15	1g	13.90	55.6	51.2	8.59	± 10
			10g	6.39	25.56	23.7	7.85	± 10

System Validation Dipole: D5GHzV2 SN 1003

Date: June 28, 2007

Ambient Temperature = 25°C; Relative humidity = 45%

Measured by: Jonathan King

Body Simulating Liquid			SAR (mW/g)		Normalized to 1 W	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	1g	18.60	74.4	71.8	3.62	± 10
5200	24	15	1g	18.60	74.4	71.8	3.62	± 10
			10g	5.31	21.24	20.1	5.67	± 10

Date: June 29, 2007

Ambient Temperature = 25°C; Relative humidity = 45%

Measured by: Jonathan King

Body Simulating Liquid			SAR (mW/g)		Normalized to 1 W	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	1g	18.90	75.6	71.8	5.29	± 10
5200	24	15	1g	18.90	75.6	71.8	5.29	± 10
			10g	5.3	21.2	20.1	5.47	± 10

Date: June 28, 2007

Ambient Temperature = 25°C; Relative humidity = 45%

Measured by: Jonathan King

Body Simulating Liquid			SAR (mW/g)		Normalized to 1 W	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	1g	17.80	71.2	74.1	-3.91	± 10
5800	24	15	1g	17.80	71.2	74.1	-3.91	± 10
			10g	5	20	20.5	-2.44	± 10

Date: June 29, 2007

Ambient Temperature = 25°C; Relative humidity = 45%

Measured by: Jonathan King

Body Simulating Liquid			SAR (mW/g)		Normalized to 1 W	Target	Deviation (%)	Limit (%)
f (MHz)	Temp. (°C)	Depth (cm)	1g	18.80	75.2	74.1	1.48	± 10
5800	24	15	1g	18.80	75.2	74.1	1.48	± 10
			10g	5.23	20.92	20.5	2.05	± 10

6 SAR MEASURMENT PROCEDURE

A summary of the procedure follows:

- a) A measurement of the SAR value at a fixed location is used as a reference value for assessing the power drop of the DUT. The SAR at this point is measured at the start of the test, and then again at the end of the test.
- b) The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 4 mm from the inner surface of the shell. The area covers the entire dimension of the DUT and the horizontal grid spacing is 15 mm x 15 mm. Based on this data, the area of the maximum absorption is determined by Spline interpolation. The first Area Scan covers the entire dimension of the DUT to ensure that the hotspot was correctly identified.

For 5 GHz band - The SAR distribution at the exposed flat section of the flat phantom is measured at a distance of 2.0 mm from the inner surface of the shell. The area covers the entire dimension of the DUT and the horizontal grid spacing is 10 mm x 10 mm. Based on this data, the area of the maximum absorption is determined by Spline interpolation. The first Area Scan covers the entire dimension of the DUT to ensure that the hotspot was correctly identified.

- c) Around this point, a volume of X=Y= 30 and Z=21 mm is assessed by measuring 5 x 5 x 7 mm points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:

For 5 GHz band - Around this point, a volume of X=Y=24 and Z=20 mm is assessed by measuring 7 x 7 x 9 mm points. On the basis of this data set, the spatial peak SAR value is evaluated with the following procedure:

- (i) The data at the surface are extrapolated, since the centre of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation is based on a least square algorithm. A polynomial of the fourth order is calculated through the points in z-axes. This polynomial is then used to evaluate the points between the surface and the probe tip.
- (ii) The maximum interpolated value is searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g and 10 g) are computed using the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one-dimensional splines with the "Not a knot"- condition (in x, y and z-direction). The volume is integrated with the trapezoidal – algorithm. One thousand points (10 x 10 x 10) are interpolated to calculate the averages.
- (iii) All neighbouring volumes are evaluated until no neighbouring volume with a higher average value is found.
- (iv) The SAR value at the same location as in Step (a) is again measured to evaluate the actual power drift.

6.1 DASY4 SAR MEASURMENT PROCEDURE

Step 1: Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. The minimum distance of probe sensors to surface is 2.1 mm. This distance cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties (for example, 1.2 mm for an EX3DV3 probe type).

Step 2: Area Scan

The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4 software can find the maximum locations even in relatively coarse grids. When an Area Scan has measured all reachable points, it computes the field maximal found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE Standard 1528, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

Step 3: Zoom Scan

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The Zoom Scan measures 5 x 5 x 7 points within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

For 5 GHz band – Same as above except the Zoom Scan measures 7 x 7 x 9 points.

Step 4: Power drift measurement

The Power Drift Measurement measures the field at the same location as the most recent power reference measurement within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

Step 5: Z-Scan

The Z Scan measures points along a vertical straight line. The line runs along the Z-axis of a one-dimensional grid. In order to get a reasonable extrapolation, the extrapolated distance should not be larger than the step size in Z-direction.

7 PROCEDURE USED TO ESTABLISH TEST SIGNAL

The following procedures had been used to prepare the EUT for the SAR test.

The client provided a special driver and program, w1_tools, which enable a user to control the frequency and output power of the module.

Each chain is measured separately and the combined power is calculated using:

$$\text{Total Power} = 10 \log (10^{\text{Chain 0 Power}} / 10) + 10^{\text{Chain 2 Power}} / 10)$$

The cable assembly insertion loss of 20.3 dB (including attenuator and connectors) was entered as an offset in the power meter to allow for direct reading of power.

RF Conducted Output Power Measurement Results:

See Broadcom's Operational Description document for Average Power information.

8 SAR MEASURMENT RESULTS

THE MAIN ANTENNA WAS NOT TESTED DUE TO THE FAR PLACEMENT AWAY FROM THE USER'S BODY.

8.1 LAP-HELD - MIMO&AUX. ANTENNA – 2.4 GHZ BAND



802.11b (1Mbps)

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
1	2412			
6	2437	0.057	-0.061	0.058
11	2462			

802.11g (6Mbps)

1	2412			
6	2437	0.050	-0.011	0.050
11	2462			

802.11n MIMO HT20M (6.5Mbps)

1	2412			
6	2437	0.037	-0.068	0.038
11	2462			

802.11n MIMO HT40M (13.5Mbps)

1	2412			
6	2437	0.017	0.000	0.017
11	2462			

Notes:

- 1) The exact method of extrapolation is Measured SAR $\times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

8.2 LAP HELD POSITION – MIMO&AUX. ANTENNA - 5.2 GHZ BAND

**802.11a**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
36	5180			
52	5260	0.017	-0.033	0.017
64	5320	0.023	0.000	0.023

802.11n 20M (6.5 Mb/s)

36	5180			
52	5260			
64	5320			

802.11n 40M (13.5 Mb/s)

38	5190			
54	5270	0.048	0.000	0.048
62	5310			

Notes:

- 1) The exact method of extrapolation is Measured SAR x 10^(-drift/10). The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

8.3 LAP HELD POSITION – MIMO&AUX. ANTENNA - 5.8 GHZ BAND

**802.11a**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
149	5745			
157	5785	0.113	0.000	0.113
165	5825			

802.11n 20M (6.5 Mb/s)

149	5745			
157	5785	0.066	0.000	0.066
165	5825			

802.11n 40M (13.5 Mb/s)

151	5755	0.071	0.000	0.071
159	5795	0.062	0.000	0.062

Notes:

- 1) The exact method of extrapolation is Measured SAR x 10^{-(drift/10)}. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) The SAR measured at the middle channel for this configuration is at least 3 dB lower (0.8 mW/g) than SAR limit (1.6 mW/g), thus testing at low & high channel is optional.
- 3) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

9 MEASURMENT UNCERTAINTY

9.1 MEASURMENT UNCERTAINTY FOR 300 MHz – 3000 MHz

Uncertainty component	Tol. (±%)	Probe Dist.	Div.	Ci (1g)	Ci (10g)	Std. Unc.(±%)	
						Ui (1g)	Ui(10g)
Measurement System							
Probe Calibration	4.80	N	1	1	1	4.80	4.80
Axial Isotropy	4.70	R	1.732	0.707	0.707	1.92	1.92
Hemispherical Isotropy	9.60	R	1.732	0.707	0.707	3.92	3.92
Boundary Effects	1.00	R	1.732	1	1	0.58	0.58
Linearity	4.70	R	1.732	1	1	2.71	2.71
System Detection Limits	1.00	R	1.732	1	1	0.58	0.58
Readout Electronics	1.00	N	1	1	1	1.00	1.00
Response Time	0.80	R	1.732	1	1	0.46	0.46
Integration Time	2.60	R	1.732	1	1	1.50	1.50
RF Ambient Conditions - Noise	1.59	R	1.732	1	1	0.92	0.92
RF Ambient Conditions - Reflections	0.00	R	1.732	1	1	0.00	0.00
Probe Positioner Mechanical Tolerance	0.40	R	1.732	1	1	0.23	0.23
Probe Positioning With Respect to Phantom Shell	2.90	R	1.732	1	1	1.67	1.67
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	3.90	R	1.732	1	1	2.25	2.25
Test sample Related							
Test Sample Positioning	1.10	N	1	1	1	1.10	1.10
Device Holder Uncertainty	3.60	N	1	1	1	3.60	3.60
Power and SAR Drift Measurement	5.00	R	1.732	1	1	2.89	2.89
Phantom and Tissue Parameters							
Phantom Uncertainty	4.00	R	1.732	1	1	2.31	2.31
Liquid Conductivity - Target	5.00	R	1.732	0.64	0.43	1.85	1.24
Liquid Conductivity - Meas.	8.60	N	1	0.64	0.43	5.50	3.70
Liquid Permittivity - Target	5.00	R	1.732	0.6	0.49	1.73	1.41
Liquid Permittivity - Meas.	3.30	N	1	0.6	0.49	1.98	1.62
Combined Standard Uncertainty	RSS					11.44	10.49
Expanded Uncertainty (95% Confidence Interval)	K=2					22.87	20.98

Notes for table

1. Tol. - tolerance in influence quality
2. N - Nominal
3. R - Rectangular
4. Div. - Divisor used to obtain standard uncertainty
5. Ci - is the sensitivity coefficient

9.2 MEASURMENT UNCERTAINTY 3 GHz – 6 GHz

Uncertainty component	Tol. (±%)	Probe Dist.	Div.	Ci (1g)	Ci (10g)	Std. Unc.(±%)	
						Ui (1g)	Ui(10g)
Measurement System							
Probe Calibration	4.80	N	1	1	1	4.80	4.80
Axial Isotropy	4.70	R	1.732	0.707	0.707	1.92	1.92
Hemispherical Isotropy	9.60	R	1.732	0.707	0.707	3.92	3.92
Boundary Effects	1.00	R	1.732	1	1	0.58	0.58
Linearity	4.70	R	1.732	1	1	2.71	2.71
System Detection Limits	1.00	R	1.732	1	1	0.58	0.58
Readout Electronics	1.00	N	1	1	1	1.00	1.00
Response Time	0.80	R	1.732	1	1	0.46	0.46
Integration Time	2.60	R	1.732	1	1	1.50	1.50
RF Ambient Conditions - Noise	3.00	R	1.732	1	1	1.73	1.73
RF Ambient Conditions - Reflections	3.00	R	1.732	1	1	1.73	1.73
Probe Positioner Mechanical Tolerance	0.40	R	1.732	1	1	0.23	0.23
Probe Positioning With Respect to Phantom Shell	2.90	R	1.732	1	1	1.67	1.67
Extrapolation, interpolation, and integration algorithms for max. SAR evaluation	3.90	R	1.732	1	1	2.25	2.25
Test sample Related							
Test Sample Positioning	1.10	N	1	1	1	1.10	1.10
Device Holder Uncertainty	3.60	N	1	1	1	3.60	3.60
Power and SAR Drift Measurement	5.00	R	1.732	1	1	2.89	2.89
Phantom and Tissue Parameters							
Phantom Uncertainty	4.00	R	1.732	1	1	2.31	2.31
Liquid Conductivity - Target	5.00	R	1.732	0.64	0.43	1.85	1.24
Liquid Conductivity - Meas.	8.60	N	1	0.64	0.43	5.50	3.70
Liquid Permittivity - Target	5.00	R	1.732	0.6	0.49	1.73	1.41
Liquid Permittivity - Meas.	3.30	N	1	0.6	0.49	1.98	1.62
Combined Standard Uncertainty							
RSS							
K=2							
11.66							
23.32							
21.46							

Notes for table



1. Tol. - tolerance in influence quantity
2. N - Nominal
3. R - Rectangular
4. Div. - Divisor used to obtain standard uncertainty
5. Ci - is the sensitivity coefficient

10 EQUIPMENT LIST AND CALIBRATION


Name of Equipment	Manufacturer	Type/Model	Serial Number	Cal. Due date		
				MM	DD	Year
Robot - Six Axes	Stäubli	RX90BL	N/A			N/A
Robot Remote Control	Stäubli	CS7MB	3403-91535			N/A
DASY4 Measurement Server	SPEAG	SEUMS001BA	1041			N/A
Probe Alignment Unit	SPEAG	LB (V2)	261			N/A
SAM Phantom (SAM1)	SPEAG	QD000P40CA	1185			N/A
SAM Phantom (SAM2)	SPEAG	QD000P40CA	1050			N/A
Oval Flat Phantom (ELI 4.0)	SPEAG	QD OVA001 B	1003			N/A
Electronic Probe kit	HP	85070C	N/A			N/A
S-Parameter Network Analyzer	Agilent	8753ES-6	US39173569	2	14	2008
E-Field Probe	SPEAG	EX3DV4	3554	4	24	2008
Thermometer	ERTCO	639-1S	1718	11	7	2007
Data Acquisition Electronics	SPEAG	DAE3 V1	427	11	16	2007
System Validation Dipole	SPEAG	D2450V2	706	4	27	2008
System Validation Dipole	SPEAG	D5GHzV2	1003	11	22	2007
Signal Generator	R&S	SMP 04	DE34210	10	9	2007
Power Meter	Giga-tronics	8651A	8651404	4	3	2008
Amplifier	Mini-Circuits	ZVE-8G	360			N/A
Amplifier	Mini-Circuits	ZHL-42W	D072701-5			N/A
Simulating Liquid	CCS	M2450	N/A			Within 24 hrs of first test
Simulating Liquid	SPEAG	M5200-5800	N/A			Within 24 hrs of first test

11 PHOTOS


EUT

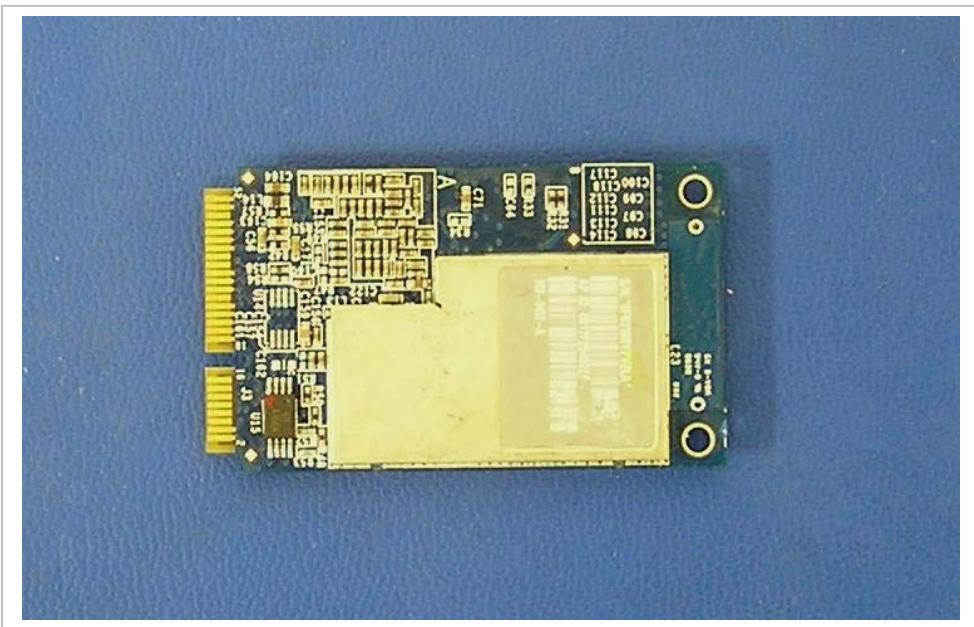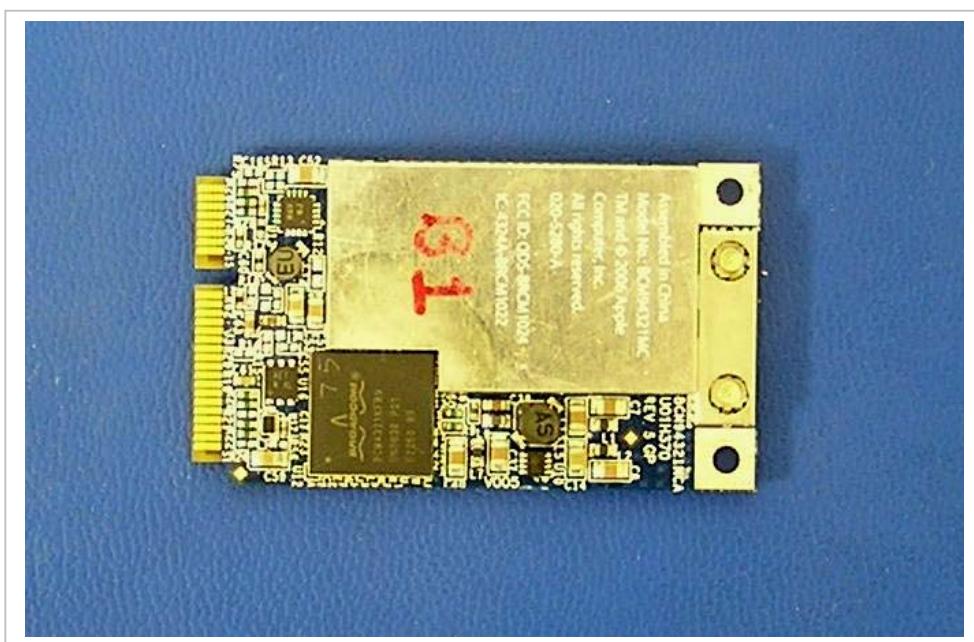

Host: Dell XPS

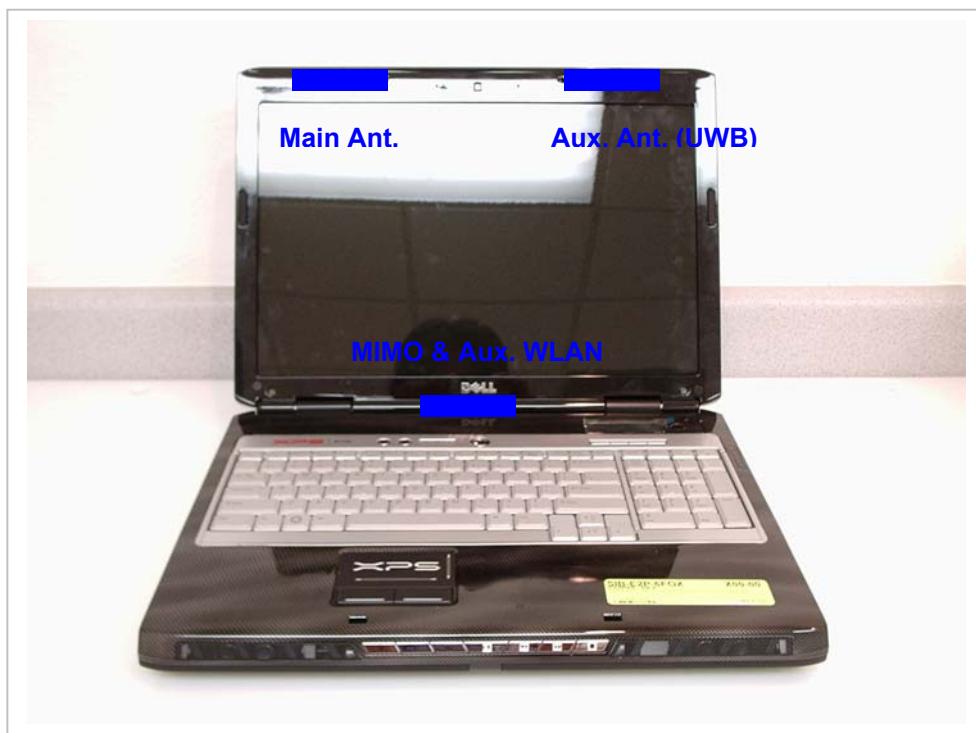

EUT and Antenna Location

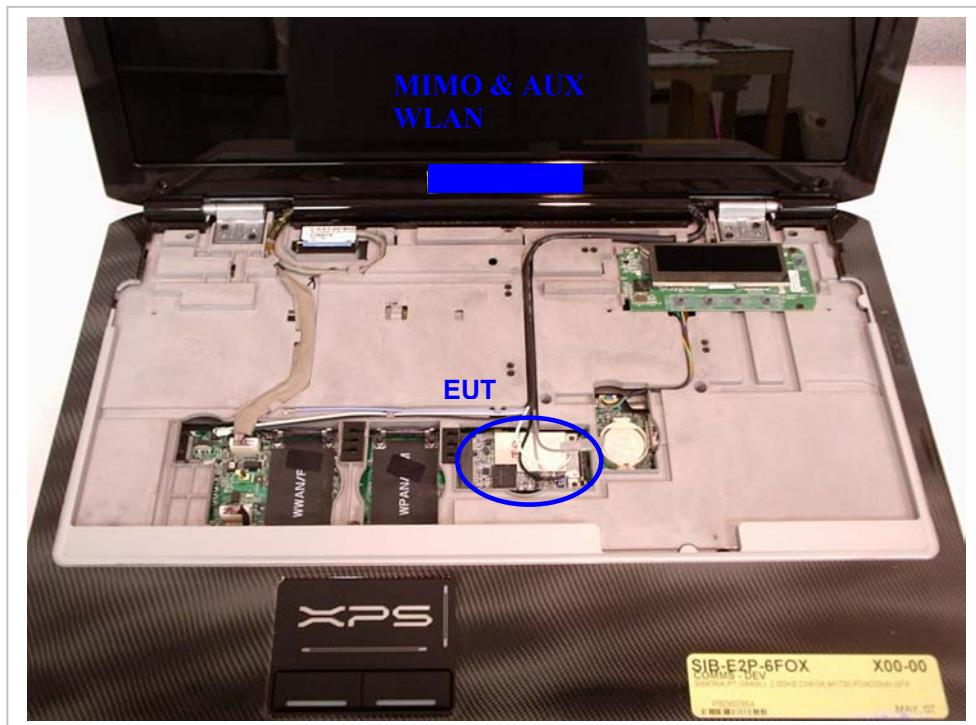

12 ATTACHMENTS

No.	Contents	No. Of Pages
1	System Performance Check Plots	10
2	SAR Test Plots	15
3	Certificate of E-Field Probe - EX3DV4SN3554	10
4	Certificate of System Validation Dipole - D2450 SN:706	9
5	Certificate of System Validation Dipole - D5GHzV2 SN:1003	10

END OF REPORT