



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 7
CERTIFICATION TEST REPORT**

**FOR
BROADCOM 802.11g WLAN PCI-E MINI CARD**

**MODEL NUMBER: BCM94312HMG
FCC ID: QDS-BRCM1030
IC: 4324A-BRCM1030**

REPORT NUMBER: 07U11426-1, REVISION A

ISSUE DATE: NOVEMBER 15, 2007

Prepared for
**BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, USA**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	11/12/07	Initial Issue	Hsin Fu Shih
A	11/15/07	Modified EUT name and corrected IC # on cover	T. Hong

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. MEASUREMENT UNCERTAINTY	5
5. EQUIPMENT UNDER TEST	6
5.1. DESCRIPTION OF EUT	6
5.2. MAXIMUM OUTPUT POWER	6
5.3. DESCRIPTION OF AVAILABLE ANTENNAS	6
5.4. SOFTWARE AND FIRMWARE	6
5.5. WORST-CASE CONFIGURATION AND MODE	6
5.6. CHANNELS AND TEST ITEMS	7
5.7. DESCRIPTION OF TEST SETUP	8
6. TEST AND MEASUREMENT EQUIPMENT	10
7. ANTENNA PORT TEST RESULTS	11
7.1. 802.11b MODE IN THE 2.4 GHz BAND	11
7.1.1. 6 dB BANDWIDTH	11
7.1.2. 99% BANDWIDTH	14
7.1.3. OUTPUT POWER	17
7.1.4. POWER SPECTRAL DENSITY	20
7.1.5. CONDUCTED SPURIOUS EMISSIONS	23
7.2. 802.11g MODE IN THE 2.4 GHz BAND	27
7.2.1. 6 dB BANDWIDTH	27
7.2.2. 99% BANDWIDTH	30
7.2.3. OUTPUT POWER	33
7.2.4. POWER SPECTRAL DENSITY	37
7.2.5. CONDUCTED SPURIOUS EMISSIONS	41
8. RADIATED TEST RESULTS	45
8.1. LIMITS AND PROCEDURE	45
8.1.1. TRANSMITTER ABOVE 1 GHz FOR 802.11b MODE IN THE 2.4 GHz BAND	46
8.1.2. TRANSMITTER ABOVE 1 GHz FOR 802.11g MODE IN THE 2.4 GHz BAND	52
8.2. RECEIVER ABOVE 1 GHz	62
8.2.1. RECEIVER ABOVE 1 GHz 802.11 b MODE IN THE 2.4 GHz BAND	62
8.2.2. RECEIVER ABOVE 1 GHz 802.11g MODE IN THE 2.4 GHz BAND	63
8.3. WORST-CASE BELOW 1 GHz	64
9. AC POWER LINE CONDUCTED EMISSIONS	66
10. MAXIMUM PERMISSIBLE EXPOSURE	70
11. SETUP PHOTOS	74

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, USA

EUT DESCRIPTION: BROADCOM 802.11g WLAN PCI-E MINI CARD

MODEL: BCM94312HMG

SERIAL NUMBER: 200-116263-0000G B

DATE TESTED: NOVEMBER 05 - 12, 2007


APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C and Subpart E	No Non-Compliance Noted
RSS-210 Issue 7 Annex 8 and RSS-GEN Issue 2	No Non-Compliance Noted

Compliance Certification Services, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by Compliance Certification Services and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by Compliance Certification Services will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:

Tested By:



HSIN FU SHIH
EMC SUPERVISOR
COMPLIANCE CERTIFICATION SERVICES



VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Radiated Emission, 30 to 200 MHz	+/- 3.3 dB
Radiated Emission, 200 to 1000 MHz	+4.5 / -2.9 dB
Radiated Emission, 1000 to 2000 MHz	+4.5 / -2.9 dB
Power Line Conducted Emission	+/- 2.9 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11g WLAN Transceiver card manufactured by Broadcom.
Model number is BCM94312HMG.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2462	802.11b	22.28	169.04
2412 - 2462	802.11g	23.05	201.84

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a stamped metal antenna (Hitachi, HMT05/HFT17-DL07), with a maximum gain of 3.9 dBi.

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was BCMWL5, rev. 4.170.20.2.

The test utility software used during testing was wl_tool, rev. 4.150 RC27.0.

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power.

5.6. CHANNELS AND TEST ITEMS

	CHANNELS & TEST ITEMS			
11b	Bandedge	PSD	Ch. Power	Cond./Rad.
CH1	*	*	*	**
CH6	N/A	*	*	**
CH11	*	*	*	**
11g	Bandedge	PSD	Ch. Power	Cond./Rad.
CH1	*	*	*	**
CH2	*	*	*	N/A
CH6	N/A	*	*	**
CH10	*	*	*	N/A
CH11	*	*	*	**
<u>NOTE:</u>				
	* : Base on Band Edge power setting			
	** : Set to highest output power			

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop PC	Dell	Inspiron 0000	TD429	DOC
AC Adapter	Dell	ADP-60NH B	MOW00528000191	DOC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identic Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	1.2 m	N/A
2	DC	1	DC	Unshielded	1.2 m	N/A

TEST SETUP

The EUT is installed in a host laptop computer via Express card to MiniPCI-E adapter boards during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

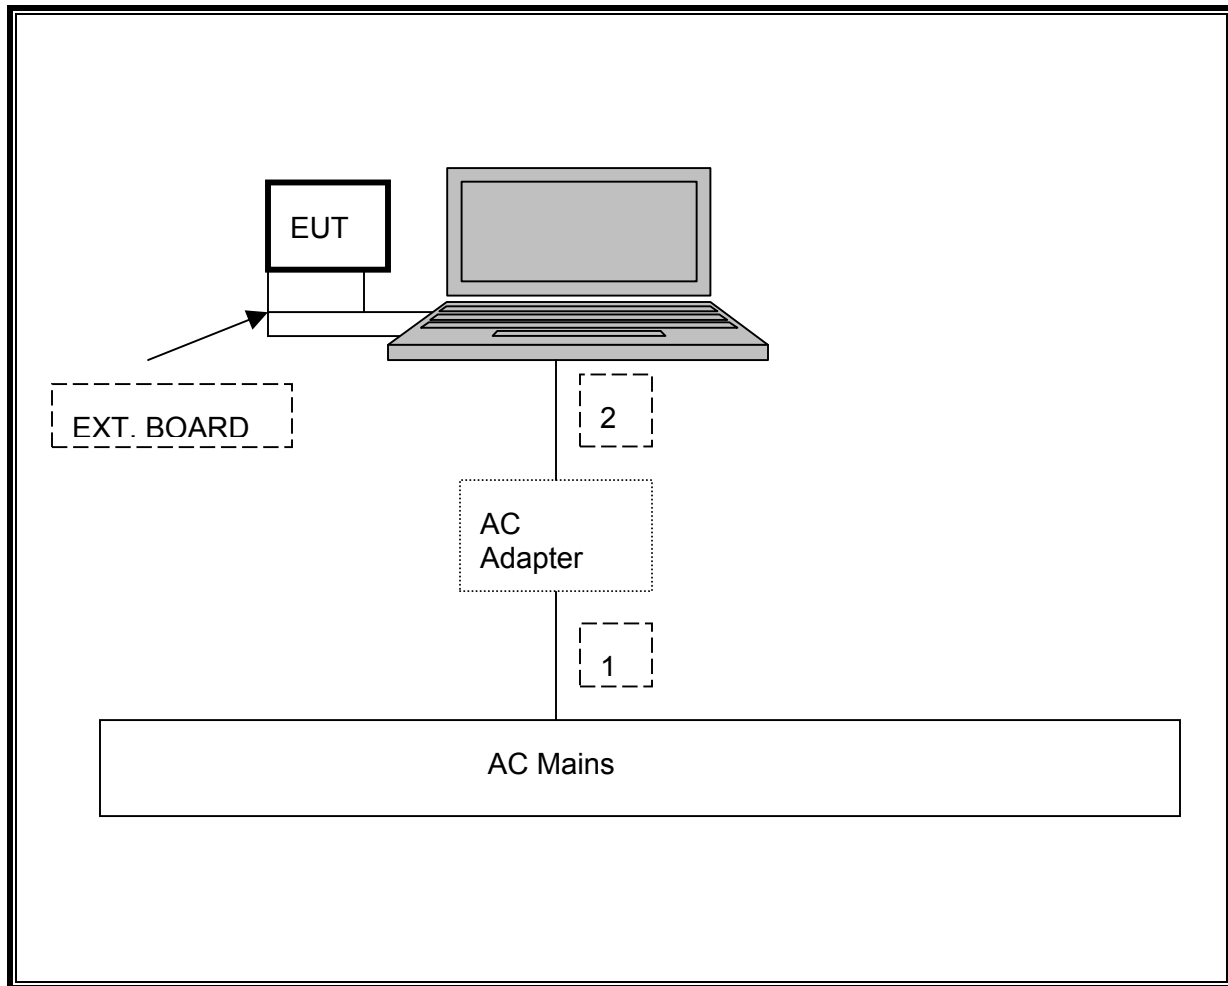

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	05/02/06	08/07/08
Antenna, Horn, 18 GHz	ETS	3117	C01006	04/15/07	4/15/08
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01052	08/03/07	8/3/08
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	10/13/07	10/13/08
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	09/15/06	9/15/08
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	N02481	09/15/07	9/15/08
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	10/16/06	1/27/08
Peak power Meter	Agilent / HP	E4416A	Broadcom	N/A	N/A
Highpass Filter, 4.0 GHz	Micro-Tronics	HPM13351	N02709	CNR	CNR
Power Sensor	Agilent / HP	E9323A	Broadcom	CNR	CNR

7. ANTENNA PORT TEST RESULTS

7.1. 802.11b MODE IN THE 2.4 GHz BAND

7.1.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	9.25	0.5
Middle	2437	9.58	0.5
High	2462	9.58	0.5

6 dB BANDWIDTH

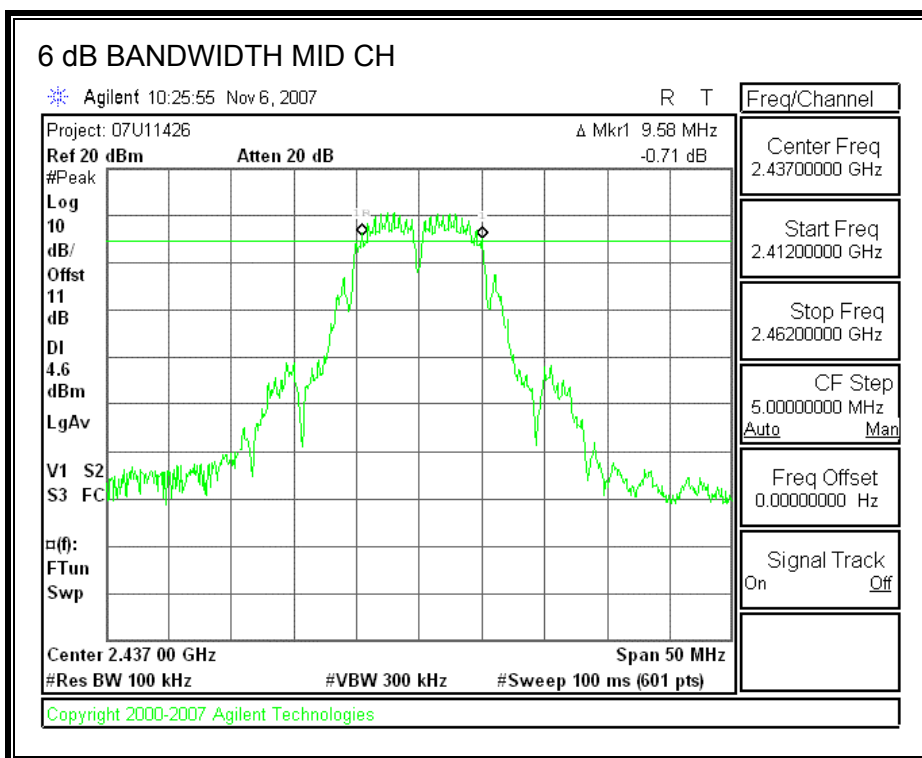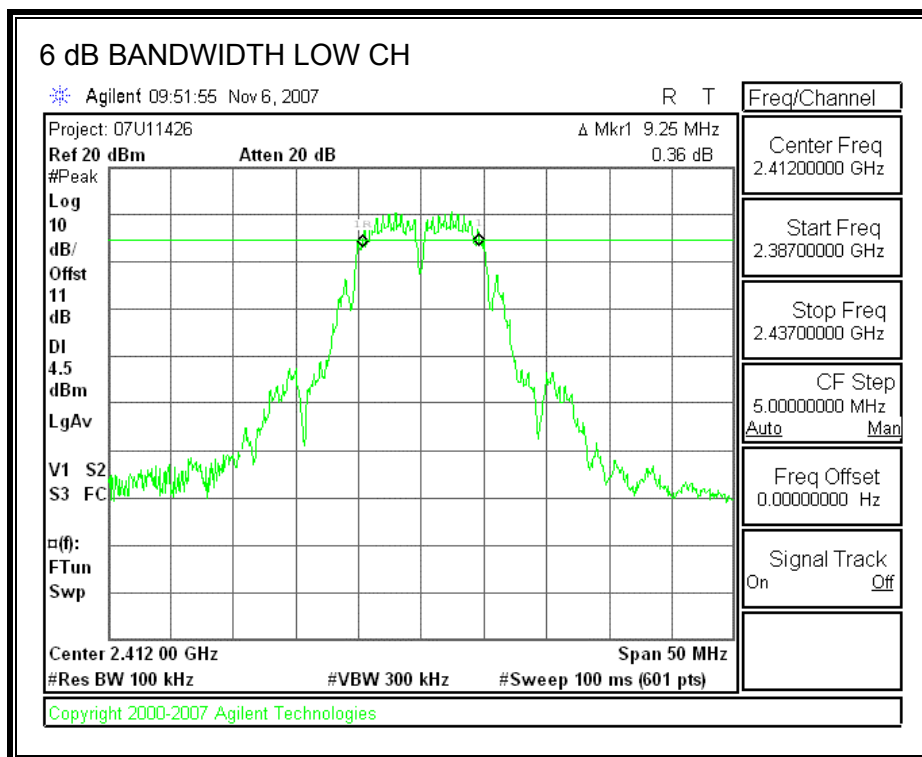

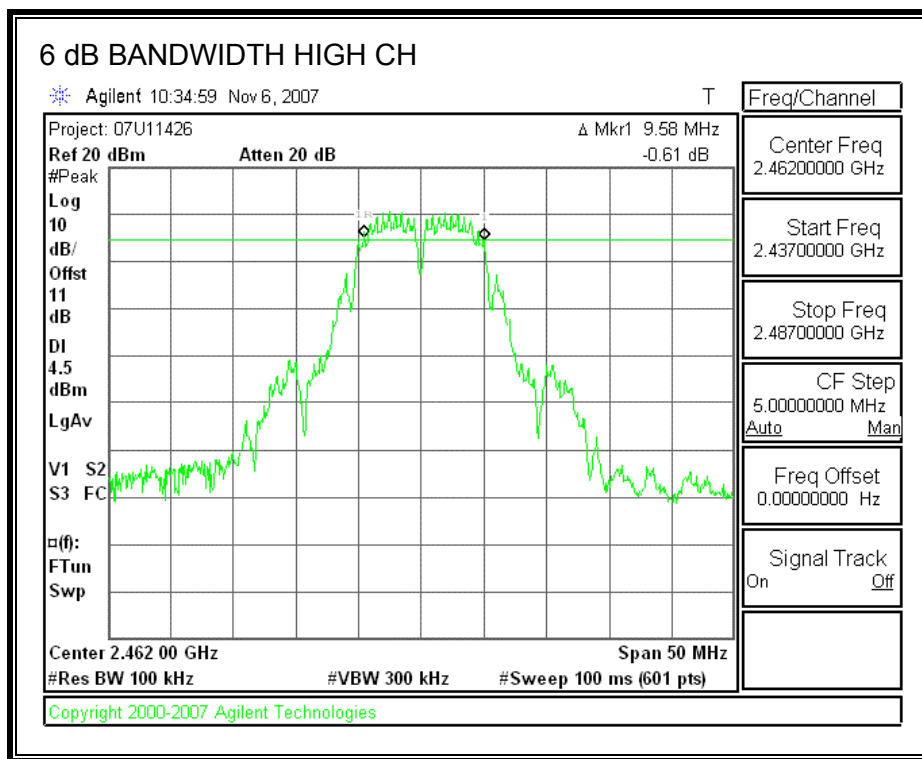

7.1.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	11.0252
Middle	2437	11.1854
High	2462	11.0716

99% BANDWIDTH

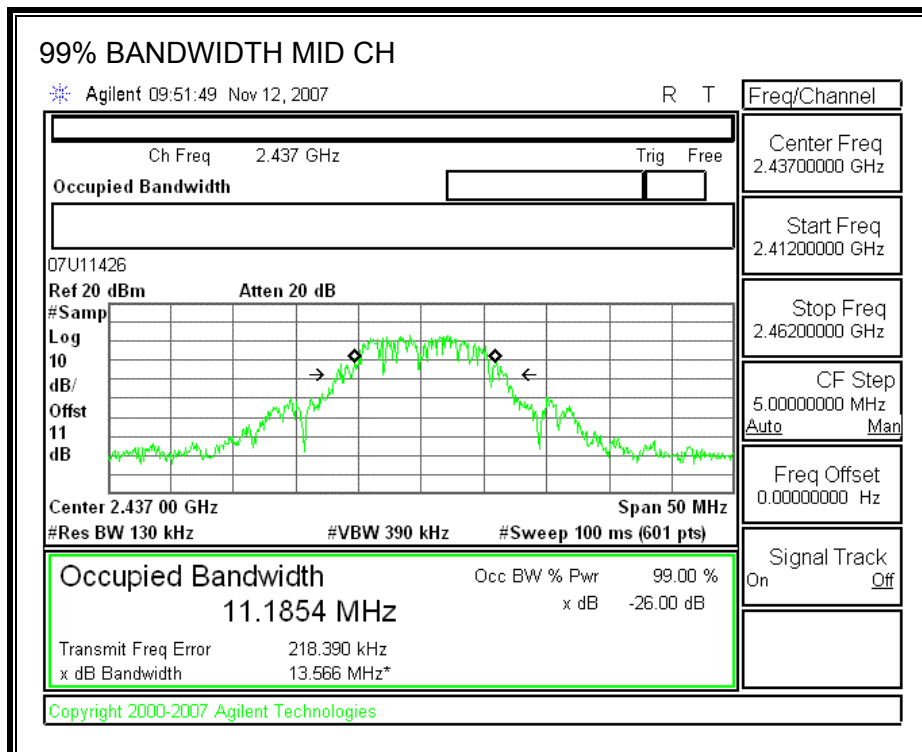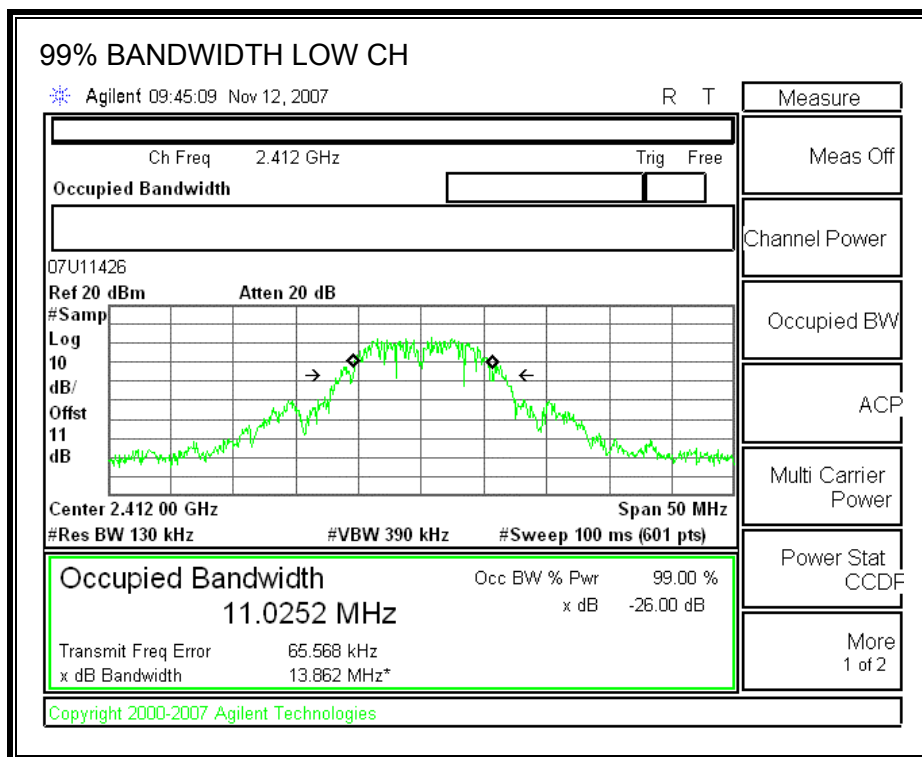

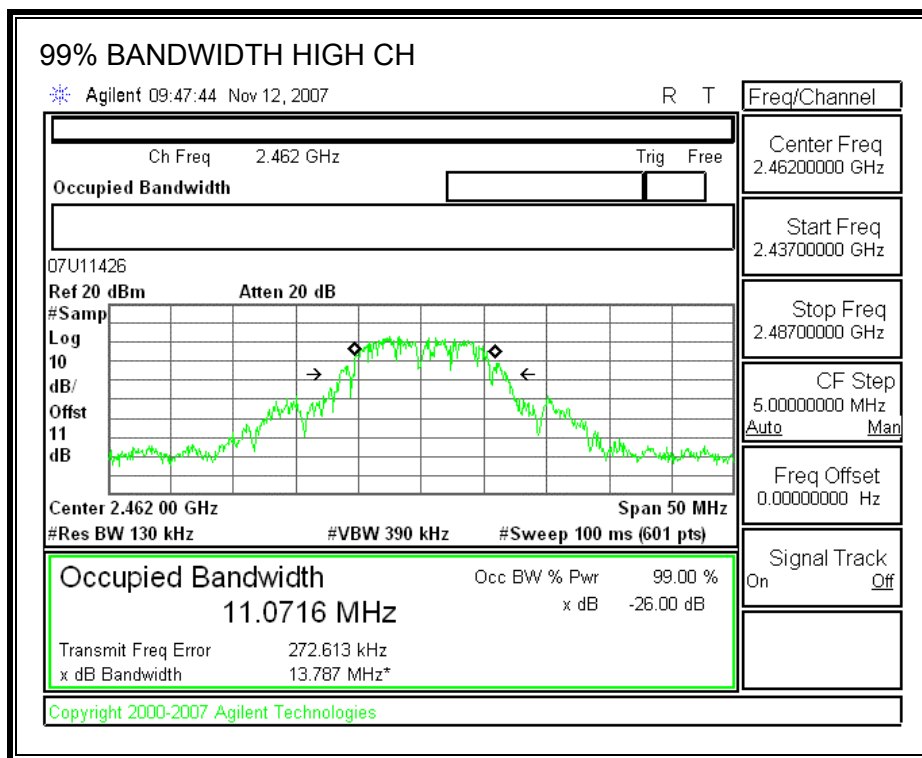

7.1.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE


Peak power is measured using the spectrum analyzer's internal channel power integration function. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.

RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	22.28	30	-7.72
Middle	2437	22.22	30	-7.78
High	2462	22.11	30	-7.89

OUTPUT POWER

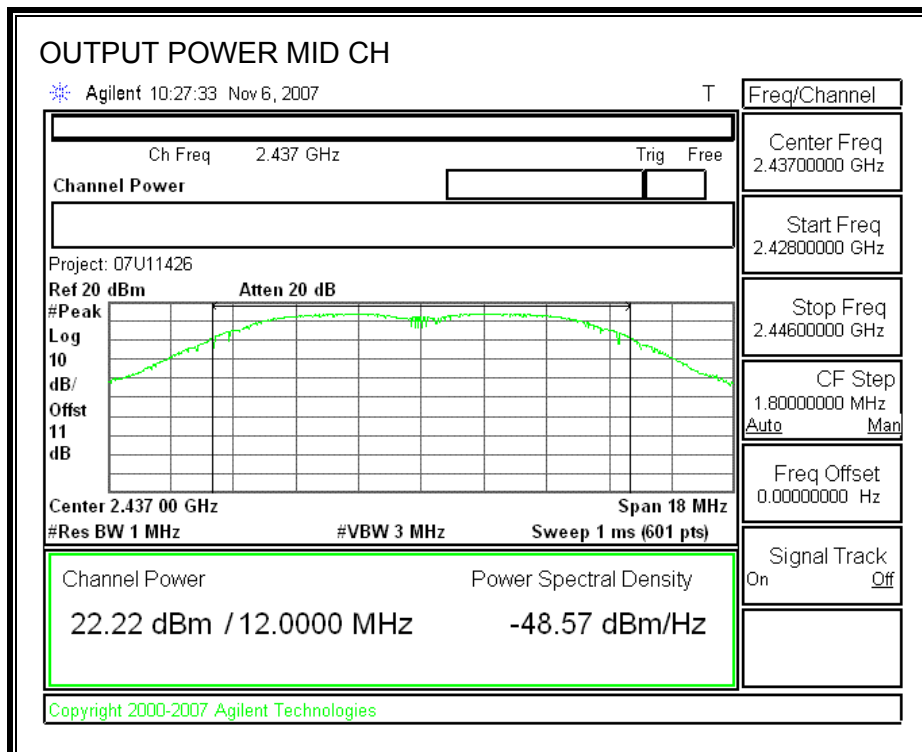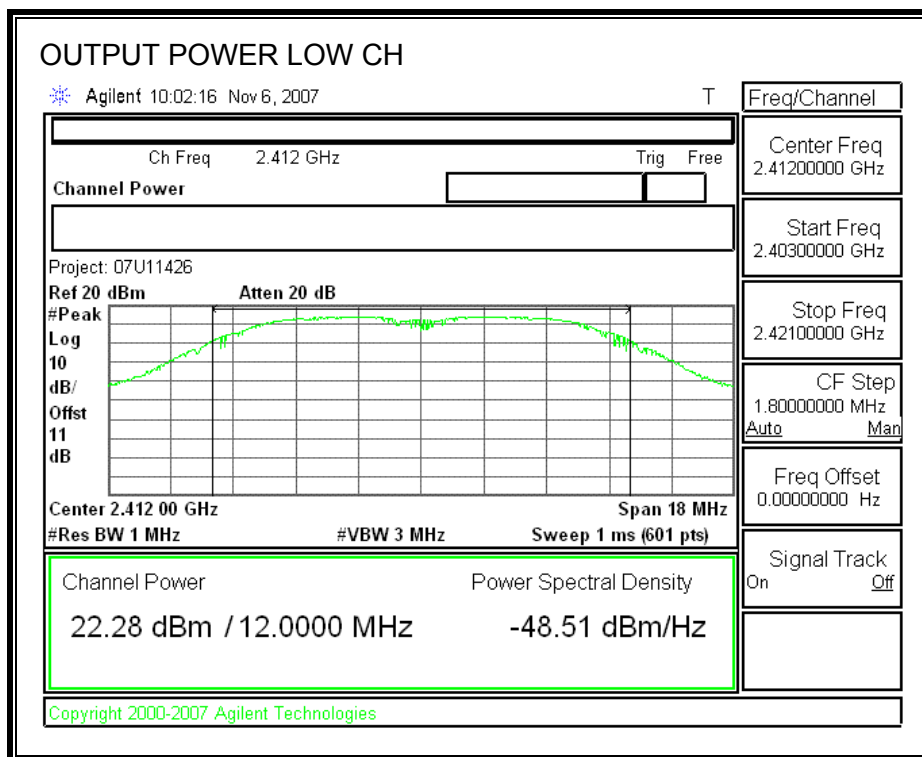

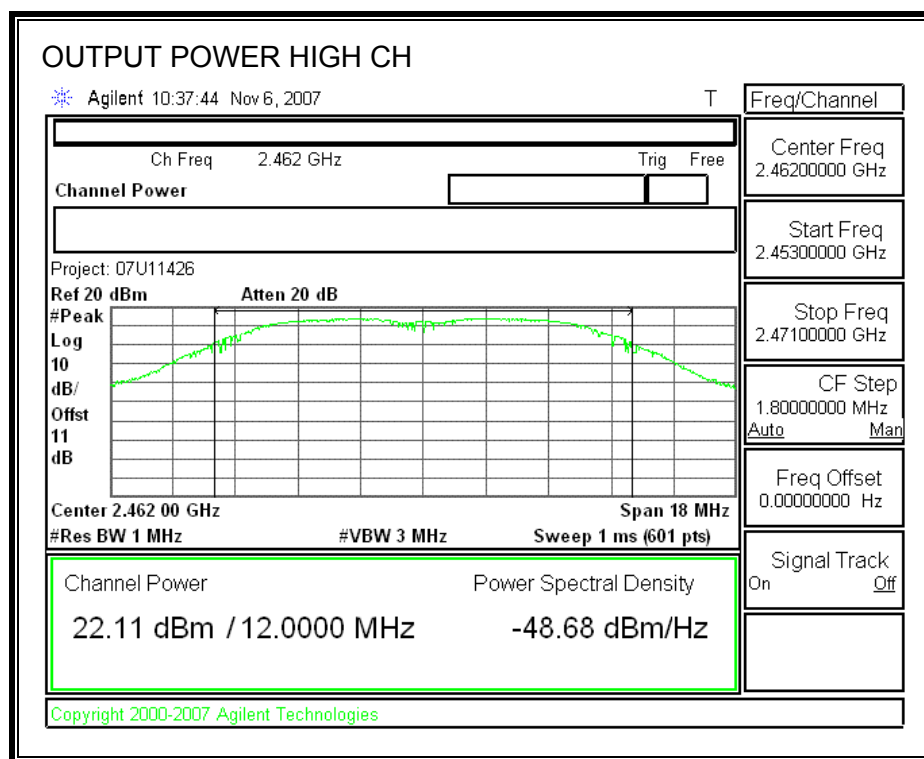

7.1.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.

RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-3.46	8	-11.46
Middle	2437	-1.82	8	-9.82
High	2462	-2.61	8	-10.61

POWER SPECTRAL DENSITY

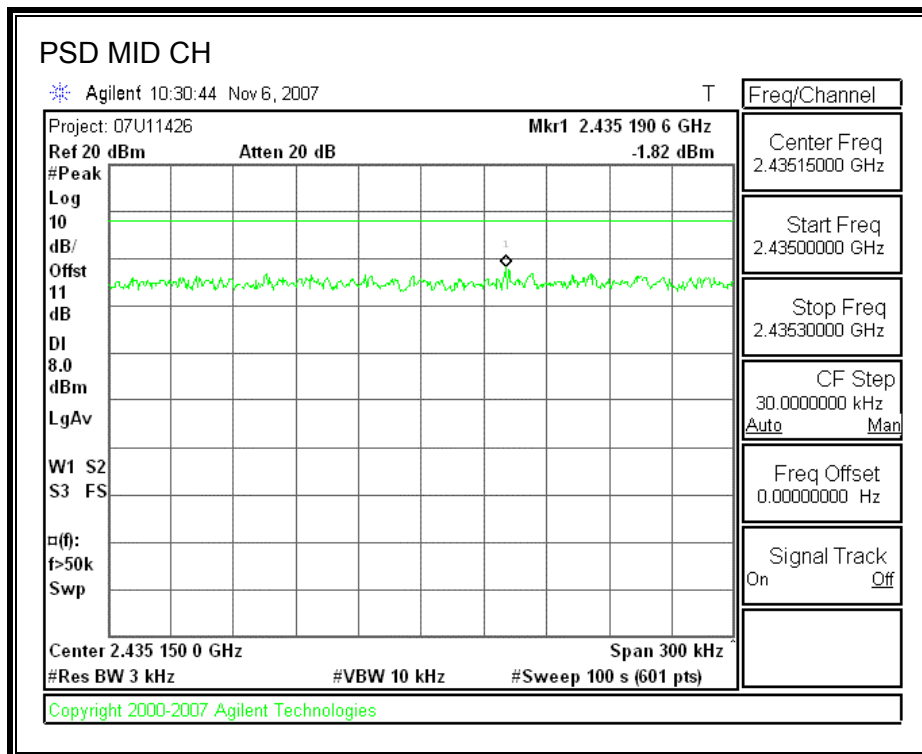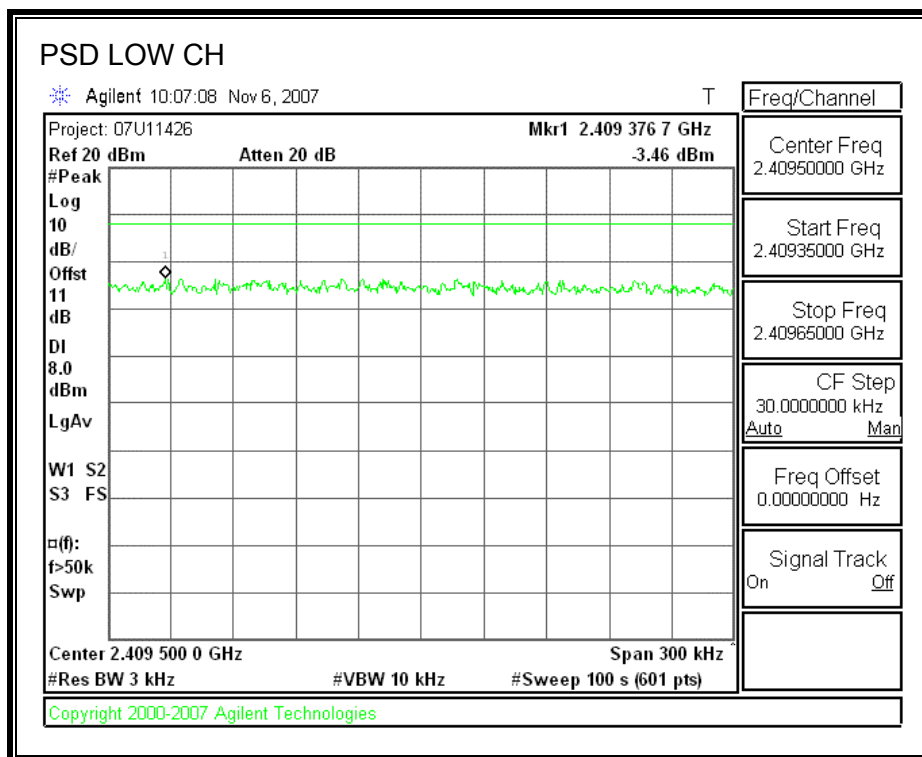

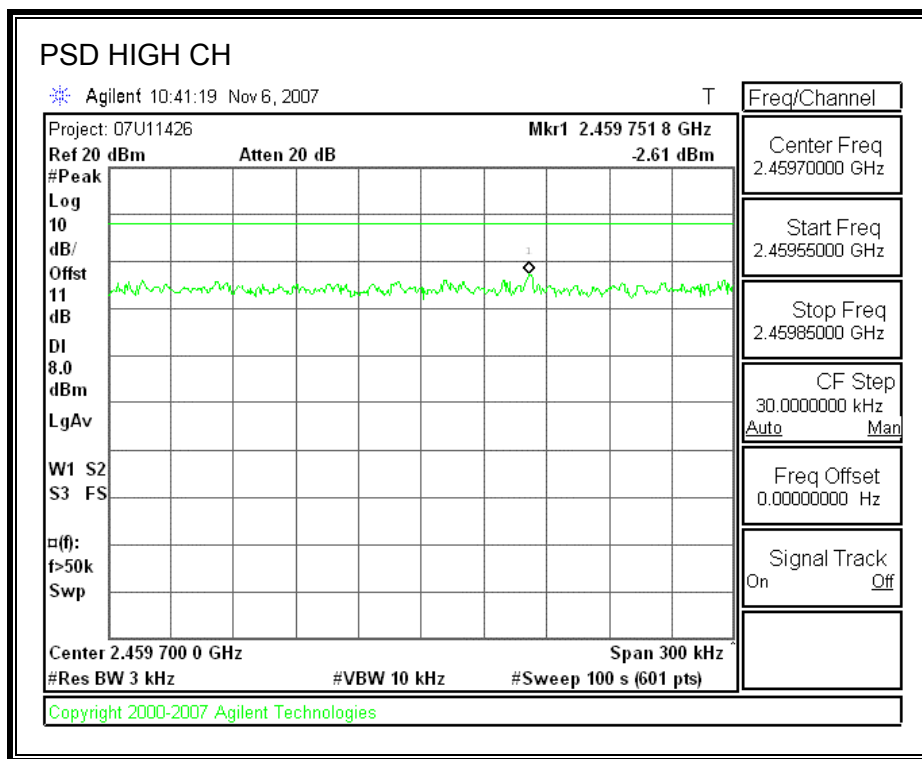

7.1.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

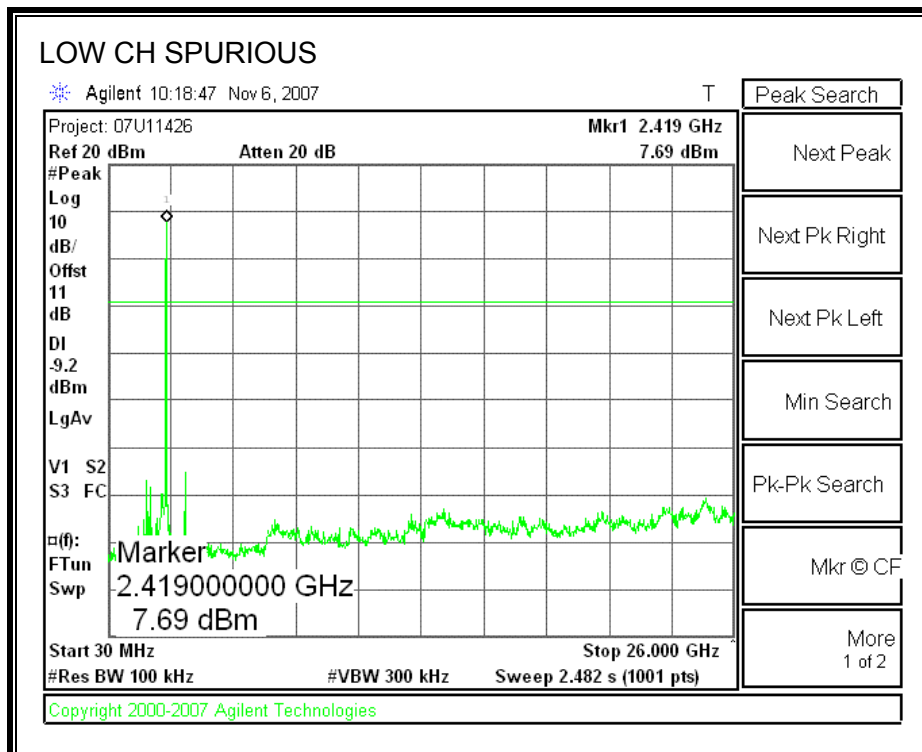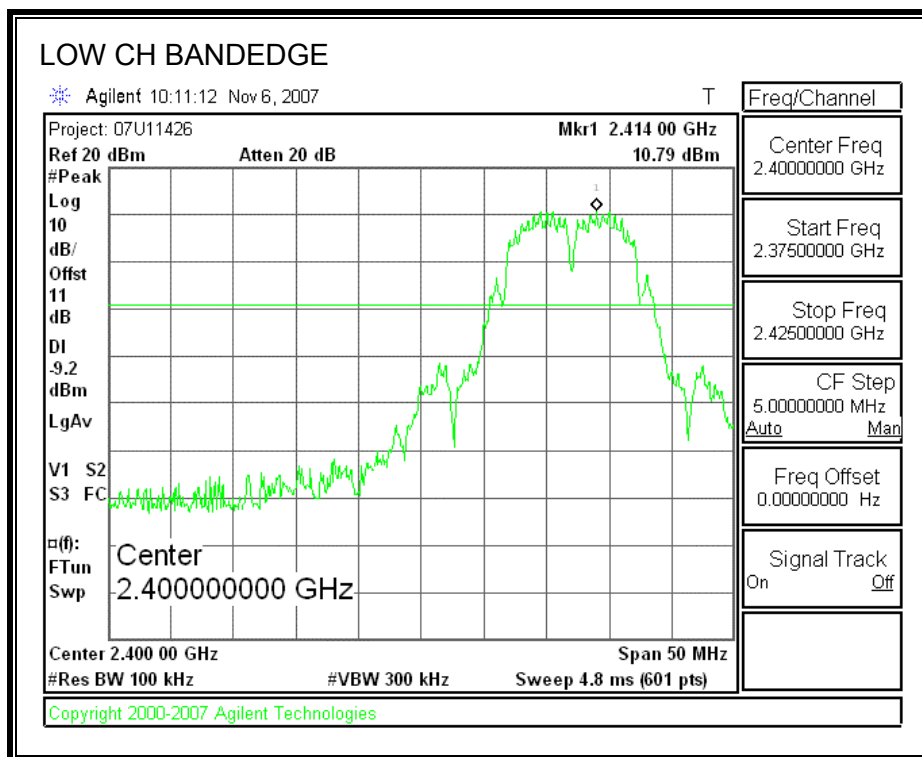

SPURIOUS EMISSIONS, MID CHANNEL

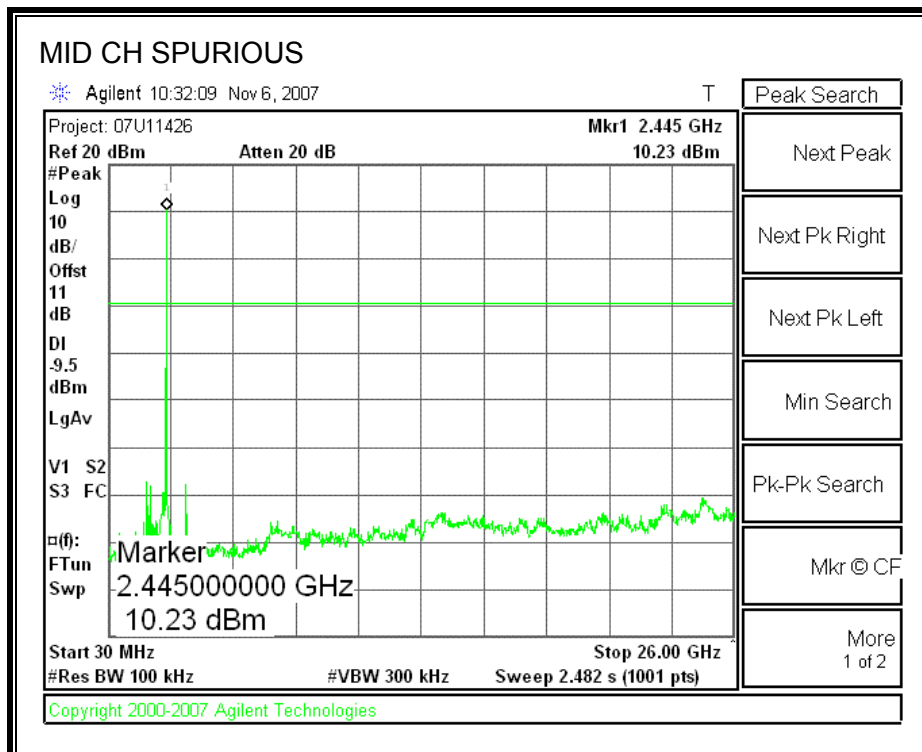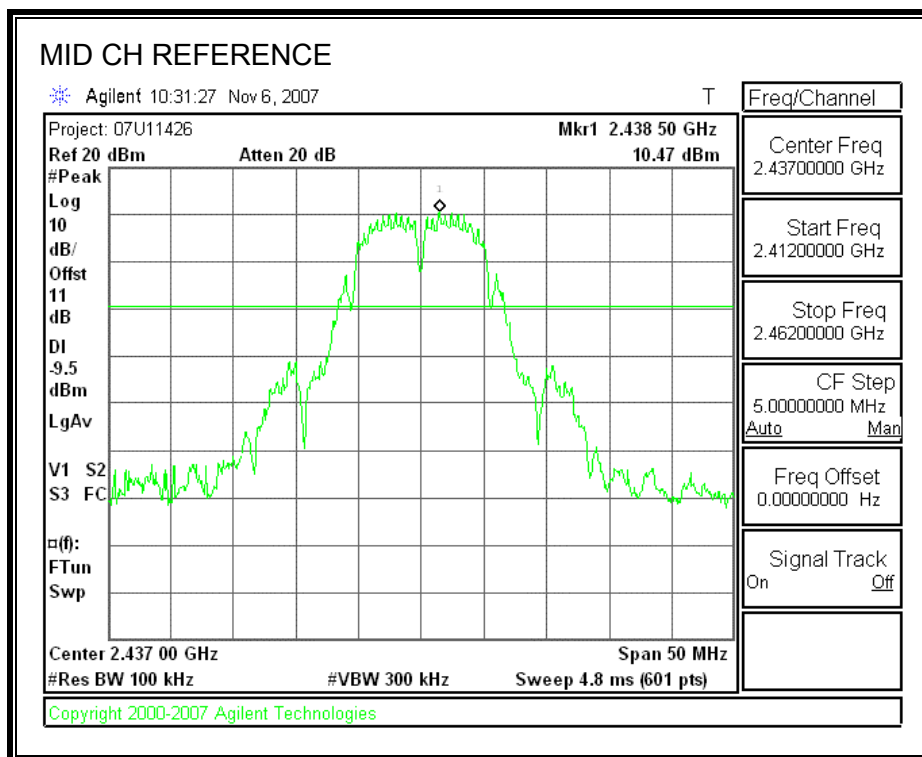

SPURIOUS EMISSIONS, HIGH CHANNEL

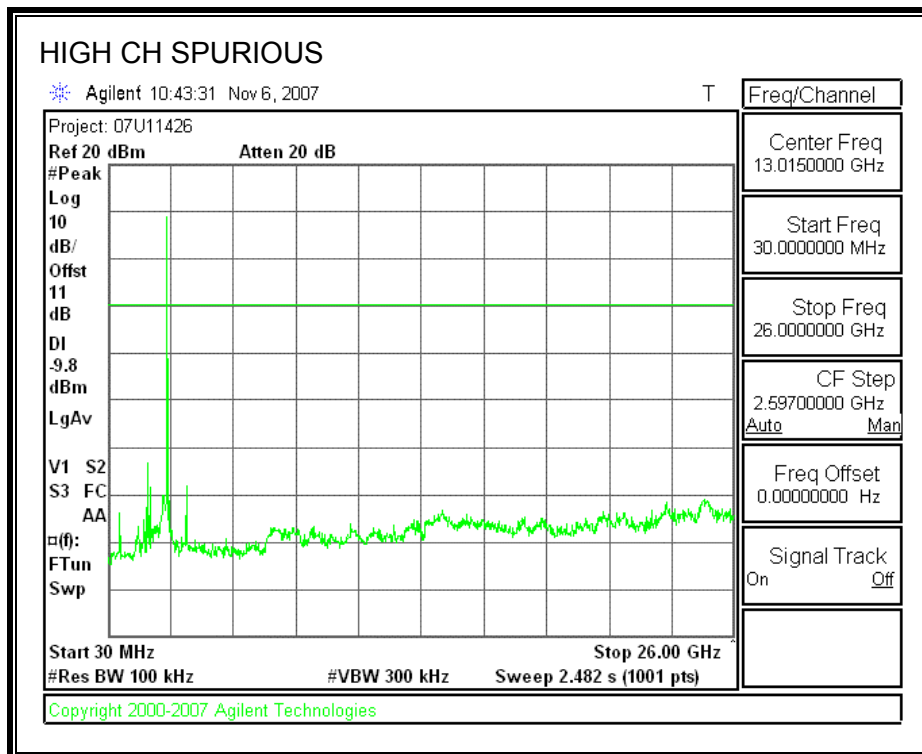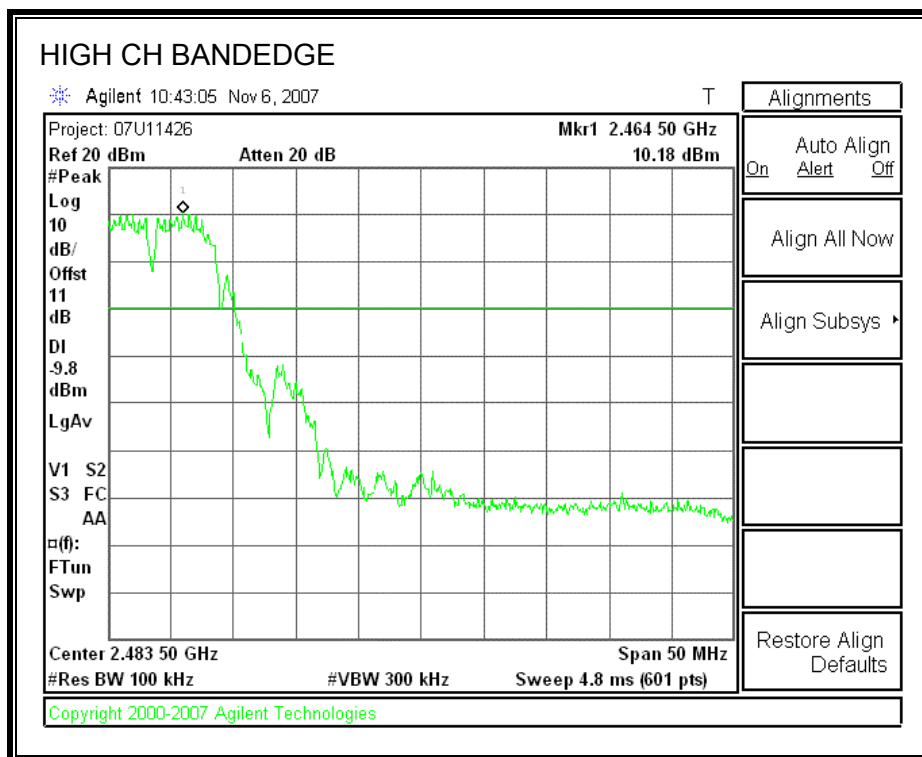

7.2. 802.11g MODE IN THE 2.4 GHz BAND

7.2.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.58	0.5
Middle	2437	15.42	0.5
High	2462	15.25	0.5

6 dB BANDWIDTH

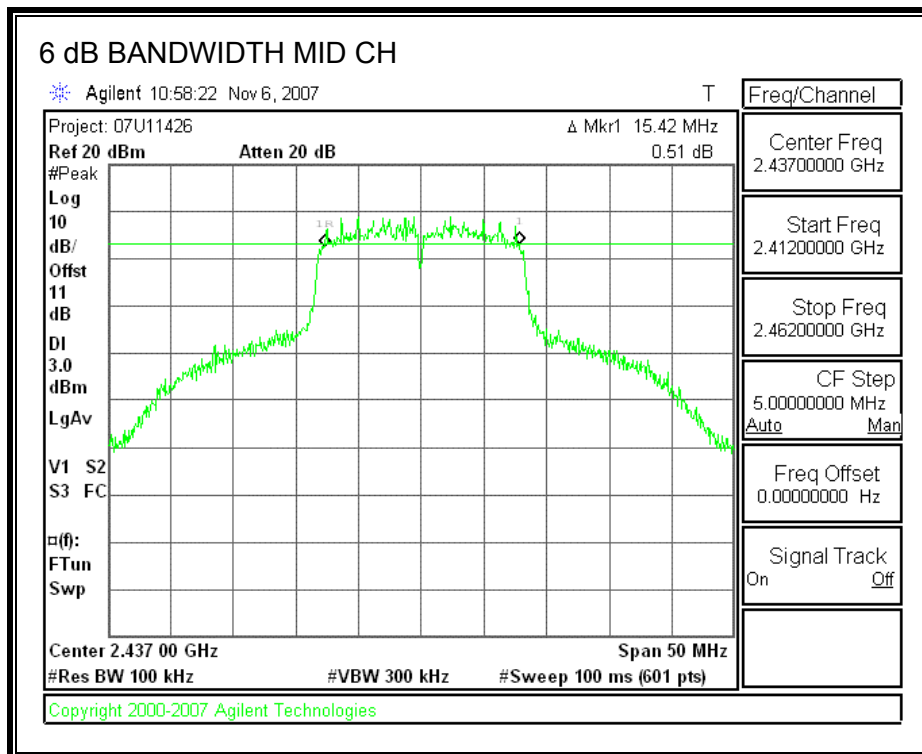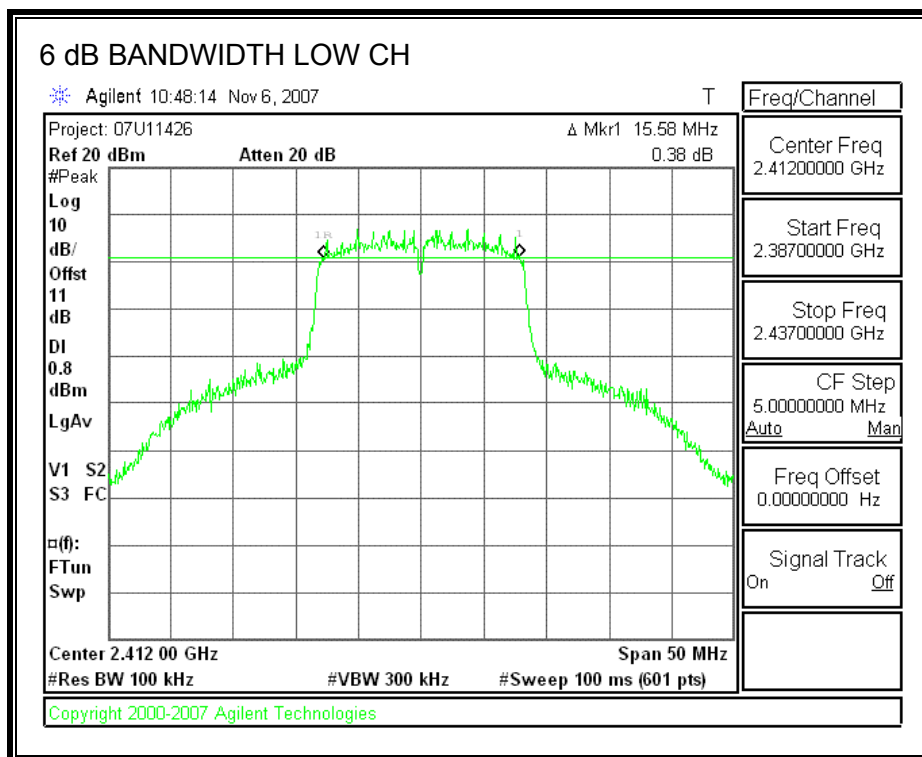

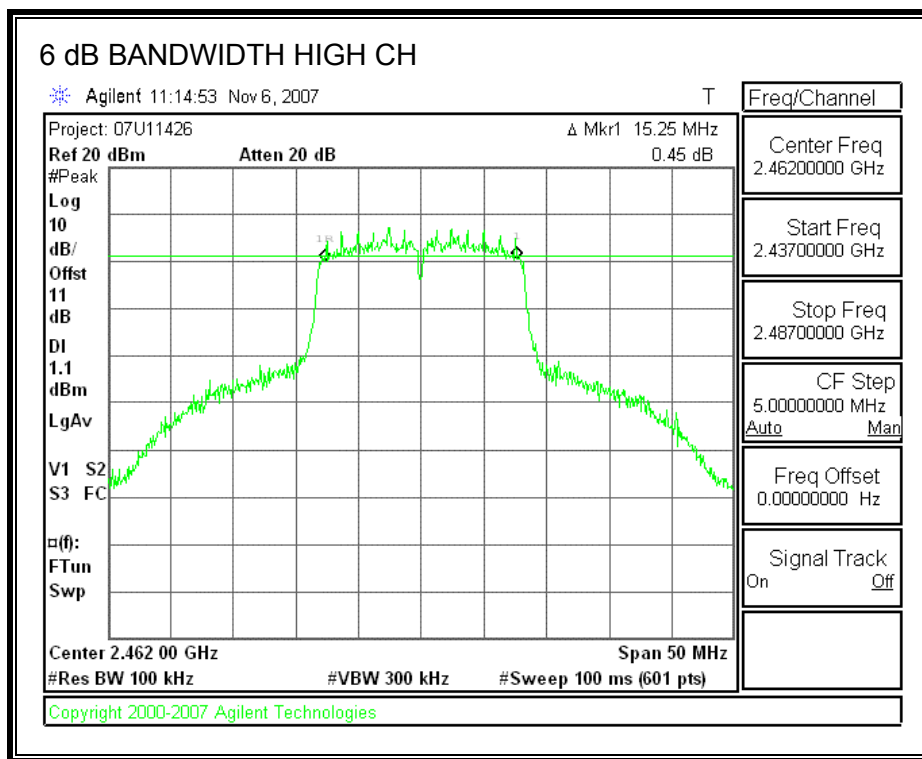

7.2.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.3529
Middle	2437	16.2886
High	2462	16.2575

99% BANDWIDTH

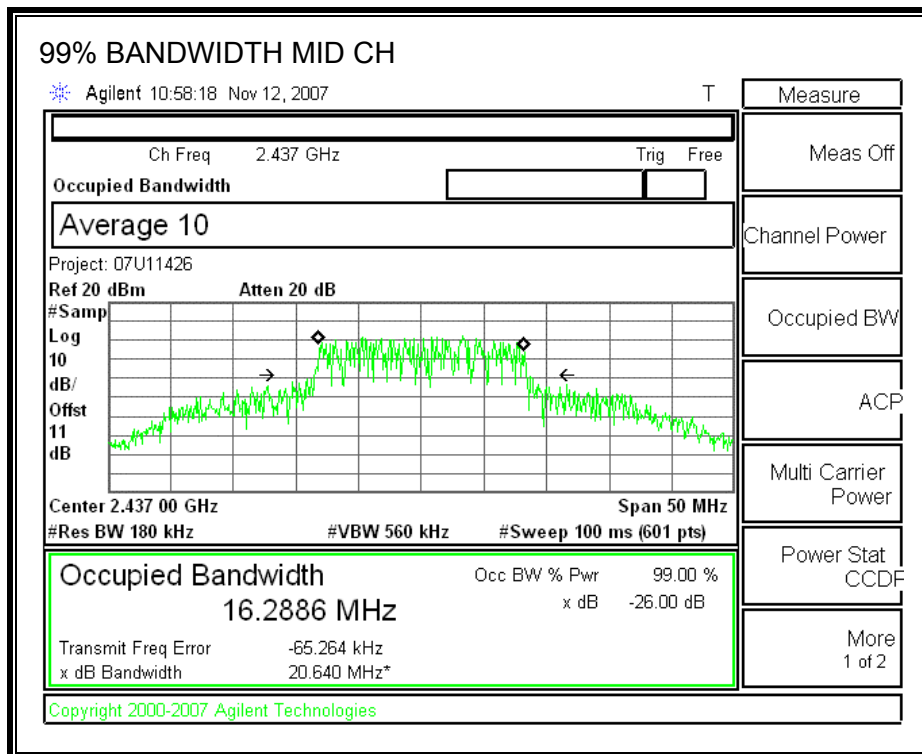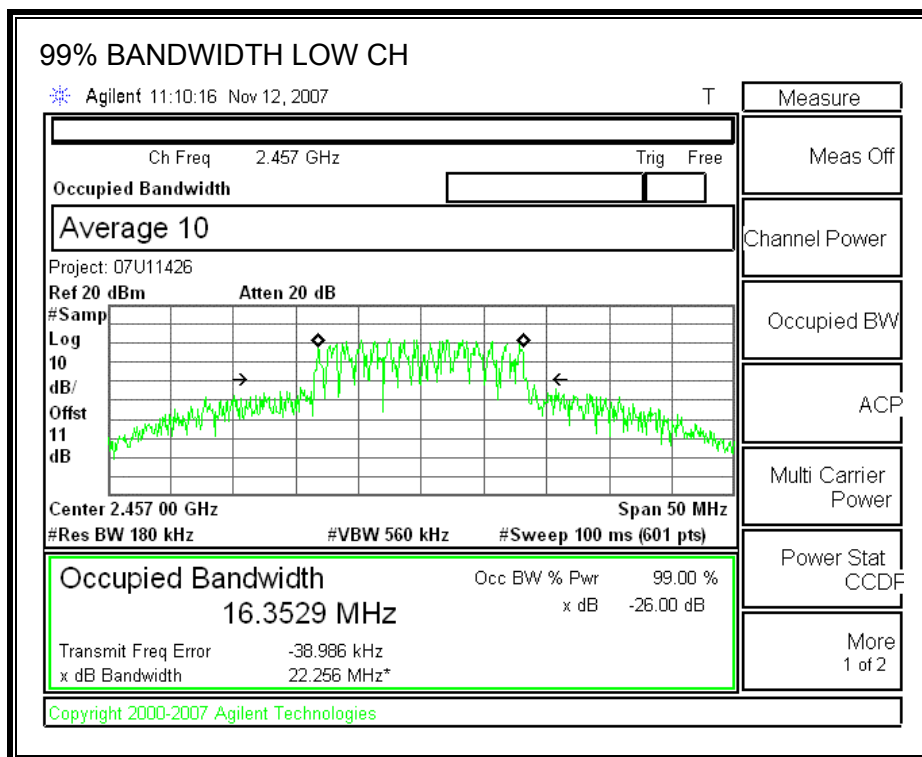

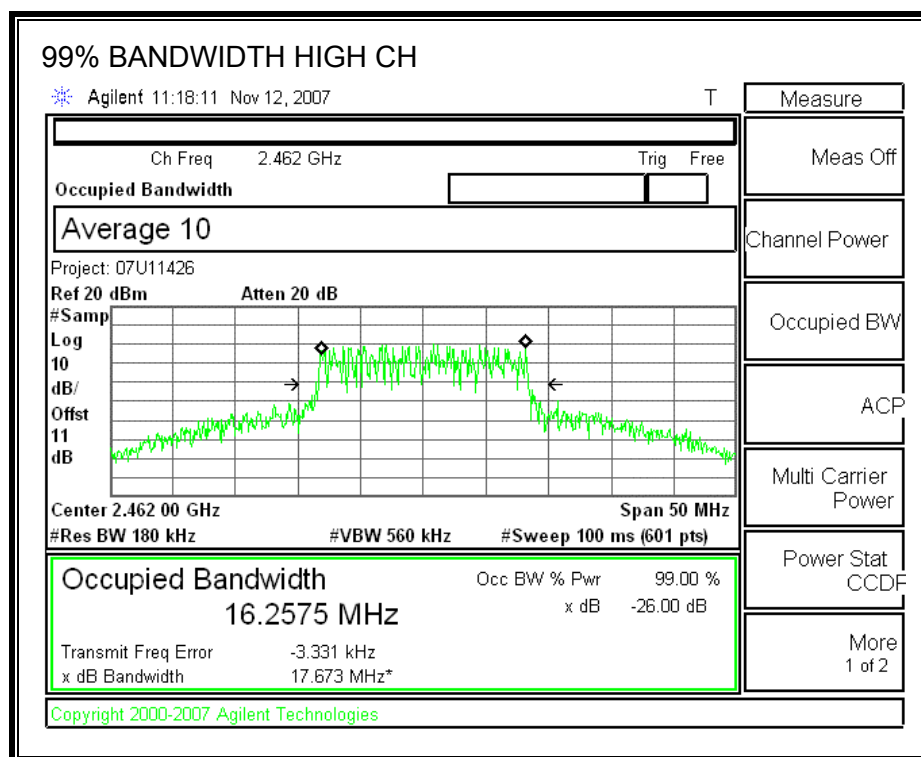

7.2.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.



TEST PROCEDURE



Peak power is measured using the spectrum analyzer's internal channel power integration function. Power is integrated over a bandwidth greater than or equal to the 99% bandwidth.


RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2412	21.34	30	-8.66
Low	2417	22.98	30	-7.02
Middle	2437	23.05	30	-6.95
High	2457	23.02	30	-6.98
High	2462	20.89	30	-9.11

OUTPUT POWER

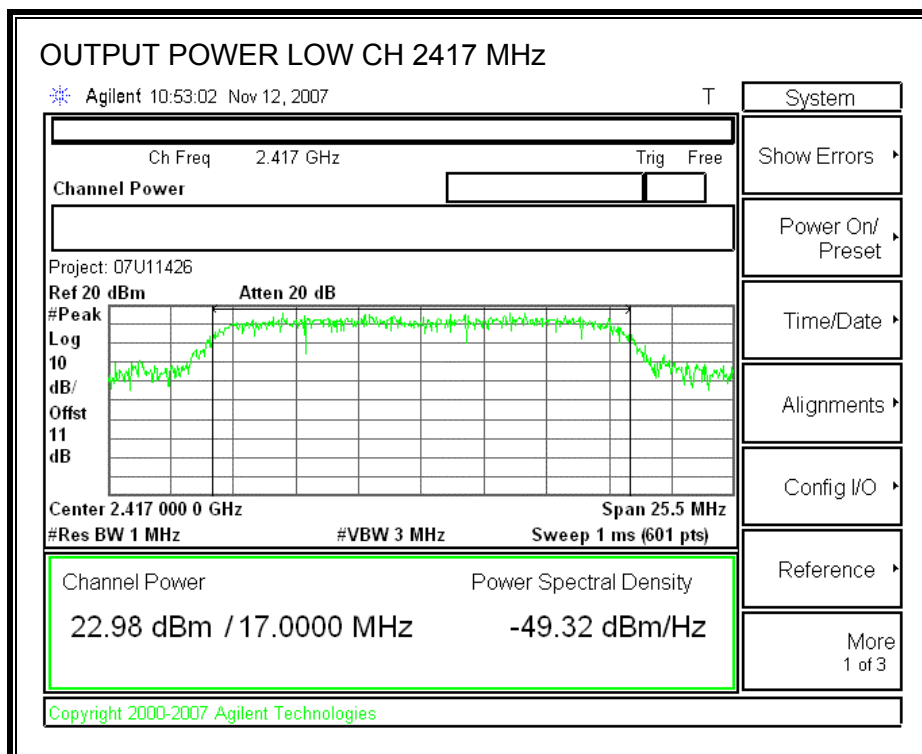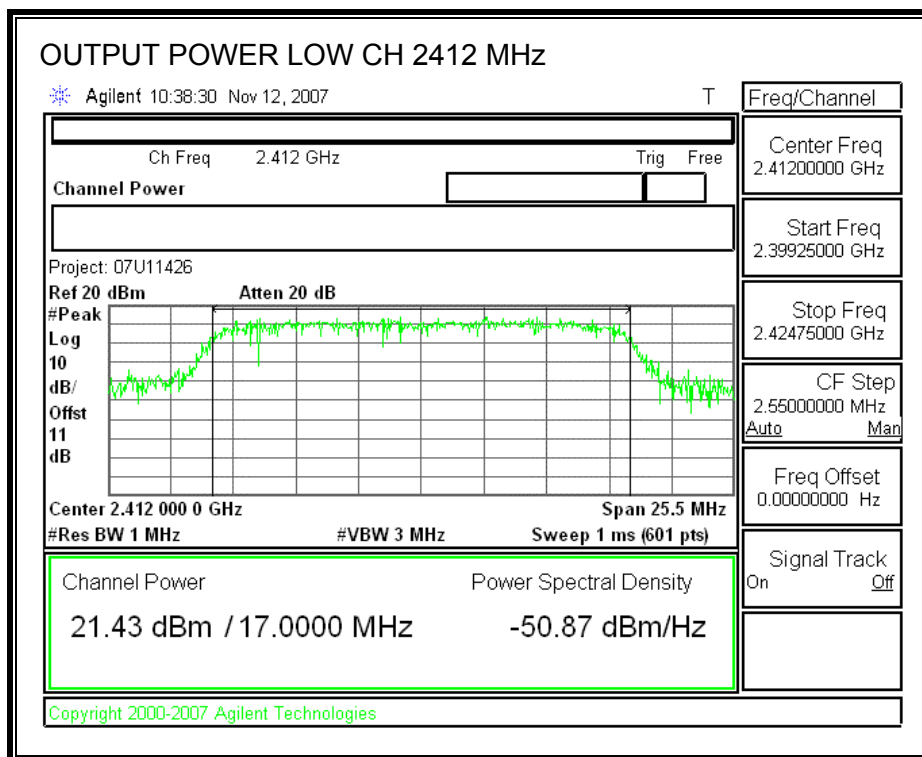

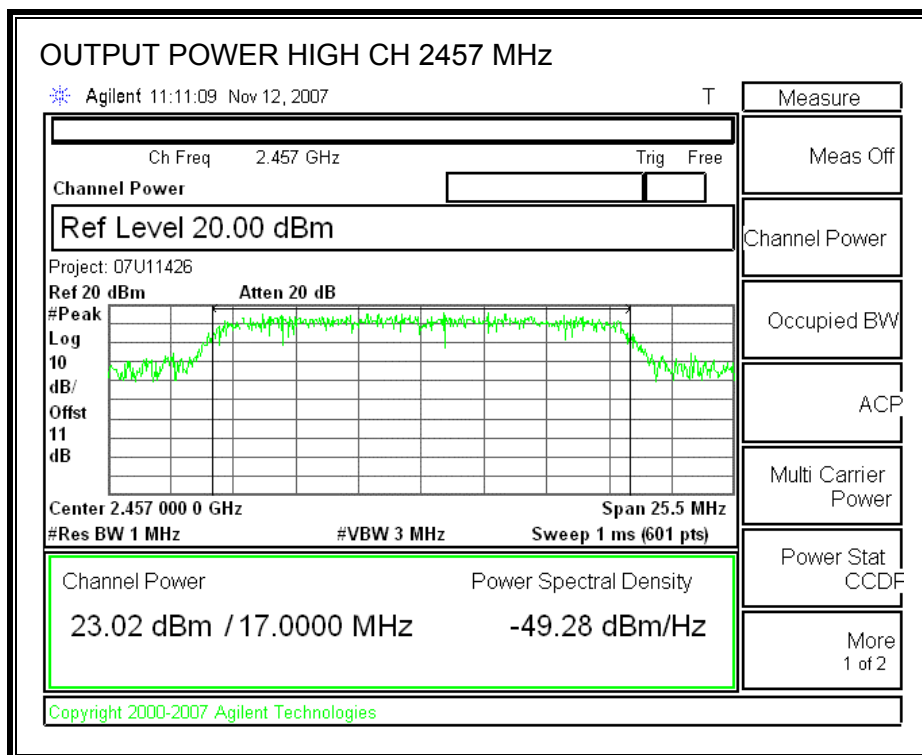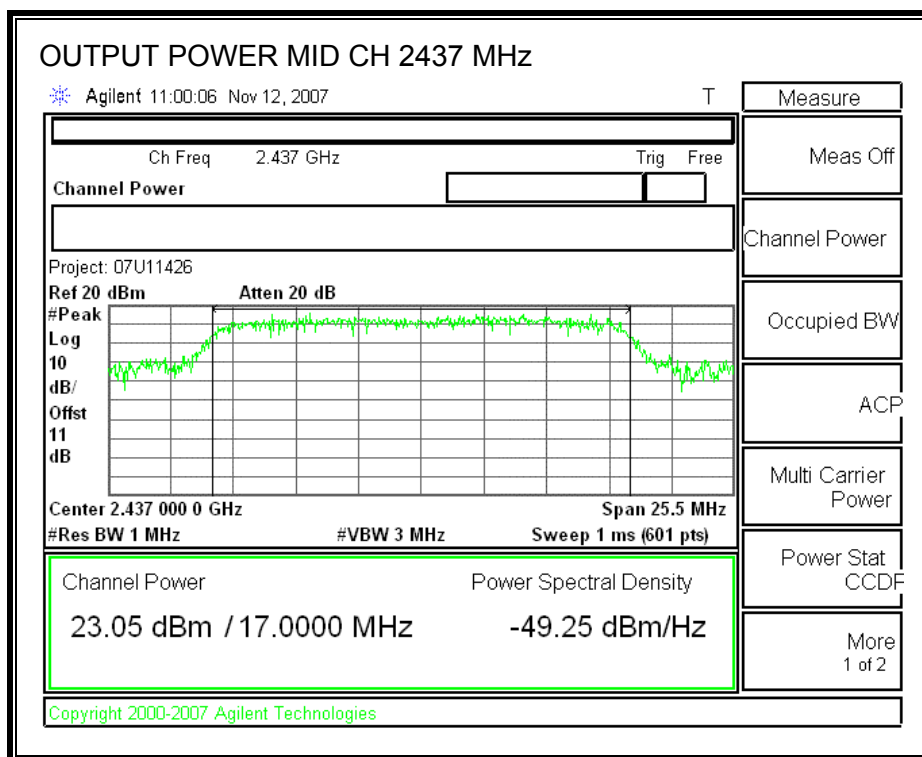

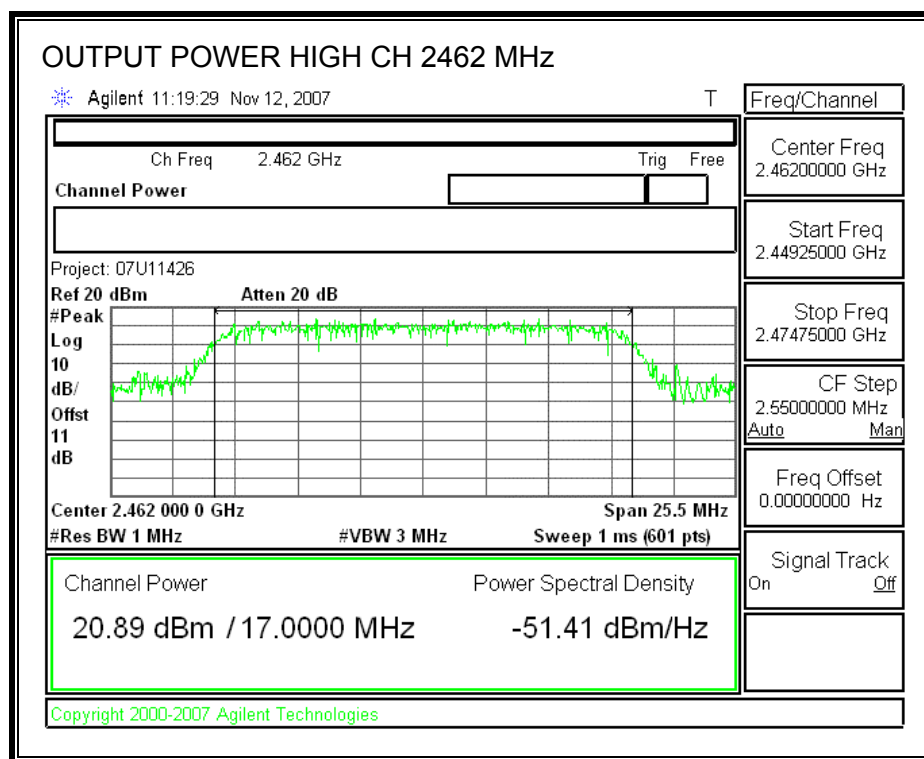

7.2.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE



Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.


RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-8.14	8	-16.14
Low	2417	-4.79	8	-12.79
Middle	2437	-5.22	8	-13.22
High	2457	-5.42	8	-13.42
High	2462	-6.94	8	-14.94

POWER SPECTRAL DENSITY

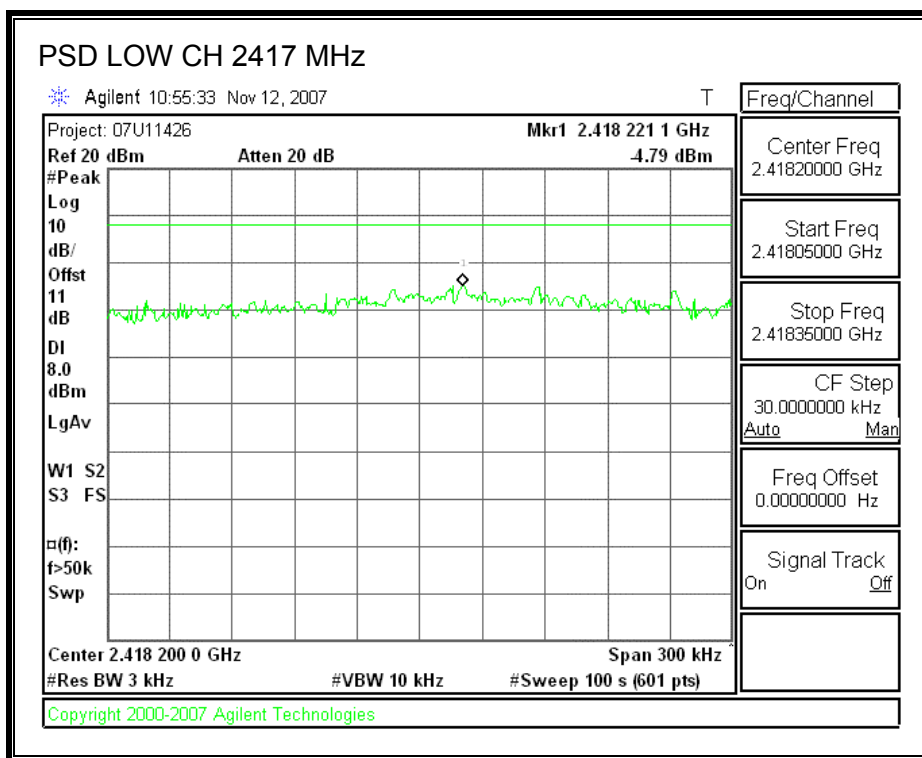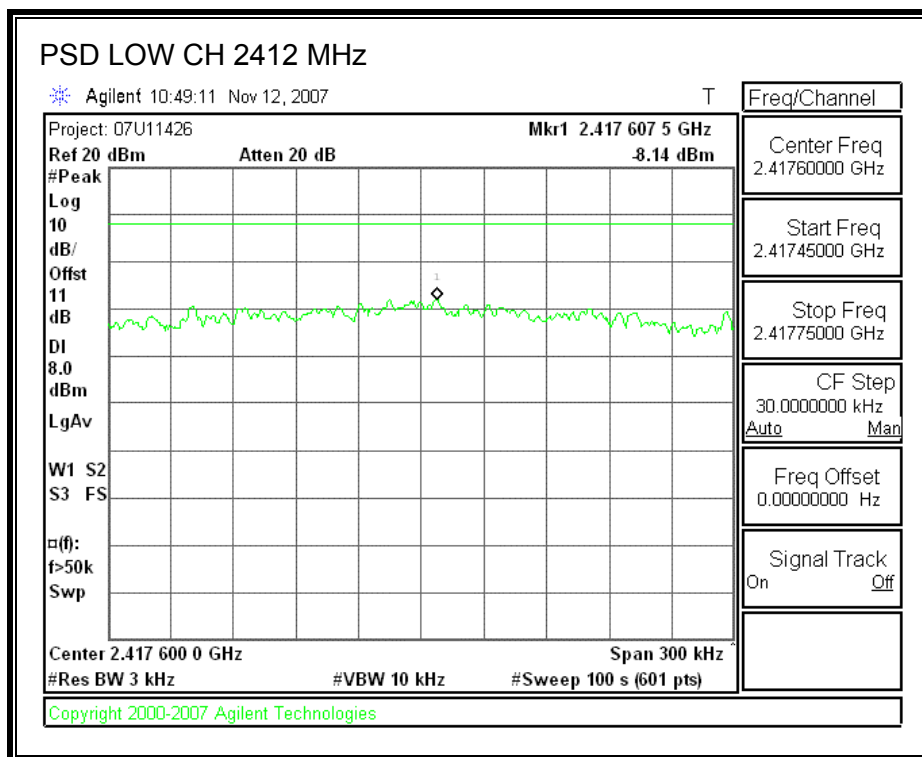

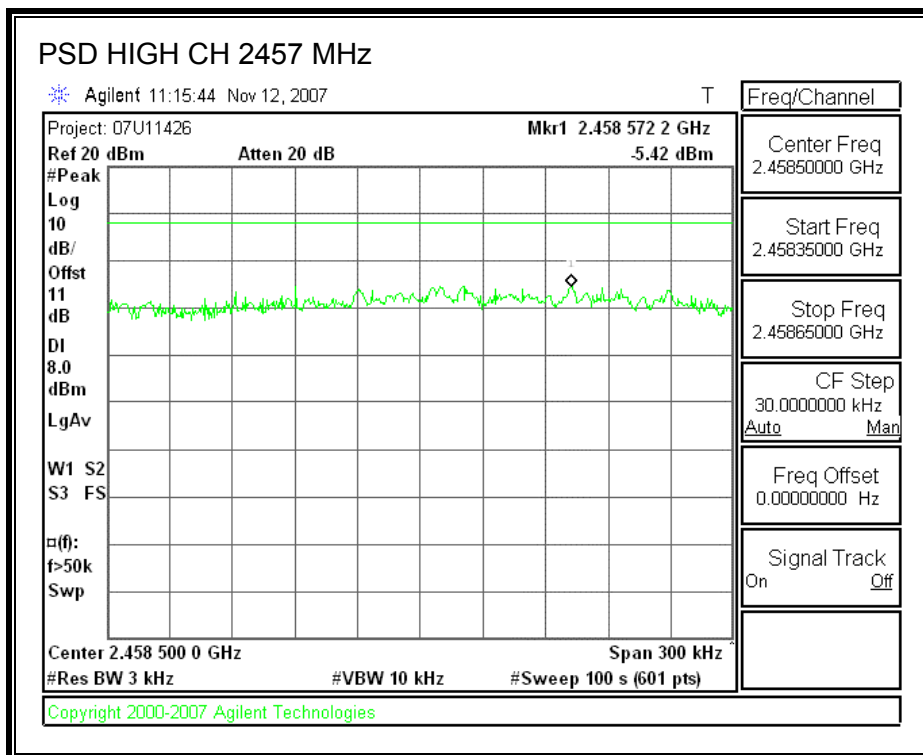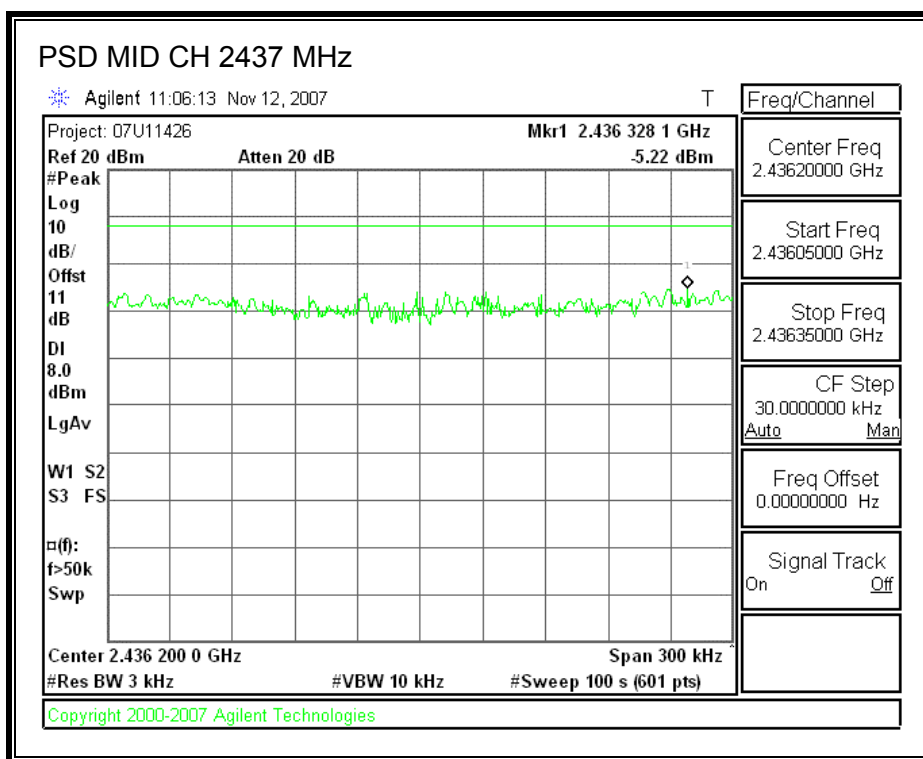

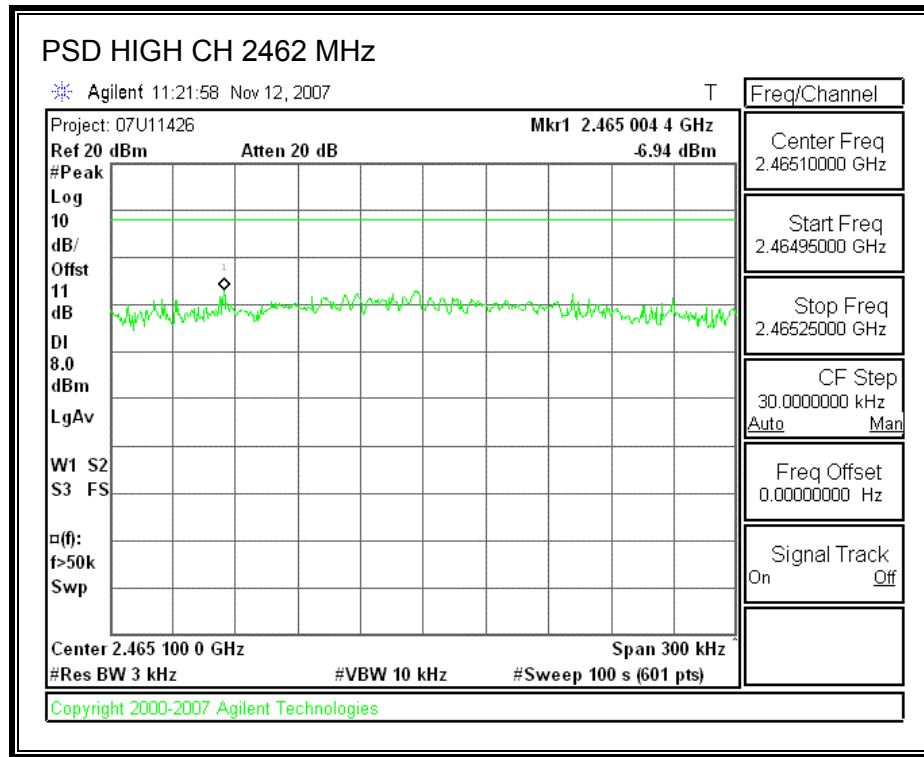

7.2.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.



TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

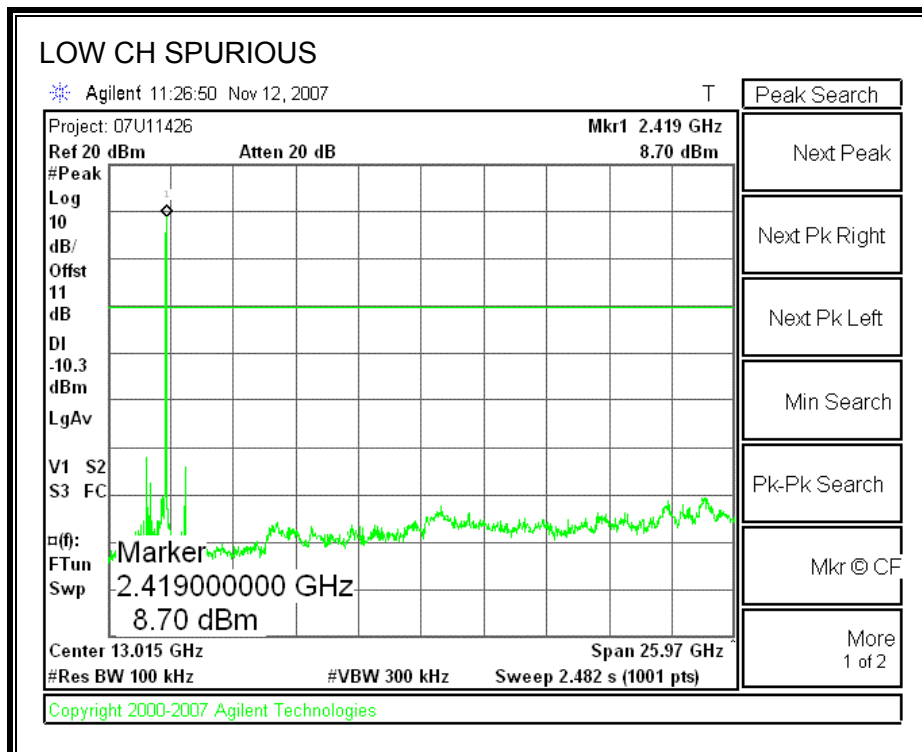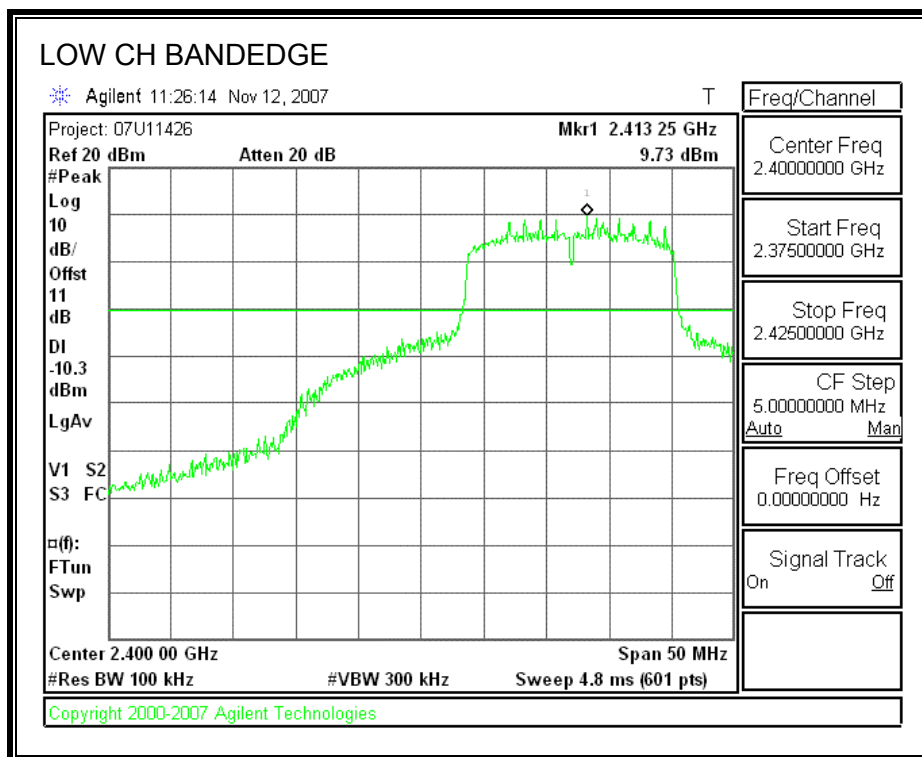

SPURIOUS EMISSIONS, MID CHANNEL

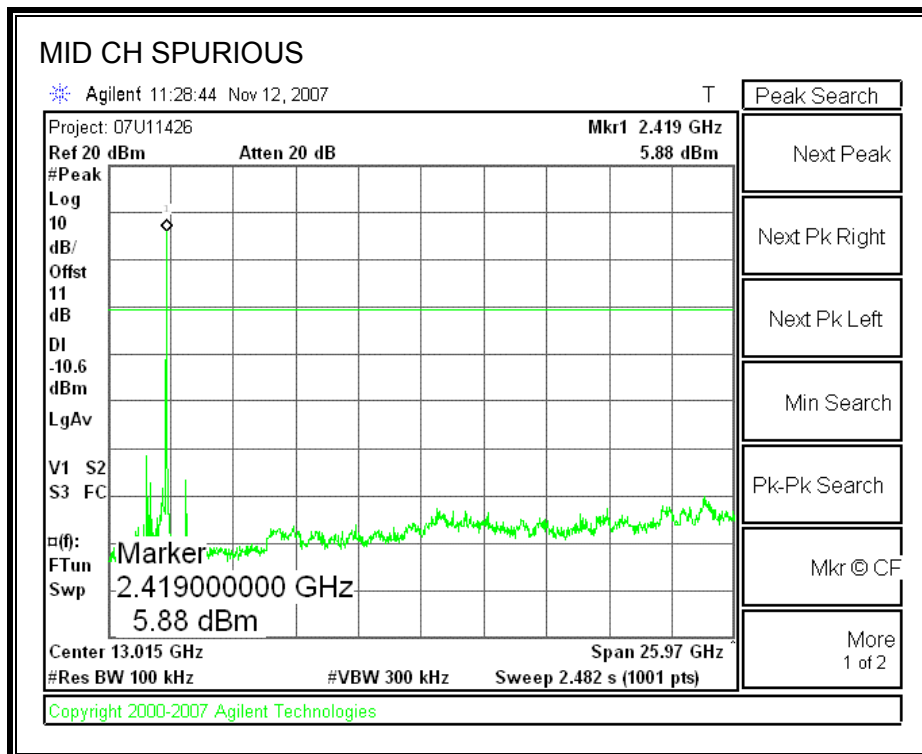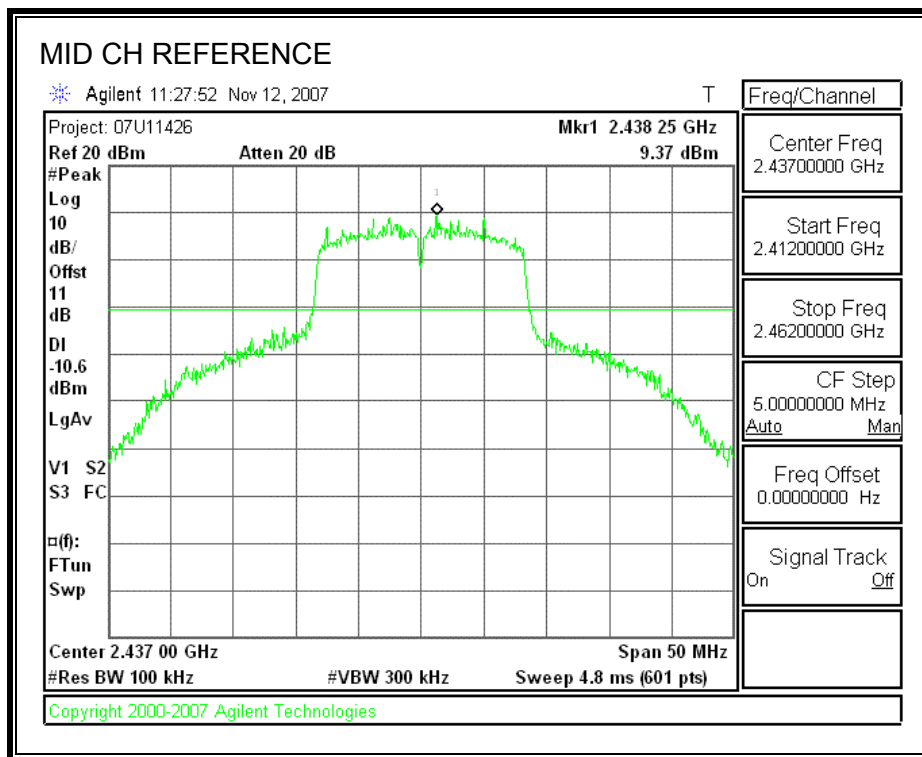

SPURIOUS EMISSIONS, HIGH CHANNEL

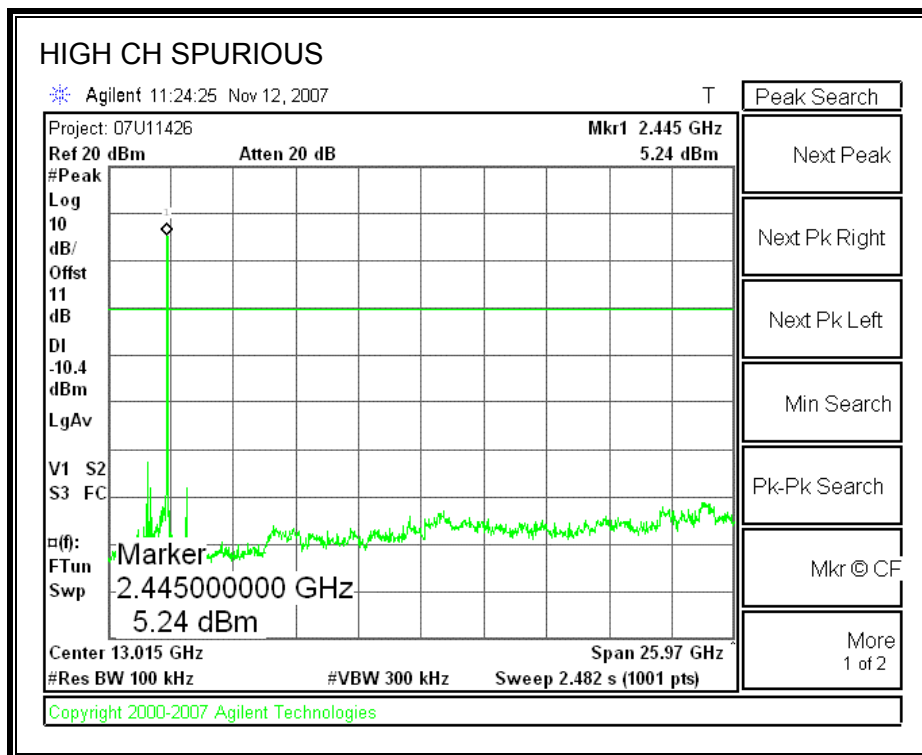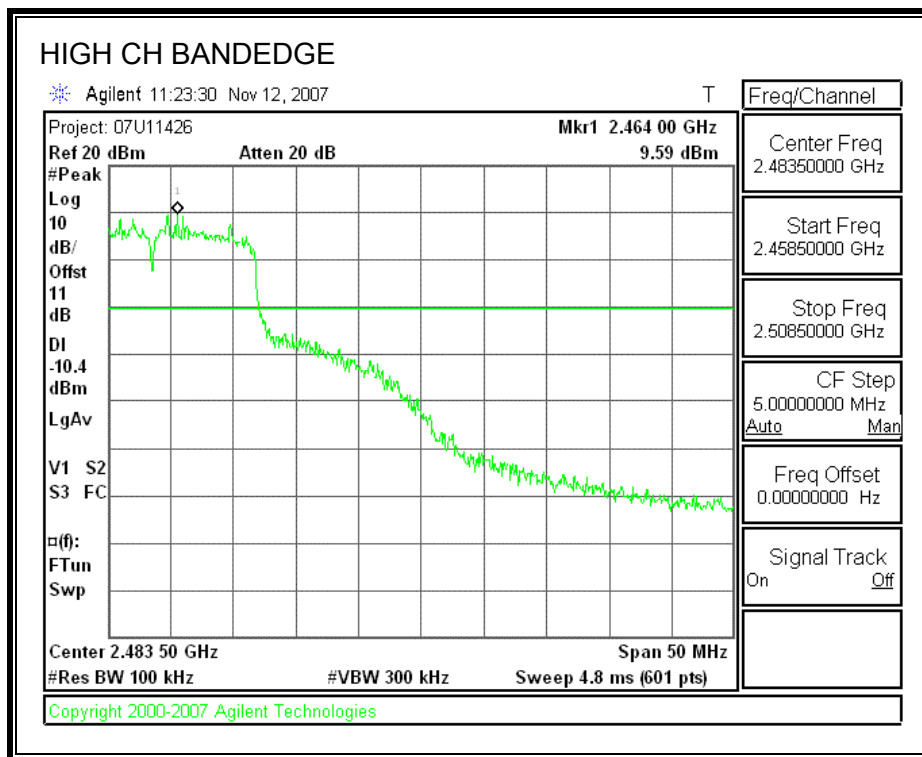

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.


The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

8.1.1. TRANSMITTER ABOVE 1 GHz FOR 802.11b MODE IN THE 2.4 GHz BAND



CH1, 2412 MHz

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

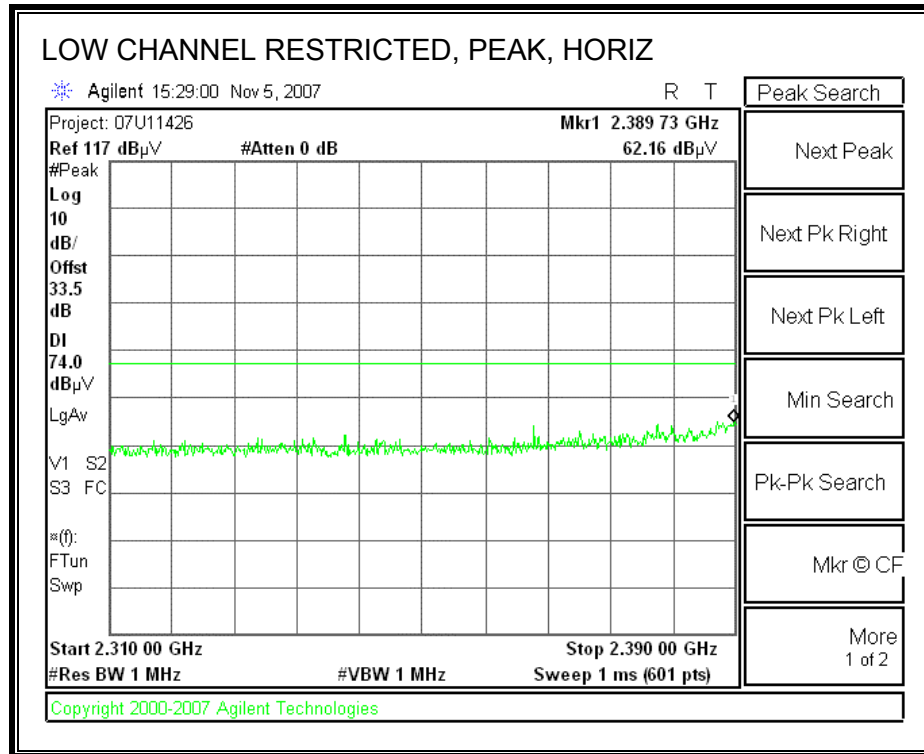


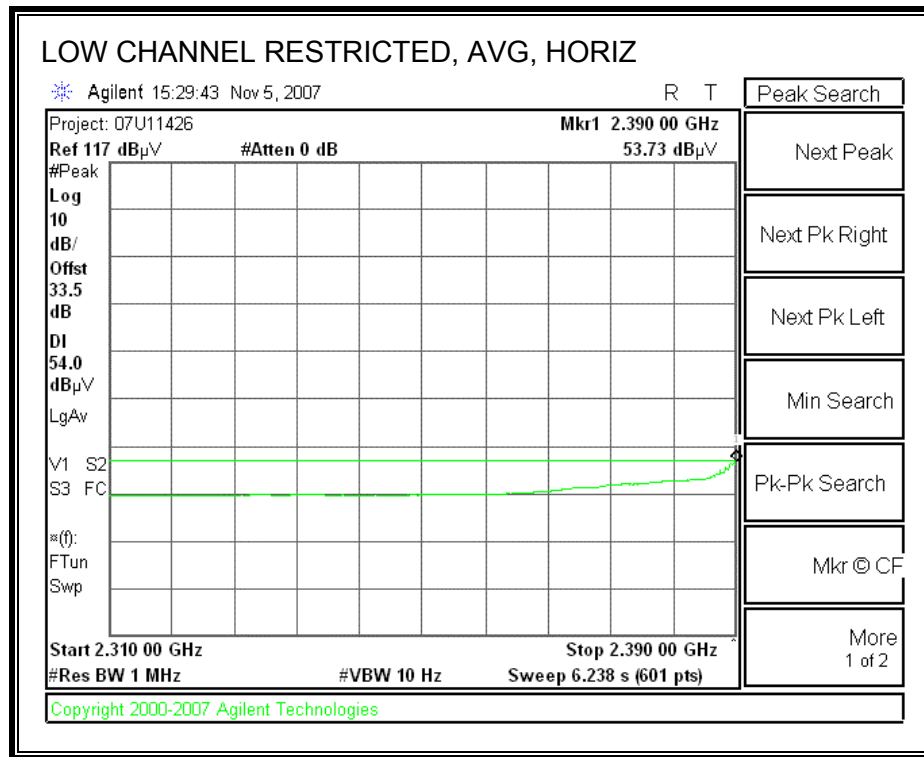


RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

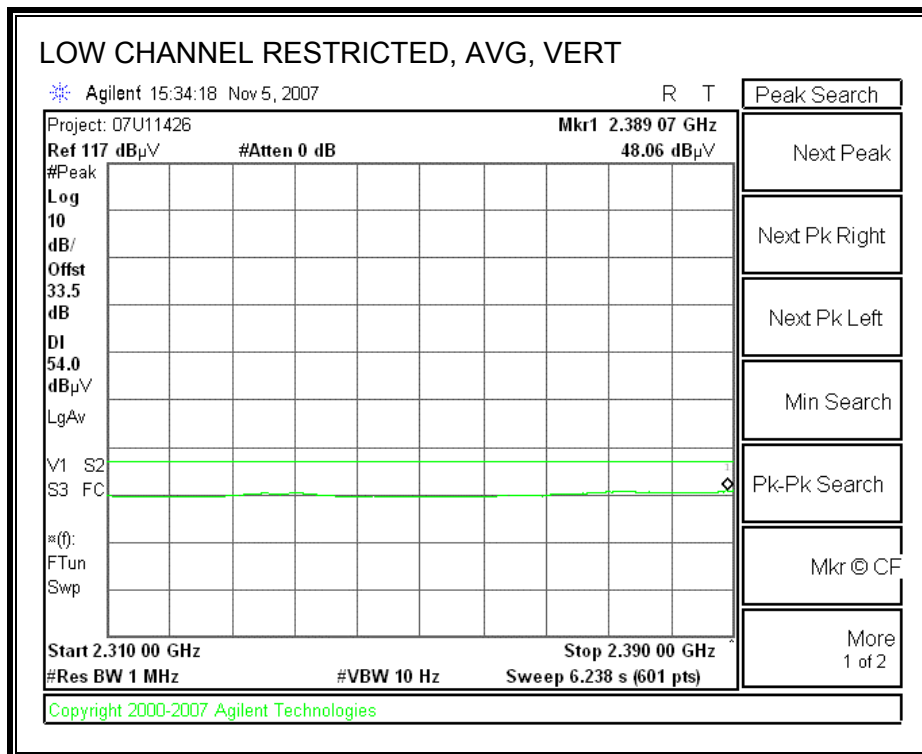
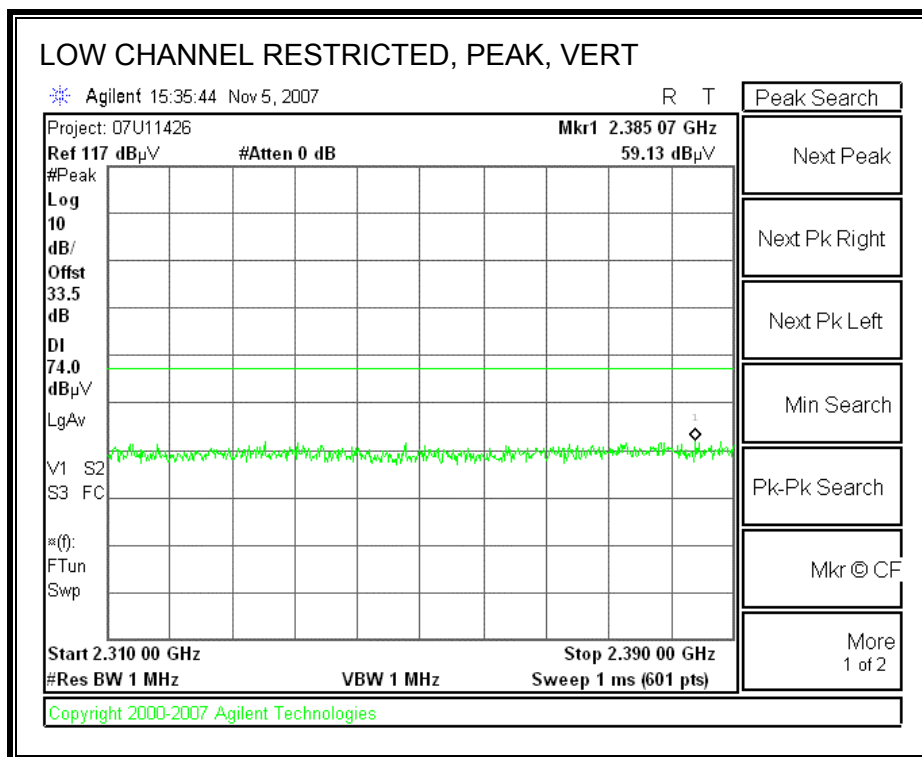


CH11, 2462 MHz

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

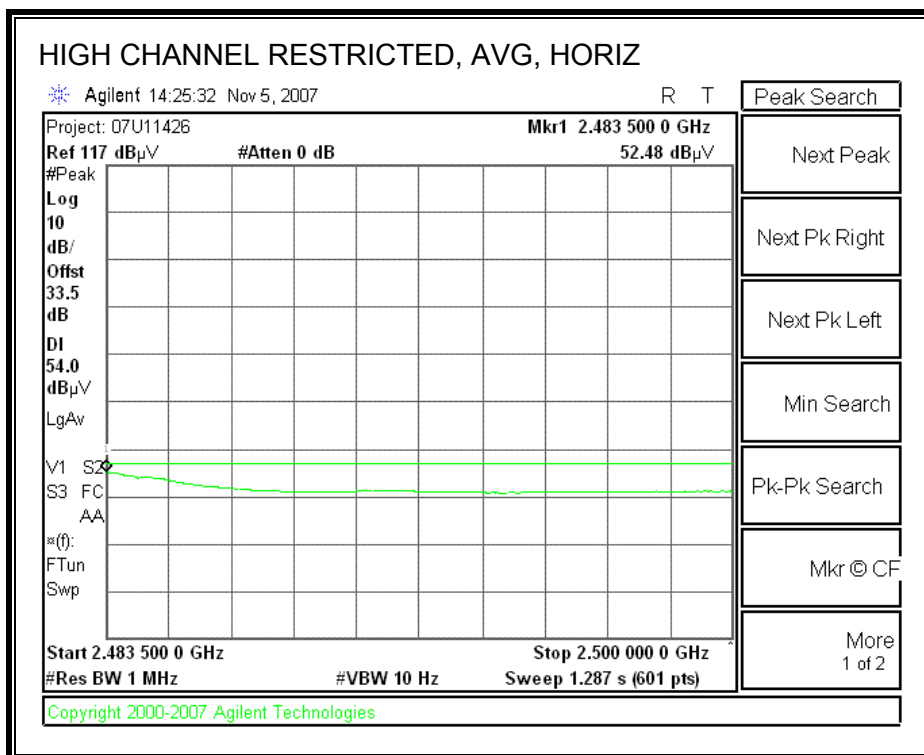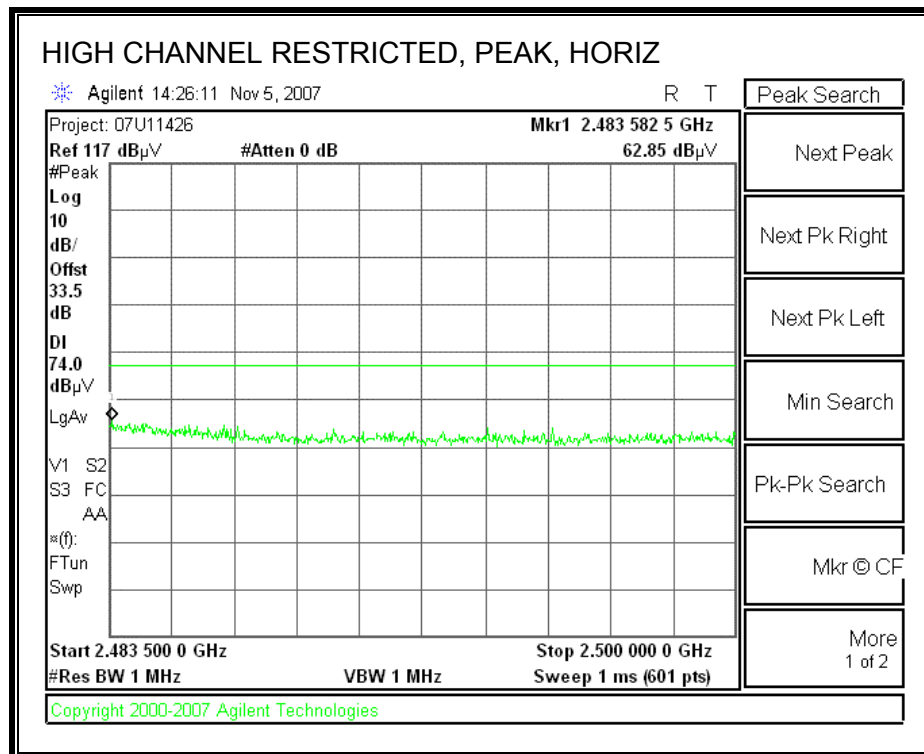

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

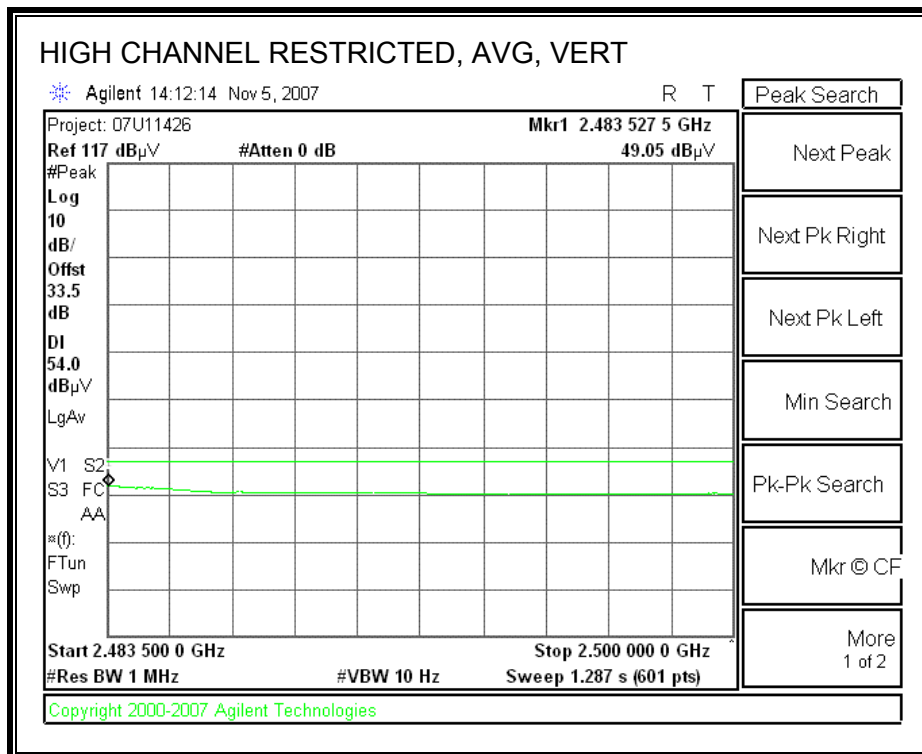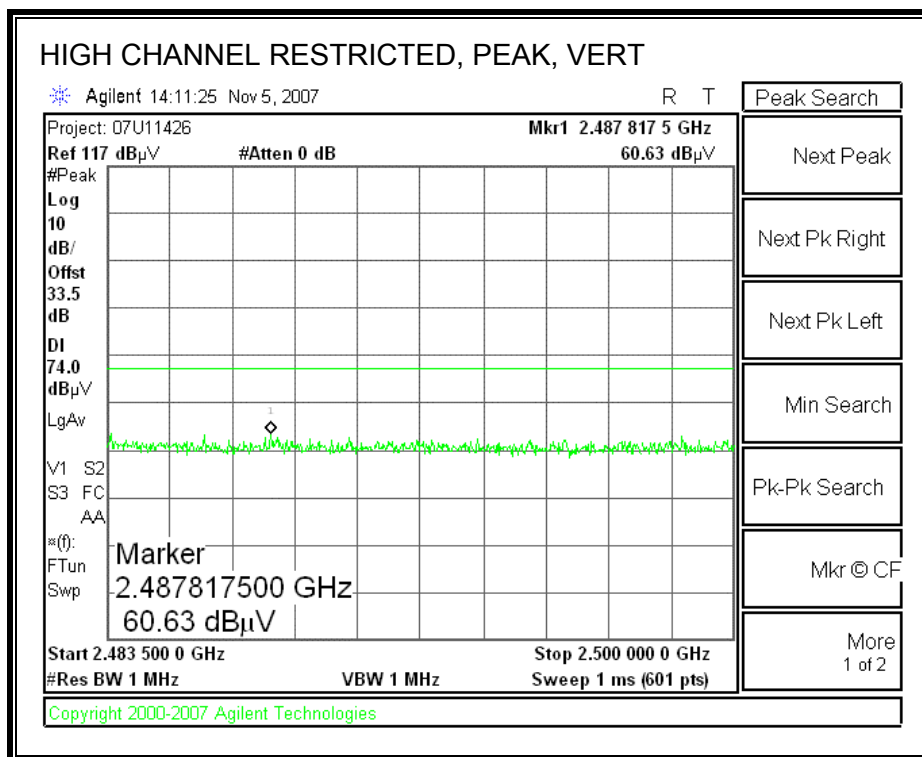


HARMONICS AND SPURIOUS EMISSIONS


High Frequency Measurement																
Compliance Certification Services, Morgan Hill Open Field Site																
Company: Broadcom																
Project #: 07U11426																
Date: 11/05/07																
Test Engineer: Vien Tran																
Configuration: EUT on extended card																
Mode: Tx 11b																
Test Equipment:																
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit								
T119; S/N: 29301 @3m		T34 HP 8449B						FCC 15.205								
Hi Frequency Cables																
2 foot cable		3 foot cable		12 foot cable		HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz						
		Gordon 177080004		Chin 200354001		HPF_4.0GHz										
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
LOW CH, 2412 MHz																
4.824	3.0	45.2	35.5	33.7	3.5	-34.8	0.0	0.6	48.1	38.4	74	54	-25.9	-15.6	V	
4.824	3.0	47.2	38.9	33.7	3.5	-34.8	0.0	0.6	50.1	41.8	74	54	-23.9	-12.2	H	
MID CH, 2437 MHz																
4.874	3.0	48.6	43.6	33.7	3.5	-34.8	0.0	0.6	51.6	46.6	74	54	-22.4	-7.4	V	
7.311	3.0	46.5	37.1	35.2	4.1	-34.1	0.0	0.6	52.2	42.8	74	54	-21.8	-11.2	V	
4.874	3.0	47.8	41.6	33.7	3.5	-34.8	0.0	0.6	50.8	44.6	74	54	-23.2	-9.4	H	
7.311	3.0	46.7	37.2	35.2	4.1	-34.1	0.0	0.6	52.5	43.0	74	54	-21.5	-11.0	H	
HI CH, 2462 MHz																
4.924	3.0	49.8	44.3	33.8	3.5	-34.8	0.0	0.6	52.8	47.4	74	54	-21.2	-6.6	V	
7.386	3.0	45.2	33.6	35.2	4.1	-34.1	0.0	0.6	51.0	39.4	74	54	-23.0	-14.6	V	
4.924	3.0	45.7	38.2	33.8	3.5	-34.8	0.0	0.6	48.8	41.3	74	54	-25.2	-12.7	H	
7.386	3.0	45.6	35.5	35.2	4.1	-34.1	0.0	0.6	51.4	41.4	74	54	-22.6	-12.6	H	
Rev. 5.1.6																
f	Measurement Frequency			Amp	Preamp Gain			Avg Lim	Average Field Strength Limit							
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters			Pk Lim	Peak Field Strength Limit							
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m			Avg Mar	Margin vs. Average Limit							
AF	Antenna Factor			Peak	Calculated Peak Field Strength			Pk Mar	Margin vs. Peak Limit							
CL	Cable Loss			HPF	High Pass Filter											

8.1.2. TRANSMITTER ABOVE 1 GHz FOR 802.11g MODE IN THE 2.4 GHz BAND



CH1, 2412 MHz

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

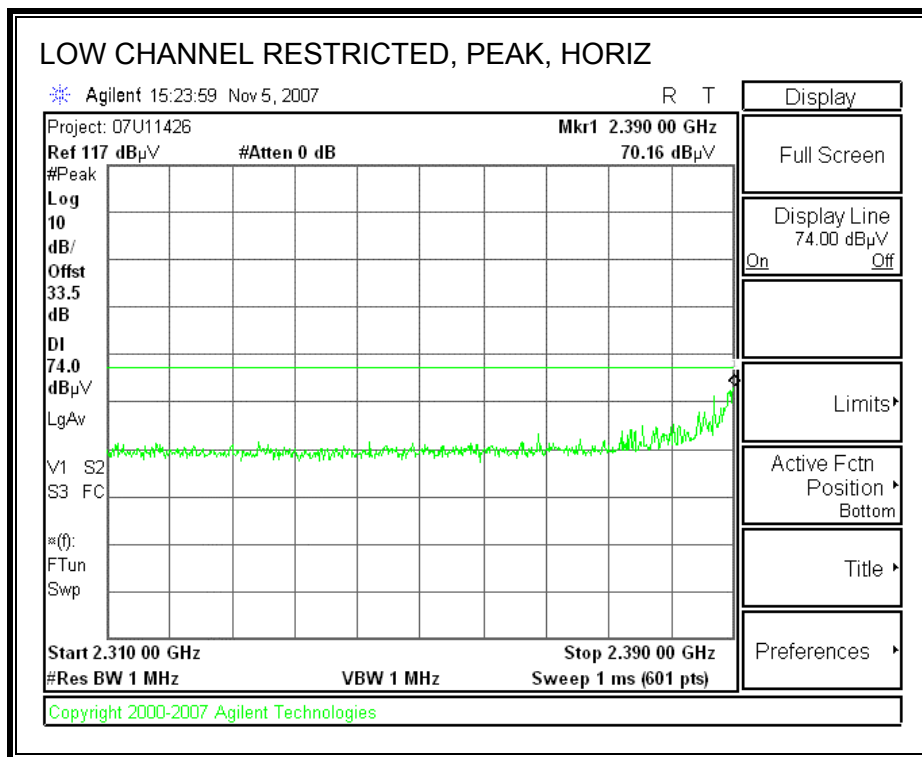


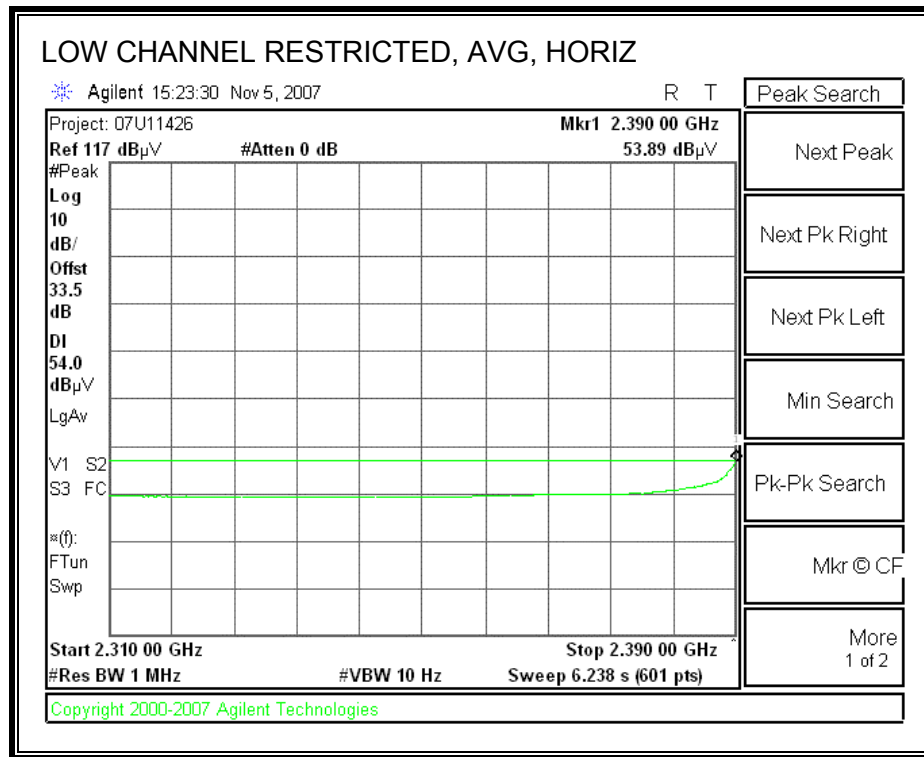


RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

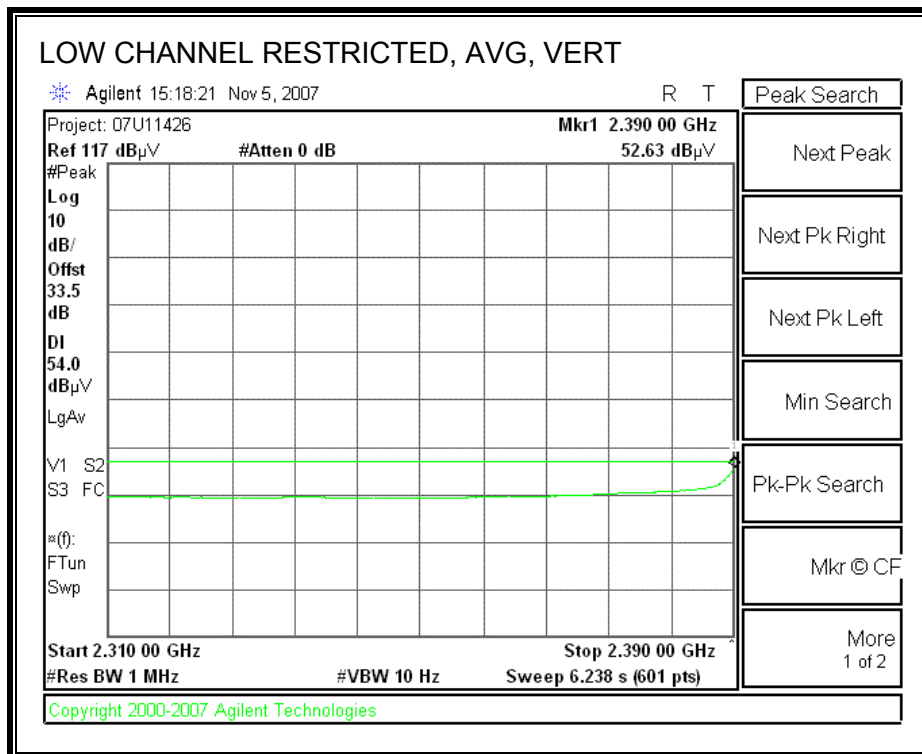
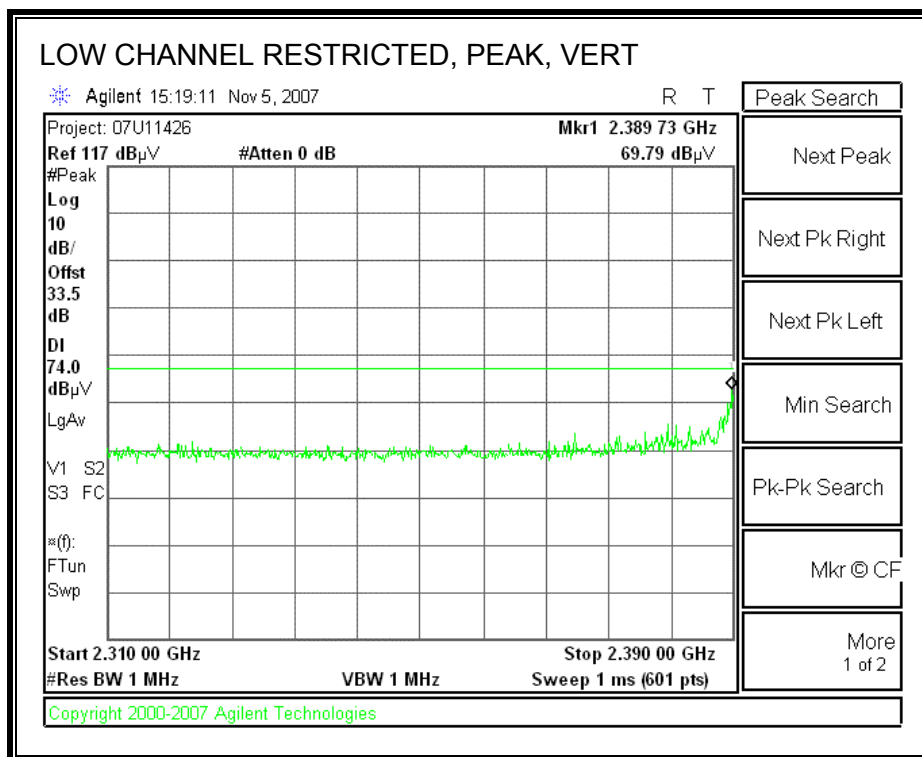


CH2, 2417 MHz

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

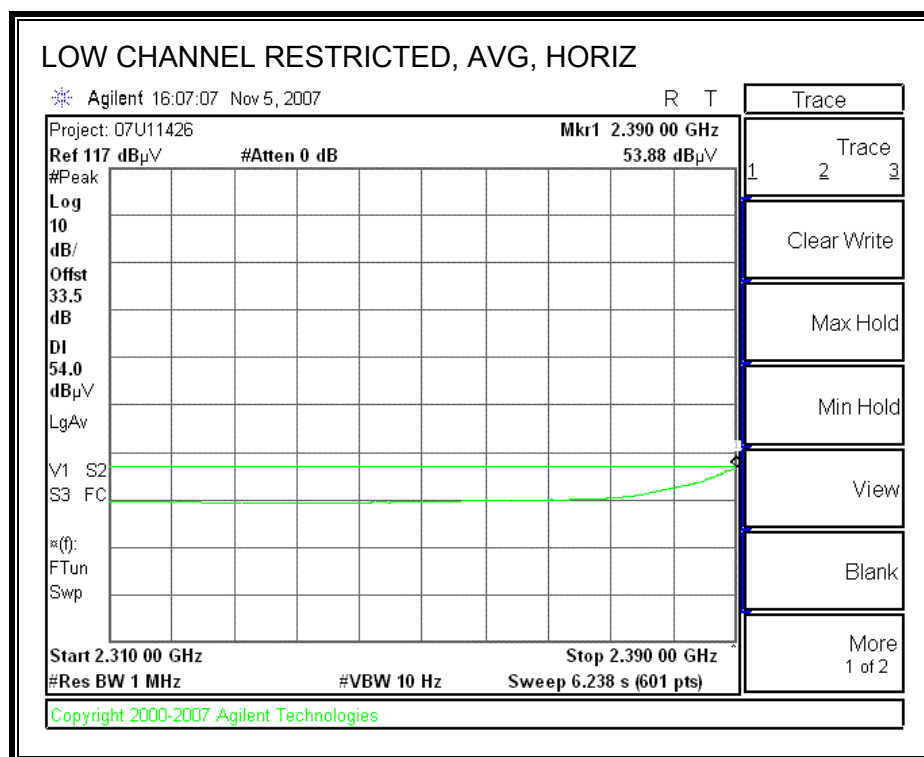
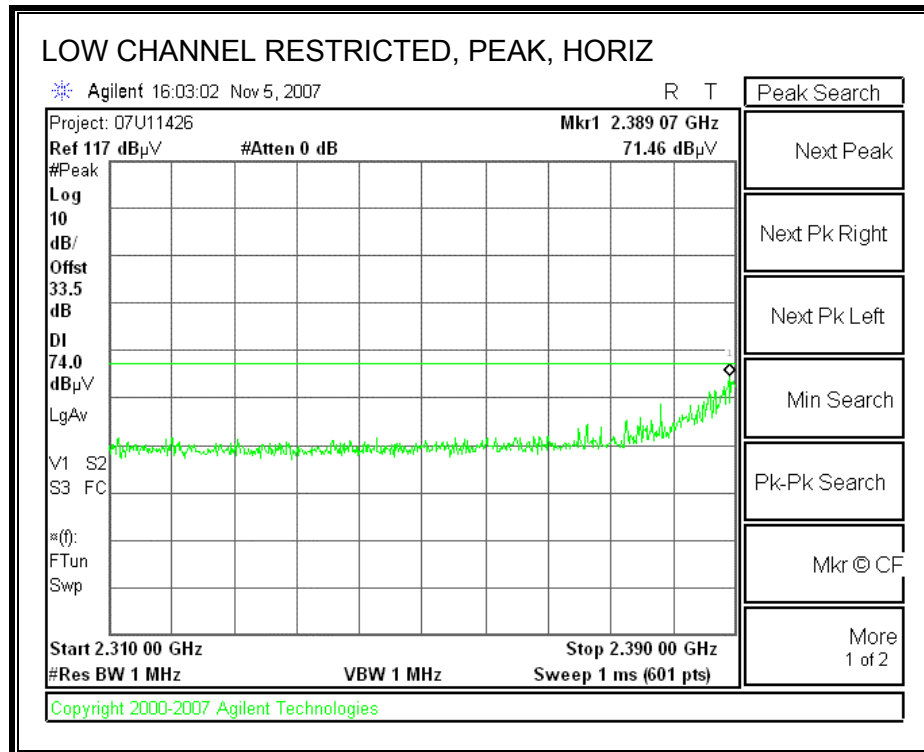


RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

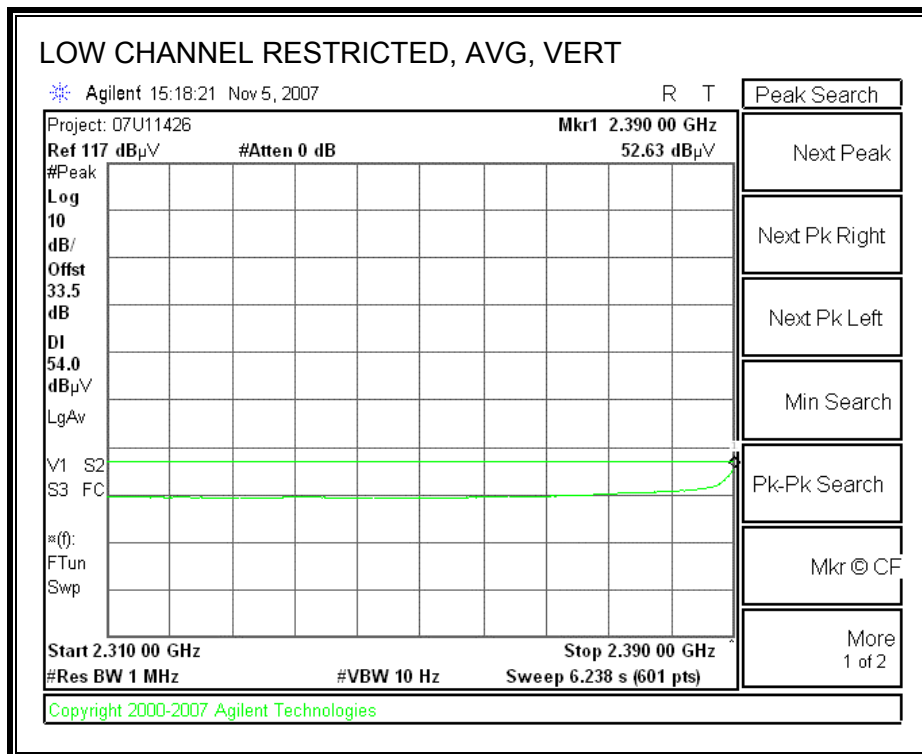
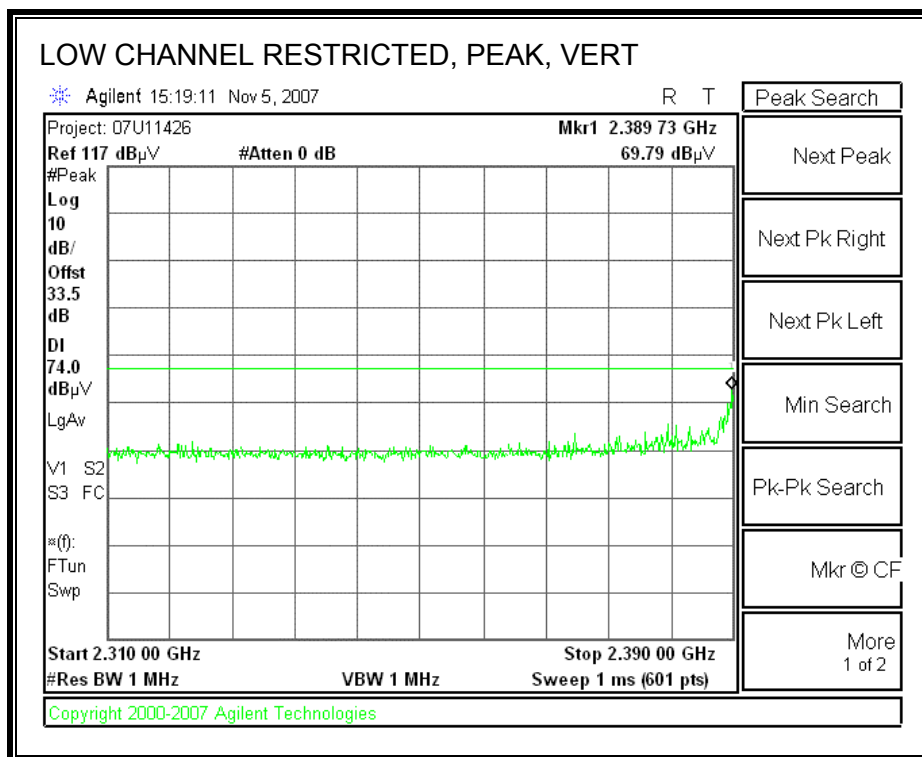


CH10, 2457 MHz

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

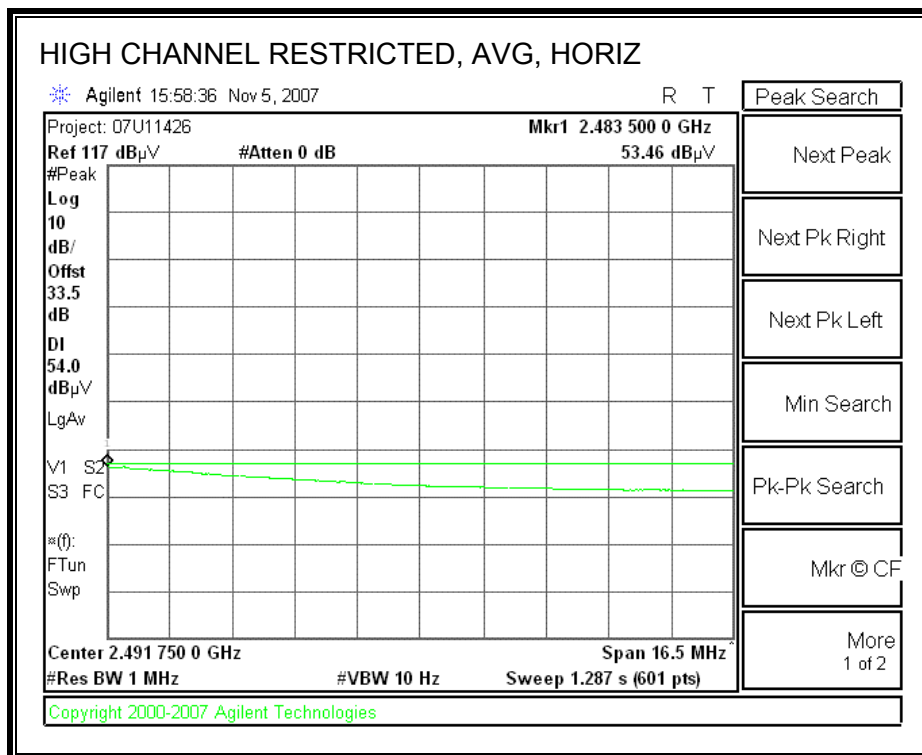
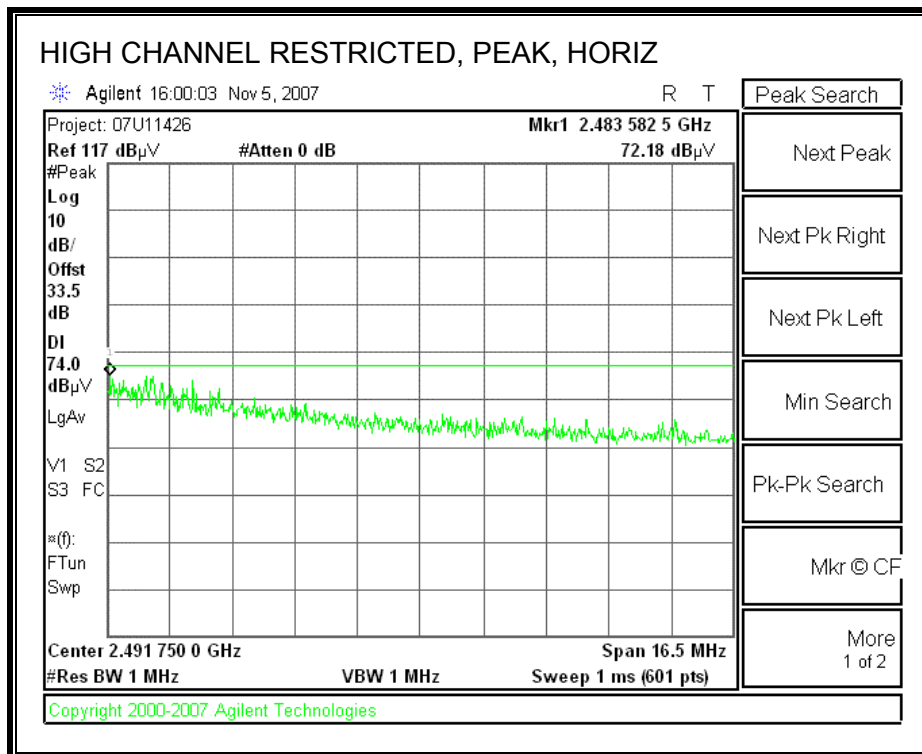


RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

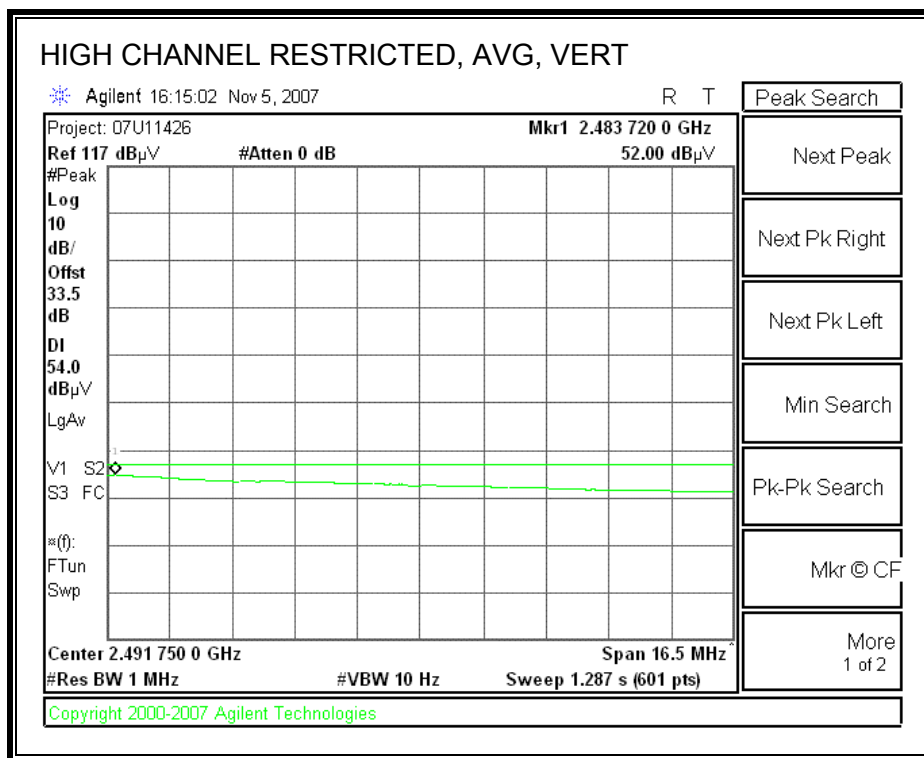
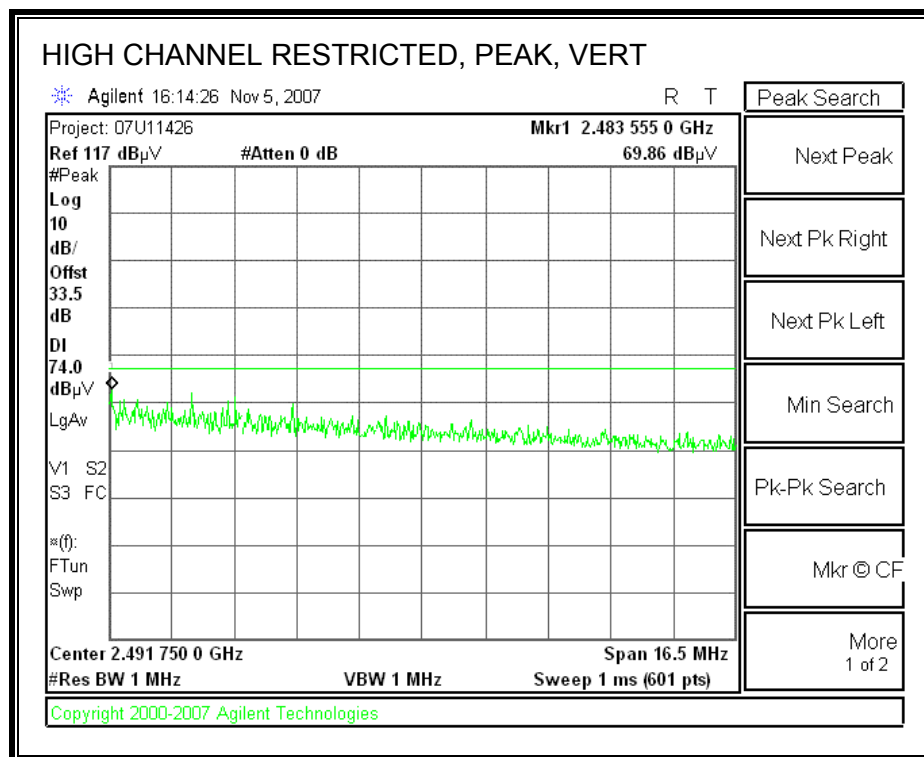


CH11, 2462 MHz

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

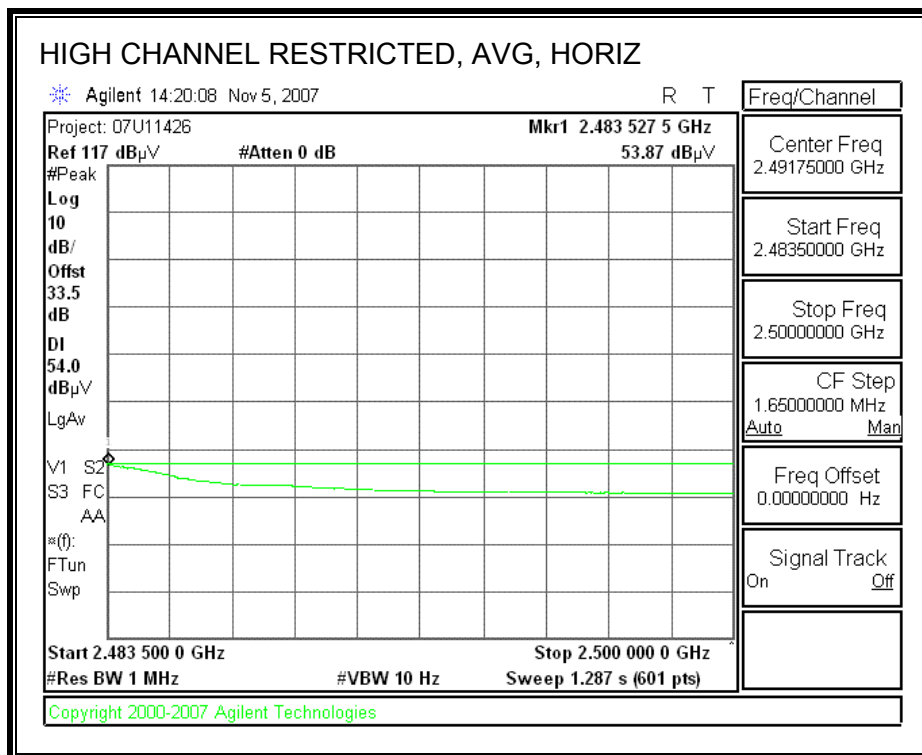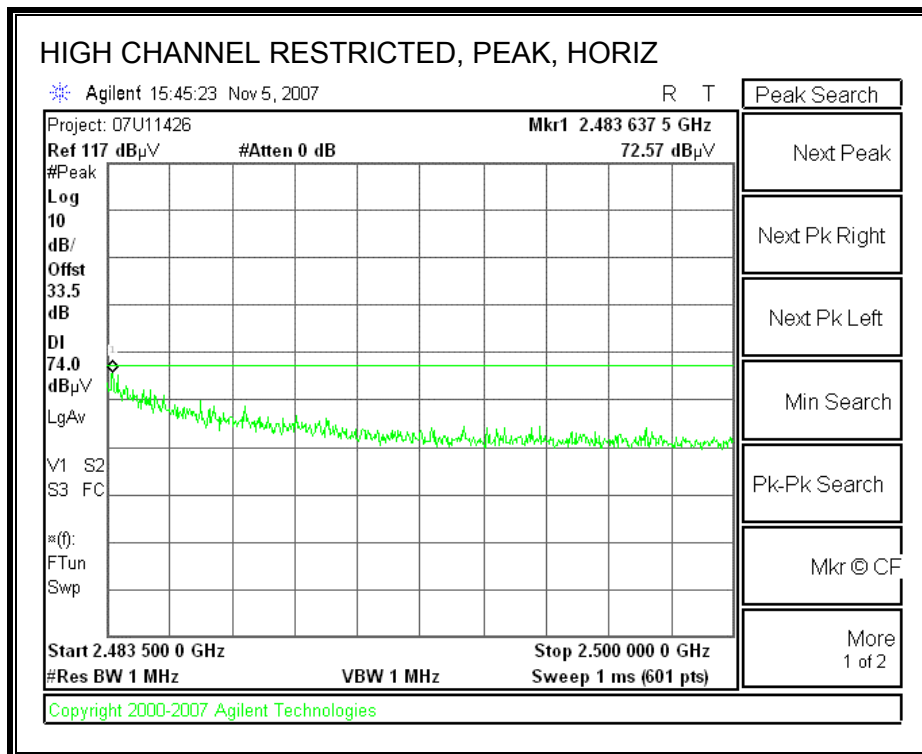

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

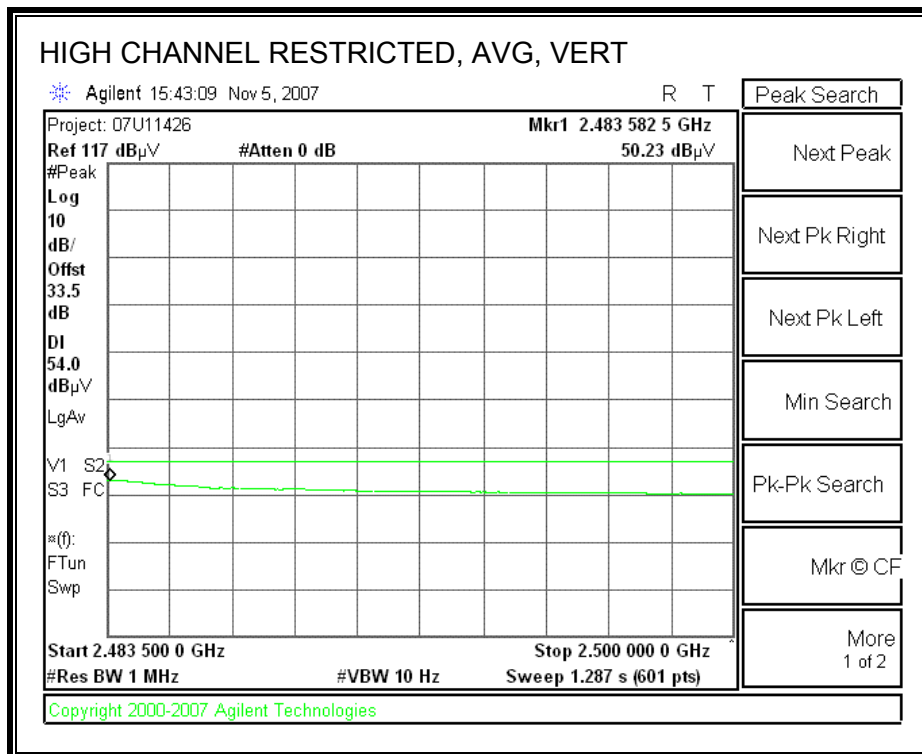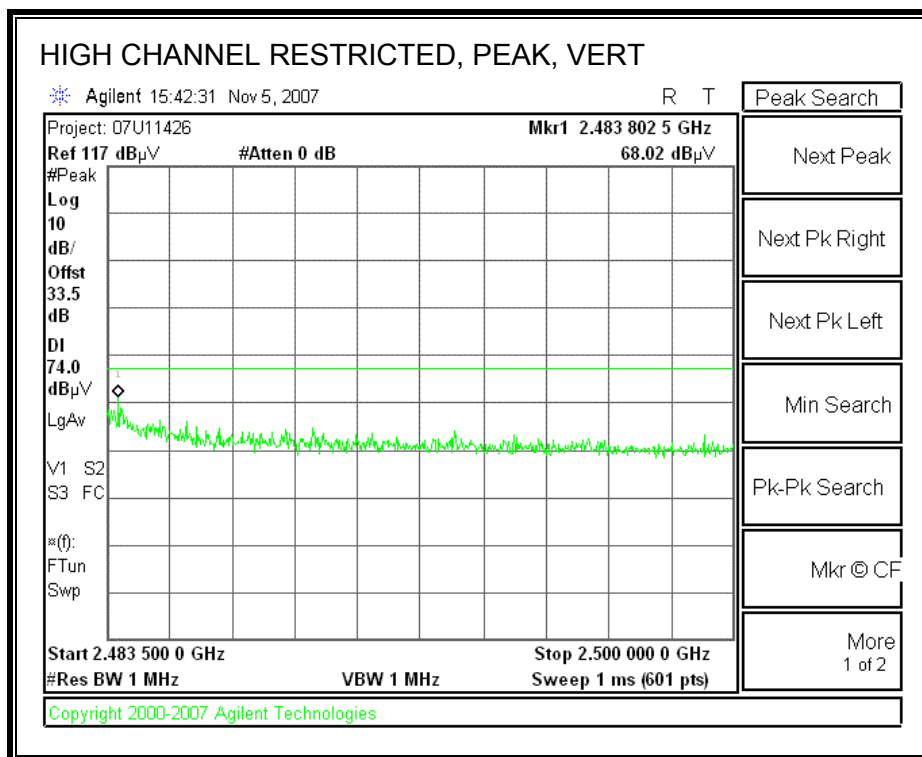

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																																														
Compliance Certification Services, Morgan Hill Open Field Site																																														
Company: Broadcom Project #: 07U11426 Date: 11/05/07 Test Engineer: Vien Tran Configuration: EUT on extended card Mode: Tx 11g																																														
Test Equipment:																																														
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit																																		
T119; S/N: 29301 @3m			T34 HP 8449B									FCC 15.205																																		
Hi Frequency Cables																																														
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																															
			Gordon 177080004			Chin 200354001			HPF_4.0GHz																																					
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filtr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																															
LOW CH, 2412 MHz																																														
4.824	3.0	50.8	35.5	33.7	3.5	-34.8	0.0	0.6	53.7	38.4	74	54	-20.3	-15.6	V																															
4.824	3.0	47.1	33.1	33.7	3.5	-34.8	0.0	0.6	50.0	36.0	74	54	-24.0	-18.0	H																															
MID CH, 2437 MHz																																														
4.874	3.0	51.4	36.2	33.7	3.5	-34.8	0.0	0.6	54.4	39.2	74	54	-19.6	-14.8	V																															
7.311	3.0	45.7	33.1	35.2	4.1	-34.1	0.0	0.6	51.4	38.8	74	54	-22.6	-15.2	V																															
4.874	3.0	46.7	33.4	33.7	3.5	-34.8	0.0	0.6	49.7	36.4	74	54	-24.3	-17.6	H																															
7.311	3.0	48.6	35.7	35.2	4.1	-34.1	0.0	0.6	54.4	41.4	74	54	-19.6	-12.6	H																															
HI CH, 2462 MHz																																														
4.924	3.0	51.7	36.8	33.8	3.5	-34.8	0.0	0.6	54.8	39.9	74	54	-19.2	-14.1	V																															
4.924	3.0	47.2	33.6	33.8	3.5	-34.8	0.0	0.6	50.3	36.7	74	54	-23.7	-17.3	H																															
<table style="width: 100%; border: none;"> <tr> <td>f</td><td>Measurement Frequency</td><td>Amp</td><td>Preamp Gain</td><td>Avg Lim</td><td>Average Field Strength Limit</td></tr> <tr> <td>Dist</td><td>Distance to Antenna</td><td>D Corr</td><td>Distance Correct to 3 meters</td><td>Pk Lim</td><td>Peak Field Strength Limit</td></tr> <tr> <td>Read</td><td>Analyzer Reading</td><td>Avg</td><td>Average Field Strength @ 3 m</td><td>Avg Mar</td><td>Margin vs. Average Limit</td></tr> <tr> <td>AF</td><td>Antenna Factor</td><td>Peak</td><td>Calculated Peak Field Strength</td><td>Pk Mar</td><td>Margin vs. Peak Limit</td></tr> <tr> <td>CL</td><td>Cable Loss</td><td>HPF</td><td>High Pass Filter</td><td></td><td></td></tr> </table>																	f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter		
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																									
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																									
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																									
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																									
CL	Cable Loss	HPF	High Pass Filter																																											

8.2. RECEIVER ABOVE 1 GHz

8.2.1. RECEIVER ABOVE 1 GHz 802.11 b MODE IN THE 2.4 GHz BAND

High Frequency Measurement																
Compliance Certification Services, Fremont 5m Chamber																
Company:		Broadcom														
Project #:		07U11426														
Date:		11/5/2007														
Test Engineer:		Mengistu Mekuria														
Configuration:		EUT, Extension Card, and Laptop														
Mode:		Rx b mode														
Test Equipment:																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T120; S/N: 29310 @3m			T145 Agilent 3008A0054									RX RSS 210				
Hi Frequency Cables																
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz	
						B-5m Chamber										
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fldr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
1.036	3.0	49.0	34.3	28.0	3.3	-36.1	0.0	0.0	44.1	29.4	74	54	-29.9	-24.6	V	
2.485	3.0	57.2	34.3	31.8	5.1	-35.1	0.0	0.0	59.0	36.1	74	54	-15.0	-17.9	V	
1.045	3.0	51.0	35.9	28.0	3.3	-36.1	0.0	0.0	46.2	31.1	74	54	-27.8	-22.9	H	
1.300	3.0	50.3	35.2	29.0	3.6	-35.9	0.0	0.0	47.0	31.9	74	54	-27.0	-22.1	H	
1.600	3.0	50.1	34.8	30.1	4.0	-35.7	0.0	0.0	48.5	33.2	74	54	-25.5	-20.8	H	
2.485	3.0	54.5	33.3	31.8	5.1	-35.1	0.0	0.0	56.2	35.1	74	54	-17.8	-18.9	H	
Rev. 412.7																
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss					HPF	High Pass Filter									

High Frequency Measurement																	
Compliance Certification Services, Fremont 5m Chamber																	
Company:	Broadcom																
Project #:	07U11426																
Date:	11/5/2007																
Test Engineer:	Mengistu Mekuria																
Configuration:	EUT, Extension Card, and Laptop																
Mode:	Rx g mode																
Test Equipment:																	
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit					
T120; S/N: 29310 @3m			T145 Agilent 3008A005(									RX RSS 210					
Hi Frequency Cables																	
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz		
						B-5m Chamber											
f GHz	Dist (m)	Read Pk dBμV	Read Avg. dBμV	AF dB/m	CL dB	Amp dB	D Corr dB	Fldr dB	Peak dBμV/m	Avg dBμV/m	Pk Lim dBμV/m	Avg Lim dBμV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
1.036	3.0	51.6	34.8	28.0	3.3	-36.1	0.0	0.0	46.7	30.0	74	54	-27.3	-24.0	V		
2.485	3.0	57.4	34.3	31.8	5.1	-35.1	0.0	0.0	59.1	36.1	74	54	-14.9	-17.9	V		
1.090	3.0	52.1	39.4	28.2	3.3	-36.1	0.0	0.0	47.5	34.9	74	54	-26.5	-19.1	H		
1.195	3.0	50.4	36.2	28.6	3.5	-36.0	0.0	0.0	46.4	32.2	74	54	-27.6	-21.8	H		
1.600	3.0	48.6	34.2	30.1	4.0	-35.7	0.0	0.0	47.0	32.6	74	54	-27.0	-21.4	H		
2.485	3.0	54.9	33.4	31.8	5.1	-35.1	0.0	0.0	56.7	35.2	74	54	-17.3	-18.8	H		

Rev. 412.7

f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter		

8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

HORIZONTAL PLOT & DATA



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 37 File#: 07U11426_EMI.EMI Date: 11-07-2007 Time: 00:41:21

Condition: FCC CLASS-B HORIZONTAL
Test Operator:: Mengistu Mekuria
Project #: : 07U11426
Company: : Broadcom
Configuration:: BUT, Extention Card, and Laptop
Mode : : Tx Worst Case
Target: : FCC Class B

Page: 1

	Freq	Level	Limit	Over	
	MHz	dBuV/m	dBuV/m	Limit	Remark
				dB	
1	402.480	35.81	46.00	-10.19	Peak
2	417.030	35.64	46.00	-10.36	Peak
3	555.740	32.04	46.00	-13.96	Peak
4	722.580	36.99	46.00	-9.01	Peak

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)

VERTICAL PLOT & DATA



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 38 File#: 07U11426_EMI.EMI Date: 11-07-2007 Time: 00:45:49

Condition: FCC CLASS-B VERTICAL
Test Operator:: Mengistu Mekuria
Project #: : 07U11426
Company: : Broadcom
Configuration:: BUT, Extention Card, and Laptop
Mode : : Tx Worst Case
Target: : FCC Class B

Page: 1

	Freq	Level	Limit	Over	
			Line	Limit	Remark
	MHz	dBuV/m	dBuV/m	dB	
1	101.780	35.91	43.50	-7.59	Peak
2	279.290	32.13	46.00	-13.87	Peak
3	367.560	33.29	46.00	-12.71	Peak
4	383.080	33.21	46.00	-12.79	Peak
5	450.980	37.58	46.00	-8.42	Peak
6	698.330	38.27	46.00	-7.73	Peak

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS

6 WORST EMISSIONS


CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN_B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.38	43.19	--	--	0.00	58.30	48.30	-15.11	-5.11	L1
0.51	40.35	--	--	0.00	56.00	46.00	-15.65	-5.65	L1
0.95	37.57	--	--	0.00	56.00	46.00	-18.43	-8.43	L1
0.38	42.89	--	--	0.00	58.30	48.30	-15.41	-5.41	L2
0.51	40.55	--	--	0.00	56.00	46.00	-15.45	-5.45	L2
0.95	38.45	--	--	0.00	56.00	46.00	-17.55	-7.55	L2
6 Worst Data									

LINE 1 RESULTS



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 7 File#: 07U11426 LC.EMI Date: 11-05-2007 Time: 22:03:04

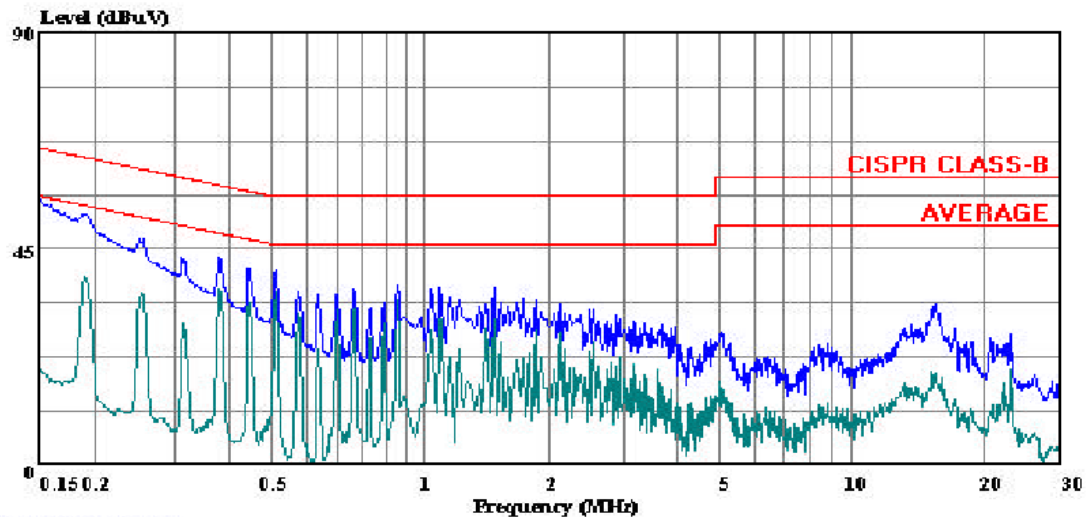

(Line Conduction)

Trace: 5

Ref Trace:


Condition: CISPR CLASS-B
Test Operator:: Mengistu Mekuria
Project #: : 07U11426
Company: : Broadcom
Configuration: BUT, Extention Card, and Laptop
Mode: : Tx mode (Worst Case)
Target: : FCC Class B
Voltage: : 115VAC/60Hz
: L1: Peak (Blue); Green (Average)

LINE 2 RESULTS



Compliance Certification Services
47173 Benicia Street
Fremont, CA 94538
Tel: (510) 771-1000
Fax: (510) 661-0888

Data#: 14 File#: 07U11426 LC.EMI Date: 11-05-2007 Time: 22:15:26

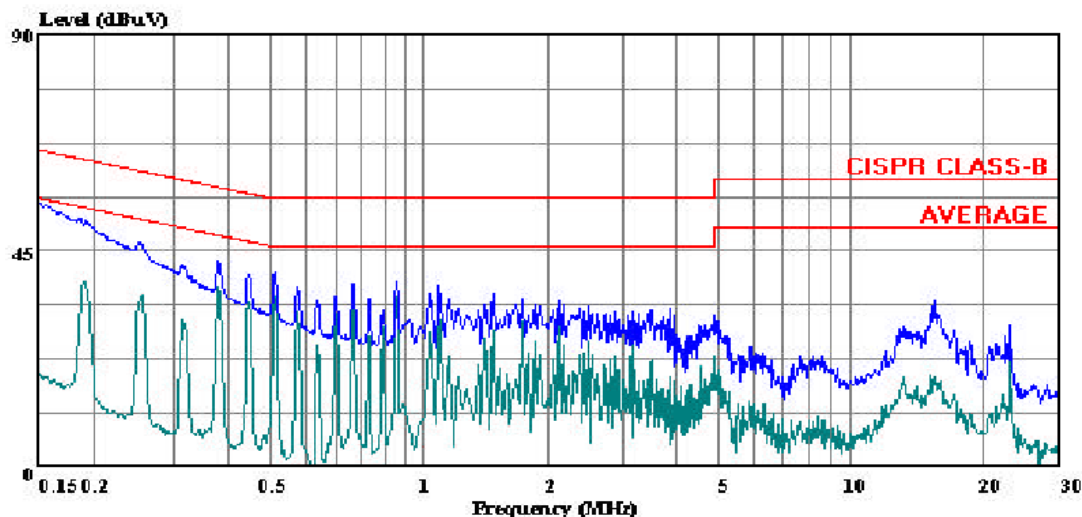

(Line Conduction)

Trace: 12

Ref Trace:

Condition: CISPR CLASS-B
Test Operator:: Mengistu Mekuria
Project #: 07U11426
Company: Broadcom
Configuration: EUT, Extention Card, and Laptop
Mode: Tx mode (Worst Case)
Target: FCC Class B
Voltage: 115VAC/60Hz
L2: Peak (Blue); Green (Average)

10. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	$280/f$	$2.19/f$		6
10–30	28	$2.19/f$		6
30–300	28	0.073	2*	6
300–1 500	$1.585f^{0.5}$	$0.0042f^{0.5}$	$f/150$	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	$616\,000/f^{1.2}$
150 000–300 000	$0.158f^{0.5}$	$4.21 \times 10^{-4}f^{0.5}$	$6.67 \times 10^{-5}f$	$616\,000/f^{1.2}$

* Power density limit is applicable at frequencies greater than 100 MHz.

Notes: 1. Frequency, f , is in MHz.
2. A power density of 10 W/m² is equivalent to 1 mW/cm².
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations, rearranging the terms to express the distance as a function of the remaining variables, changing to units of Power to mW and Distance to cm, and substituting the logarithmic form of power and gain yields:

$$d = 0.282 * 10^{((P + G) / 20)} / \sqrt{S}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm²

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10)} / (d^2)$$

The power density in units of mW/cm² is converted to units of W/m² by multiplying by a factor of 10.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of $S = 1.0 \text{ mW/cm}^2$

From IC Safety Code 6, Section 2.2 Table 5 Column 4, $S = 10 \text{ W/m}^2$

RESULTS

(MPE distance equals 20 cm)

Mode	Band	MPE Distance (cm)	Output Power (dBm)	Antenna Gain (dBi)	FCC Power Density (mW/cm ²)	IC Power Density (W/m ²)
WLAN	2.4 GHz	20.0	23.05	3.90	0.10	0.98

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.