




System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/30/2008 2:15:33 PM	DUT Battery Model/No:	
Filename:	Main_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	26.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	17.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	4.24 V/m
Test Frequency:	2437MHz	SAR 1g:	0.045 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.001 W/kg
Type of Modulation:		SAR End:	0.001 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.74 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

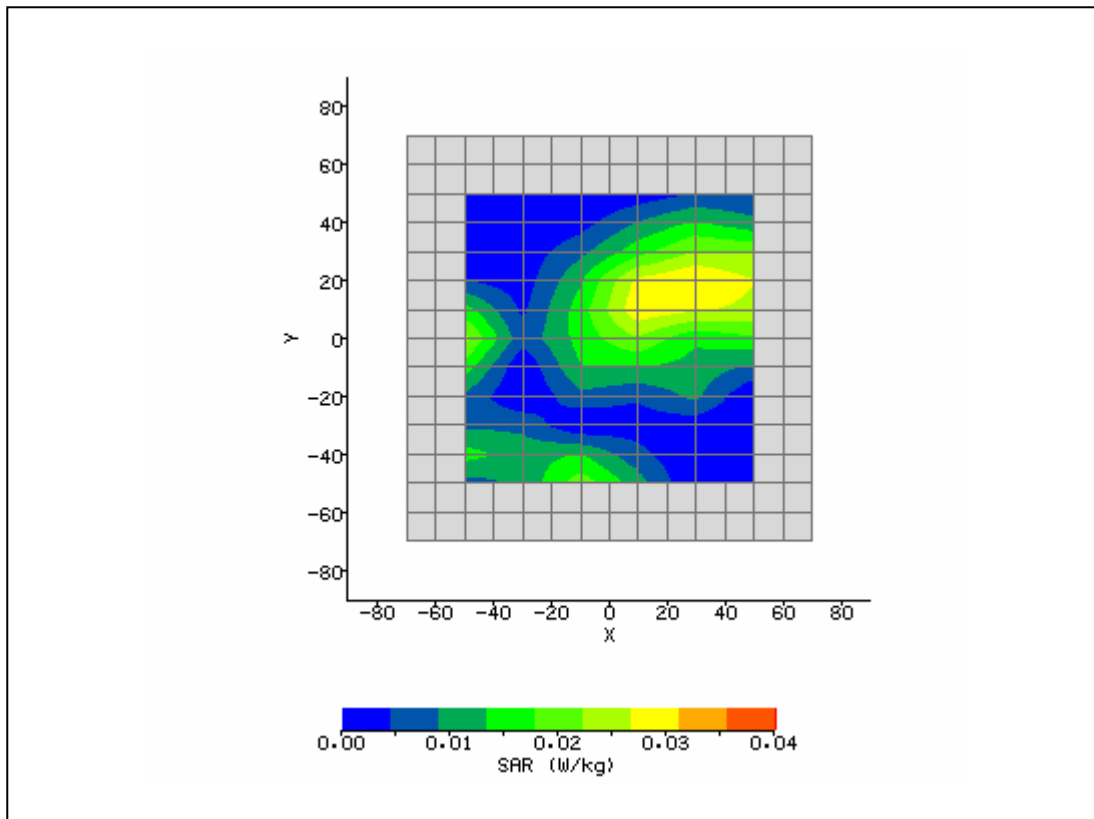


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/30/2008 2:52:14 PM	DUT Battery Model/No:	
Filename:	Main_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	2.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	28.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	4.87 V/m
Test Frequency:	2437MHz	SAR 1g:	0.059 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.002 W/kg
Type of Modulation:		SAR End:	0.002 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-2.18 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

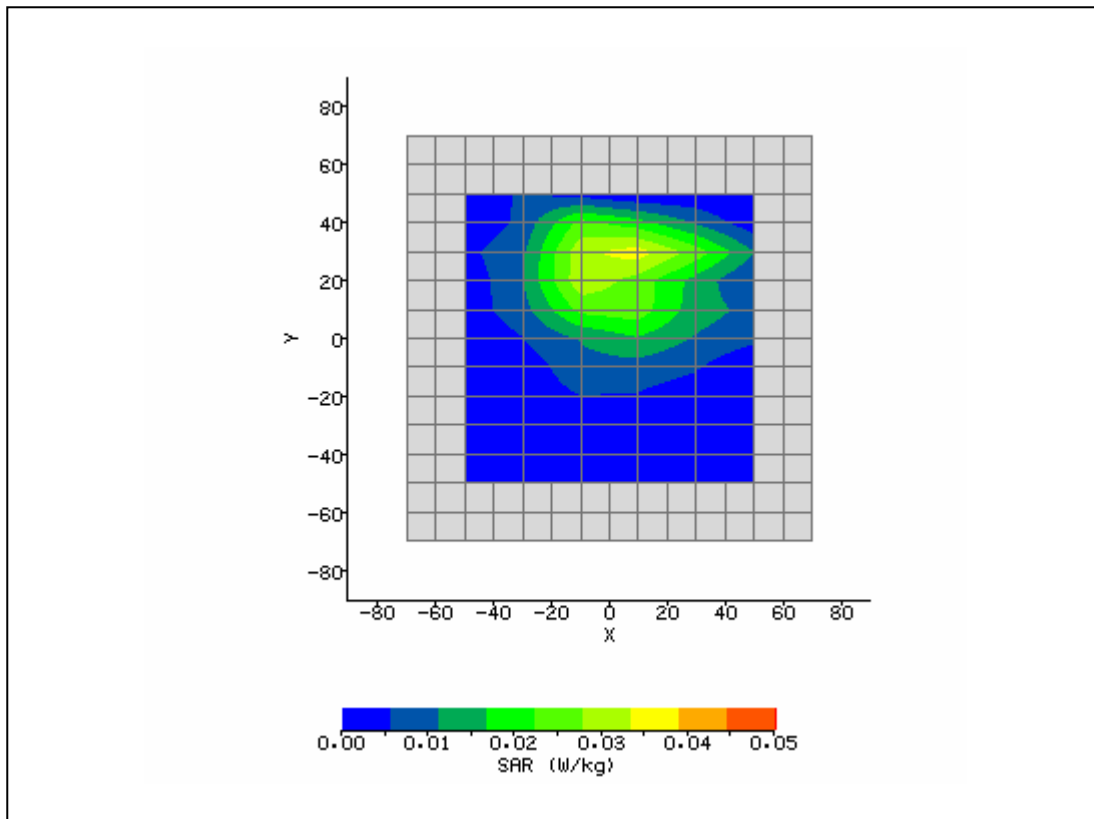


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/30/2008 3:10:33 PM	DUT Battery Model/No:	
Filename:	Aux_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	18.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	21.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	8.02 V/m
Test Frequency:	2437MHz	SAR 1g:	0.164 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.012 W/kg
Type of Modulation:		SAR End:	0.012 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.26 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

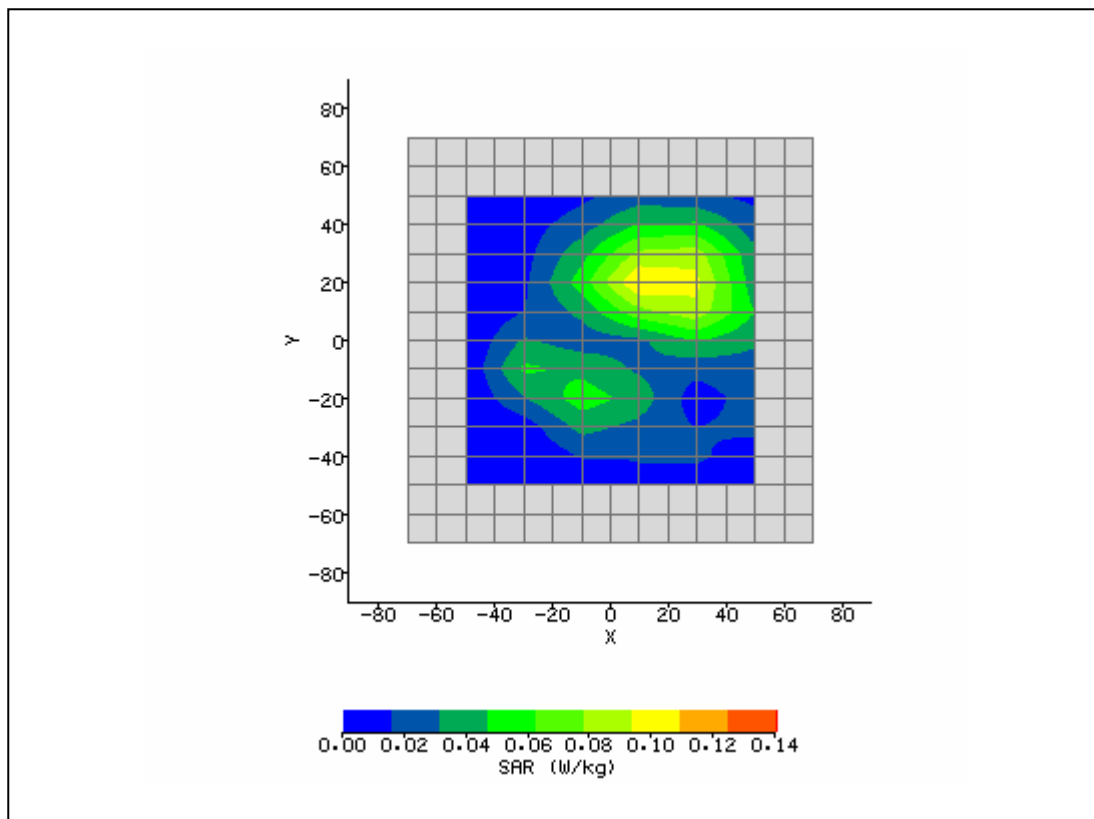


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/30/2008 3:51:57 PM	DUT Battery Model/No:	
Filename:	Aux_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-2.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	8.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	6.30 V/m
Test Frequency:	2437MHz	SAR 1g:	0.095 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.005 W/kg
Type of Modulation:		SAR End:	0.005 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	3.20 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

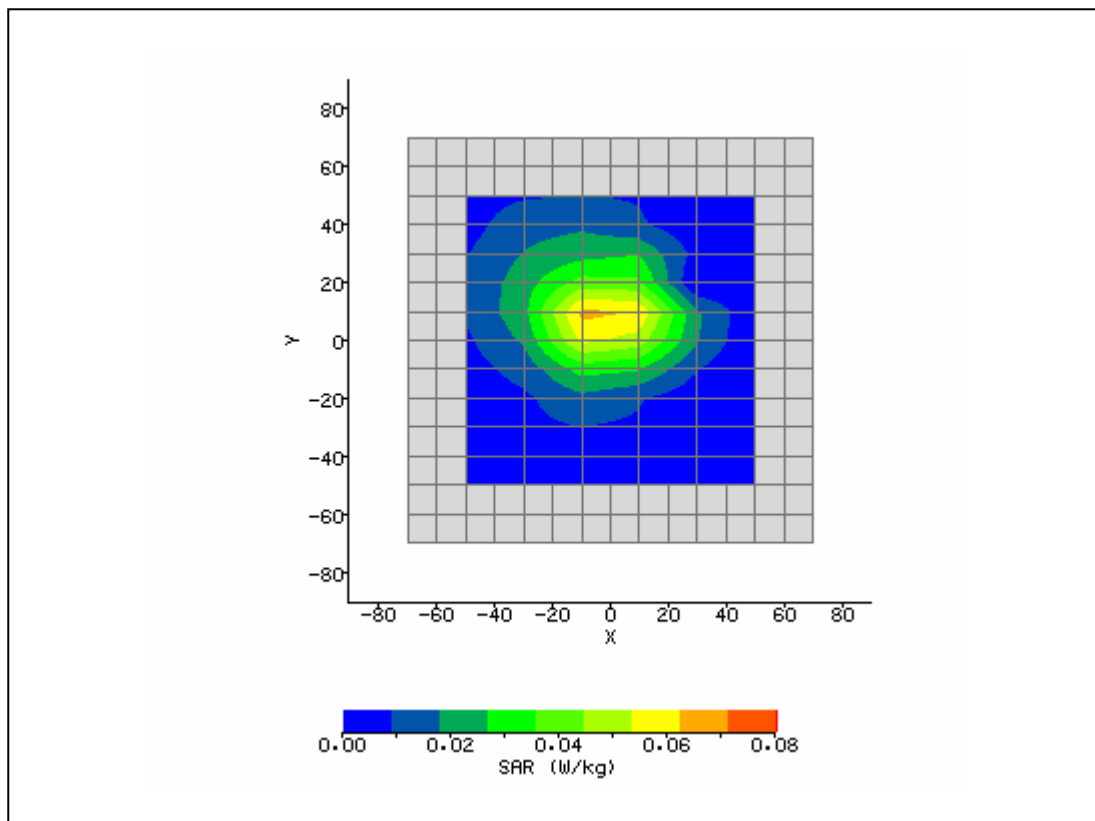


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/30/2008 4:16:50 PM	DUT Battery Model/No:	
Filename:	Main_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	5.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	5.54 V/m
Test Frequency:	2437MHz	SAR 1g:	0.081 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.002 W/kg
Type of Modulation:		SAR End:	0.002 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.71 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

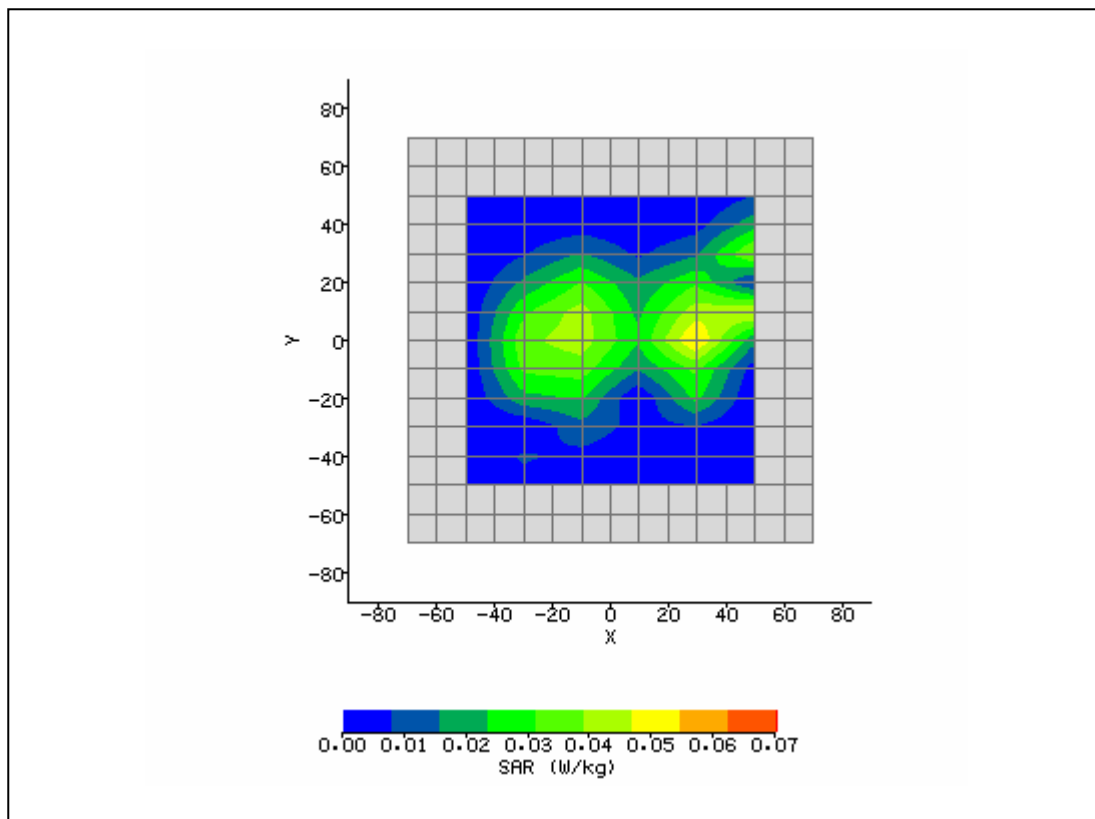


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 9:29:14 AM	DUT Battery Model/No:	
Filename:	Main_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	20.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	7.95 V/m
Test Frequency:	2437MHz	SAR 1g:	0.147 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.009 W/kg
Type of Modulation:		SAR End:	0.009 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.91 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

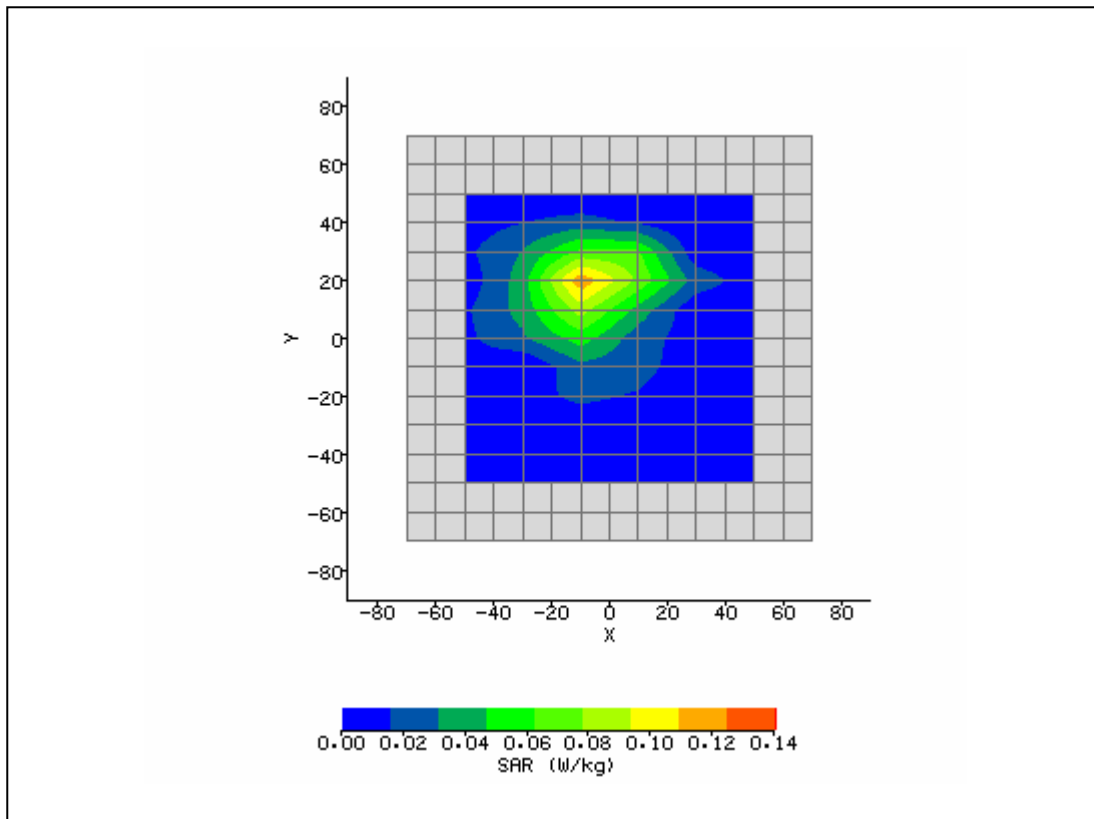


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 10:26:17 AM	DUT Battery Model/No:	
Filename:	Aux_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-22.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	19.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	8.56 V/m
Test Frequency:	2437MHz	SAR 1g:	0.199 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.014 W/kg
Type of Modulation:		SAR End:	0.014 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.53 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

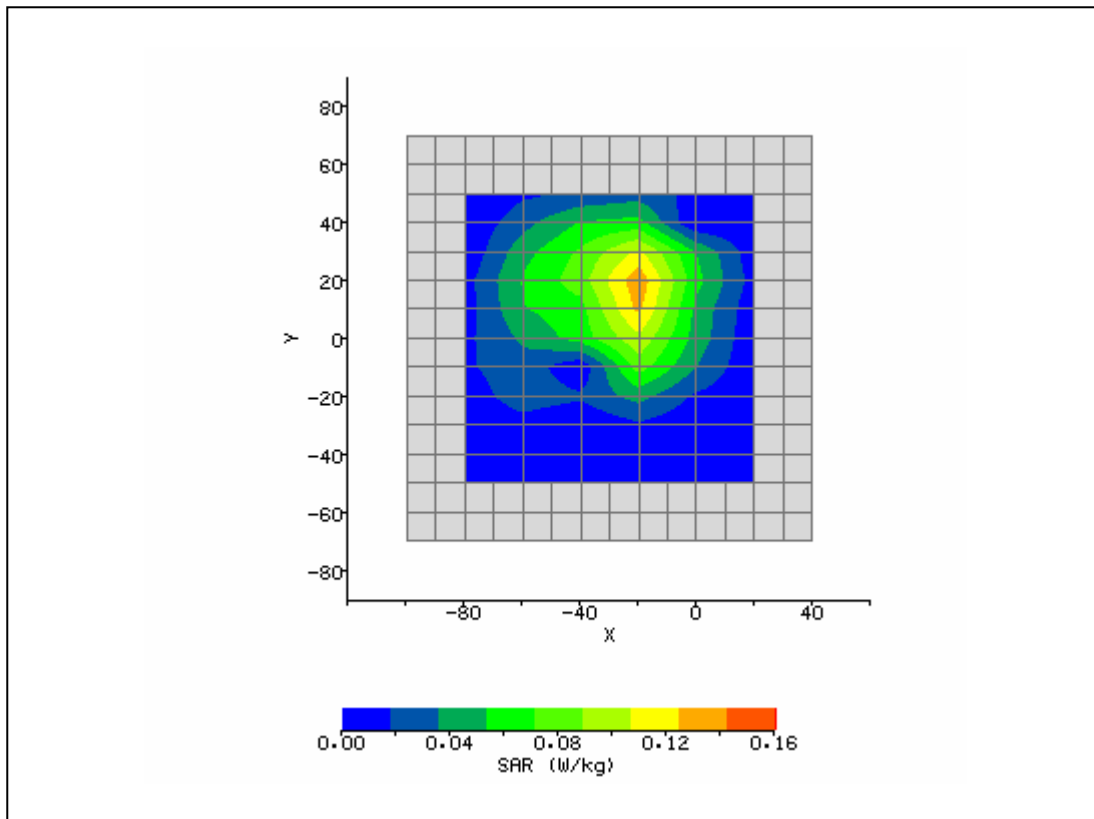


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 9:46:34 AM	DUT Battery Model/No:	
Filename:	Aux_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	11.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	7.93 V/m
Test Frequency:	2437MHz	SAR 1g:	0.156 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.008 W/kg
Type of Modulation:		SAR End:	0.008 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.90 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

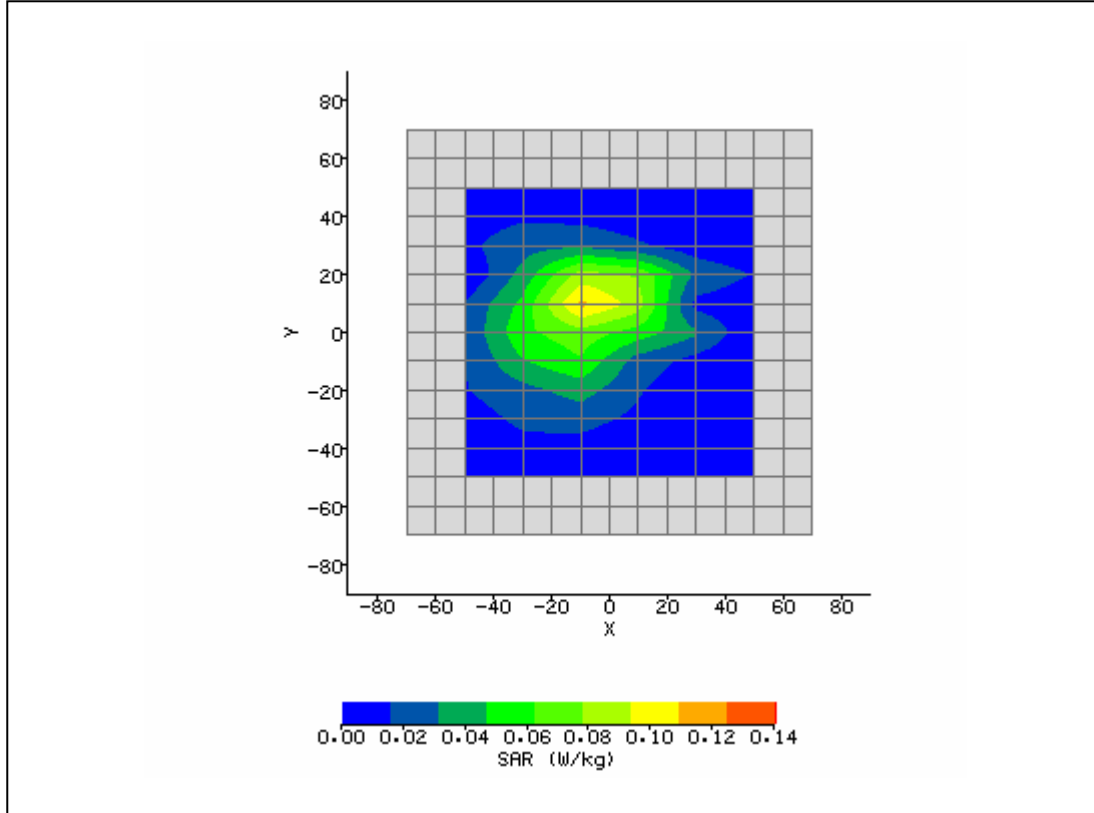


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 4:54:06 PM	DUT Battery Model/No:	
Filename:	Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	32.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	16.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	4.43 V/m
Test Frequency:	2437MHz	SAR 1g:	0.056 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.001 W/kg
Type of Modulation:		SAR End:	0.001 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.23 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

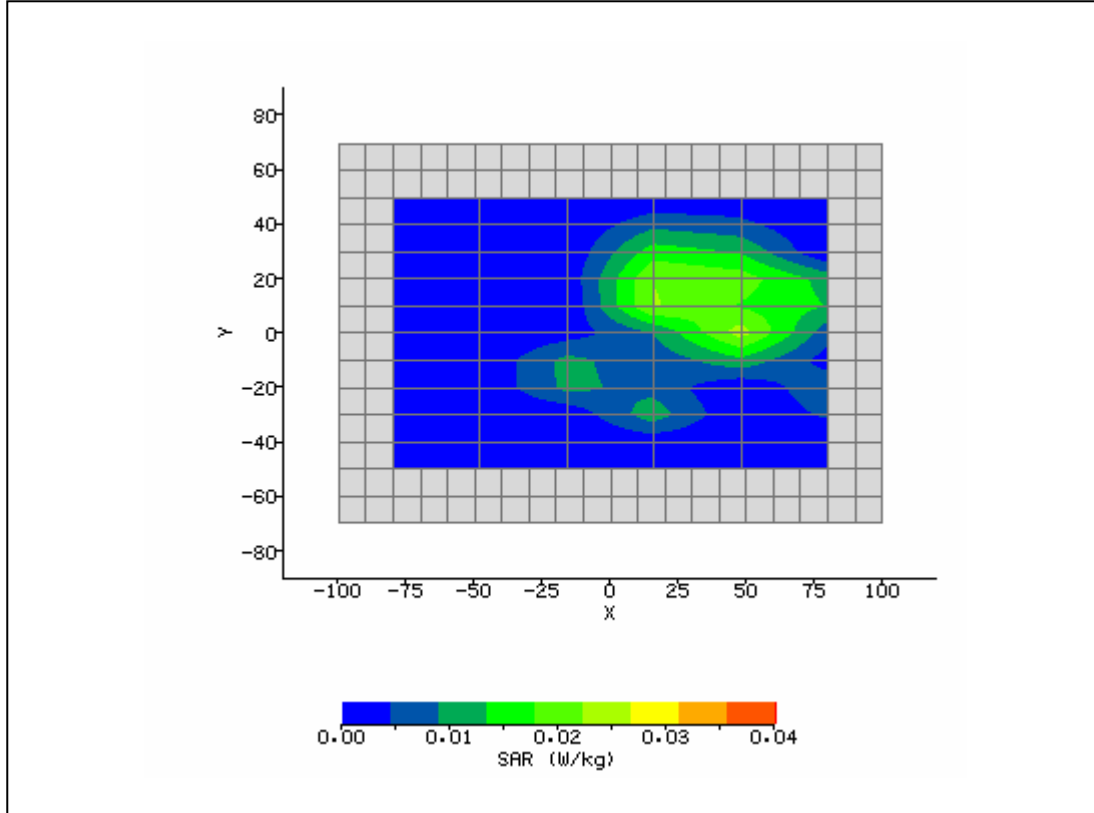


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 4:31:26 PM	DUT Battery Model/No:	
Filename:	Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	14.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	2.46 V/m
Test Frequency:	2437MHz	SAR 1g:	0.015 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

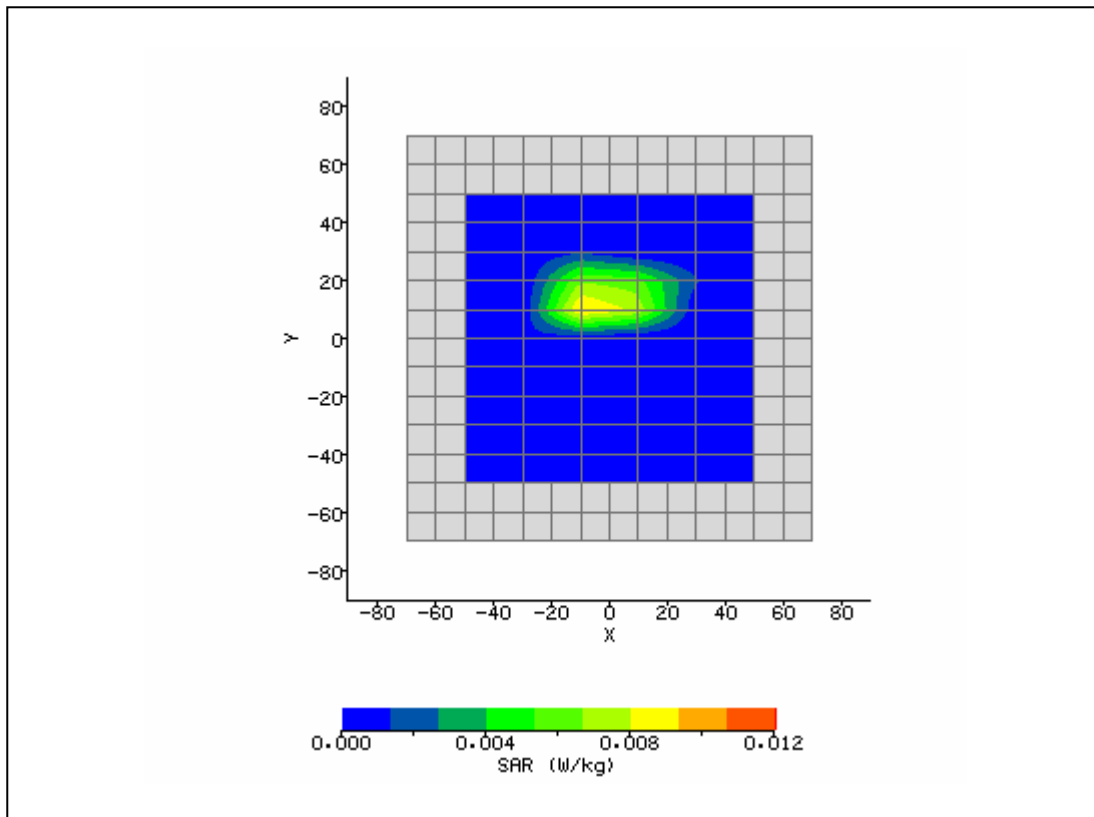


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 1:16:07 PM	DUT Battery Model/No:	
Filename:	Main_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-43.60 mm
DUT Position:	Lap	Max SAR Y-axis Location:	9.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	3.54 V/m
Test Frequency:	2437MHz	SAR 1g:	0.032 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

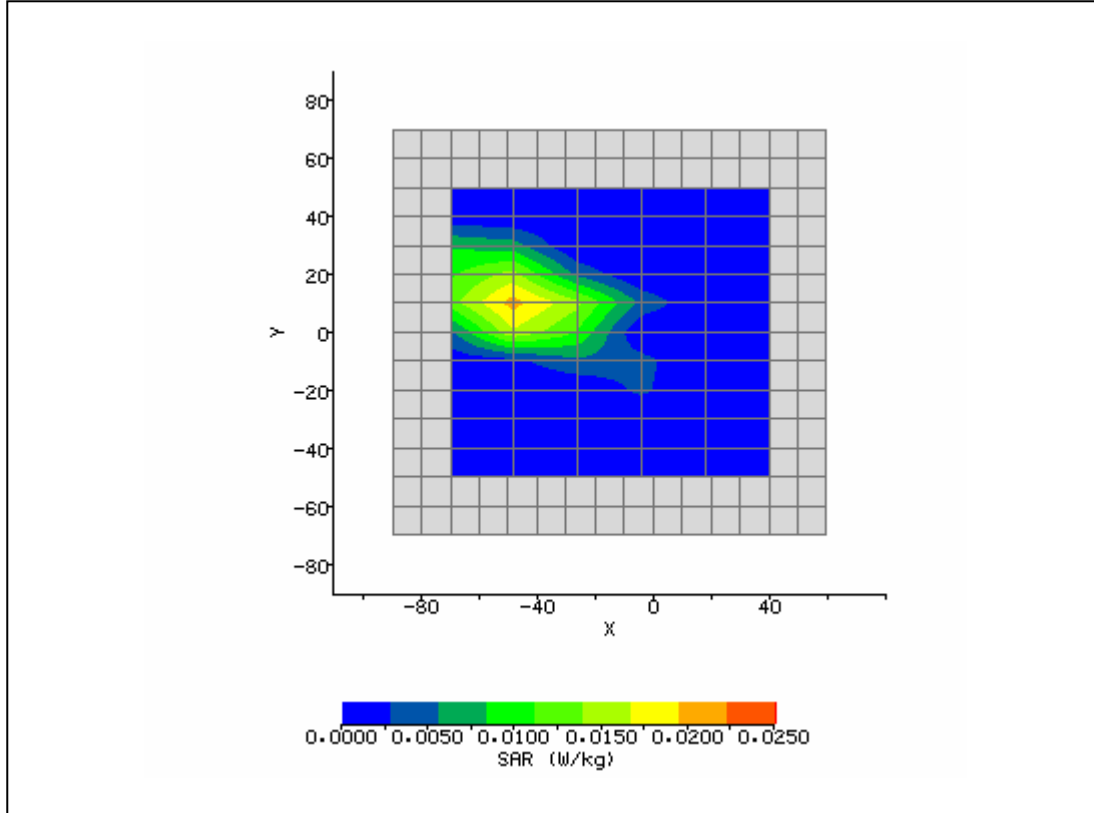


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 2:22:32 PM	DUT Battery Model/No:	
Filename:	Main_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-2.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	23.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	5.68 V/m
Test Frequency:	2437MHz	SAR 1g:	0.082 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

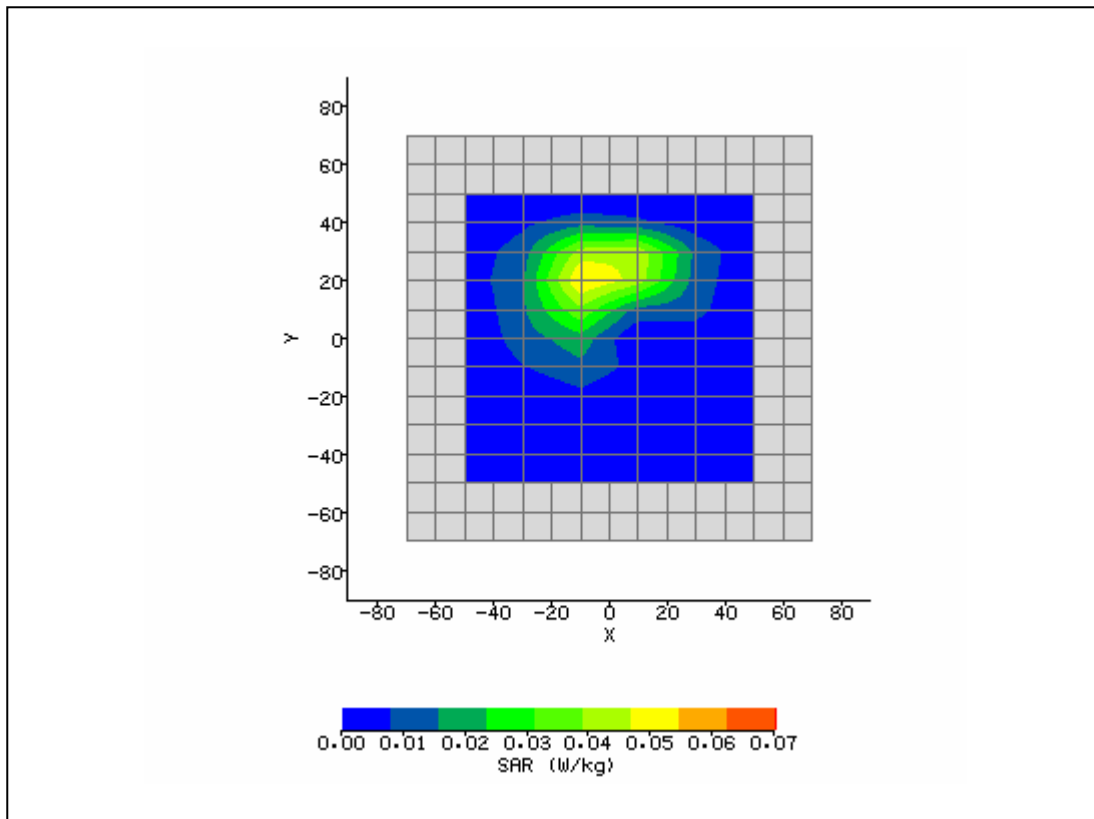


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/4/2008 3:51:52 PM	DUT Battery Model/No:	
Filename:	Lap_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

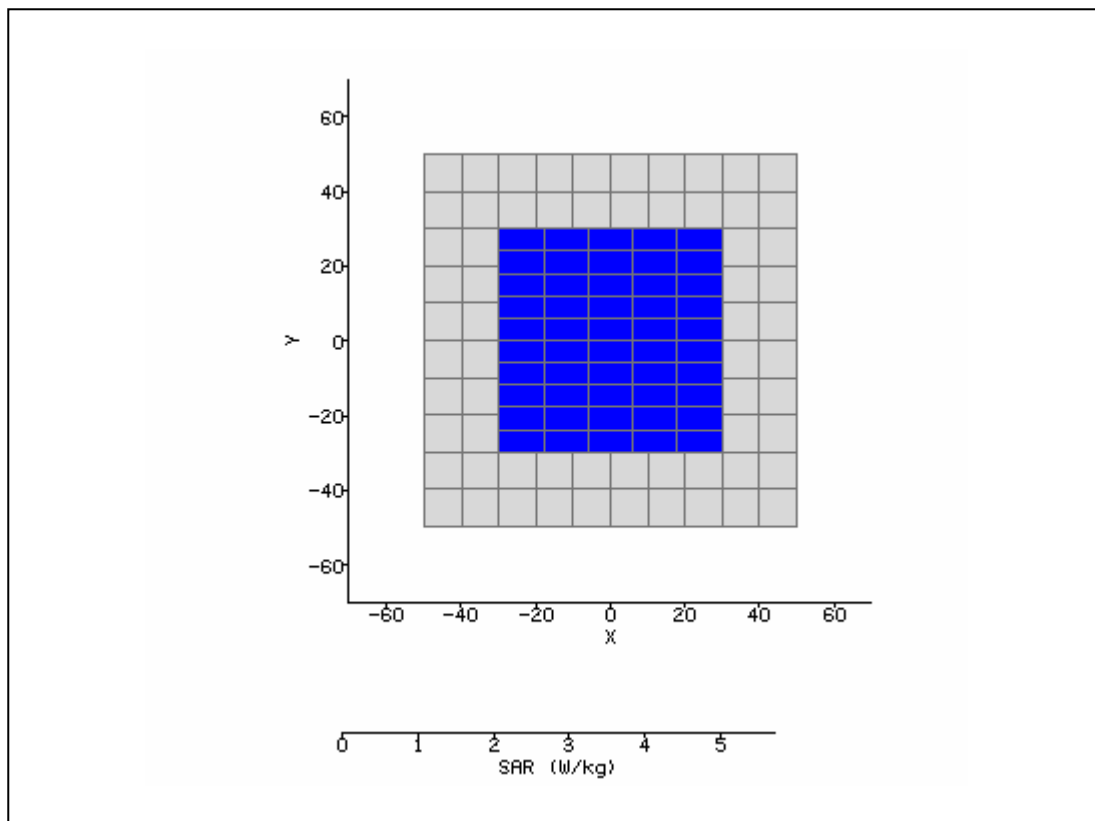


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/4/2008 4:07:23 PM	DUT Battery Model/No:	
Filename:	Side_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

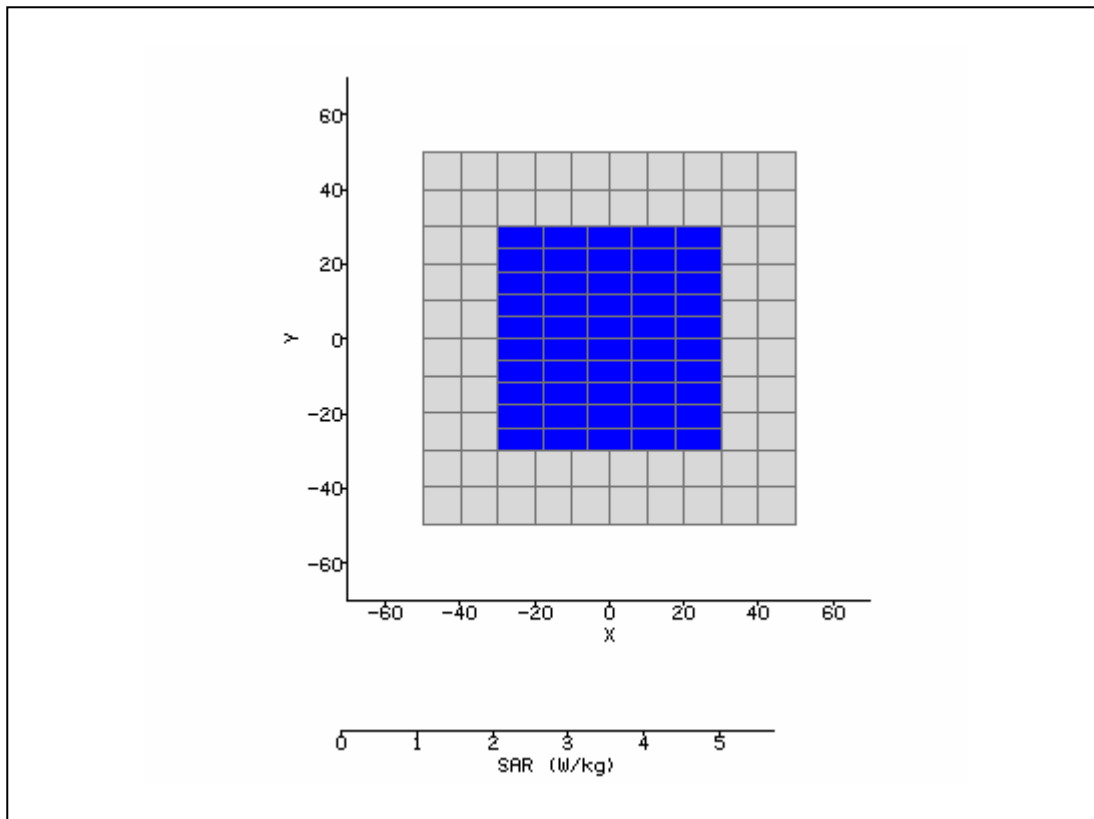


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 2:34:36 PM	DUT Battery Model/No:	
Filename:	Aux_Lap_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

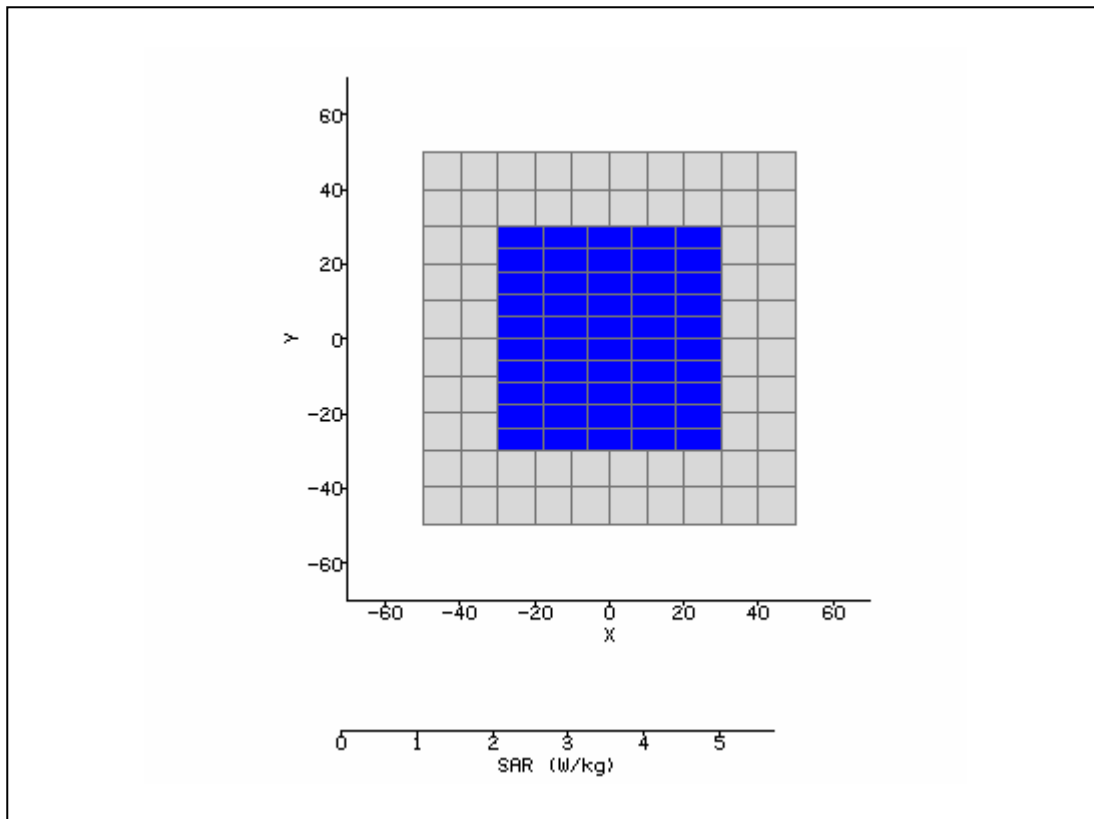


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 2:52:10 PM	DUT Battery Model/No:	
Filename:	Aux_Side_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

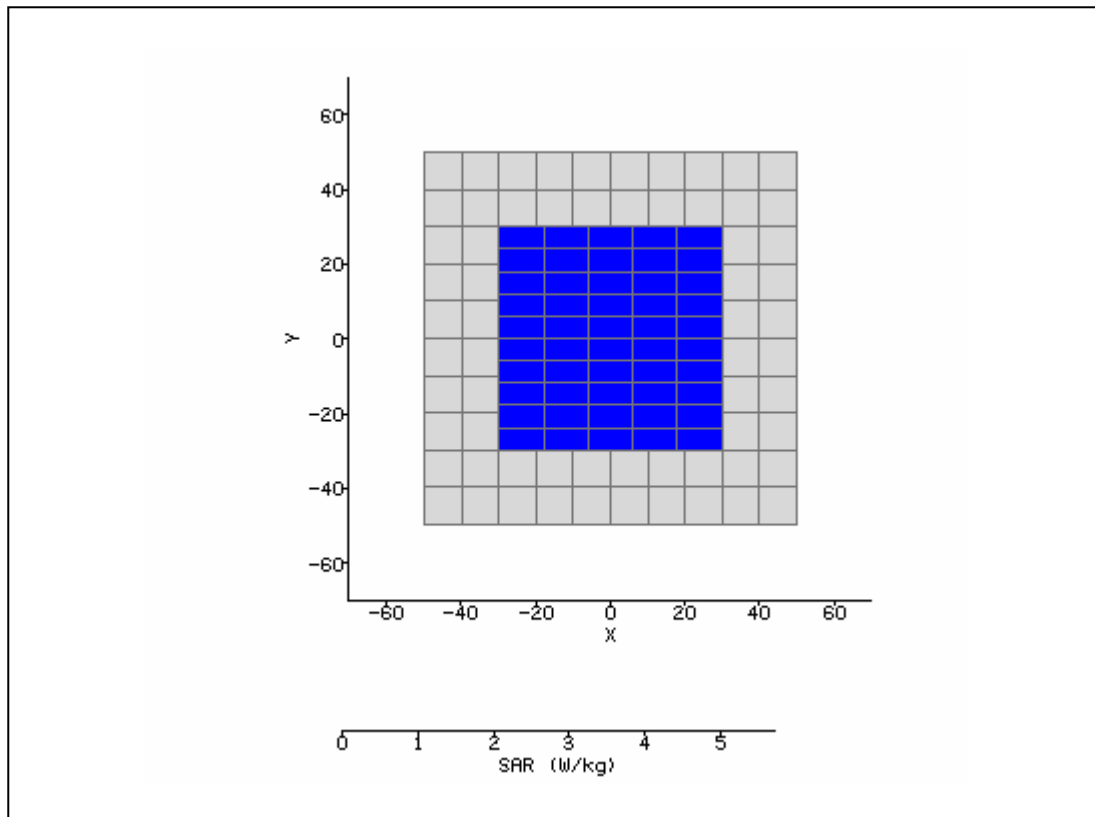


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/4/2008 4:44:20 PM	DUT Battery Model/No:	
Filename:	Lap_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

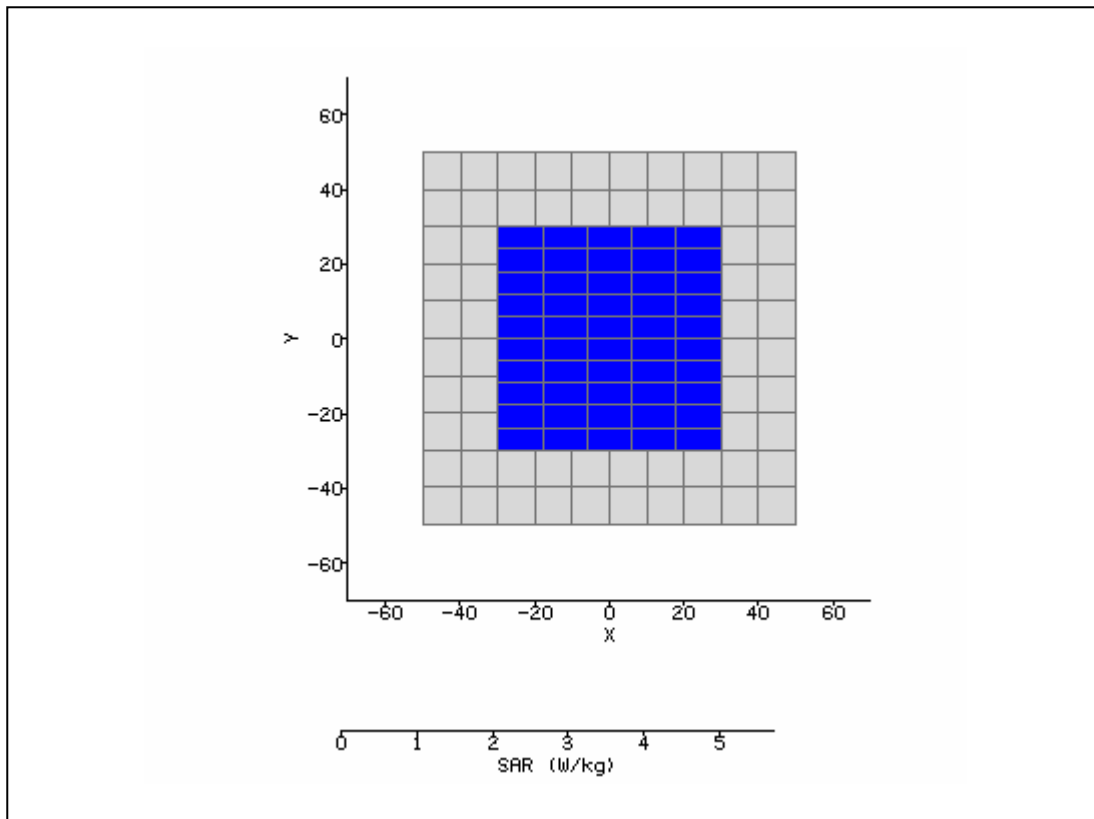


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/4/2008 4:27:26 PM	DUT Battery Model/No:	
Filename:	Side_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

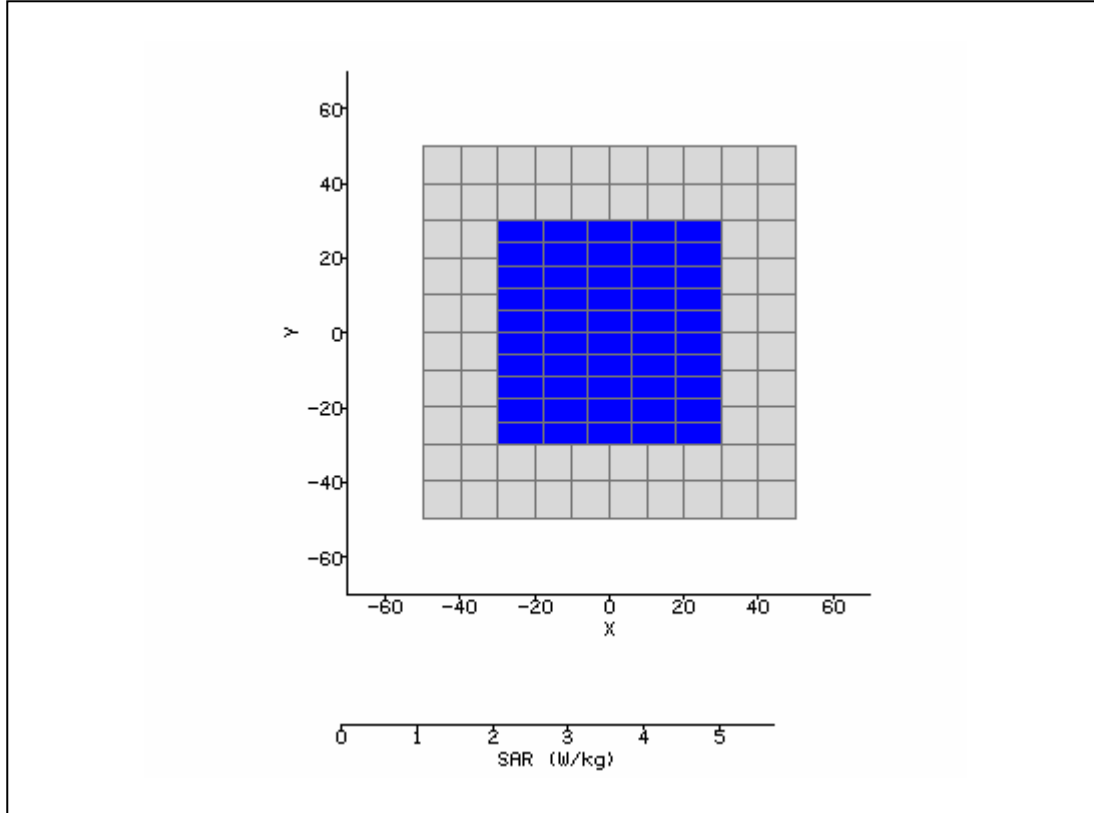


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 4:36:49 PM	DUT Battery Model/No:	
Filename:	Aux_Lap_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

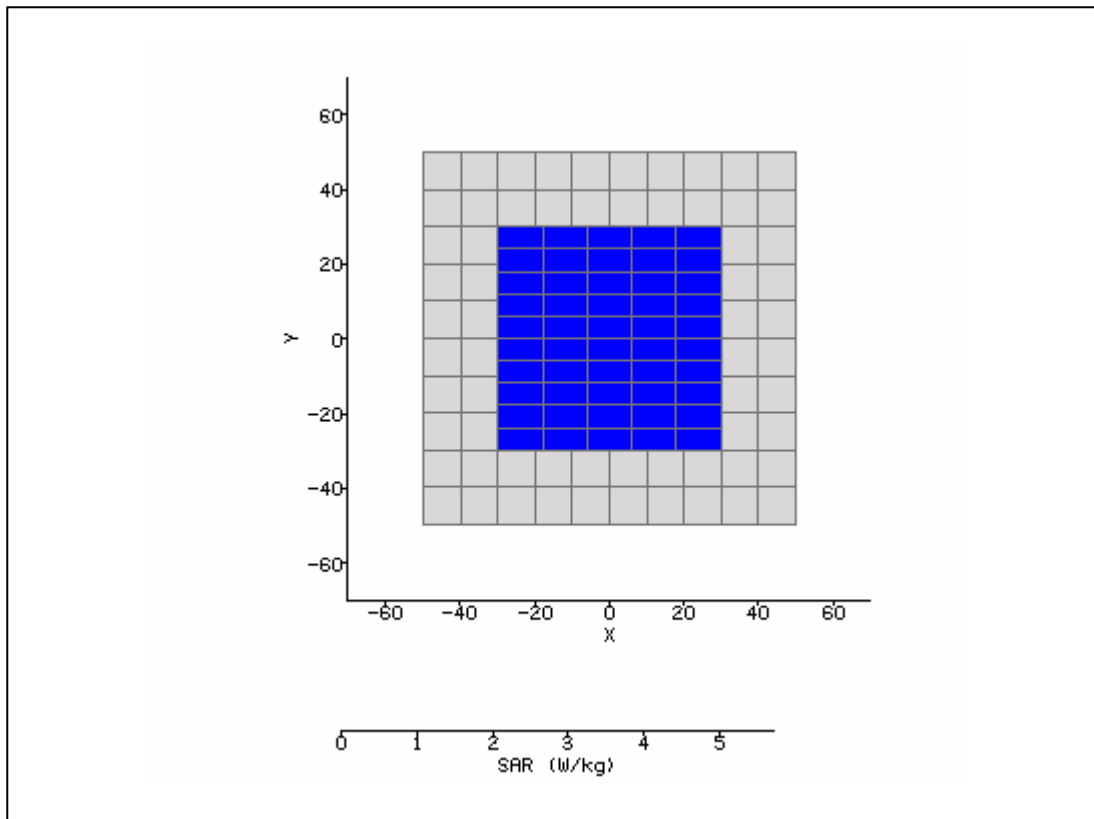


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 4:20:27 PM	DUT Battery Model/No:	
Filename:	Aux_Side_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

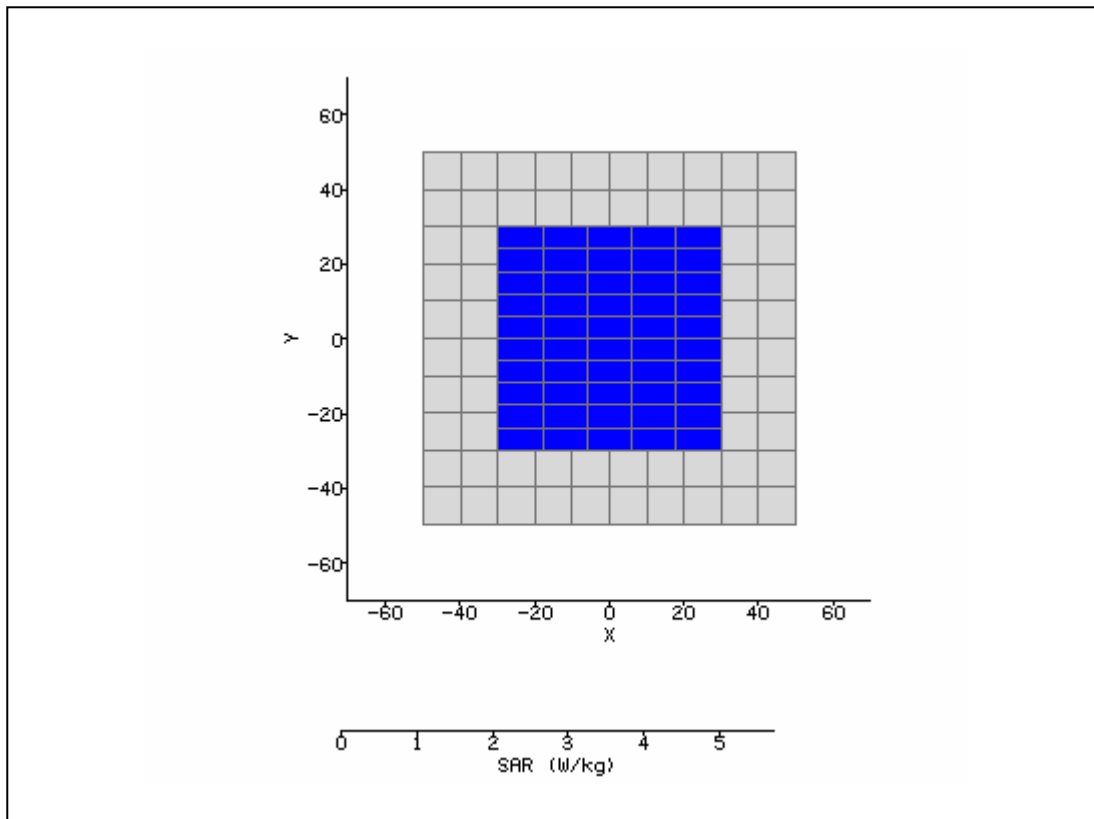


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 12:18:14 PM	DUT Battery Model/No:	
Filename:	Lap_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

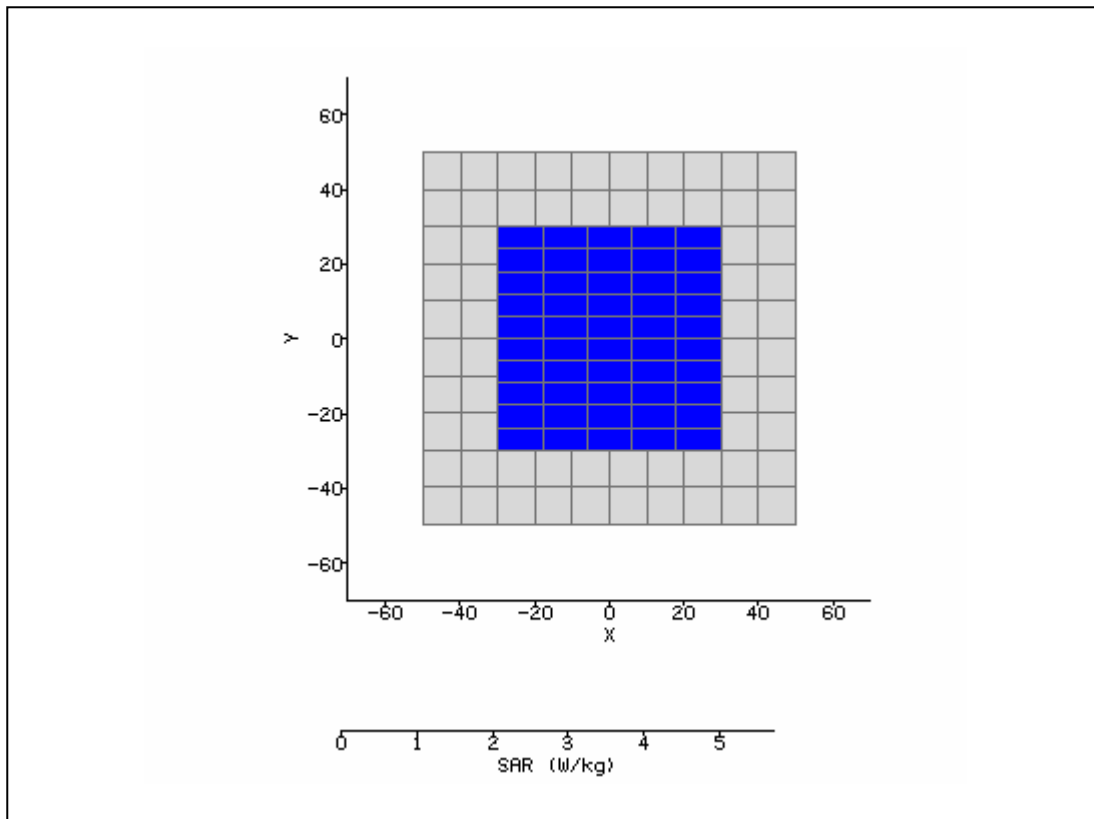


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 12:35:14 PM	DUT Battery Model/No:	
Filename:	Side_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

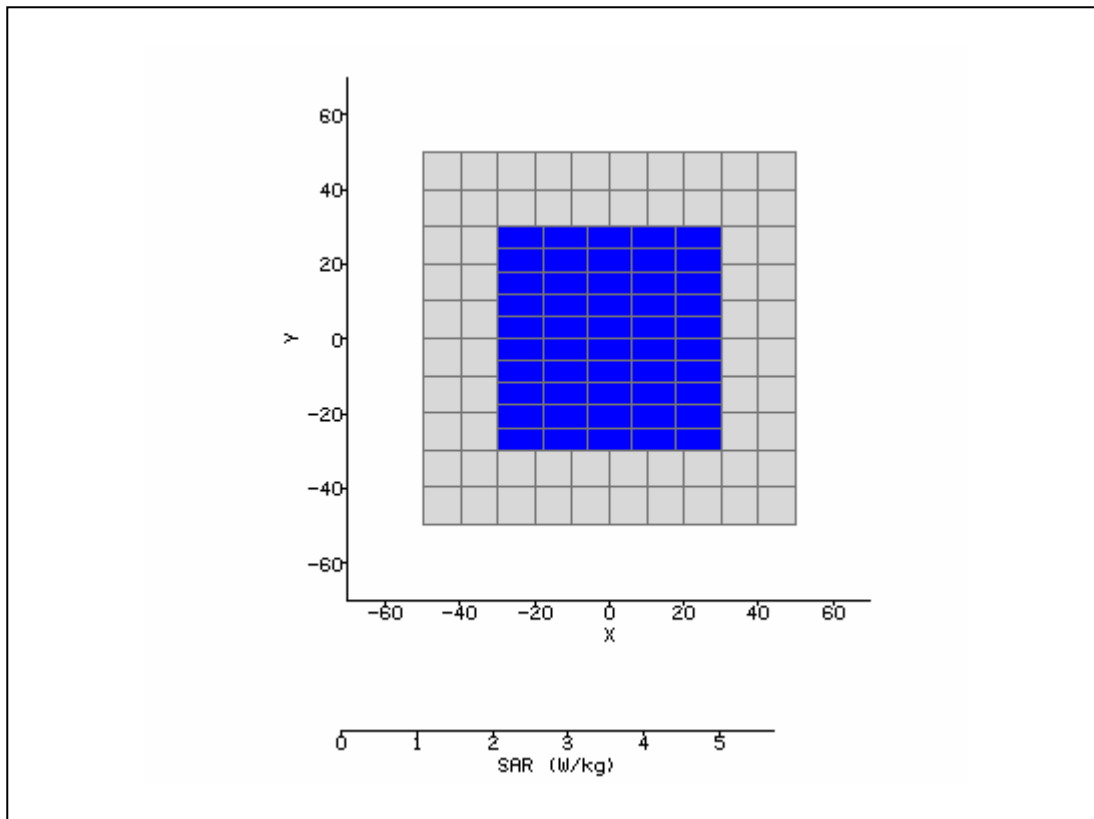


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 1:39:41 PM	DUT Battery Model/No:	
Filename:	Aux_Lap_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

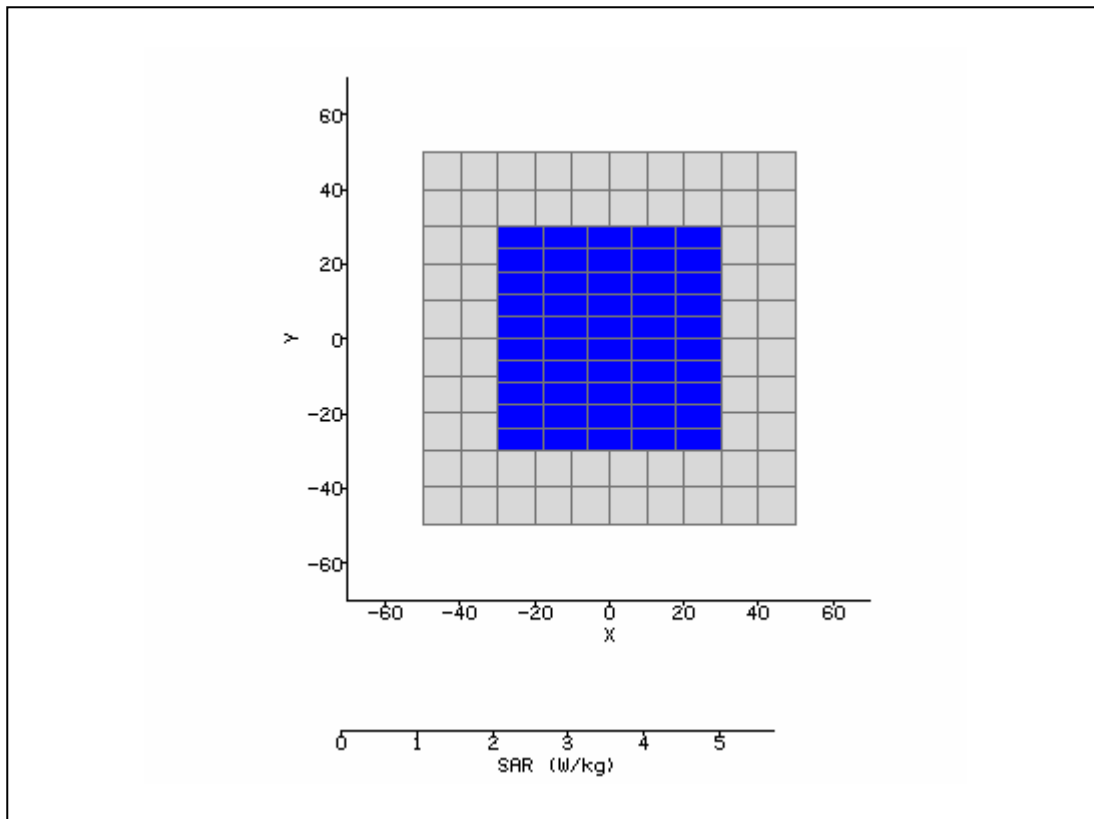


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 1:22:45 PM	DUT Battery Model/No:	
Filename:	Aux_Side_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

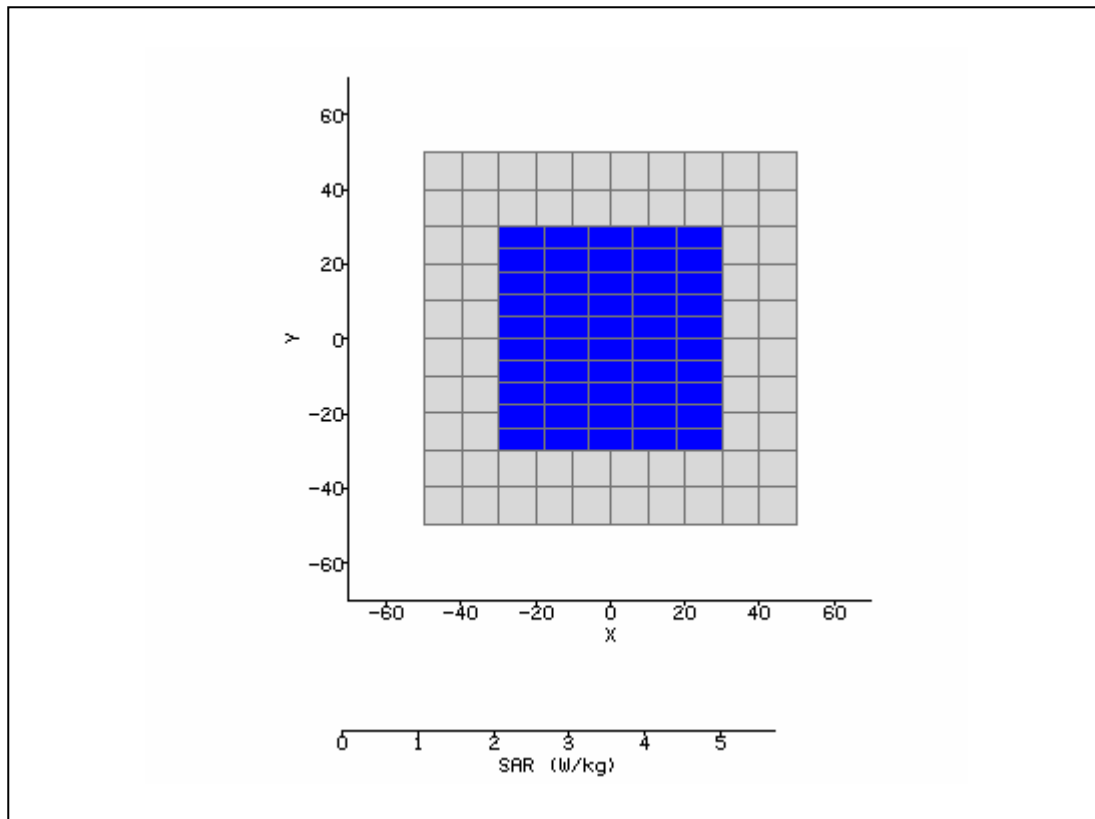


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 11:41:14 AM	DUT Battery Model/No:	
Filename:	Lap_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

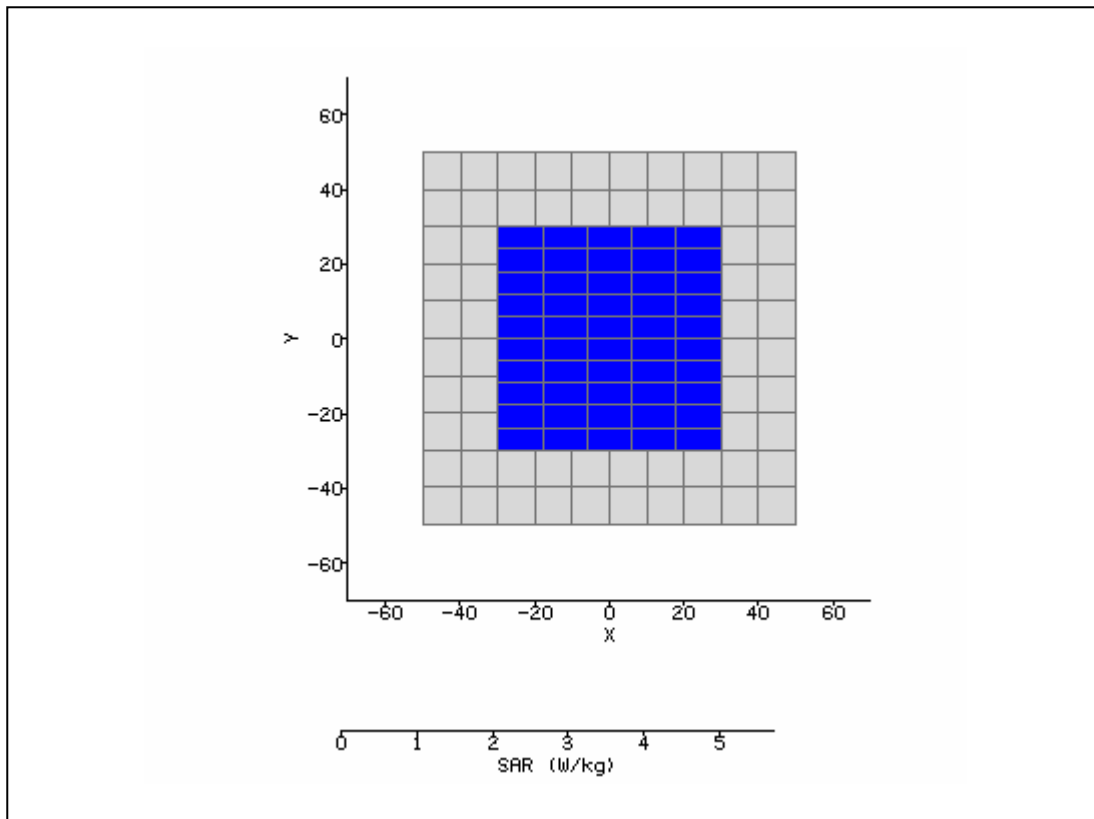


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 11:59:14 AM	DUT Battery Model/No:	
Filename:	Side_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

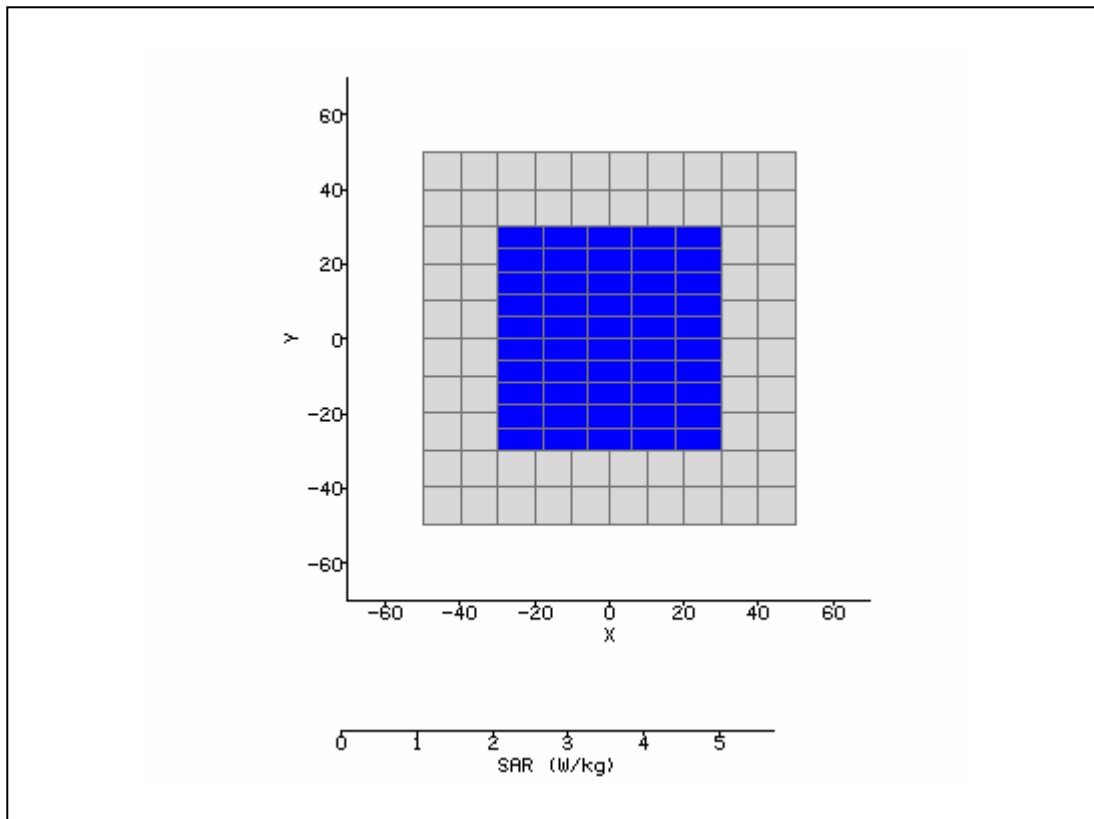


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 11:43:35 AM	DUT Battery Model/No:	
Filename:	Aux_Lap_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

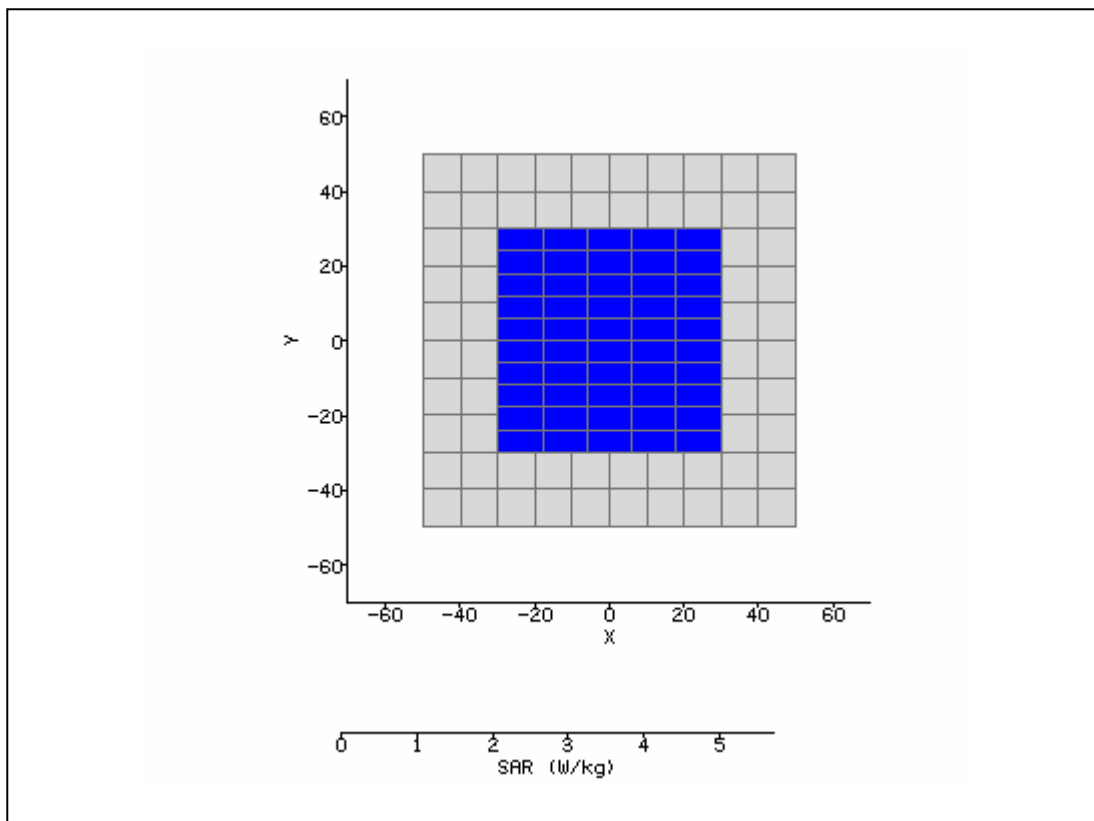


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 11:23:21 AM	DUT Battery Model/No:	
Filename:	Aux_Side_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/06/08
Input Power Level:	Set by power table	Extrapolation:	poly4

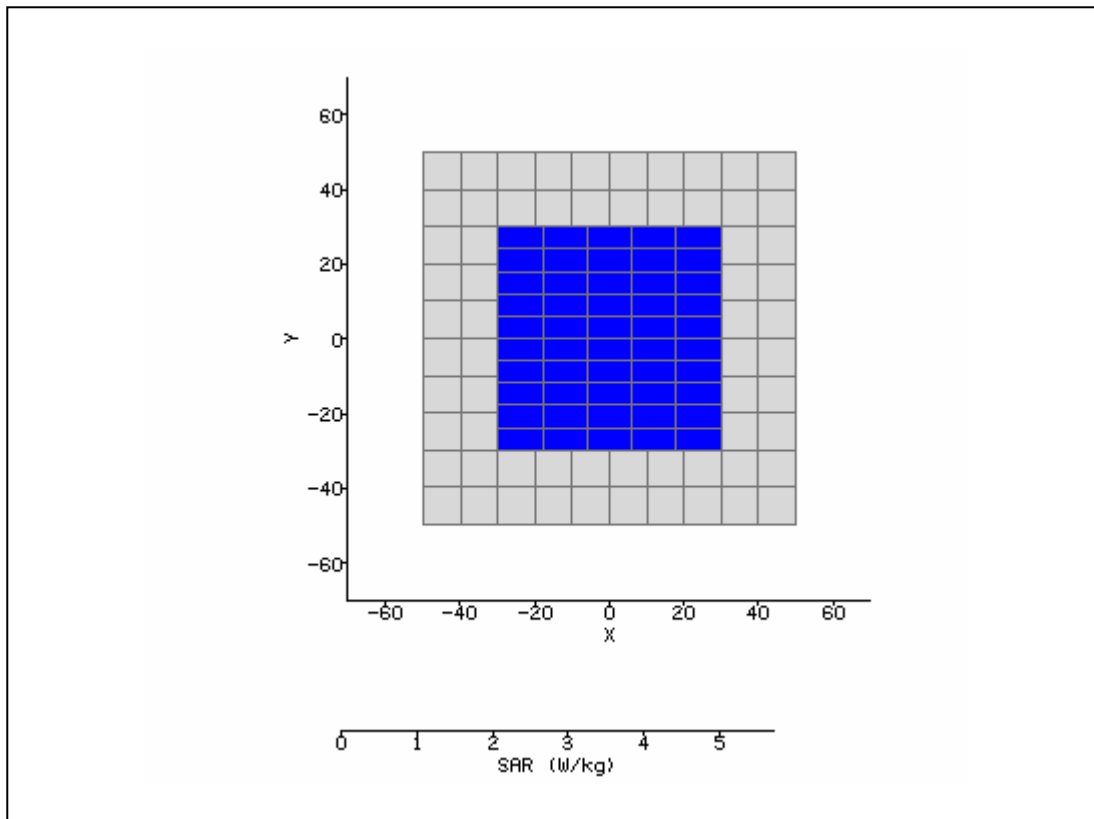


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 2:04:51 PM	DUT Battery Model/No:	
Filename:	Lap_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

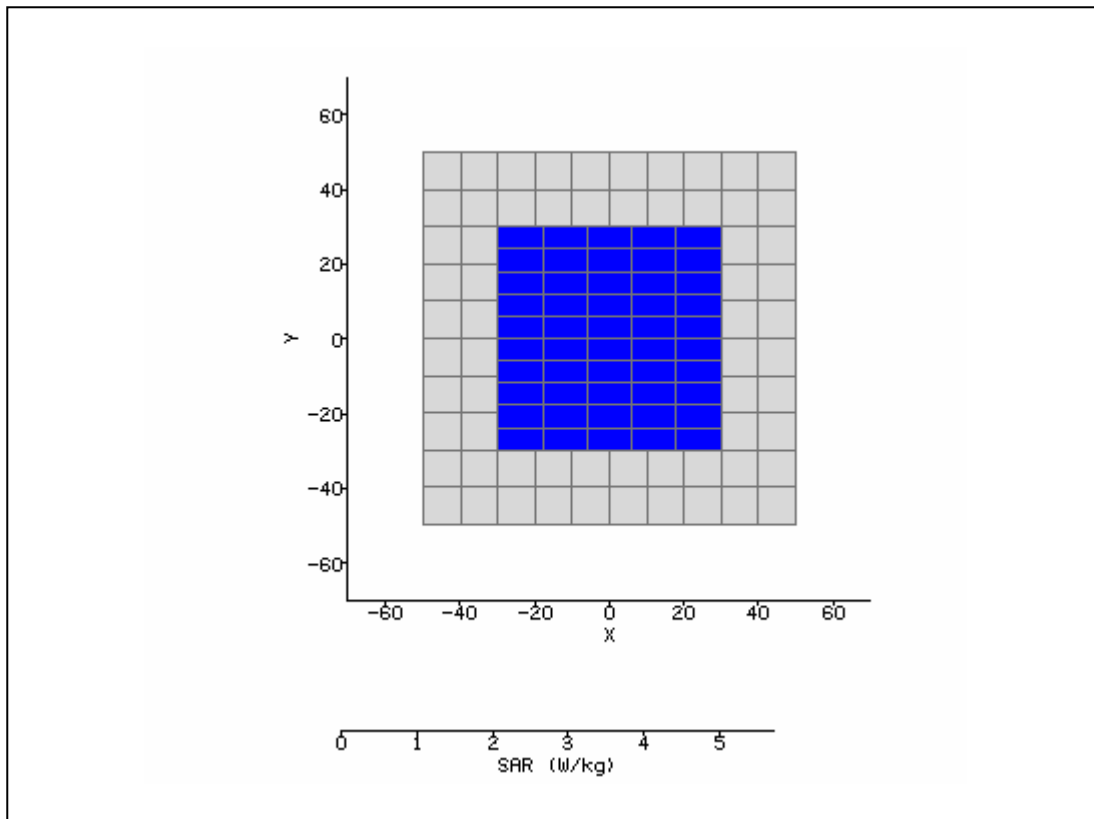


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 2:24:23 PM	DUT Battery Model/No:	
Filename:	Side_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

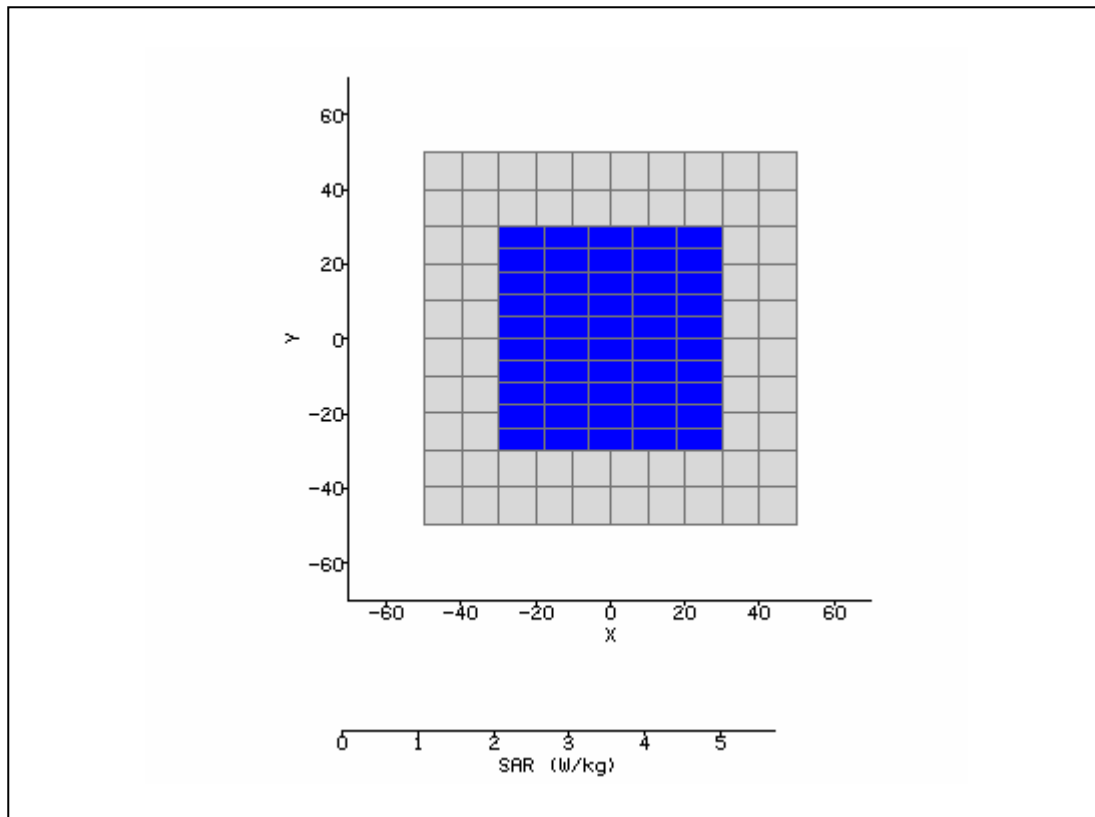


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 7:52:50 AM	DUT Battery Model/No:	
Filename:	Aux_Lap_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8LBump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	405 / 550 / 421	SAR 10g:	0.000 W/kg
Conversion Factors:	.255 / .255 / .255	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

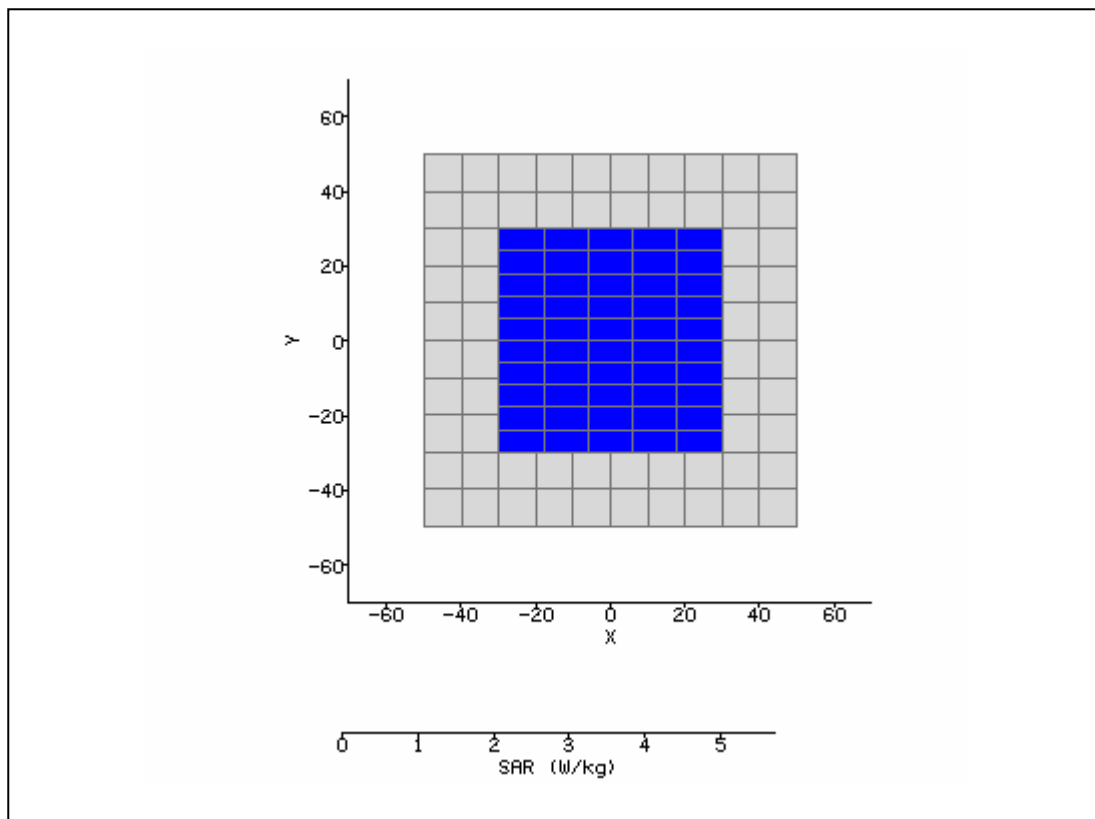


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 8:22:45 AM	DUT Battery Model/No:	
Filename:	Aux_Side_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

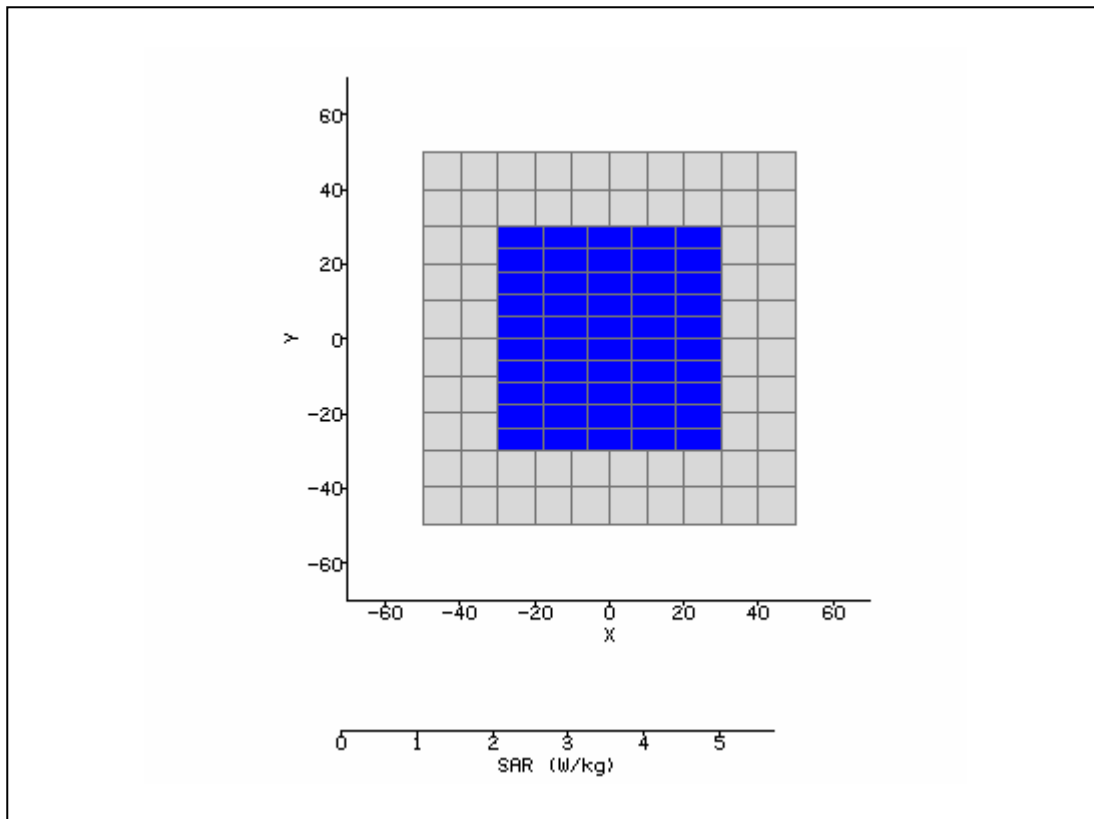


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 8:43:53 AM	DUT Battery Model/No:	
Filename:	Lap_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

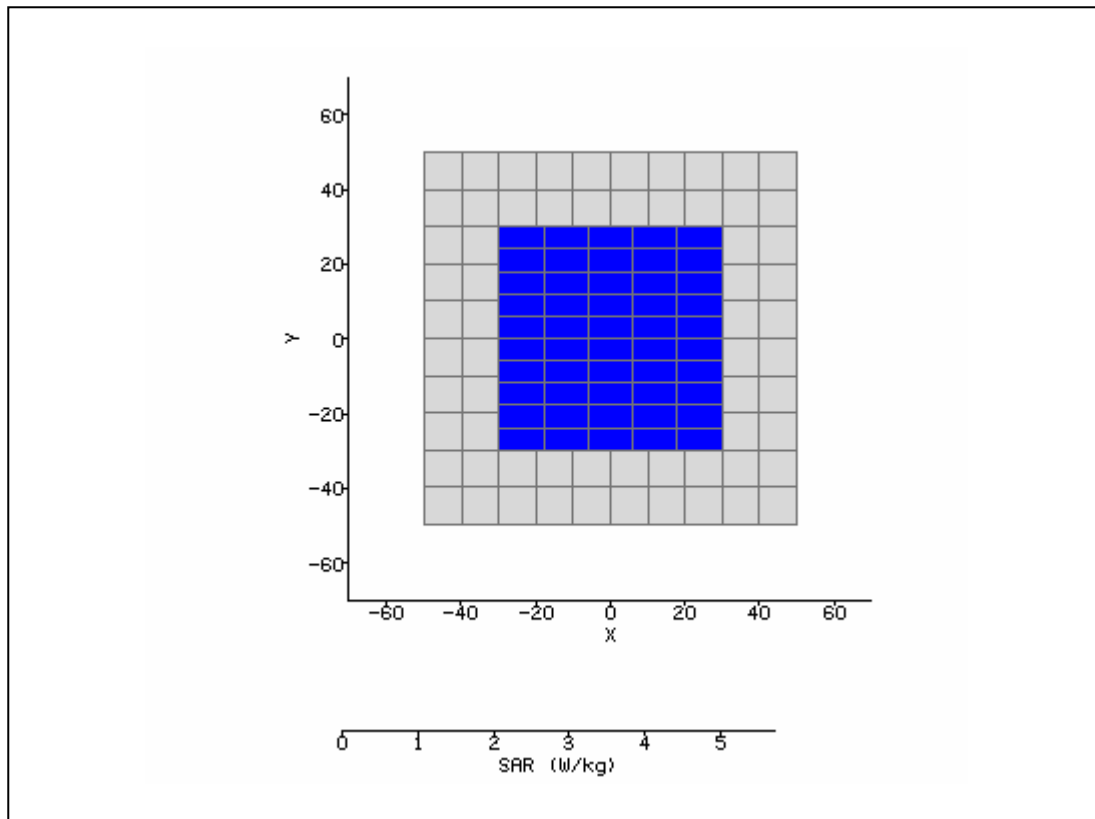


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 4:30:08 PM	DUT Battery Model/No:	
Filename:	Side_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Yageo	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

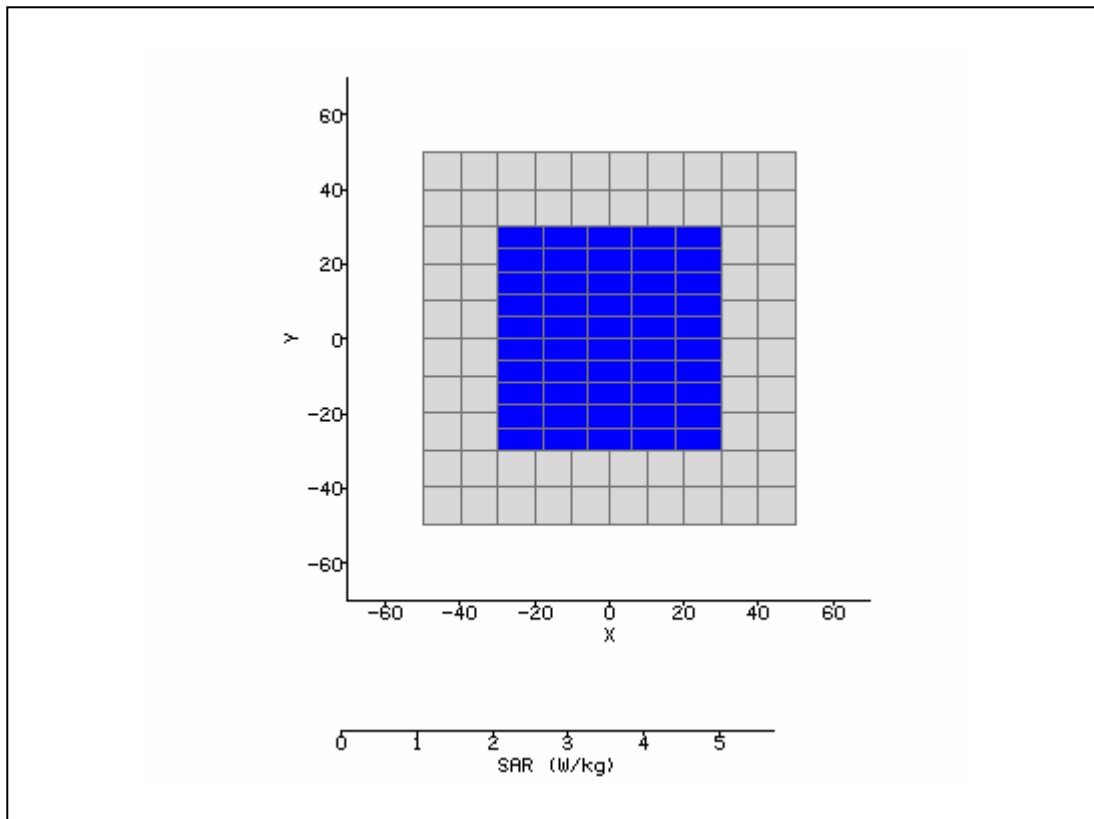


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 9:03:06 AM	DUT Battery Model/No:	
Filename:	Aux_Lap_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Top	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.617 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.167 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

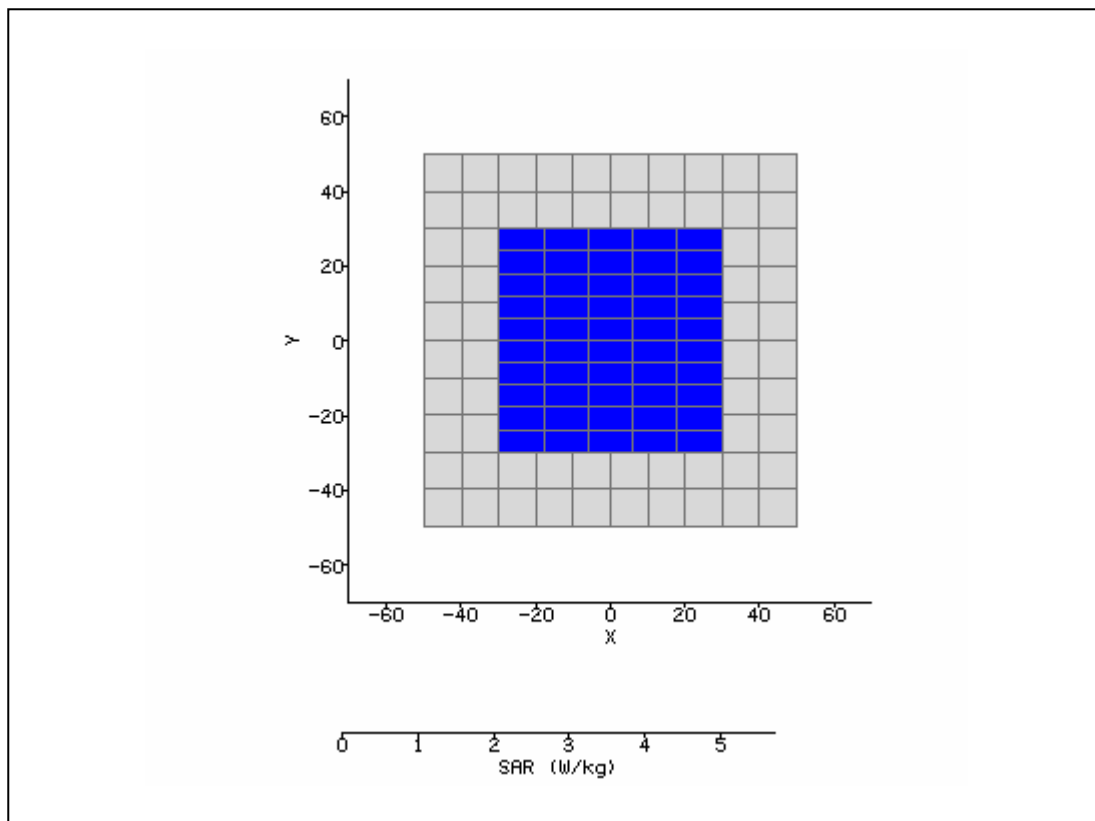


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/05/2008 9:24:24 AM	DUT Battery Model/No:	
Filename:	Side_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Yageo	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

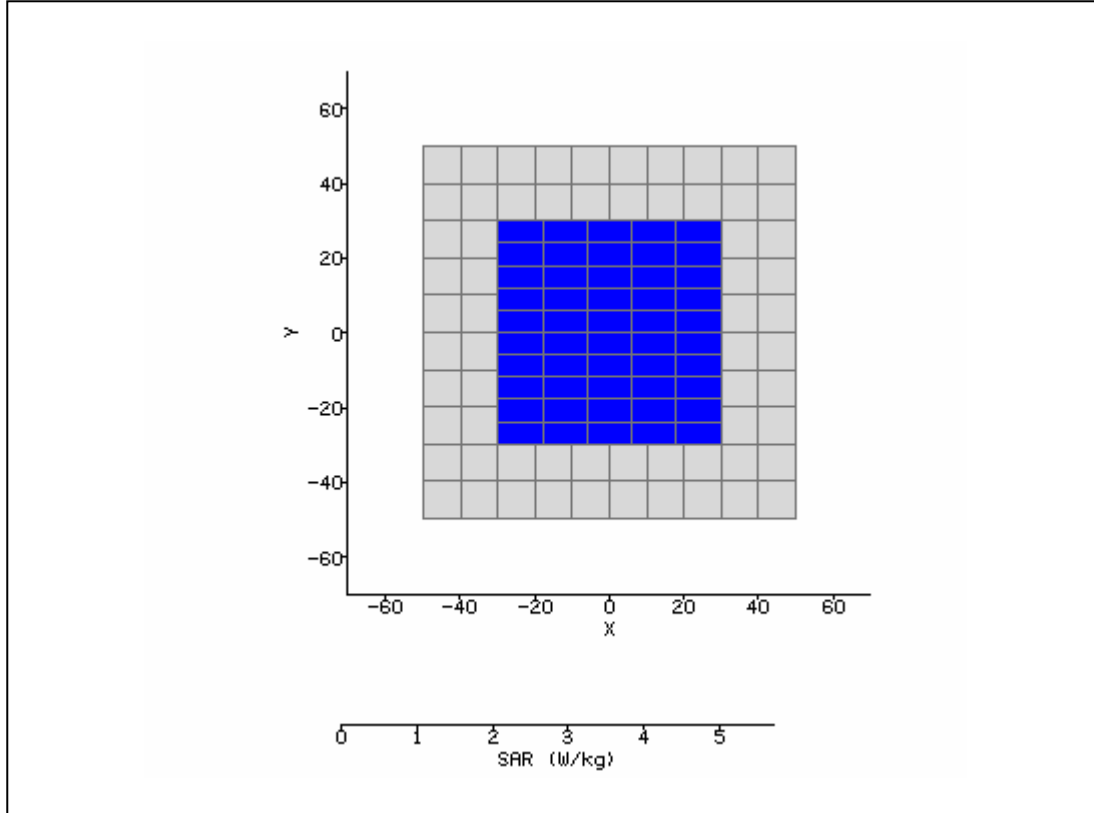


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/30/2008 10:29:54 AM	DUT Battery Model/No:	
Filename:	left_touch_4233_SY7H.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	26.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	21.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	5.97 V/m
Test Frequency:	2437MHz	SAR 1g:	0.147 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.009 W/kg
Type of Modulation:		SAR End:	0.009 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.31 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

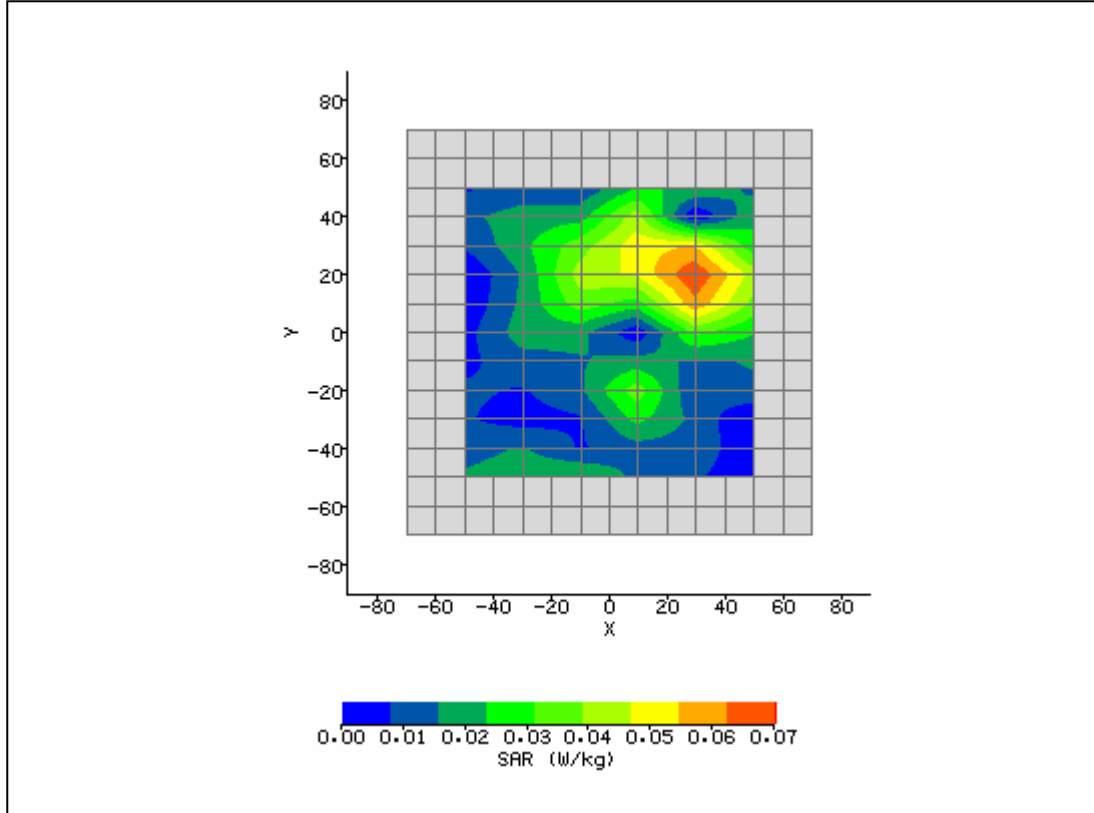


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/30/2008 11:10:25 AM	DUT Battery Model/No:	
Filename:	Main_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	6.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	16.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	6.87 V/m
Test Frequency:	2437MHz	SAR 1g:	0.128 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.010 W/kg
Type of Modulation:		SAR End:	0.010 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.44 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

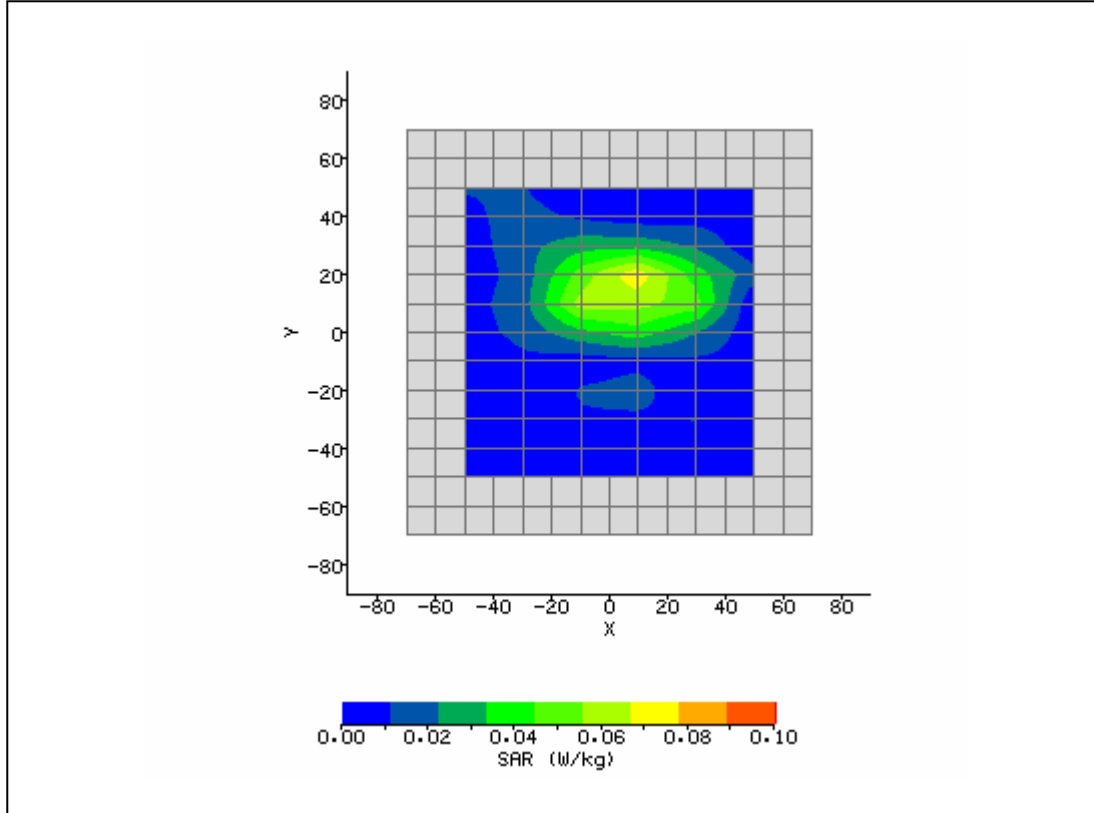


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/30/2008 11:39:04 AM	DUT Battery Model/No:	
Filename:	Aux_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-22.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	14.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	6.08 V/m
Test Frequency:	2437MHz	SAR 1g:	0.097 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.012 W/kg
Type of Modulation:		SAR End:	0.012 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.22 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

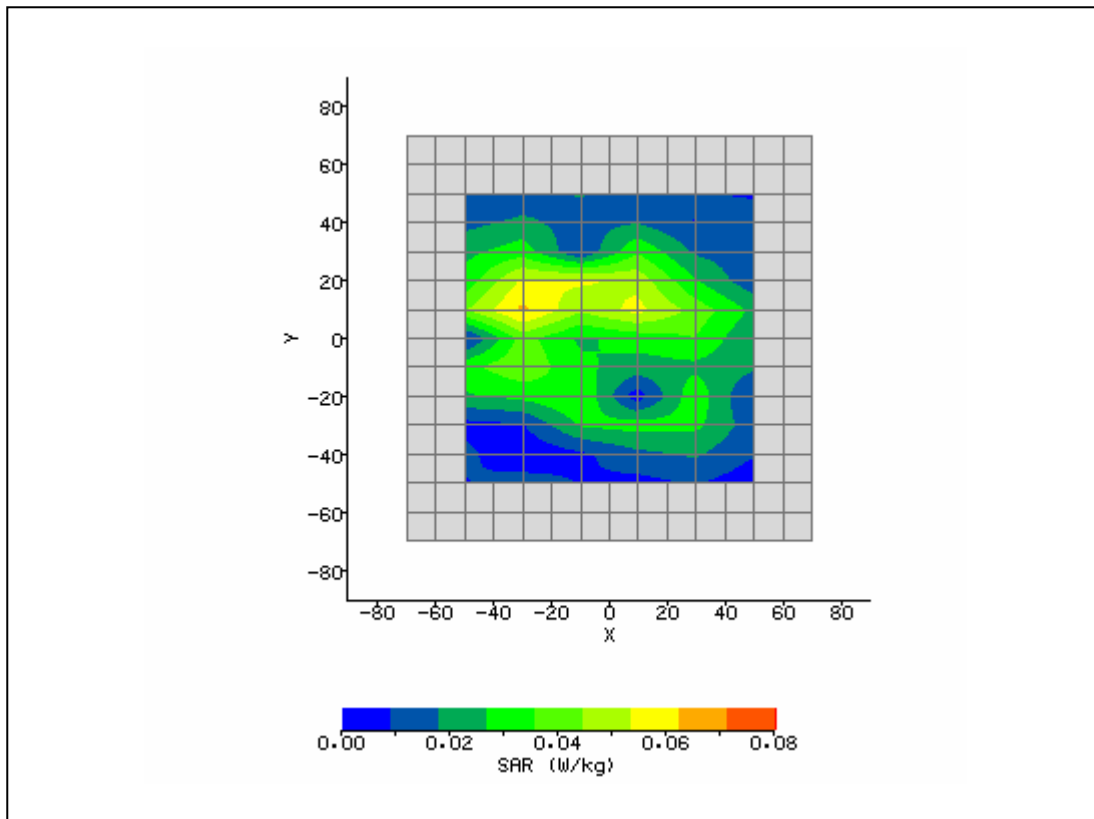


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/30/2008 12:43:18 PM	DUT Battery Model/No:	
Filename:	Aux_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-12.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	14.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	5.69 V/m
Test Frequency:	2437MHz	SAR 1g:	0.078 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	0.041 W/kg
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.007 W/kg
Type of Modulation:		SAR End:	0.007 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	4.56 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

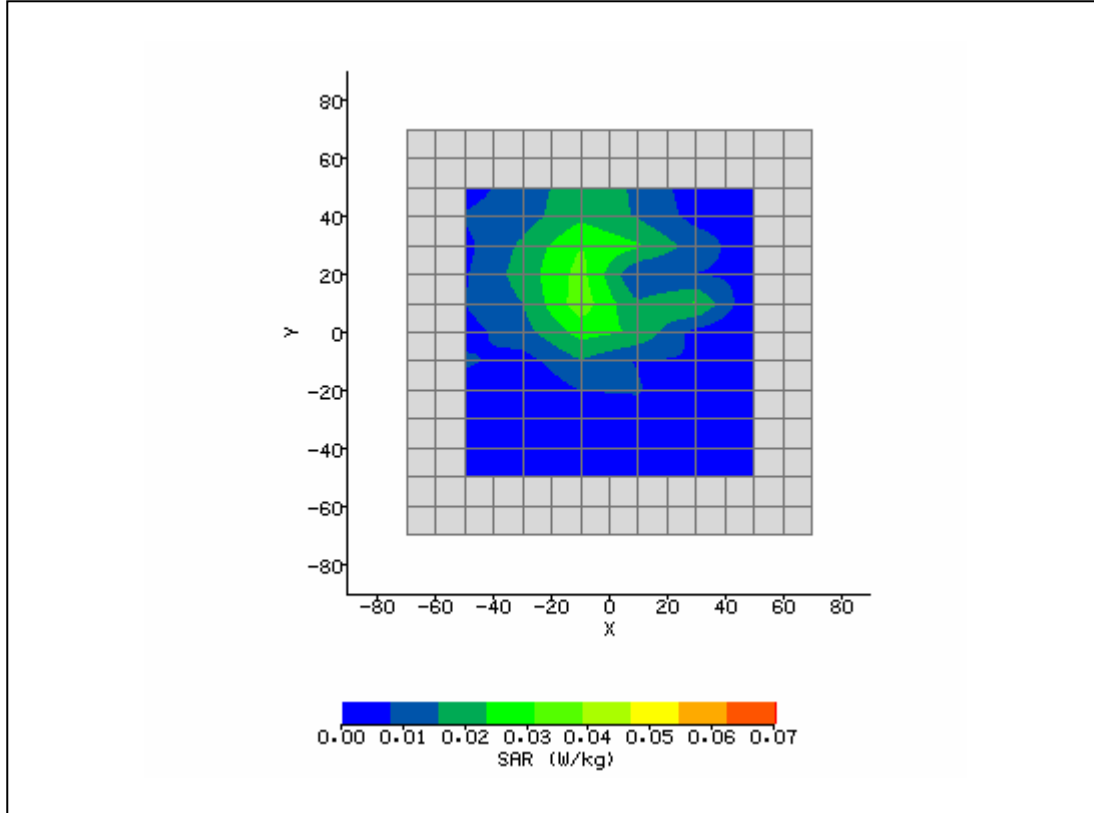


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 10:50:01 AM	DUT Battery Model/No:	
Filename:	Main_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-24.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	12.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	6.04 V/m
Test Frequency:	2437MHz	SAR 1g:	0.098 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.004 W/kg
Type of Modulation:		SAR End:	0.004 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.52 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

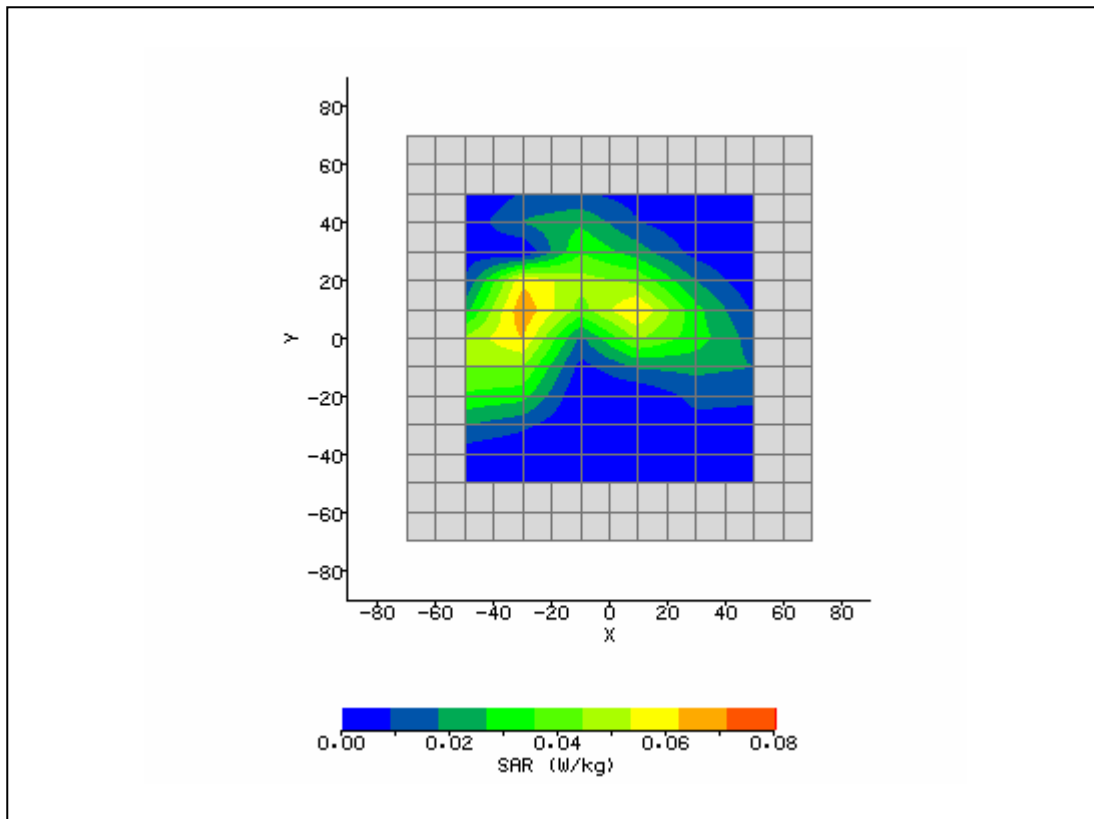


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 11:25:13 AM	DUT Battery Model/No:	
Filename:	Main_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-2.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	16.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	3.56 V/m
Test Frequency:	2437MHz	SAR 1g:	0.036 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

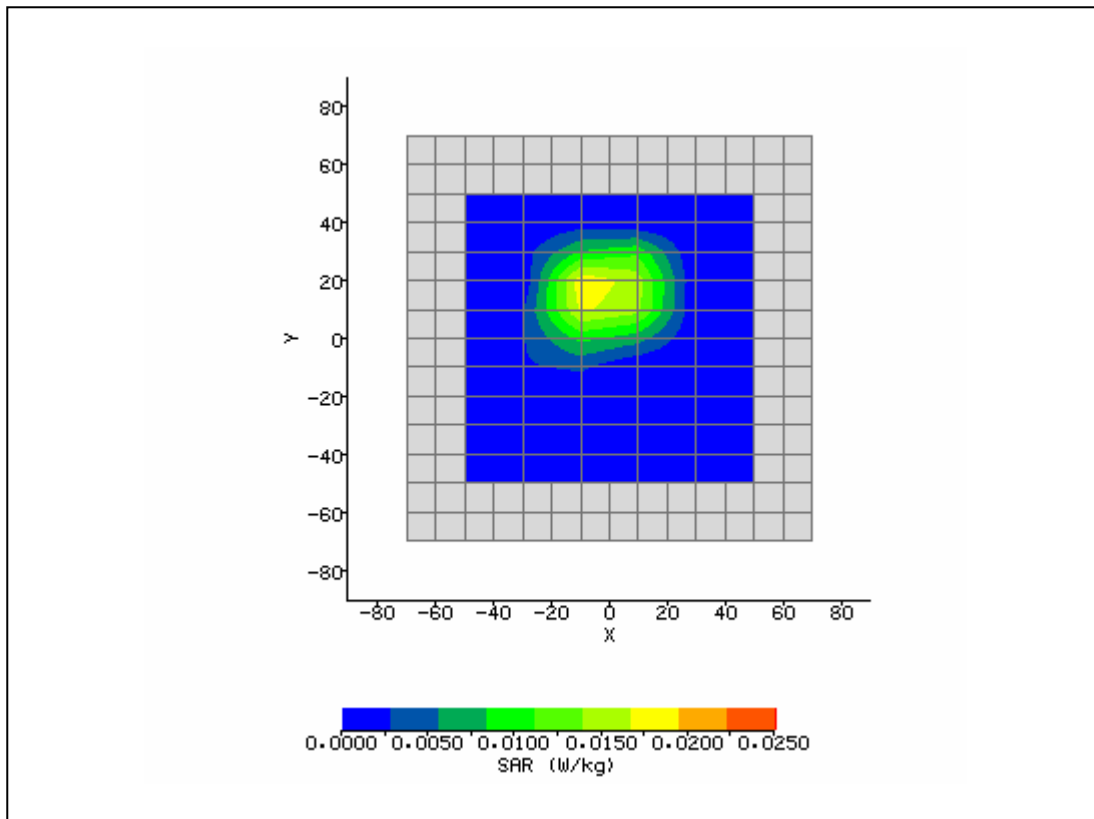


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 12:52:47 PM	DUT Battery Model/No:	
Filename:	Aux_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-18.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	26.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	5.72 V/m
Test Frequency:	2437MHz	SAR 1g:	0.087 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

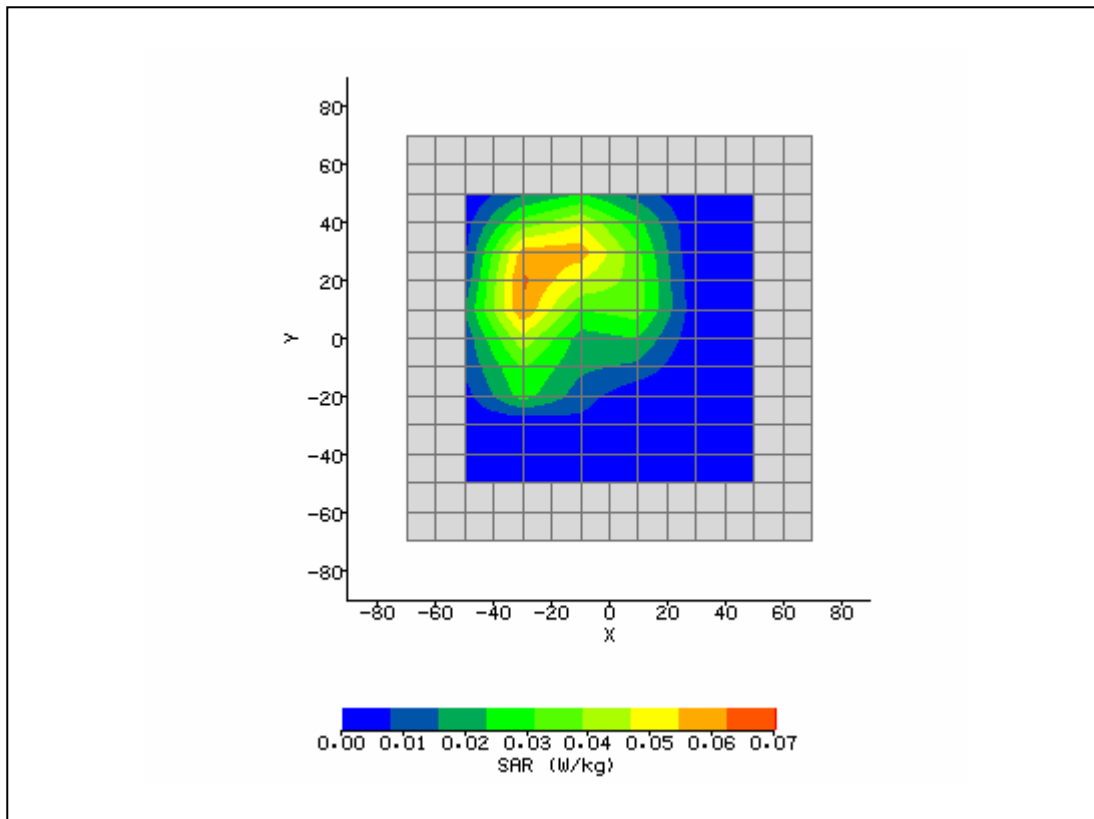


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 11:43:14 AM	DUT Battery Model/No:	
Filename:	Aux_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	16.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	7.67 V/m
Test Frequency:	2437MHz	SAR 1g:	0.151 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.008 W/kg
Type of Modulation:		SAR End:	0.008 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	2.09 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

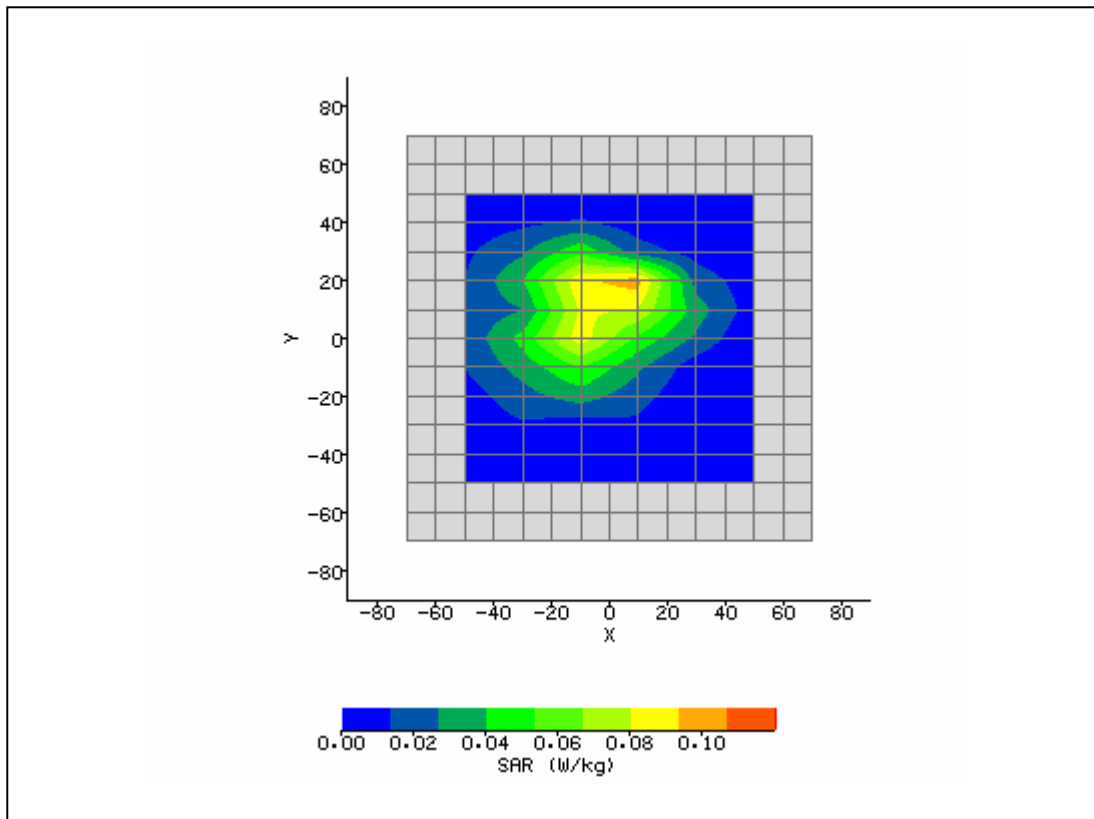


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 4:10:44 PM	DUT Battery Model/No:	
Filename:	Main_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	28.80 mm
DUT Position:	Lap	Max SAR Y-axis Location:	23.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	3.53 V/m
Test Frequency:	2437MHz	SAR 1g:	0.031 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.29 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

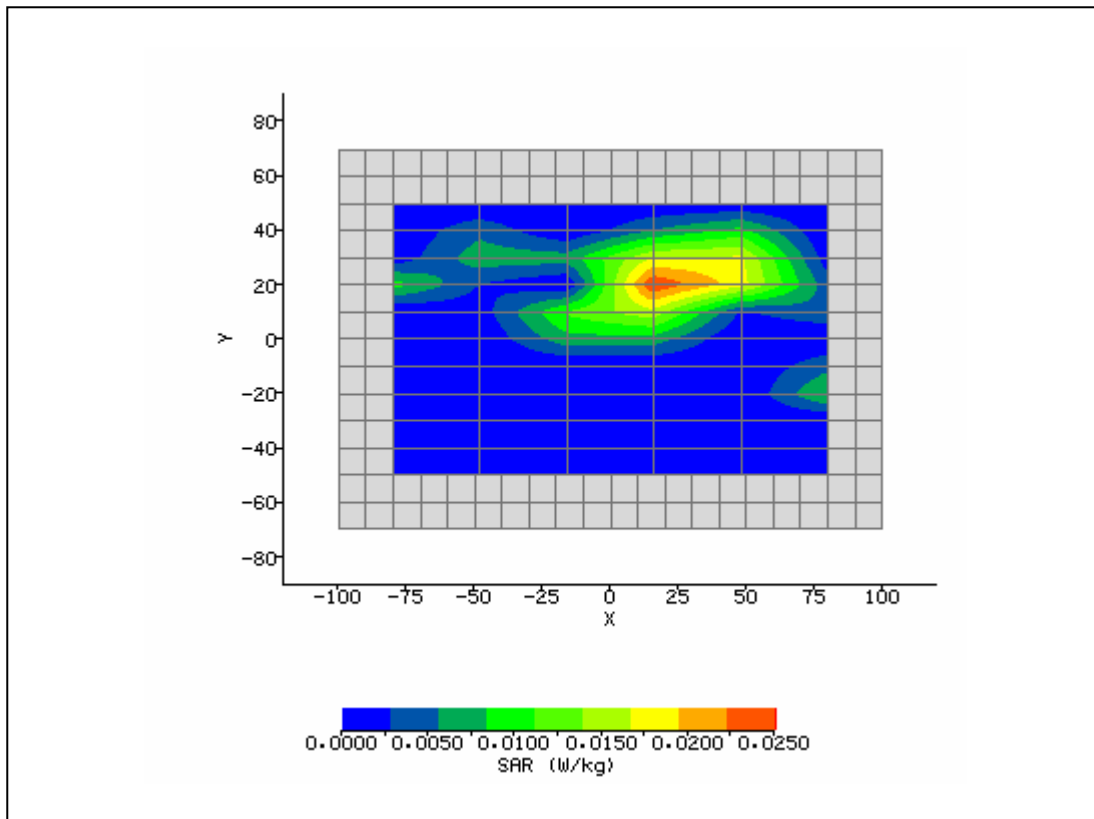


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 5:25:43 PM	DUT Battery Model/No:	
Filename:	Main_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	0.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	8.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	4.20 V/m
Test Frequency:	2437MHz	SAR 1g:	0.044 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

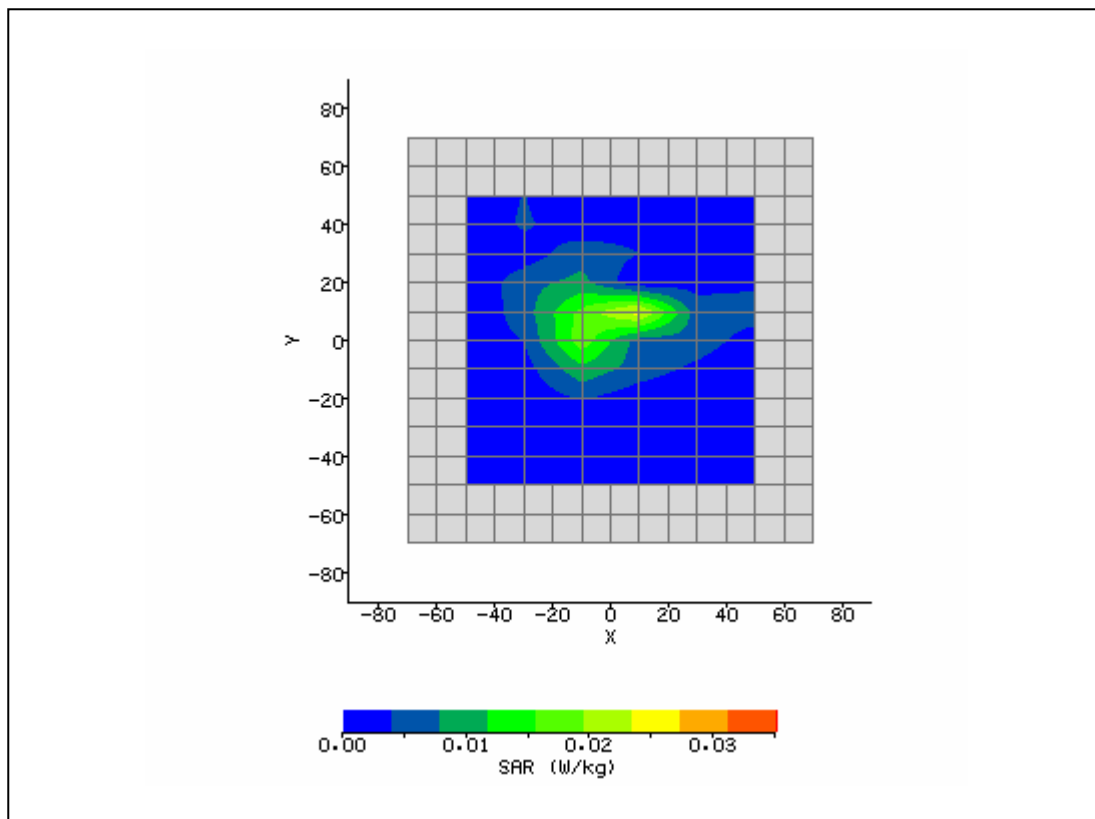


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 3:26:13 PM	DUT Battery Model/No:	
Filename:	Main_Lap_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-70.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	9.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	3.11 V/m
Test Frequency:	2437MHz	SAR 1g:	0.027 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-4.29 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

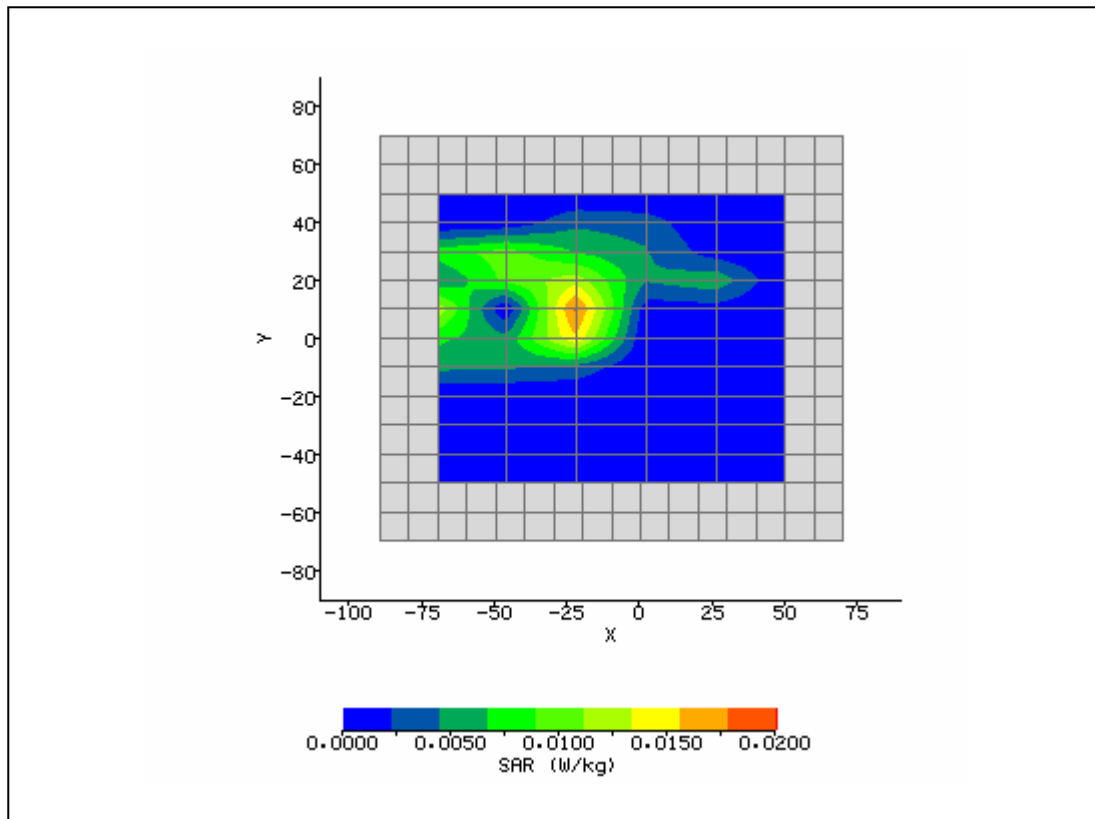


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 2:43:19 PM	DUT Battery Model/No:	
Filename:	Main_Side_6.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.32
Relative Humidity:	45.6%	Conductivity:	1.957
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-8.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	5.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	4.23 V/m
Test Frequency:	2437MHz	SAR 1g:	0.045 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	
Conversion Factors:	.635 / .635 / .635	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

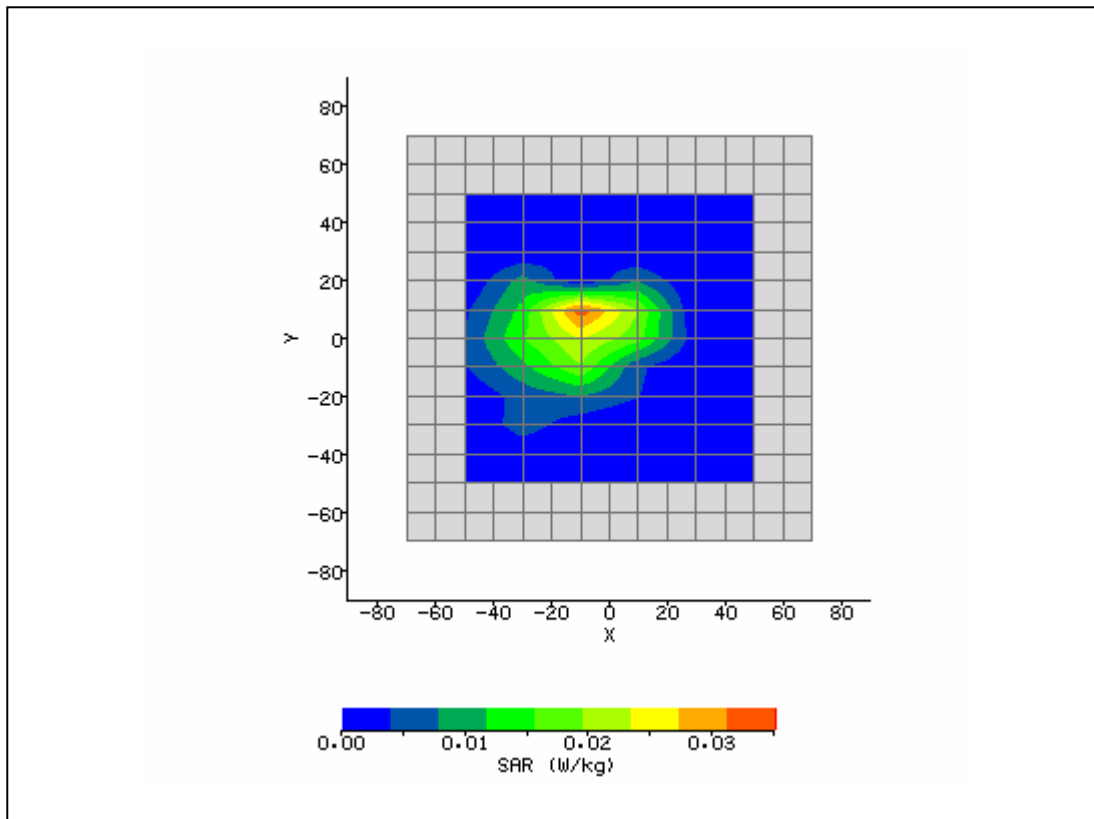


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/4/2008 8:27:52 AM	DUT Battery Model/No:	
Filename:	Lap_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

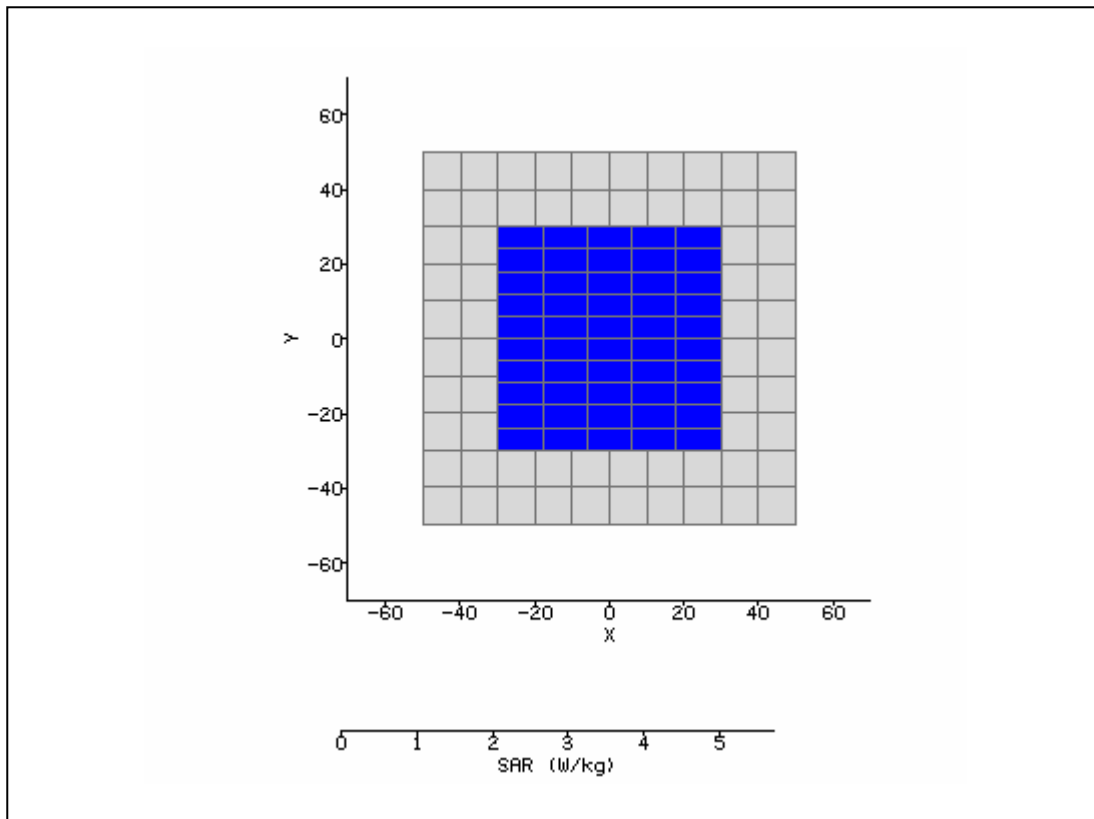


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/4/2008 8:45:23 AM	DUT Battery Model/No:	
Filename:	Side_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

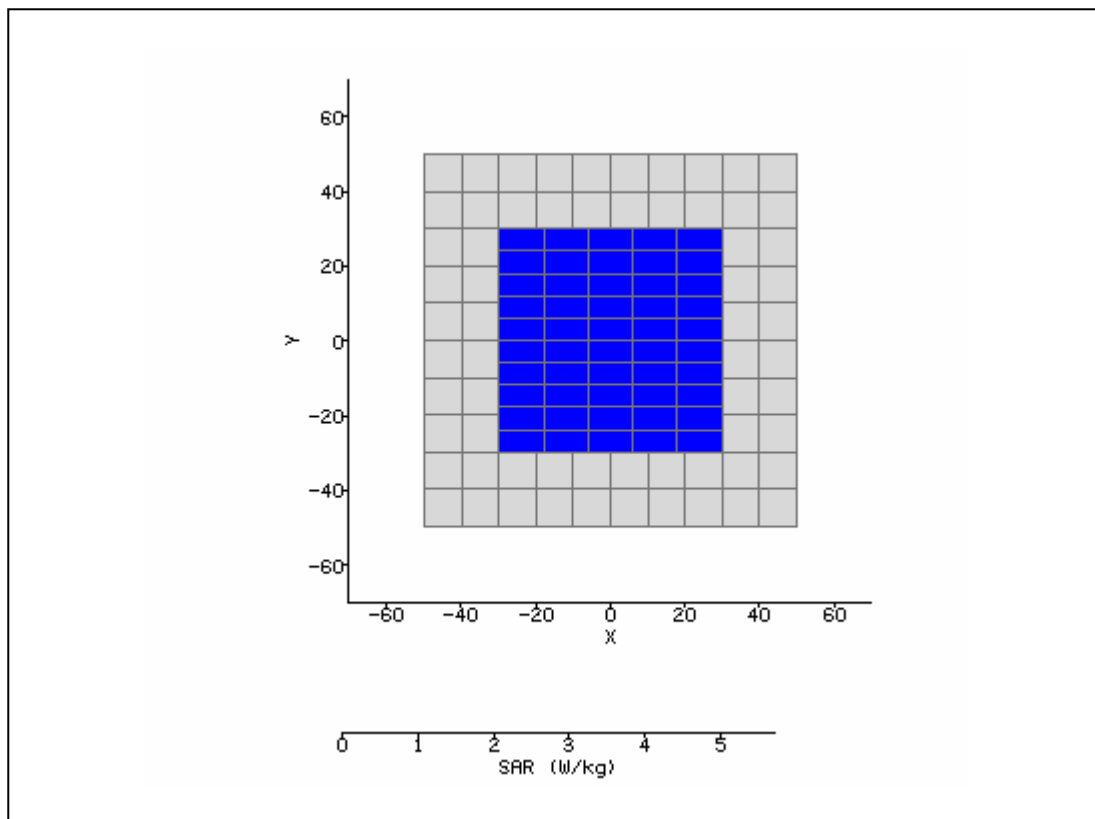


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 3:45:11 PM	DUT Battery Model/No:	
Filename:	Aux_Lap_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

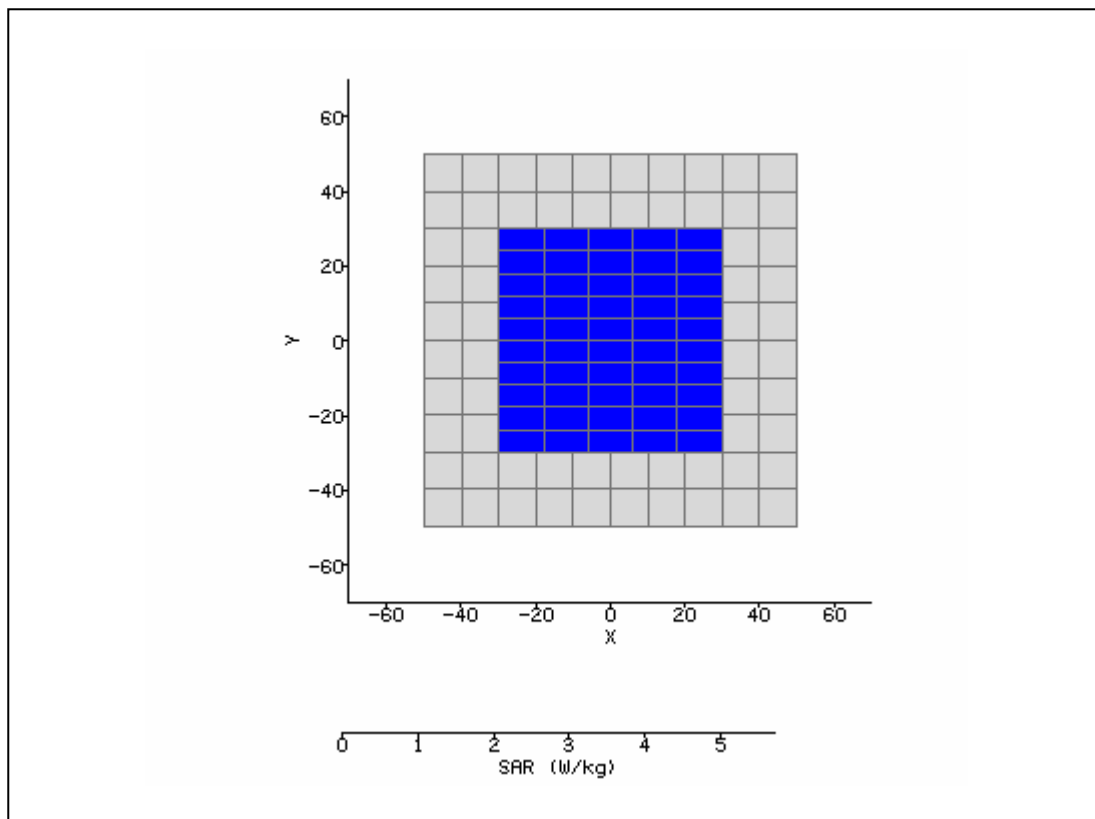


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 4:01:31 PM	DUT Battery Model/No:	
Filename:	Aux_Side_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

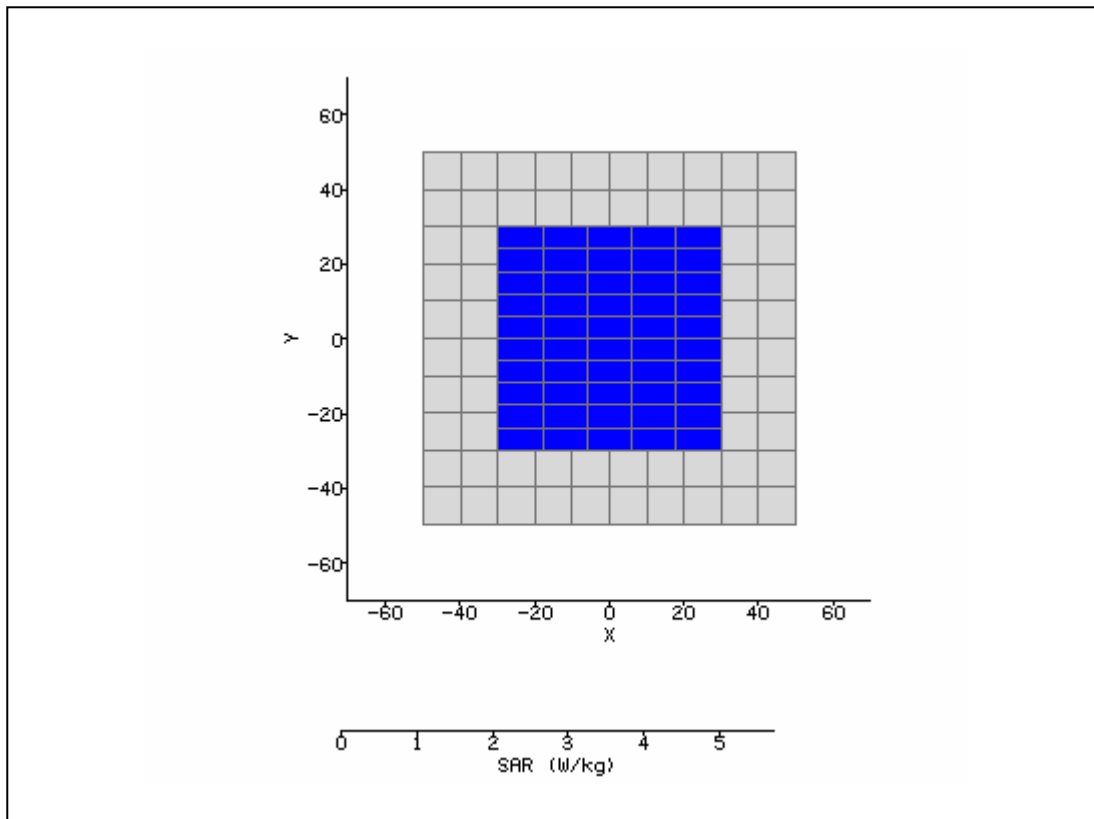


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/4/2008 9:27:52 AM	DUT Battery Model/No:	
Filename:	Lap_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

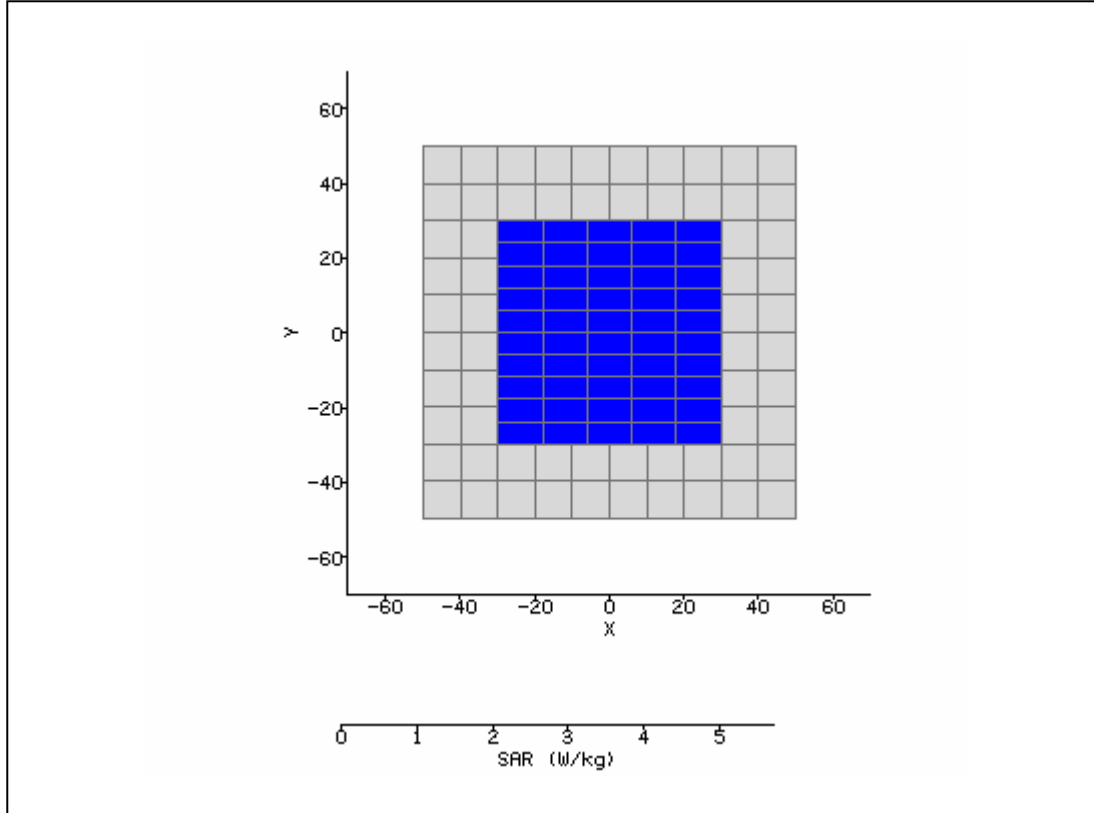


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/4/2008 9:45:23 AM	DUT Battery Model/No:	
Filename:	Side_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

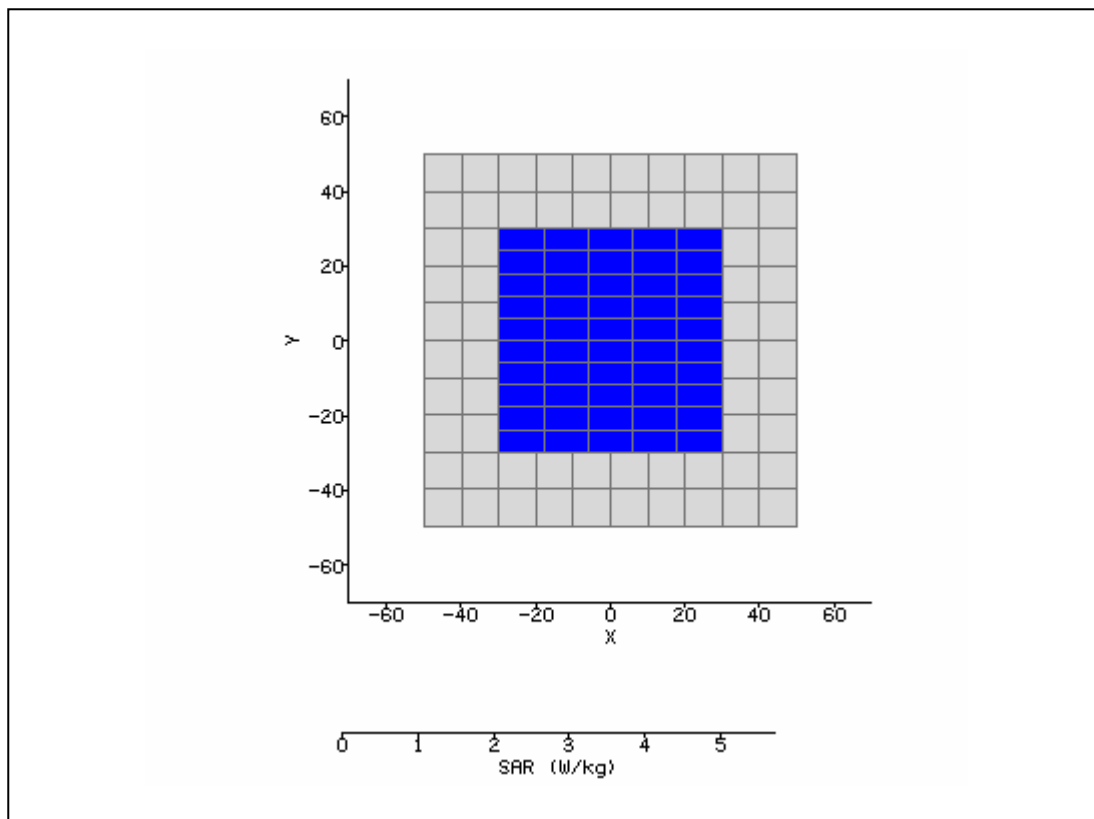


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 3:26:51 PM	DUT Battery Model/No:	
Filename:	Aux_Lap_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

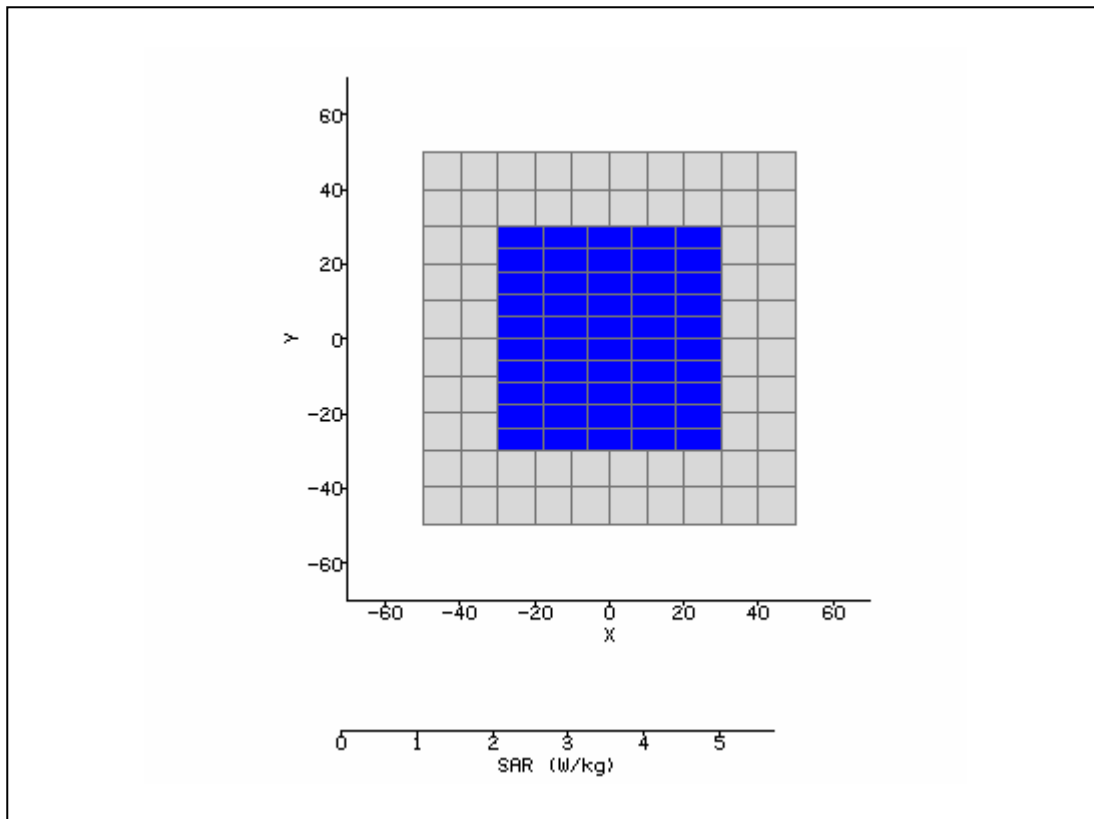


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 3:09:17 PM	DUT Battery Model/No:	
Filename:	Aux_Side_48.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5200
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.23
Relative Humidity:	45.6%	Conductivity:	5.471
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5240MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.46 / 3.82 / 4.87	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

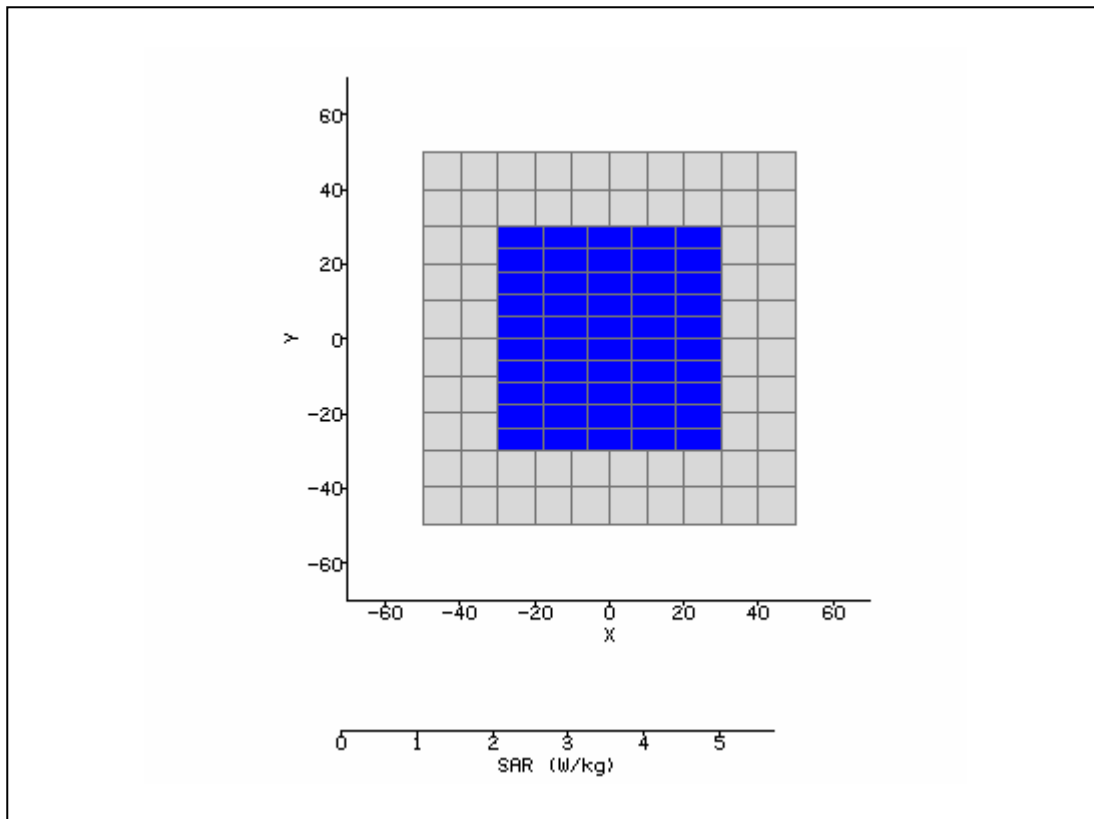


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 10:13:27 AM	DUT Battery Model/No:	
Filename:	Lap_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

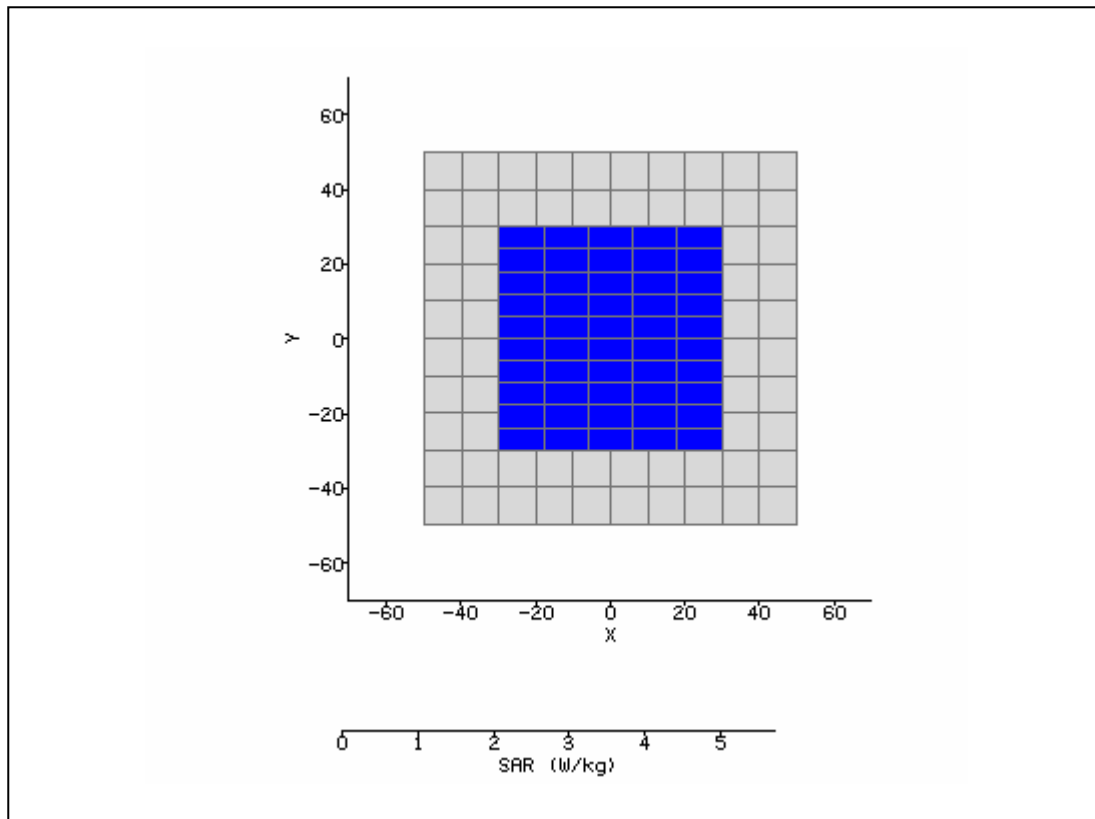


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 10:31:56 AM	DUT Battery Model/No:	
Filename:	Side_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

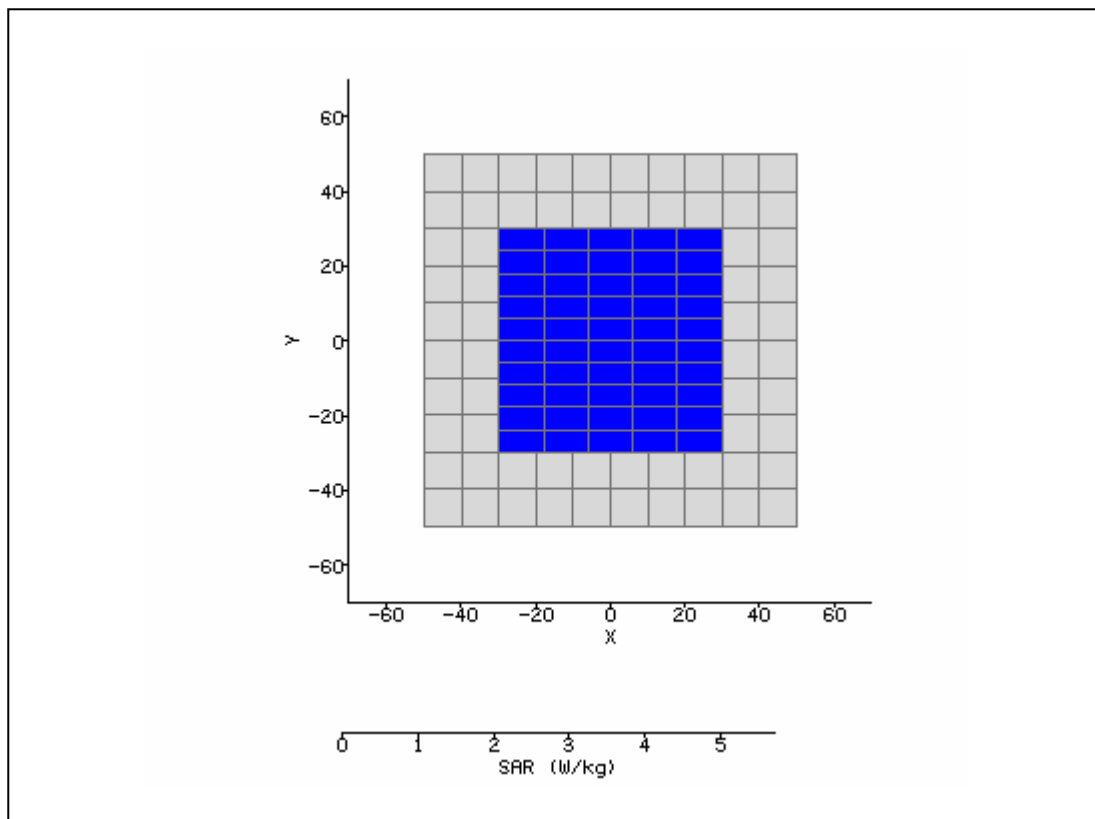


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 10:44:49 AM	DUT Battery Model/No:	
Filename:	Aux_Lap_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/06/08
Input Power Level:	Set by power table	Extrapolation:	poly4

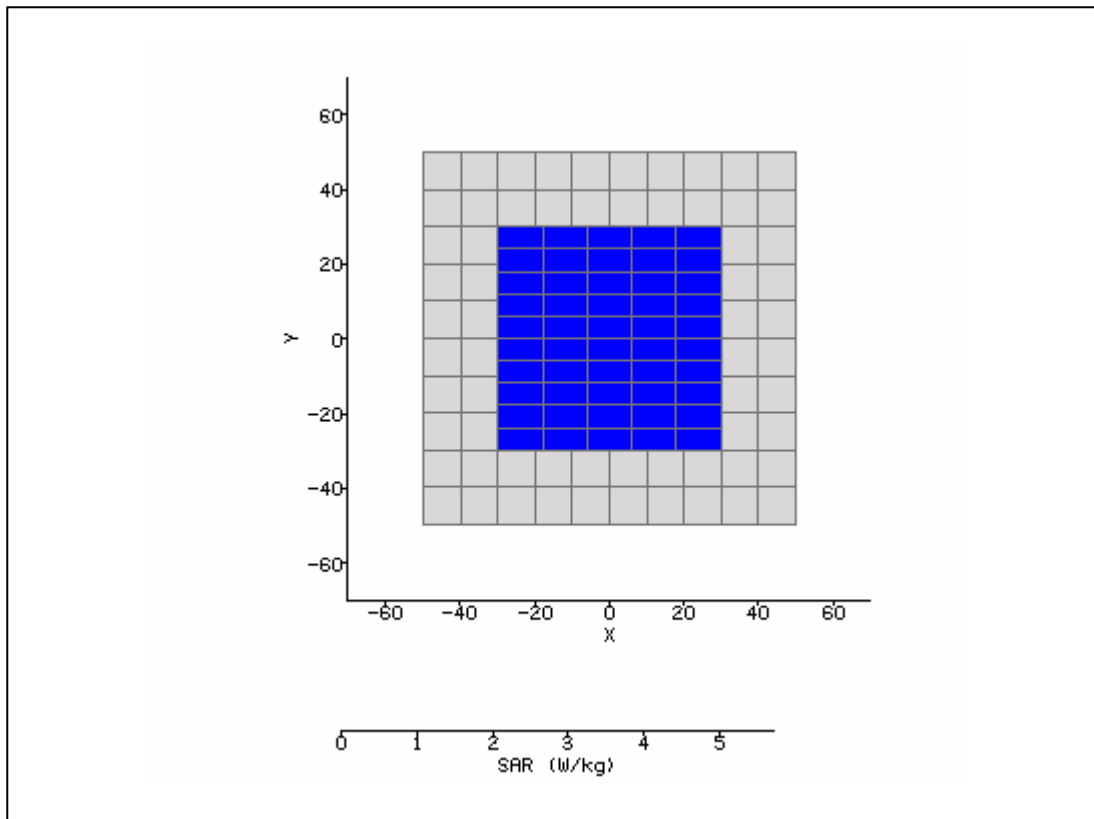


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 11:02:44 AM	DUT Battery Model/No:	
Filename:	Aux_Side_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/06/08
Input Power Level:	Set by power table	Extrapolation:	poly4

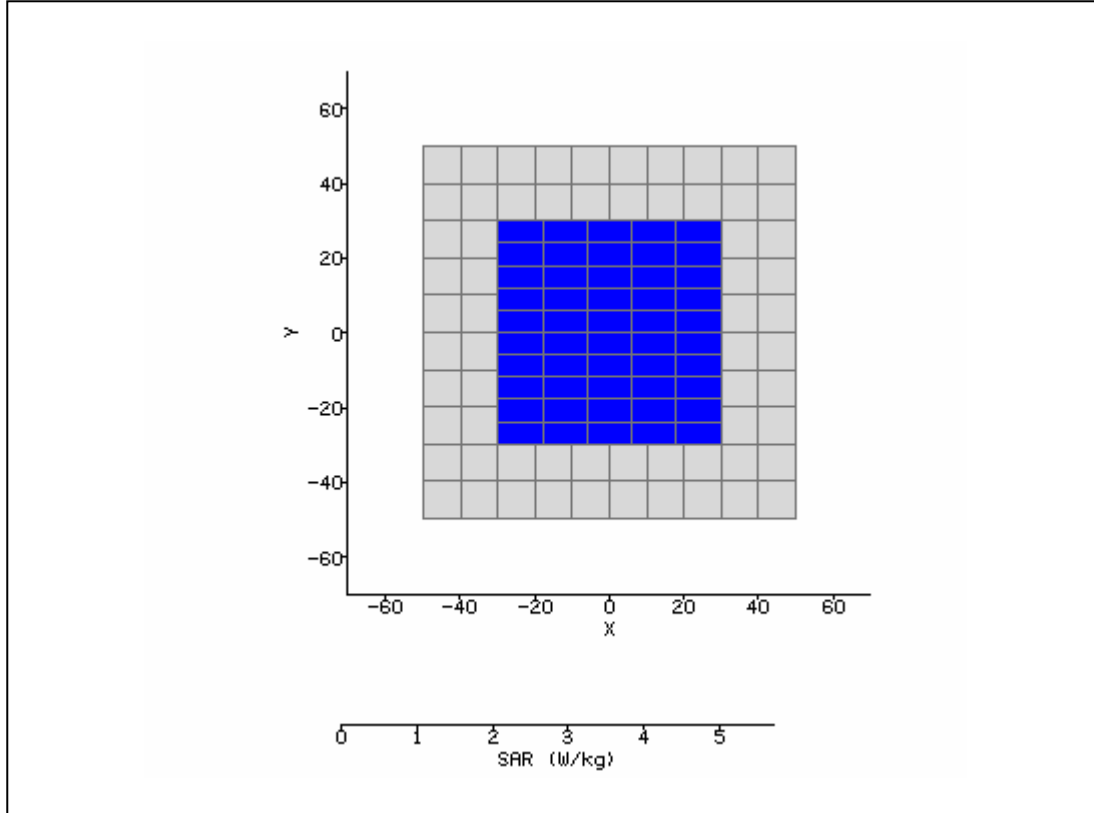


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 11:22:55 AM	DUT Battery Model/No:	
Filename:	Lap_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

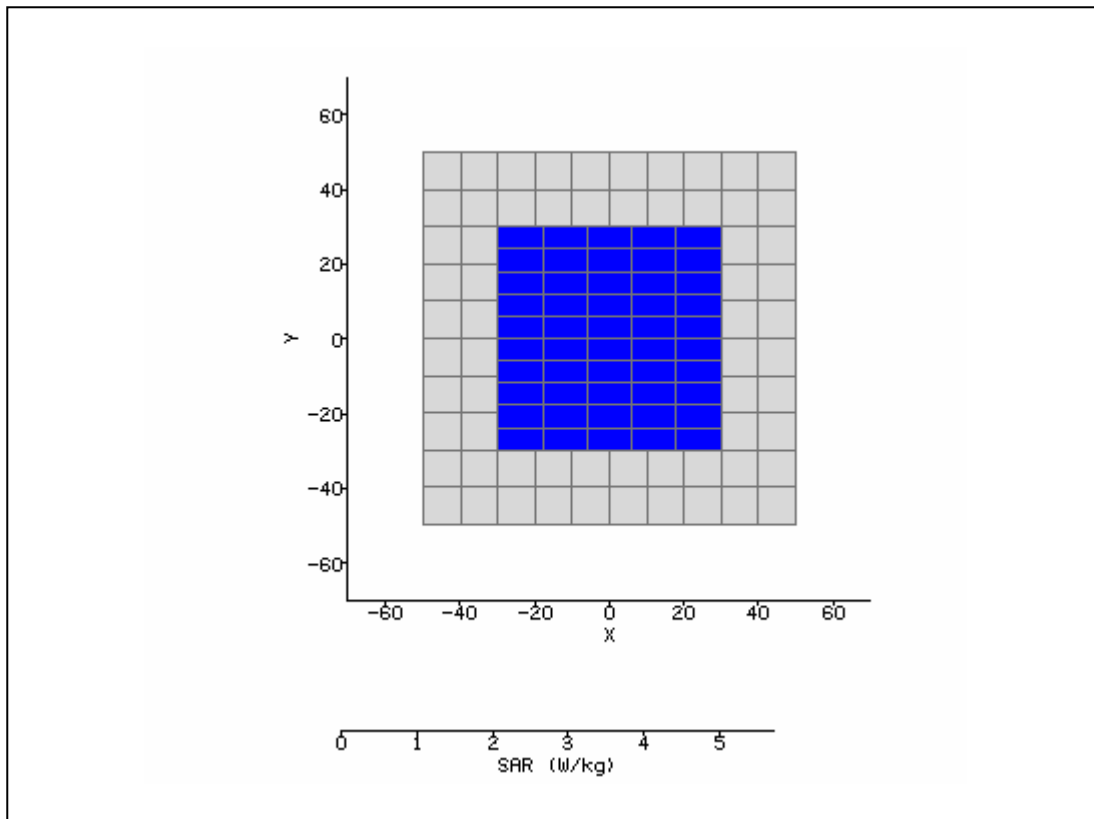


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 10:49:36 AM	DUT Battery Model/No:	
Filename:	Side_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

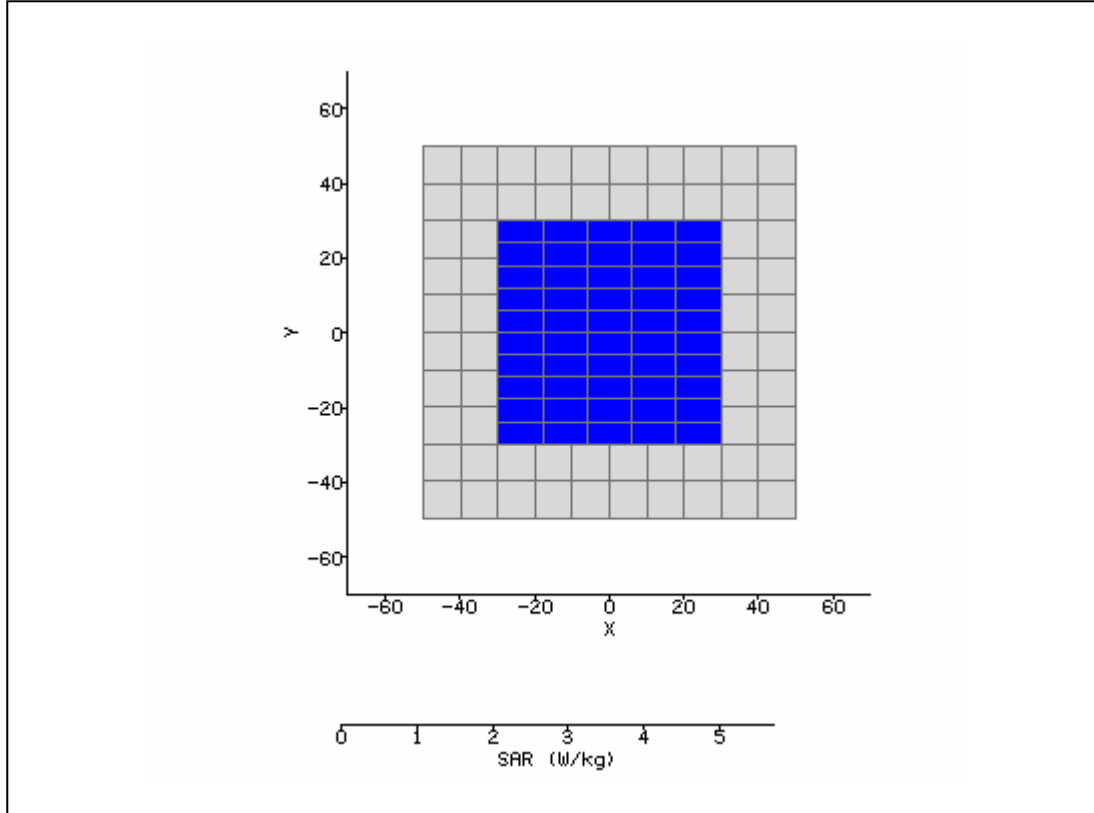


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 12:48:46 PM	DUT Battery Model/No:	
Filename:	Aux_Lap_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-50.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

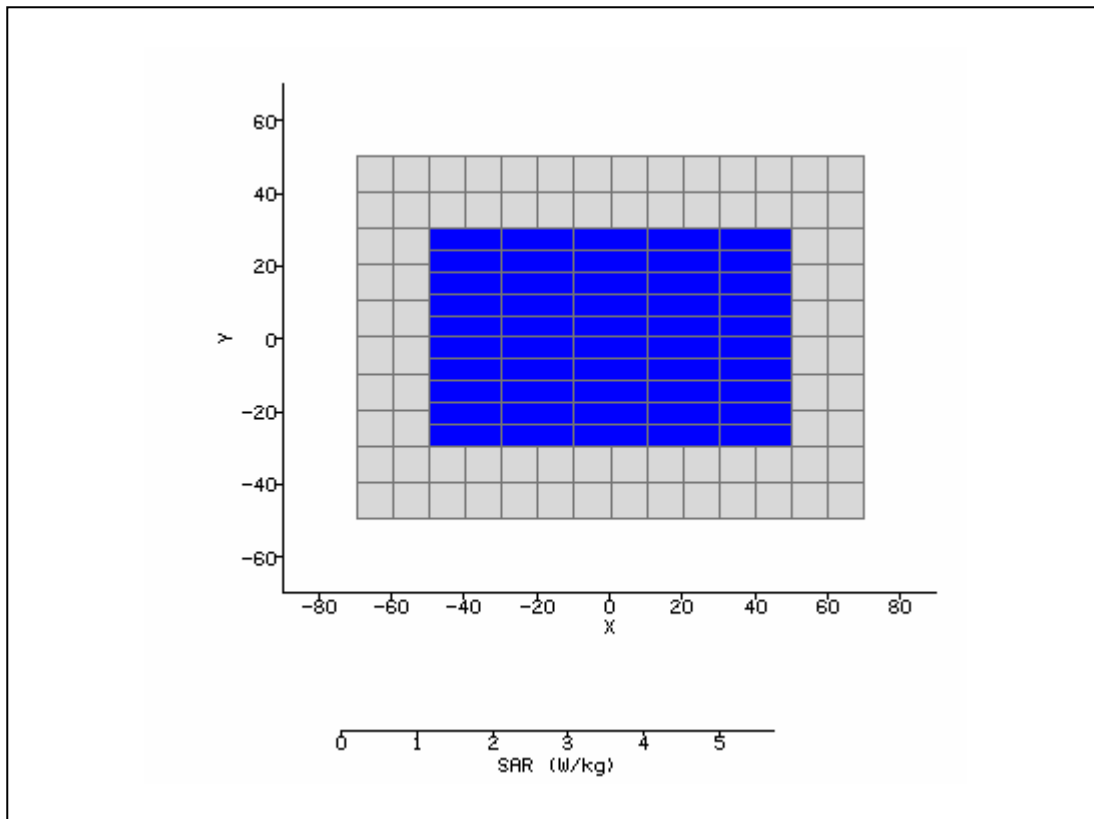


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 1:05:09 PM	DUT Battery Model/No:	
Filename:	Aux_Side_120.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	51.41
Relative Humidity:	45.6%	Conductivity:	5.71
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5600MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

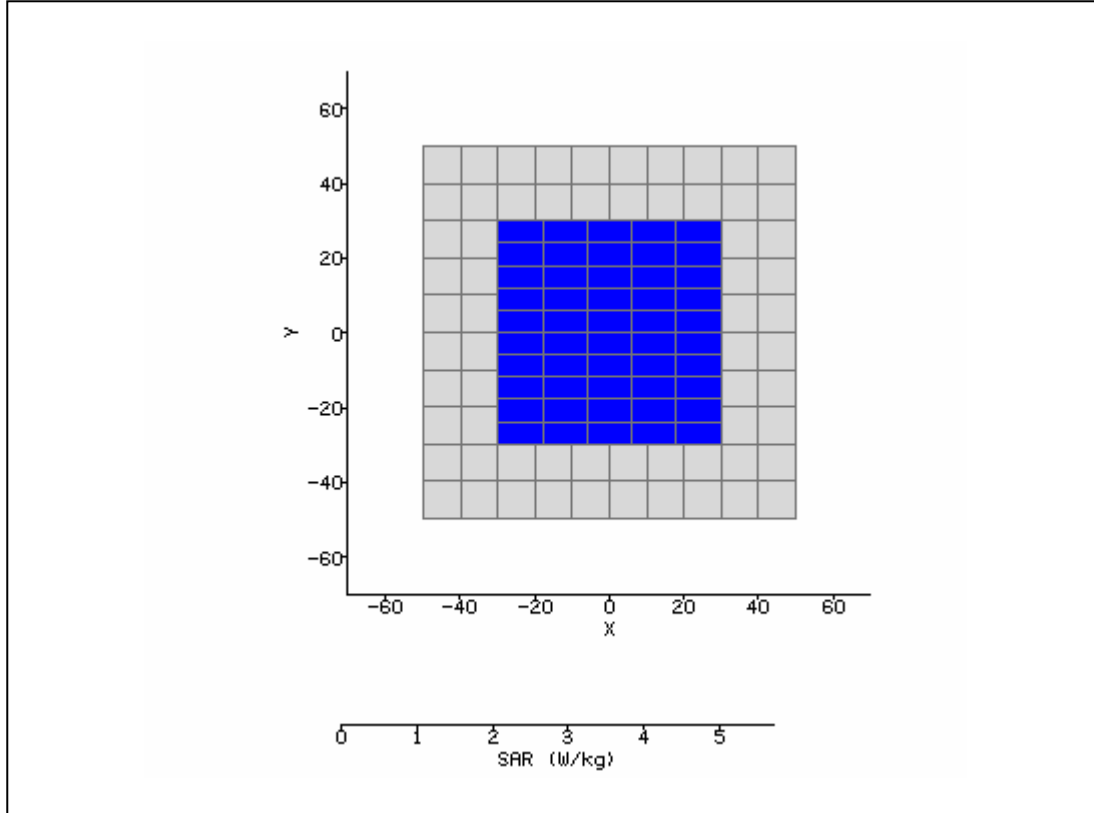


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 3:54:08 PM	DUT Battery Model/No:	
Filename:	Lap_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

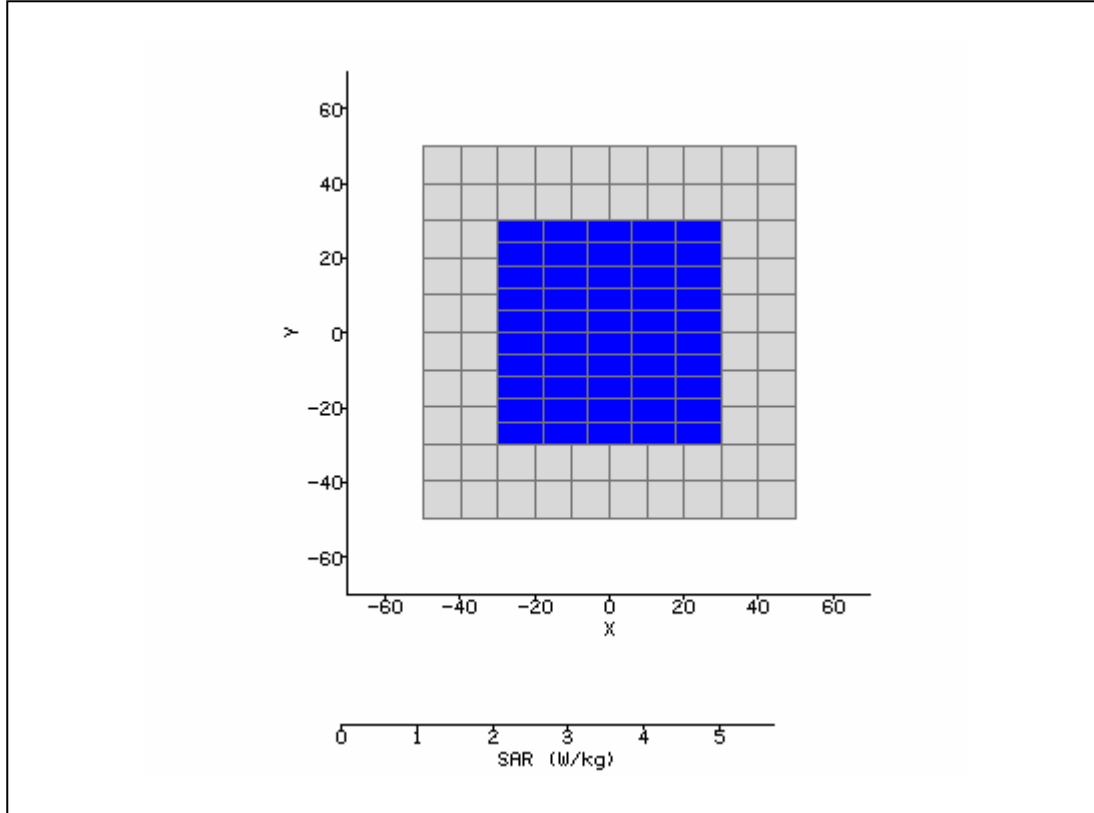


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 4:10:24 PM	DUT Battery Model/No:	
Filename:	Side_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

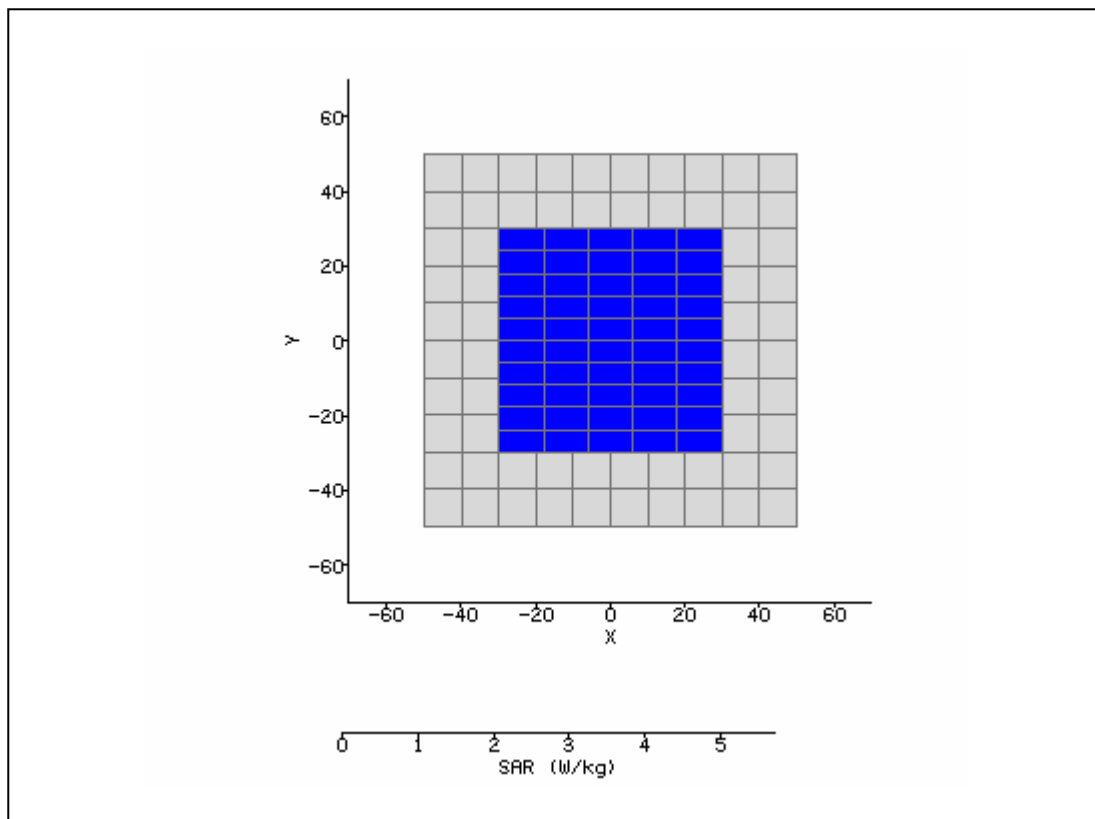


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 10:06:08 AM	DUT Battery Model/No:	
Filename:	Lap_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

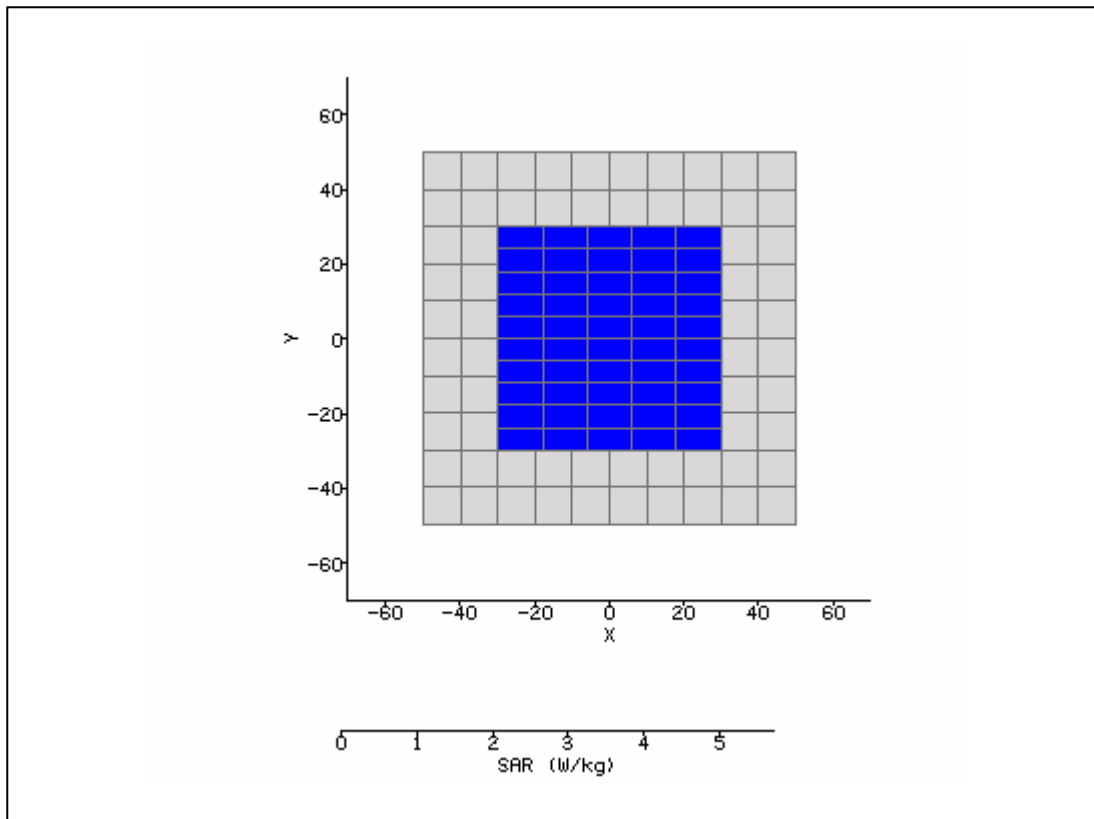


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 10:28:24 AM	DUT Battery Model/No:	
Filename:	Side_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

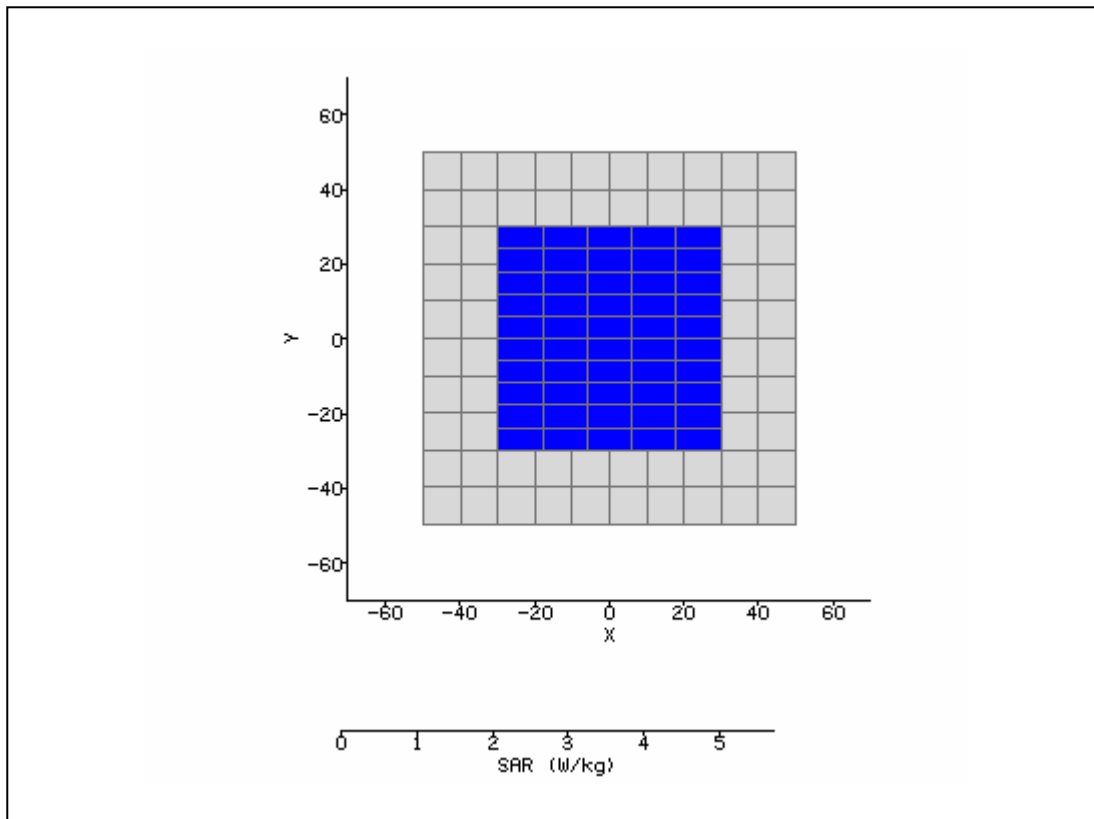


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 4:47:08 PM	DUT Battery Model/No:	
Filename:	Lap_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

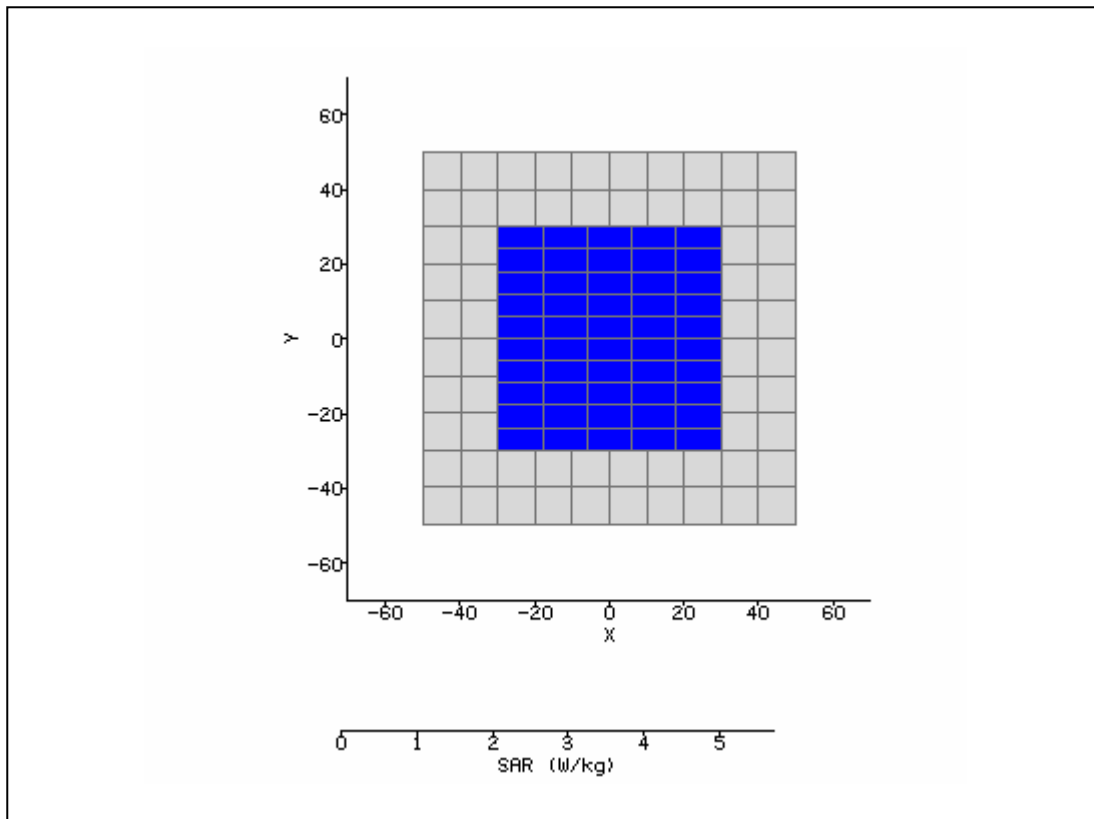


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/5/2008 5:08:24 PM	DUT Battery Model/No:	
Filename:	Side_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Main Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	Set by power table	Extrapolation:	poly4

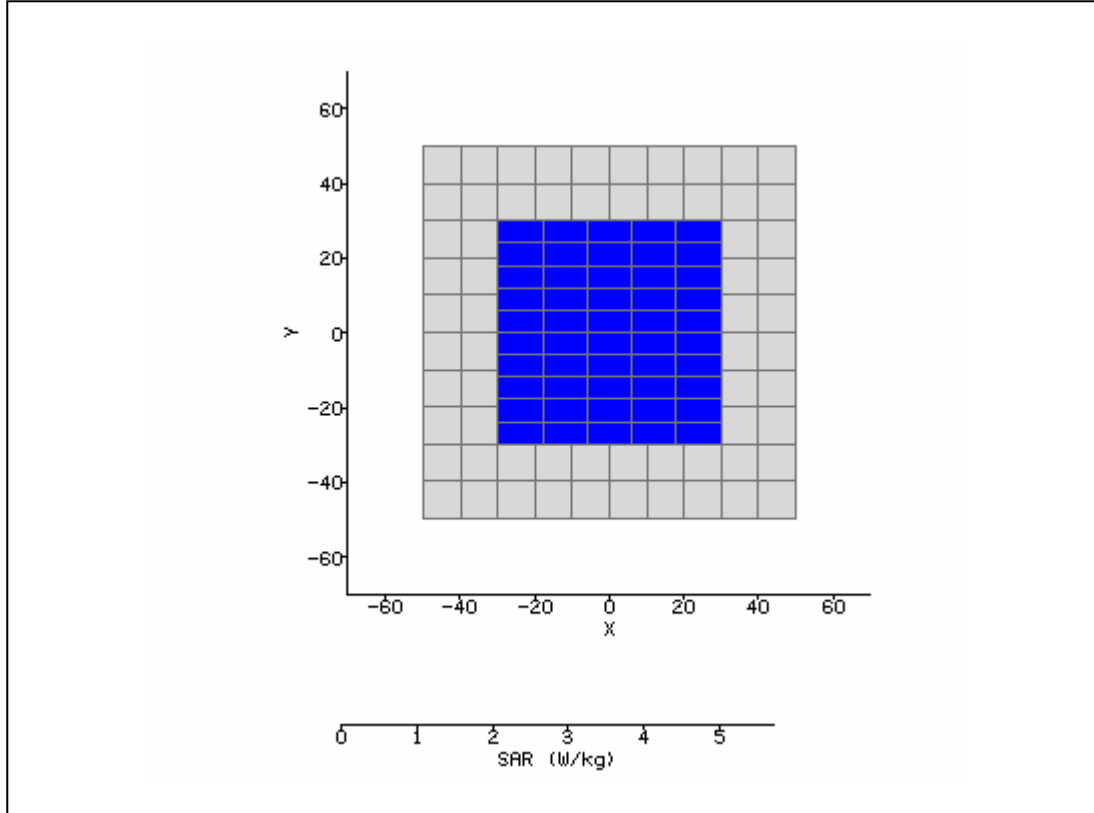


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 5:27:01 PM	DUT Battery Model/No:	
Filename:	Aux_Lap_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Lap	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	405 / 550 / 421	SAR 10g:	0.000 W/kg
Conversion Factors:	.255 / .255 / .255	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

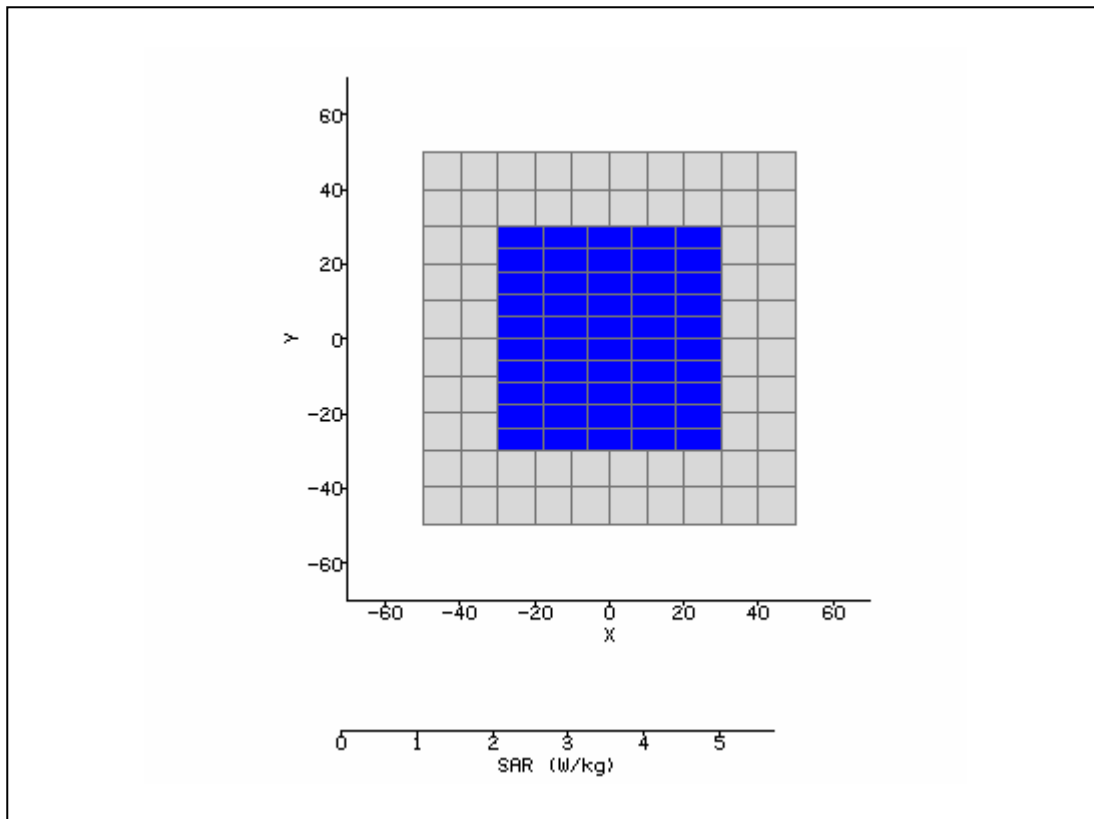


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 5:06:24 PM	DUT Battery Model/No:	
Filename:	Side_157.txt	Probe Serial Number:	M0024
Ambient Temperature:	21.7°C	Liquid Simulant:	5800
Device Under Test:	BCM94322HM8L No Bump	Relative Permittivity:	49.76
Relative Humidity:	45.6%	Conductivity:	5.722
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-30.00 mm
DUT Position:	Side	Max SAR Y-axis Location:	-30.00 mm
Antenna Configuration:	Aux Amphenol	Max E Field:	0.00 V/m
Test Frequency:	5785MHz	SAR 1g:	0.000 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	0.000 W/kg
Conversion Factors:	3.21 / 3.56 / 4.43	SAR Start:	0.000 W/kg
Type of Modulation:		SAR End:	0.000 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	%
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/11/08
Input Power Level:	Set by power table	Extrapolation:	poly4

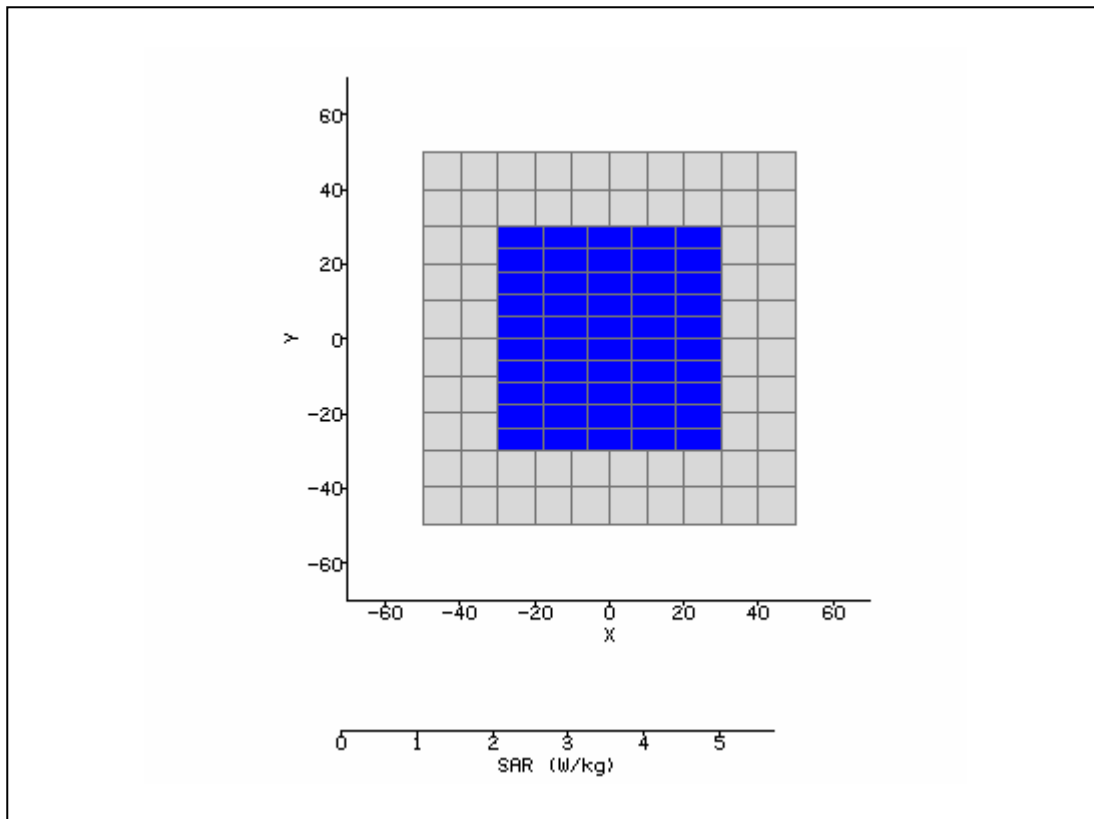


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/30/2008 9:42:54 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	39.37
Relative Humidity:	45.6%	Conductivity:	1.867
Phantom S/No:	Head04_37.csv	Liquid Temperature:	21.6°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	12.00 mm
Antenna Configuration:	Dipole	Max E Field:	131.94 V/m
Test Frequency:	2450MHz	SAR 1g:	49.152 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	21.191 W/kg
Conversion Factors:	.569 / .569 / .569	SAR Start:	3.007 W/kg
Type of Modulation:		SAR End:	2.960 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.58 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/24/08
Input Power Level:	1W	Extrapolation:	poly4

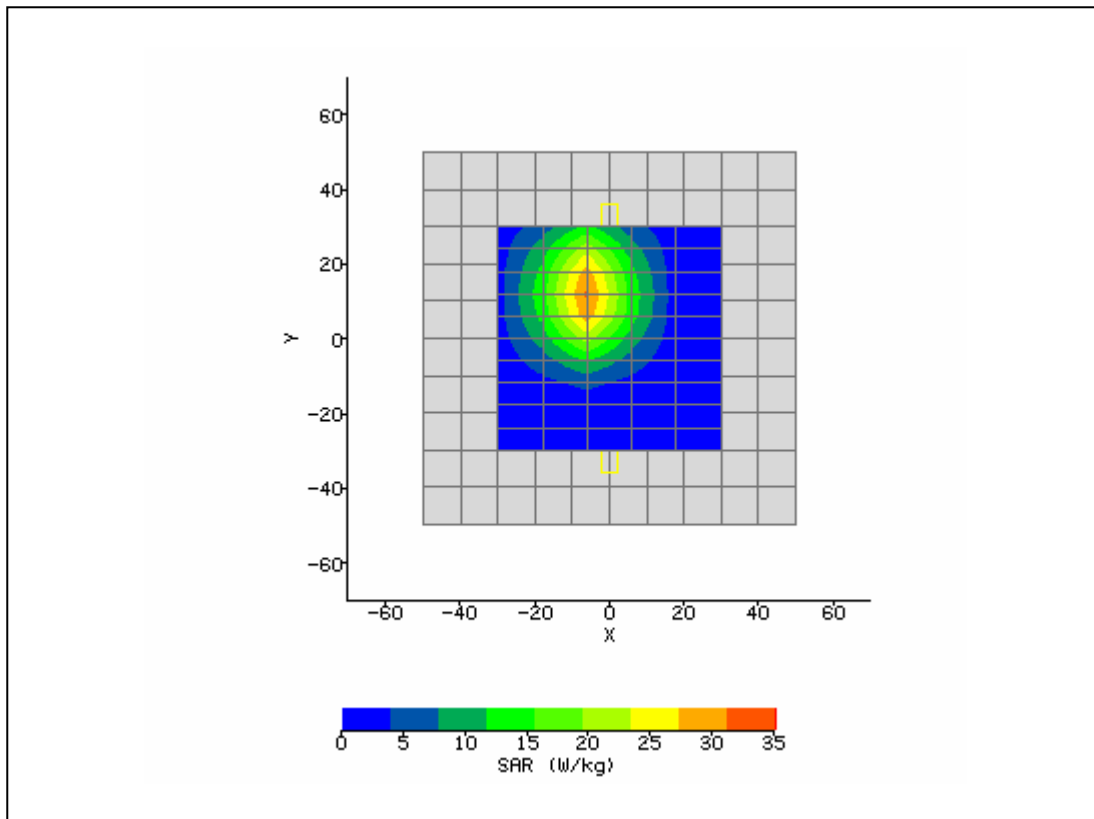


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	10/31/2008 8:46:14 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	L0116
Ambient Temperature:	21.7°C	Liquid Simulant:	2450
Device Under Test:	System	Relative Permittivity:	39.38
Relative Humidity:	45.6%	Conductivity:	1.867
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.1°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-10.00 mm
DUT Position:	10mm	Max SAR Y-axis Location:	9.00 mm
Antenna Configuration:	Dipole	Max E Field:	141.42 V/m
Test Frequency:	2450MHzMHz	SAR 1g:	49.752 W/kg
Air Factors:	504 / 365 / 331	SAR 10g:	22.933 W/kg
Conversion Factors:	.569 / .569 / .569	SAR Start:	3.518 W/kg
Type of Modulation:		SAR End:	3.581 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	1.79 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	1W	Extrapolation:	poly4

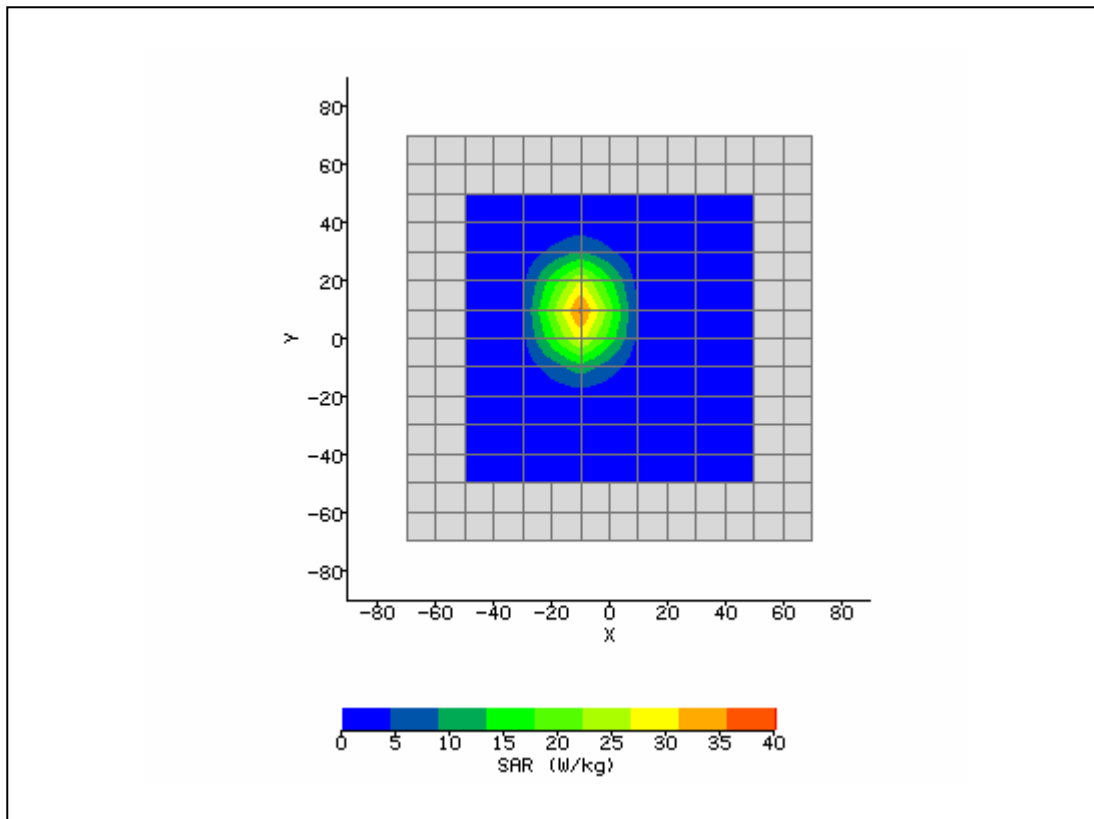


System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/4/2008 8:29:38 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	System	Relative Permittivity:	35.83
Relative Humidity:	37%	Conductivity:	4.667
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-6.40 mm
DUT Position:	10mm	Max SAR Y-axis Location:	-5.60 mm
Antenna Configuration:	WG	Max E Field:	45.93 V/m
Test Frequency:	5200MHz	SAR 1g:	3.434 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	2.597 W/kg
Conversion Factors:	2.92 / 3.27 / 3.99	SAR Start:	2.067 W/kg
Type of Modulation:		SAR End:	2.052 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-0.74 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	100mW	Extrapolation:	poly4

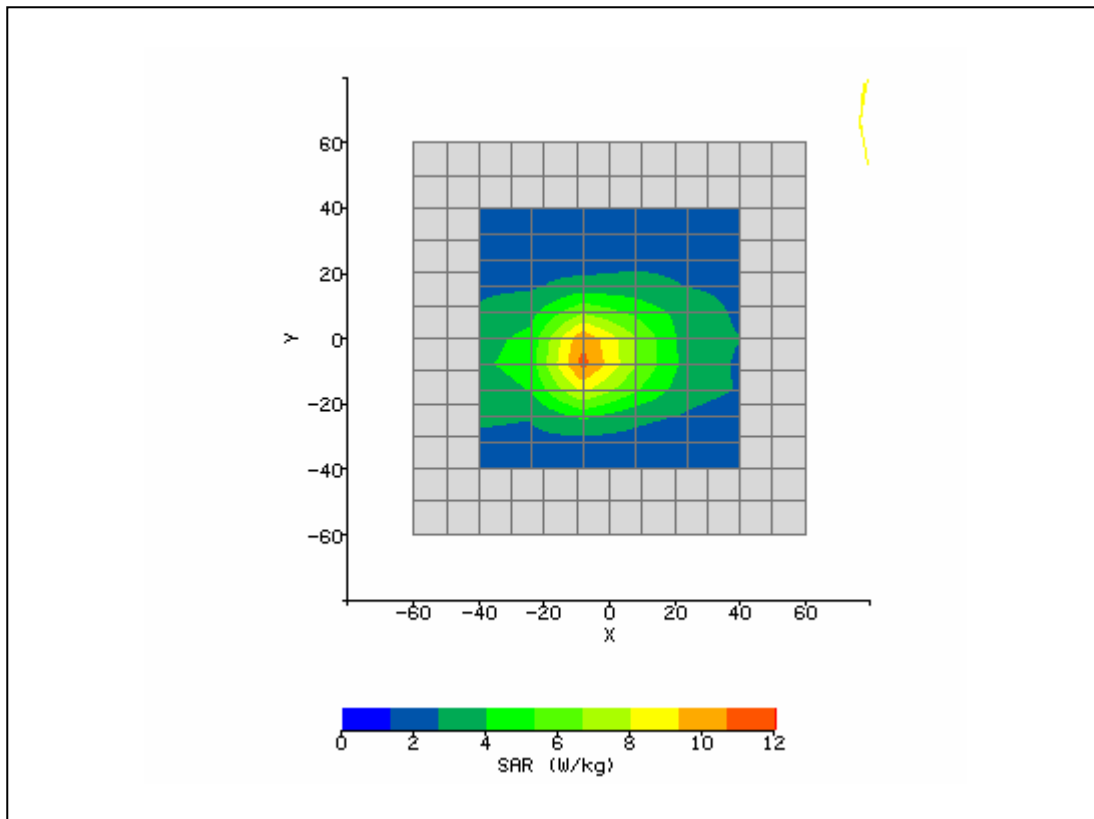

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 8:37:14 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5200
Device Under Test:	System	Relative Permittivity:	35.83
Relative Humidity:	30%	Conductivity:	4.667
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	-14.40 mm
DUT Position:	10mm	Max SAR Y-axis Location:	-4.80 mm
Antenna Configuration:	WG	Max E Field:	45.50 V/m
Test Frequency:	5200MHz	SAR 1g:	3.864 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	2.670 W/kg
Conversion Factors:	2.92 / 3.27 / 3.99	SAR Start:	1.968 W/kg
Type of Modulation:		SAR End:	1.893 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-3.77 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/06/08
Input Power Level:	100mW	Extrapolation:	poly4

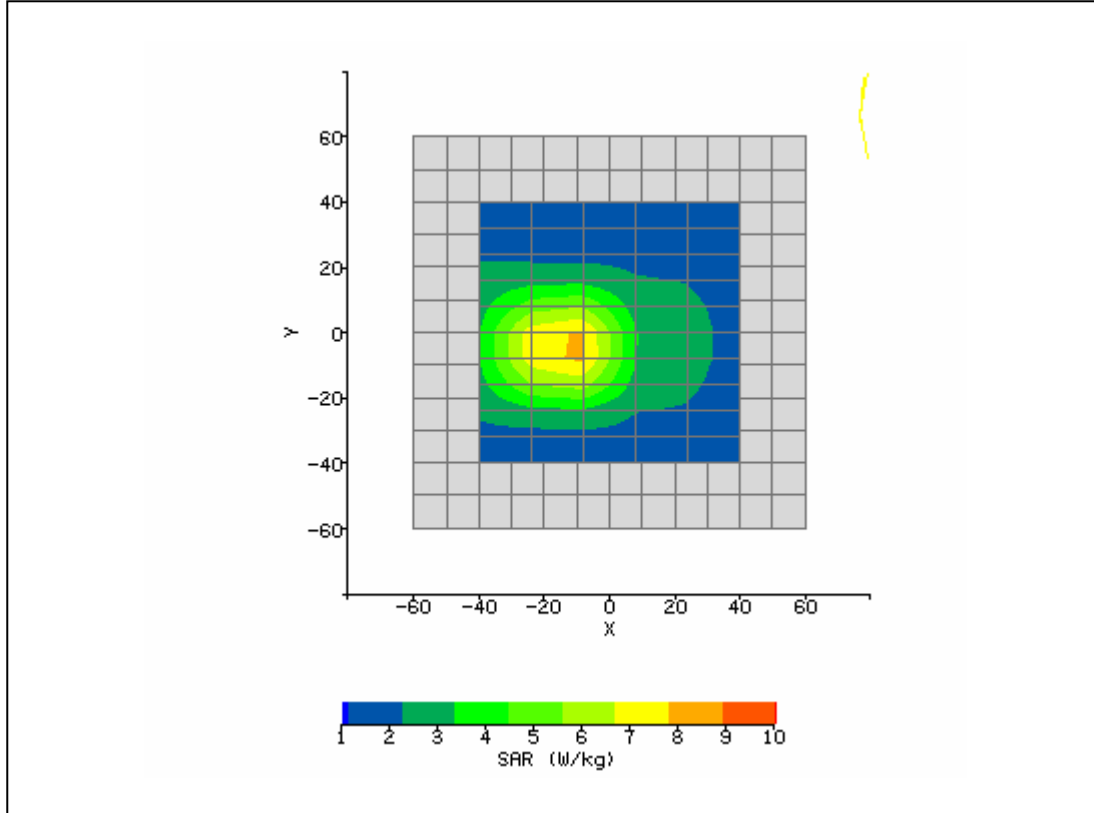

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/05/2008 9:02:57 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	System	Relative Permittivity:	35.62
Relative Humidity:	36.2%	Conductivity:	5.28
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	11.20 mm
DUT Position:	10mm	Max SAR Y-axis Location:	-4.80 mm
Antenna Configuration:	WG	Max E Field:	46.14 V/m
Test Frequency:	5800MHz	SAR 1g:	4.331 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	3.280 W/kg
Conversion Factors:	2.95 / 3.29 / 4.17	SAR Start:	2.590 W/kg
Type of Modulation:		SAR End:	2.594 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	0.14 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	10/30/08
Input Power Level:	100mW	Extrapolation:	poly4

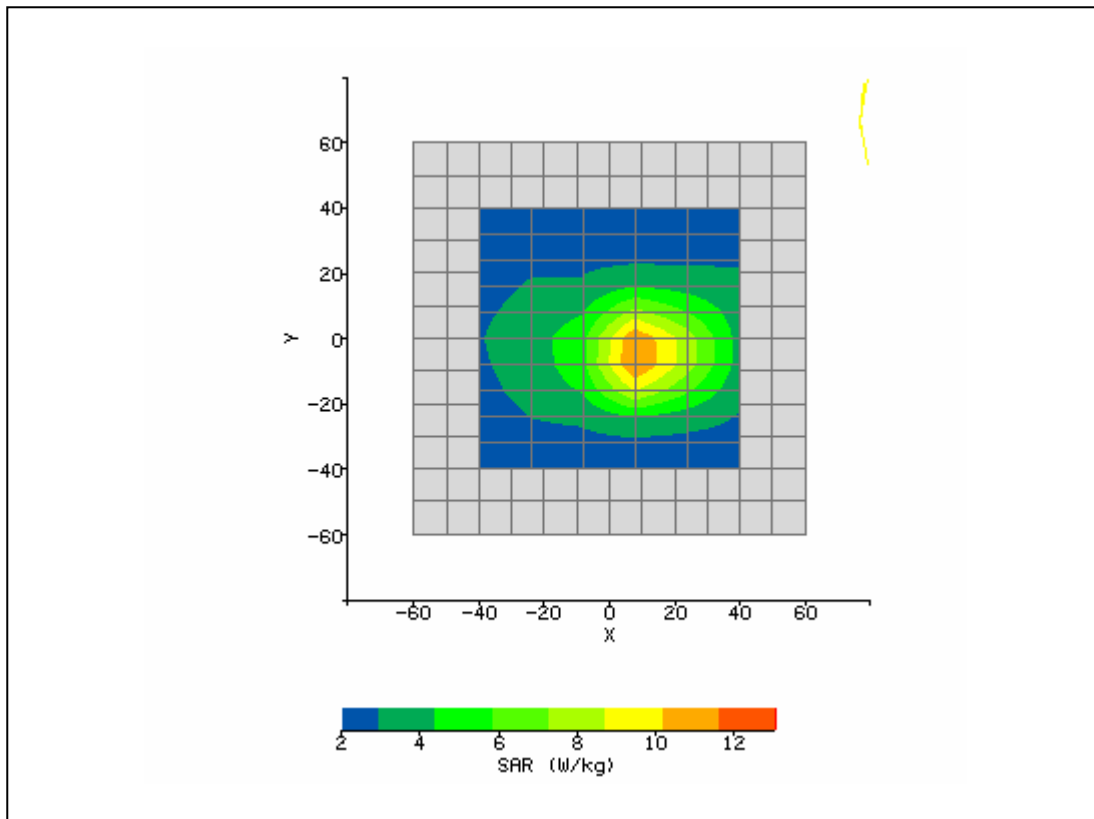

System / software:	SARA2 / 2.54 VPM coloc	Input Power Drift:	
Date / Time:	11/11/2008 8:47:32 AM	DUT Battery Model/No:	
Filename:	temp.txt	Probe Serial Number:	M0024
Ambient Temperature:	22.8°C	Liquid Simulant:	5800
Device Under Test:	System	Relative Permittivity:	35.62
Relative Humidity:	34.3%	Conductivity:	5.261
Phantom S/No:	Head04_37.csv	Liquid Temperature:	22.0°C
Phantom Rotation:	0°	Max SAR X-axis Location:	11.20 mm
DUT Position:	10mm	Max SAR Y-axis Location:	-2.40 mm
Antenna Configuration:	WG	Max E Field:	45.30 V/m
Test Frequency:	5800MHz	SAR 1g:	4.067 W/kg
Air Factors:	411.50 / 320.07 / 275.84	SAR 10g:	3.128 W/kg
Conversion Factors:	2.95 / 3.29 / 4.17	SAR Start:	2.449 W/kg
Type of Modulation:		SAR End:	2.408 W/kg
Modn. Duty Cycle:		SAR Drift during Scan:	-1.67 %
Diode Compression Factors (V*200):	20 / 20 / 20	Probe battery last changed:	11/06/08
Input Power Level:	100mW	Extrapolation:	poly4

