



FCC CFR47 PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 7  
CLASS II PERMISSIVE CHANGE  
TEST REPORT

FOR  
802.11ag/Draft 802.11n WLAN PCI-E Mini Card  
(Tested inside of Dell PP15S)

MODEL NUMBER: BCM94322HM8L  
FCC ID: QDS-BRCM1031  
IC: 4324A-BRCM1031

REPORT NUMBER: 08U11950-1, Revision B

ISSUE DATE: AUGUST 18, 2008

*Prepared for*  
BROADCOM CORPORATION  
190 MATHILDA PLACE  
SUNNYVALE, CA 94086, USA

*Prepared by*  
COMPLIANCE CERTIFICATION SERVICES  
47173 BENICIA STREET  
FREMONT, CA 94538, U.S.A.  
TEL: (510) 771-1000  
FAX: (510) 661-0888

**NVLAP**<sup>®</sup>  
NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
---	07/25/08	Initial Issue	Sunny Shih
B	08/18/08	Revised MPE Section	T. Chan

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>5</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>5</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>5</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	<i>5</i>
4.2. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>5</i>
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>6</b>
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>6</i>
5.2. <i>DESCRIPTION OF CLASS II CHANGE.....</i>	<i>6</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	<i>6</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>6</i>
5.5. <i>WORST-CASE CONFIGURATION AND MODE .....</i>	<i>7</i>
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>8</i>
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>10</b>
<b>7. RADIATED TEST RESULTS .....</b>	<b>11</b>
7.1. <i>LIMITS AND PROCEDURE .....</i>	<i>11</i>
7.1.1. <i>802.11b MODE.....</i>	<i>12</i>
7.1.2. <i>802.11g MODE.....</i>	<i>15</i>
7.1.3. <i>802.11n HT40 MODE IN THE 2.4 GHz BAND .....</i>	<i>19</i>
7.1.4. <i>802.11a MODE IN THE 5.8 GHz BAND .....</i>	<i>23</i>
7.1.5. <i>802.11n HT20 MODE IN THE 5.8 GHz BAND .....</i>	<i>24</i>
7.1.6. <i>802.11n HT40 MODE IN THE 5.8 GHz BAND .....</i>	<i>25</i>
7.2. <i>RECEIVER ABOVE 1 GHz .....</i>	<i>26</i>
7.2.1. <i>20 MHz BANDWIDTH IN THE 2.4 GHz BAND .....</i>	<i>26</i>
7.3. <i>WORST-CASE BELOW 1 GHz.....</i>	<i>27</i>
<b>8. MAXIMUM PERMISSIBLE EXPOSURE.....</b>	<b>29</b>
<b>9. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>33</b>
<b>10. SETUP PHOTOS .....</b>	<b>36</b>

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** BROADCOM CORPORATION  
190 MATHILDA PLACE  
SUNNYVALE, CA 94086, USA

**EUT DESCRIPTION:** 802.11ag / Draft 802.11n WLAN PCI-E MINI CARD  
(Tested inside of Dell PP15S)

**MODEL:** BCM94322HM8L

**SERIAL NUMBER:** 240


**DATE TESTED:** July 18 - 19, 2008

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
RSS-210 Issue 7 Annex 8 and RSS-GEN Issue 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All expressions of Pass/Fail in this report are opinions expressed by CCS based on interpretations of the test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. No part of this report may be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any government agency.

Approved & Released For CCS By:



---

SUNNY SHIH  
EMC SUPERVISOR  
COMPLIANCE CERTIFICATION SERVICES

Tested By:



---

Can Ming Chung  
EMC ENGINEER  
COMPLIANCE CERTIFICATION SERVICES

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 2, and RSS-210 Issue 7.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Power Line Conducted Emission	+/- 2.3 dB
Radiated Emission	+/- 3.4 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is a 802.11ag / Draft 802.11n WLAN PCI-E Mini Card installed inside Dell PP15S portable laptop.

The radio module is manufactured by Broadcom and model number is BCM9432HM8L.

### 5.2. DESCRIPTION OF CLASS II CHANGE

The major changes filed under this application are:

Change #1: Adding portable platform, Dell PP15S.

Change #2: Adding co-location with BT module FCC ID: QDS-BRCM1033.

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes PIFA antennas, with the following maximum gain

Antenna Manufacturer	Antenna type	Model number	Max Peak gain (2.4GHz)	Max Peak gain (5GHz)
GALTRONICS	PIFA	06-7015-03 (MAIN)	TX2 0.18dBi(H)	TX1 0.4dBi(V)
		06-7016-03 (AUX)		
GALTRONICS	PIFA	06-7015-03 (MAIN)	TX2 -1.84dBi(H)	TX1 0.4dBi(V)
		06-7016-03 (AUX)		
*GALTRONICS	PIFA	<b>06-7018-03 (MAIN)</b>	TX2 0.66dBi(V)	TX2 2.48dBi(V)
		<b>06-7031-03 (AUX)</b>		
Tyco Electronics	PIFA	2023987-1(TX1)	TX2 0.04dBi(H)	TX1 1.15dBi(H)
		2023987-1(TX2)		
Tyco Electronics	PIFA	2023987-1(TX1)	TX2 -0.98dBi(V)	TX2 0.71dBi(V)
		2023986-1(TX2)		
Tyco Electronics	PIFA	2023989-1(TX1)	TX1 -1.17dBi(H)	TX2 1.24dBi(H)

\*: Antenna under testing.

### 5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was BCMWL5, rev. 4.170.75.0.

The test utility software used during testing was wl\_tool, rev. 4.170 RC75.0.

## 5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case data rate for each mode is determined to be as follows, based on original CCS test report # 07U11529 and CCS Test plan.

Only the Radiated Emission and AC mains line conduction tests are performed.

## 5.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	PP15S	21-022949000-18	DoC
AC Adapter	Dell	LA45NS0-00	OGM456-71615-7CP	N/A


### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US115V	Unshielded	2.0m	N/A
2	DC	1	DC	Unshielded	2.0m	Ferrite on laptop's end

### TEST SETUP

The EUT is installed in a host laptop computer during the tests. Test software exercised the radio card.

**SETUP DIAGRAM FOR TESTS**

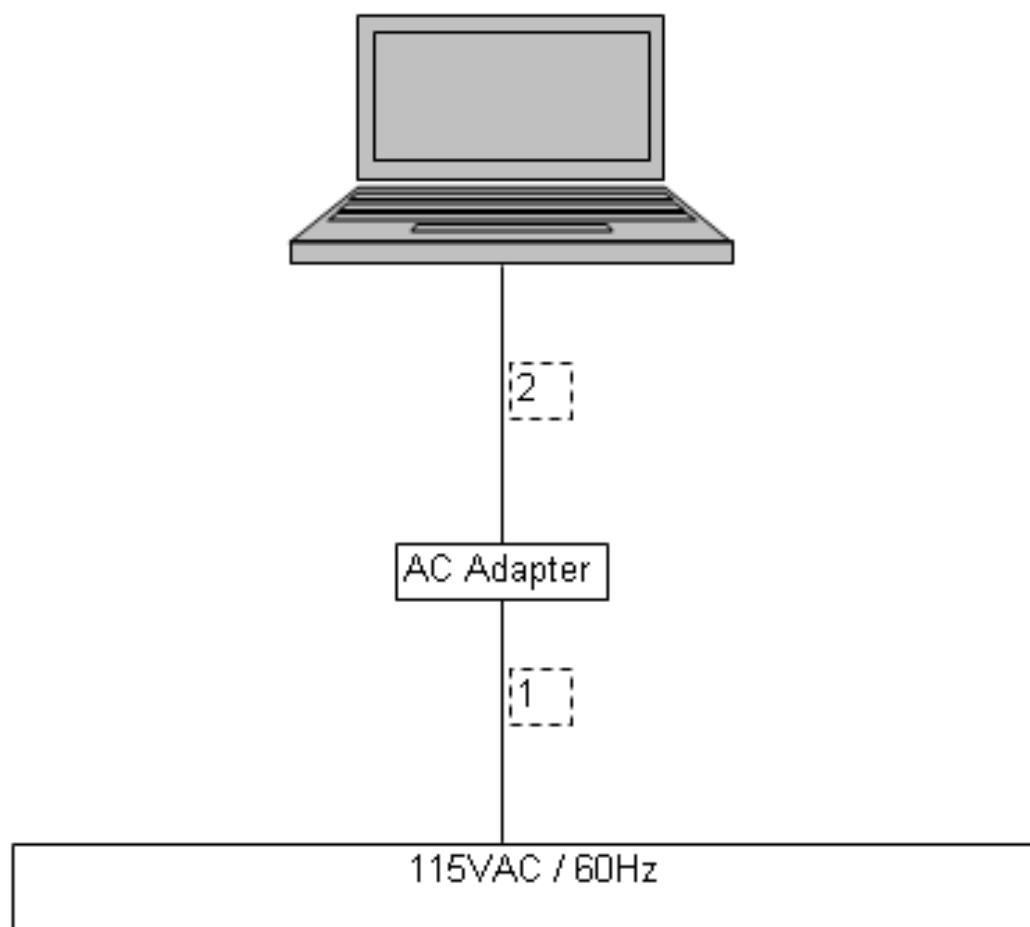

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Antenna, Horn, 18 GHz	EMCO	3115	C00945	04/15/09
Bilog Antenna	Sunol Sciences	JB1	C01016	10/13/08
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	09/27/08
Preamplifier, 1300 MHz	Agilent / HP	8447D	C01064	05/09/09
RF Filter Section, 2.9 GHz	Agilent / HP	85420E	C00958	06/12/09
Peak Power Meter	Agilent / HP	E4416A	C00963	12/02/08
Peak / Average Power Sensor	Agilent	E9327A	C00964	12/02/08
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	01/27/09
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	N02481	10/25/08
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	10/25/08
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01012	08/07/08

## 7. RADIATED TEST RESULTS

### 7.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 5 GHz band.



The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

### 7.1.1. 802.11b MODE

#### RESTRICTED BANDEDGE (LOW CHANNEL 1, HORIZONTAL)

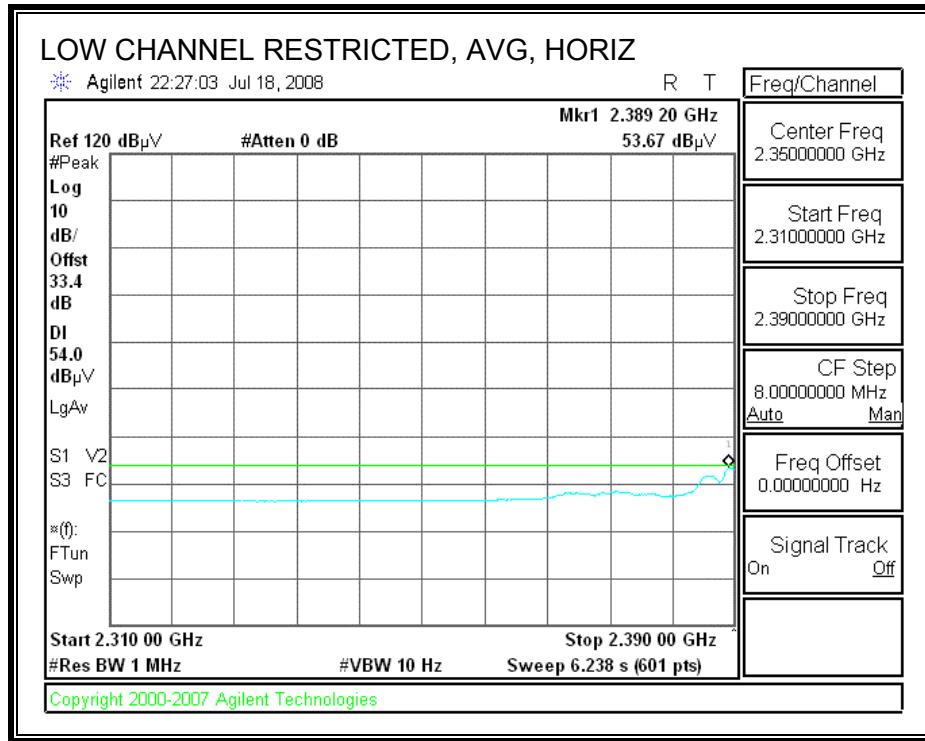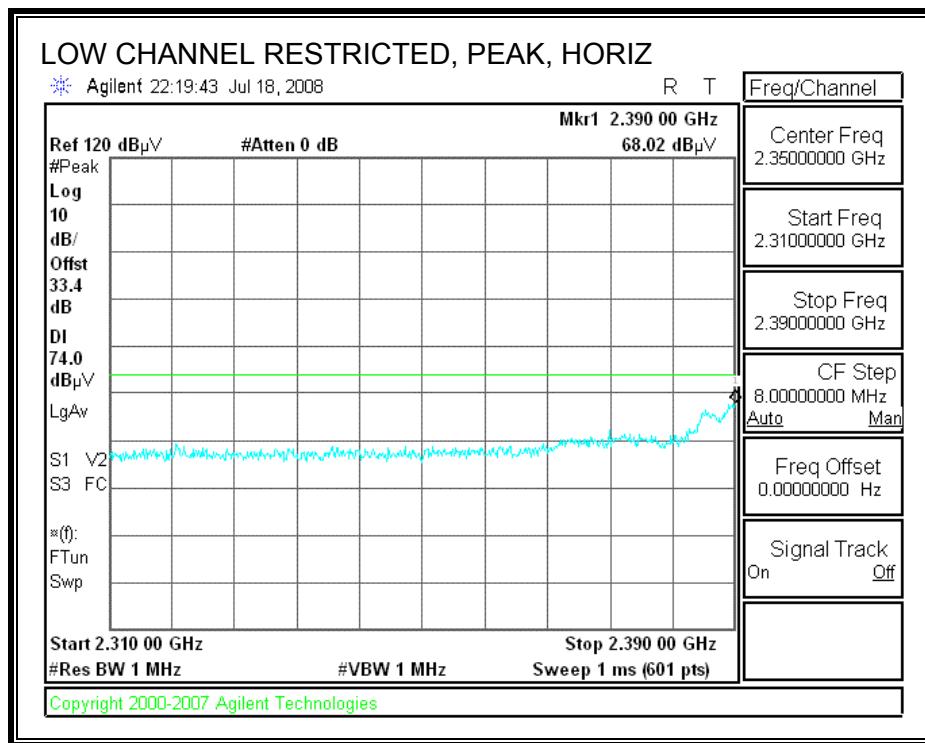

**RESTRICTED BANDEDGE (LOW CHANNEL 1, VERTICAL)**

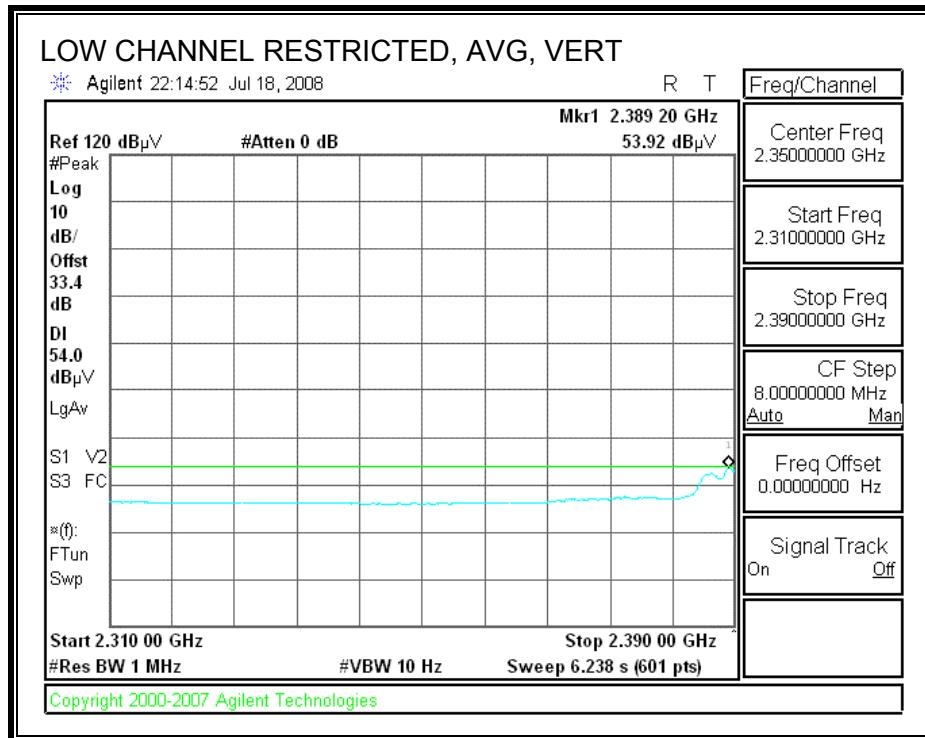
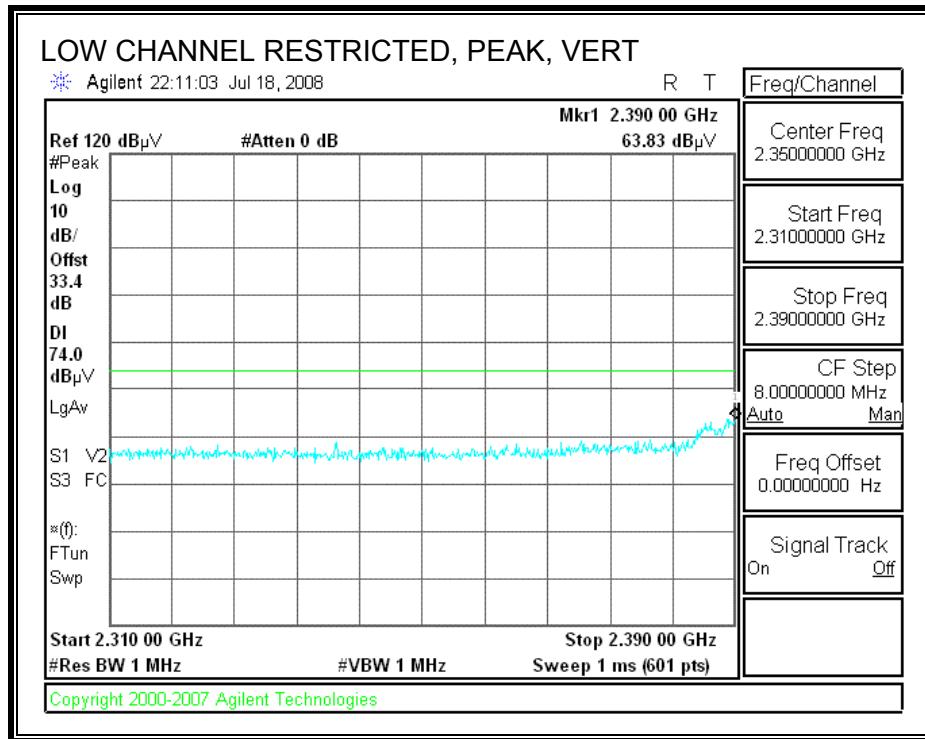


## HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
Company: Broadcom Project #:08U11950 Date: 07/19/08 Test Engineer: Can Ming Chung Configuration: Tx Mode Mode: Tx 2.4 GHz_B-Mode Low Channel															
Test Equipment:															
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit			
T120; S/N: 29310 @3m			T144 Miteq 3008A00931									FCC 15.209			
Hi Frequency Cables															
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter			
						A-5m Chamber			HPF_7.6GHz						
Peak Measurements RBW=VBW=1MHz															
Average Measurements RBW=1MHz , VBW=10Hz															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
LOW CHANNEL, 2412 MHz															
7.236	3.0	43.3	29.1	34.2	8.4	-36.2	0.0	0.7	50.3	36.1	74	54	-23.7	-17.9	V
7.236	3.0	42.3	29.6	34.2	8.4	-36.2	0.0	0.7	49.3	36.6	74	54	-24.7	-17.4	H
															V
Rev. 4.12.7															
f Measurement Frequency					Amp Preamp Gain					Avg Lim Average Field Strength Limit					
Dist	Distance to Antenna				D Corr	Distance Correct to 3 meters				Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading				Avg	Average Field Strength @ 3 m				Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor				Peak	Calculated Peak Field Strength				Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss				HPF	High Pass Filter									

### 7.1.2. 802.11g MODE



#### RESTRICTED BANDEDGE (LOW CHANNEL 1, HORIZONTAL)

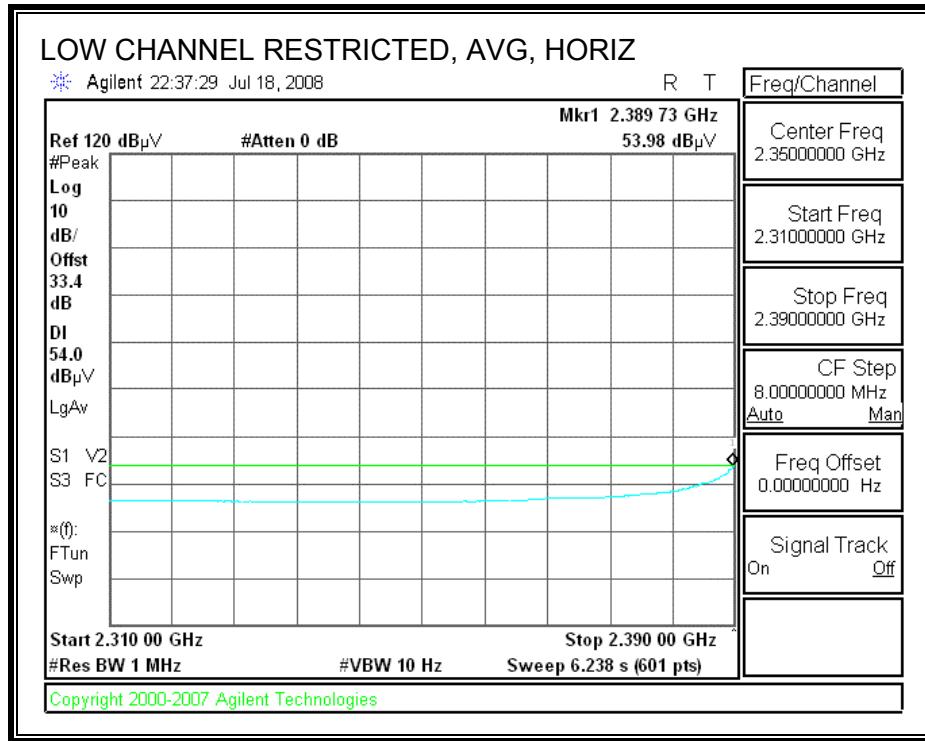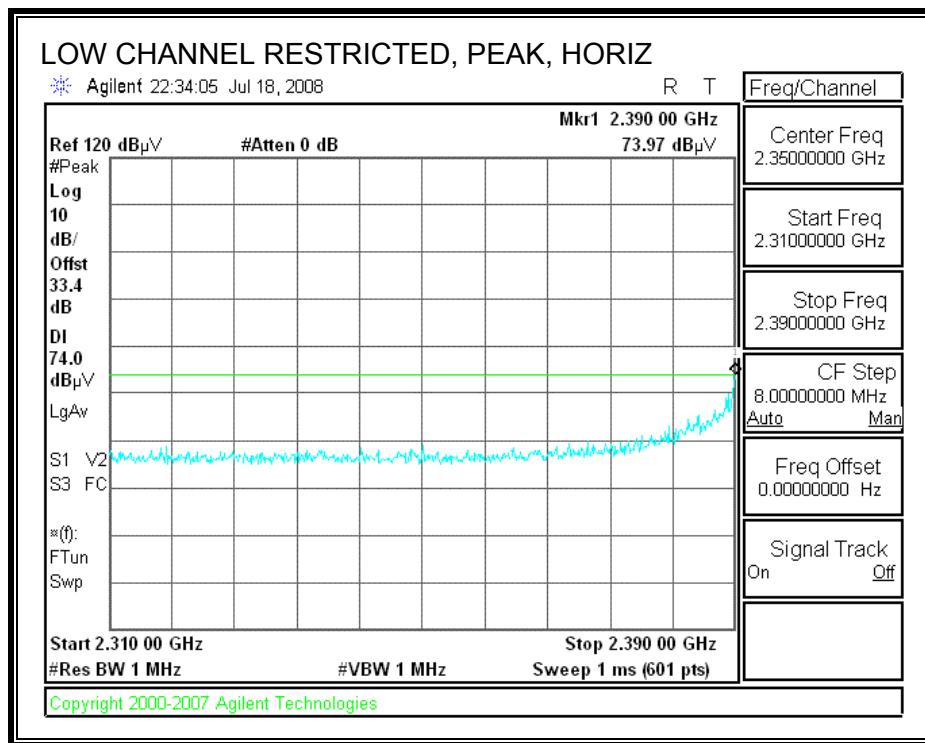



**RESTRICTED BANDEDGE (LOW CHANNEL1, VERTICAL)**

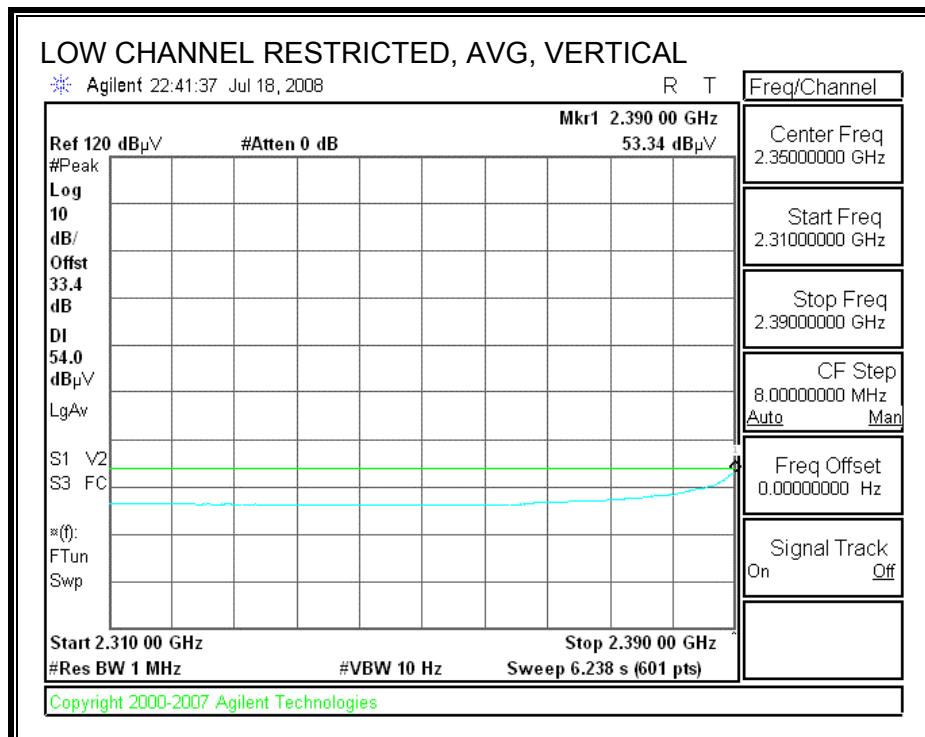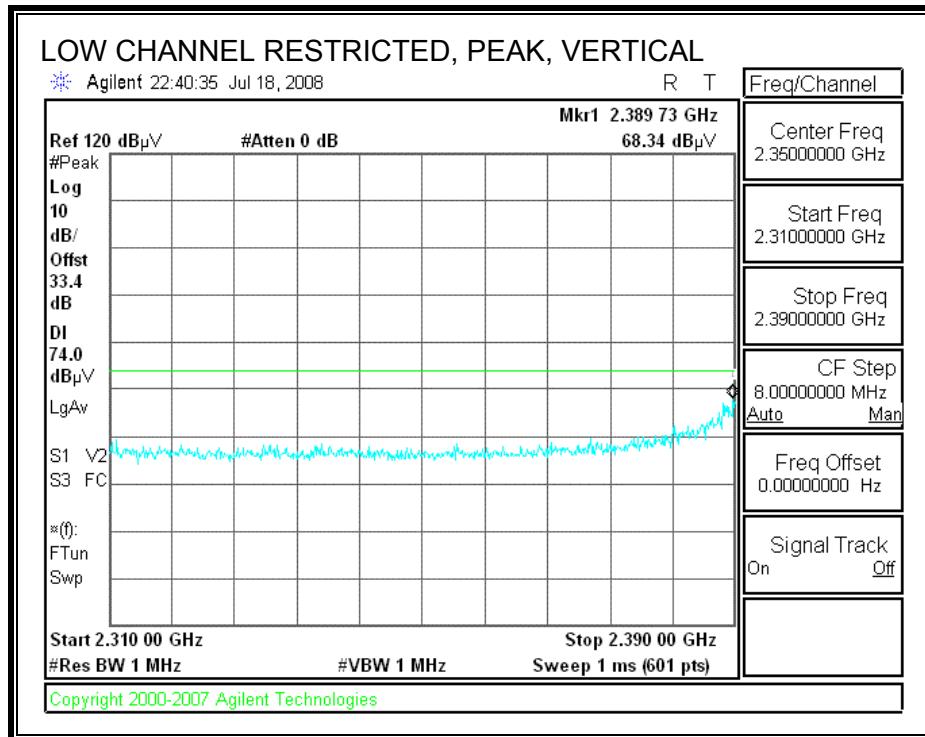

**RESTRICTED BANDEDGE (HIGH CHANNEL 11, HORIZONTAL)**

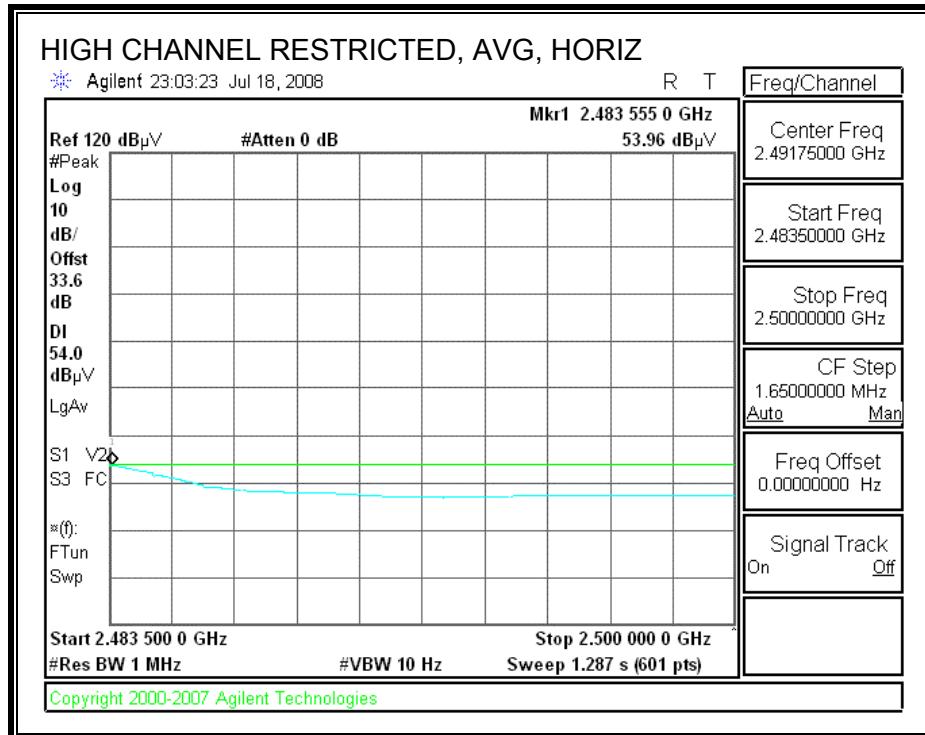
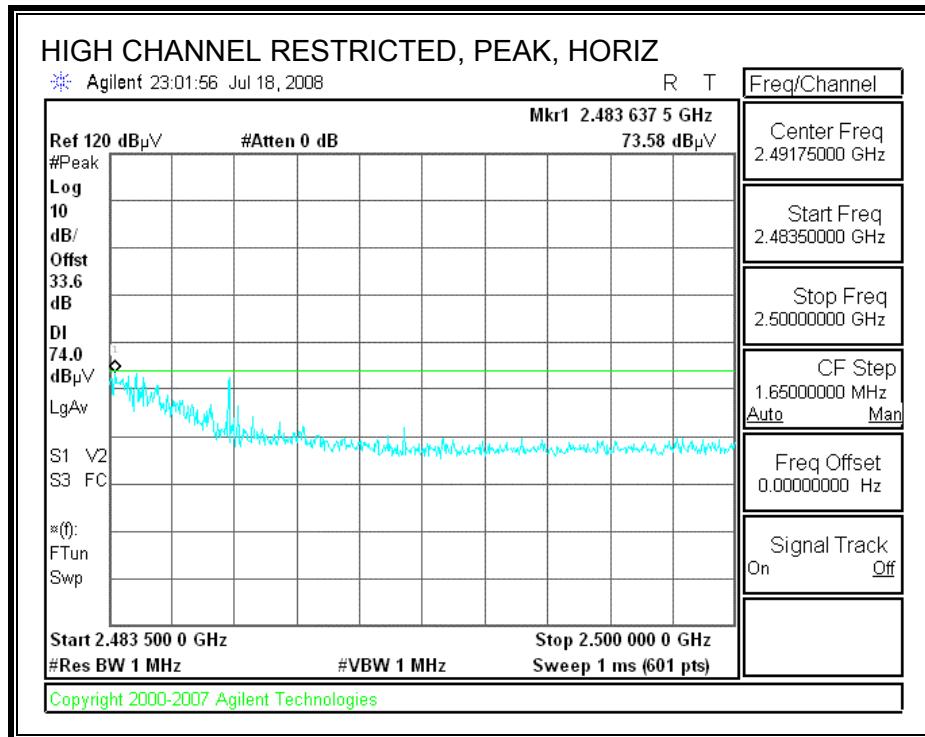


**RESTRICTED BANDEDGE (HIGH CHANNEL 11, VERTICAL)**

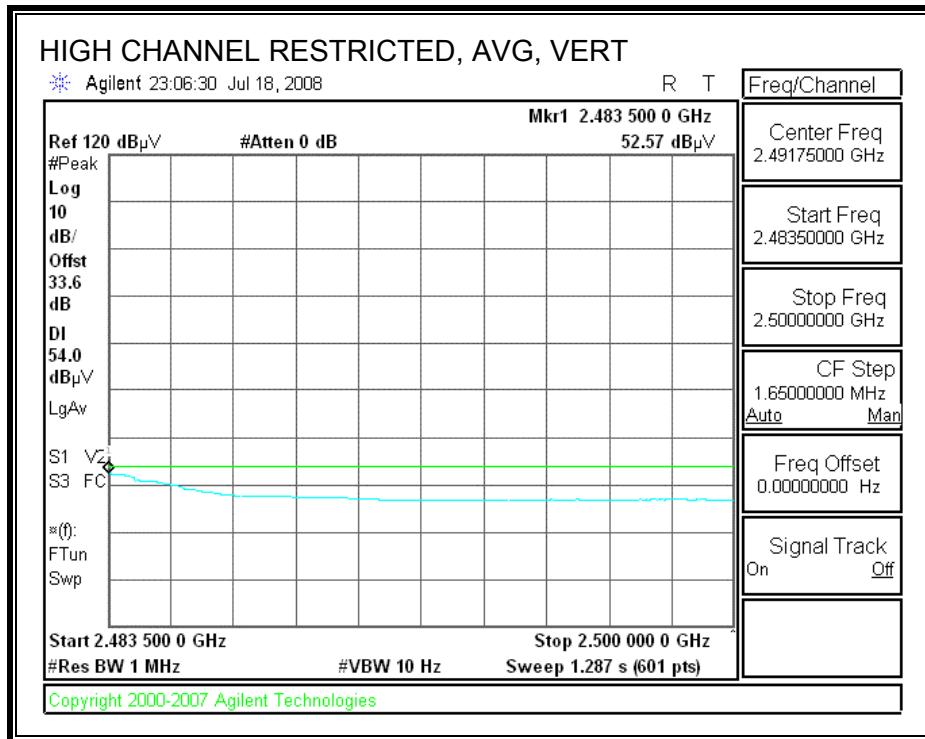
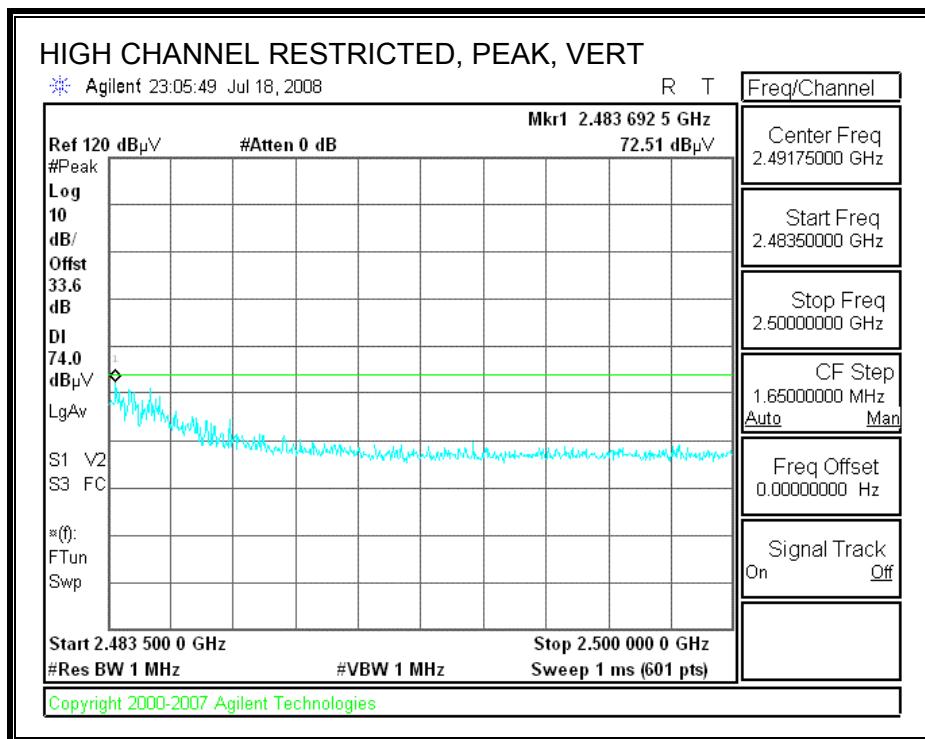


### 7.1.3. 802.11n HT40 MODE IN THE 2.4 GHz BAND



#### RESTRICTED BANDEDGE (HIGH CHANNEL 8, HORIZONTAL)

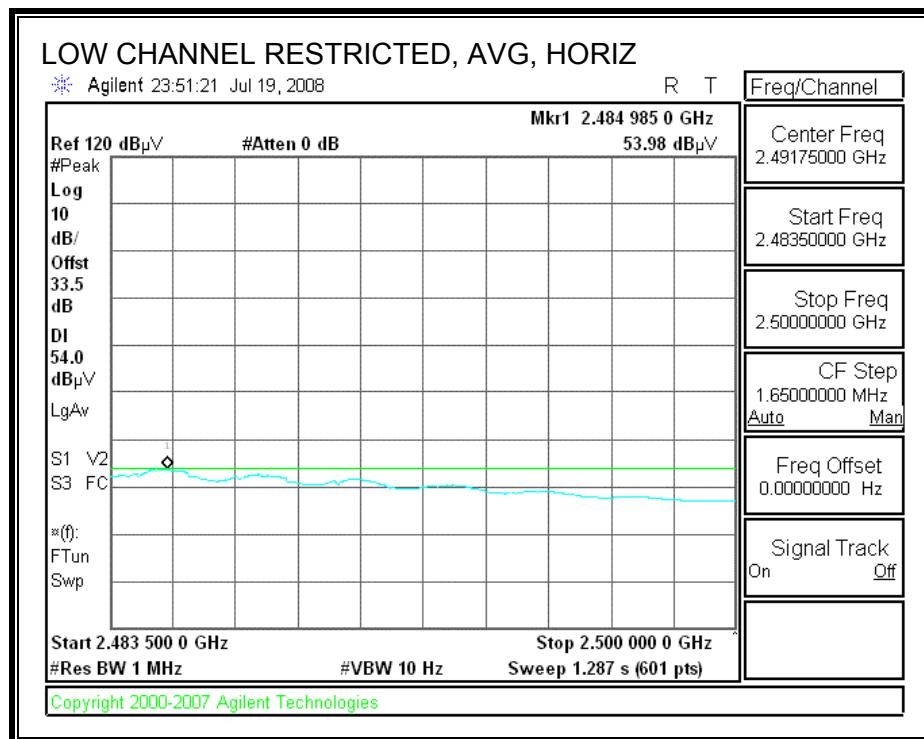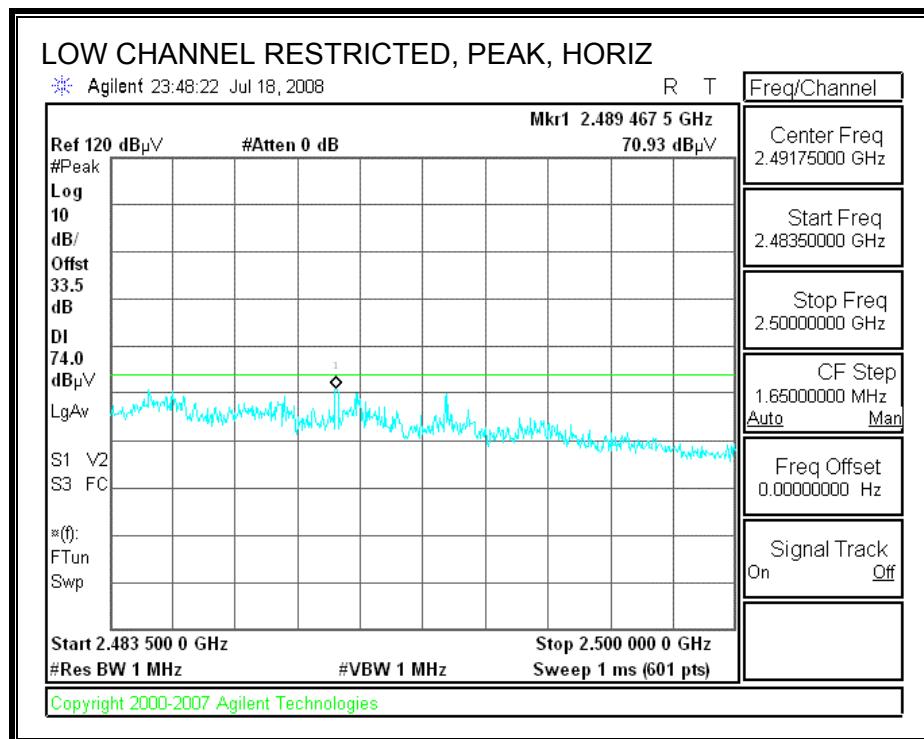



**RESTRICTED BANDEDGE (HIGH CHANNEL 8, VERTICAL)**

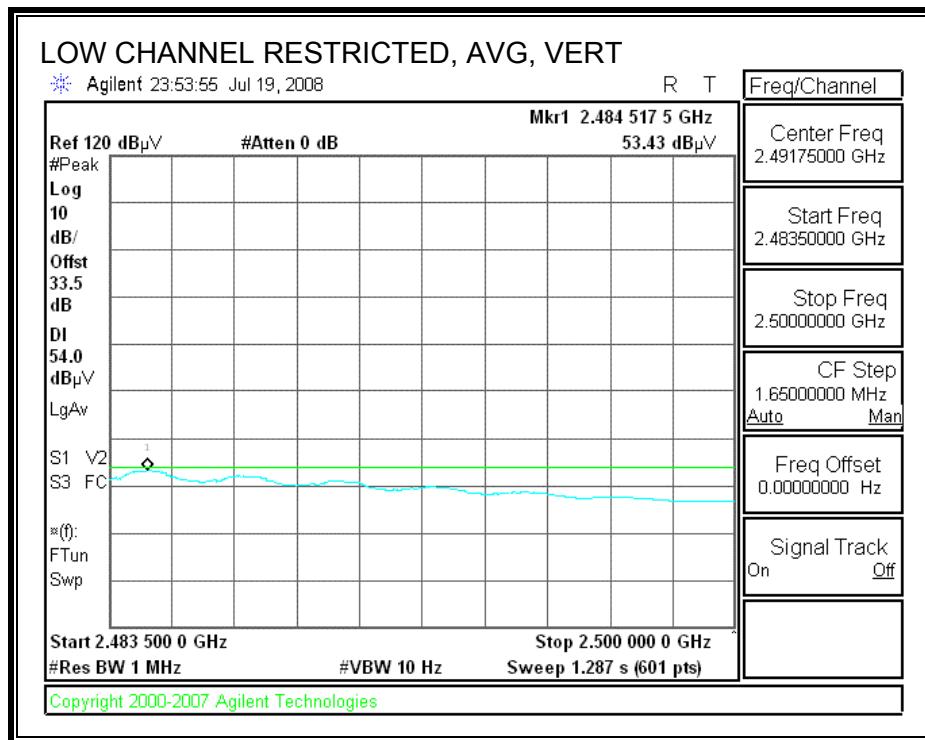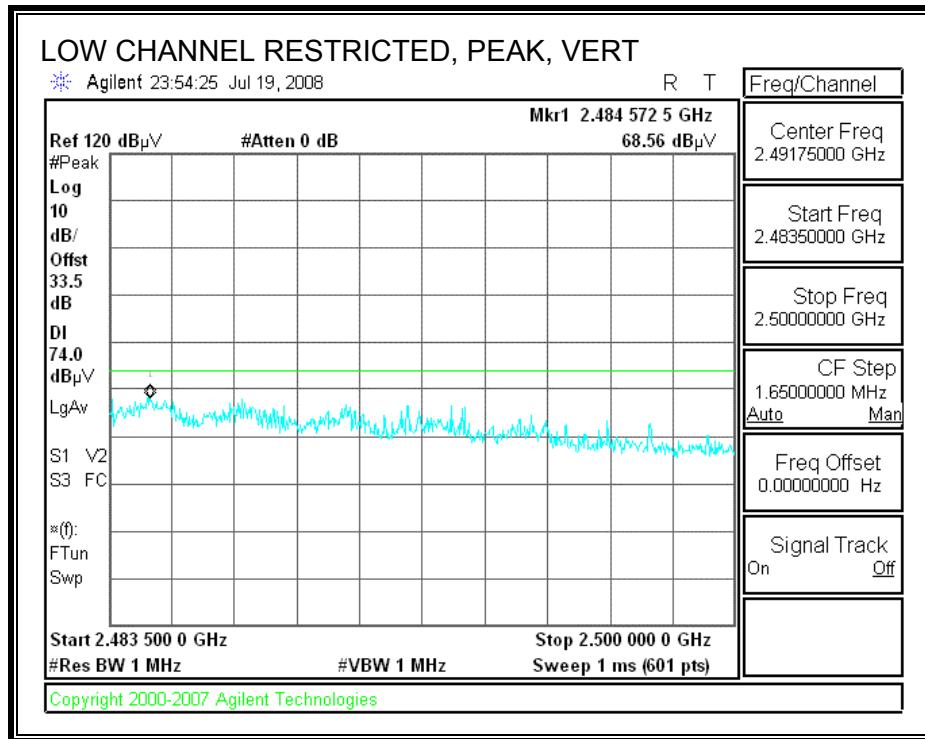

**RESTRICTED BANDEDGE (HIGH CHANNEL 9, HORIZONTAL)**

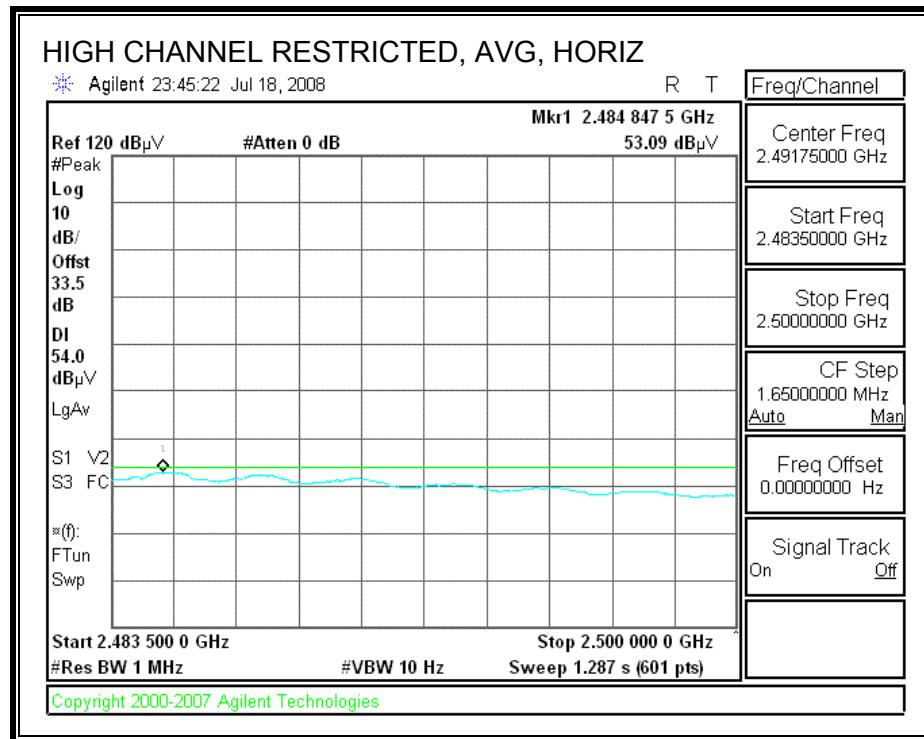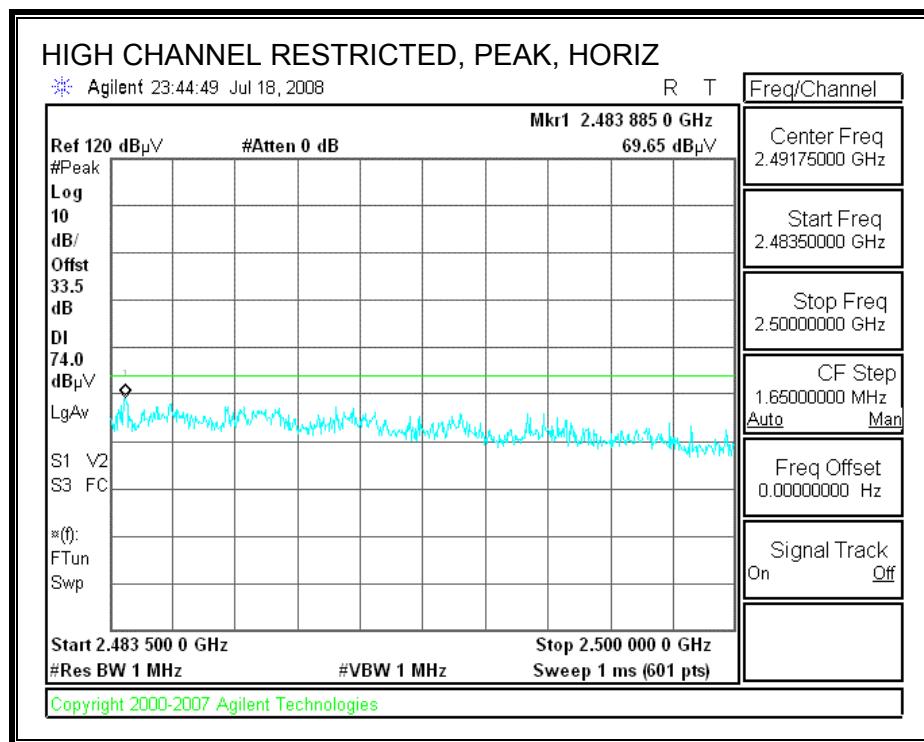

**RESTRICTED BANDEDGE (HIGH CHANNEL 9, VERTICAL)**

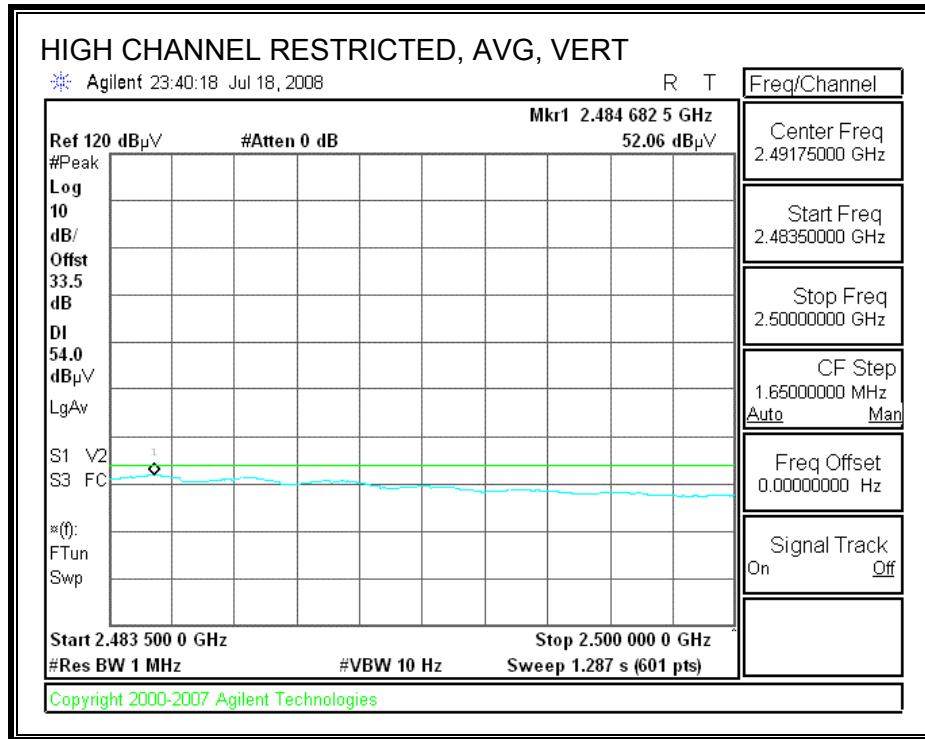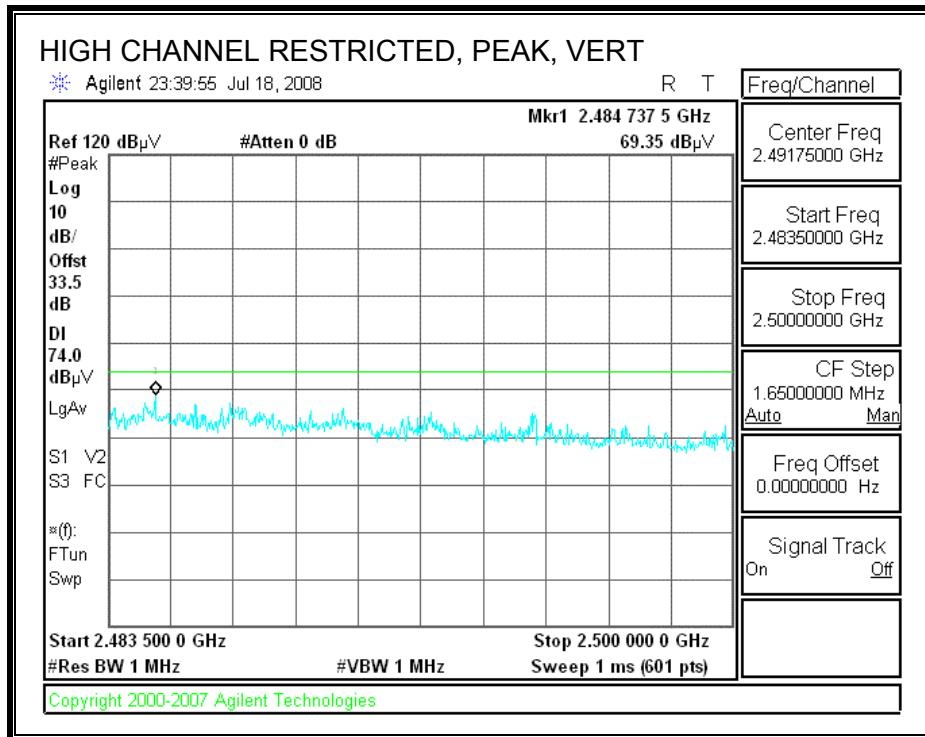

### 7.1.4. 802.11a MODE IN THE 5.8 GHz BAND

#### HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
Company: Broadcom Project #:08U11950 Date: 07/19/08 Test Engineer: Can Ming Chung Configuration: Tx Mode Mode: Tx 5.8 GHz Band_11a Legacy															
<u>Test Equipment:</u>															
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit			
T120; S/N: 29310 @3m			T144 Miteq 3008A00931									FCC 15.209			
Hi Frequency Cables															
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter			
						A-5m Chamber			HPF_7.6GHz						
<u>Peak Measurements</u> RBW=VBW=1MHz															
<u>Average Measurements</u> RBW=1MHz ; VBW=10Hz															
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
MID CHANNEL, 5785 MHz															
11.570	3.0	41.5	28.4	36.4	11.7	-35.8	0.0	0.7	54.6	41.4	74	54	-19.4	-12.6	V
11.570	3.0	41.9	28.6	36.4	11.7	-35.8	0.0	0.7	54.9	41.6	74	54	-19.1	-12.4	H
Rev. 4.12.7															
f	Measurement Frequency				Amp	Preamp Gain				Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna				D Corr	Distance Correct to 3 meters				Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading				Avg	Average Field Strength @ 3 m				Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor				Peak	Calculated Peak Field Strength				Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss				HPF	High Pass Filter									

## 7.1.5. 802.11n HT20 MODE IN THE 5.8 GHz BAND

### HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																													
Company: Broadcom Project #:08U11950 Date: 07/19/08 Test Engineer: Can Ming Chung Configuration: Tx Mode Mode: Tx 5.8 GHz Band_11HT 20 Legacy																																																																													
Test Equipment:																																																																													
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit																																																																	
T120; S/N: 29310 @3m			T144 Miteq 3008A00931									FCC 15.209																																																																	
Hi Frequency Cables																																																																													
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter																																																																	
						A-5m Chamber			HPF_7.6GHz																																																																				
Peak Measurements RBW=VBW=1MHz																																																																													
Average Measurements RBW=1MHz, VBW=10Hz																																																																													
<table border="1"><thead><tr><th>f GHz</th><th>Dist (m)</th><th>Read Pk dBuV</th><th>Read Avg. dBuV</th><th>AF dB/m</th><th>CL dB</th><th>Amp dB</th><th>D Corr dB</th><th>Fltr dB</th><th>Peak dBuV/m</th><th>Avg dBuV/m</th><th>Pk Lim dBuV/m</th><th>Avg Lim dBuV/m</th><th>Pk Mar dB</th><th>Avg Mar dB</th><th>Notes (V/H)</th></tr></thead><tbody><tr><td colspan="15"><b>MID CHANNEL, 5785 MHz</b></td></tr><tr><td>11.570</td><td>3.0</td><td>41.3</td><td>28.9</td><td>36.4</td><td>11.7</td><td>-35.8</td><td>0.0</td><td>0.7</td><td>54.4</td><td>42.0</td><td>74</td><td>54</td><td>-19.6</td><td>-12.0</td><td>V</td></tr><tr><td>11.570</td><td>3.0</td><td>41.4</td><td>28.4</td><td>36.4</td><td>11.7</td><td>-35.8</td><td>0.0</td><td>0.7</td><td>54.4</td><td>41.4</td><td>74</td><td>54</td><td>-19.6</td><td>-12.6</td><td>H</td></tr></tbody></table>															f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	<b>MID CHANNEL, 5785 MHz</b>															11.570	3.0	41.3	28.9	36.4	11.7	-35.8	0.0	0.7	54.4	42.0	74	54	-19.6	-12.0	V	11.570	3.0	41.4	28.4	36.4	11.7	-35.8	0.0	0.7	54.4	41.4	74	54	-19.6	-12.6	H
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																														
<b>MID CHANNEL, 5785 MHz</b>																																																																													
11.570	3.0	41.3	28.9	36.4	11.7	-35.8	0.0	0.7	54.4	42.0	74	54	-19.6	-12.0	V																																																														
11.570	3.0	41.4	28.4	36.4	11.7	-35.8	0.0	0.7	54.4	41.4	74	54	-19.6	-12.6	H																																																														
Rev. 4.12.7																																																																													
<table><tr><td>f</td><td>Measurement Frequency</td><td>Amp</td><td>Preamp Gain</td><td>Avg Lim</td><td>Average Field Strength Limit</td></tr><tr><td>Dist</td><td>Distance to Antenna</td><td>D Corr</td><td>Distance Correct to 3 meters</td><td>Pk Lim</td><td>Peak Field Strength Limit</td></tr><tr><td>Read</td><td>Analyzer Reading</td><td>Avg</td><td>Average Field Strength @ 3 m</td><td>Avg Mar</td><td>Margin vs. Average Limit</td></tr><tr><td>AF</td><td>Antenna Factor</td><td>Peak</td><td>Calculated Peak Field Strength</td><td>Pk Mar</td><td>Margin vs. Peak Limit</td></tr><tr><td>CL</td><td>Cable Loss</td><td>HPF</td><td>High Pass Filter</td><td></td><td></td></tr></table>															f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter																																			
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																																																								
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																																																								
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																																																								
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																																																								
CL	Cable Loss	HPF	High Pass Filter																																																																										

## 7.1.6. 802.11n HT40 MODE IN THE 5.8 GHz BAND

### HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																
Company: Broadcom Project #:08U11950 Date: 07/19/08 Test Engineer: Can Ming Chung Configuration: Tx Mode Mode: Tx 5.8 GHz Band_11HT 40																
<u>Test Equipment:</u>																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T120; S/N: 29310 @3m			T144 Miteq 3008A00931									FCC 15.209				
Hi Frequency Cables																
2 foot cable			3 foot cable			12 foot cable			HPF			Reject Filter			<u>Peak Measurements</u> RBW=VBW=1MHz	
						A-5m Chamber			HPF_7.6GHz						<u>Average Measurements</u> RBW=1MHz, VBW=10Hz	
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
LOW CHANNEL, 5755 MHz																
11.510	3.0	42.1	29.5	36.4	11.6	-35.8	0.0	0.7	55.0	42.5	74	54	-19.0	-11.5	V	
11.510	3.0	41.6	29.2	36.4	11.6	-35.8	0.0	0.7	54.5	42.1	74	54	-19.5	-11.9	H	
Rev. 4.12.7																
f Measurement Frequency					Amp Preamp Gain					Avg Lim Average Field Strength Limit						
Dist Distance to Antenna					D Corr Distance Correct to 3 meters					Pk Lim Peak Field Strength Limit						
Read Analyzer Reading					Avg Average Field Strength @ 3 m					Avg Mar Margin vs. Average Limit						
AF Antenna Factor					Peak Calculated Peak Field Strength					Pk Mar Margin vs. Peak Limit						
CL Cable Loss					HPF High Pass Filter											


## 7.2. RECEIVER ABOVE 1 GHz

### 7.2.1. 20 MHz BANDWIDTH IN THE 2.4 GHz BAND

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																														
Company: Broadcom Project #: 08U11950 Date: 07/19/08 Test Engineer: Can Ming Chung Configuration: Rx Mode Mode: Rx 2.4 GHz-HT 20																																																																																														
<b>Test Equipment:</b>																																																																																														
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit																																																																																						
T120; S/N: 29310 @3m		T144 Miteq 3008A00931						RX RSS 210																																																																																						
Hi Frequency Cables 2 foot cable      3 foot cable      12 foot cable A-5m Chamber      HPF      Reject Filter																																																																																														
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz																																																																																														
<table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF dB</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr> <td>5.990</td> <td>3.0</td> <td>39.2</td> <td>28.7</td> <td>33.8</td> <td>7.6</td> <td>-36.3</td> <td>0.0</td> <td>0.0</td> <td>44.4</td> <td>33.9</td> <td>74</td> <td>54</td> <td>-29.6</td> <td>-20.1</td> <td>H</td> </tr> <tr> <td>7.320</td> <td>3.0</td> <td>41.0</td> <td>30.7</td> <td>34.1</td> <td>8.4</td> <td>-36.2</td> <td>0.0</td> <td>0.0</td> <td>47.4</td> <td>37.0</td> <td>74</td> <td>54</td> <td>-26.6</td> <td>-17.0</td> <td>H</td> </tr> <tr> <td>5.670</td> <td>3.0</td> <td>38.5</td> <td>28.5</td> <td>33.1</td> <td>7.5</td> <td>-36.5</td> <td>0.0</td> <td>0.0</td> <td>42.6</td> <td>32.6</td> <td>74</td> <td>54</td> <td>-31.4</td> <td>-21.4</td> <td>V</td> </tr> <tr> <td>7.360</td> <td>3.0</td> <td>40.6</td> <td>27.8</td> <td>34.1</td> <td>8.4</td> <td>-36.2</td> <td>0.0</td> <td>0.0</td> <td>46.9</td> <td>34.1</td> <td>74</td> <td>54</td> <td>-27.1</td> <td>-19.9</td> <td>V</td> </tr> </tbody> </table>															f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	5.990	3.0	39.2	28.7	33.8	7.6	-36.3	0.0	0.0	44.4	33.9	74	54	-29.6	-20.1	H	7.320	3.0	41.0	30.7	34.1	8.4	-36.2	0.0	0.0	47.4	37.0	74	54	-26.6	-17.0	H	5.670	3.0	38.5	28.5	33.1	7.5	-36.5	0.0	0.0	42.6	32.6	74	54	-31.4	-21.4	V	7.360	3.0	40.6	27.8	34.1	8.4	-36.2	0.0	0.0	46.9	34.1	74	54	-27.1	-19.9	V
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																															
5.990	3.0	39.2	28.7	33.8	7.6	-36.3	0.0	0.0	44.4	33.9	74	54	-29.6	-20.1	H																																																																															
7.320	3.0	41.0	30.7	34.1	8.4	-36.2	0.0	0.0	47.4	37.0	74	54	-26.6	-17.0	H																																																																															
5.670	3.0	38.5	28.5	33.1	7.5	-36.5	0.0	0.0	42.6	32.6	74	54	-31.4	-21.4	V																																																																															
7.360	3.0	40.6	27.8	34.1	8.4	-36.2	0.0	0.0	46.9	34.1	74	54	-27.1	-19.9	V																																																																															
Rev. 4.12.7																																																																																														
f      Measurement Frequency Dist      Distance to Antenna Read      Analyzer Reading AF      Antenna Factor CL      Cable Loss																																																																																														
Amp      Preamp Gain D Corr      Distance Correct to 3 meters Avg      Average Field Strength @ 3 m Peak      Calculated Peak Field Strength HPF      High Pass Filter																																																																																														
Avg Lim      Average Field Strength Limit Pk Lim      Peak Field Strength Limit Avg Mar      Margin vs. Average Limit Pk Mar      Margin vs. Peak Limit																																																																																														

### 7.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

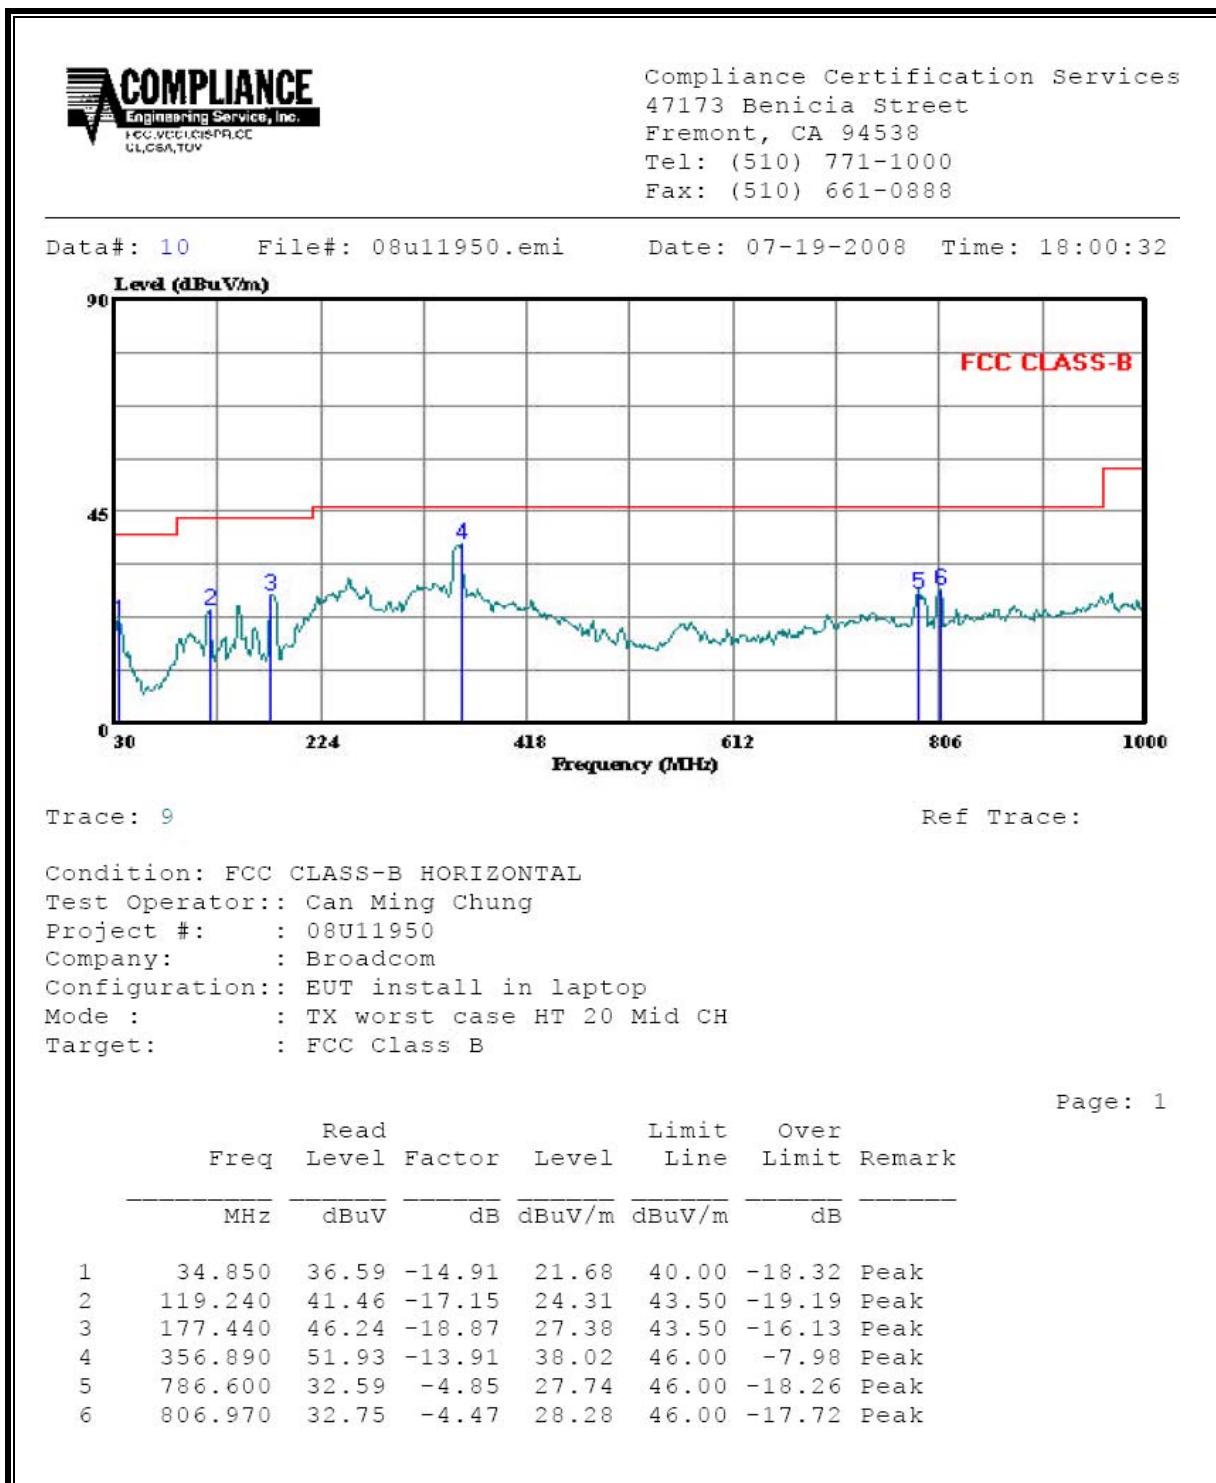


**SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, VERTICAL)**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 2 File#: 08U11950.EMI Date: 07-19-2008 Time: 17:34:59

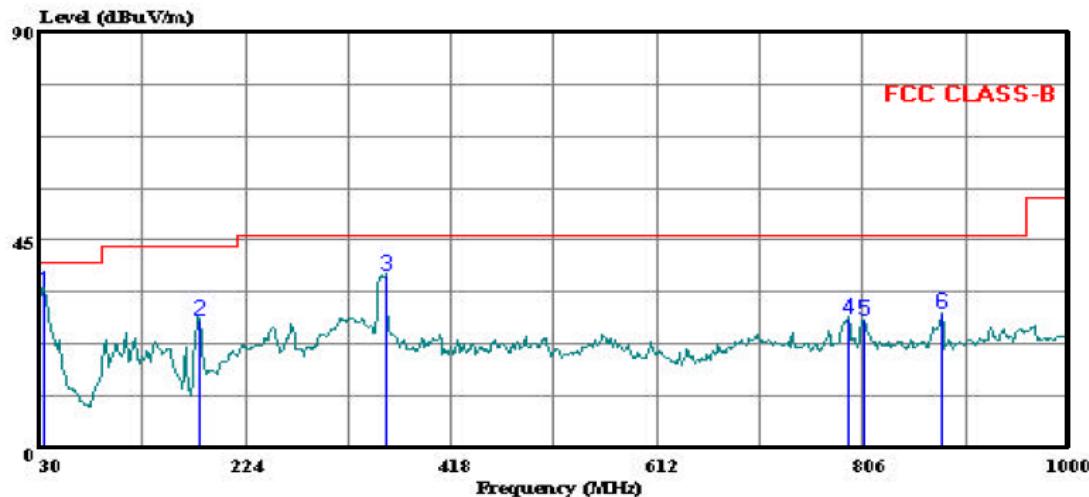

Trace: 1

Ref Trace:

Condition: FCC CLASS-B VERTICAL  
Test Operator:: Can Ming Chung  
Project #: 08U11950  
Company: Broadcom  
Configuration:: EUT install in laptop  
Mode : TX worst case HT 20 Mid CH  
Target: FCC Class B

Page: 1

Freq	Read		Limit	Over	Remark
	Level	Factor			
MHz	dBuV	dB	dBuV/m	dBuV/m	dB
1 34.850	48.78	-14.91	33.87	40.00	-6.13 Peak
2 180.350	46.19	-18.71	27.48	43.50	-16.02 Peak
3 355.920	51.34	-13.94	37.40	46.00	-8.60 Peak
4 792.420	32.85	-4.71	28.14	46.00	-17.86 Peak
5 806.970	32.03	-4.47	27.56	46.00	-18.44 Peak
6 880.690	31.83	-2.75	29.08	46.00	-16.92 Peak

## 8. MAXIMUM PERMISSIBLE EXPOSURE

### FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

**IC RULES**

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5**

**Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m <sup>2</sup> )	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> <sup>0.5</sup>	0.0042 <i>f</i> <sup>0.5</sup>	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000/ <i>f</i> <sup>1.2</sup>
150 000–300 000	0.158 <i>f</i> <sup>0.5</sup>	4.21 × 10 <sup>-4</sup> <i>f</i> <sup>0.5</sup>	6.67 × 10 <sup>-5</sup> <i>f</i>	616 000/ <i>f</i> <sup>1.2</sup>

\* Power density limit is applicable at frequencies greater than 100 MHz.

**Notes:** 1. Frequency, *f*, is in MHz.  
2. A power density of 10 W/m<sup>2</sup> is equivalent to 1 mW/cm<sup>2</sup>.  
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

## CALCULATIONS

Given

$$E = \sqrt{(30 * P * G) / d}$$

and

$$S = E^2 / 3770$$

where

E = Field Strength in Volts/meter

P = Power in Watts

G = Numeric antenna gain

d = Distance in meters

S = Power Density in milliwatts/square centimeter

Combining equations, rearranging the terms to express the distance as a function of the remaining variables, changing to units of Power to mW and Distance to cm, and substituting the logarithmic form of power and gain yields:

$$d = 0.282 * 10^{((P + G) / 20) / \sqrt{S}}$$

where

d = MPE distance in cm

P = Power in dBm

G = Antenna Gain in dBi

S = Power Density Limit in mW/cm<sup>2</sup>

Rearranging terms to calculate the power density at a specific distance yields

$$S = 0.0795 * 10^{((P + G) / 10) / (d^2)}$$

The power density in units of mW/cm<sup>2</sup> is converted to units of W/m<sup>2</sup> by multiplying by a factor of 10.

### **CO-LOCATED MPE CALCULATIONS for Mobile configuration**

For multiple colocated transmitters operating simultaneously the total power density can be calculated by summing the Power \* Gain product (in linear units) of each transmitter.

yields

$$d = 0.282 * \sqrt{((P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)) / S}$$

where

d = distance in cm

Px = Power of transmitter x in mW

Gx = Numeric gain of antenna x

S = Power Density in mW/cm<sup>2</sup>

In the table below, Power and Gain are entered in units of dBm and dBi respectively, then converted to their linear forms for the purpose of the calculations.

### **LIMITS**

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm<sup>2</sup>

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m<sup>2</sup>

### **RESULTS**

Mode	Band	Output Power (dBm)	Antenna Gain (dBi)	MPE Distance (cm)	FCC Power Density (mW/cm <sup>2</sup> )	IC Power Density (W/m <sup>2</sup> )
Bluetooth	2.4 GHz	6.07	3.50			
WLAN	5.8 GHz	27.17	2.48			
Combined				20.0	0.19	1.85

NOTE: For mobile or fixed location transmitters, the minimum separation distance is 20 cm, even if calculations indicate that the MPE distance would be less.

## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5-5	56	46
5-30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

### TEST PROCEDURE

ANSI C63.4

### RESULTS

#### 6 WORST EMISSIONS


CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit	FCC_B	Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP	AV	
0.20	51.00	--	42.87	0.00	63.69	53.69	-12.69	-10.82	L1
0.69	44.37	--	26.12	0.00	56.00	46.00	-11.63	-19.88	L1
13.34	40.38	--	17.75	0.00	60.00	50.00	-19.62	-32.25	L1
0.20	51.00		42.87	0.00	63.69	53.69	-63.69	-10.82	L2
0.69	44.37	--	26.12	0.00	56.00	46.00	-11.63	-19.88	L2
13.34	40.38	--	17.75	0.00	60.00	50.00	-19.62	-32.25	L2
6 Worst Data									

**LINE 1 RESULTS**



Compliance Certification Services  
47173 Benicia Street  
Fremont, CA 94538  
Tel: (510) 771-1000  
Fax: (510) 661-0888

Data#: 35 File#: 08U11950.EMI Date: 07-19-2008 Time: 19:05:34

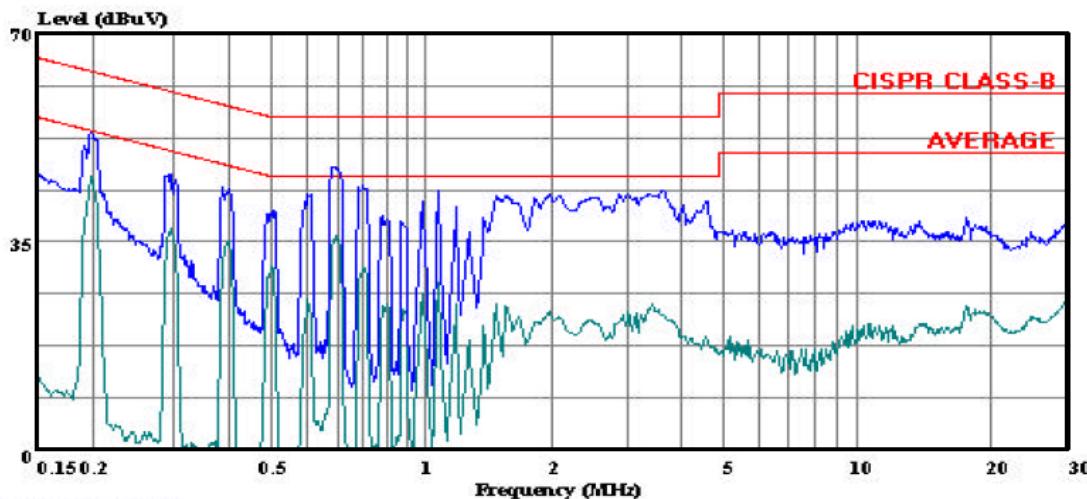

(Line Conduction)

Trace: 33

Ref Trace:

Condition: CISPR CLASS-B  
Test Operator:: Can Ming Chung  
Project #: : 08U11950  
Company: : Broadcom  
Configuration:: EUT inside Laptop  
Mode: : TX Worst case  
Target: : CISPR B  
Voltage: : 115VAC / 60Hz  
: L1: Peak (Blue); Average (Green)

**LINE 2 RESULTS**

