



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 7**

CERTIFICATION TEST REPORT

FOR

802.11g/DRAFT 802.11n WIRELESS LAN PCI-E MINICARD

MODEL NUMBER: BCM94313HMG2L

FCC ID: QDS-BRCM1050I

REPORT NUMBER: 10U13269-1, Revision A

ISSUE DATE: SEPTEMBER 16, 2010

Prepared for

**BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.**

Prepared by

**COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**

NVLAP®

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
---	09/01/10	Initial Issue	T. Chan
A	09/16/10	Updated To New Submission	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	5
2. TEST METHODOLOGY	6
3. FACILITIES AND ACCREDITATION.....	6
4. CALIBRATION AND UNCERTAINTY	6
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	<i>6</i>
4.2. <i>SAMPLE CALCULATION.....</i>	<i>6</i>
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	<i>6</i>
5. EQUIPMENT UNDER TEST	7
5.1. <i>DESCRIPTION OF EUT.....</i>	<i>7</i>
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	<i>7</i>
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	<i>7</i>
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	<i>7</i>
5.5. <i>NUMBER OF TRANSMIT CHAINS.....</i>	<i>7</i>
5.6. <i>WORST-CASE CONFIGURATION AND MODE</i>	<i>8</i>
5.7. <i>DESCRIPTION OF TEST SETUP.....</i>	<i>9</i>
6. TEST AND MEASUREMENT EQUIPMENT	11
7. ANTENNA PORT TEST RESULTS	12
7.1. <i>802.11b MODE IN THE 2.4 GHz BAND.....</i>	<i>12</i>
7.1.1. <i>6 dB BANDWIDTH</i>	<i>12</i>
7.1.2. <i>99% BANDWIDTH</i>	<i>15</i>
7.1.3. <i>OUTPUT POWER</i>	<i>18</i>
7.1.4. <i>POWER SPECTRAL DENSITY</i>	<i>19</i>
7.1.5. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>22</i>
7.2. <i>802.11g MODE IN THE 2.4 GHz BAND.....</i>	<i>26</i>
7.2.1. <i>6 dB BANDWIDTH</i>	<i>26</i>
7.2.2. <i>99% BANDWIDTH</i>	<i>29</i>
7.2.3. <i>OUTPUT POWER</i>	<i>32</i>
7.2.4. <i>POWER SPECTRAL DENSITY</i>	<i>33</i>
7.2.5. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	<i>36</i>
8. RADIATED TEST RESULTS	40
8.1. <i>LIMITS AND PROCEDURE</i>	<i>40</i>
8.2. <i>TRANSMITTER ABOVE 1 GHz</i>	<i>41</i>

8.2.1.	802.11b MODE.....	41
8.2.2.	802.11g MODE.....	44
8.3.	WORST-CASE BELOW 1 GHz.....	47
8.4.	RECEIVER ABOVE 1 GHz	48
8.4.1.	FOR 20 MHz BANDWIDTH IN THE 2.4 GHz BAND	48
9.	AC POWER LINE CONDUCTED EMISSIONS	49
10.	MAXIMUM PERMISSIBLE EXPOSURE	53
11.	SETUP PHOTOS	56

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.

EUT DESCRIPTION: 802.11g / Draft 802.11n WLAN PCI-E Minicard

MODEL: BCM94313HMG2L

SERIAL NUMBER: 210

DATE TESTED: JUNE 11 – SEPTEMBER 15, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 7 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 2	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For CCS By:



THU CHAN
ENGINEERING MANAGER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, and FCC CFR 47 Part 15.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

Field Strength (dBuV/m) = Measured Voltage (dBuV) + Antenna Factor (dB/m) +
Cable Loss (dB) – Preamp Gain (dB)

$$36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} = 28.9 \text{ dBuV/m}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11g / Draft 802.11n WLAN PCI-E Minicard.

The radio module is manufactured by Broadcom.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2412 - 2472	802.11b	20.75	118.85
2412 - 2472	802.11g	25.59	362.24

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an 802.11bgn WLAN antenna, with a maximum gain of 3.9dBi.

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was Broadcom, rev. 5.100.69.0.

The test utility software used during testing was wl_tool, rev. 5.100.RC69.0.

5.5. NUMBER OF TRANSMIT CHAINS

Selected measurements were performed only on the main chain for both 802.11b & g modes, which is main antenna with highest gain of 3.9dBi.

5.6. WORST-CASE CONFIGURATION AND MODE

The EUT was tested as an external module installed in a test jig board connected to a host Laptop PC.

Worst-Case data rates were utilized from preliminary testing of the Chipset, worst-case data rates used during the testing are as follows:

802.11b Mode (20 MHz BW operation): 1 Mbps, CCK.

802.11g Mode (20 MHz BW operation): 6 Mbps, OFDM.

Worst-case mode and channel used for 30-1000 MHz radiated and power line conducted emissions was the mode and channel with the highest output power, that was determined to be 11g mode, mid channel.

For Radiated Band Edge measurements preliminary testing showed that the worst case was horizontal polarization, so final measurements were performed with horizontal polarization.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	4446-38U	R8-CAC5609/08	DoC
AC Adapter	Lenovo	ADP-65YB B	11S42T4458Z1ZF4K96V9S9	DoC
Adapter Board	Broadcom	BCRM943224PCIEBT AD	1261490	N/A


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Shielded	1.5m	NA
2	DC	1	DC	Un-shielded	1.5m	Ferrite at laptop's end

TEST SETUP

The EUT is attached to a jig board which is installed in the PCMCIA slot of a host laptop computer during the tests. Test software exercised the radio card.

SETUP DIAGRAM

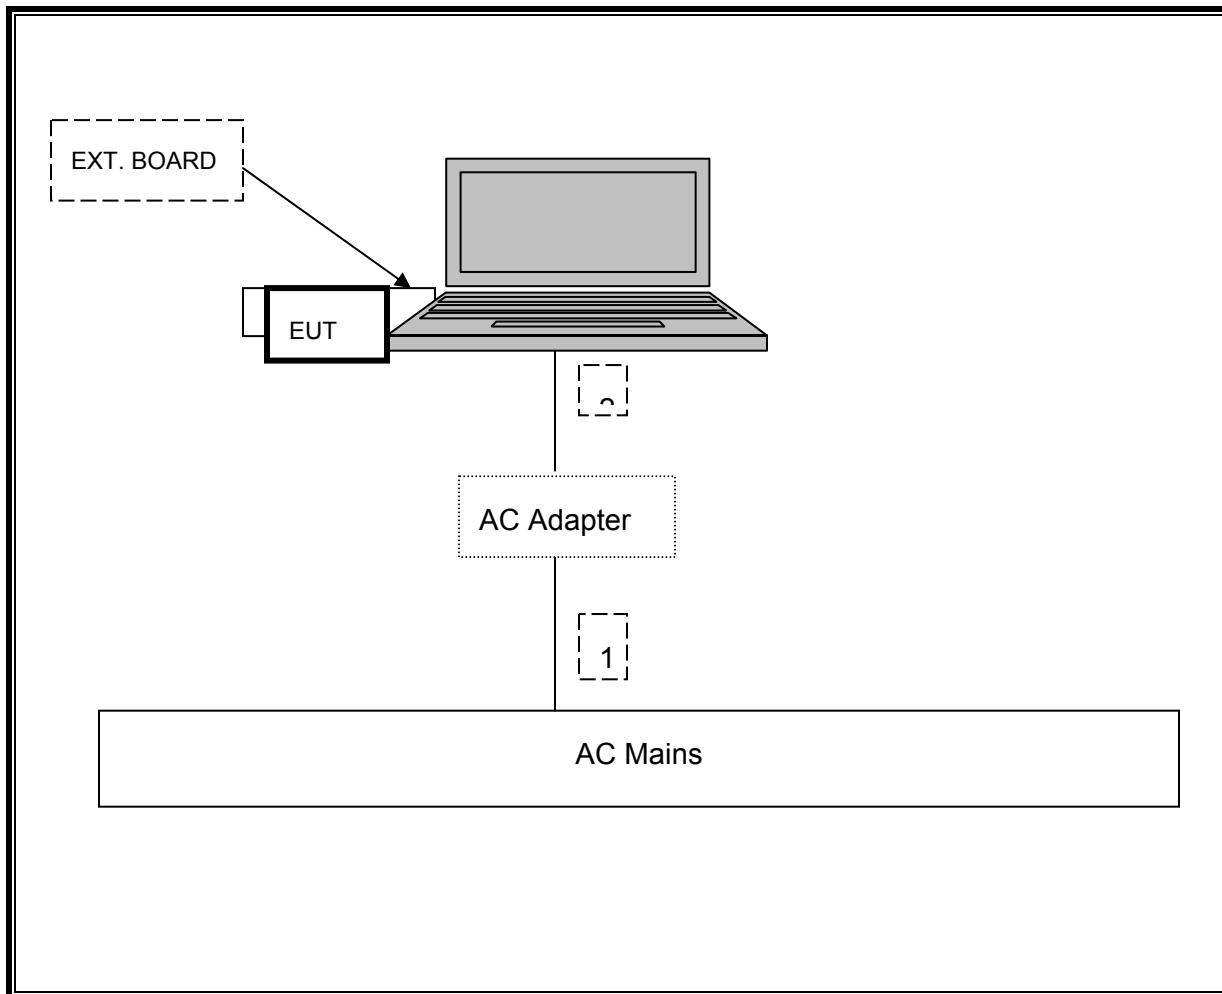

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00996	04/29/10	10/29/10
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01171	01/14/09	07/14/11
Antenna, Horn, 18 GHz	EMCO	3115	C00872	01/29/09	07/29/11
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00980	01/29/09	07/29/11
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00778	01/06/10	07/06/11
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	02/04/09	08/04/11
Peak Power Meter	Boonton	4541	C01186	03/01/10	03/01/11
Peak Power Sensor	Boonton	57318	0	02/24/10	02/24/11
EMI Receiver, 6.5 GHz	Agilent / HP	8546A	1963	05/19/10	08/19/11
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRM50702	N02685	01/00/00	CNR

7. ANTENNA PORT TEST RESULTS

7.1. 802.11b MODE IN THE 2.4 GHz BAND

7.1.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	7.58	0.5
Middle	2437	7.17	0.5
High	2472	7.50	0.5

6 dB BANDWIDTH

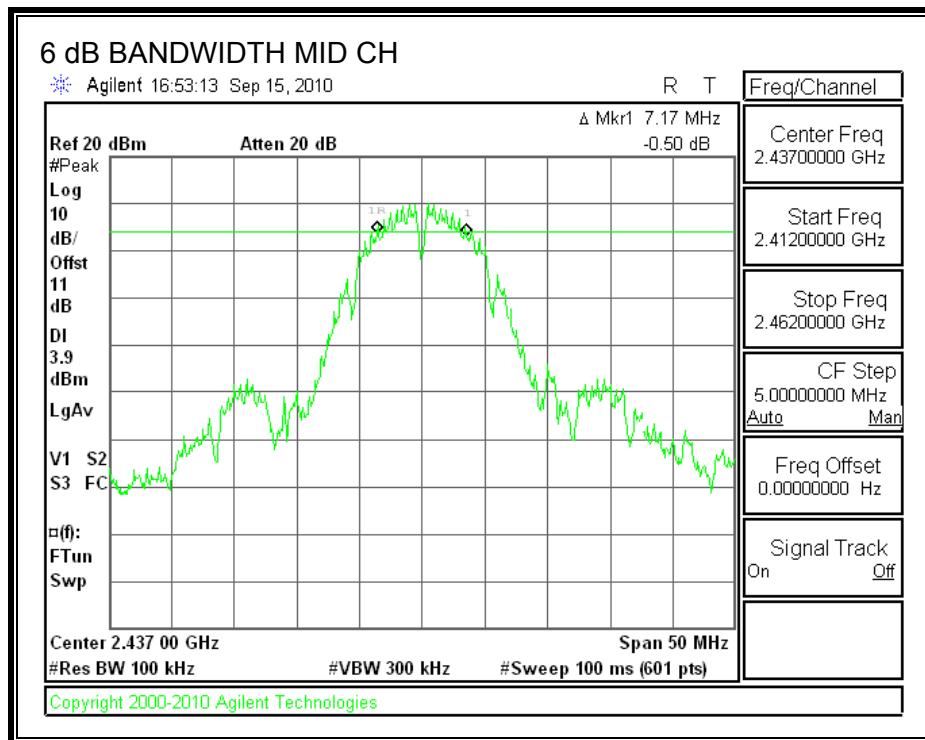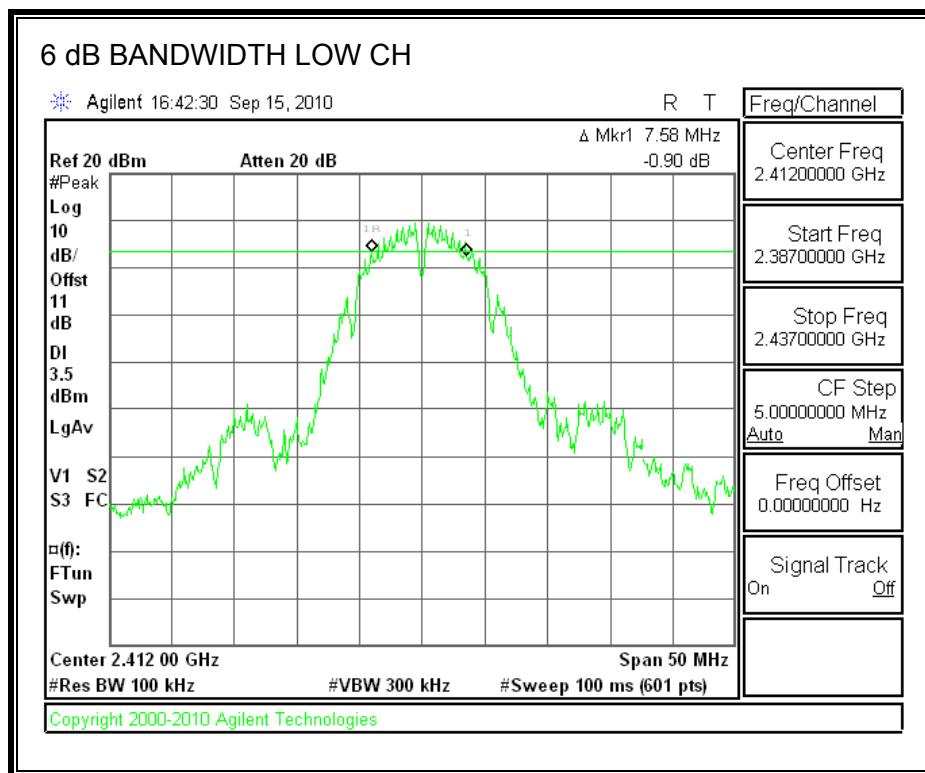

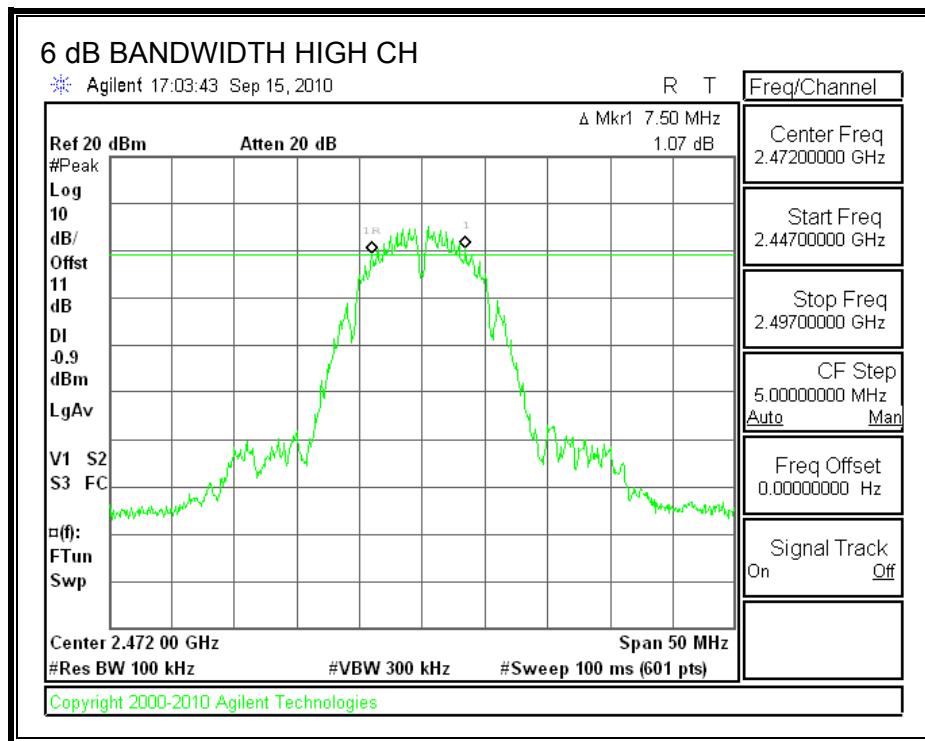

7.1.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	11.1606
Middle	2437	11.0300
High	2472	11.0677

99% BANDWIDTH

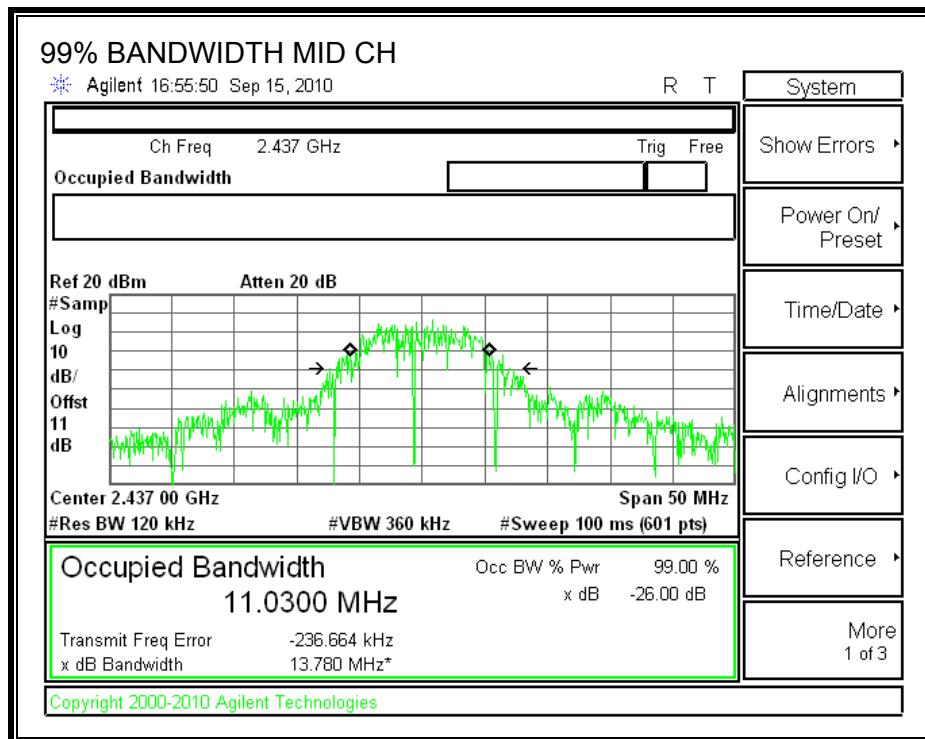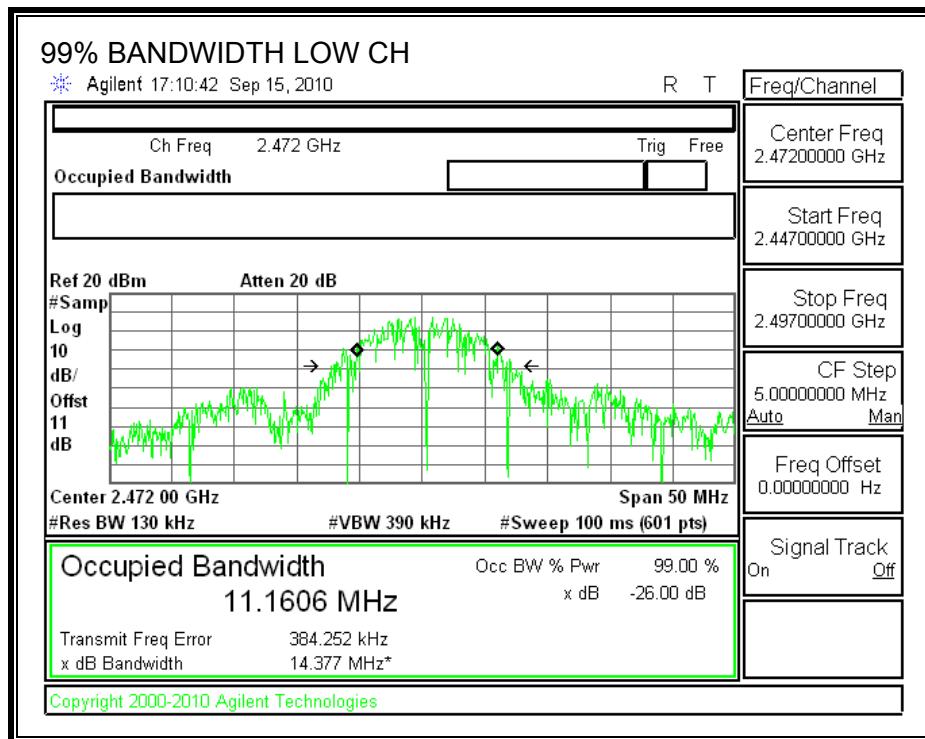

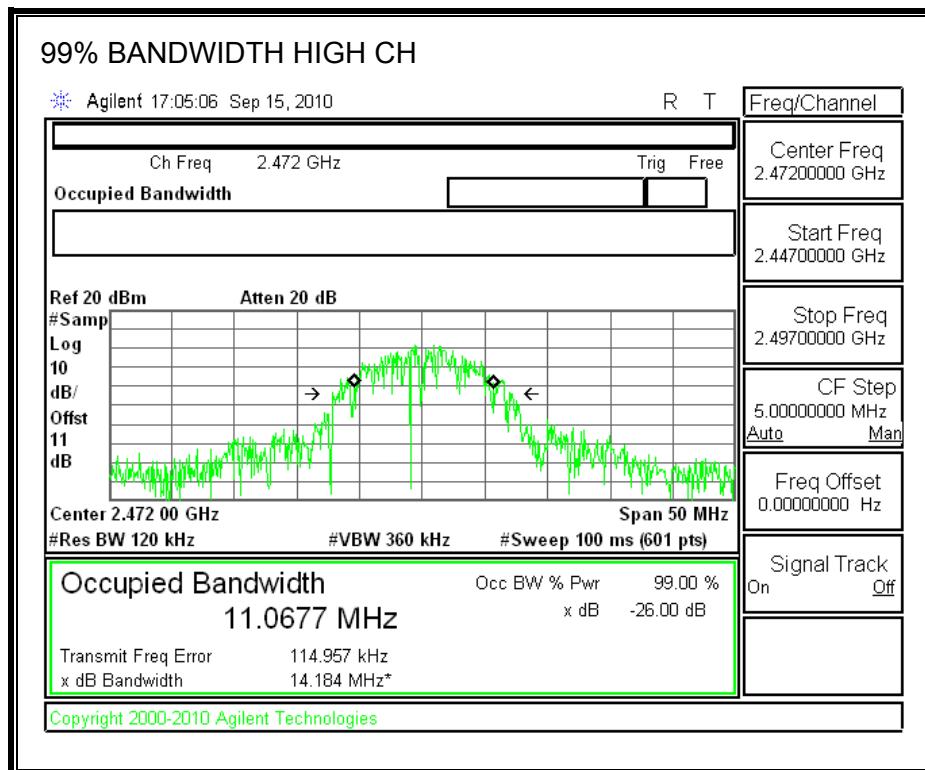

7.1.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

Channel	Frequency (MHz)	Peak Power Meter Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2412	19.67	30	-10.33
Middle	2437	20.75	30	-9.25
High	2472	15.76	30	-14.24

7.1.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.

RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-3.84	8	-11.84
Middle	2437	-1.78	8	-9.78
High	2472	-6.83	8	-14.83

POWER SPECTRAL DENSITY

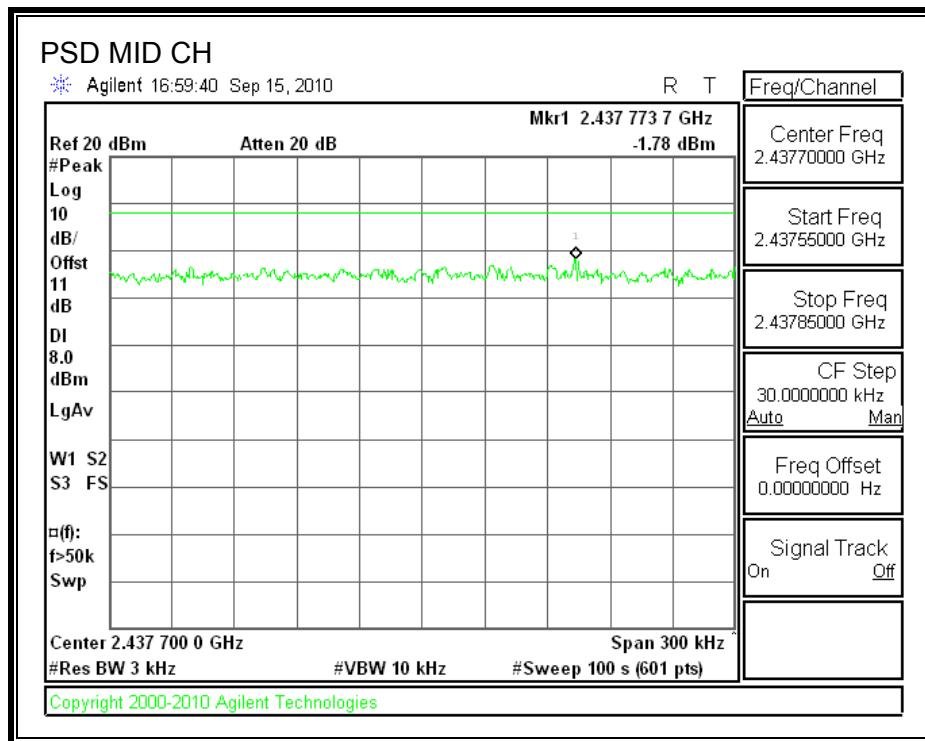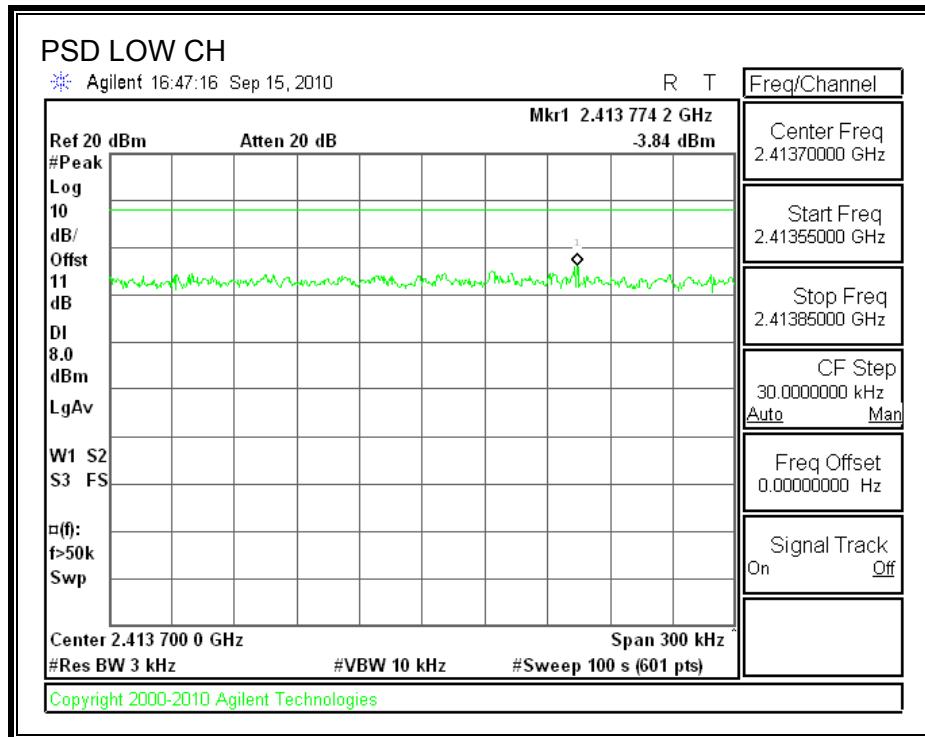

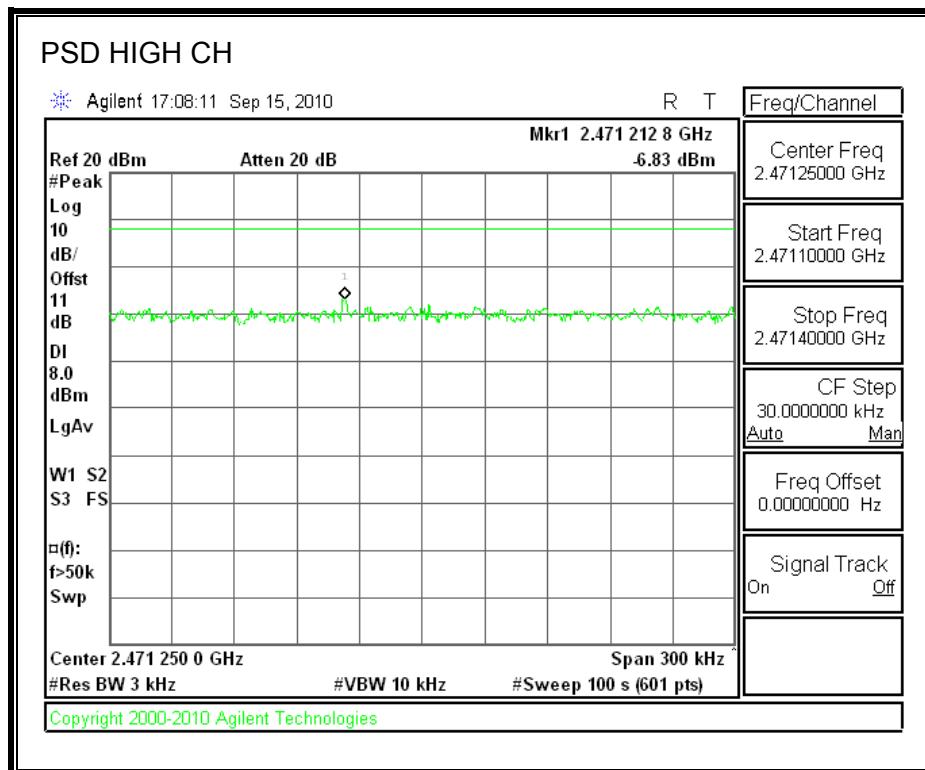

7.1.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5



Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



SPURIOUS EMISSIONS, LOW CHANNEL

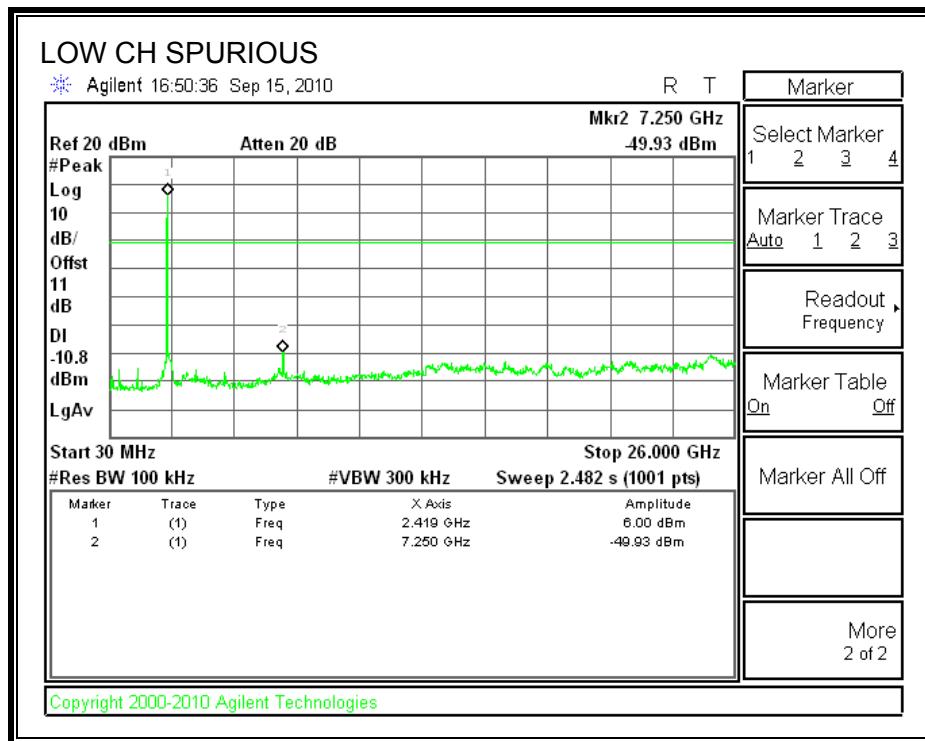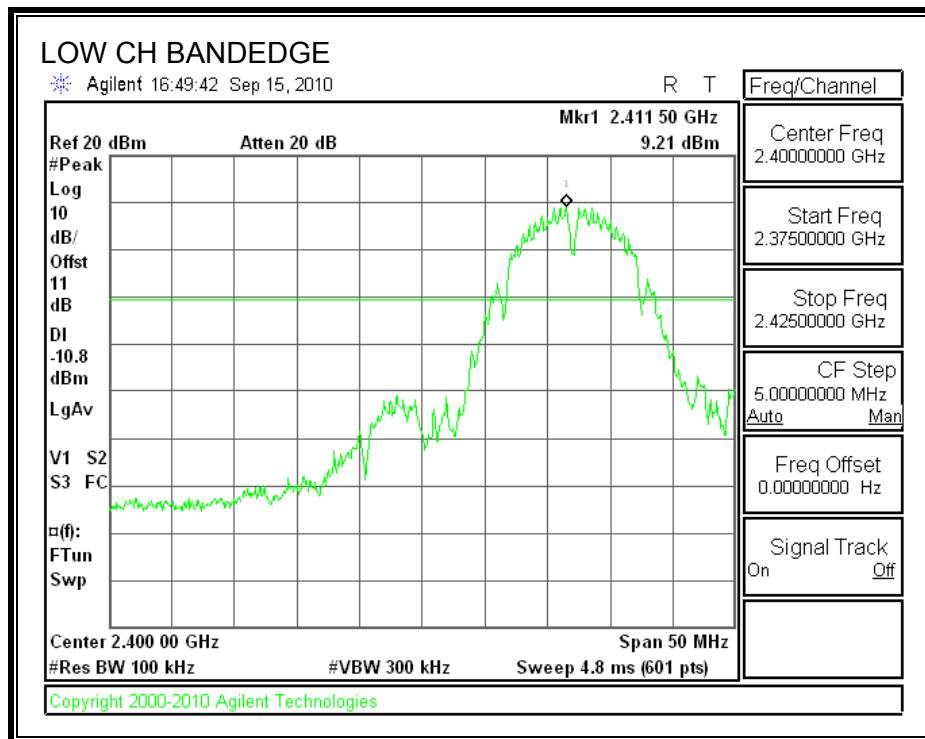

SPURIOUS EMISSIONS, MID CHAN

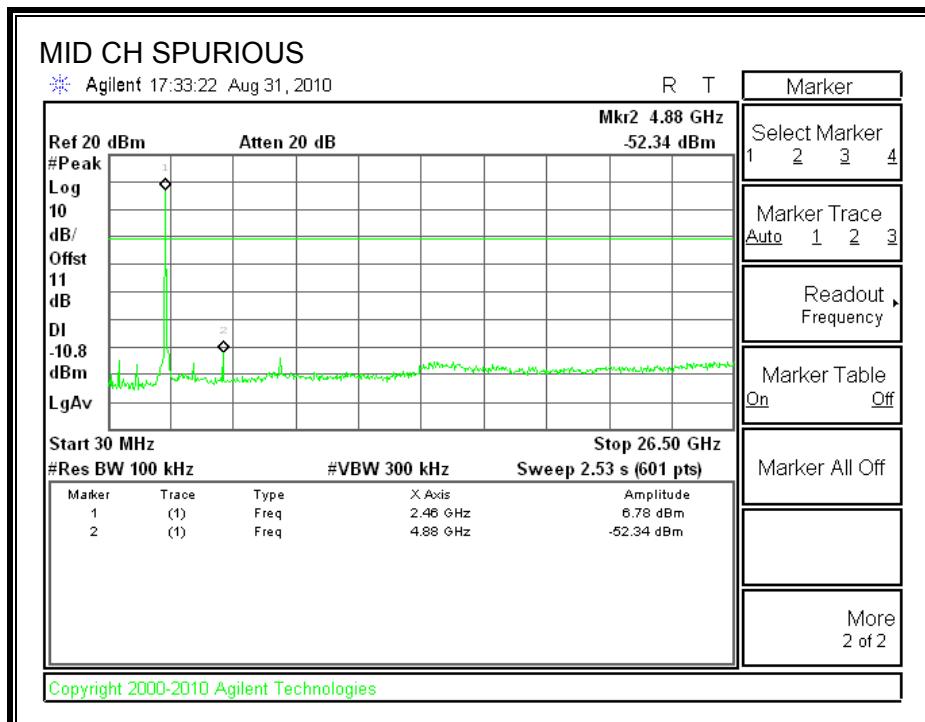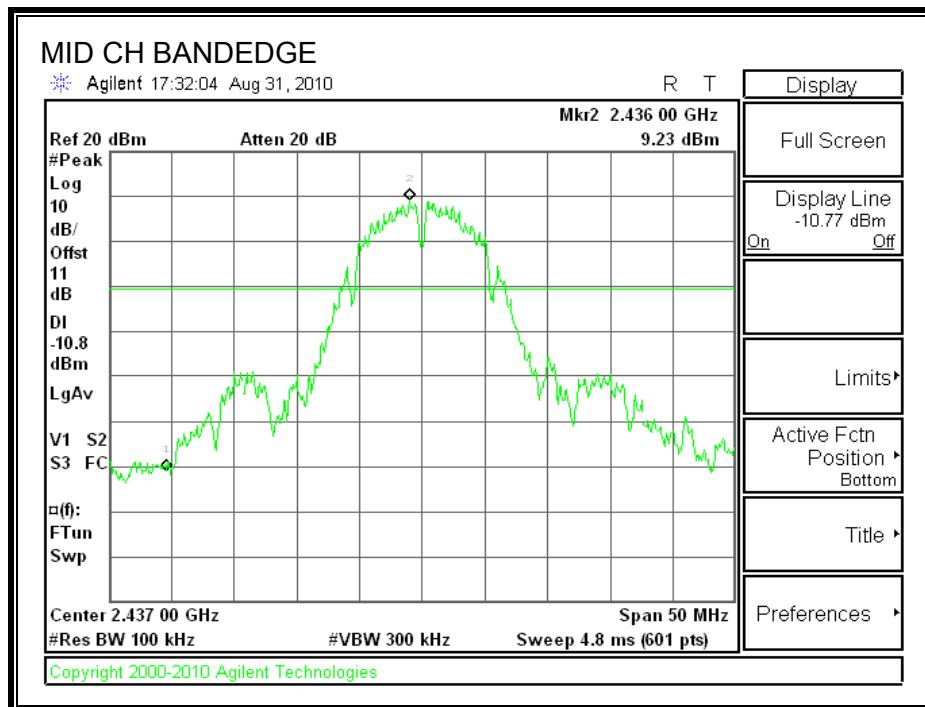

SPURIOUS EMISSIONS, HIGH CHANNEL

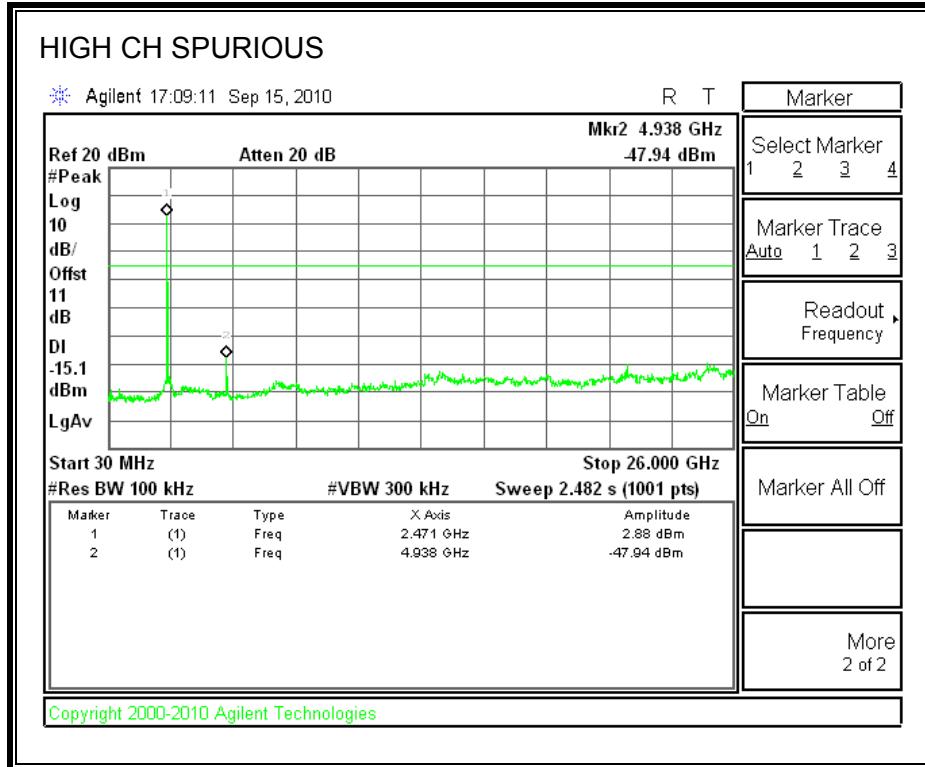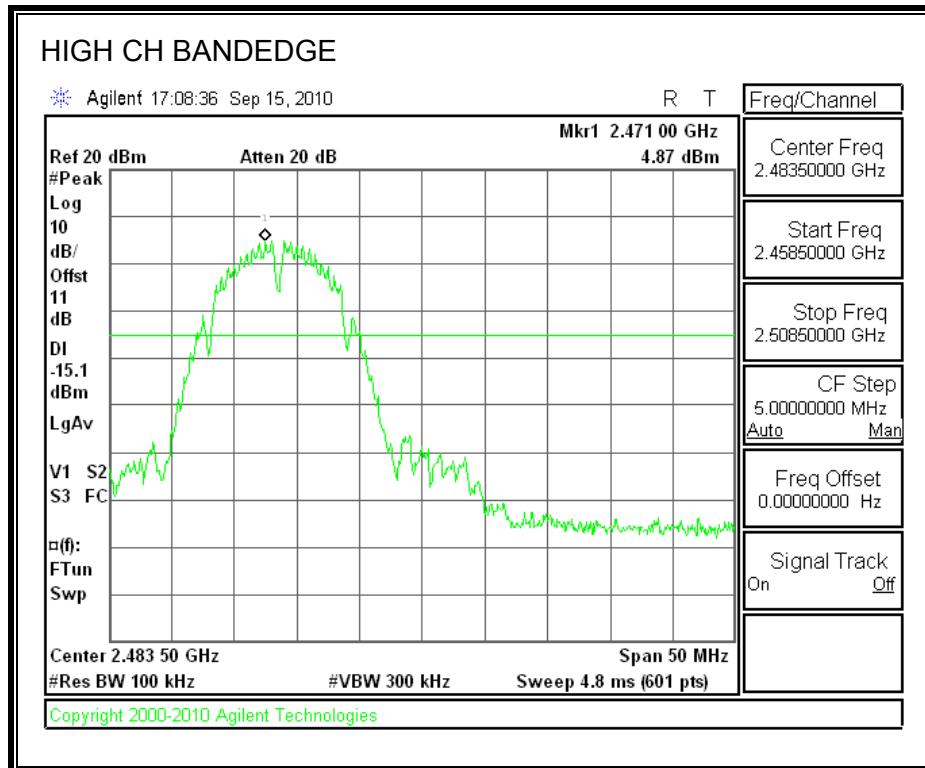

7.2. 802.11g MODE IN THE 2.4 GHz BAND

7.2.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2412	15.33	0.5
Middle	2437	14.50	0.5
High	2472	15.08	0.5

6 dB BANDWIDTH

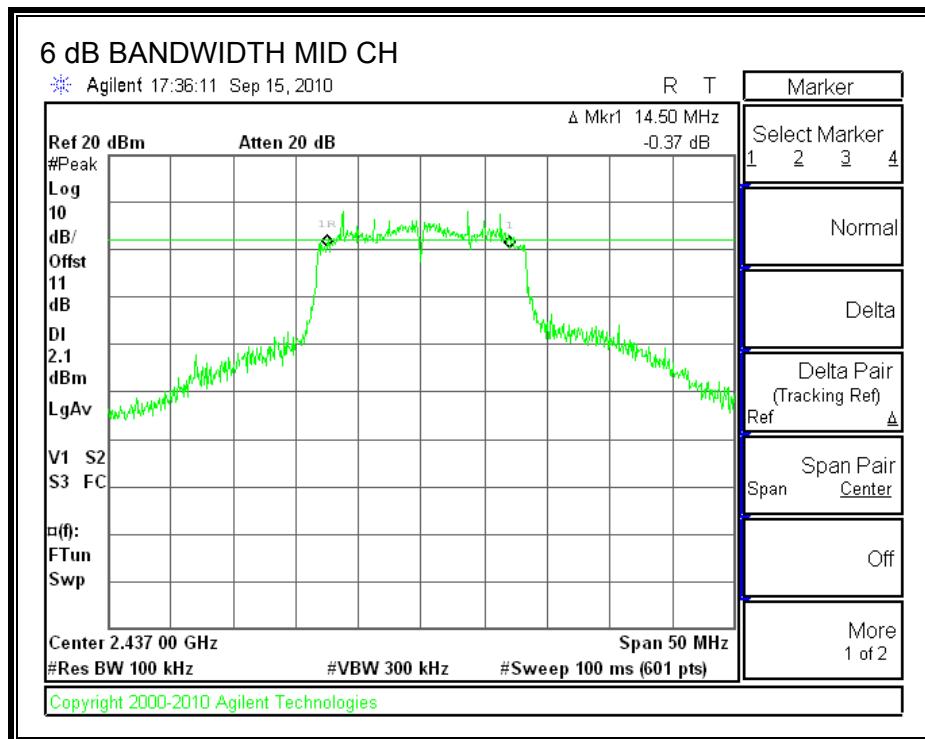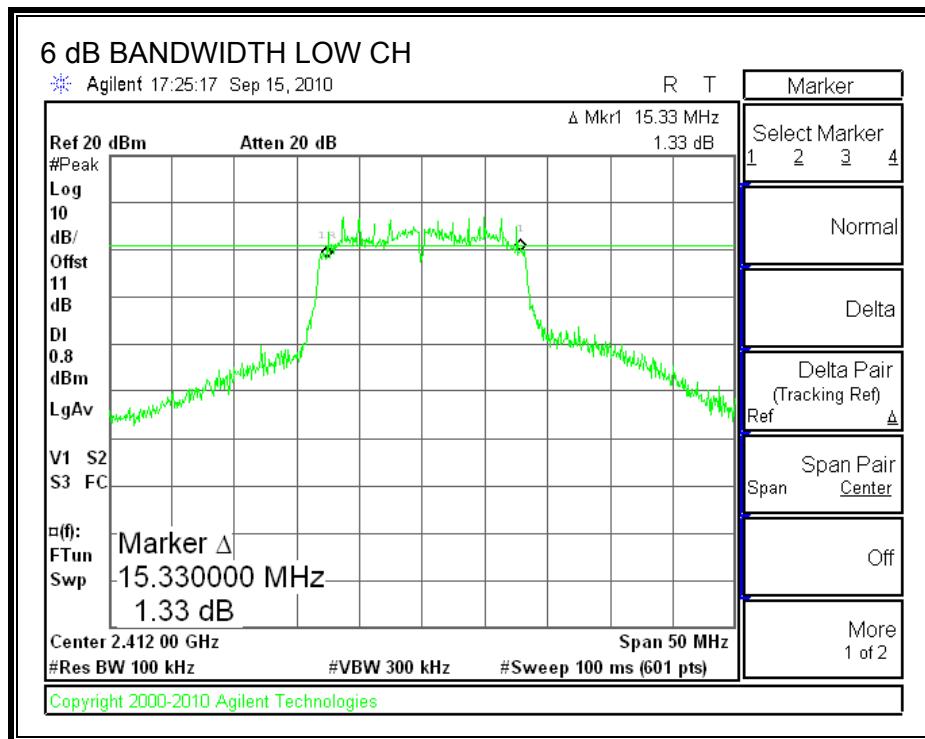

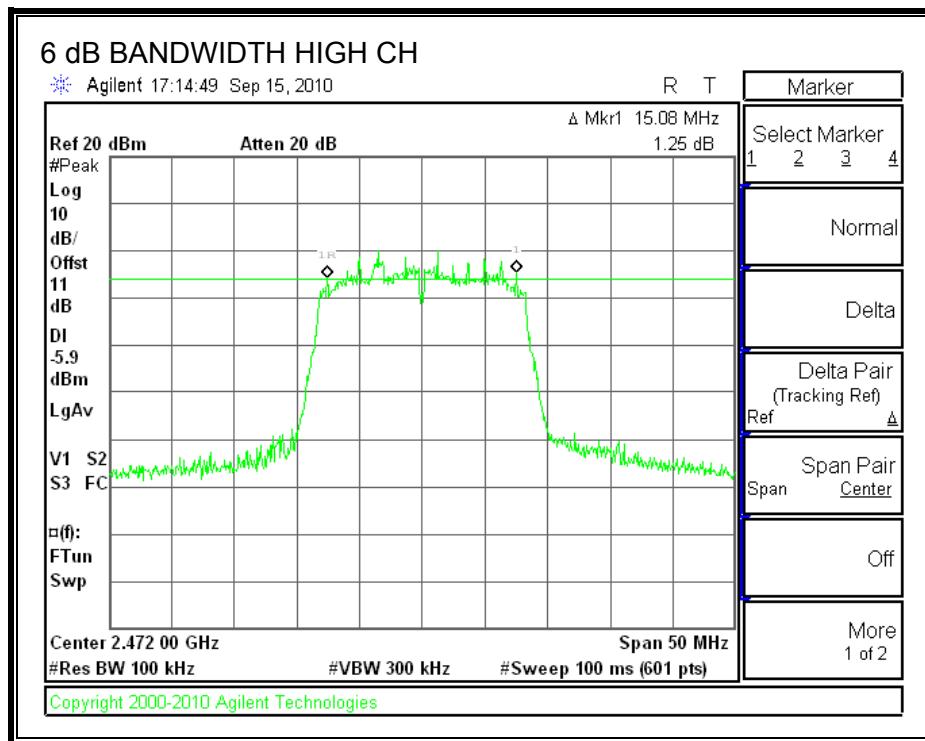

7.2.2. 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the 99 % bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal 99% bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2412	16.3826
Middle	2437	16.4528
High	2472	16.3284

99% BANDWIDTH

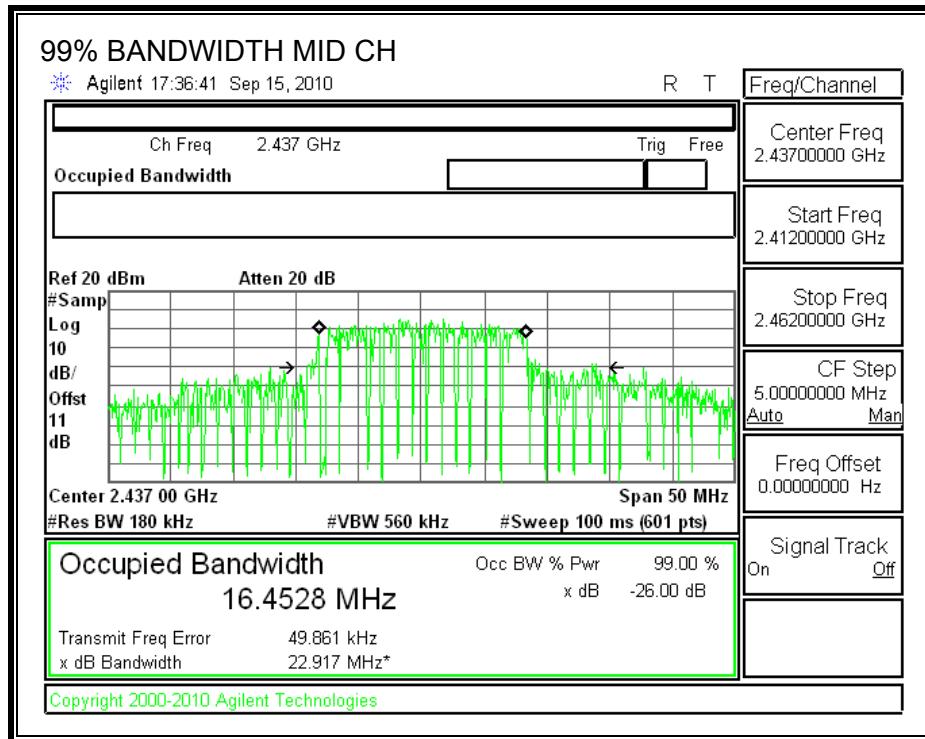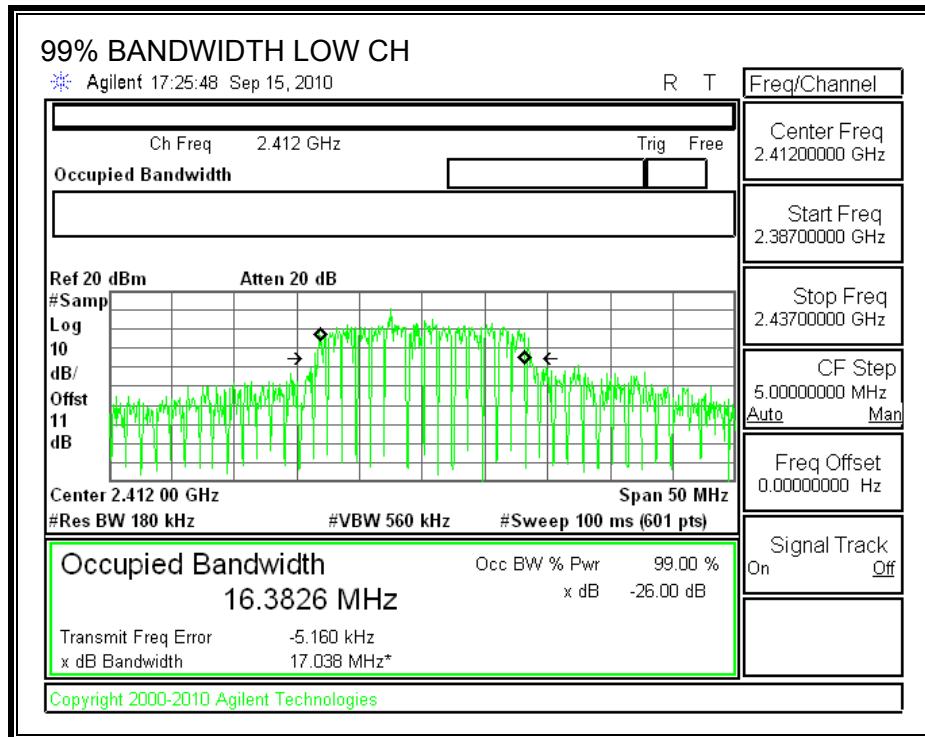

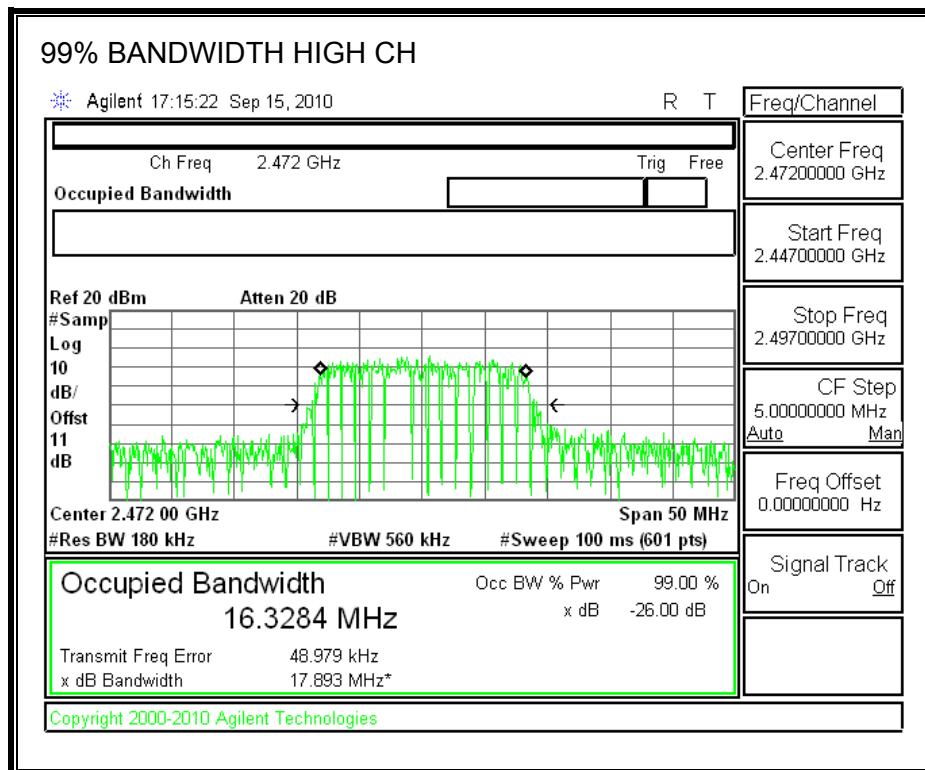

7.2.3. OUTPUT POWER

LIMITS

FCC §15.247 (b)

IC RSS-210 A8.4

The maximum antenna gain is less than or equal to 6 dBi, therefore the limit is 30 dBm.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

Channel	Frequency (MHz)	Peak Power Meter Reading (dBm)	Limit (dBm)	Margin (dB)
Low	2412	23.60	30	-6.40
Middle	2437	25.59	30	-4.41
High	2472	16.89	30	-13.11

7.2.4. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.

RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2412	-1.74	8	-9.74
Middle	2437	-1.58	8	-9.58
High	2472	-9.23	8	-17.23

POWER SPECTRAL DENSITY

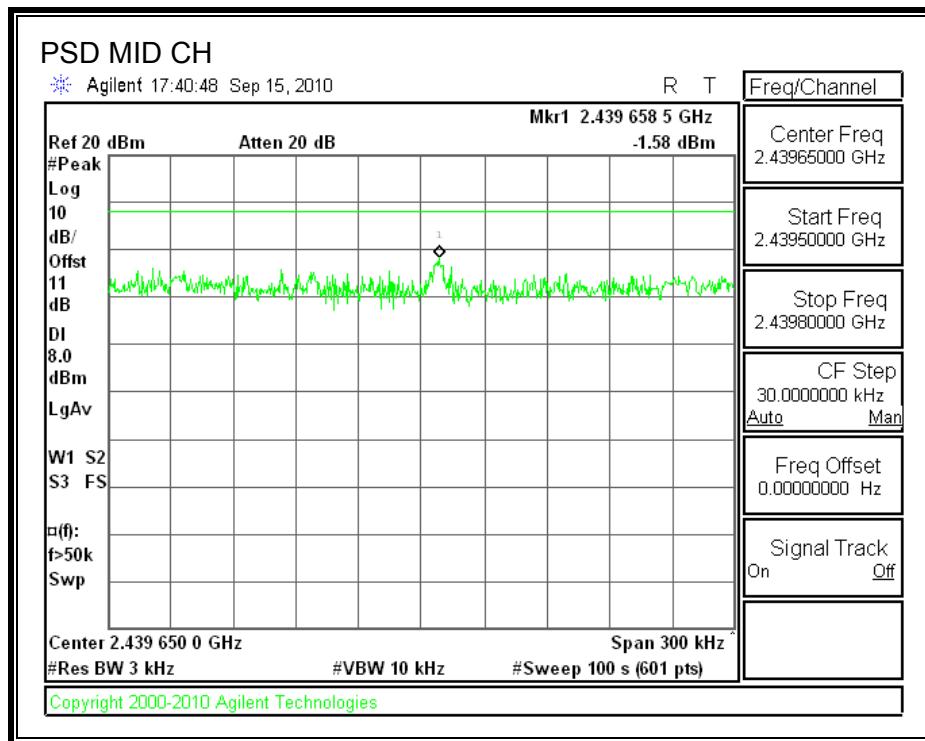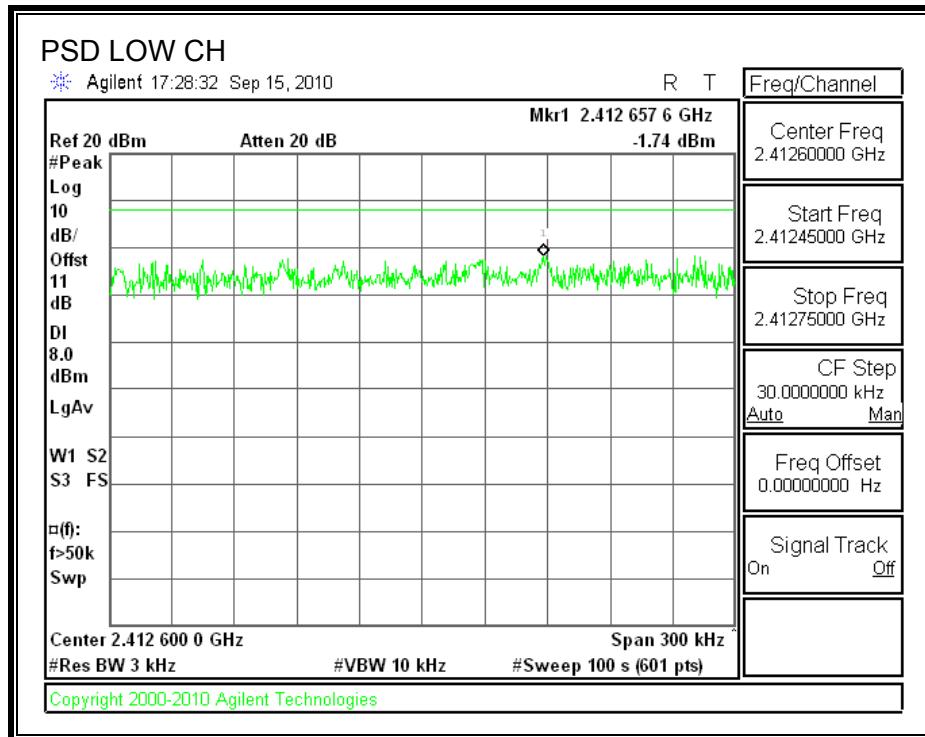

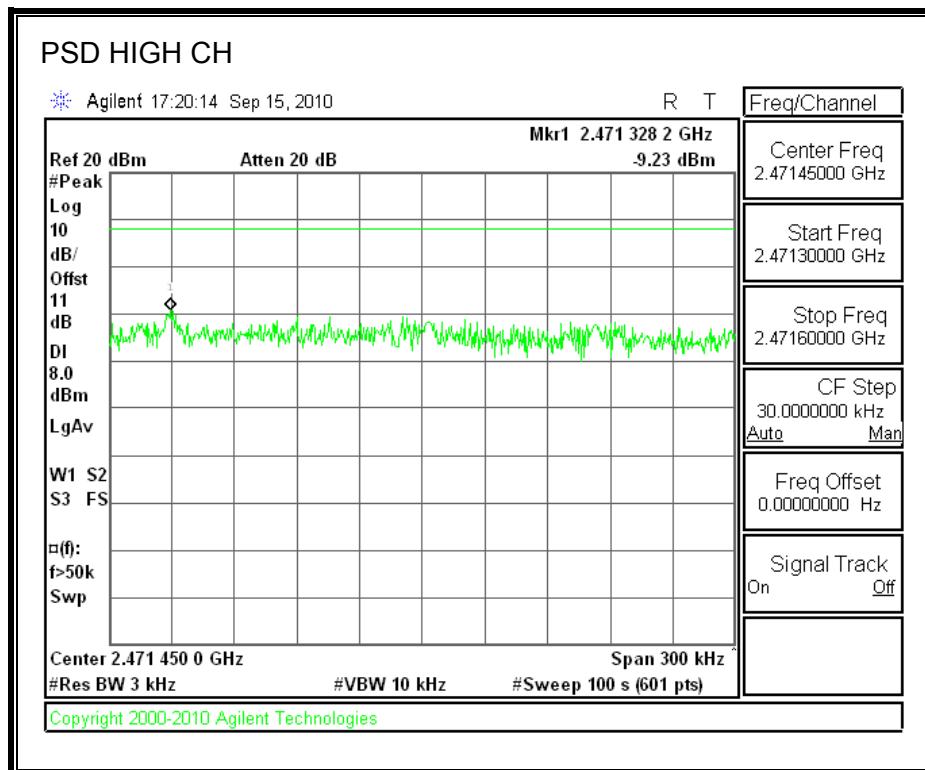

7.2.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5



Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



SPURIOUS EMISSIONS, LOW CHANNEL

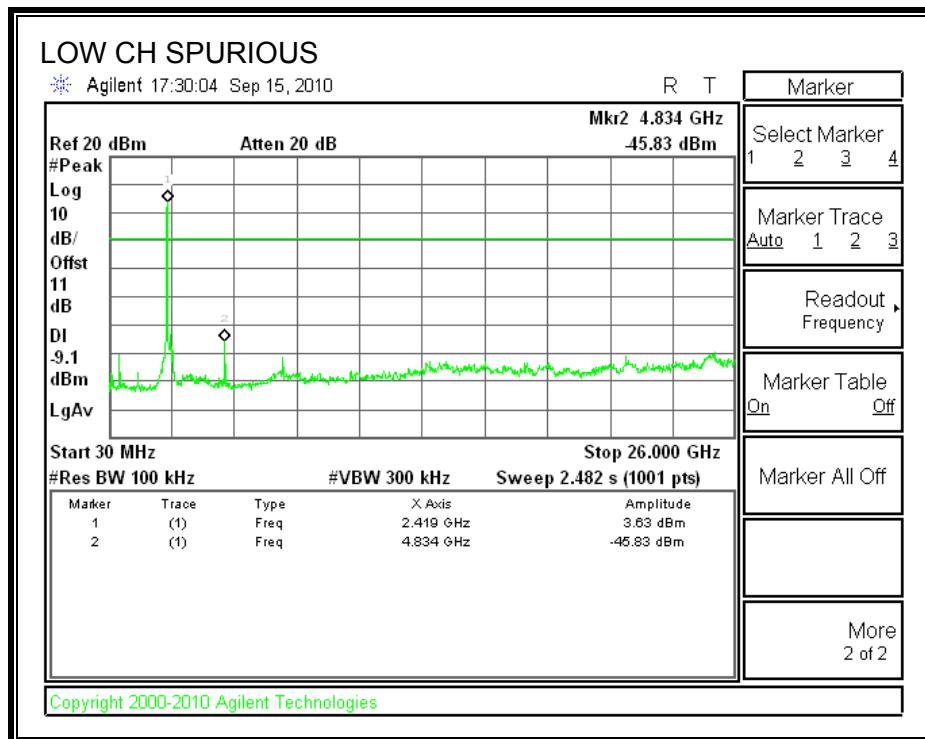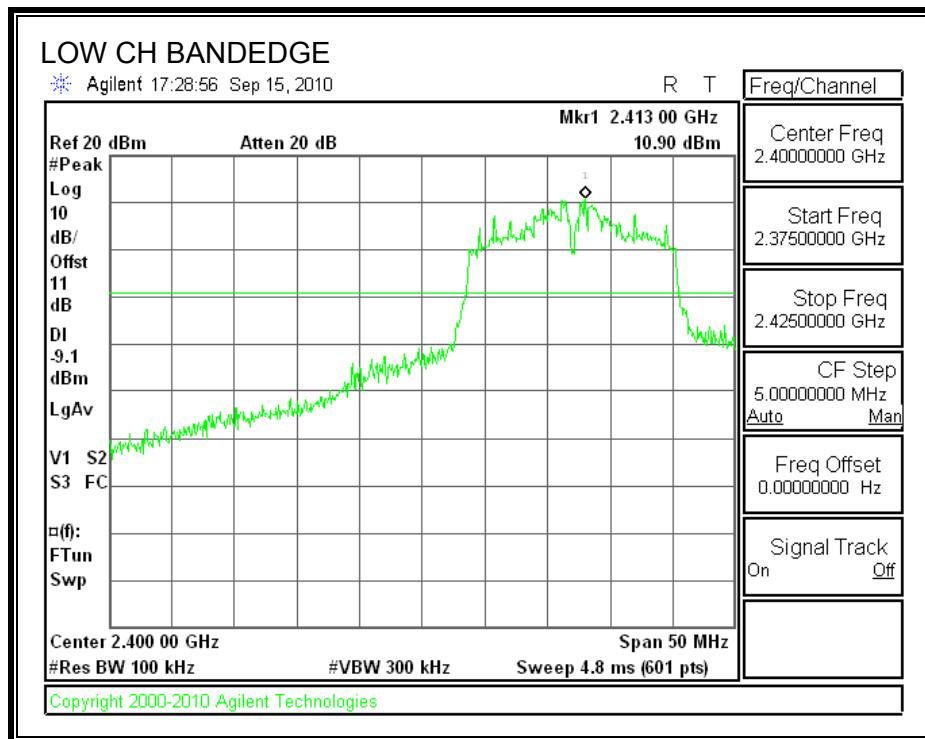

SPURIOUS EMISSIONS, MID CHAN

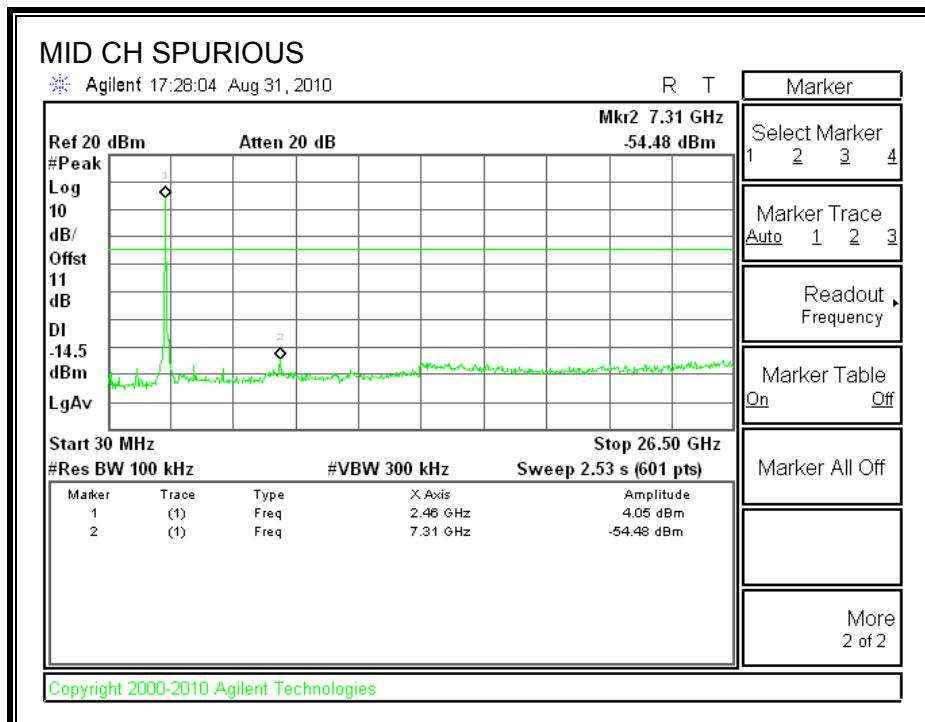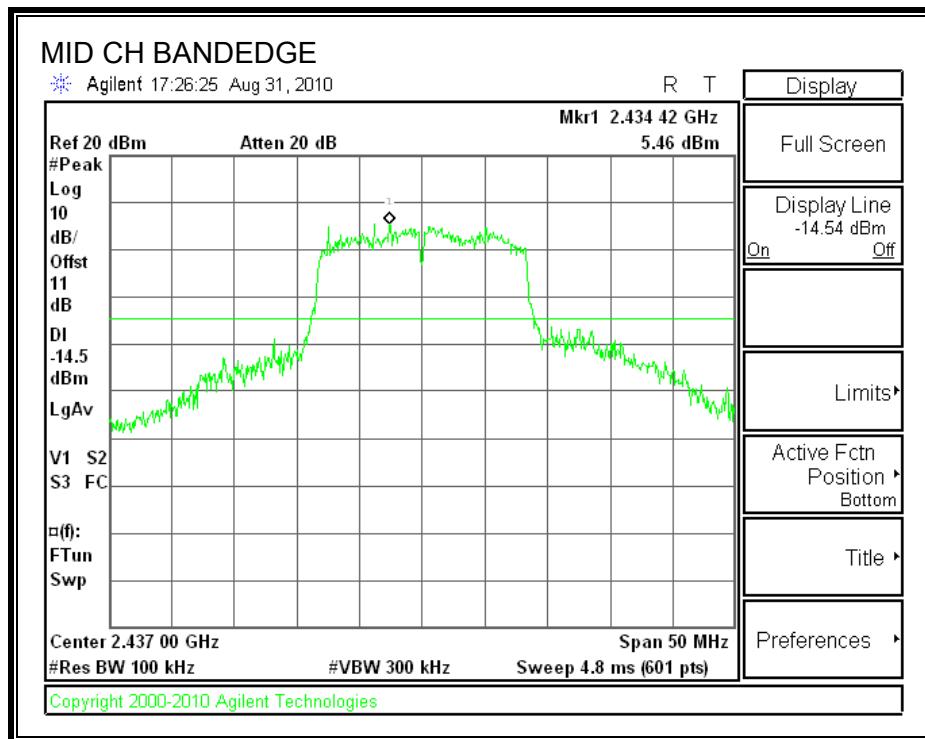

SPURIOUS EMISSIONS, HIGH CHANNEL

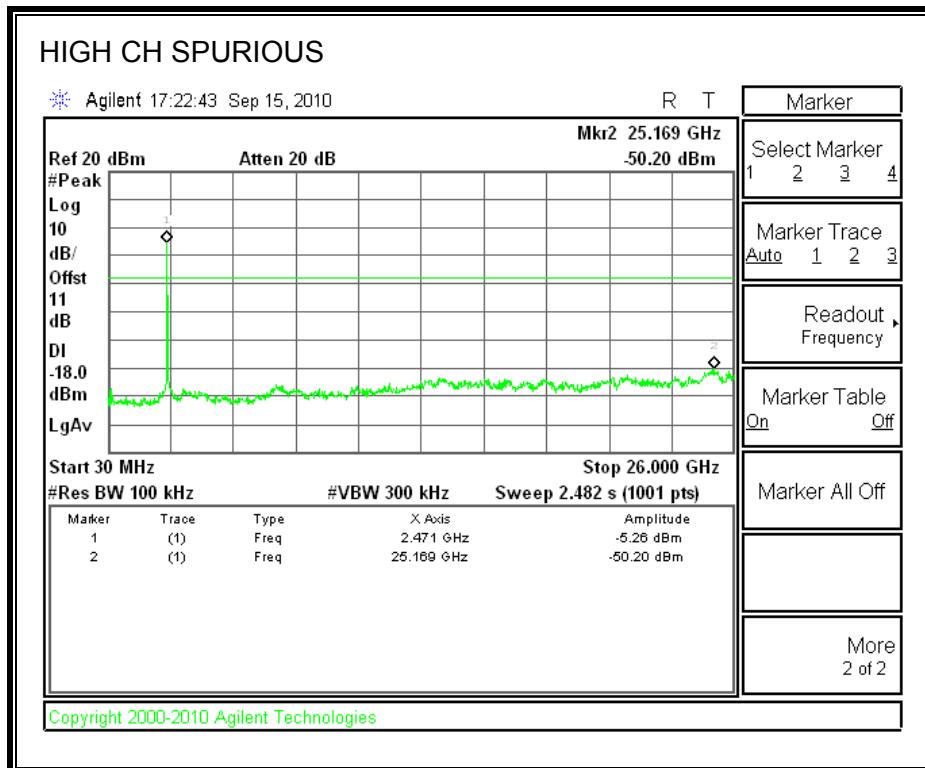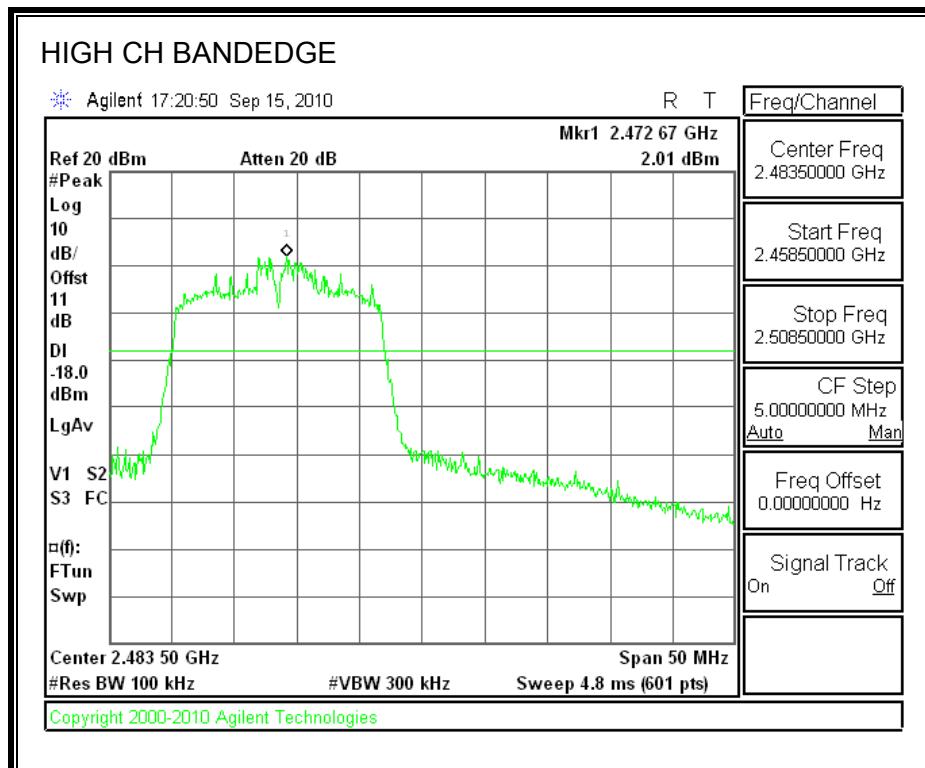

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.



The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

RESULTS



8.2. TRANSMITTER ABOVE 1 GHz

8.2.1. 802.11b MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

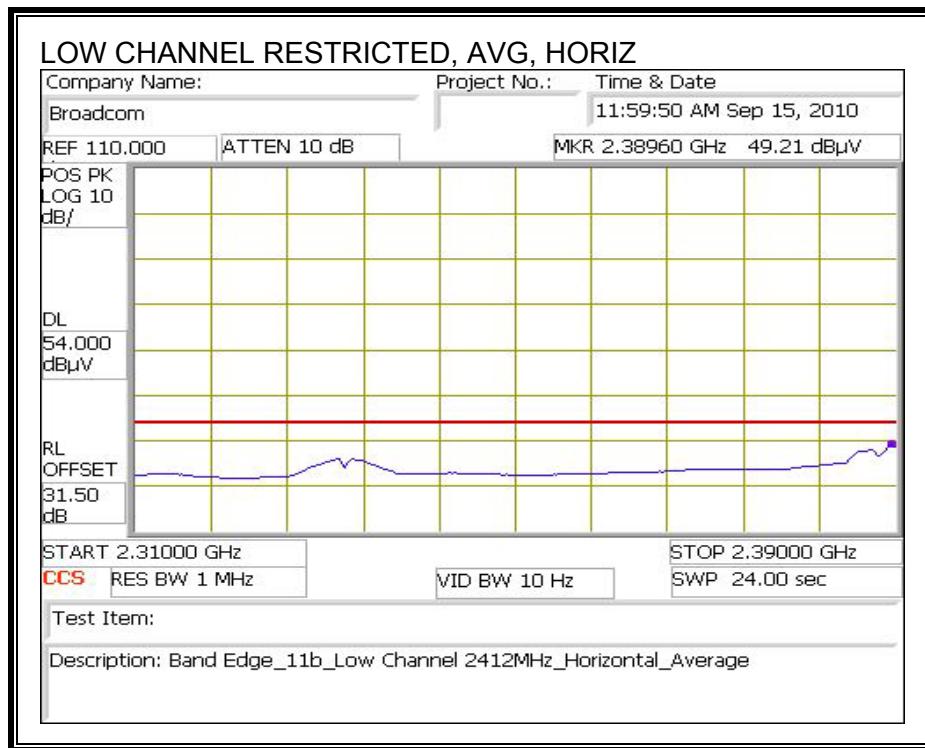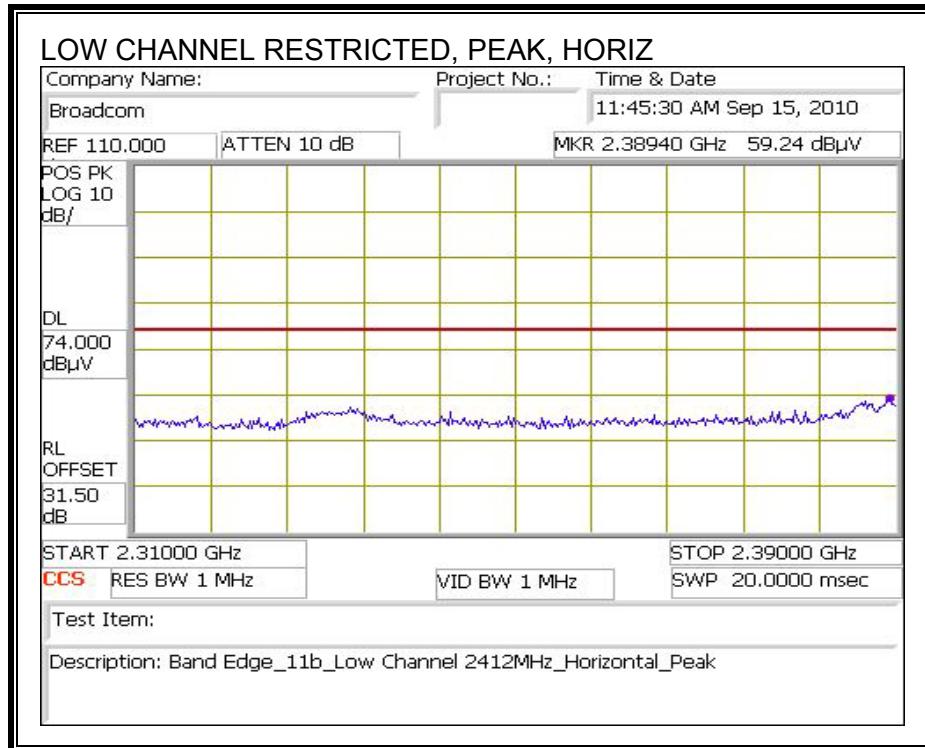

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

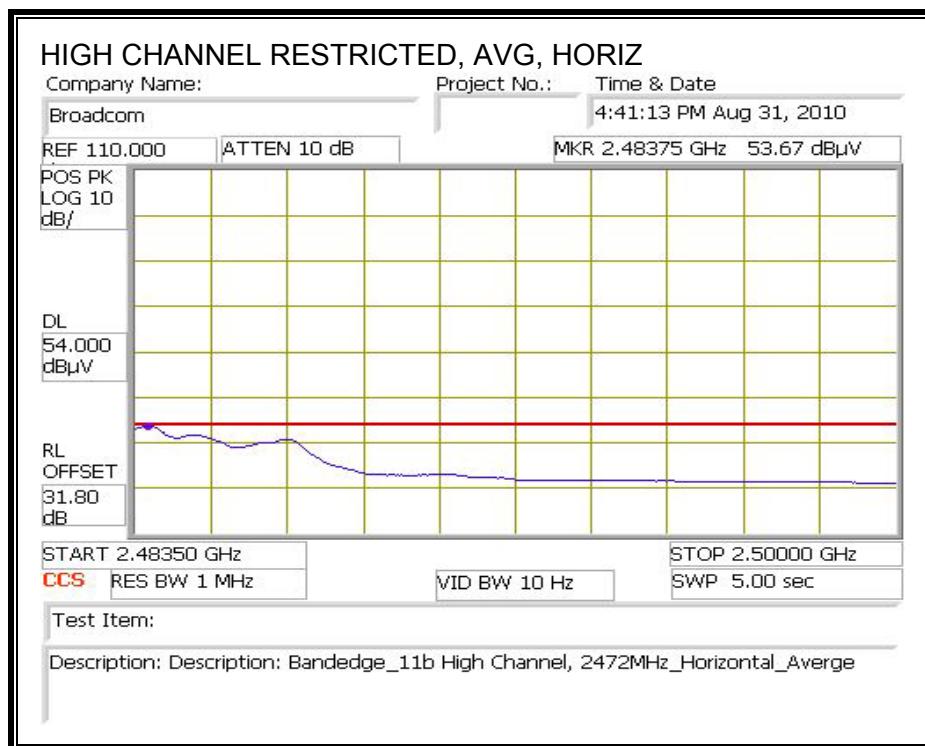
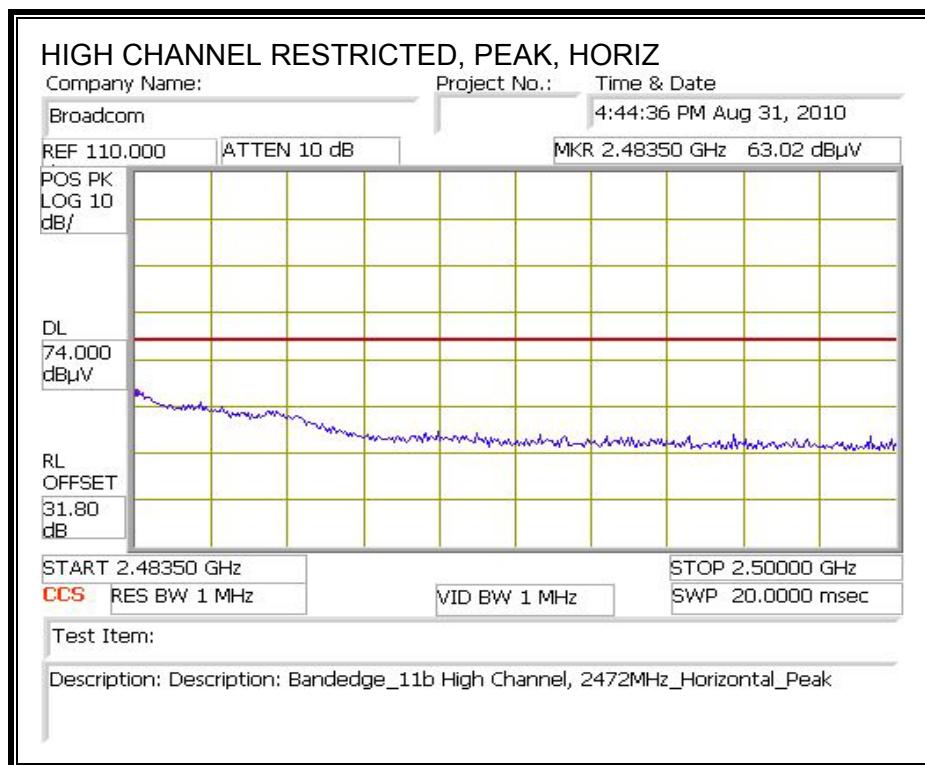


HARMONICS AND SPURIOUS EMISSIONS



High Frequency Measurement Compliance Certification Services, Fremont 3m Chamber													
Test Engr:	Vien Tran												
Date:	08/19/10												
Project #:	10U13269												
Company:	Broadcom												
EUT Description:	802.11g/Draft 802.11n Wireless LAN PCI-E Mini Card												
EUT M/N:	BCM94313HMG2L												
Test Target:	FCC B												
Mode Oper:	Tx 11b Mode												
	f	Measurement Frequency	Amp	Preamp Gain									
Dist	Distance to Antenna	D	Corr	Distance Correct to 3 meters									
Read	Analyzer Reading	Avg		Average Field Strength @ 3 m									
AF	Antenna Factor	Peak		Calculated Peak Field Strength									
CL	Cable Loss	HPF		High Pass Filter									
f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
Low Channel, 2412MHz													
4.824	3.0	52.4	32.7	5.8	-34.8	0.0	0.0	56.1	74.0	-17.9	H	P	
4.824	3.0	50.0	32.7	5.8	-34.8	0.0	0.0	53.6	54.0	-0.4	H	A	
4.824	3.0	52.2	32.7	5.8	-34.8	0.0	0.0	55.8	74.0	-18.2	V	P	
4.824	3.0	49.9	32.7	5.8	-34.8	0.0	0.0	53.6	54.0	-0.4	V	A	
Mid Channel, 2437MHz													
4.874	3.0	51.1	32.7	5.8	-34.8	0.0	0.0	54.8	74.0	-19.2	H	P	
4.874	3.0	48.9	32.7	5.8	-34.8	0.0	0.0	52.7	54.0	-1.3	H	A	
7.311	3.0	46.1	35.5	7.3	-34.1	0.0	0.0	54.7	74.0	-19.3	H	P	
7.311	3.0	41.5	35.5	7.3	-34.1	0.0	0.0	50.1	54.0	-3.9	H	A	
12.185	3.0	32.6	38.5	9.8	-32.5	0.0	0.0	48.4	74.0	-25.6	H	P	
12.185	3.0	20.9	38.5	9.8	-32.5	0.0	0.0	36.7	54.0	-17.3	H	A	
4.874	3.0	50.2	32.7	5.8	-34.8	0.0	0.0	54.0	74.0	-20.0	V	P	
4.874	3.0	48.1	32.7	5.8	-34.8	0.0	0.0	51.8	54.0	-2.2	V	A	
7.311	3.0	46.9	35.5	7.3	-34.1	0.0	0.0	55.6	74.0	-18.4	V	P	
7.311	3.0	42.4	35.5	7.3	-34.1	0.0	0.0	51.0	54.0	-3.0	V	A	
12.185	3.0	33.5	38.5	9.8	-32.5	0.0	0.0	49.3	74.0	-24.7	V	P	
12.185	3.0	21.8	38.5	9.8	-32.5	0.0	0.0	37.6	54.0	-16.4	V	A	
High Channel, 2472MHz													
4.944	3.0	52.2	32.7	5.9	-34.8	0.0	0.0	56.0	74.0	-18.0	H	P	
4.944	3.0	50.0	32.7	5.9	-34.8	0.0	0.0	53.8	54.0	-0.2	H	A	
7.416	3.0	46.2	35.6	7.3	-34.1	0.0	0.0	54.9	74.0	-19.1	H	P	
7.416	3.0	41.3	35.6	7.3	-34.1	0.0	0.0	50.1	54.0	-3.9	H	A	
12.360	3.0	33.6	38.5	9.9	-32.5	0.0	0.0	49.5	74.0	-24.5	H	P	
12.360	3.0	20.7	38.5	9.9	-32.5	0.0	0.0	36.6	54.0	-17.4	H	A	
4.944	3.0	50.4	32.7	5.9	-34.8	0.0	0.0	54.2	74.0	-19.8	V	P	
4.944	3.0	48.3	32.7	5.9	-34.8	0.0	0.0	52.1	54.0	-1.9	V	A	
7.416	3.0	47.2	35.6	7.3	-34.1	0.0	0.0	55.9	74.0	-18.1	V	P	
7.416	3.0	43.1	35.6	7.3	-34.1	0.0	0.0	51.9	54.0	-2.1	V	A	
12.360	3.0	33.2	38.5	9.9	-32.5	0.0	0.0	49.1	74.0	-24.9	V	P	
12.360	3.0	20.7	38.5	9.9	-32.5	0.0	0.0	36.6	54.0	-17.4	V	A	
Rev. 4.1.2.7													
Note: No other emissions were detected above the system noise floor.													

8.2.2. 802.11g MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

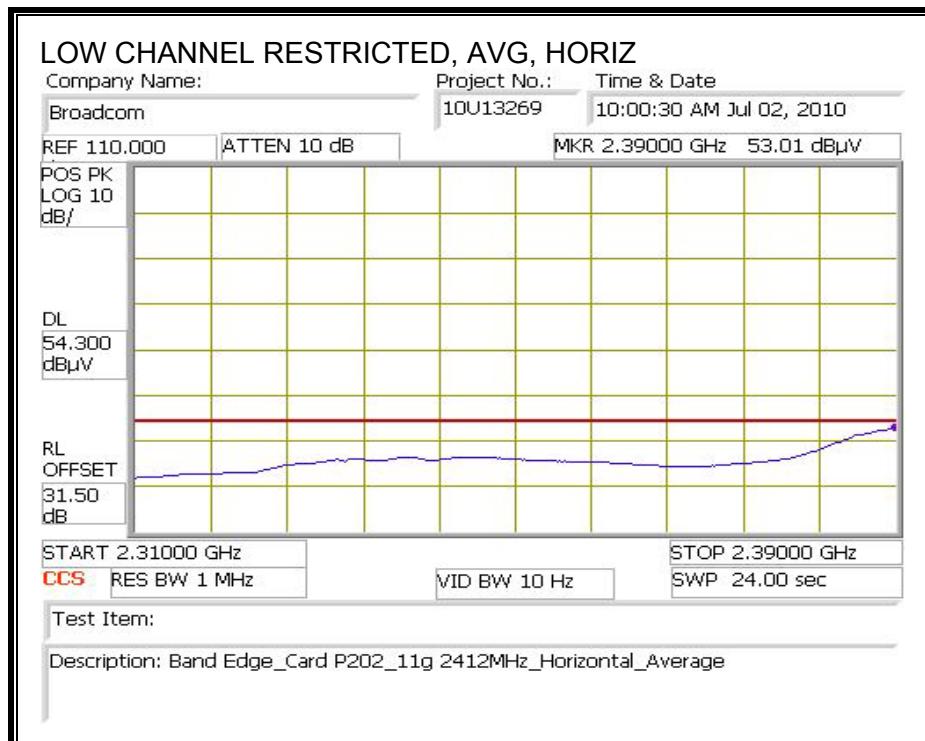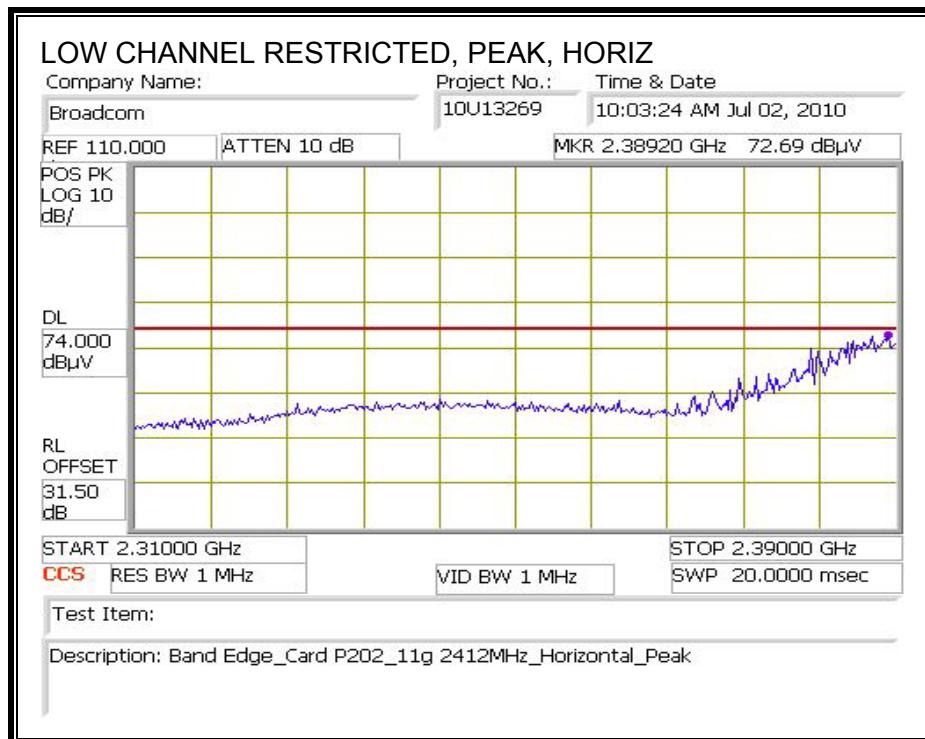

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

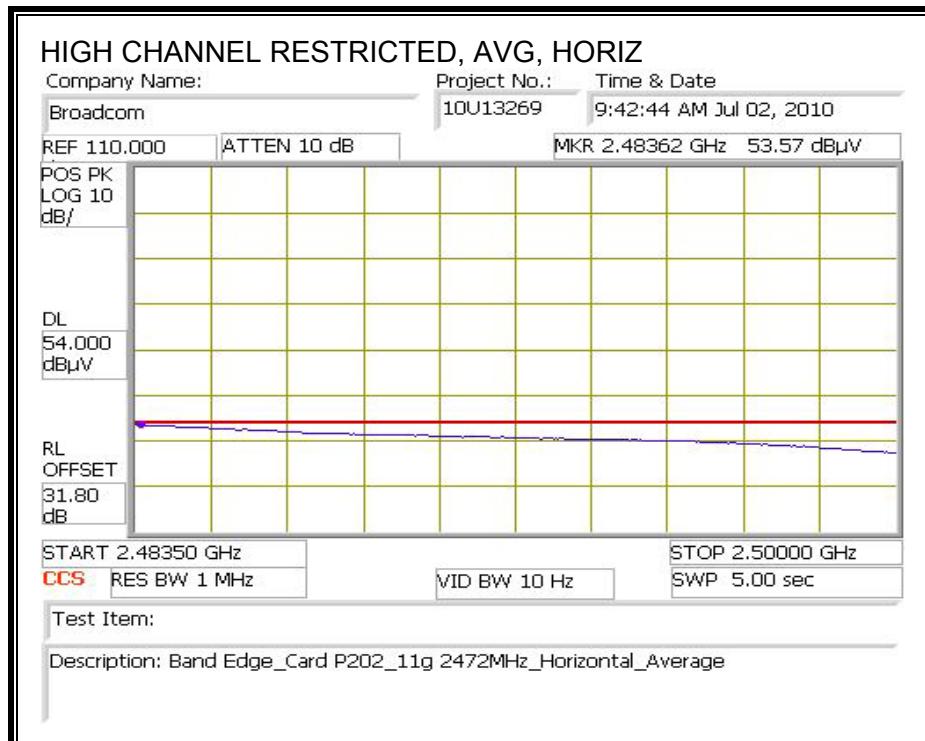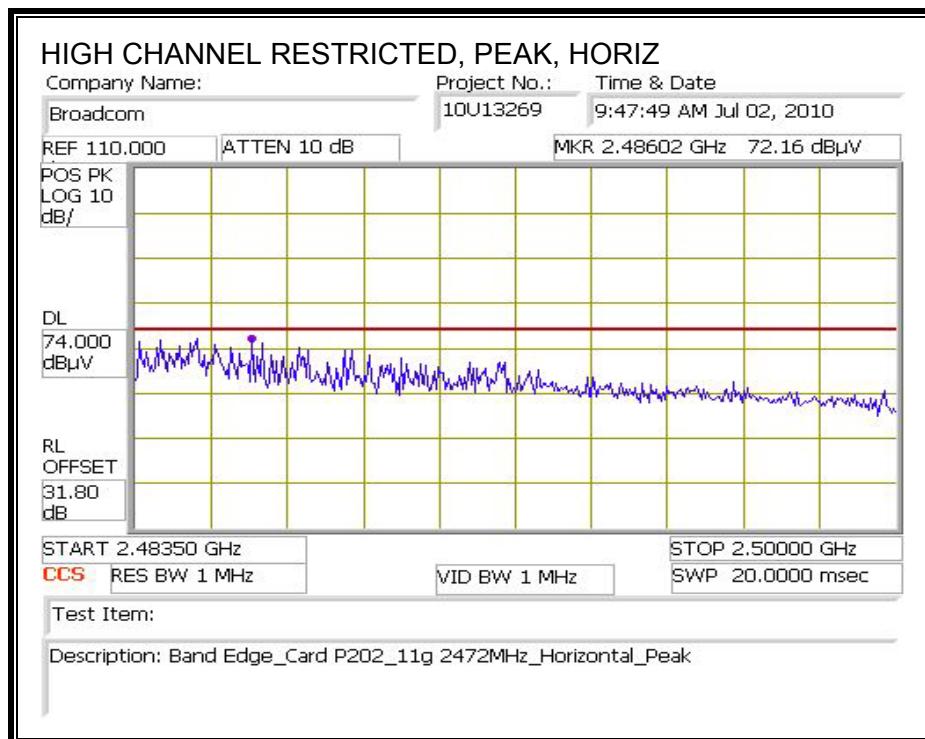

HARMONICS AND SPURIOUS EMISSIONS

**High Frequency Measurement
Compliance Certification Services, Fremont 3m Chamber**

Test Engr: Vien Tran
Date: 09/15/10
Project #: 10U13269
Company: Broadcom
EUT Description: 802.11g/Draft 802.11n Wireless LAN PCI-E Mini Card
EUT M/N: BCM94313HMG2L
Test Target: FCC B
Mode Oper: Tx 11g Mode

f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter	

f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
Low Channel, 2412MHz													
4.824	3.0	45.0	32.7	5.8	-34.8	0.0	0.0	48.6	74.0	-25.4	H	P	
4.824	3.0	30.2	32.7	5.8	-34.8	0.0	0.0	33.8	54.0	-20.2	H	A	
4.824	3.0	46.5	32.7	5.8	-34.8	0.0	0.0	50.1	74.0	-23.9	V	P	
4.824	3.0	34.2	32.7	5.8	-34.8	0.0	0.0	37.8	54.0	-16.2	V	A	
Mid Channel, 2437MHz													
4.874	3.0	47.1	32.7	5.8	-34.8	0.0	0.0	50.8	74.0	-23.2	V	P	
4.874	3.0	33.8	32.7	5.8	-34.8	0.0	0.0	37.5	54.0	-16.5	V	A	
7.311	3.0	50.7	35.5	7.3	-34.1	0.0	0.0	59.3	74.0	-14.7	V	P	
7.311	3.0	34.5	35.5	7.3	-34.1	0.0	0.0	43.1	54.0	-10.9	V	A	
4.874	3.0	42.2	32.7	5.8	-34.8	0.0	0.0	45.9	74.0	-28.1	H	P	
4.874	3.0	28.4	32.7	5.8	-34.8	0.0	0.0	32.1	54.0	-21.9	H	A	
7.311	3.0	43.0	35.5	7.3	-34.1	0.0	0.0	51.6	74.0	-22.4	H	P	
7.311	3.0	28.0	35.5	7.3	-34.1	0.0	0.0	36.6	54.0	-17.4	H	A	
4.944	3.0	36.5	32.8	5.9	-34.8	0.0	0.0	40.3	74.0	-33.7	H	P	
4.944	3.0	24.3	32.8	5.9	-34.8	0.0	0.0	28.2	54.0	-25.8	H	A	
High Channel, 2472MHz													
4.944	3.0	42.9	32.8	5.3	-34.8	0.0	0.0	46.2	74.0	-27.8	H	P	
4.944	3.0	27.9	32.8	5.3	-34.8	0.0	0.0	31.1	54.0	-22.9	H	A	
7.416	3.0	37.0	35.6	6.6	-34.8	0.0	0.0	44.4	74.0	-29.6	H	P	
7.416	3.0	24.9	35.6	6.6	-34.8	0.0	0.0	32.2	54.0	-21.8	H	A	
4.944	3.0	43.7	32.8	5.3	-34.8	0.0	0.0	47.0	74.0	-27.0	V	P	
4.944	3.0	28.5	32.8	5.3	-34.8	0.0	0.0	31.7	54.0	-22.3	V	A	
7.416	3.0	37.4	35.6	6.6	-34.8	0.0	0.0	44.8	74.0	-29.2	V	P	
7.416	3.0	25.0	35.6	6.6	-34.8	0.0	0.0	32.4	54.0	-21.6	V	A	

Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.

8.3. WORST-CASE BELOW 1 GHz

HORIZONTAL & VERTICAL DATA

30-1000MHz Frequency Measurement
Compliance Certification Services, Fremont 3m Chamber

Test Engr: Vien Tran
Date: 06/11/10
Project #: 10U13269
Company: Broadcom
EUT Description: 802.11g/Draft 802.11n WLAN PCI-E Minicard
EUT M/N: BCM94313HMG2L
Test Target: FCC B
Mode Oper: Tx
f Measurement Frequency Amp Preamp Gain Margin Margin vs. Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters
Read Analyzer Reading Filter Filter Insert Loss
AF Antenna Factor Corr. Calculated Field Strength
CL Cable Loss Limit Field Strength Limit

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det. P/A/QP	Notes
Horizontal													
128.884	3.0	52.3	13.9	0.9	28.0	0.0	0.0	39.2	43.5	-4.3	H	P	
215.168	3.0	54.0	11.9	1.2	27.4	0.0	0.0	39.7	43.5	-3.8	H	P	
215.168	3.0	51.2	11.9	1.2	27.4	0.0	0.0	36.9	43.5	-6.6	H	QP	
369.014	3.0	54.3	14.5	1.7	27.8	0.0	0.0	42.7	46.0	-3.3	H	P	
369.014	3.0	51.1	14.5	1.7	27.8	0.0	0.0	39.6	46.0	-6.4	H	QP	
432.017	3.0	49.0	15.6	1.8	28.2	0.0	0.0	38.2	46.0	-7.8	H	P	
Vertical													
37.560	3.0	42.6	15.4	0.5	28.4	0.0	0.0	30.1	40.0	-9.9	V	P	
215.888	3.0	47.9	11.9	1.2	27.4	0.0	0.0	33.6	43.5	-9.9	V	P	
359.894	3.0	51.5	14.4	1.6	27.8	0.0	0.0	39.8	46.0	-6.2	V	P	
597.383	3.0	49.4	18.4	2.2	28.6	0.0	0.0	41.4	46.0	-4.6	V	P	

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

8.4. RECEIVER ABOVE 1 GHz

8.4.1. FOR 20 MHz BANDWIDTH IN THE 2.4 GHz BAND

High Frequency Measurement Compliance Certification Services, Fremont 3m Chamber																																																																																																																																																																																																																																																																																			
<p>Test Engn: Ching Pang Date: 06/14/10 Project #: 10U13269 Company: Broadcom EUT Description: 802.11g/Draft 802.11n Wireless LAN PCI-E Mini Card EUT M/N: BCM94313HMG2L Test Target: FCC B Mode Oper: Rx Mode</p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="4">Horn > 18GHz</td> <td>Limit</td> </tr> <tr> <td>T60; S/N: 2238 @3m</td> <td>T34 HP 8449B</td> <td></td> <td colspan="4"></td> <td>FCC 15.209</td> </tr> <tr> <td colspan="15">Hi Frequency Cables</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4">HPF</td> <td>Reject Filter</td> <td colspan="6">Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz</td> </tr> <tr> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td></td> <td colspan="4"></td> <td></td> <td colspan="6"></td> </tr> <tr> <td>f</td> <td>Dist</td> <td>Read Pk</td> <td>Read Avg</td> <td>AF</td> <td>CL</td> <td>Amp</td> <td>D Corr</td> <td>Fltr</td> <td>Peak</td> <td>Avg</td> <td>Pk Lim</td> <td>Avg Lim</td> <td>Pk Mar</td> <td>Avg Mar</td> <td>Notes</td> </tr> <tr> <td>GHz</td> <td>(m)</td> <td>dBuV</td> <td>dBuV</td> <td>dB/m</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dB</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dBuV/m</td> <td>dB</td> <td>dB</td> <td>(V/H)</td> </tr> <tr> <td>Mid Ch</td> <td></td> </tr> <tr> <td>1.300</td> <td>3.0</td> <td>55.1</td> <td>34.4</td> <td>25.5</td> <td>2.5</td> <td>-37.8</td> <td>0.0</td> <td>0.0</td> <td>45.2</td> <td>24.5</td> <td>74</td> <td>54</td> <td>-28.8</td> <td>-29.5</td> <td>H</td> </tr> <tr> <td>1.660</td> <td>3.0</td> <td>53.0</td> <td>32.3</td> <td>26.7</td> <td>2.8</td> <td>-37.3</td> <td>0.0</td> <td>0.0</td> <td>45.1</td> <td>24.4</td> <td>74</td> <td>54</td> <td>-28.9</td> <td>-29.6</td> <td>H</td> </tr> <tr> <td>1.344</td> <td>3.0</td> <td>54.8</td> <td>35.4</td> <td>25.6</td> <td>2.5</td> <td>-37.8</td> <td>0.0</td> <td>0.0</td> <td>45.1</td> <td>25.7</td> <td>74</td> <td>54</td> <td>-28.9</td> <td>-28.3</td> <td>V</td> </tr> <tr> <td>2.492</td> <td>3.0</td> <td>50.6</td> <td>31.5</td> <td>28.3</td> <td>3.5</td> <td>-36.3</td> <td>0.0</td> <td>0.0</td> <td>46.2</td> <td>27.1</td> <td>74</td> <td>54</td> <td>-27.8</td> <td>-26.9</td> <td>V</td> </tr> <tr> <td colspan="15">Note: No other emissions were detected above the system noise floor.</td> </tr> <tr> <td colspan="5">f Measurement Frequency</td> <td colspan="5">Amp Preamp Gain</td> <td colspan="5">Avg Lim Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td colspan="4">Distance to Antenna</td> <td>D Corr</td> <td colspan="4">Distance Correct to 3 meters</td> <td>Pk Lim</td> <td colspan="4">Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td colspan="4">Analyzer Reading</td> <td>Avg</td> <td colspan="4">Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td colspan="4">Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td colspan="4">Antenna Factor</td> <td>Peak</td> <td colspan="4">Calculated Peak Field Strength</td> <td>Pk Mar</td> <td colspan="4">Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td colspan="4">Cable Loss</td> <td>HPF</td> <td colspan="4">High Pass Filter</td> <td></td> <td colspan="4"></td> </tr> </table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.209	Hi Frequency Cables															3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz						12' cable 22807600	20' cable 22807500													f	Dist	Read Pk	Read Avg	AF	CL	Amp	D Corr	Fltr	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes	GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)	Mid Ch																1.300	3.0	55.1	34.4	25.5	2.5	-37.8	0.0	0.0	45.2	24.5	74	54	-28.8	-29.5	H	1.660	3.0	53.0	32.3	26.7	2.8	-37.3	0.0	0.0	45.1	24.4	74	54	-28.9	-29.6	H	1.344	3.0	54.8	35.4	25.6	2.5	-37.8	0.0	0.0	45.1	25.7	74	54	-28.9	-28.3	V	2.492	3.0	50.6	31.5	28.3	3.5	-36.3	0.0	0.0	46.2	27.1	74	54	-27.8	-26.9	V	Note: No other emissions were detected above the system noise floor.															f Measurement Frequency					Amp Preamp Gain					Avg Lim Average Field Strength Limit					Dist	Distance to Antenna				D Corr	Distance Correct to 3 meters				Pk Lim	Peak Field Strength Limit				Read	Analyzer Reading				Avg	Average Field Strength @ 3 m				Avg Mar	Margin vs. Average Limit				AF	Antenna Factor				Peak	Calculated Peak Field Strength				Pk Mar	Margin vs. Peak Limit				CL	Cable Loss				HPF	High Pass Filter								
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																																																												
T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.209																																																																																																																																																																																																																																																																												
Hi Frequency Cables																																																																																																																																																																																																																																																																																			
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz; VBW=10Hz																																																																																																																																																																																																																																																																											
12' cable 22807600	20' cable 22807500																																																																																																																																																																																																																																																																																		
f	Dist	Read Pk	Read Avg	AF	CL	Amp	D Corr	Fltr	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes																																																																																																																																																																																																																																																																				
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)																																																																																																																																																																																																																																																																				
Mid Ch																																																																																																																																																																																																																																																																																			
1.300	3.0	55.1	34.4	25.5	2.5	-37.8	0.0	0.0	45.2	24.5	74	54	-28.8	-29.5	H																																																																																																																																																																																																																																																																				
1.660	3.0	53.0	32.3	26.7	2.8	-37.3	0.0	0.0	45.1	24.4	74	54	-28.9	-29.6	H																																																																																																																																																																																																																																																																				
1.344	3.0	54.8	35.4	25.6	2.5	-37.8	0.0	0.0	45.1	25.7	74	54	-28.9	-28.3	V																																																																																																																																																																																																																																																																				
2.492	3.0	50.6	31.5	28.3	3.5	-36.3	0.0	0.0	46.2	27.1	74	54	-27.8	-26.9	V																																																																																																																																																																																																																																																																				
Note: No other emissions were detected above the system noise floor.																																																																																																																																																																																																																																																																																			
f Measurement Frequency					Amp Preamp Gain					Avg Lim Average Field Strength Limit																																																																																																																																																																																																																																																																									
Dist	Distance to Antenna				D Corr	Distance Correct to 3 meters				Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																																																								
Read	Analyzer Reading				Avg	Average Field Strength @ 3 m				Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																																																								
AF	Antenna Factor				Peak	Calculated Peak Field Strength				Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																																																								
CL	Cable Loss				HPF	High Pass Filter																																																																																																																																																																																																																																																																													

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE


ANSI C63.4

RESULTS


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)										
Freq. (MHz)	Reading			Closs (dB)	Limit	FCC_B		Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)			QP	AV	QP (dB)	AV (dB)	
0.20	50.02	--	36.92	0.00	63.53	53.53	-13.51	-16.61	L1	
2.08	42.76	--	39.86	0.00	56.00	46.00	-13.24	-6.14	L1	
24.01	37.62	--	27.48	0.00	60.00	50.00	-22.38	-22.52	L1	
0.20	49.54	--	36.19	0.00	63.53	53.53	-13.99	-17.34	L2	
1.87	37.41	--	29.65	0.00	56.00	46.00	-18.59	-16.35	L2	
24.01	33.54	--	23.75	0.00	60.00	50.00	-26.46	-26.25	L2	
6 Worst Data										

LINE 1 RESULTS

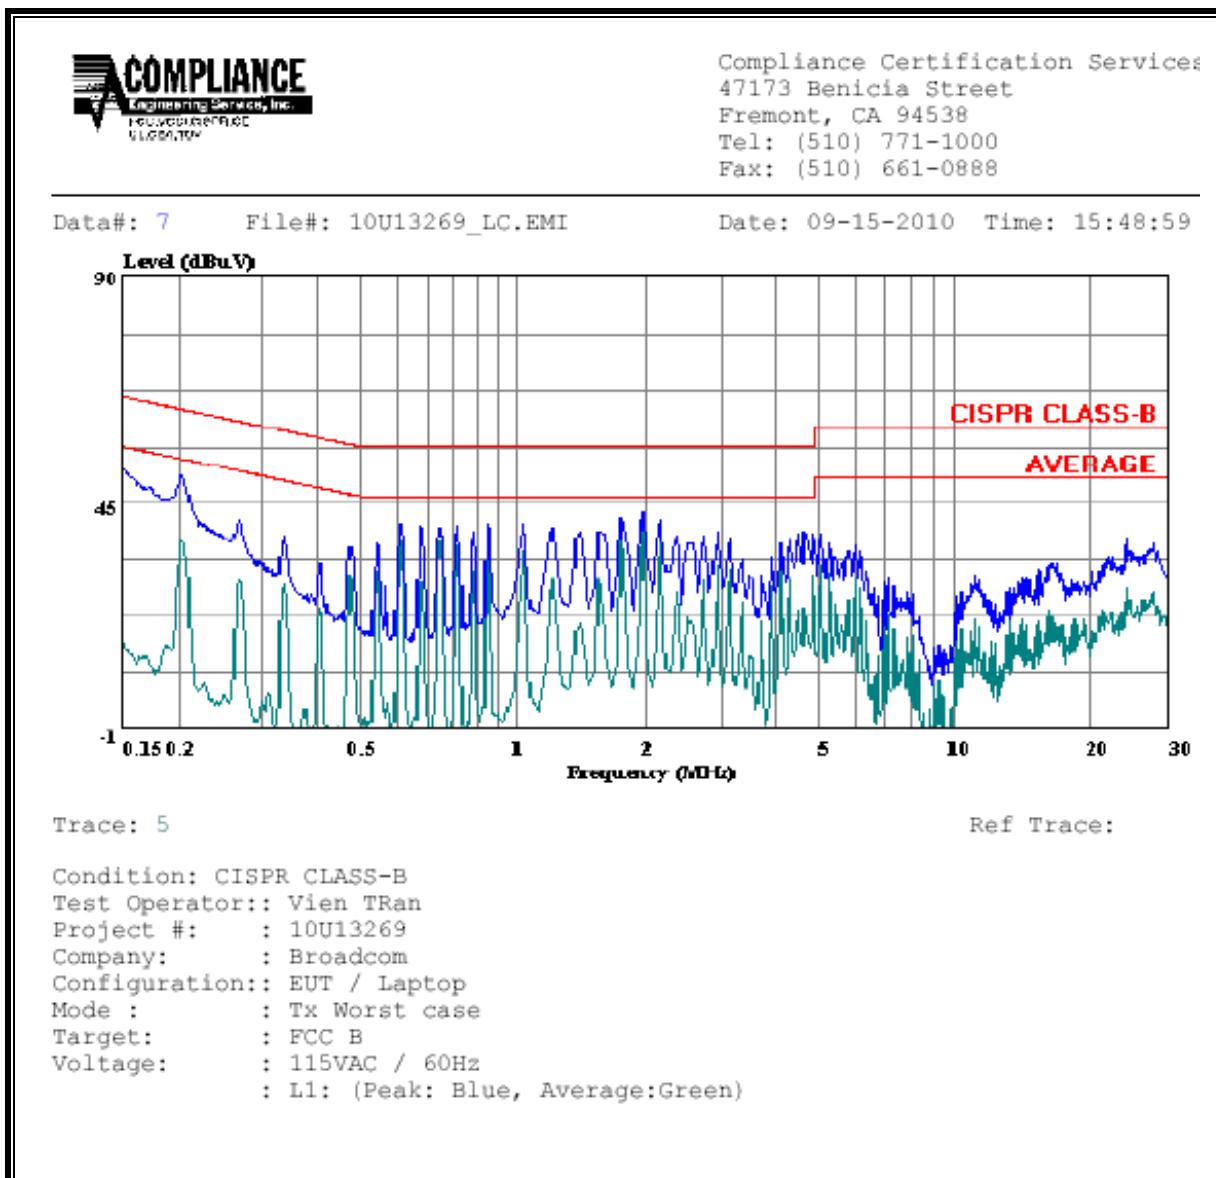

LINE 2 RESULTS

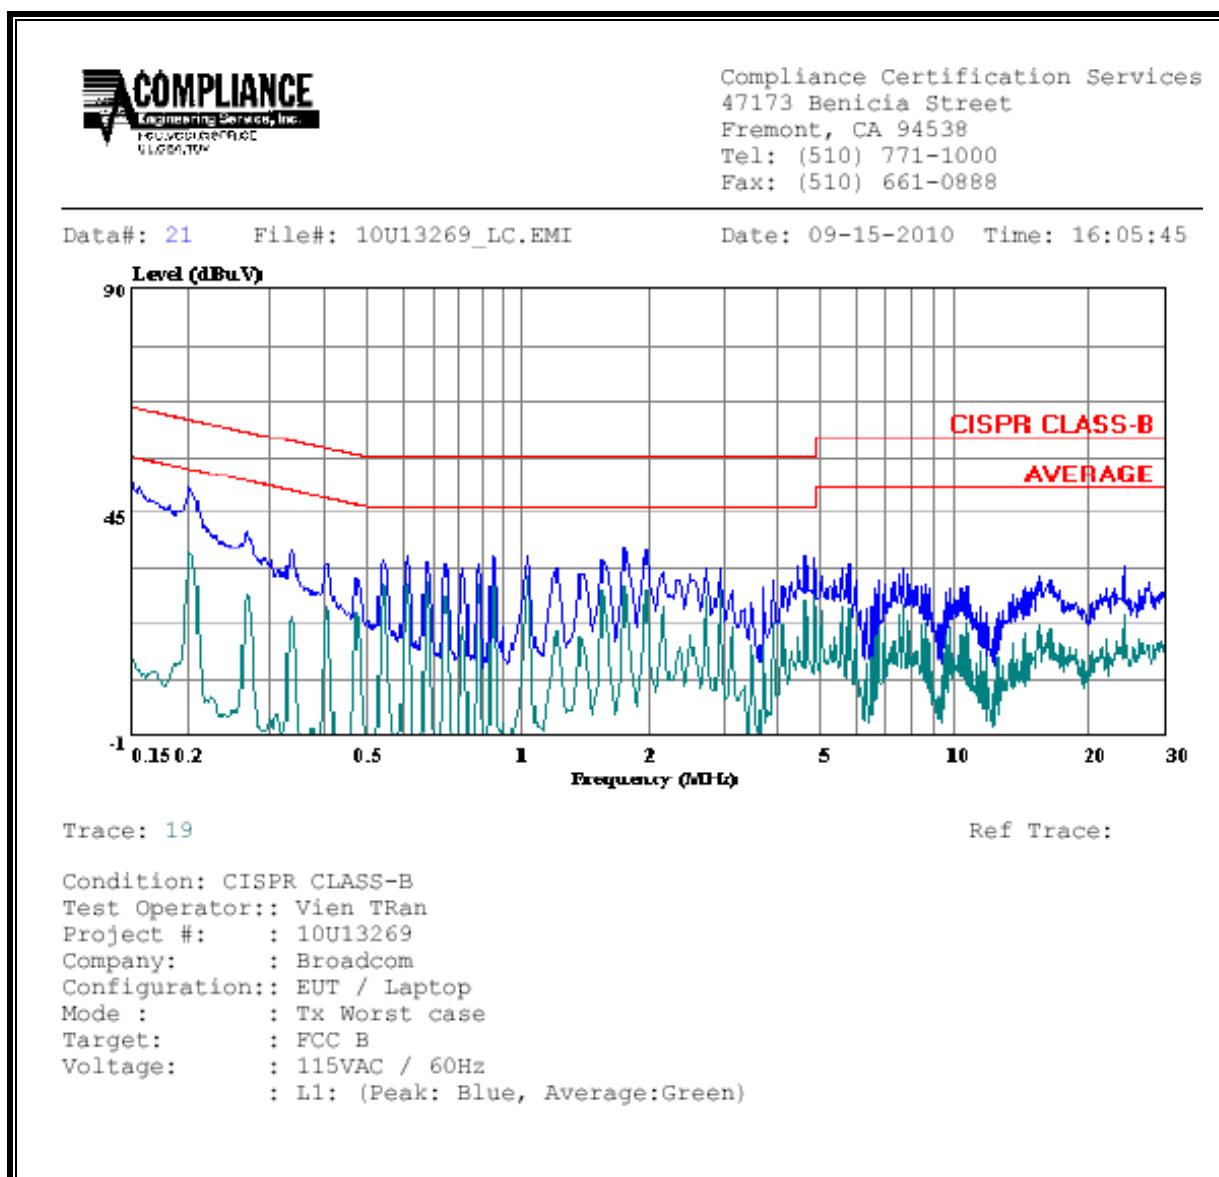

10. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842f	4.89f	*(900f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824f	2.19f	*(180f ²)	30

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

Table 5**Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> ^{1.2}
150 000–300 000	0.158 <i>f</i> ^{0.5}	4.21 × 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 × 10 ⁻⁵ <i>f</i>	616 000 / <i>f</i> ^{1.2}

* Power density limit is applicable at frequencies greater than 100 MHz.

Notes:

1. Frequency, *f*, is in MHz.
2. A power density of 10 W/m² is equivalent to 1 mW/cm².
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \pi * D^2)$$

where

S = Power density in W/m²

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m² is converted to units of mWc/m² by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \pi * S))$$

where

D = Separation distance in m

EIRP = Equivalent Isotropic Radiated Power in W

S = Power density in W/m²

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power * Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)$$

where

Px = Power of transmitter x

Gx = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Band	Mode	Separation Distance (m)	Output Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m ²)	FCC Power Density (mW/cm ²)
2.4 GHz	WLAN	0.20	25.59	3.90	1.77	0.177