



FCC CFR47 PART 15 SUBPART C  
CERTIFICATION TEST REPORT  
FOR  
**802.11g / Draft 802.11n WLAN + BLUETOOTH PCI-E MINICARD**  
**MODEL NUMBER: BCM94313HMGB**  
**FCC ID: QDS-BRCM1051I**

**REPORT NUMBER: 10U13391-24**

**ISSUE DATE: NOVEMBER 17, 2010**

*Prepared for*  
**BROADCOM CORPORATION**  
**190 MATHILDA PLACE**  
**SUNNYVALE, CA 94086, U.S.A.**

*Prepared by*  
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)**  
**47173 BENICIA STREET**  
**FREMONT, CA 94538, U.S.A.**  
**TEL: (510) 771-1000**  
**FAX: (510) 661-0888**

**NVLAP**<sup>®</sup>  
NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	11/17/10	Initial Issue	F. Ibrahim

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>5</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	6
4.2. <i>SAMPLE CALCULATION.....</i>	6
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	6
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>7</b>
5.1. <i>DESCRIPTION OF EUT.....</i>	7
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	7
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS.....</i>	7
5.4. <i>SOFTWARE AND FIRMWARE.....</i>	8
5.5. <i>WORST-CASE CONFIGURATION AND MODE .....</i>	8
5.6. <i>DESCRIPTION OF TEST SETUP.....</i>	9
<b>6. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>13</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>14</b>
7.1. <i>BASIC DATA RATE GFSK MODULATION.....</i>	14
7.1.1. 99% BANDWIDTH .....	14
7.1.2. 20 dB BANDWIDTH .....	17
7.1.3. HOPPING FREQUENCY SEPARATION .....	20
7.1.4. NUMBER OF HOPPING CHANNELS.....	21
7.1.5. AVERAGE TIME OF OCCUPANCY.....	24
7.1.6. OUTPUT POWER .....	28
7.1.7. CONDUCTED SPURIOUS EMISSIONS.....	31
7.2. <i>ENHANCED DATA RATE 8PSK MODULATION.....</i>	36
7.2.1. 99% BANDWIDTH .....	36
7.2.2. 20dB BANDWIDTH .....	39
7.2.3. HOPPING FREQUENCY SEPARATION .....	42
7.2.4. NUMBER OF HOPPING CHANNELS.....	43
7.2.5. AVERAGE TIME OF OCCUPANCY.....	46
7.2.6. OUTPUT POWER .....	50
7.2.7. CONDUCTED SPURIOUS EMISSIONS.....	53
7.3. <i>LOW ENERGY (LE) MODULATION .....</i>	58
7.3.1. 99% BANDWIDTH .....	58
7.3.2. 20dB BANDWIDTH .....	61
7.3.3. HOPPING FREQUENCY SEPARATION .....	64
7.3.4. NUMBER OF HOPPING CHANNELS.....	65
7.3.5. AVERAGE TIME OF OCCUPANCY.....	69
7.3.6. OUTPUT POWER .....	71

7.3.7. CONDUCTED SPURIOUS EMISSIONS.....	74
<b>8. RADIATED TEST RESULTS .....</b>	<b>79</b>
8.1. <i>LIMITS AND PROCEDURE</i> .....	79
8.1.1. BASIC DATA RATE GFSK MODULATION.....	80
8.1.2. ENHANCED DATA RATE 8PSK MODULATION.....	85
8.1.3. LOW ENERGY LE MODULATION.....	90
8.2. <i>RECEIVER ABOVE 1 GHz</i> .....	95
8.2.1. WORST-CASE 8PSK MODE .....	95
8.2.2. WORST-CASE LE MODE .....	96
8.3. <i>WORST-CASE BELOW 1 GHz</i> .....	97
8.3.1. WORST-CASE 8PSK MODE .....	97
8.3.2. WORST-CASE LE MODE .....	98
<b>9. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>99</b>
9.1. <i>WORST-CASE 8PSK MODE</i> .....	100
9.2. <i>WORST-CASE LE MODE</i> .....	103
<b>10. MAXIMUM PERMISSIBLE EXPOSURE .....</b>	<b>106</b>
<b>11. SETUP PHOTOS .....</b>	<b>109</b>
11.1. <i>SETUP PHOTO FOR GFSK &amp; 8PSK MODES</i> .....	109
11.2. <i>SETUP PHOTO FOR LE MODE</i> .....	113

## 1. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** BROADCOM CORPORATION  
190 MATHILDA PLACE  
SUNNYVALE, CA 94086, USA

**EUT DESCRIPTION:** 802.11g / Draft 802.11n WLAN + Bluetooth PCI-E Minicard

**MODEL:** BCM94313HMGB

**SERIAL NUMBER:** 1373685

**DATE TESTED:** OCTOBER 23 to NOVEMBER 10, 2010

APPLICABLE STANDARDS		TEST RESULTS
STANDARD		
CFR 47 Part 15 Subpart C		Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:



---

FRANK IBRAHIM  
EMC SUPERVISOR  
UL CCS

Tested By:



---

VIEN TRAN  
EMC ENGINEER  
UL CCS

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

## 3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

The EUT is an 802.11g / Draft 802.11n WLAN + Bluetooth PCI-E Minicard.

The radio module is manufactured by Broadcom.

### 5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Basic GFSK	1.97	1.57
2402 - 2480	Enhanced 8PSK	4.46	2.79
2402 - 2480	Low Energy BLE	1.36	1.37

### 5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a built in antenna with a maximum gain of 3.9 dBi.

## 5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was Broadcom Bluetooth 4.0 + HS USB, rev. 5.6.0.3200.

The test utility software used during testing was Bluetool, rev. 3.54.164.0 and 1.3.5.3

## 5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power.

## 5.6. DESCRIPTION OF TEST SETUP

### HOPPING OFF


### SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
Laptop	Dell	Inspiron	N/A
AC Adapter	Dell	HP-OQ065B83	CN-0N2765-47890-43S-1042
Adapter Board	Broadcom	BCM2070AD	1268578

### I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	AC	Unshielded	1.8m	N/A
2	DC	1	DC	Unshielded	1.8m	Ferrite at laptop's end
3	USB	1	USB	Unshielded	1.0m	N/A

**SETUP DIAGRAM FOR HOPPING OFF (Modulation On) TEST**

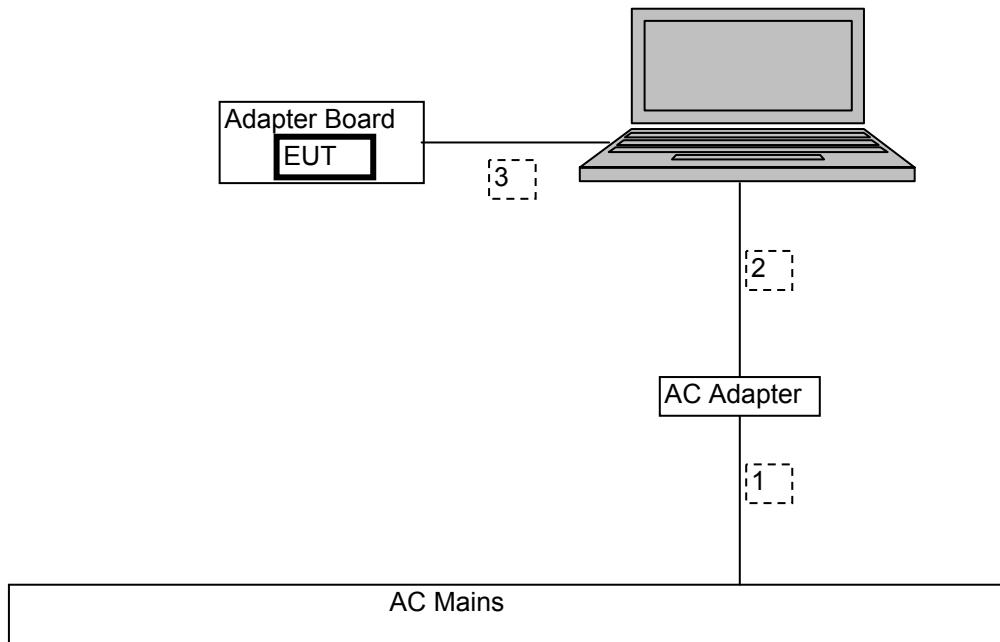

**TEST SETUP**

The EUT is connected to a host laptop computer via a 5Vdc adaptor board during the test. Test software exercised the radio card.

**HOPPING ON**


**SUPPORT EQUIPMENT**

PERIPHERAL SUPPORT EQUIPMENT LIST			
Description	Manufacturer	Model	Serial Number
Laptop	Dell	Inspiron	N/A
AC Adapter	Dell	HP-OQ065B83	CN-0N2765-47890-43S-1042
Adapter Board	Broadcom	BCM2070AD	1268569
Laptop	Dell	Inspiron 0000	N/A
AC Adapter	Dell	PA-1600-06D1	CN-0F9710-71616-56H-510D
Adapter Board	Broadcom	BCM2070AD	1268578

**I/O CABLES**

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	2	AC	Unshielded	1.8m	N/A
2	DC	2	DC	Unshielded	1.8m	Ferrite at laptop's end
3	USB	2	USB	Unshielded	1.0m	N/A

**SETUP DIAGRAM FOR HOPPING TEST**

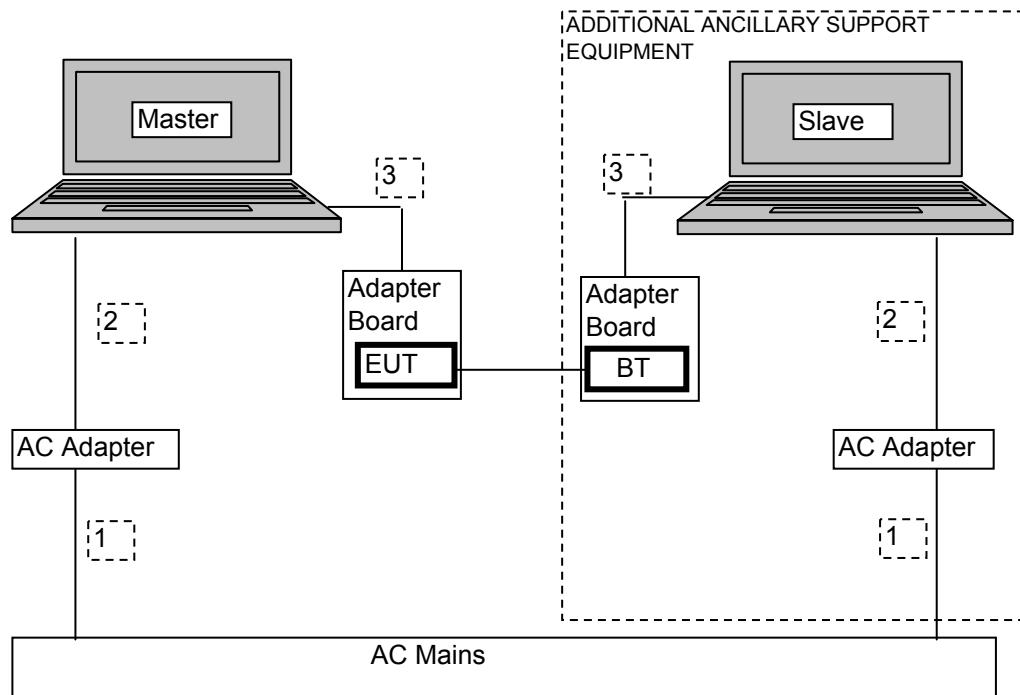

**TEST SETUP**

The EUT and the ancillary support equipment are configured to create an operating communications link. Traffic is sent forward across this link, acknowledgements are sent back, and the performance of the link is monitored.

## 6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00996	08/10/10	08/10/11
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01171	01/14/09	07/14/11
Antenna, Horn, 18 GHz	EMCO	3115	C00872	01/29/09	07/29/11
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00980	01/29/09	07/29/11
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00778	01/06/10	07/06/11
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	02/04/09	08/04/11
Peak Power Meter	Agilent / HP	E9327A	C00964	01/07/10	12/04/11
Peak Power Sensor	Agilent / HP	E4416A	C00963	12/04/09	12/04/11
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRM50702	N02685	01/00/00	CNR
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-	N02481	11/05/09	11/05/10
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/06/09	05/06/11

## 7. ANTENNA PORT TEST RESULTS

### 7.1. BASIC DATA RATE GFSK MODULATION

#### 7.1.1. 99% BANDWIDTH

##### LIMIT

None; for reporting purposes only.



##### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 99% bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

##### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (kHz)
Low	2402	865.0855
Middle	2441	867.2883
High	2480	883.1698

**99% BANDWIDTH**

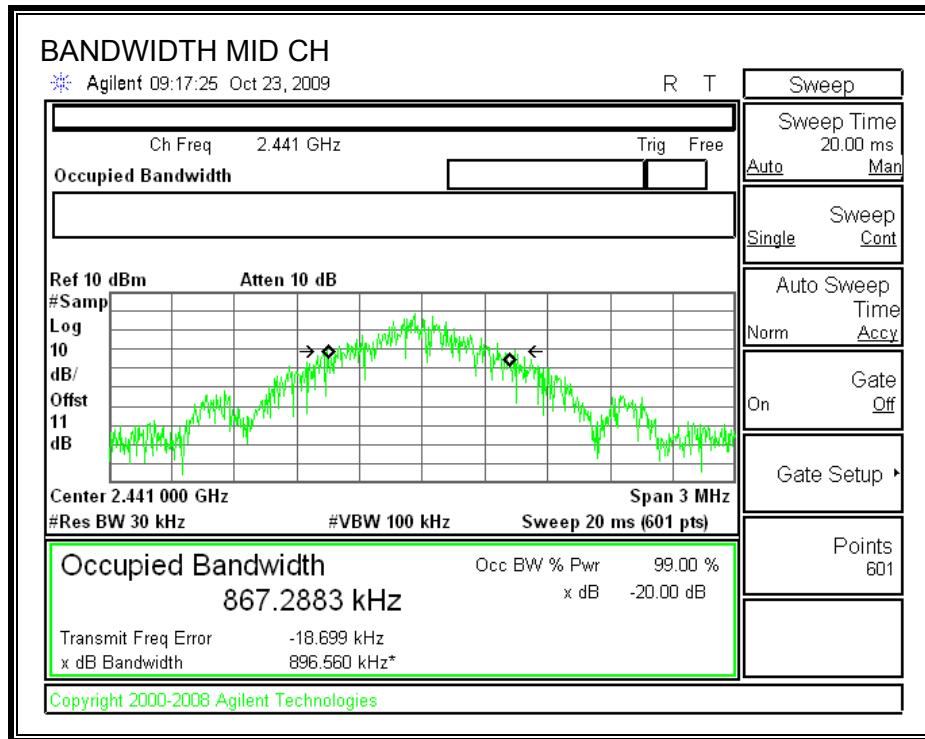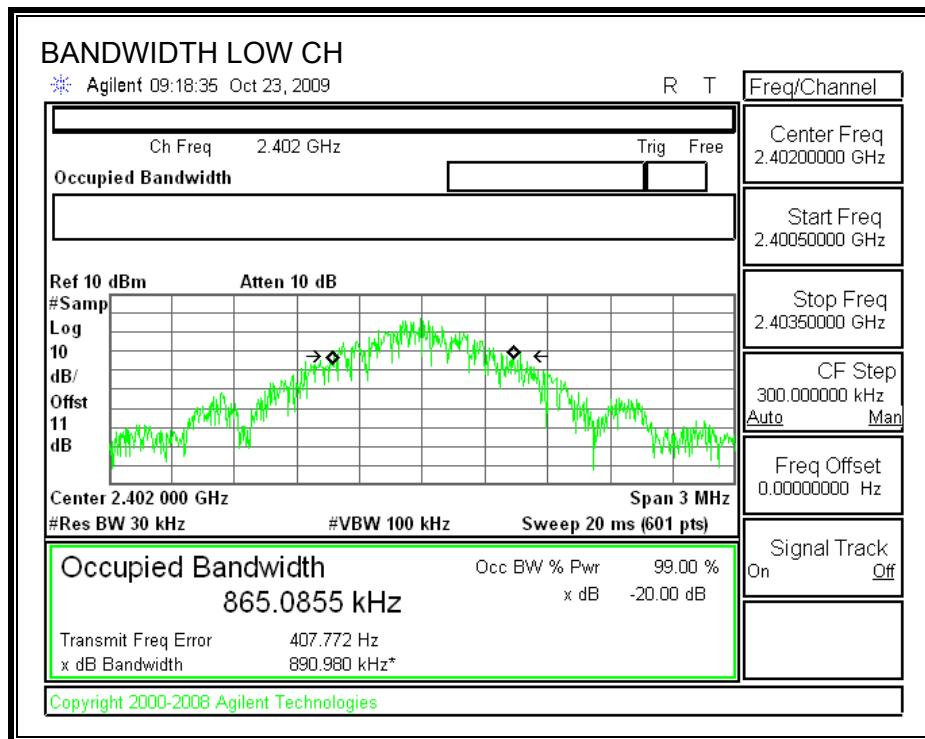

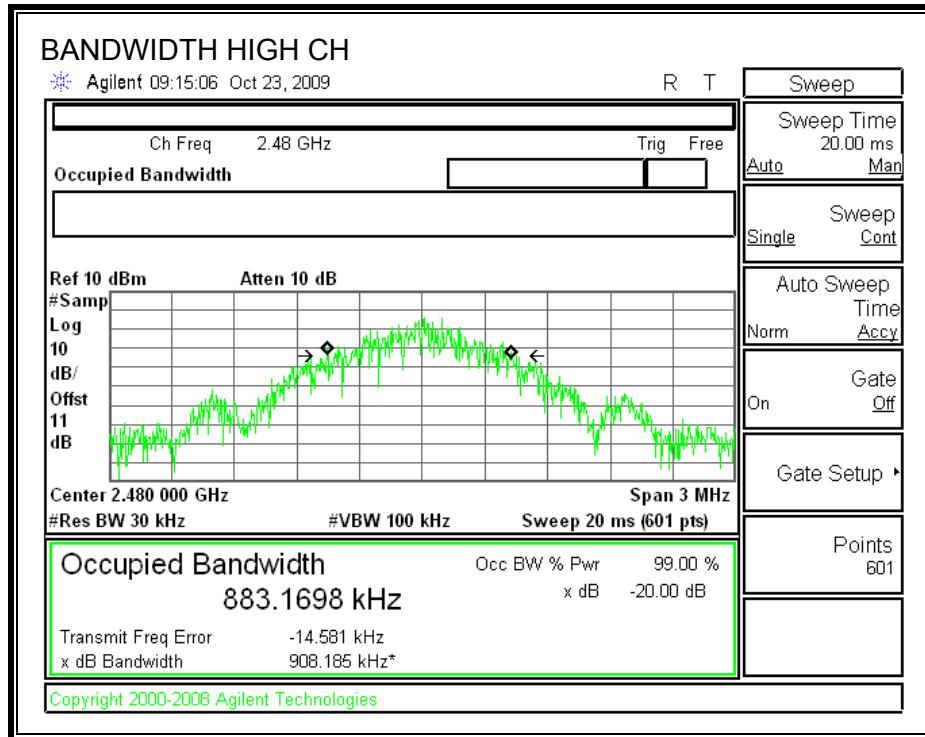

### 7.1.2. 20 dB BANDWIDTH

#### LIMIT

None; for reporting purposes only.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20 dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (kHz)
Low	2402	953.607
Middle	2441	956.025
High	2480	952.303

## 20 dB BANDWIDTH

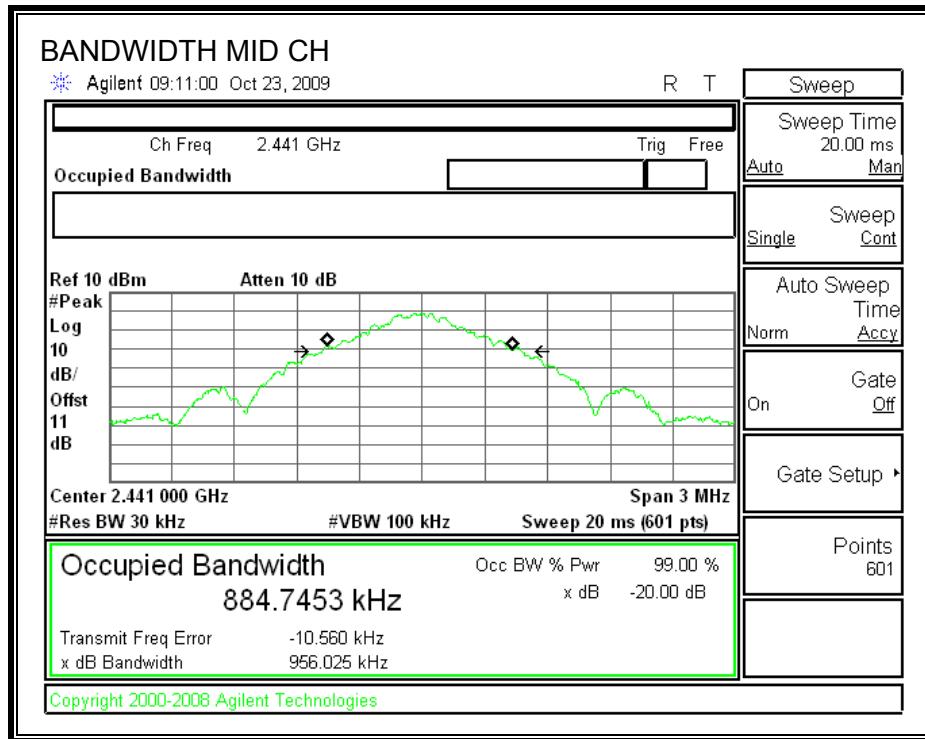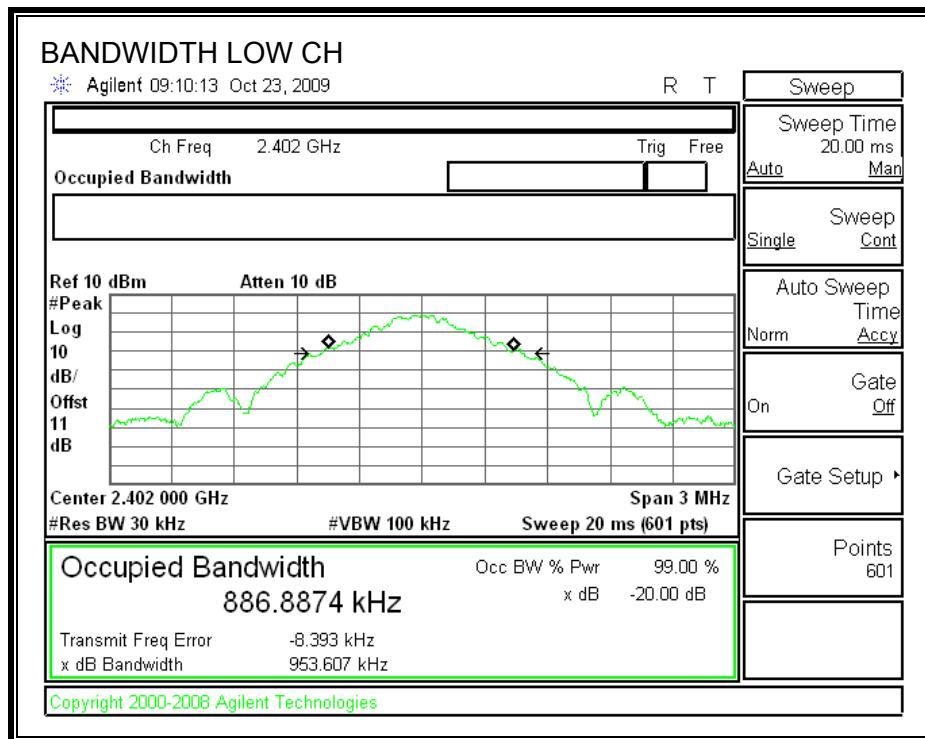

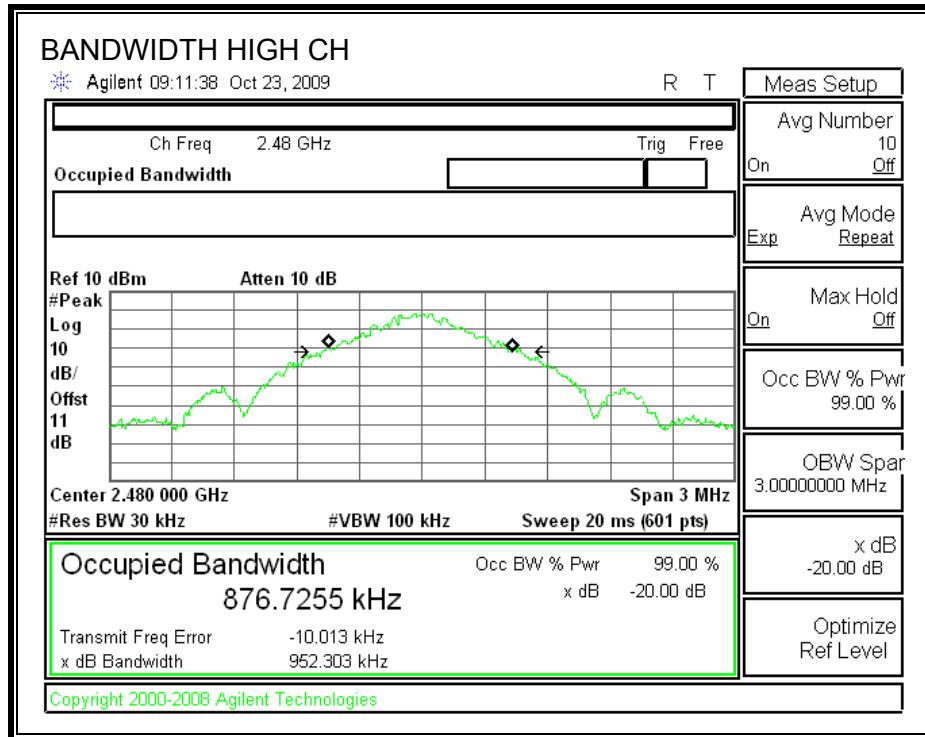

### 7.1.3. HOPPING FREQUENCY SEPARATION

#### LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

#### RESULTS

##### HOPPING FREQUENCY SEPARATION

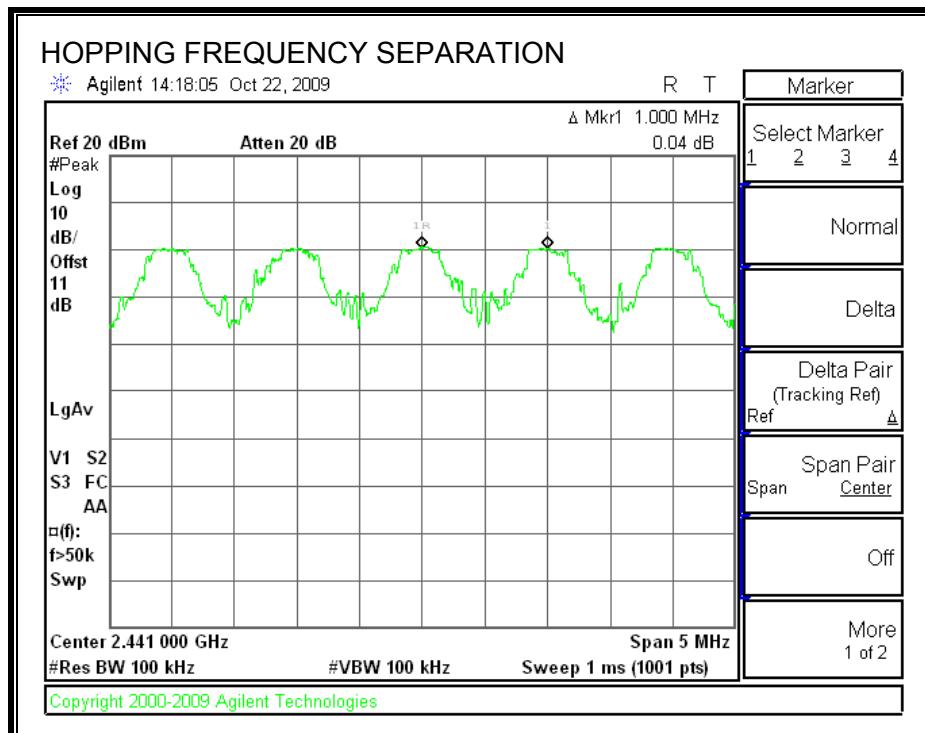

#### 7.1.4. NUMBER OF HOPPING CHANNELS

##### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



##### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

##### RESULTS

79 Channels observed.

**NUMBER OF HOPPING CHANNELS**

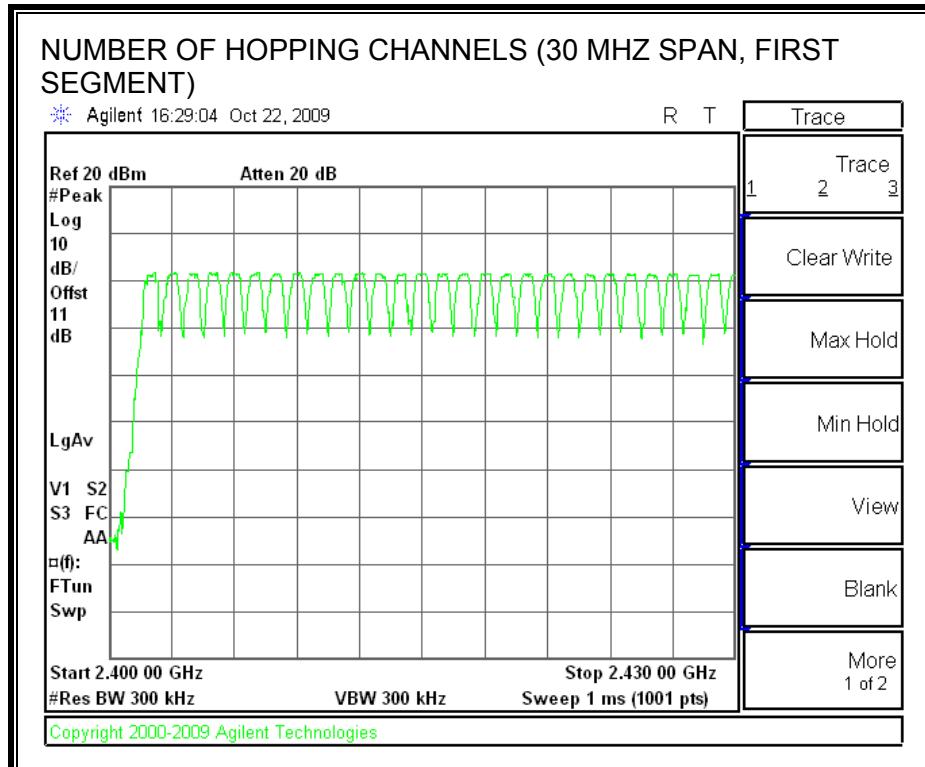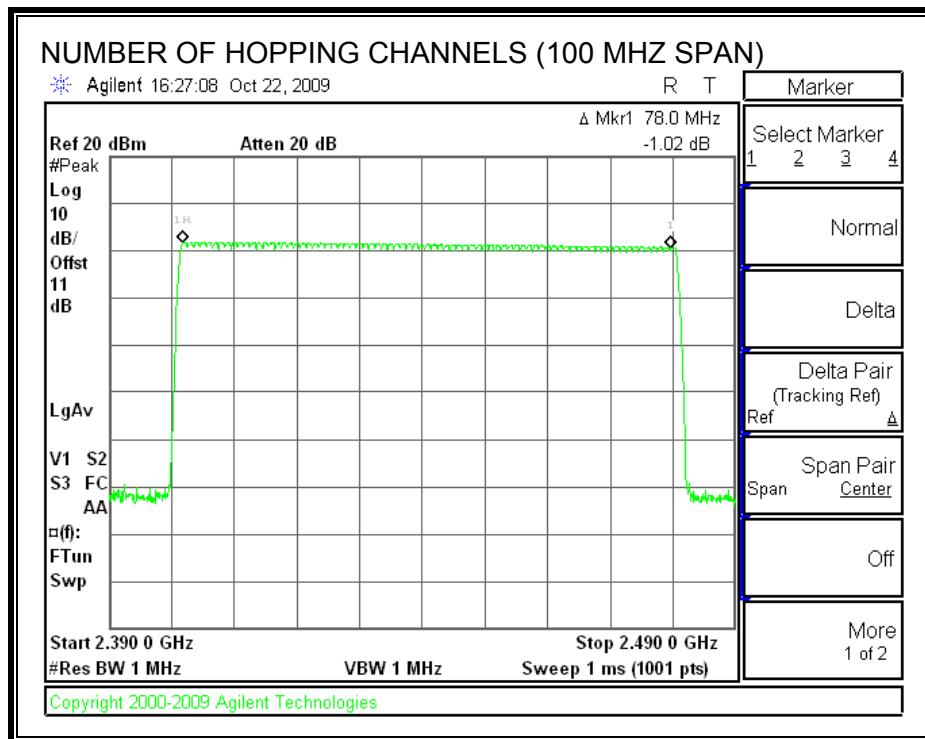

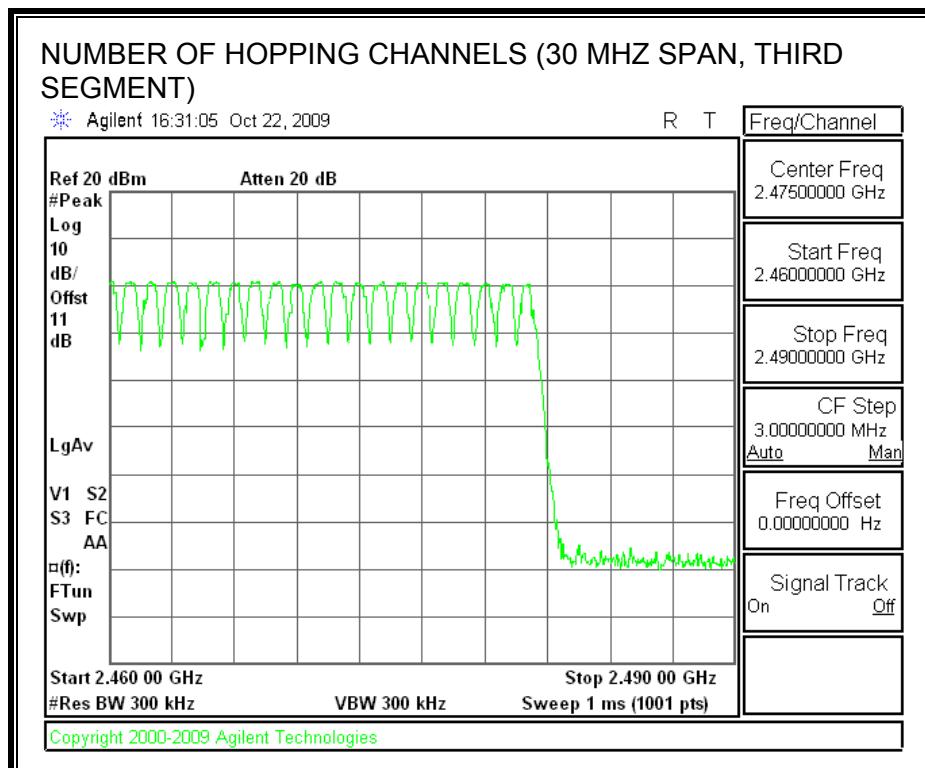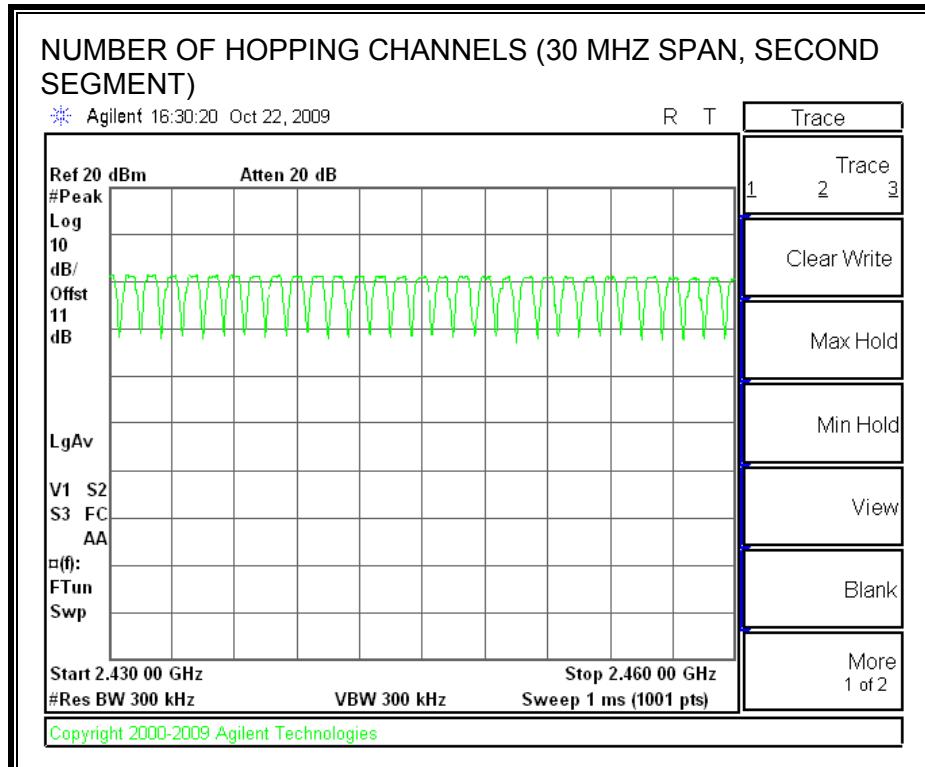

### 7.1.5. AVERAGE TIME OF OCCUPANCY

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$ .


#### RESULTS

##### GFSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
DH1	0.446	32	0.143	0.4	0.257
DH3	1.700	20	0.340	0.4	0.060
DH5	2.947	12	0.354	0.4	0.046

**DH1**

**PULSE WIDTH**

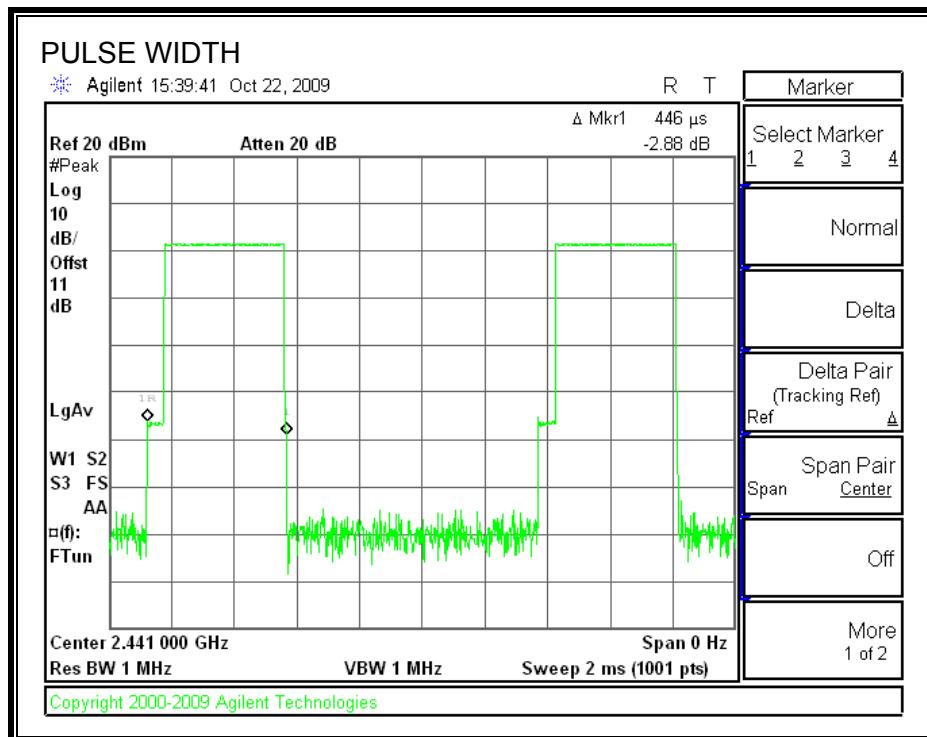


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

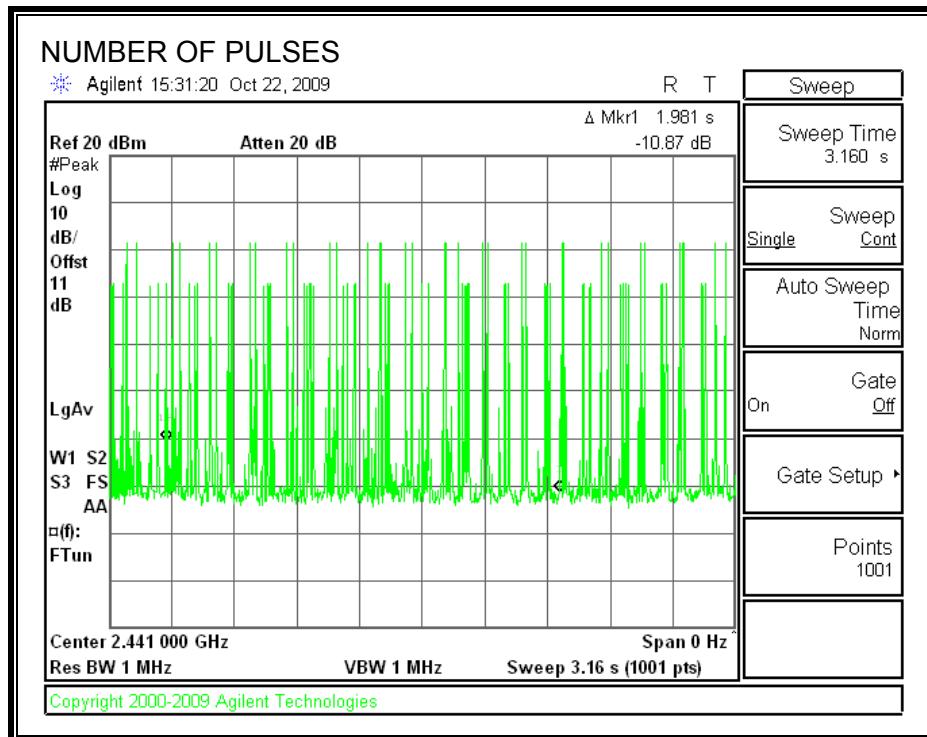


**DH3**

**PULSE WIDTH**

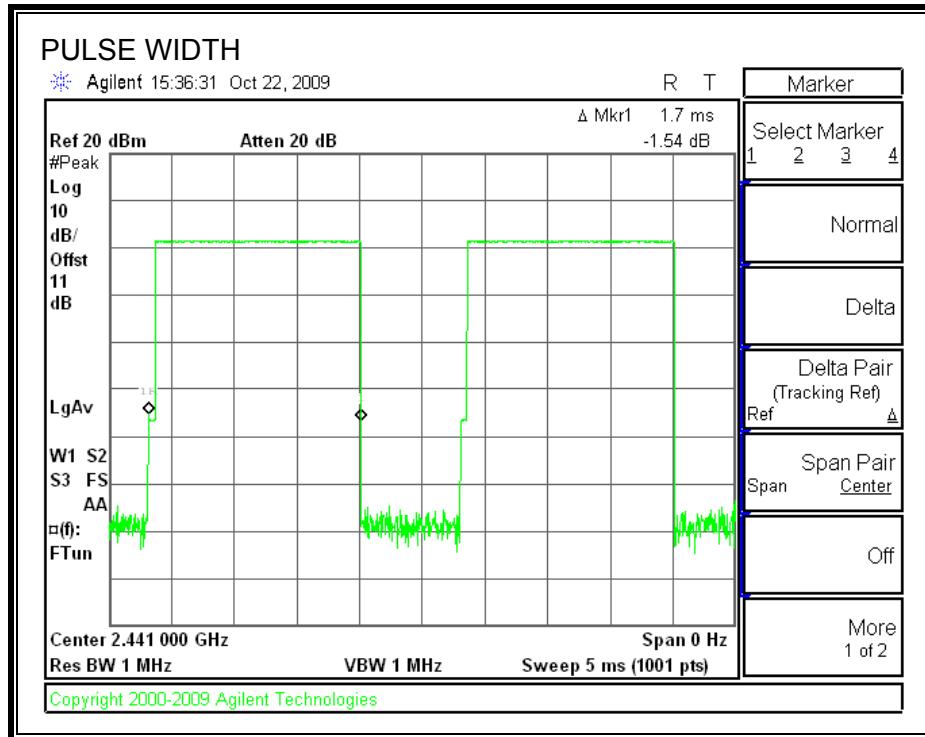


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

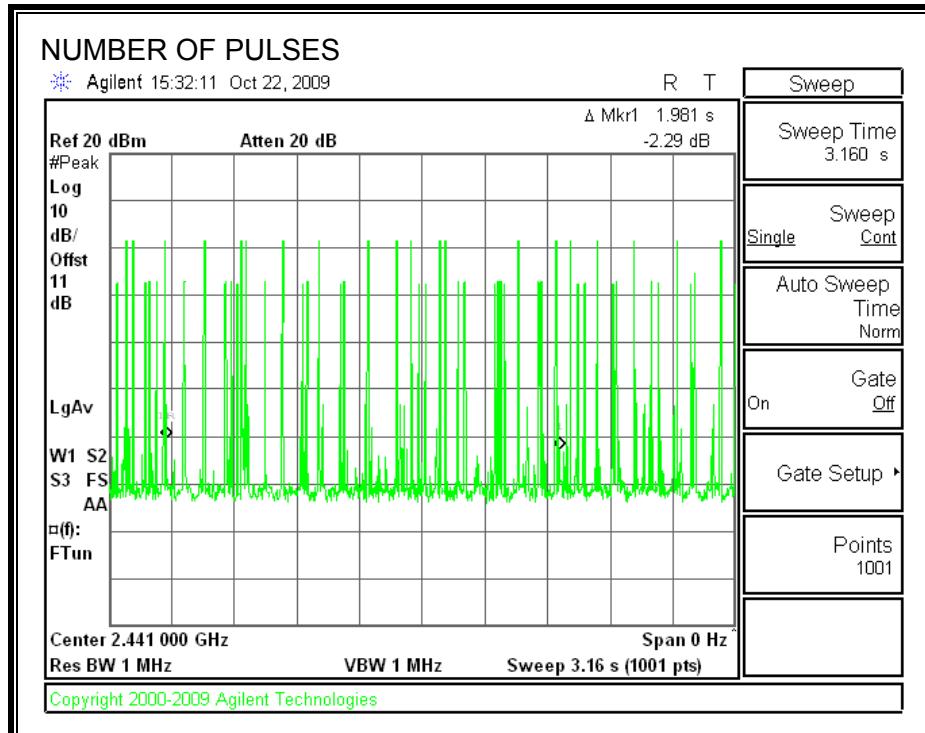


**DH5**

**PULSE WIDTH**

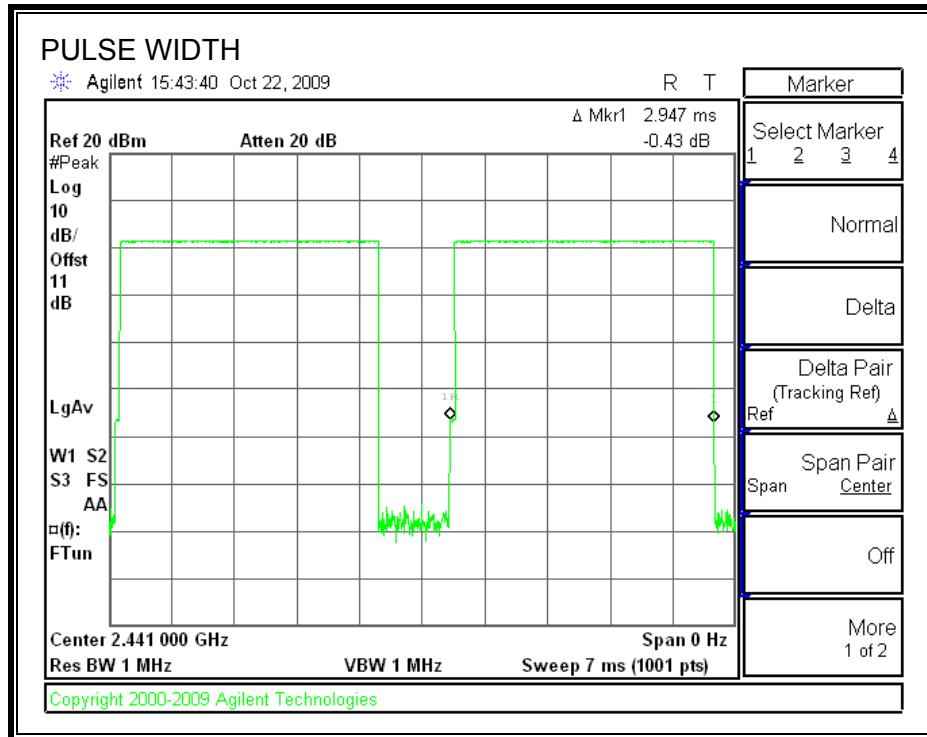

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

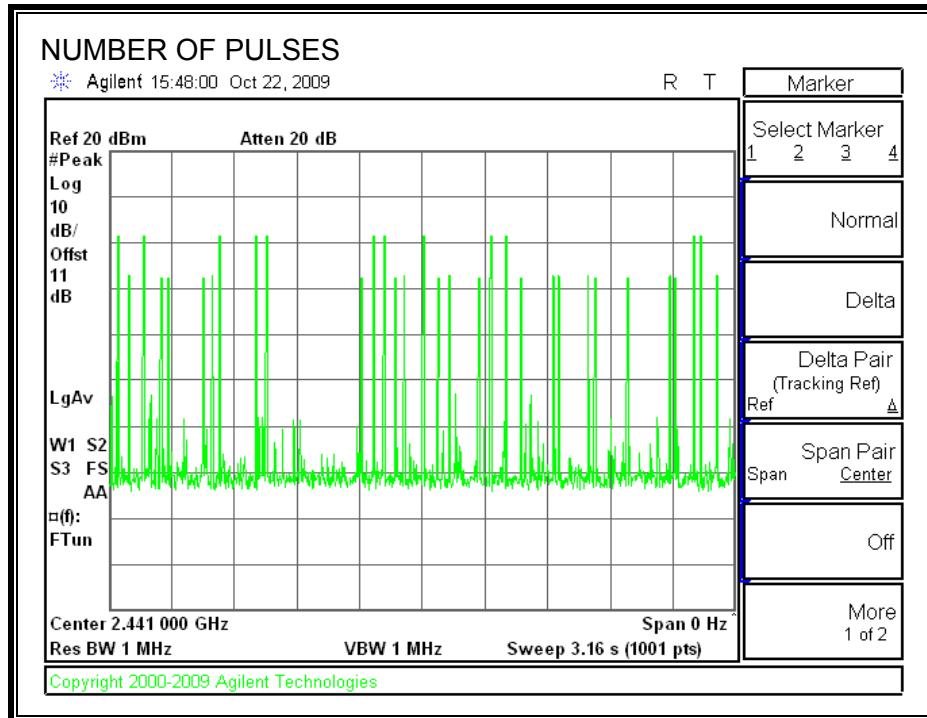

### 7.1.6. OUTPUT POWER

#### LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

#### RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	1.97	30	-28.03
Middle	2441	1.66	30	-28.34
High	2480	1.07	30	-28.93

## OUTPUT POWER

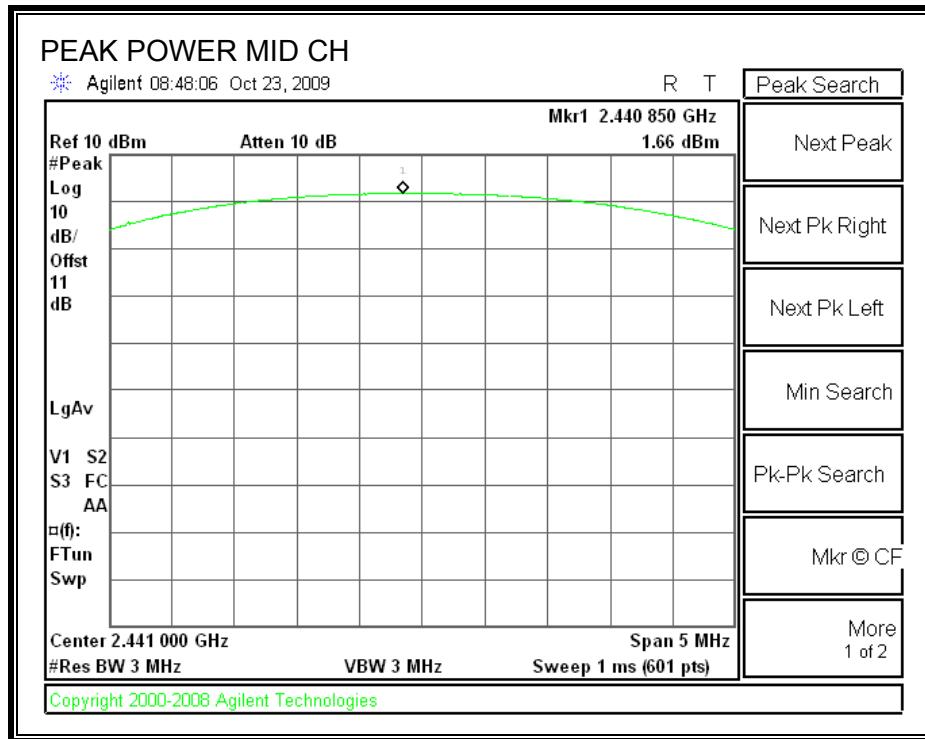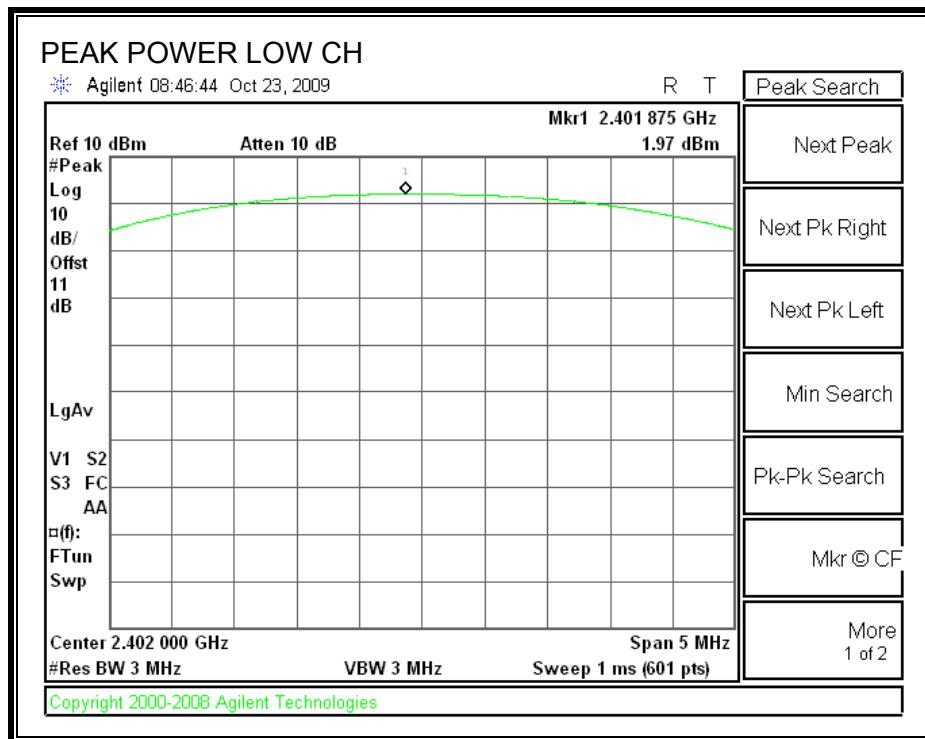

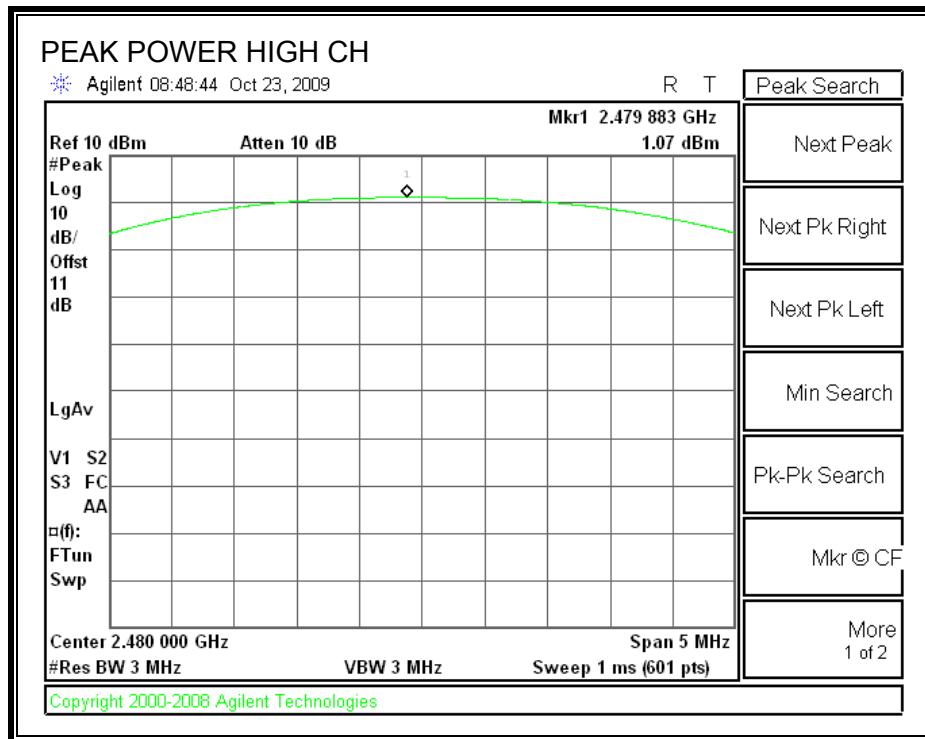

### 7.1.7. CONDUCTED SPURIOUS EMISSIONS

#### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

#### RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

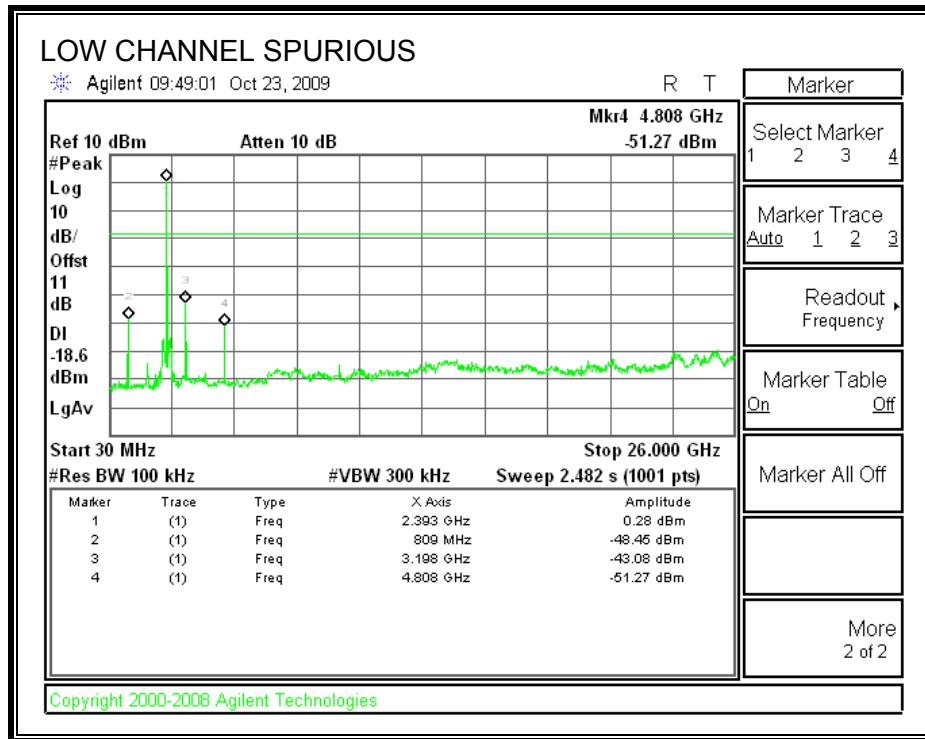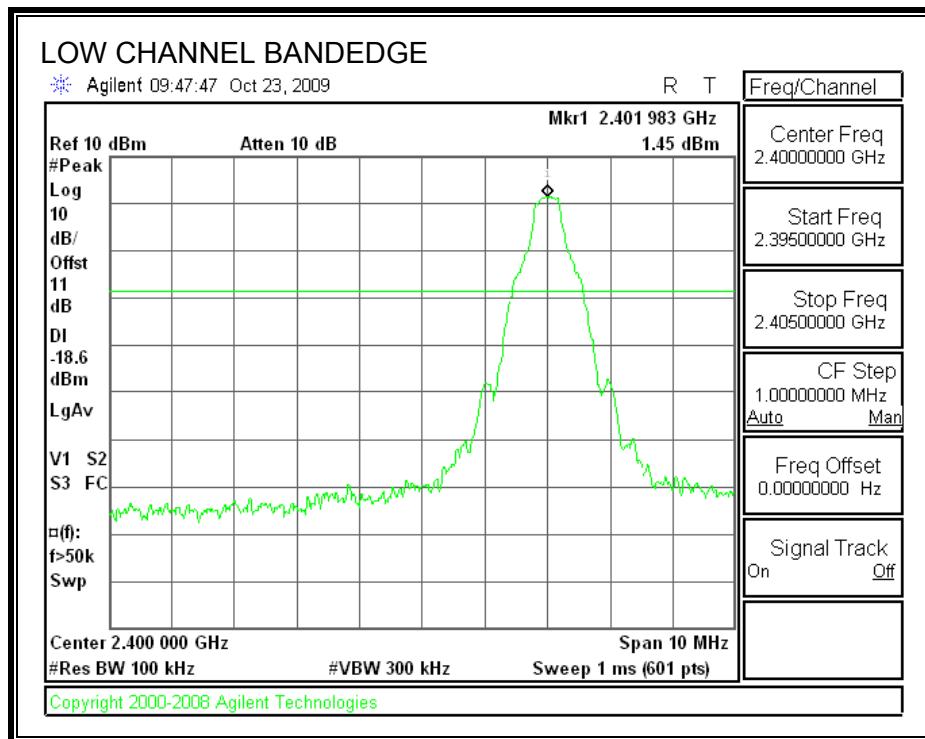



**SPURIOUS EMISSIONS, MID CHANNEL**

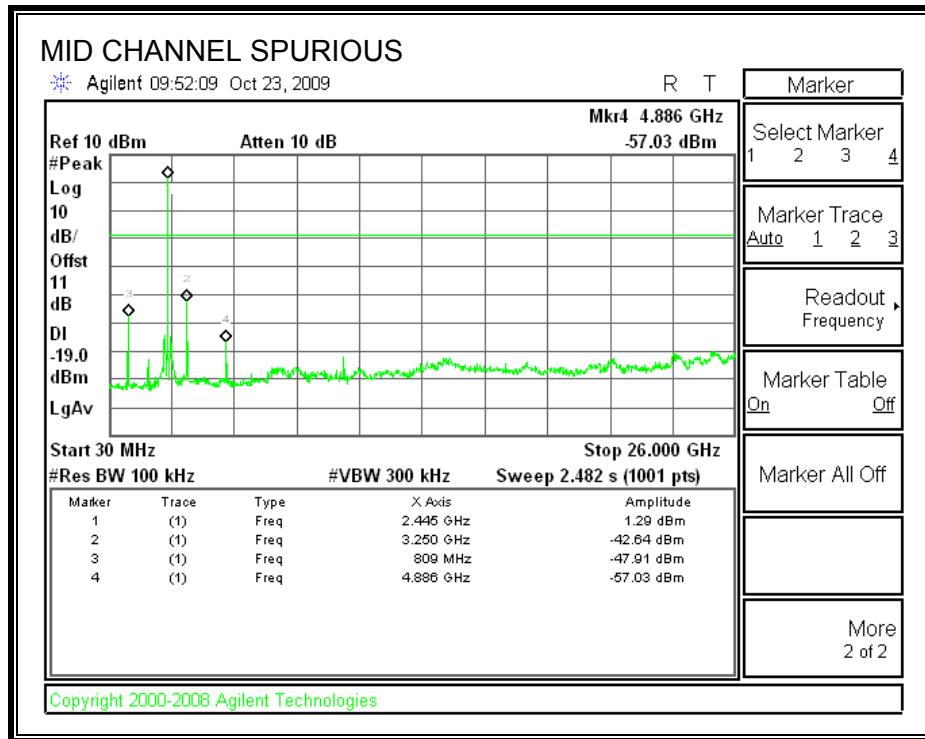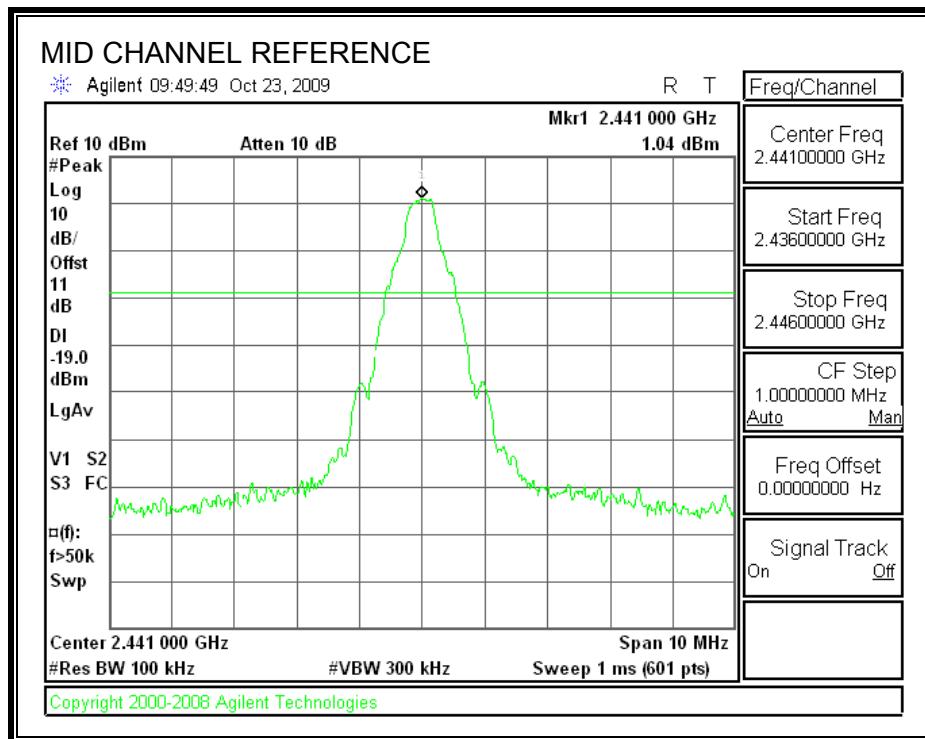

**SPURIOUS EMISSIONS, HIGH CHANNEL**

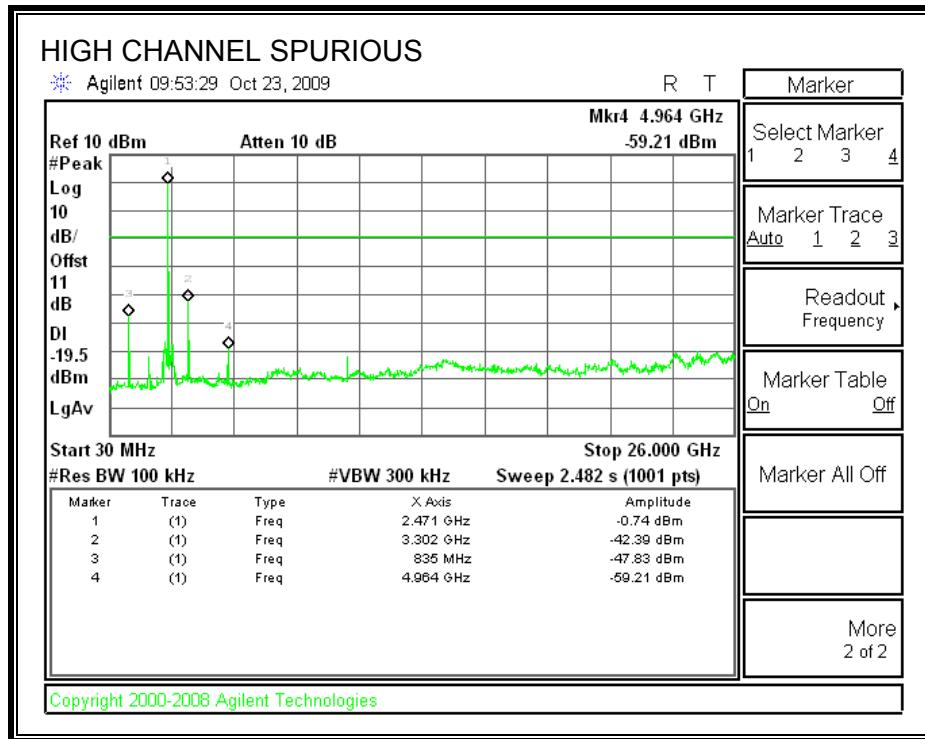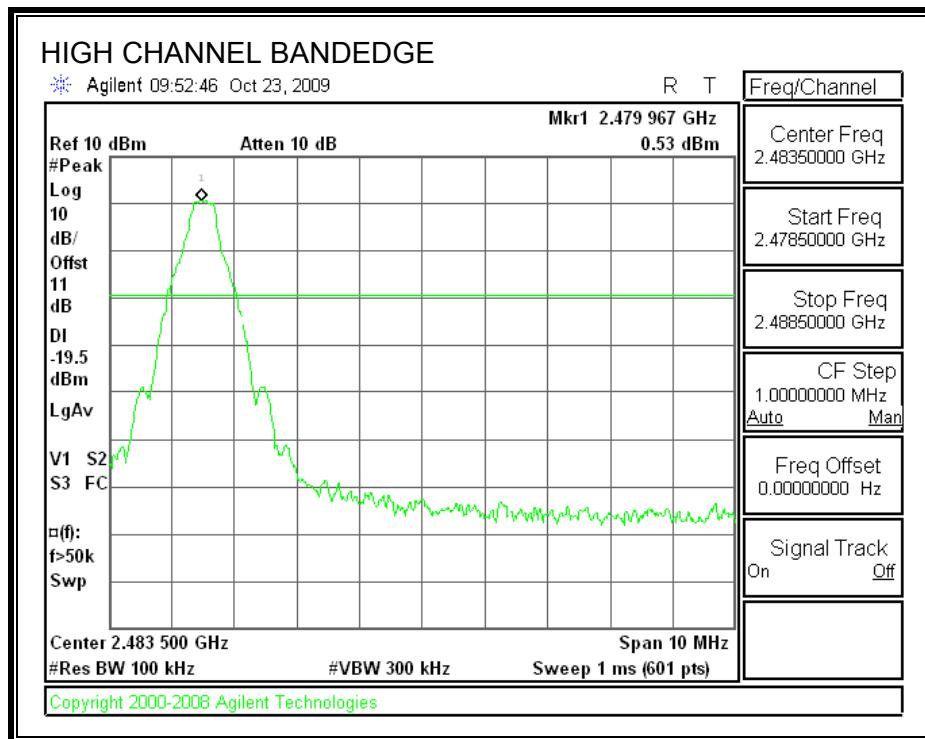

**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

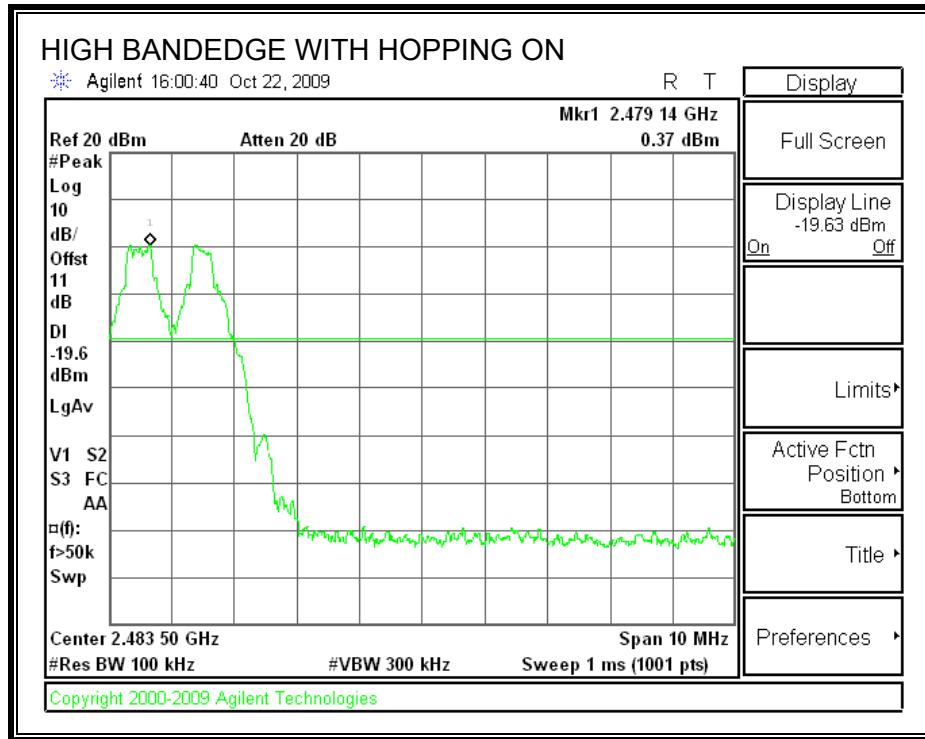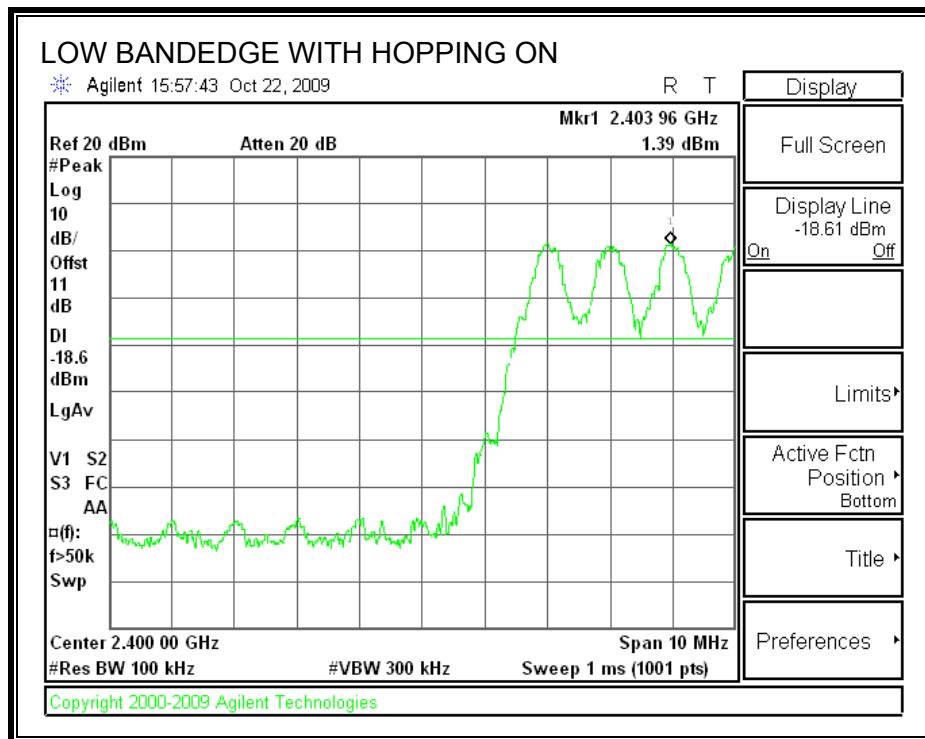

## 7.2. ENHANCED DATA RATE 8PSK MODULATION

### 7.2.1. 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 99% bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.2007
Middle	2441	1.1995
High	2480	1.1936

**99% BANDWIDTH**

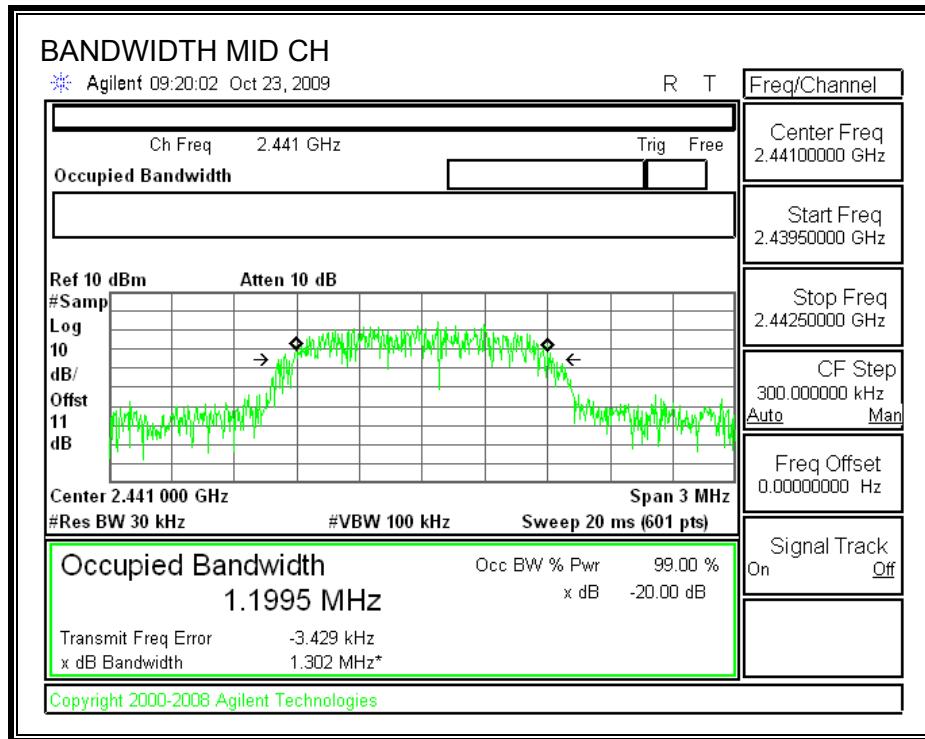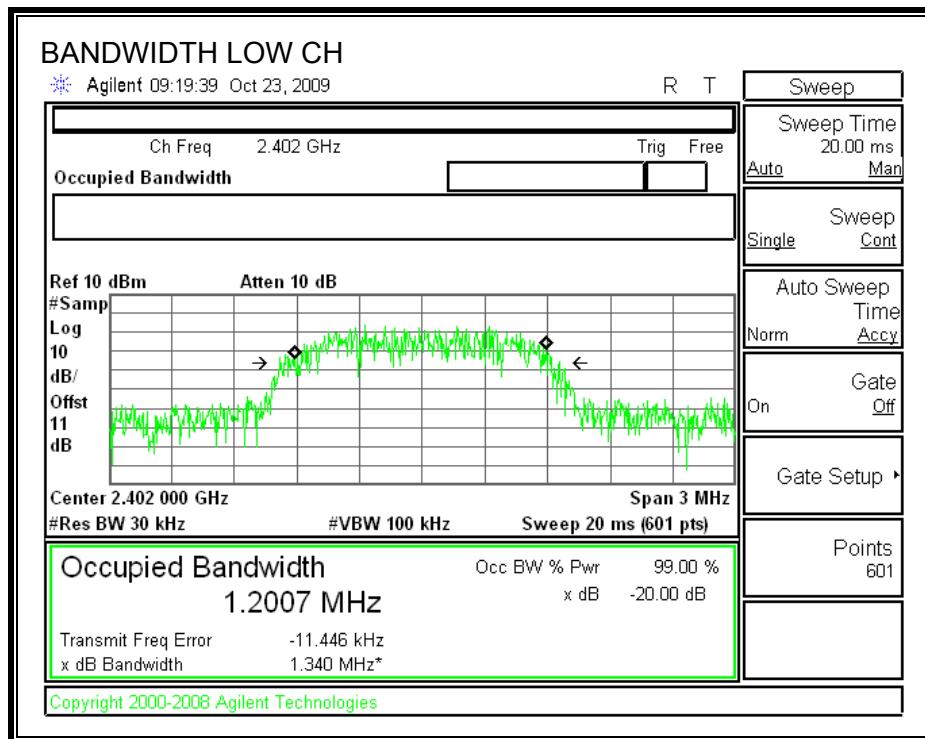

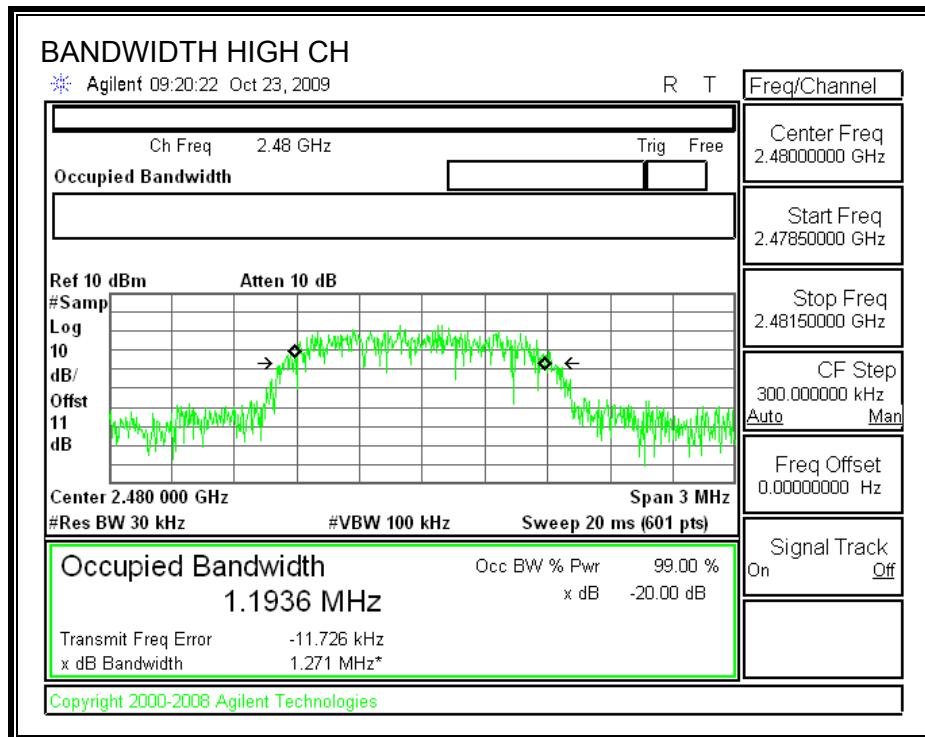

### 7.2.2. 20dB BANDWIDTH

#### LIMIT

None; for reporting purposes only.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.349
Middle	2441	1.345
High	2480	1.348

## 20 dB BANDWIDTH

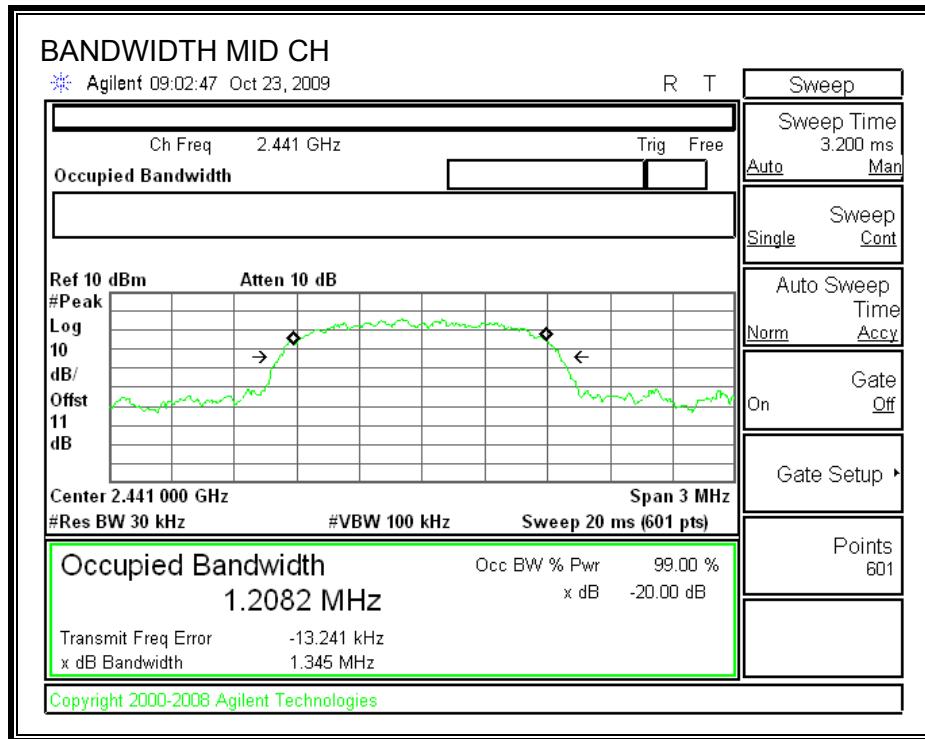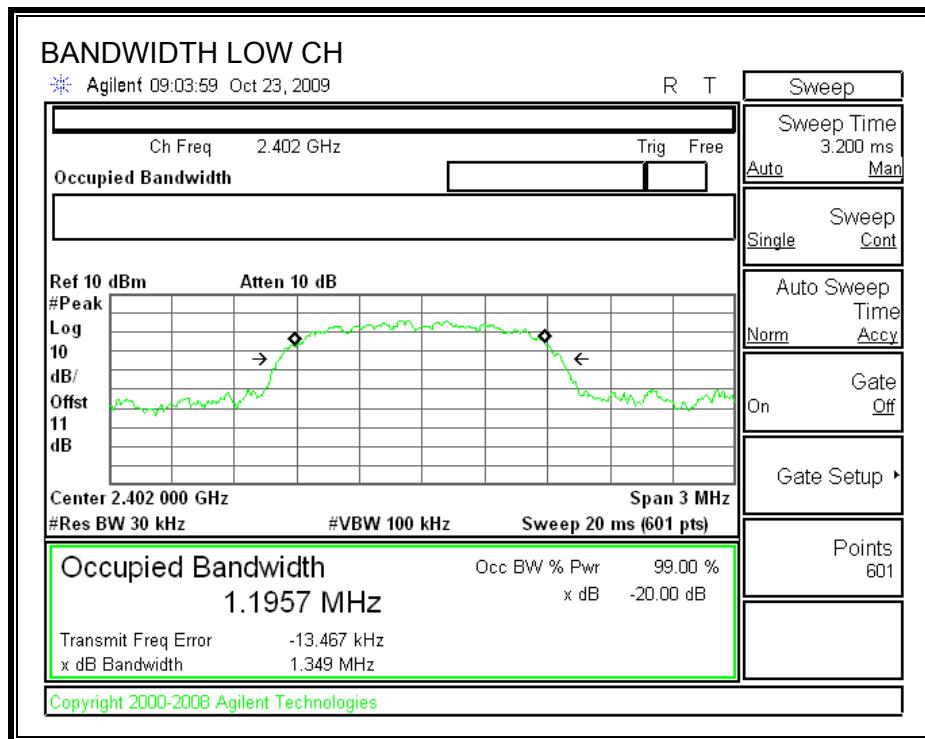

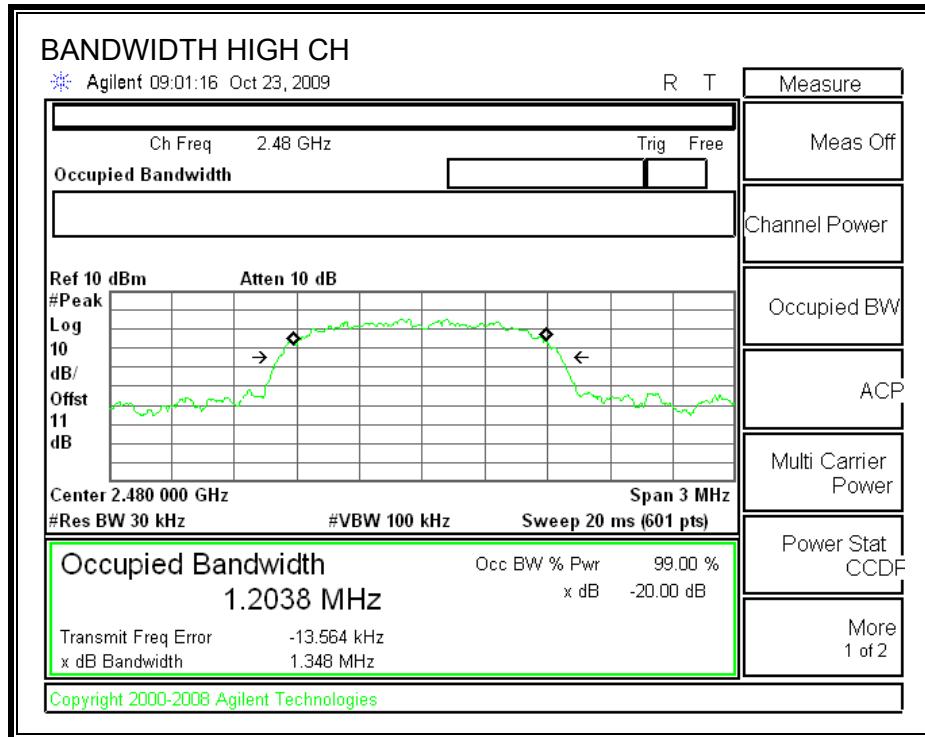

### 7.2.3. HOPPING FREQUENCY SEPARATION

#### LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

#### RESULTS

##### HOPPING FREQUENCY SEPARATION

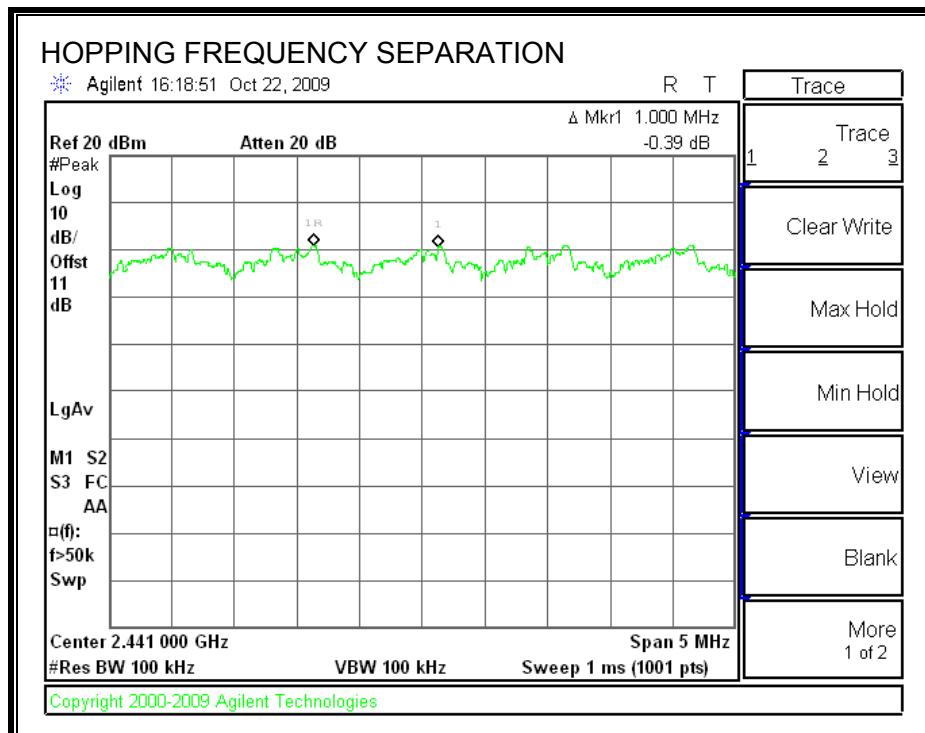

#### **7.2.4. NUMBER OF HOPPING CHANNELS**

##### **LIMIT**

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



##### **TEST PROCEDURE**



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.

##### **RESULTS**

79 Channels observed.

**NUMBER OF HOPPING CHANNELS**

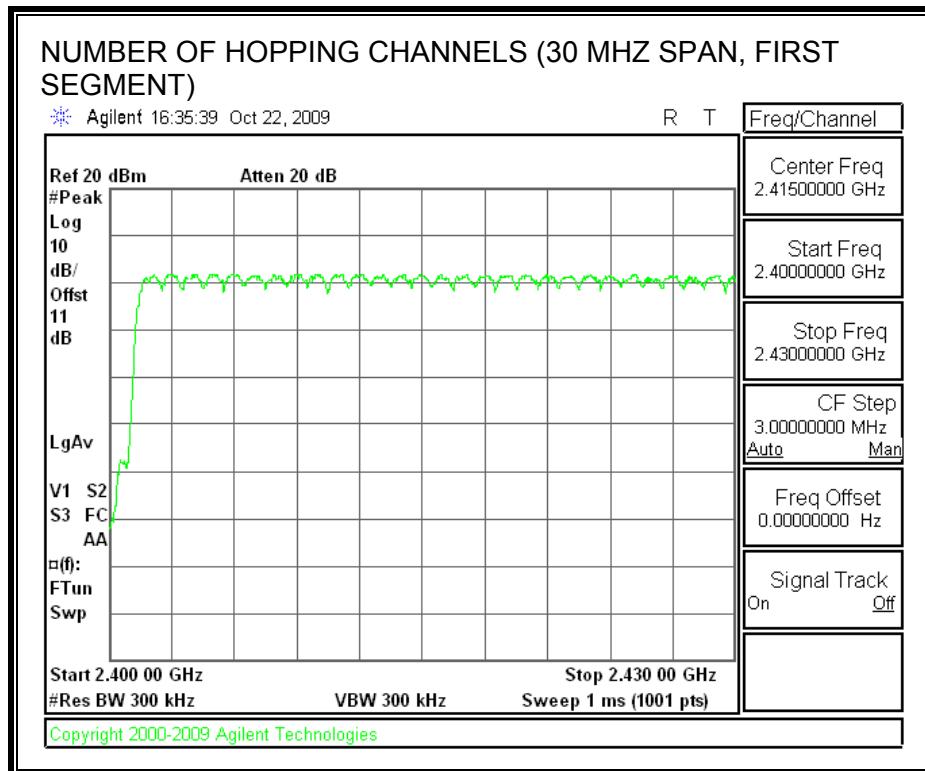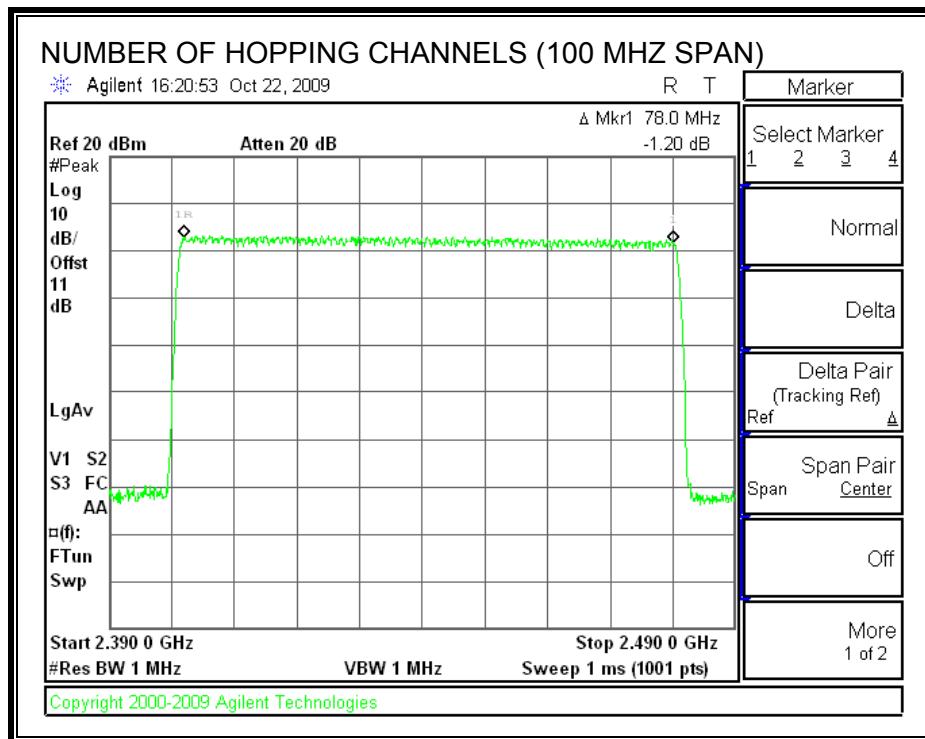

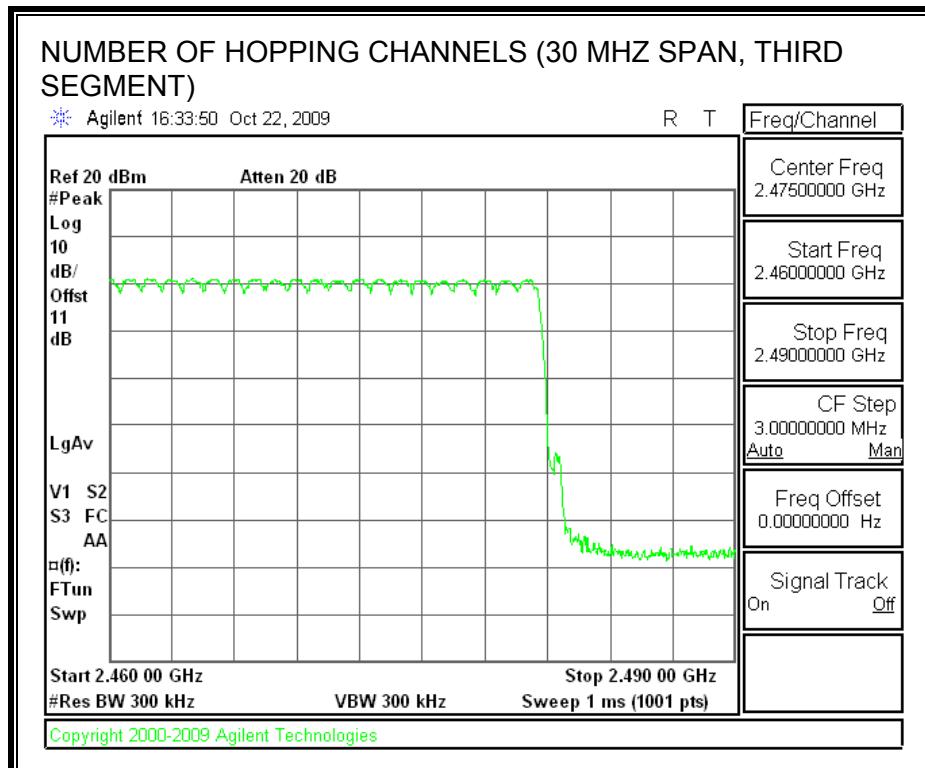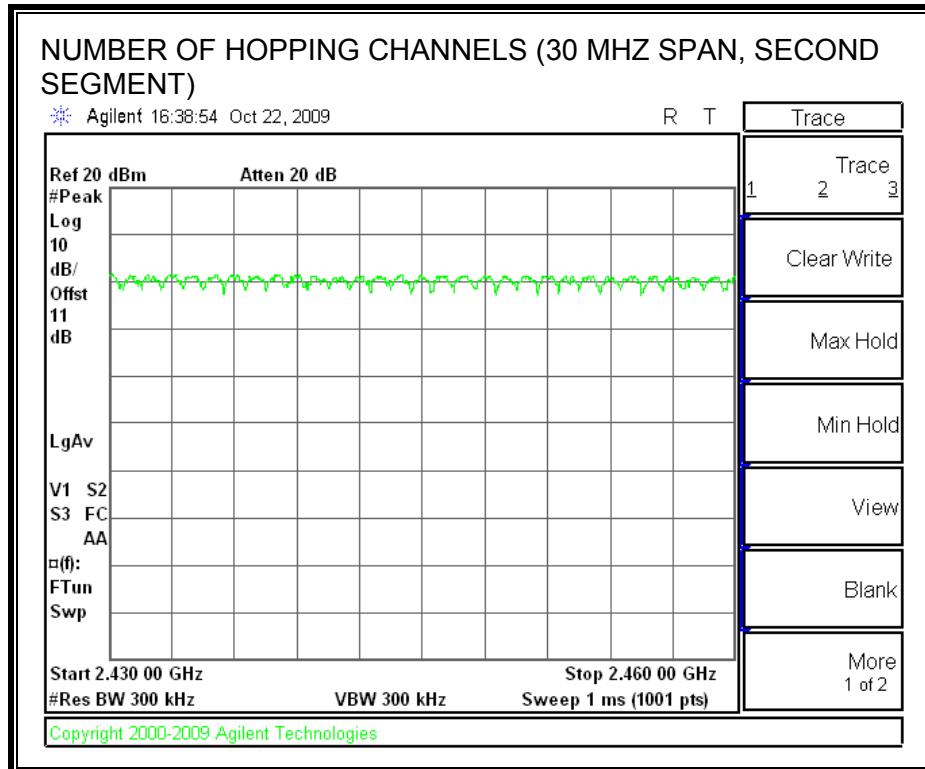

### 7.2.5. AVERAGE TIME OF OCCUPANCY

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 3.16 \text{ s}) * \text{pulse width}$ .


#### RESULTS

##### 8PSK Mode


DH Packet	Pulse Width (msec)	Number of Pulses in 3.16 seconds	Average Time of Occupan cy (sec)	Limit (sec)	Margin (sec)
DH1	0.452	34	0.154	0.4	0.246
DH3	1.705	18	0.307	0.4	0.093
DH5	2.955	11	0.325	0.4	0.075

**DH1**

**PULSE WIDTH**

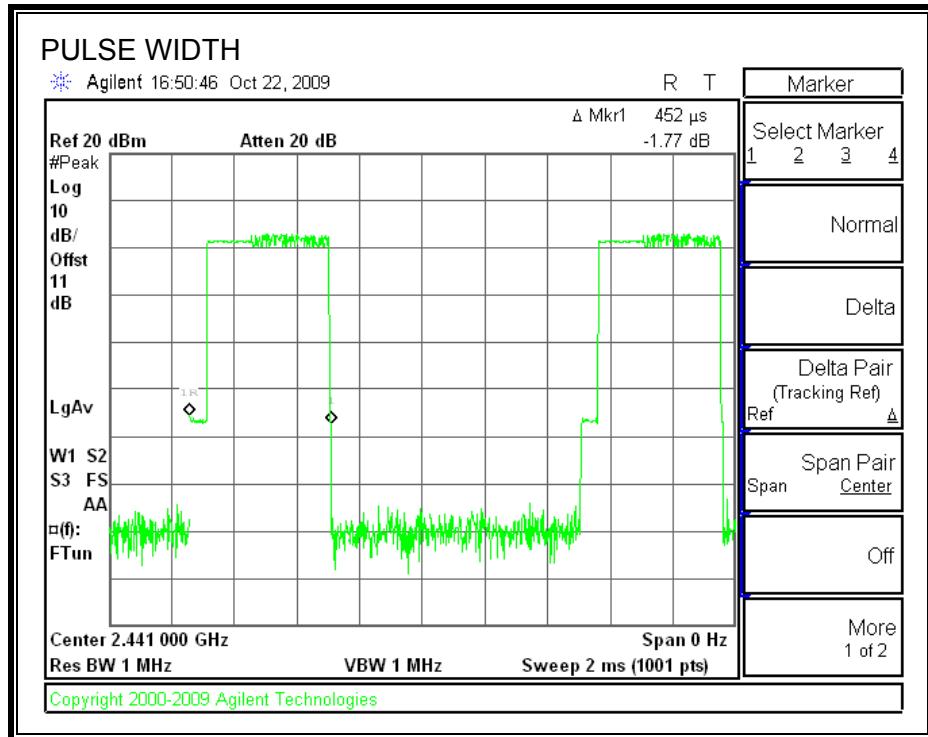


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

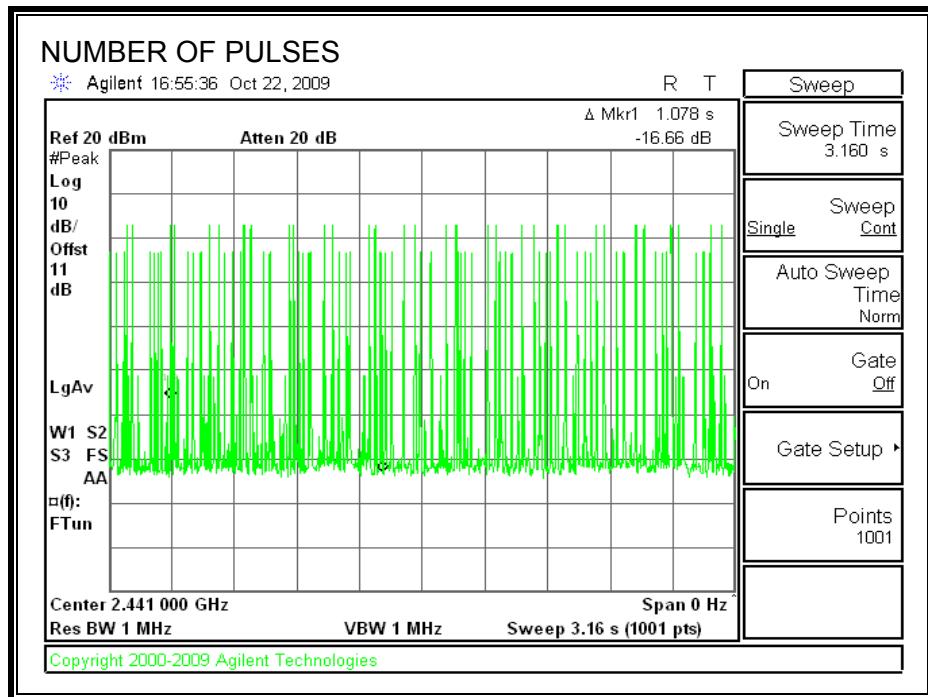


**DH3**

**PULSE WIDTH**

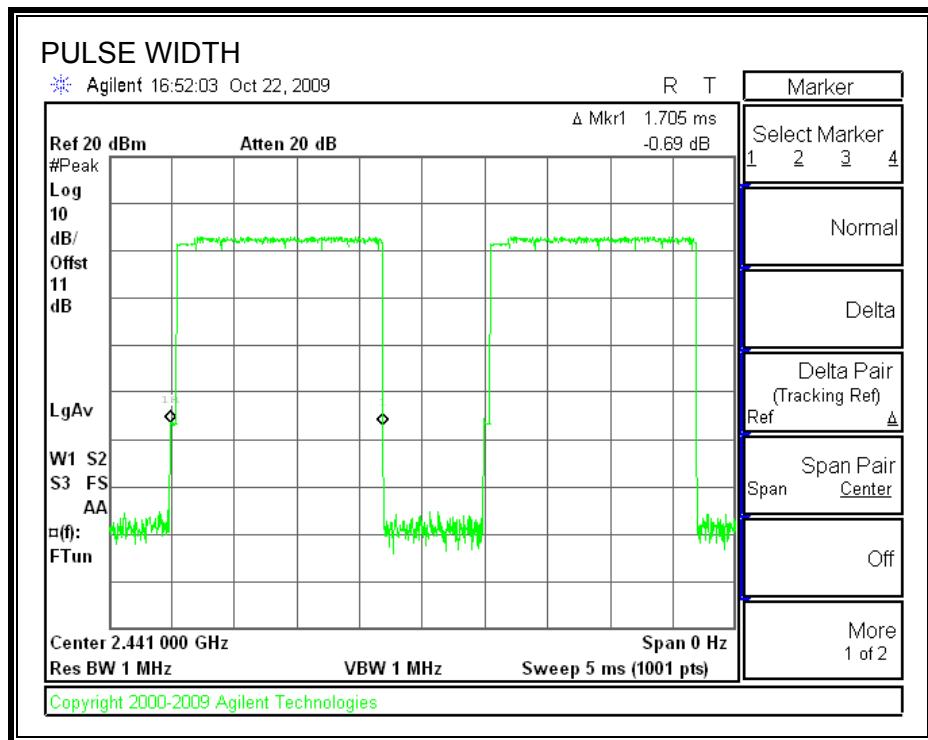


**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

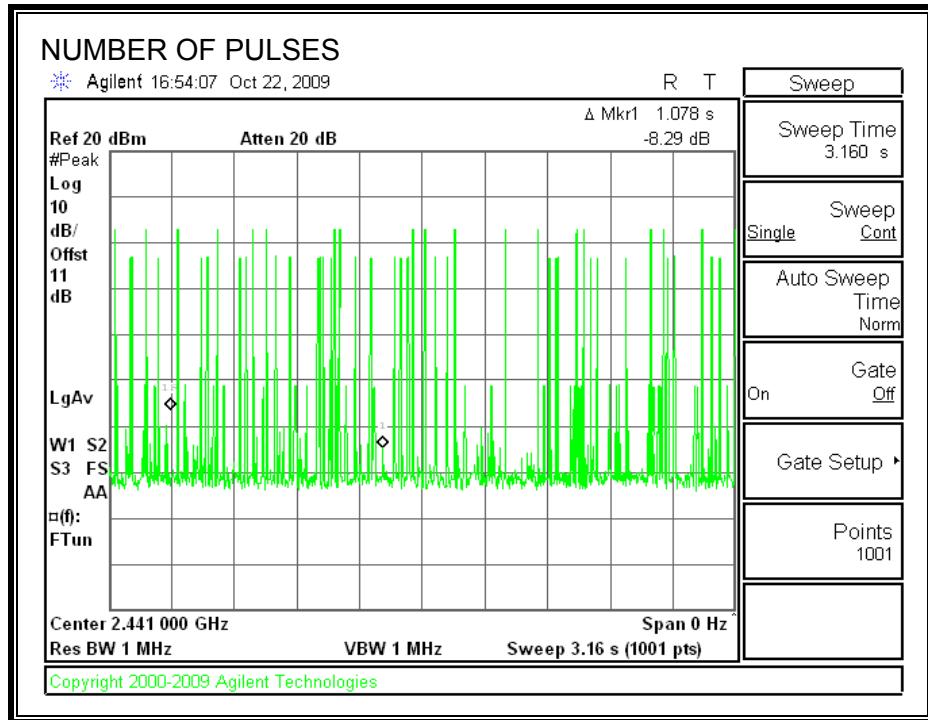


**DH5**

**PULSE WIDTH**

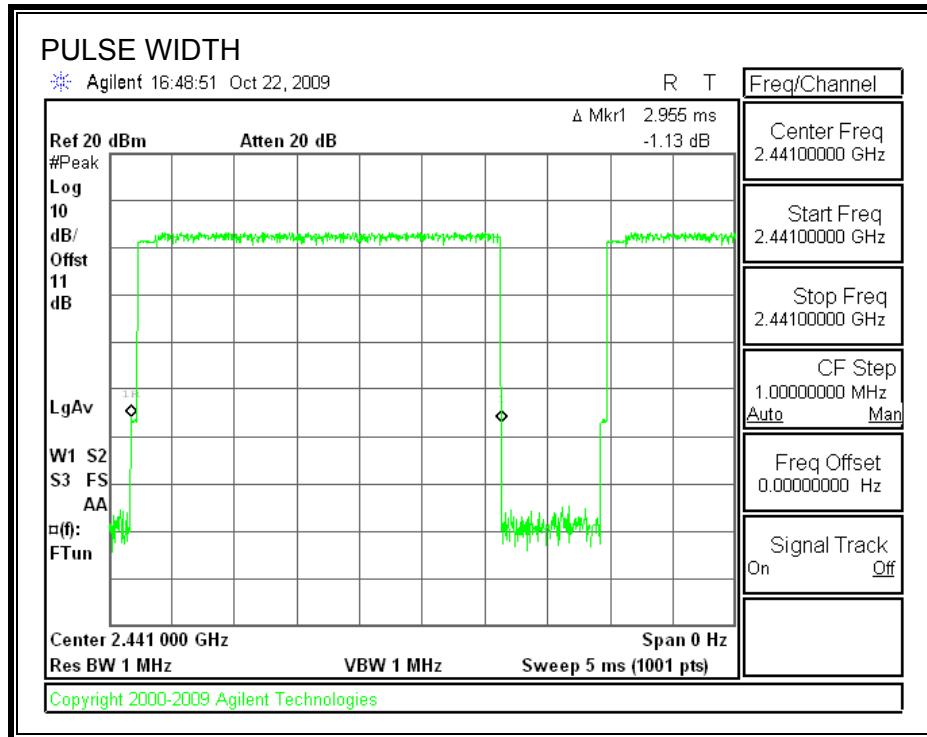

**NUMBER OF PULSES IN 3.16 SECOND OBSERVATION PERIOD**

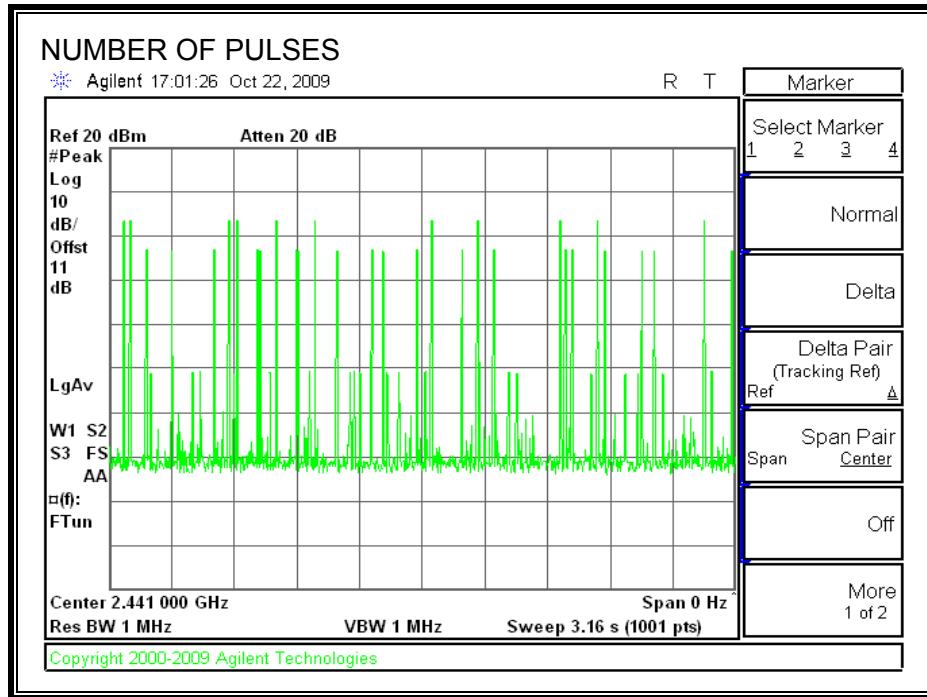

## 7.2.6. OUTPUT POWER

### LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.



### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.

### RESULTS

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	4.46	20.97	-16.51
Middle	2441	4.19	20.97	-16.78
High	2480	3.66	20.97	-17.31

## OUTPUT POWER

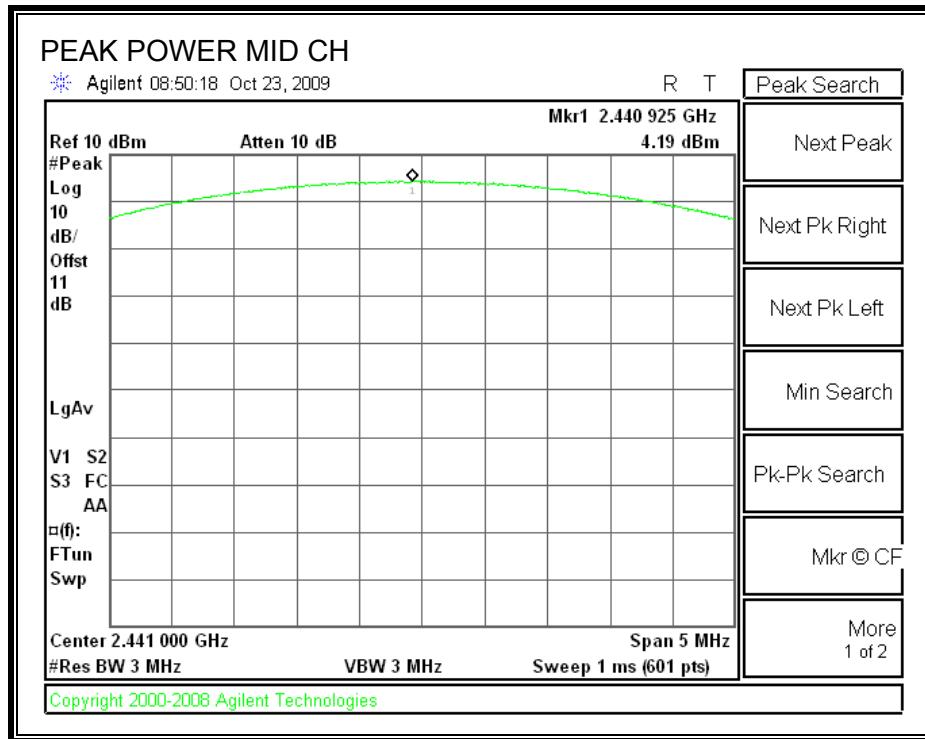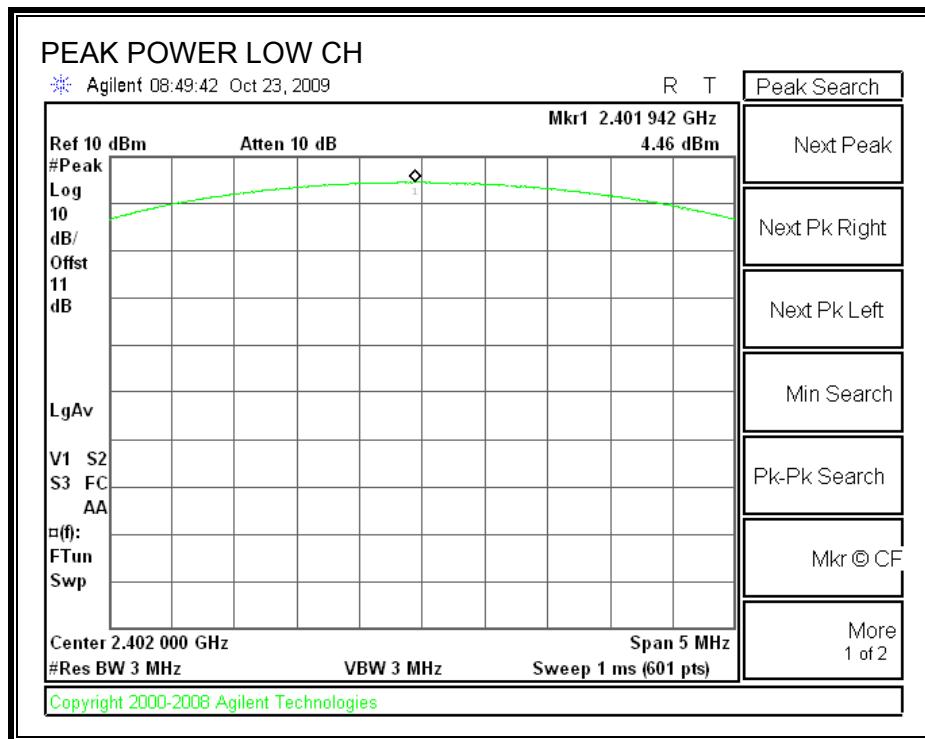

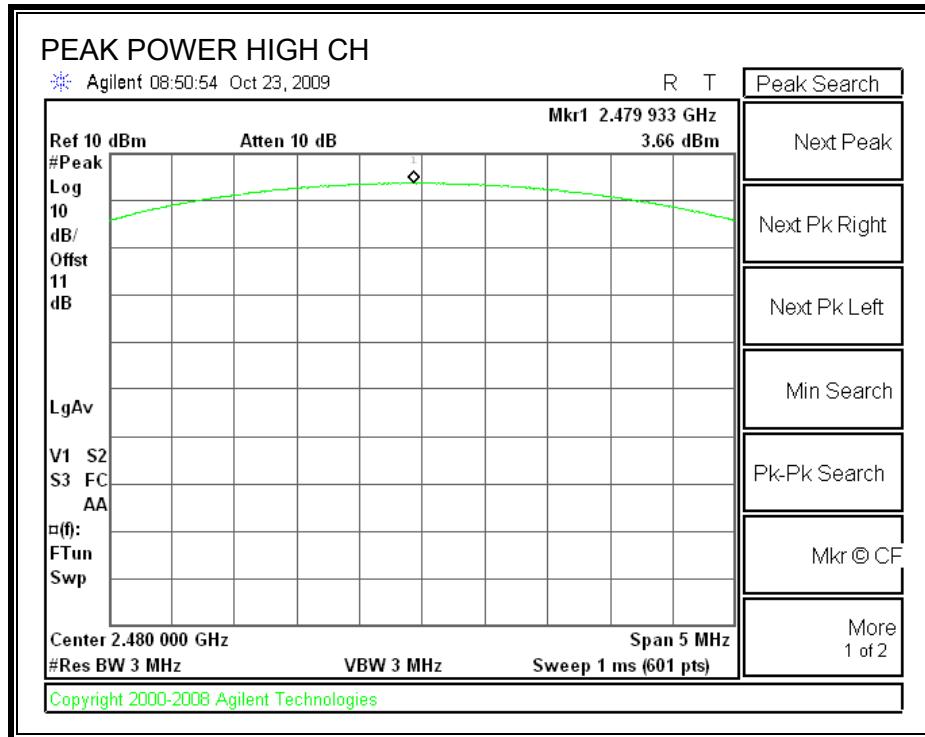

### 7.2.7. CONDUCTED SPURIOUS EMISSIONS

#### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.



The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.

#### RESULTS



SPURIOUS EMISSIONS, LOW CHANNEL

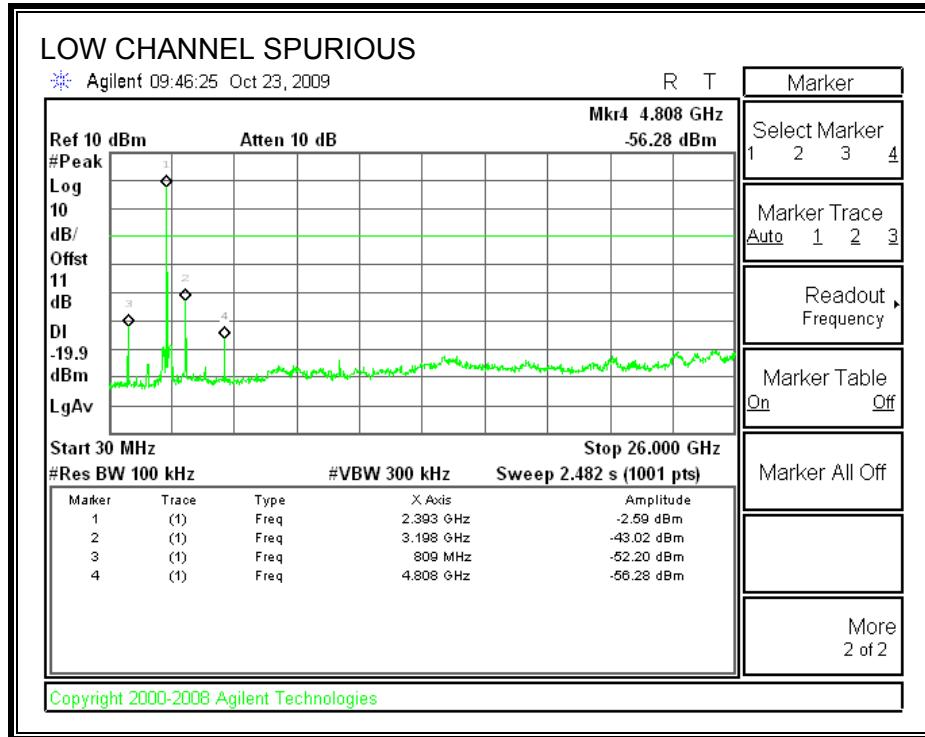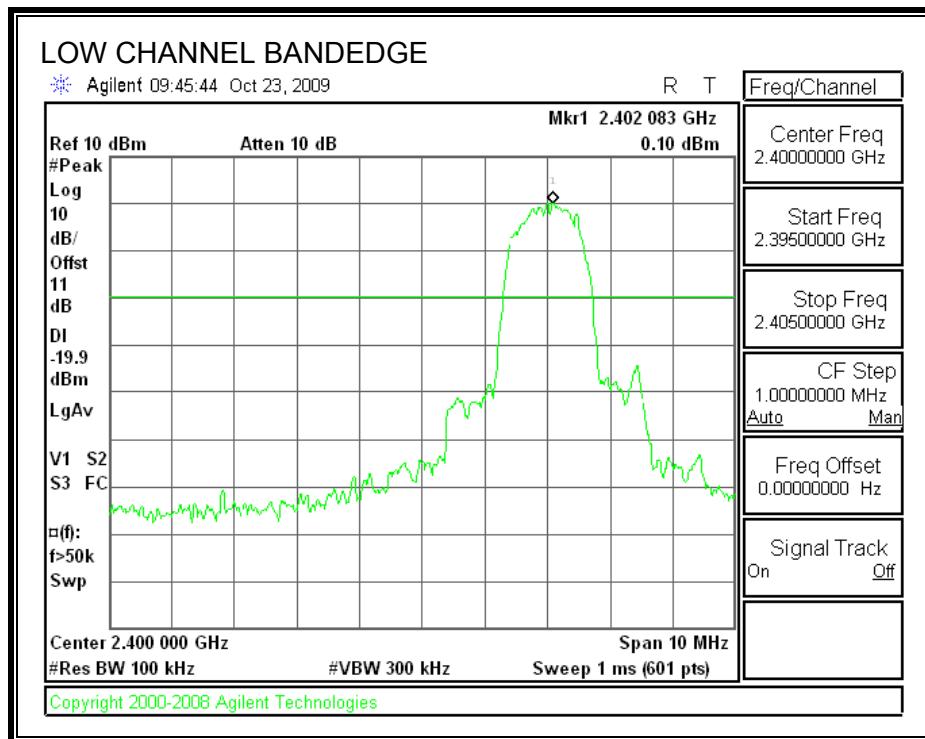



**SPURIOUS EMISSIONS, MID CHANNEL**

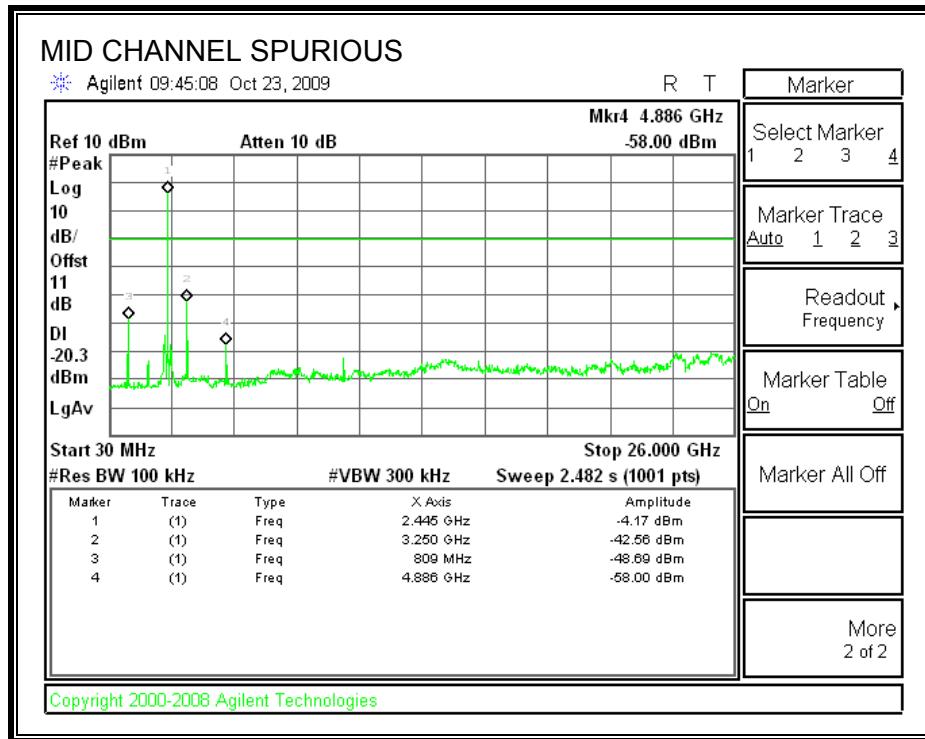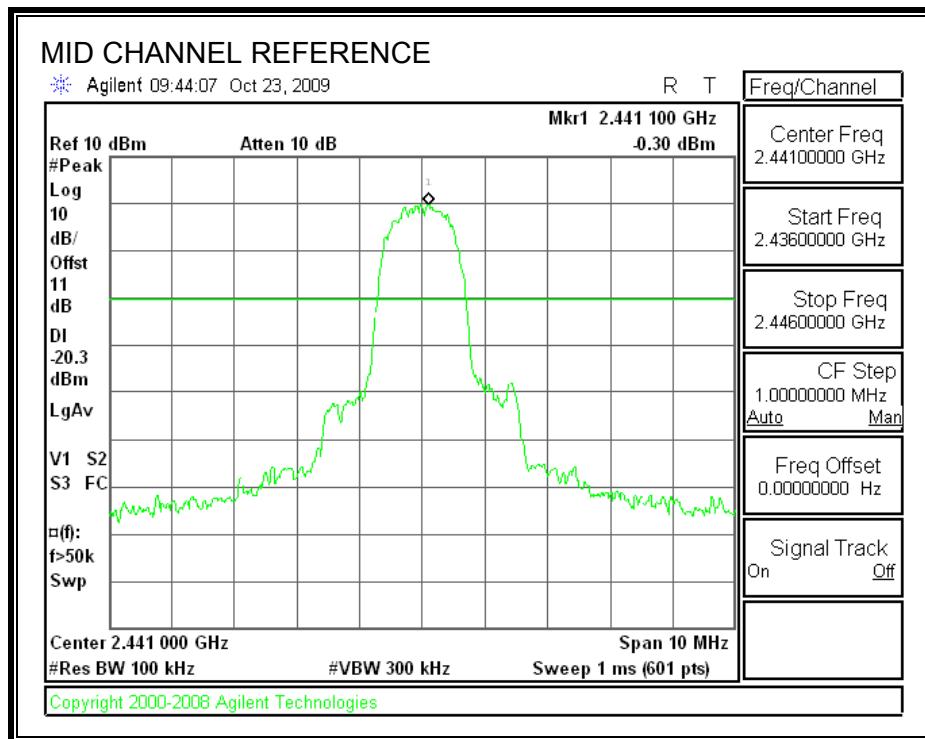

**SPURIOUS EMISSIONS, HIGH CHANNEL**

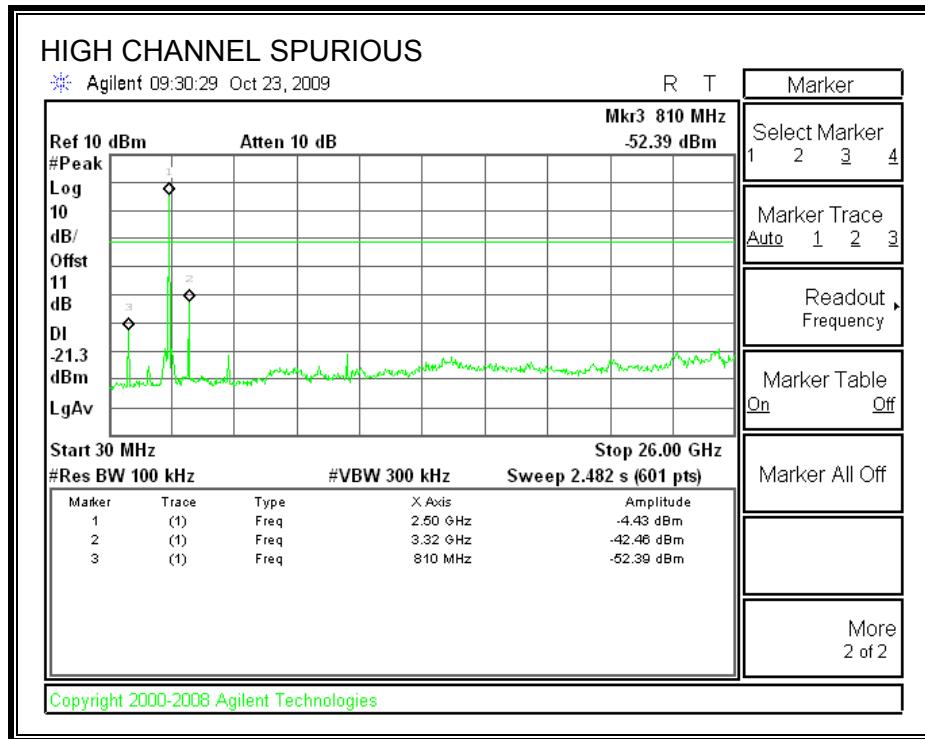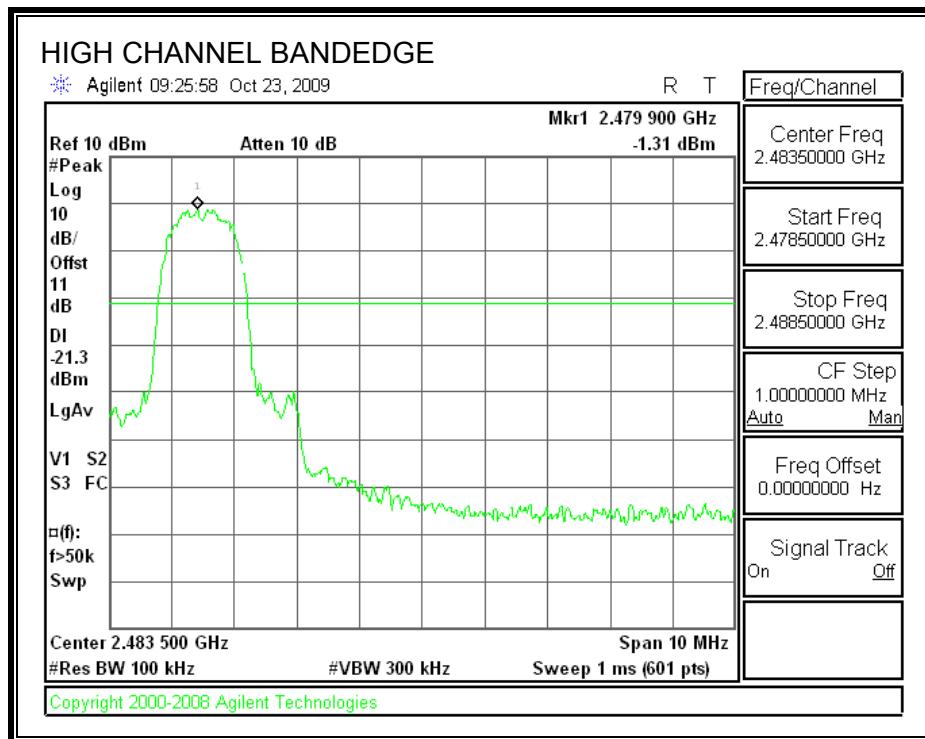

**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

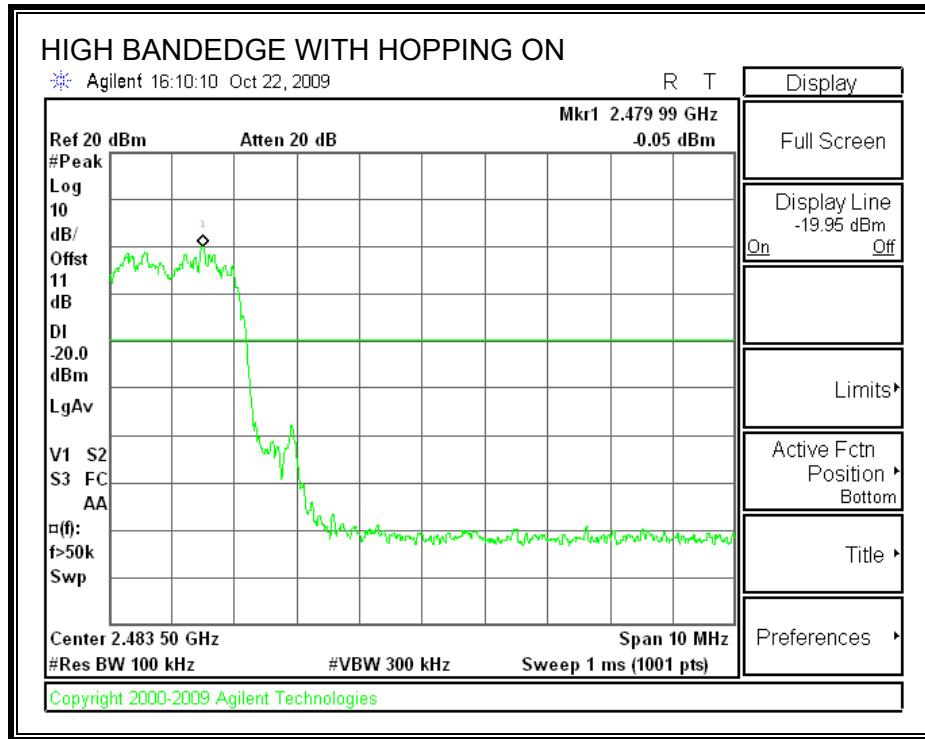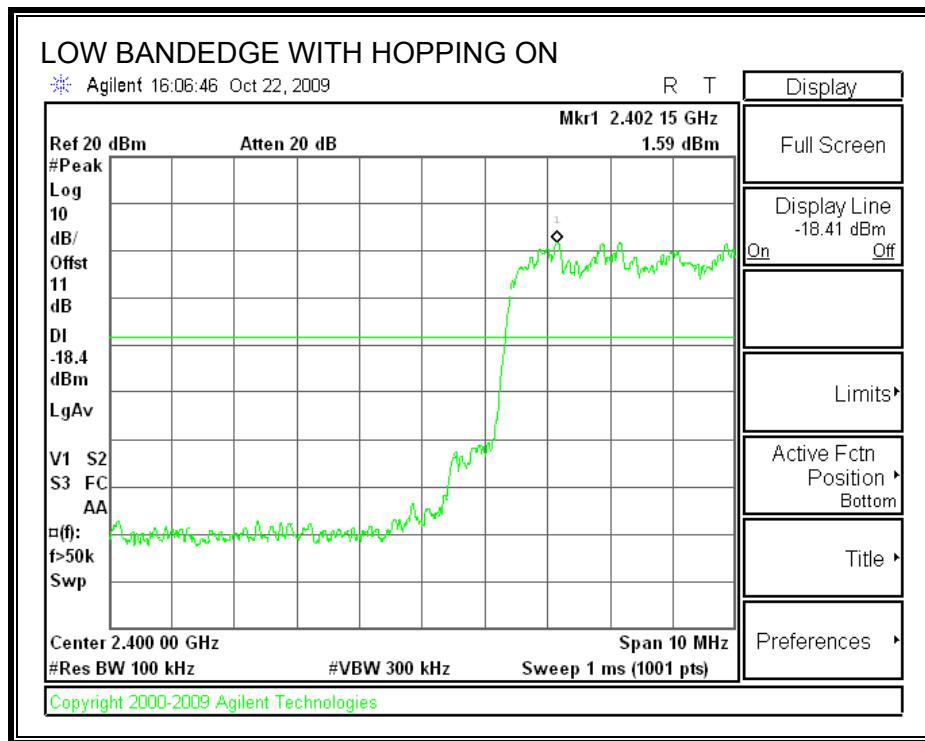

## 7.3. LOW ENERGY (LE) MODULATION

### 7.3.1. 99% BANDWIDTH

#### LIMIT

None; for reporting purposes only.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 99% bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0573
Middle	2440	1.0514
High	2480	1.0264

**99% BANDWIDTH**

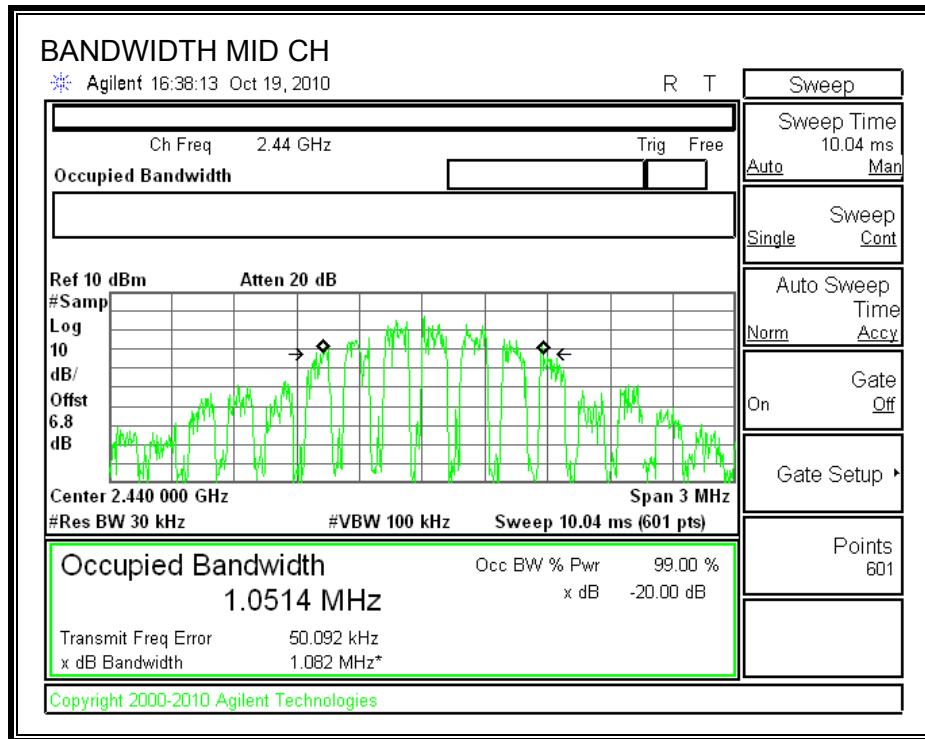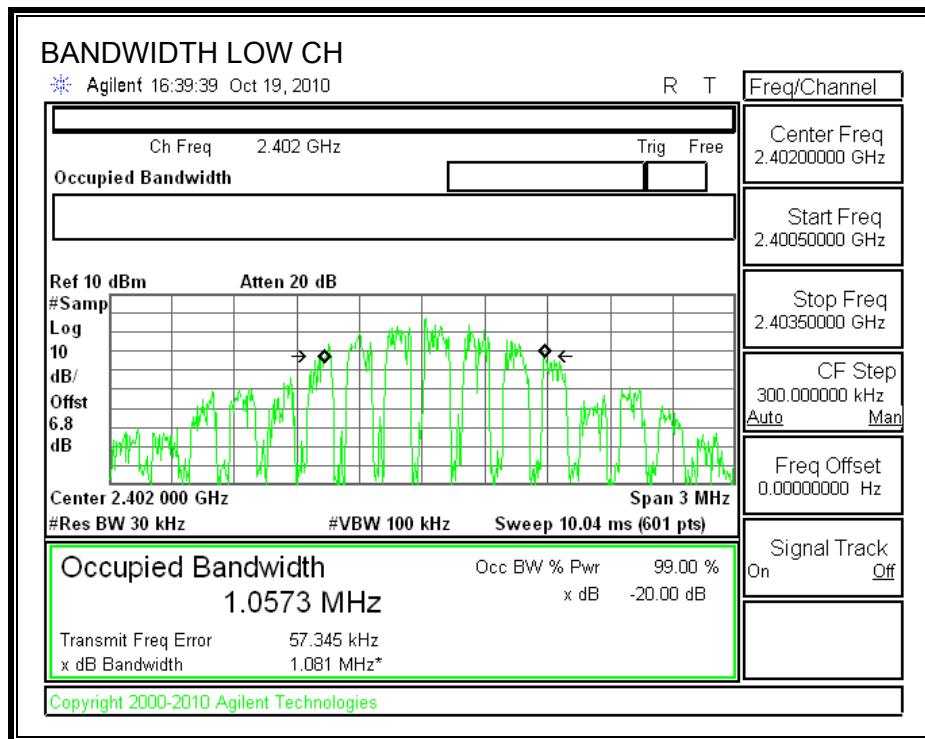

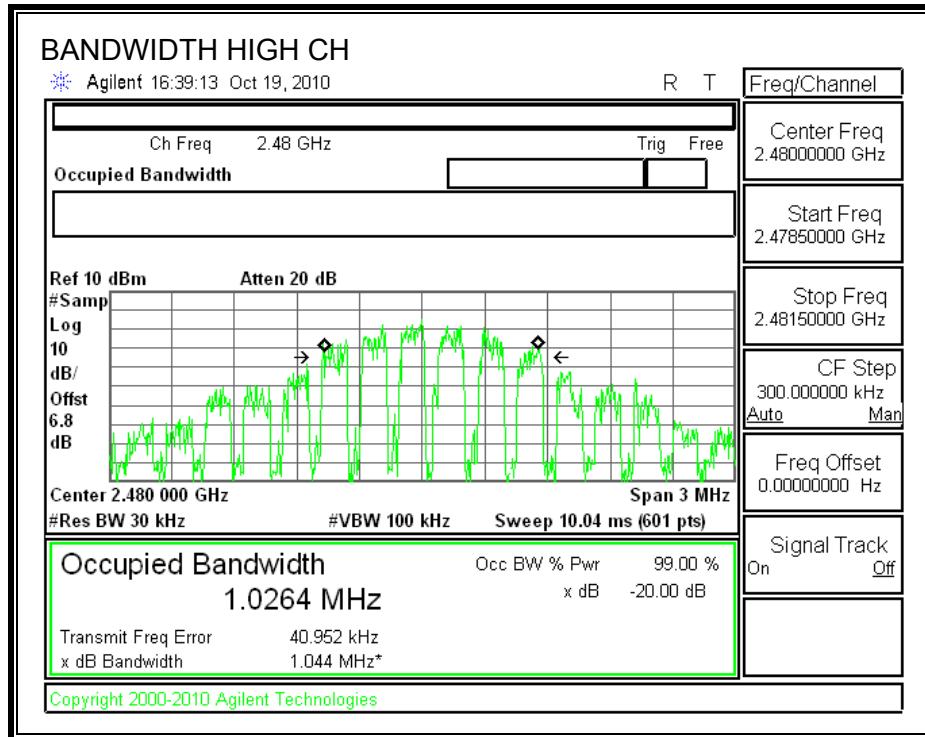

### 7.3.2. 20dB BANDWIDTH

#### LIMIT

None; for reporting purposes only.



#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to  $\geq 1\%$  of the 20dB bandwidth. The VBW is set to  $\geq$  RBW. The sweep time is coupled.

#### RESULTS

Channel	Frequency (MHz)	20 dB Bandwidth (MHz)
Low	2402	1.116
Middle	2440	1.114
High	2480	1.126

## 20 dB BANDWIDTH

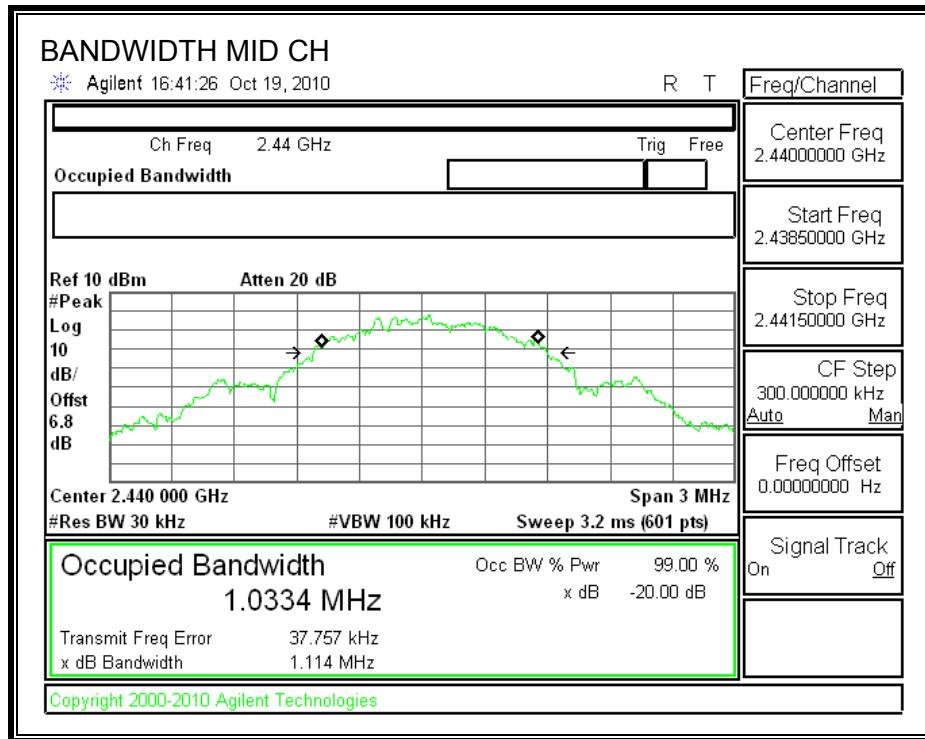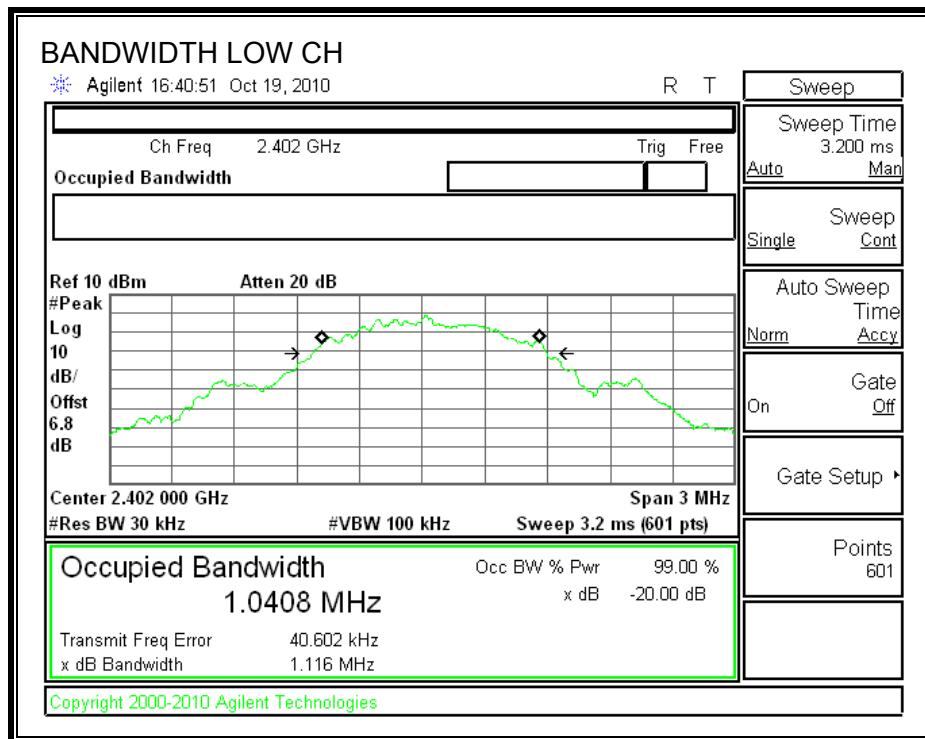

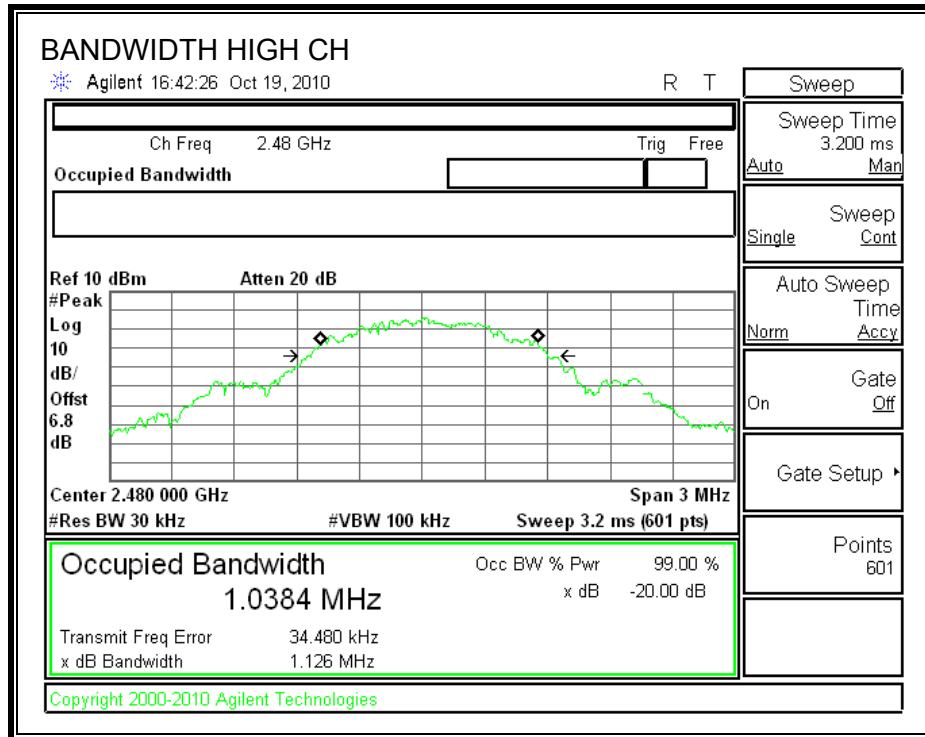

### 7.3.3. HOPPING FREQUENCY SEPARATION

#### LIMIT

FCC §15.247 (a) (1)

IC RSS-210 A8.1 (b)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 100 kHz. The sweep time is coupled.

#### RESULTS

##### HOPPING FREQUENCY SEPARATION

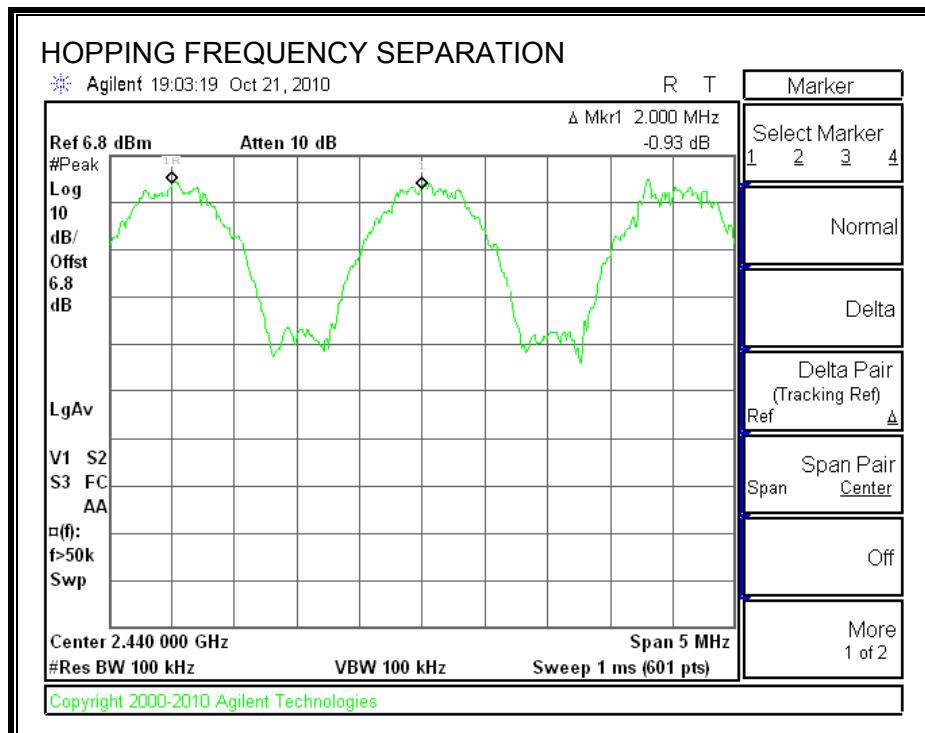

### 7.3.4. NUMBER OF HOPPING CHANNELS

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

Frequency hopping systems in the 2400 – 2483.5 MHz band shall use at least 15 non-overlapping channels.



#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer. The span is set to cover the entire authorized band, in either a single sweep or in multiple contiguous sweeps. The RBW is set to a maximum of 1 % of the span. The analyzer is set to Max Hold.


#### RESULTS

Please see advertising channels for 2402, 2426, and 2480MHz explanation in separated document.

**NUMBER OF HOPPING CHANNELS**

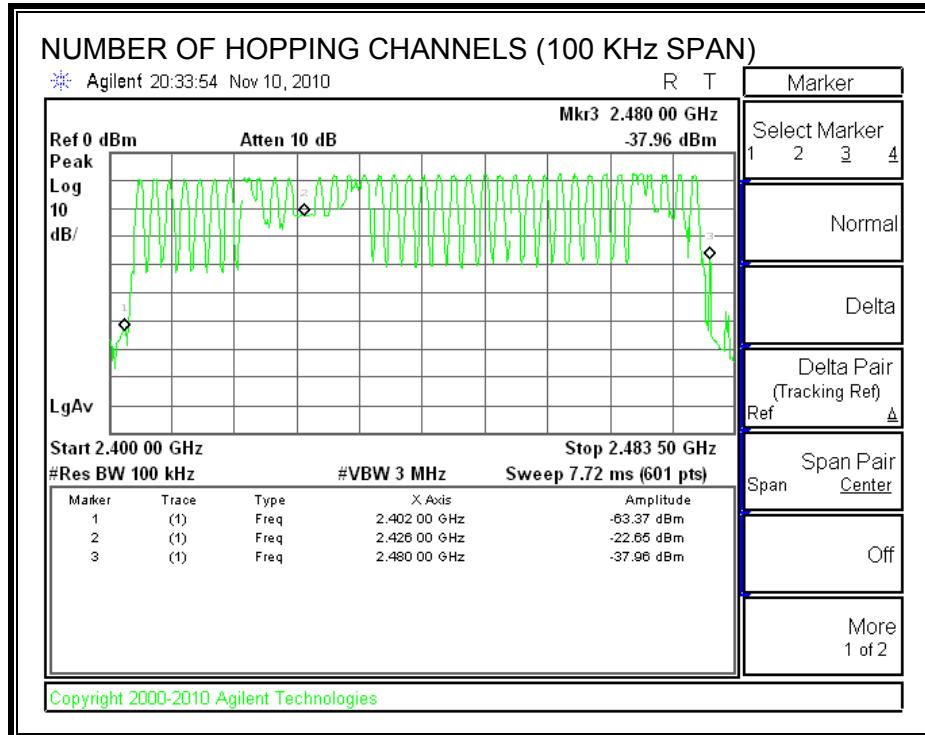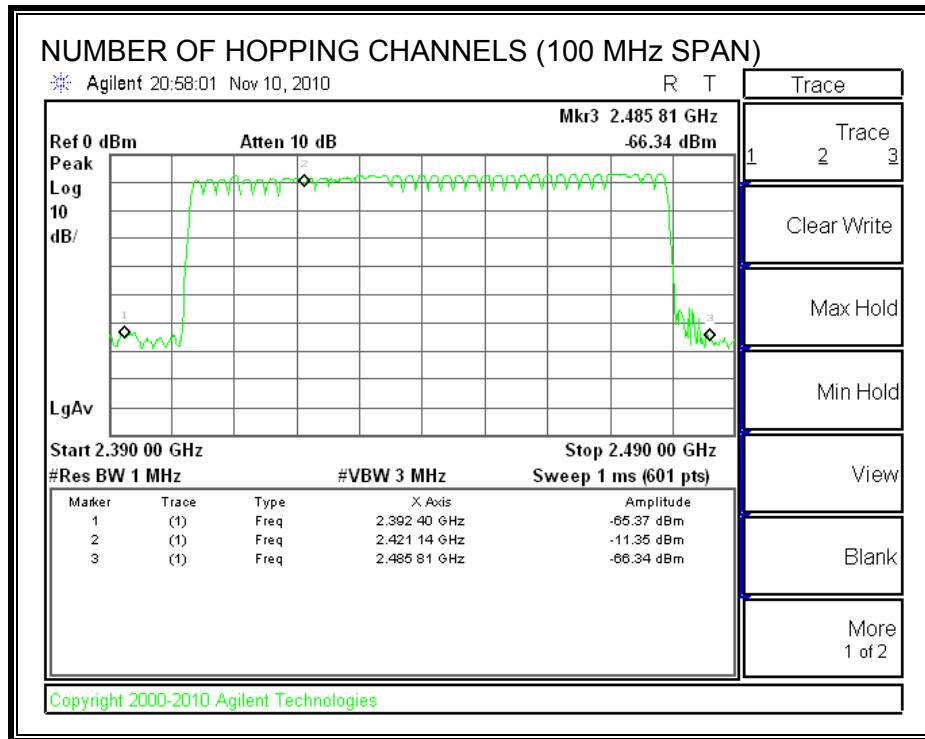

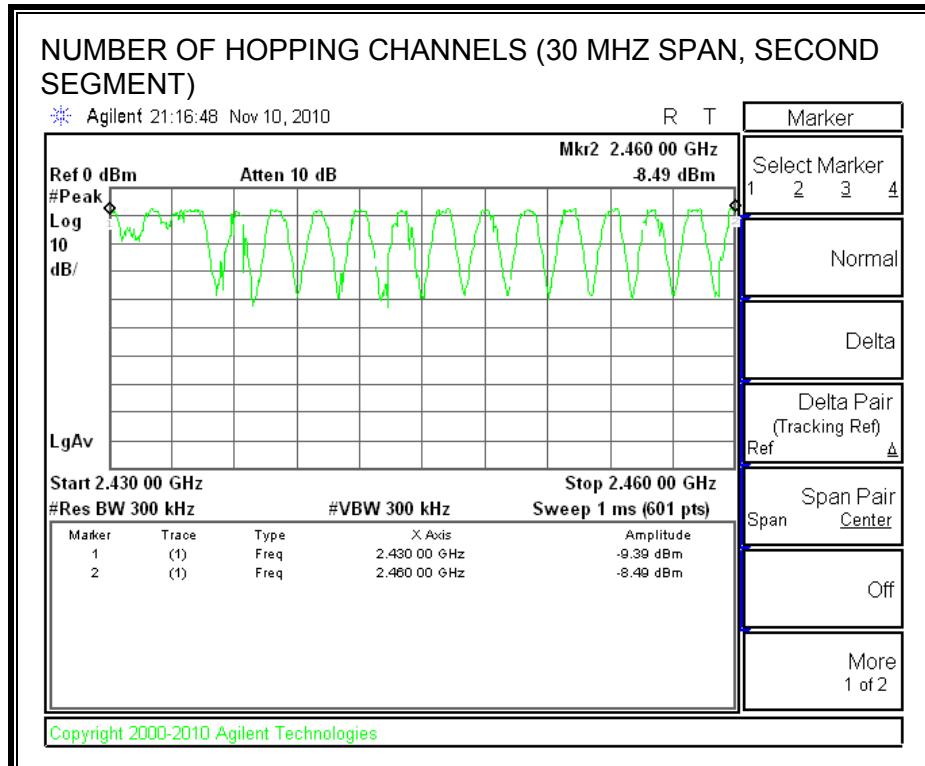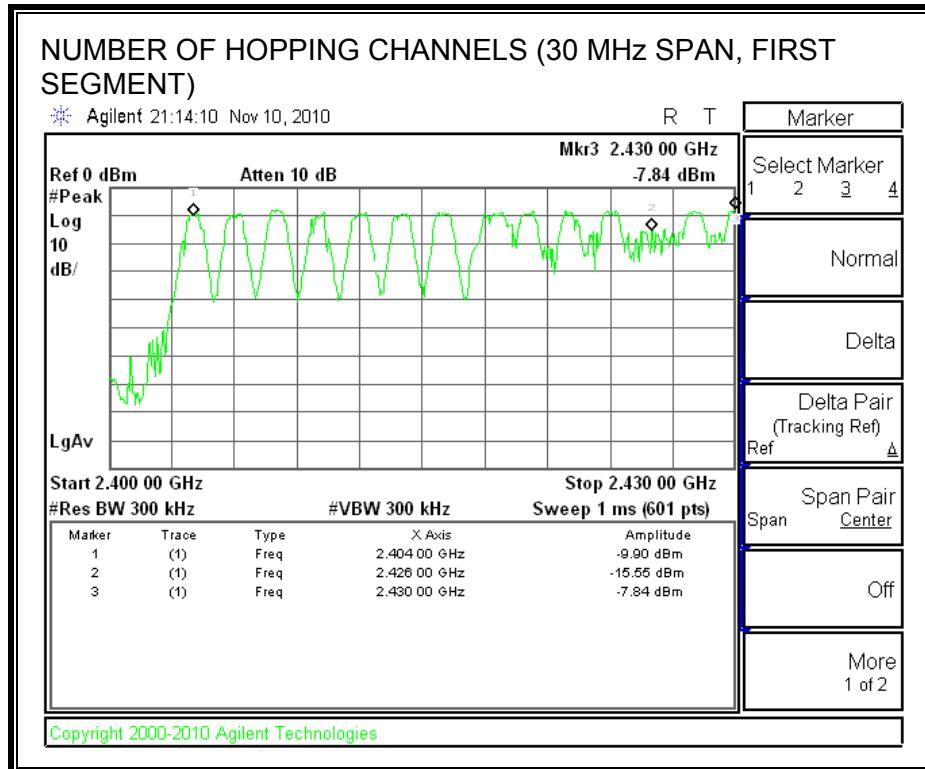

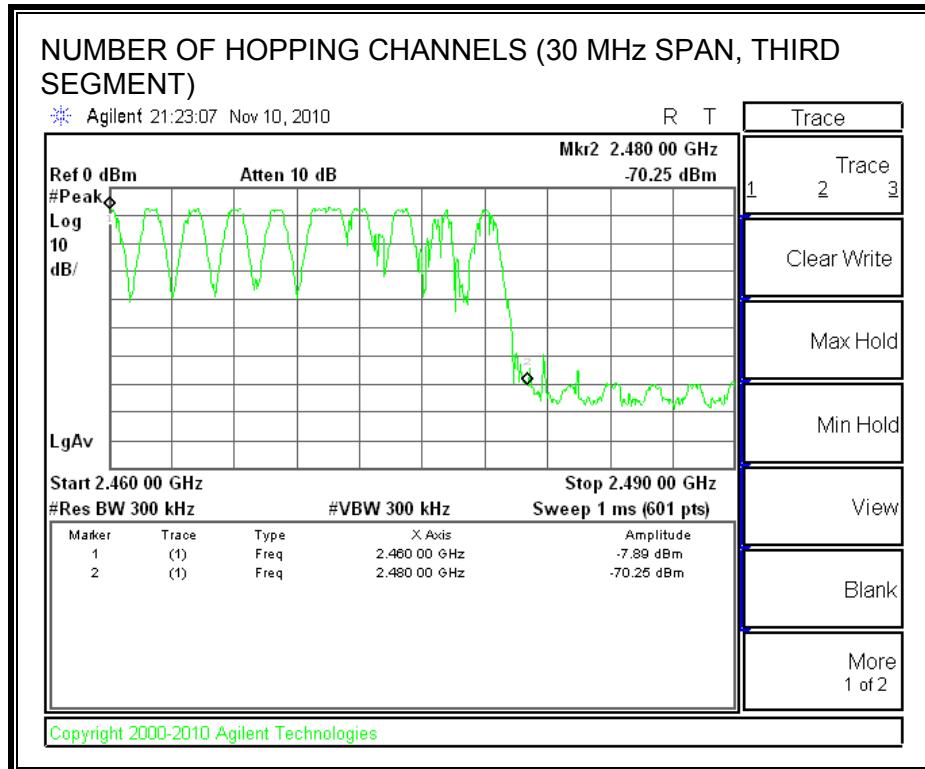

### 7.3.5. AVERAGE TIME OF OCCUPANCY

#### LIMIT

FCC §15.247 (a) (1) (iii)

IC RSS-210 A8.1 (d)

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

#### TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 1.60 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 1.60 second period (40 channels \* 0.4 s) is equal to  $10 * (\# \text{ of pulses in } 1.60 \text{ s}) * \text{pulse width}$ .


#### RESULTS

Pulse Width (msec)	Number of Pulses in 1.6 seconds	Average Time of (sec)	Limit (sec)	Margin (sec)
0.485	4	0.019	0.4	0.381

## PULSE WIDTH

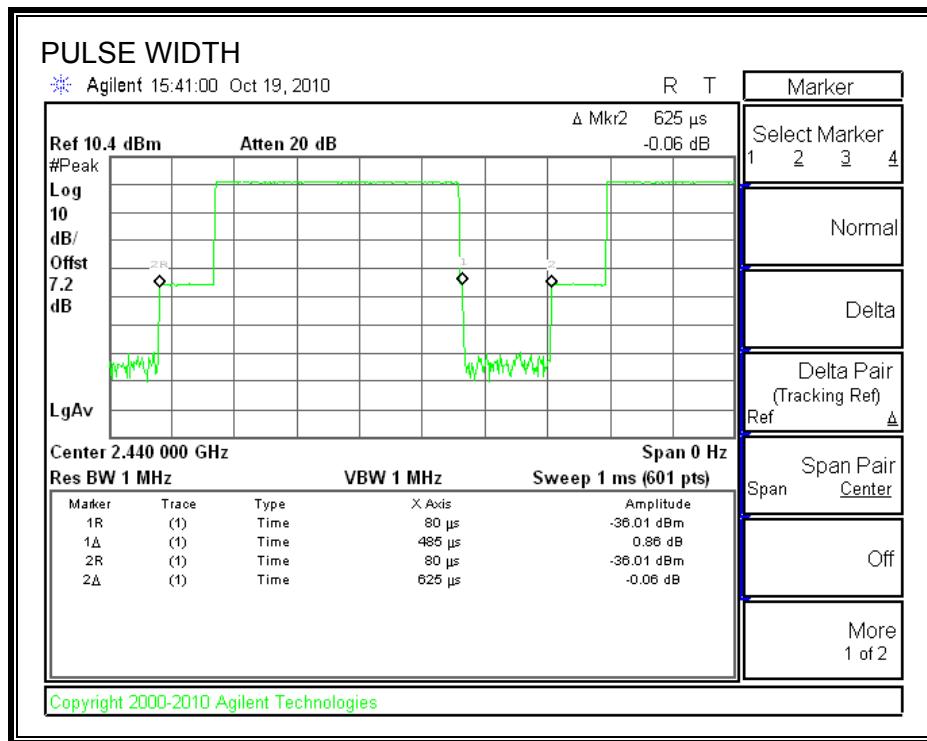

## NUMBER OF PULSES IN 1.60 SECOND OBSERVATION PERIOD

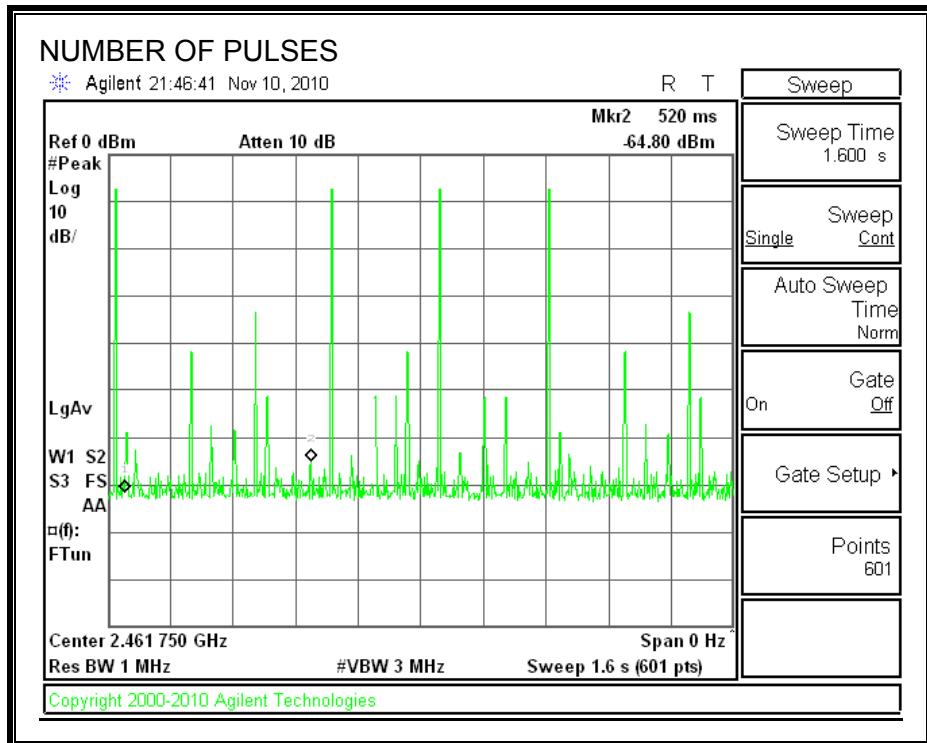

### 7.3.6. OUTPUT POWER

#### LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

#### TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


#### RESULTS

LE MODE

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	1.36	30	-28.64
Middle	2440	1.22	30	-28.78
High	2480	0.68	30	-29.32

**LE MODE**

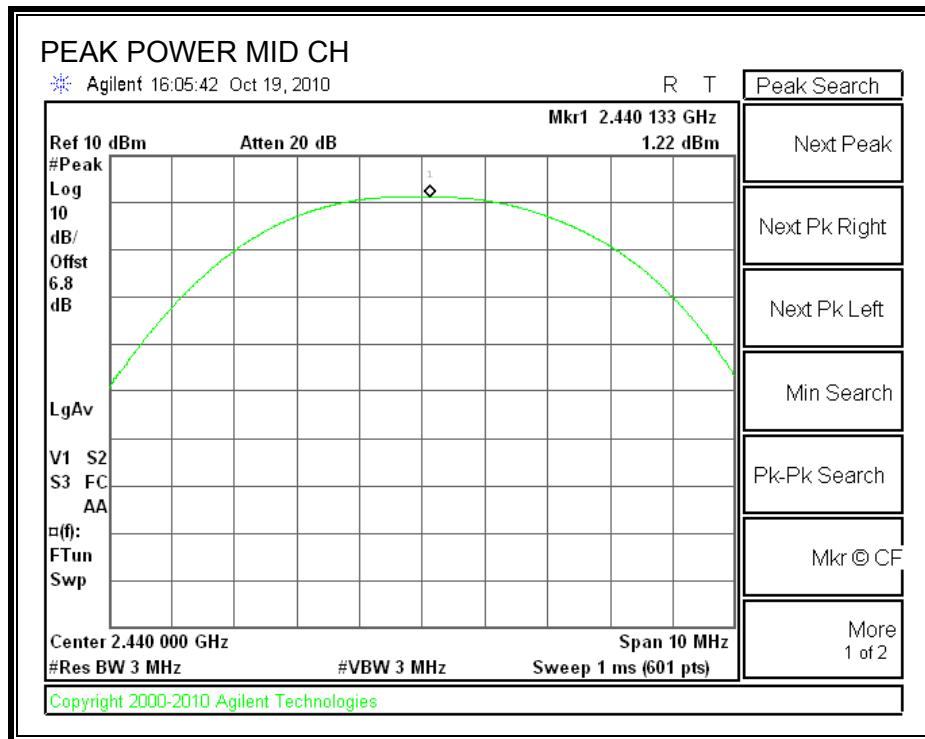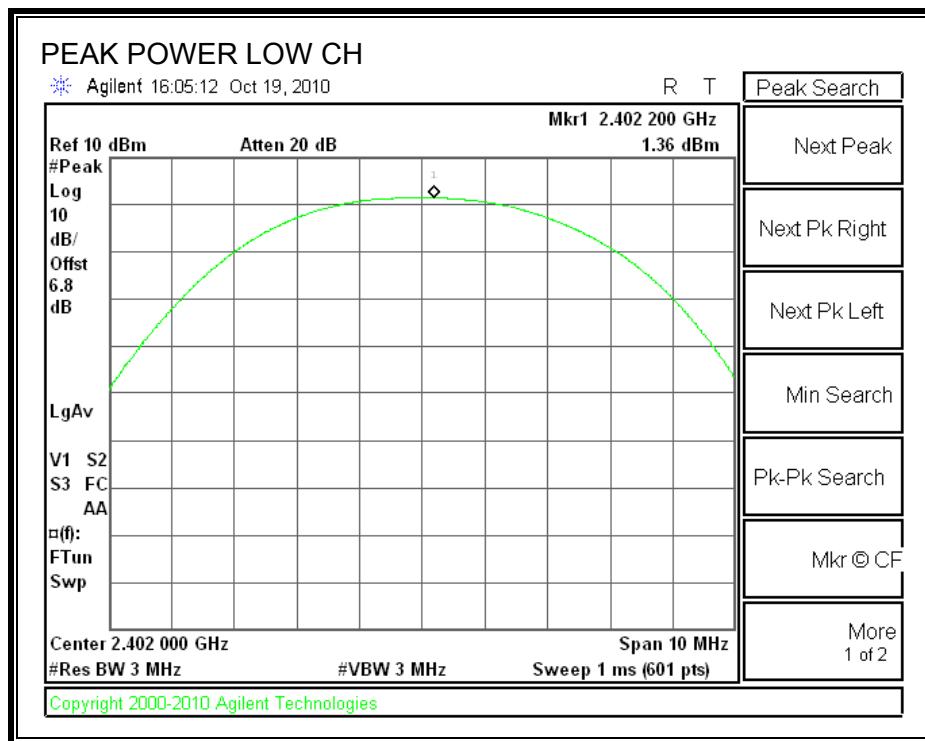

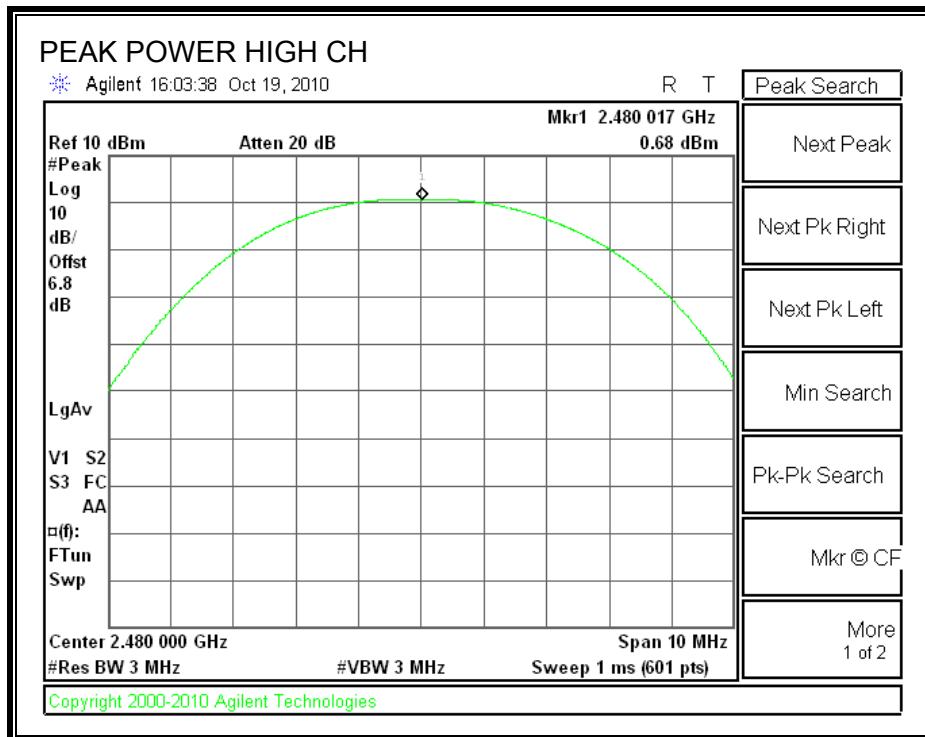

### 7.3.7. CONDUCTED SPURIOUS EMISSIONS

#### LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

#### TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



#### RESULTS

## LE MODE



### SPURIOUS EMISSIONS, LOW CHANNEL

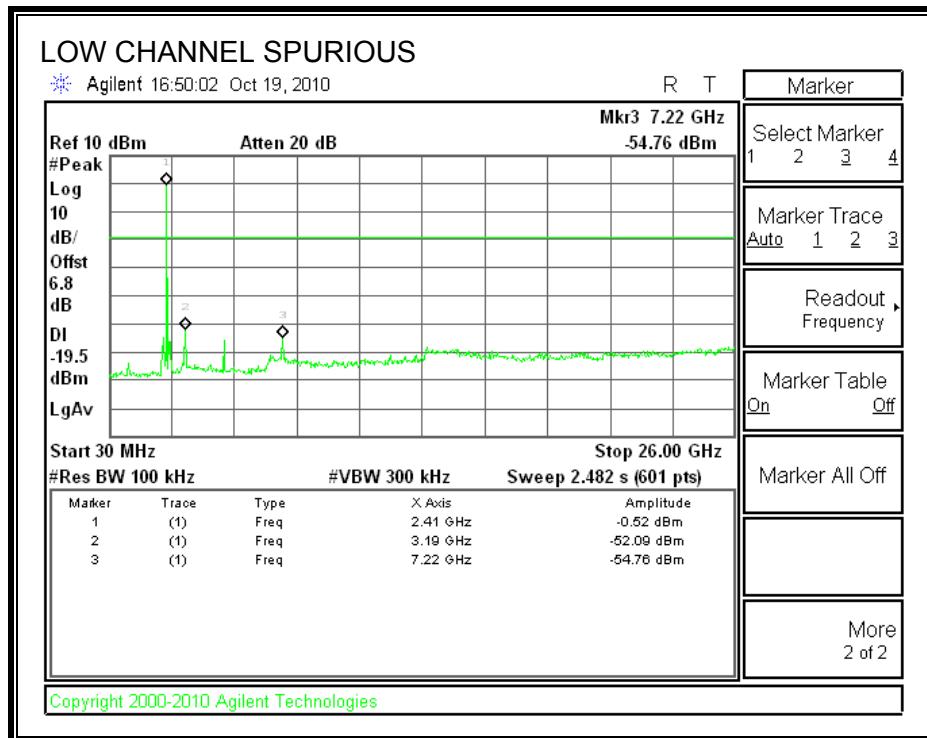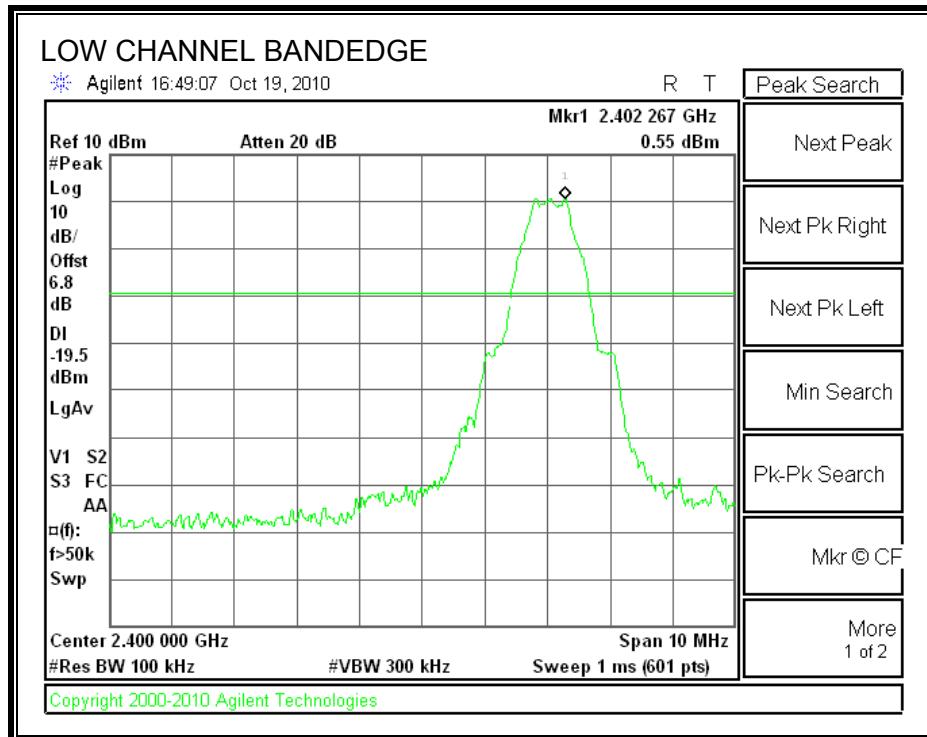



**SPURIOUS EMISSIONS, MID CHANNEL**

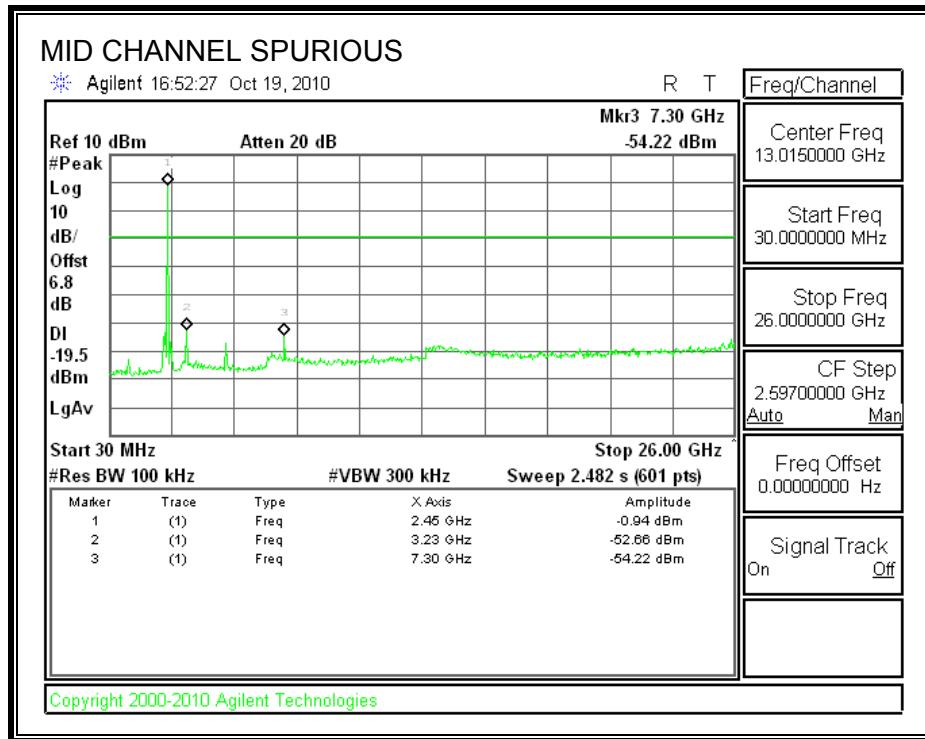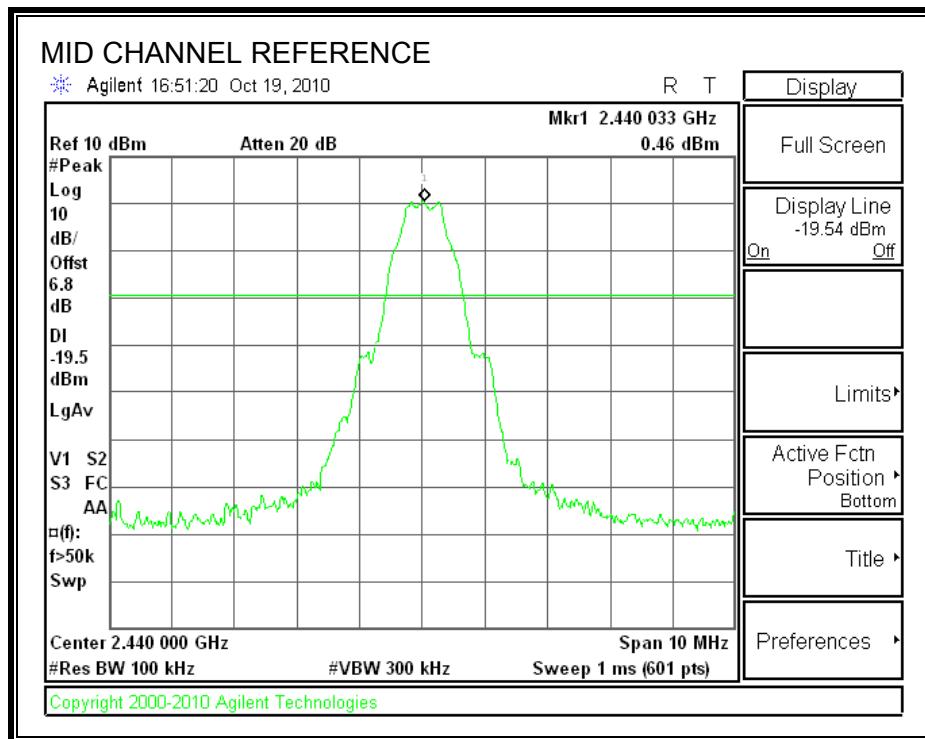

**SPURIOUS EMISSIONS, HIGH CHANNEL**

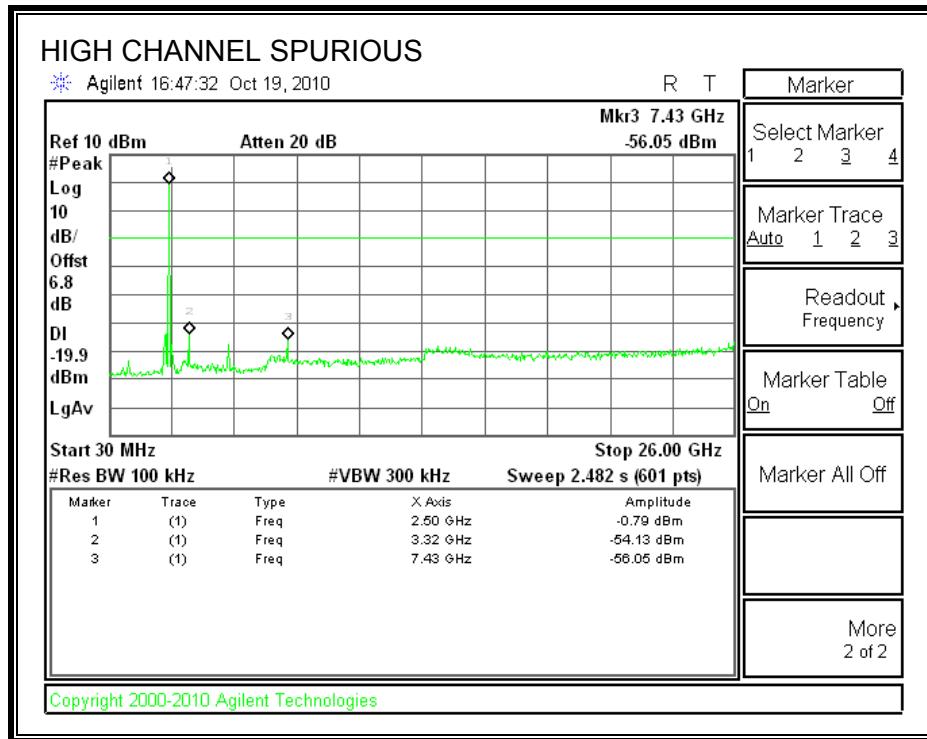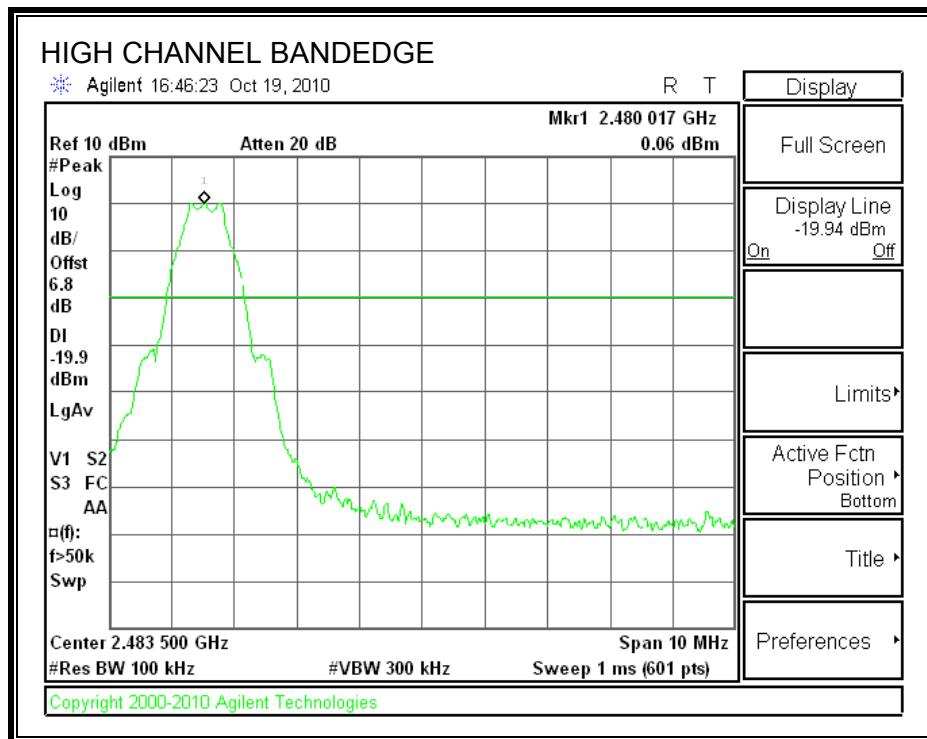

**SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON**

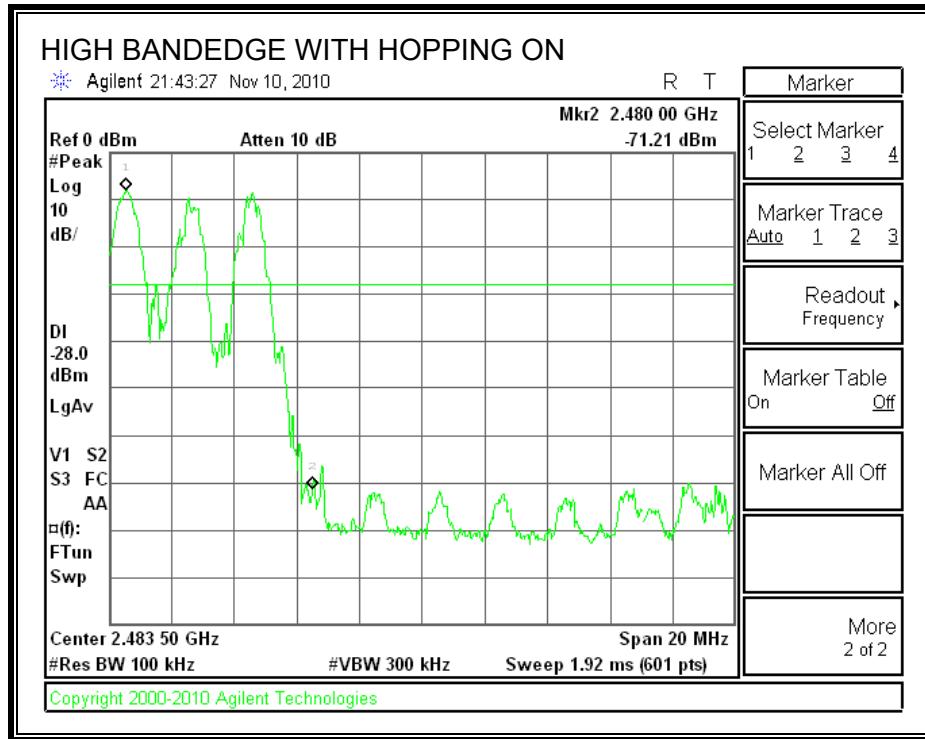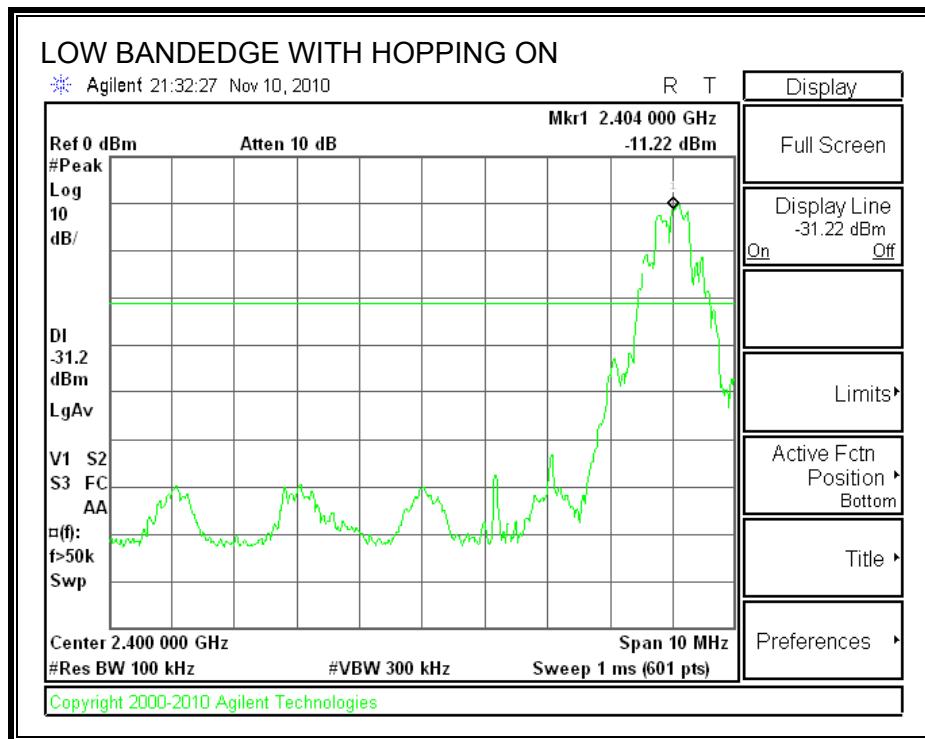

## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

#### TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.



For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.



The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

### 8.1.1. BASIC DATA RATE GFSK MODULATION



#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

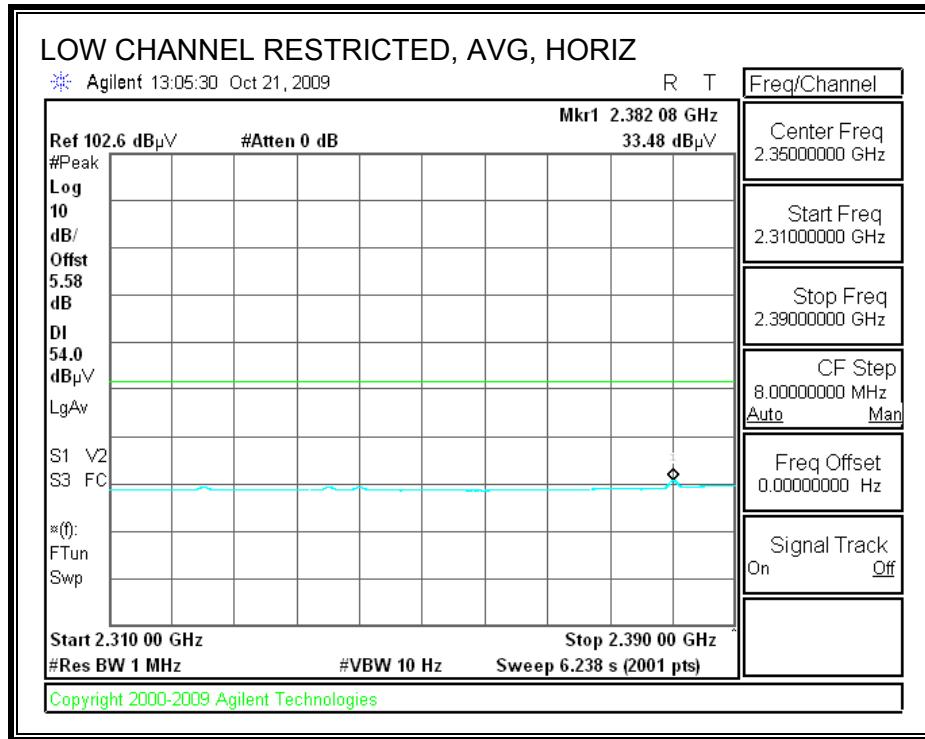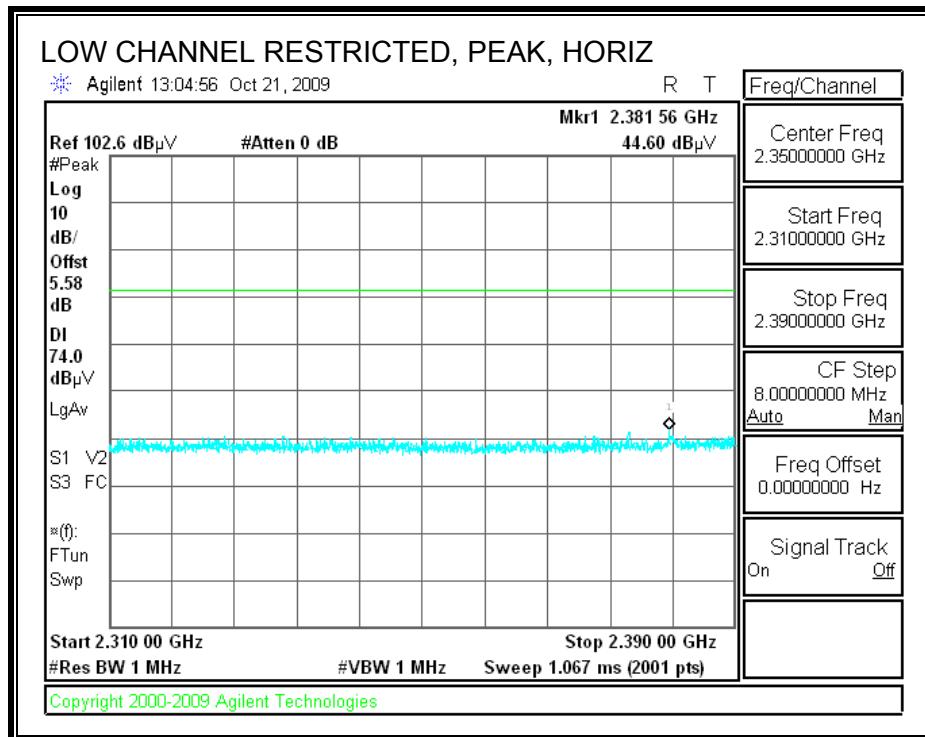



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

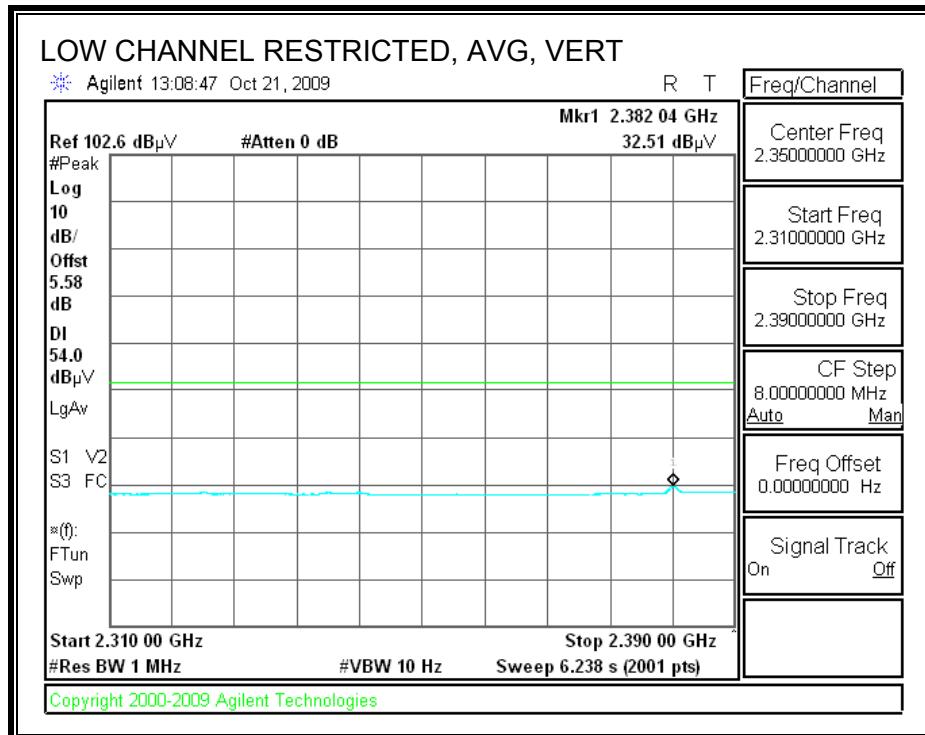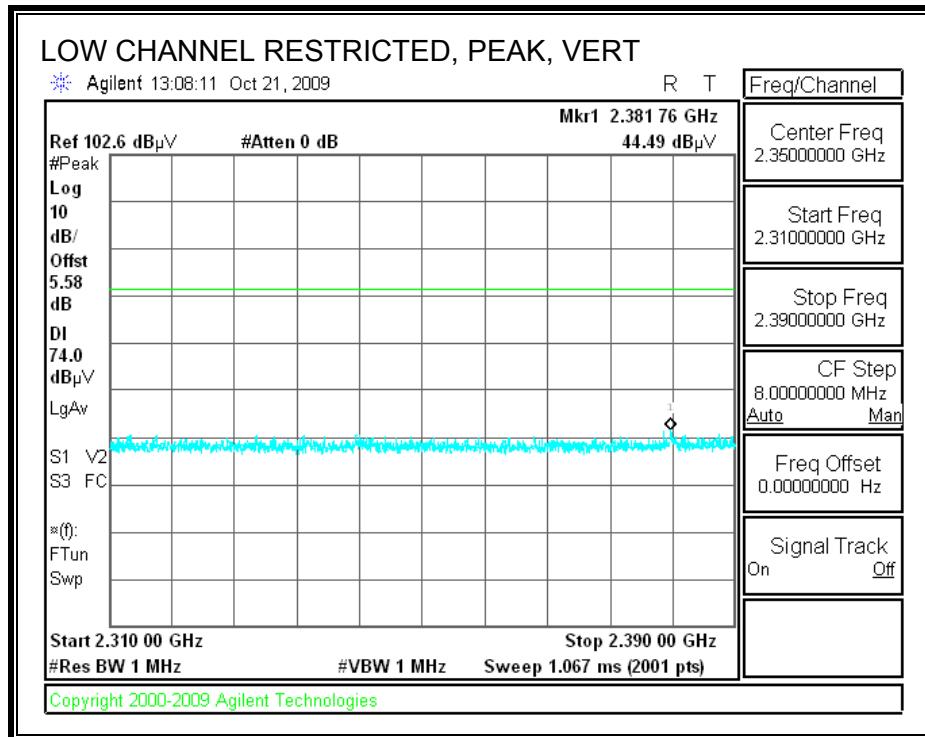

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

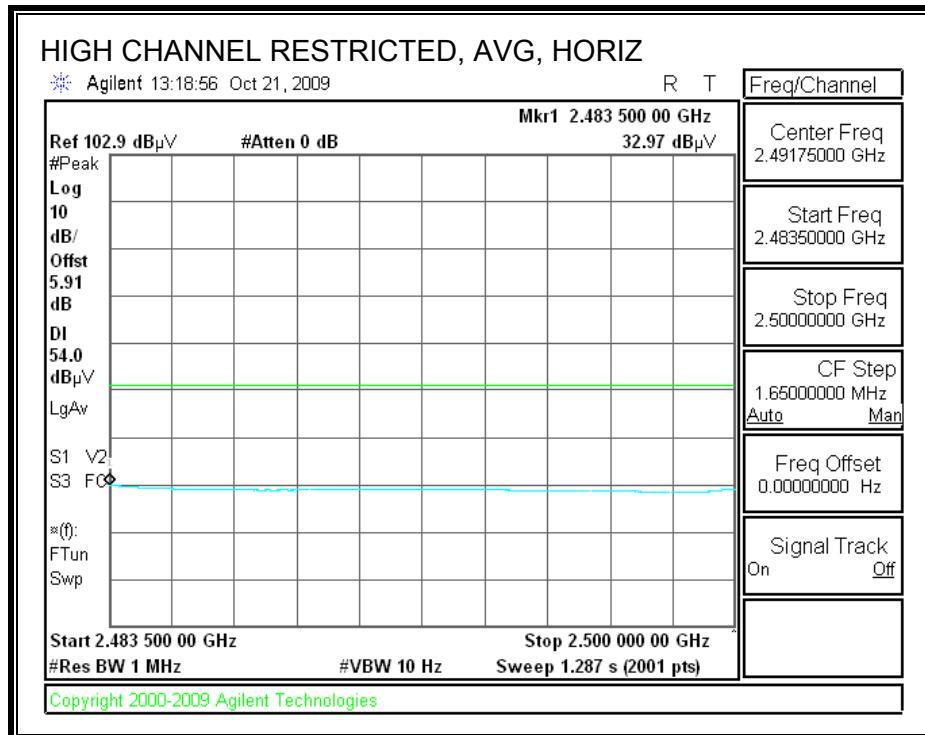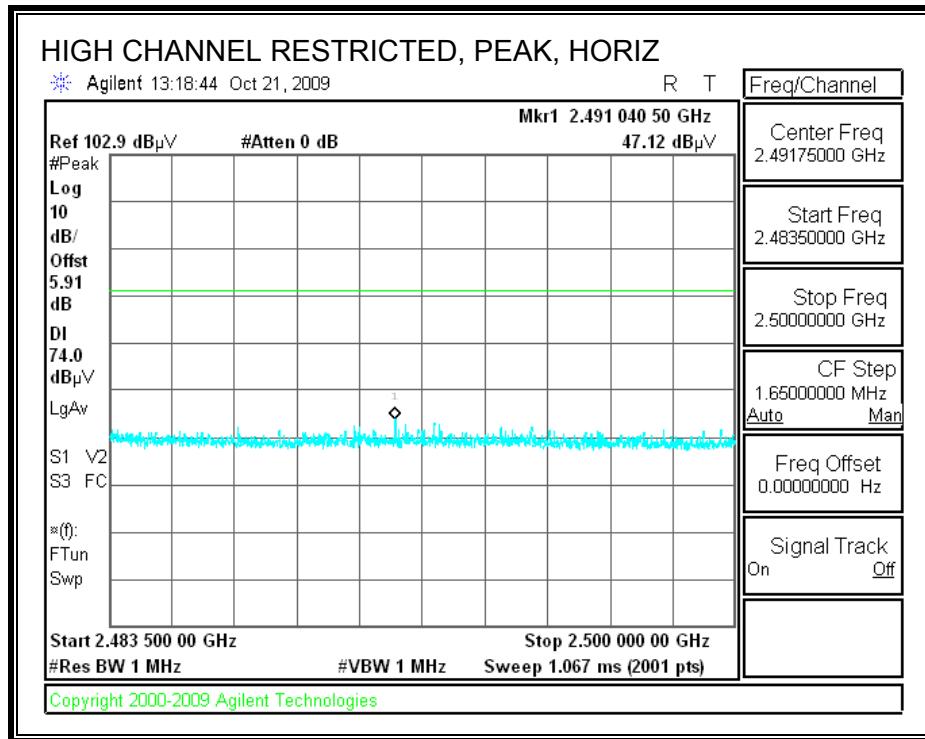

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

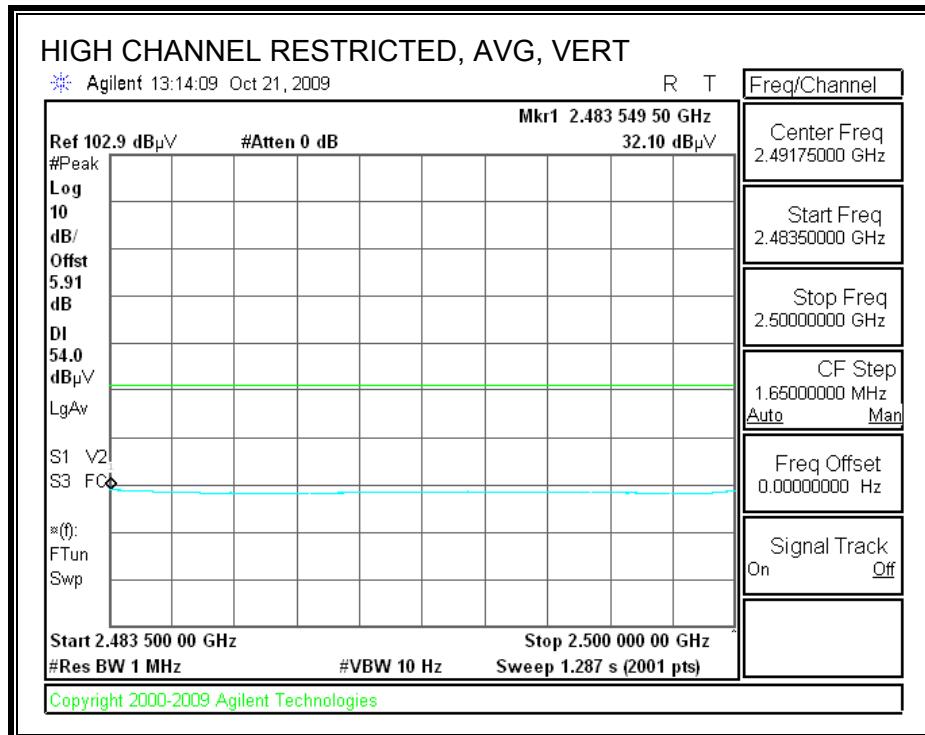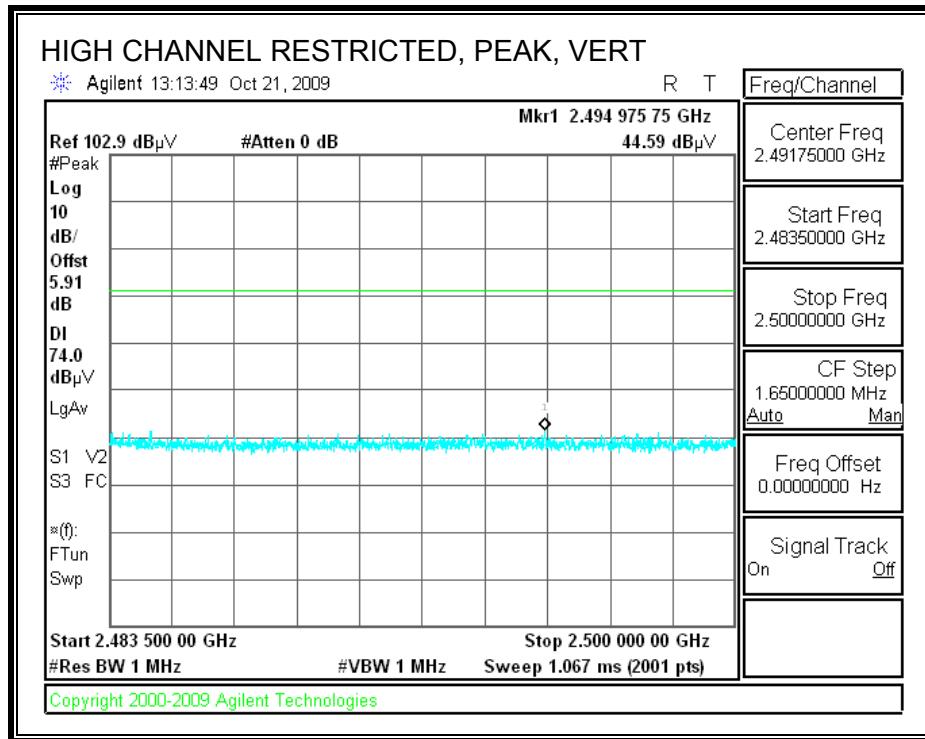

## HARMONICS AND SPURIOUS EMISSIONS

**High Frequency Measurement**  
Compliance Certification Services, Fremont 3m Chamber

Test Engr: Vien Tran  
Date: 10/21/09  
Project #: 09U12871  
Company: Broadcom  
EUT Description: 802.11g/Draft 802.11n WLAN + BT PCI-E MINICARD  
EUT M/N: BCM94343HMGB  
Test Target: FCC Class B  
Mode Oper: Tx GFSK Mode\_Harmonic

f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Connect to 3 meters	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter	



f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant.High cm	Table Angle Degree	Notes
<b>LOW CHANNEL 2402MHz</b>															
4.804	3.0	39.5	32.7	5.8	-34.8	0.0	0.0	43.1	74.0	-30.9	V	P	100.0	112.0	
4.804	3.0	34.8	32.7	5.8	-34.8	0.0	0.0	38.4	54.0	-15.6	V	A	100.0	112.0	
4.804	3.0	38.9	32.7	5.8	-34.8	0.0	0.0	42.5	74.0	-31.5	H	P	99.0	108.0	
4.804	3.0	34.8	32.7	5.8	-34.8	0.0	0.0	38.4	54.0	-15.6	H	A	99.0	108.0	
<b>MID CHANNEL 2441MHz</b>															
4.882	3.0	37.5	32.7	5.8	-34.8	0.0	0.0	41.2	74.0	-32.8	V	P	100.0	230.0	
4.882	3.0	32.2	32.7	5.8	-34.8	0.0	0.0	35.9	54.0	-18.1	V	A	100.0	230.0	
7.323	3.0	34.0	35.5	7.3	-34.1	0.0	0.0	42.7	74.0	-31.3	V	P	100.0	33.0	
7.323	3.0	20.6	35.5	7.3	-34.1	0.0	0.0	29.3	54.0	-24.7	V	A	100.0	33.0	
4.882	3.0	35.8	32.7	5.8	-34.8	0.0	0.0	39.6	74.0	-34.4	H	P	100.0	120.0	
4.882	3.0	29.5	32.7	5.8	-34.8	0.0	0.0	33.2	54.0	-20.8	H	A	100.0	120.0	
7.323	3.0	33.6	35.5	7.3	-34.1	0.0	0.0	42.3	74.0	-31.7	H	P	151.0	238.0	
7.323	3.0	20.7	35.5	7.3	-34.1	0.0	0.0	29.3	54.0	-24.7	H	A	151.0	238.0	
<b>HIGH CHANNEL 2480MHz</b>															
4.960	3.0	35.9	32.8	5.9	-34.8	0.0	0.0	39.7	74.0	-34.3	V	P	132.0	231.0	
4.960	3.0	30.2	32.8	5.9	-34.8	0.0	0.0	34.0	54.0	-20.0	V	A	132.0	231.0	
7.440	3.0	32.7	35.6	7.3	-34.1	0.0	0.0	41.6	74.0	-32.4	V	P	142.0	33.0	
7.440	3.0	20.4	35.6	7.3	-34.1	0.0	0.0	29.3	54.0	-24.7	V	A	142.0	33.0	
4.960	3.0	35.1	32.8	5.9	-34.8	0.0	0.0	39.0	74.0	-35.0	H	P	100.0	240.0	
4.960	3.0	27.8	32.8	5.9	-34.8	0.0	0.0	31.7	54.0	-22.3	H	A	100.0	240.0	
7.440	3.0	32.8	35.6	7.3	-34.1	0.0	0.0	41.7	74.0	-32.3	H	P	99.0	239.0	
7.440	3.0	20.3	35.6	7.3	-34.1	0.0	0.0	29.2	54.0	-24.8	H	A	99.0	239.0	

Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

### 8.1.2. ENHANCED DATA RATE 8PSK MODULATION



#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

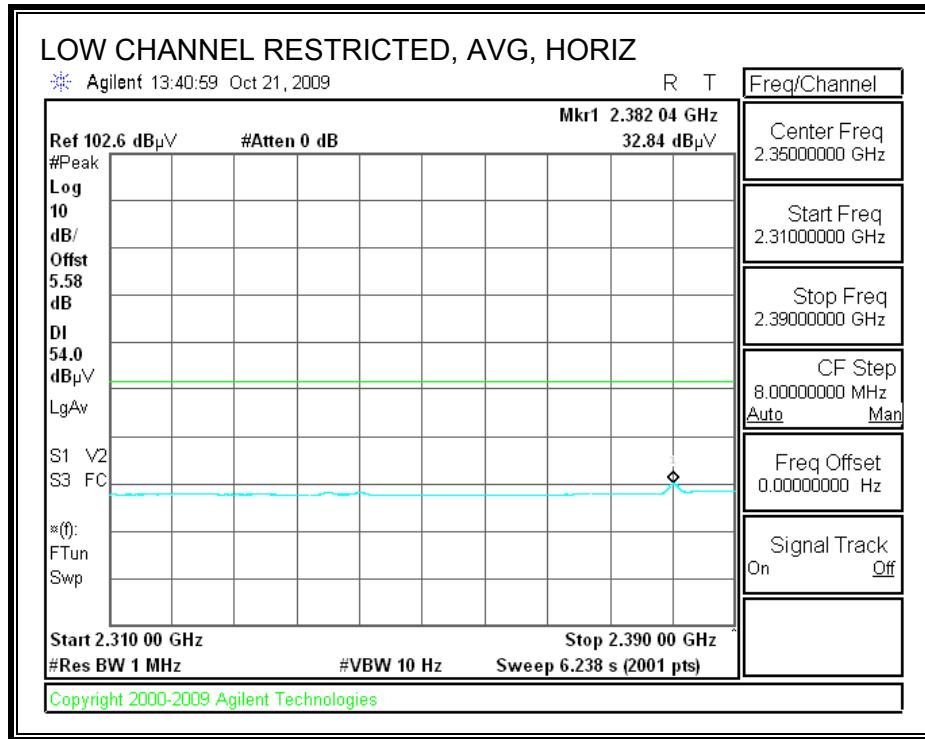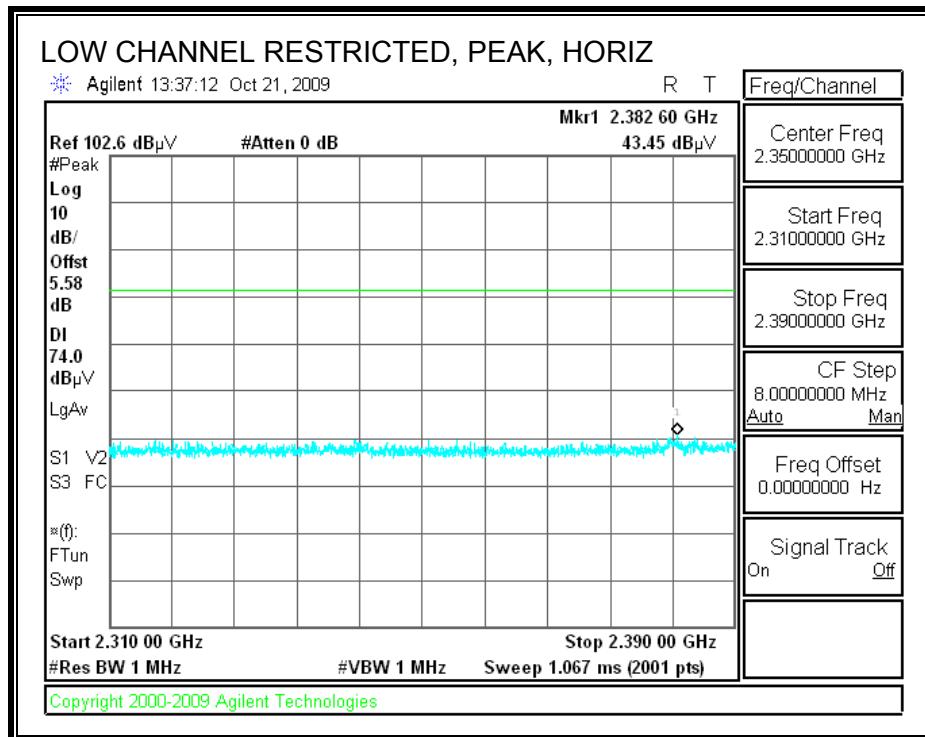



### RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

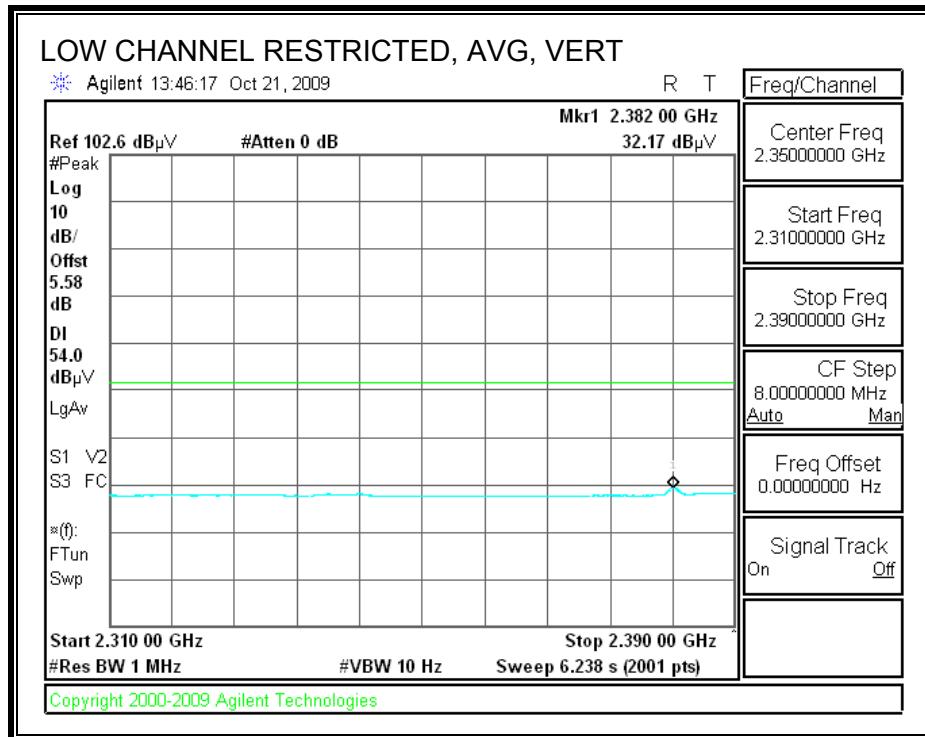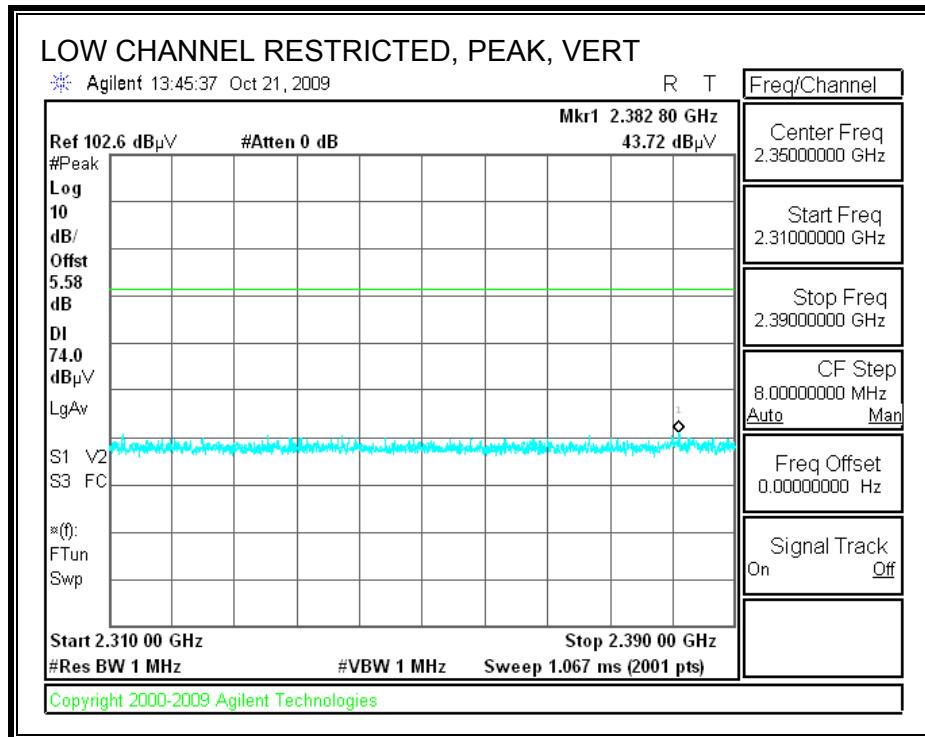

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

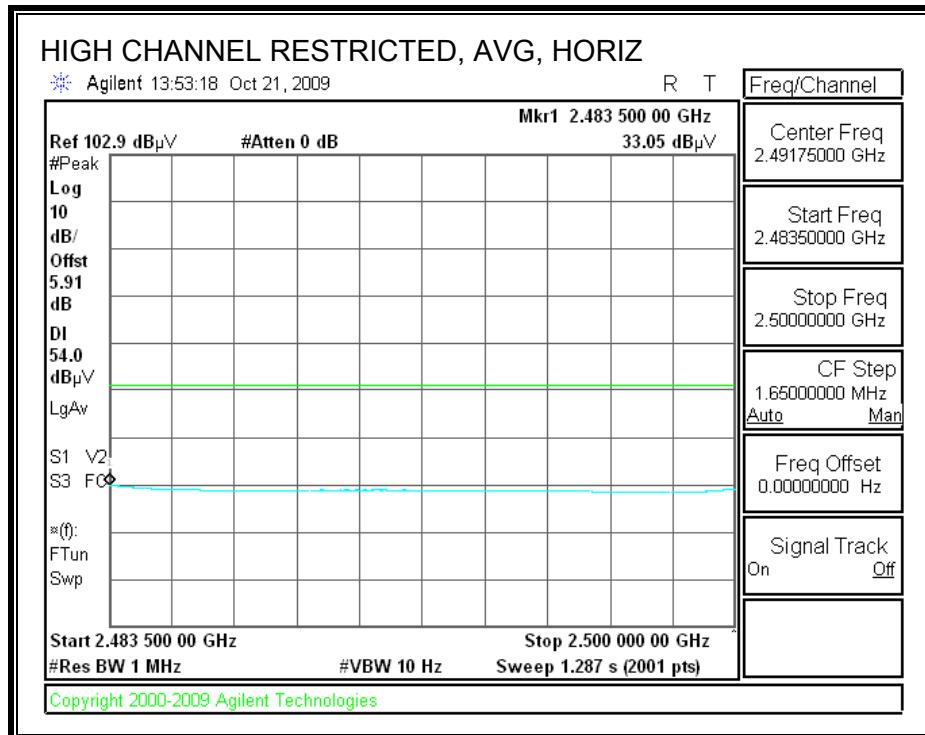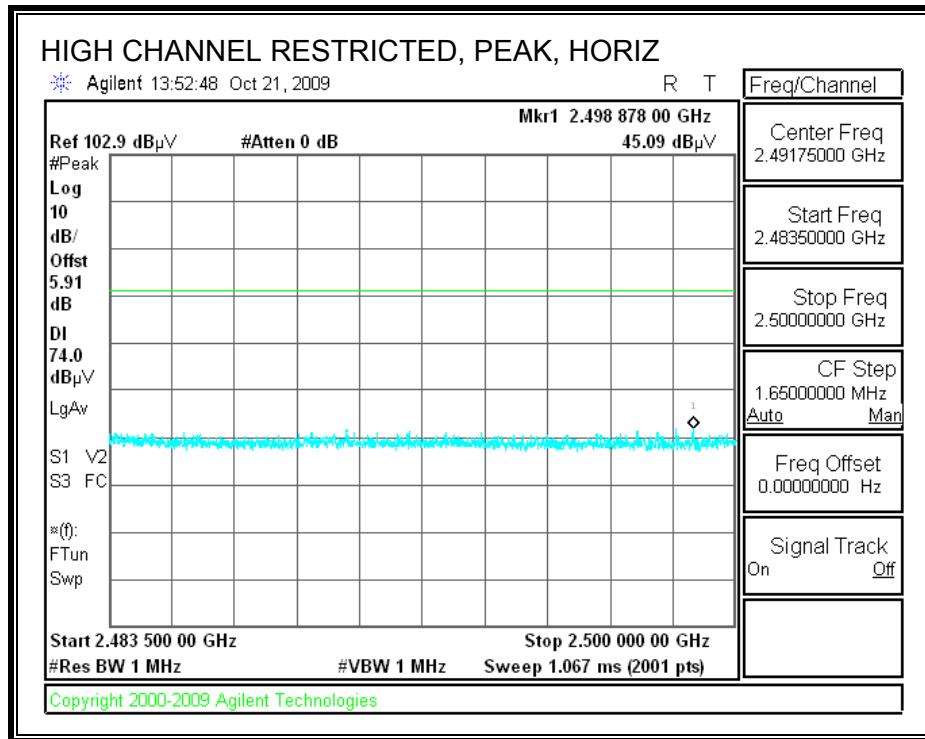

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

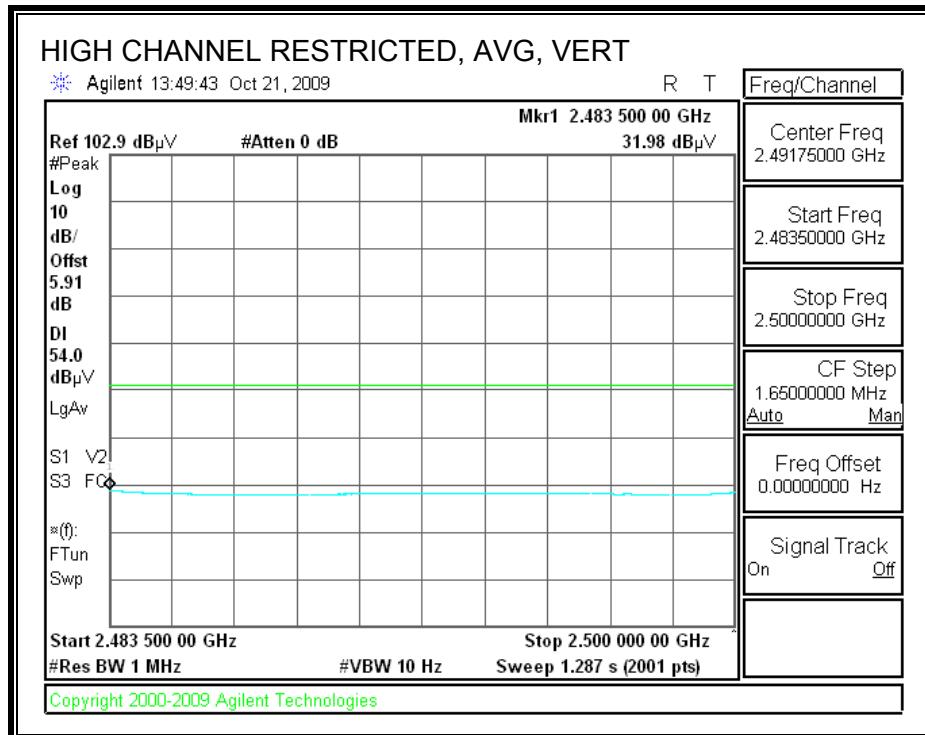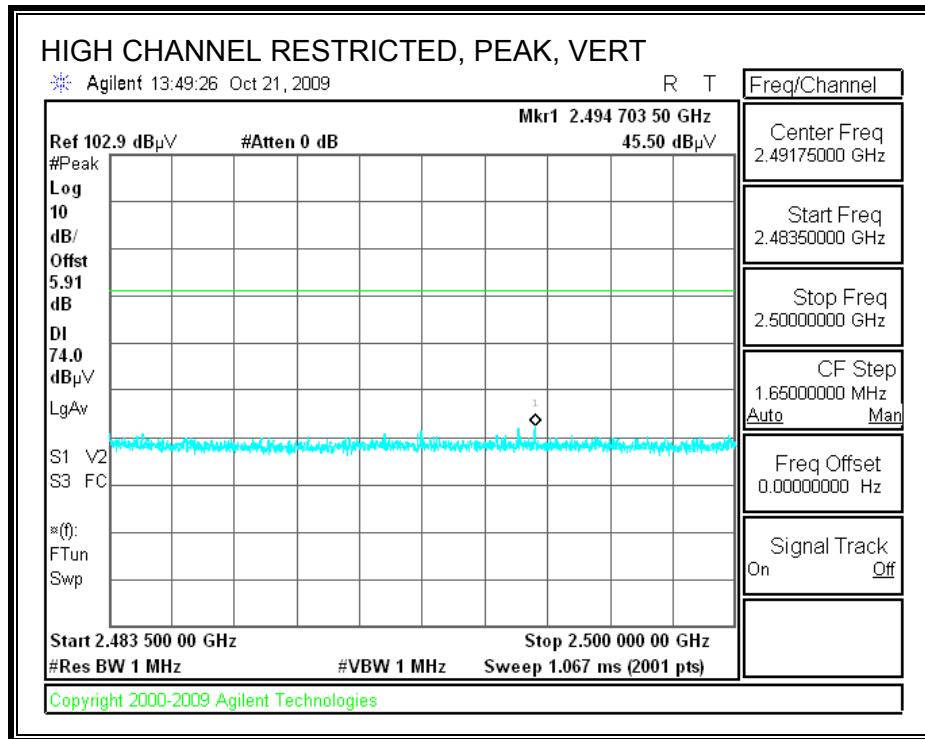

## HARMONICS AND SPURIOUS EMISSIONS

**High Frequency Measurement**  
Compliance Certification Services, Fremont 3m Chamber

Test Engr: Vien Tran  
Date: 10/17/08  
Project #: 09U12871  
Company: Broadcom  
EUT Description: 802.11g/Draft 802.11n WLAN + BT PCI-E MINICARD  
EUT M/N: BCM94343HMGB  
Test Target: FCC Class B  
Mode Oper: Tx 8PSK Mode\_Harmonic

f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Connect to 3 meters	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter	



f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Ftr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant.High cm	Table Angle Degree	Notes
<b>8PSK 2402MHz</b>															
4.804	3.0	41.9	32.7	5.8	-34.8	0.0	0.0	45.5	74.0	-28.5	V	P	99.0	109.0	
4.804	3.0	33.7	32.7	5.8	-34.8	0.0	0.0	37.3	54.0	-16.7	V	A	99.0	109.0	
4.804	3.0	40.8	32.7	5.8	-34.8	0.0	0.0	44.4	74.0	-29.6	H	P	99.0	108.0	
4.804	3.0	33.4	32.7	5.8	-34.8	0.0	0.0	37.0	54.0	-17.0	H	A	99.0	108.0	
<b>8PSK 2441MHz</b>															
4.882	3.0	37.2	32.7	5.8	-34.8	0.0	0.0	40.9	74.0	-33.1	V	P	100.0	231.0	
4.882	3.0	29.6	32.7	5.8	-34.8	0.0	0.0	33.3	54.0	-20.7	V	A	100.0	231.0	
7.323	3.0	32.5	35.5	7.3	-34.1	0.0	0.0	41.2	74.0	-32.8	V	P	100.0	36.0	
7.323	3.0	20.2	35.5	7.3	-34.1	0.0	0.0	28.8	54.0	-25.2	V	A	100.0	36.0	
4.882	3.0	35.9	32.7	5.8	-34.8	0.0	0.0	39.6	74.0	-34.4	H	P	100.0	122.0	
4.882	3.0	27.7	32.7	5.8	-34.8	0.0	0.0	31.4	54.0	-22.6	H	A	100.0	122.0	
7.323	3.0	32.7	35.5	7.3	-34.1	0.0	0.0	41.3	74.0	-32.7	H	P	100.0	203.0	
7.323	3.0	20.5	35.5	7.3	-34.1	0.0	0.0	29.1	54.0	-24.9	H	A	100.0	203.0	
<b>8PSK 2480MHz</b>															
4.960	3.0	34.4	32.8	5.9	-34.8	0.0	0.0	38.3	74.0	-35.7	V	P	101.0	230.0	
4.960	3.0	27.1	32.8	5.9	-34.8	0.0	0.0	31.0	54.0	-23.0	V	A	101.0	230.0	
7.440	3.0	33.0	35.6	7.3	-34.1	0.0	0.0	41.8	74.0	-32.2	V	P	100.0	230.0	
7.440	3.0	20.5	35.6	7.3	-34.1	0.0	0.0	29.4	54.0	-24.6	V	A	100.0	230.0	
4.960	3.0	34.1	32.8	5.9	-34.8	0.0	0.0	38.0	74.0	-36.0	H	P	100.0	237.0	
4.960	3.0	25.4	32.8	5.9	-34.8	0.0	0.0	29.3	54.0	-24.7	H	A	100.0	237.0	
7.440	3.0	32.5	35.6	7.3	-34.1	0.0	0.0	41.4	74.0	-32.6	H	P	125.0	252.0	
7.440	3.0	20.0	35.6	7.3	-34.1	0.0	0.0	28.9	54.0	-25.1	H	A	125.0	252.0	

Rev. 4.1.2.7



Note: No other emissions were detected above the system noise floor.

### 8.1.3. LOW ENERGY LE MODULATION



#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

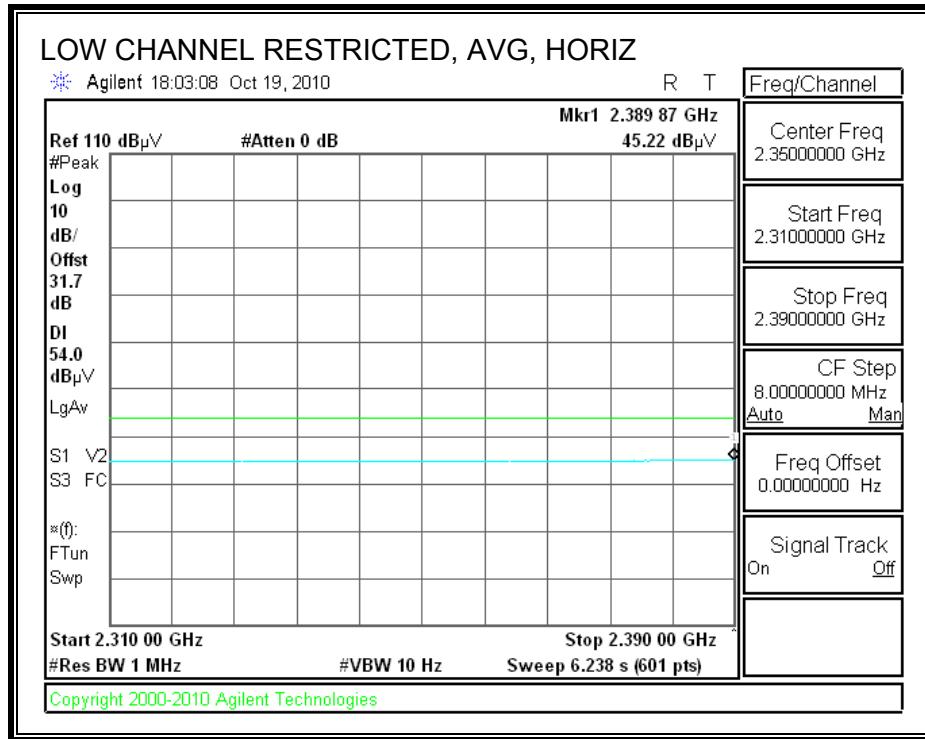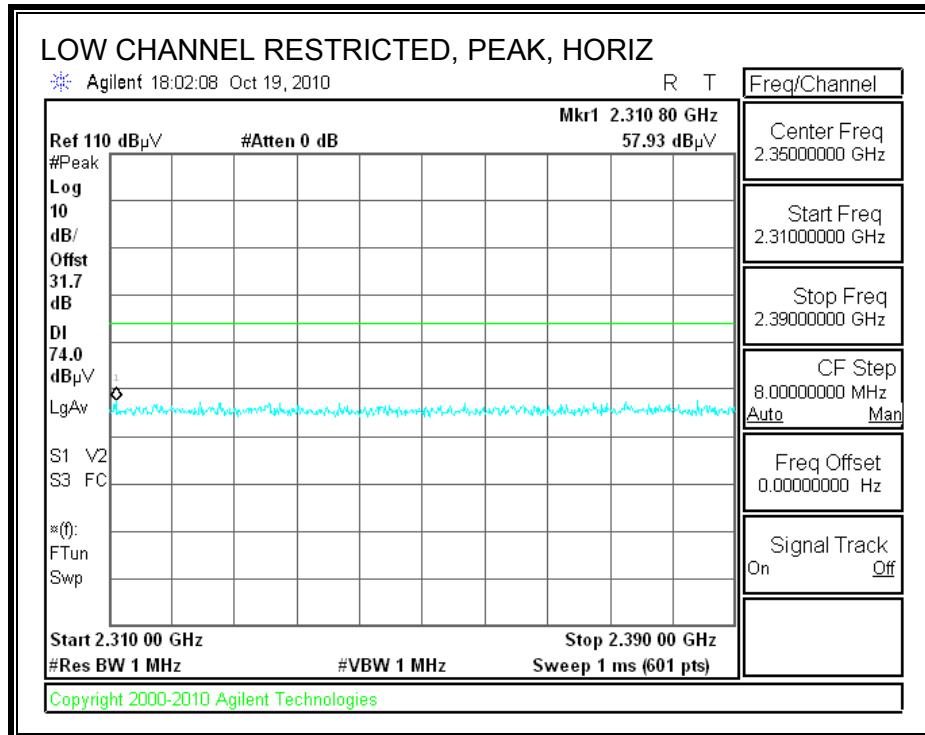



**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

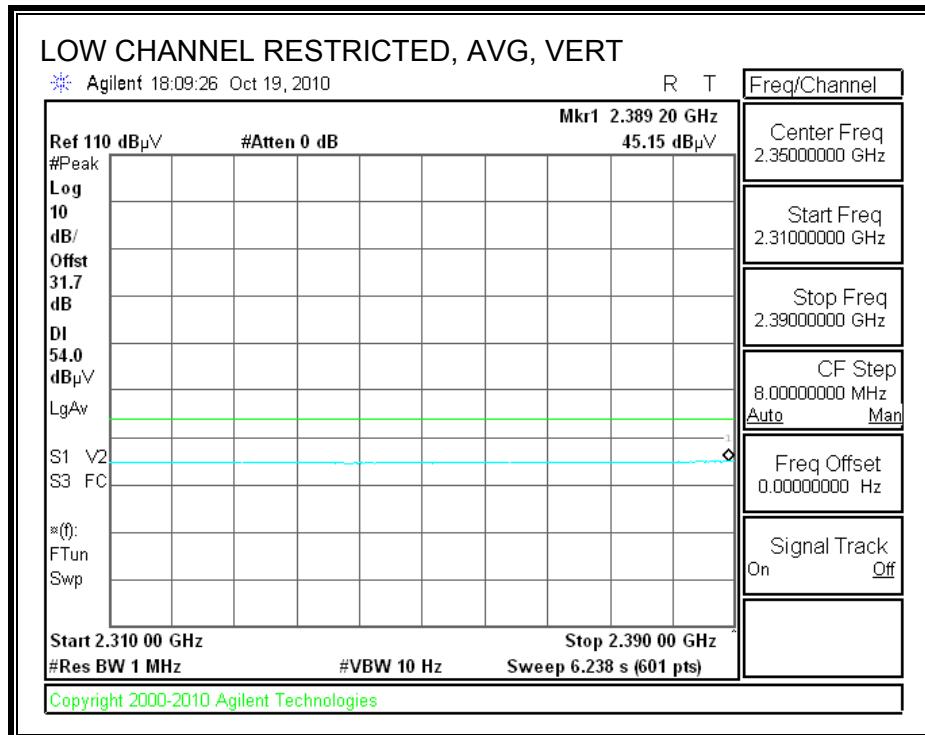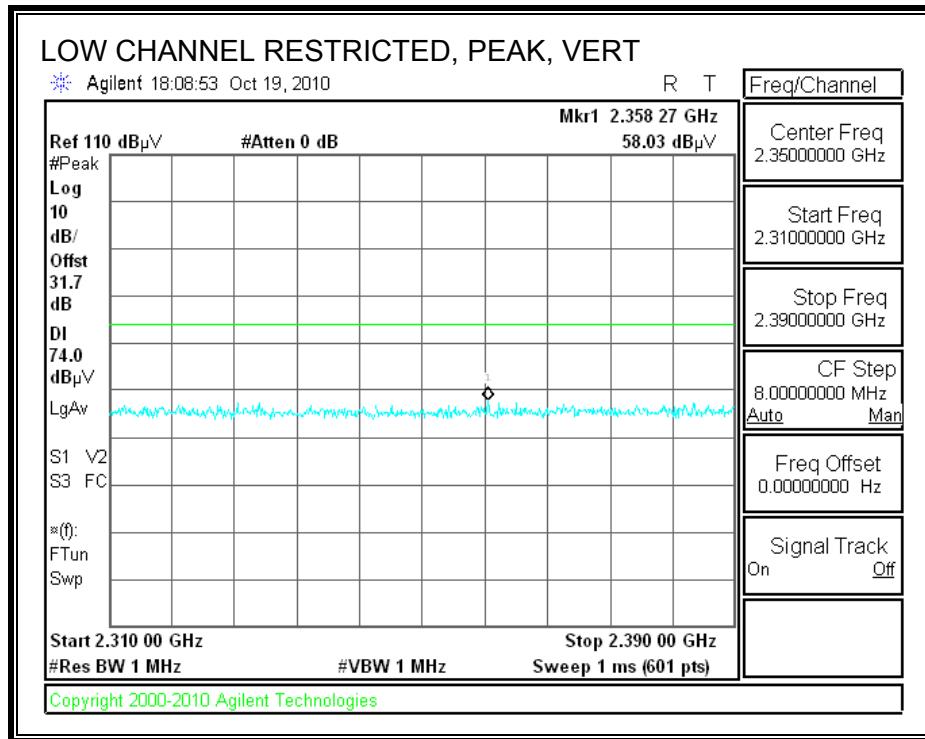

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

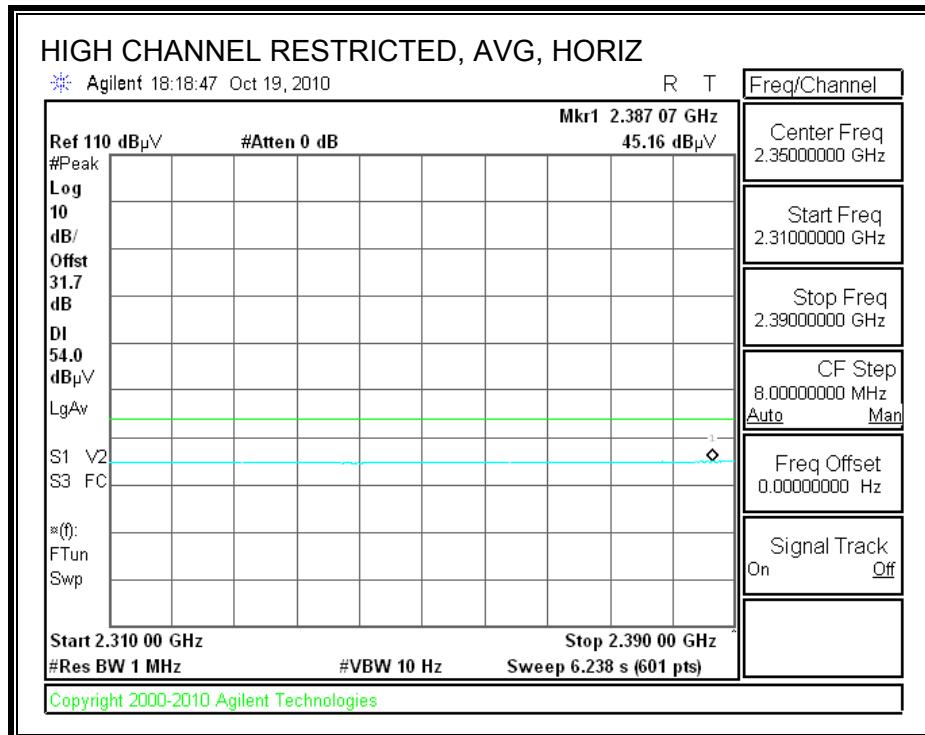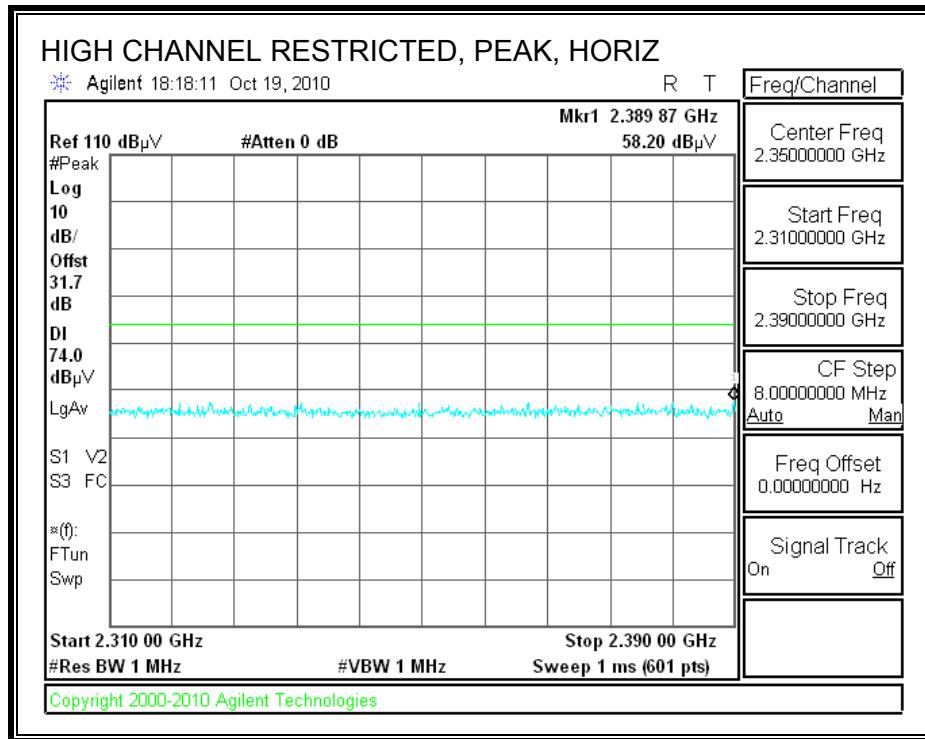

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

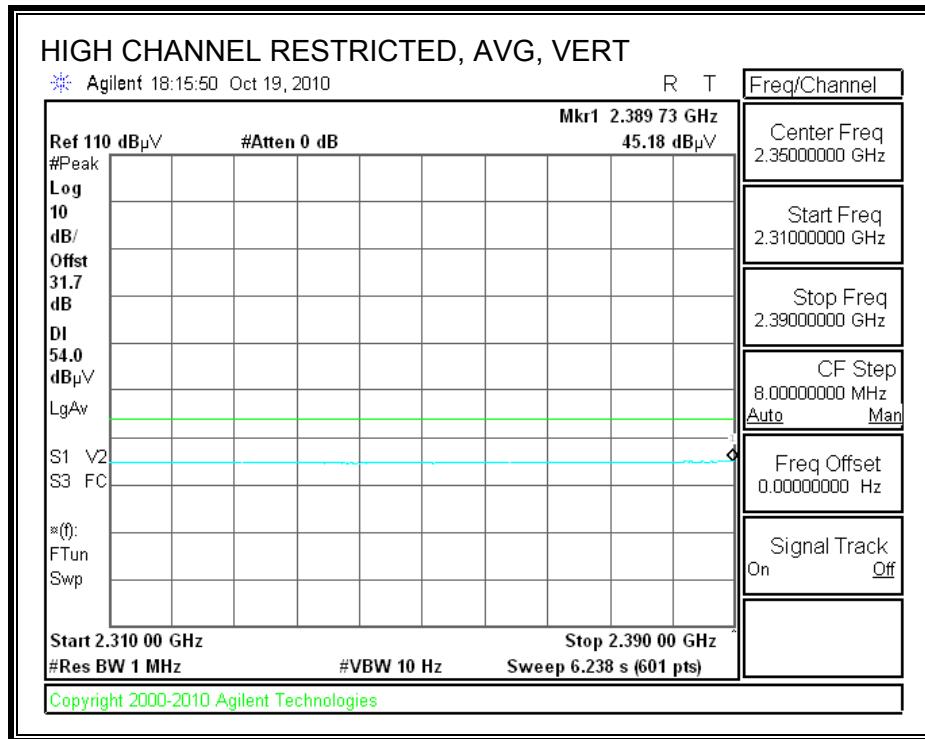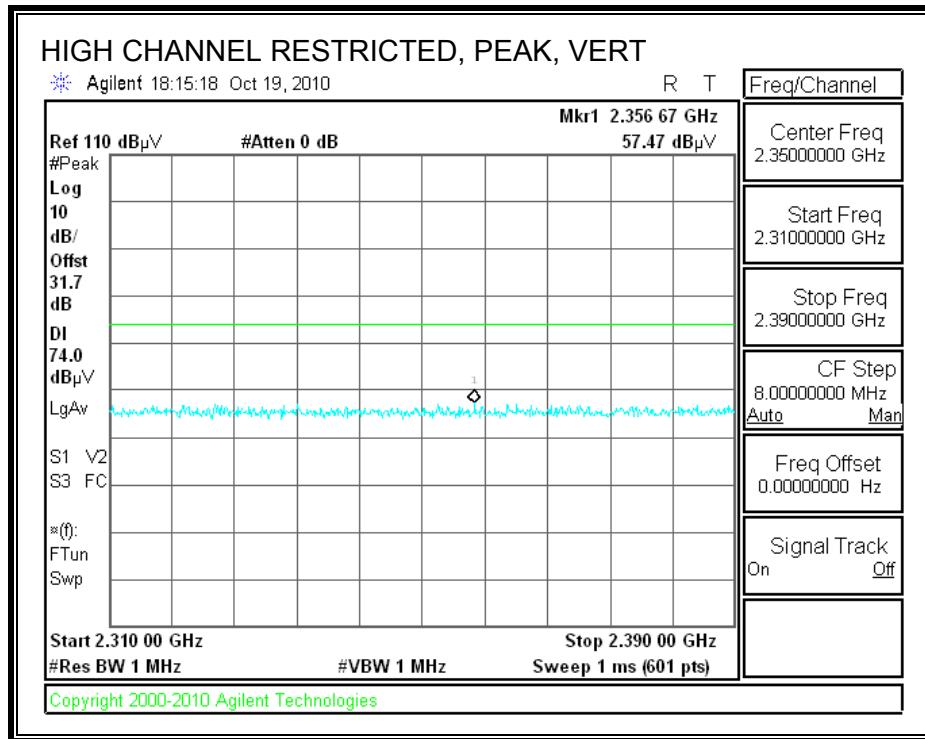

## HARMONICS AND SPURIOUS EMISSIONS

### **High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber**

Test Engr: Vien Tran  
Date: 10/19/10  
Project #: 10U13391  
Company: Broadcom  
Test Target: FCC B  
Mode Oper: Tx BLE Mode (Bluetooth Low Energy )

f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter	

f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
<b>LOW CHANNEL, 2402MHz</b>													
4.804	3.0	39.6	32.8	5.8	-34.8	0.0	0.0	43.3	74.0	-30.7	V	P	
4.804	3.0	29.1	32.8	5.8	-34.8	0.0	0.0	32.8	54.0	-21.2	V	A	
4.804	3.0	39.3	32.8	5.8	-34.8	0.0	0.0	43.0	74.0	-31.0	H	P	
4.804	3.0	28.9	32.8	5.8	-34.8	0.0	0.0	32.6	54.0	-21.4	H	A	
<b>MID CHANNEL, 2440MHz</b>													
4.880	3.0	40.7	32.8	5.8	-34.9	0.0	0.0	44.5	74.0	-29.5	V	P	
4.880	3.0	29.7	32.8	5.8	-34.9	0.0	0.0	33.5	54.0	-20.5	V	A	
7.320	3.0	37.5	35.2	7.3	-34.7	0.0	0.0	45.3	74.0	-28.7	V	P	
7.320	3.0	24.7	35.2	7.3	-34.7	0.0	0.0	32.5	54.0	-21.5	V	A	
4.880	3.0	39.4	32.8	5.8	-34.9	0.0	0.0	43.2	74.0	-30.8	H	P	
4.880	3.0	28.4	32.8	5.8	-34.9	0.0	0.0	32.2	54.0	-21.8	H	A	
7.320	3.0	37.2	35.2	7.3	-34.7	0.0	0.0	45.0	74.0	-29.0	H	P	
7.320	3.0	24.7	35.2	7.3	-34.7	0.0	0.0	32.5	54.0	-21.5	H	A	
<b>HIGH CHANNEL, 2480MHz</b>													
4.960	3.0	41.6	32.9	5.9	-34.9	0.0	0.0	45.5	74.0	-28.5	V	P	
4.960	3.0	30.8	32.9	5.9	-34.9	0.0	0.0	34.7	54.0	-19.3	V	A	
7.440	3.0	37.6	35.4	7.3	-34.6	0.0	0.0	45.7	74.0	-28.3	V	P	
7.440	3.0	25.0	35.4	7.3	-34.6	0.0	0.0	33.1	54.0	-20.9	V	A	
4.960	3.0	40.9	32.9	5.9	-34.9	0.0	0.0	44.9	74.0	-29.1	H	P	
4.960	3.0	30.8	32.9	5.9	-34.9	0.0	0.0	34.7	54.0	-19.3	H	A	
7.440	3.0	37.4	35.4	7.3	-34.6	0.0	0.0	45.5	74.0	-28.5	H	P	
7.440	3.0	25.0	35.4	7.3	-34.6	0.0	0.0	33.1	54.0	-20.9	H	A	

Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.

## 8.2. RECEIVER ABOVE 1 GHz

### 8.2.1. WORST-CASE 8PSK MODE

High Frequency Measurement Compliance Certification Services, Fremont 3m Chamber																																																																																																																																																																																																																																																							
<p>Company: Broadcom Project #: 09U12871 Date: 10/21/09 Test Engineer: Vien Tran Configuration: EUT / Laptop Mode: Rx Mode_Worst-Case</p> <p><u>Test Equipment:</u></p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="4">Horn &gt; 18GHz</td> <td>Limit</td> </tr> <tr> <td>T60; S/N: 2238 @3m</td> <td>T34 HP 8449B</td> <td></td> <td colspan="4"></td> <td>FCC 15.209</td> </tr> <tr> <td colspan="15">Hi Frequency Cables</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4">HPF</td> <td>Reject Filter</td> <td colspan="6">Peak Measurements RBW=Vbw=1MHz</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4"></td> <td></td> <td colspan="6">Average Measurements RBW=1MHz ; VBW=10Hz</td> </tr> </table> <p><u>Measurement Data:</u></p> <table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr> <td>1.040</td> <td>3.0</td> <td>52.5</td> <td>48.5</td> <td>24.6</td> <td>2.4</td> <td>-38.2</td> <td>0.0</td> <td>0.0</td> <td>41.3</td> <td>37.3</td> <td>74</td> <td>54</td> <td>-32.7</td> <td>-16.7</td> <td>H</td> </tr> <tr> <td>1.196</td> <td>3.0</td> <td>53.3</td> <td>36.3</td> <td>25.1</td> <td>2.6</td> <td>-38.0</td> <td>0.0</td> <td>0.0</td> <td>43.0</td> <td>26.0</td> <td>74</td> <td>54</td> <td>-31.0</td> <td>-28.0</td> <td>H</td> </tr> <tr> <td>1.600</td> <td>3.0</td> <td>48.0</td> <td>32.6</td> <td>26.5</td> <td>3.0</td> <td>-37.4</td> <td>0.0</td> <td>0.0</td> <td>40.1</td> <td>24.7</td> <td>74</td> <td>54</td> <td>-33.9</td> <td>-29.3</td> <td>H</td> </tr> <tr> <td>3.167</td> <td>3.0</td> <td>45.4</td> <td>39.9</td> <td>30.1</td> <td>4.5</td> <td>-35.7</td> <td>0.0</td> <td>0.0</td> <td>44.2</td> <td>38.7</td> <td>74</td> <td>54</td> <td>-29.8</td> <td>-15.3</td> <td>H</td> </tr> <tr> <td>1.040</td> <td>3.0</td> <td>51.5</td> <td>45.5</td> <td>24.6</td> <td>2.4</td> <td>-38.2</td> <td>0.0</td> <td>0.0</td> <td>40.3</td> <td>34.3</td> <td>74</td> <td>54</td> <td>-33.7</td> <td>-19.7</td> <td>V</td> </tr> <tr> <td>1.965</td> <td>3.0</td> <td>51.9</td> <td>37.8</td> <td>27.7</td> <td>3.4</td> <td>-36.9</td> <td>0.0</td> <td>0.0</td> <td>46.1</td> <td>32.0</td> <td>74</td> <td>54</td> <td>-27.9</td> <td>-22.0</td> <td>V</td> </tr> <tr> <td>1.600</td> <td>3.0</td> <td>48.7</td> <td>34.6</td> <td>26.5</td> <td>3.0</td> <td>-37.4</td> <td>0.0</td> <td>0.0</td> <td>40.8</td> <td>26.7</td> <td>74</td> <td>54</td> <td>-33.2</td> <td>-27.3</td> <td>V</td> </tr> <tr> <td>3.167</td> <td>3.0</td> <td>44.4</td> <td>39.3</td> <td>30.1</td> <td>4.5</td> <td>-35.7</td> <td>0.0</td> <td>0.0</td> <td>43.2</td> <td>38.1</td> <td>74</td> <td>54</td> <td>-30.8</td> <td>-15.9</td> <td>V</td> </tr> </tbody> </table> <p><u>Definitions:</u></p> <table border="0"> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td></td> <td></td> </tr> </table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.209	Hi Frequency Cables															3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=Vbw=1MHz						3' cable 22807700	12' cable 22807600	20' cable 22807500						Average Measurements RBW=1MHz ; VBW=10Hz						f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	1.040	3.0	52.5	48.5	24.6	2.4	-38.2	0.0	0.0	41.3	37.3	74	54	-32.7	-16.7	H	1.196	3.0	53.3	36.3	25.1	2.6	-38.0	0.0	0.0	43.0	26.0	74	54	-31.0	-28.0	H	1.600	3.0	48.0	32.6	26.5	3.0	-37.4	0.0	0.0	40.1	24.7	74	54	-33.9	-29.3	H	3.167	3.0	45.4	39.9	30.1	4.5	-35.7	0.0	0.0	44.2	38.7	74	54	-29.8	-15.3	H	1.040	3.0	51.5	45.5	24.6	2.4	-38.2	0.0	0.0	40.3	34.3	74	54	-33.7	-19.7	V	1.965	3.0	51.9	37.8	27.7	3.4	-36.9	0.0	0.0	46.1	32.0	74	54	-27.9	-22.0	V	1.600	3.0	48.7	34.6	26.5	3.0	-37.4	0.0	0.0	40.8	26.7	74	54	-33.2	-27.3	V	3.167	3.0	44.4	39.3	30.1	4.5	-35.7	0.0	0.0	43.2	38.1	74	54	-30.8	-15.9	V	f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter		
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																																
T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.209																																																																																																																																																																																																																																																
Hi Frequency Cables																																																																																																																																																																																																																																																							
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=Vbw=1MHz																																																																																																																																																																																																																																															
3' cable 22807700	12' cable 22807600	20' cable 22807500						Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																															
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																								
1.040	3.0	52.5	48.5	24.6	2.4	-38.2	0.0	0.0	41.3	37.3	74	54	-32.7	-16.7	H																																																																																																																																																																																																																																								
1.196	3.0	53.3	36.3	25.1	2.6	-38.0	0.0	0.0	43.0	26.0	74	54	-31.0	-28.0	H																																																																																																																																																																																																																																								
1.600	3.0	48.0	32.6	26.5	3.0	-37.4	0.0	0.0	40.1	24.7	74	54	-33.9	-29.3	H																																																																																																																																																																																																																																								
3.167	3.0	45.4	39.9	30.1	4.5	-35.7	0.0	0.0	44.2	38.7	74	54	-29.8	-15.3	H																																																																																																																																																																																																																																								
1.040	3.0	51.5	45.5	24.6	2.4	-38.2	0.0	0.0	40.3	34.3	74	54	-33.7	-19.7	V																																																																																																																																																																																																																																								
1.965	3.0	51.9	37.8	27.7	3.4	-36.9	0.0	0.0	46.1	32.0	74	54	-27.9	-22.0	V																																																																																																																																																																																																																																								
1.600	3.0	48.7	34.6	26.5	3.0	-37.4	0.0	0.0	40.8	26.7	74	54	-33.2	-27.3	V																																																																																																																																																																																																																																								
3.167	3.0	44.4	39.3	30.1	4.5	-35.7	0.0	0.0	43.2	38.1	74	54	-30.8	-15.9	V																																																																																																																																																																																																																																								
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																																		
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																																		
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																																		
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																																		
CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																																				

## 8.2.2. WORST-CASE LE MODE

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																			
<p>Test Engn: Vien Tran Date: 10/19/10 Project #: 10U13391 Company: Broadcom Test Target: RX RSS 210 Mode Oper: Rx BLE Mode (Bluetooth Low Energy)</p> <p><b>Test Equipment:</b></p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="3">Horn &gt; 18GHz</td> <td>Limit</td> </tr> <tr> <td>T59; S/N: 3245 @3m</td> <td>T145 Agilent 3008A005C</td> <td></td> <td></td> <td></td> <td></td> <td>RX RSS 210</td> </tr> <tr> <td colspan="7">Hi Frequency Cables</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td>HPF</td> <td>Reject Filter</td> <td colspan="3">Peak Measurements RBW=VBW=1MHz</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td></td> <td></td> <td colspan="3">Average Measurements RBW=1MHz ; VBW=10Hz</td> </tr> </table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz			Limit	T59; S/N: 3245 @3m	T145 Agilent 3008A005C					RX RSS 210	Hi Frequency Cables							3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz			3' cable 22807700	12' cable 22807600	20' cable 22807500			Average Measurements RBW=1MHz ; VBW=10Hz		
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz			Limit																																													
T59; S/N: 3245 @3m	T145 Agilent 3008A005C					RX RSS 210																																													
Hi Frequency Cables																																																			
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz																																														
3' cable 22807700	12' cable 22807600	20' cable 22807500			Average Measurements RBW=1MHz ; VBW=10Hz																																														
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																				
1.270	3.0	53.2	32.5	24.9	2.7	-35.9	0.0	0.0	44.9	24.2	74	54	-29.1	-29.8	V																																				
1.417	3.0	53.0	33.0	25.5	2.8	-35.8	0.0	0.0	45.5	25.5	74	54	-28.5	-28.5	V																																				
1.270	3.0	49.7	31.9	24.9	2.7	-35.9	0.0	0.0	41.4	23.6	74	54	-32.6	-30.4	H																																				
1.417	3.0	47.6	31.0	25.5	2.8	-35.8	0.0	0.0	40.1	23.5	74	54	-33.9	-30.5	H																																				
Note: No other emissions were detected above the system noise floor.																																																			
f	Measurement Frequency				Preamp Gain				Avg Lim				Average Field Strength Limit																																						
Dist	Distance to Antenna				D Corr				Peak Lim				Peak Field Strength Limit																																						
Read	Analyzer Reading				Avg				Avg Mar				Margin vs. Average Limit																																						
AF	Antenna Factor				Peak				Pk Mar				Margin vs. Peak Limit																																						
CL	Cable Loss				HPF																																														

### 8.3. WORST-CASE BELOW 1 GHz

#### 8.3.1. WORST-CASE 8PSK MODE

##### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL & VERTICAL)

##### HORIZONTAL AND VERTICAL DATA

###### High Frequency Measurement Compliance Certification Services, Fremont 3m Chamber

Test Engr: Vien Tran  
Date: 10/21/09  
Project #: 09U12871  
Company: Broadcom  
EUT Description: 802.11g/Draft 802.11n WLAN + BT PCI-E MINICARD  
EUT M/N: BCM94343HMGB  
Test Target: FCC Class B  
Mode Oper: Tx Below 1GHz - Worst-Case

f	Measurement Frequency	Amp	Preamp Gain	Margin	Margin vs. Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters		
Read	Analyzer Reading	Filter	Filter Insert Loss		
AF	Antenna Factor	Corr.	Calculated Field Strength		
CL	Cable Loss	Limit	Field Strength Limit		

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant Pol V/H	Det P/A/QP	Notes
<b>Vertical</b>													
99.963	3.0	50.9	9.3	0.8	28.2	0.0	0.0	32.8	43.5	-10.7	V	EP	
300.011	3.0	49.4	13.5	1.5	27.4	0.0	0.0	37.0	46.0	-9.0	V	EP	
480.019	3.0	49.3	16.5	1.9	28.5	0.0	0.0	39.2	46.0	-6.8	V	EP	
619.944	3.0	45.7	18.5	2.2	28.6	0.0	0.0	37.9	46.0	-8.1	V	EP	
996.040	3.0	38.8	22.7	2.9	27.6	0.0	0.0	36.8	54.0	-17.2	V	EP	
<b>Horizontal</b>													
199.807	3.0	52.1	11.9	1.2	27.4	0.0	0.0	37.8	43.5	-5.7	H	EP	
299.771	3.0	53.6	13.5	1.5	27.4	0.0	0.0	41.2	46.0	-4.8	H	EP	
399.615	3.0	49.1	15.0	1.7	28.0	0.0	0.0	37.9	46.0	-8.1	H	EP	
619.944	3.0	47.1	18.5	2.2	28.6	0.0	0.0	39.3	46.0	-6.7	H	EP	
979.959	3.0	42.0	22.6	2.9	27.6	0.0	0.0	39.8	54.0	-14.2	H	EP	

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

### 8.3.2. WORST-CASE LE MODE

#### HORIZONTAL AND VERTICAL DATA

##### 30-1000MHz Frequency Measurement

Compliance Certification Services, Fremont 3m Chamber

Test Engr: Vien Tran  
Date: 10/19/10  
Project #: 10U13391  
Company: Broadcom  
Test Target: FCC B  
Mode Oper: Tx Worst-Case\_BLE Mode (Bluetooth Low Energy )

f	Measurement Frequency	Amp	Preamp Gain	Margin	Margin vs. Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters		
Read	Analyzer Reading	Filter	Filter Insert Loss		
AF	Antenna Factor	Corr.	Calculated Field Strength		
CL	Cable Loss	Limit	Field Strength Limit		

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Pad dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det. P/A/QP	Notes
<b>Horizontal</b>													
32.16	3.0	34.9	18.9	0.5	28.4	0.0	0.0	26.0	40.0	-14.0	H	P	
121.204	3.0	44.0	13.7	0.9	28.1	0.0	0.0	30.5	43.5	-13.0	H	P	
192.007	3.0	47.9	11.4	1.1	27.4	0.0	0.0	33.0	43.5	-10.5	H	P	
278.29	3.0	46.5	12.7	1.4	27.4	0.0	0.0	33.2	46.0	-12.8	H	P	
399.975	3.0	44.9	15.0	1.7	28.0	0.0	0.0	33.7	46.0	-12.3	H	P	
566.422	3.0	44.2	17.9	2.1	28.6	0.0	0.0	35.6	46.0	-10.4	H	P	
<b>Vertical</b>													
30.72	3.0	45.0	19.6	0.5	28.4	0.0	0.0	36.7	40.0	-3.3	V	P	
30.72	3.0	42.9	19.6	0.5	28.4	0.0	0.0	34.6	40.0	-5.4	V	QP	
122.284	3.0	51.8	13.8	0.9	28.1	0.0	0.0	38.4	43.5	-5.1	V	P	
284.29	3.0	45.6	13.0	1.4	27.4	0.0	0.0	32.6	46.0	-13.4	V	P	
499.819	3.0	42.6	16.8	2.0	28.6	0.0	0.0	32.8	46.0	-13.2	V	P	
566.542	3.0	40.2	17.9	2.1	28.6	0.0	0.0	31.7	46.0	-14.3	V	P	
895.716	3.0	36.1	22.0	2.7	27.9	0.0	0.0	32.9	46.0	-13.1	V	P	

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 <sup>*</sup>	56 to 46 <sup>*</sup>
0.5-5	56	46
5-30	60	50

<sup>\*</sup> Decreases with the logarithm of the frequency.

### TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.

Line conducted data is recorded for both NEUTRAL and HOT lines.


### RESULTS

## 9.1. WORST-CASE 8PSK MODE


### 6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit	FCC_B	Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP (dB)	AV (dB)	
0.19	51.43	--	38.09	0.00	63.91	53.91	-12.48	-15.82	L1
0.59	30.76	--	26.20	0.00	56.00	46.00	-25.24	-19.80	L1
9.65	34.07	--	24.65	0.00	60.00	50.00	-25.93	-25.35	L1
0.19	50.30	--	37.63	0.00	63.91	53.91	-13.61	-16.28	L2
0.59	31.13	--	25.33	0.00	56.00	46.00	-24.87	-20.67	L2
9.65	33.99	--	22.70	0.00	60.00	50.00	-26.01	-27.30	L2
6 Worst Data									

**LINE 1 RESULTS**

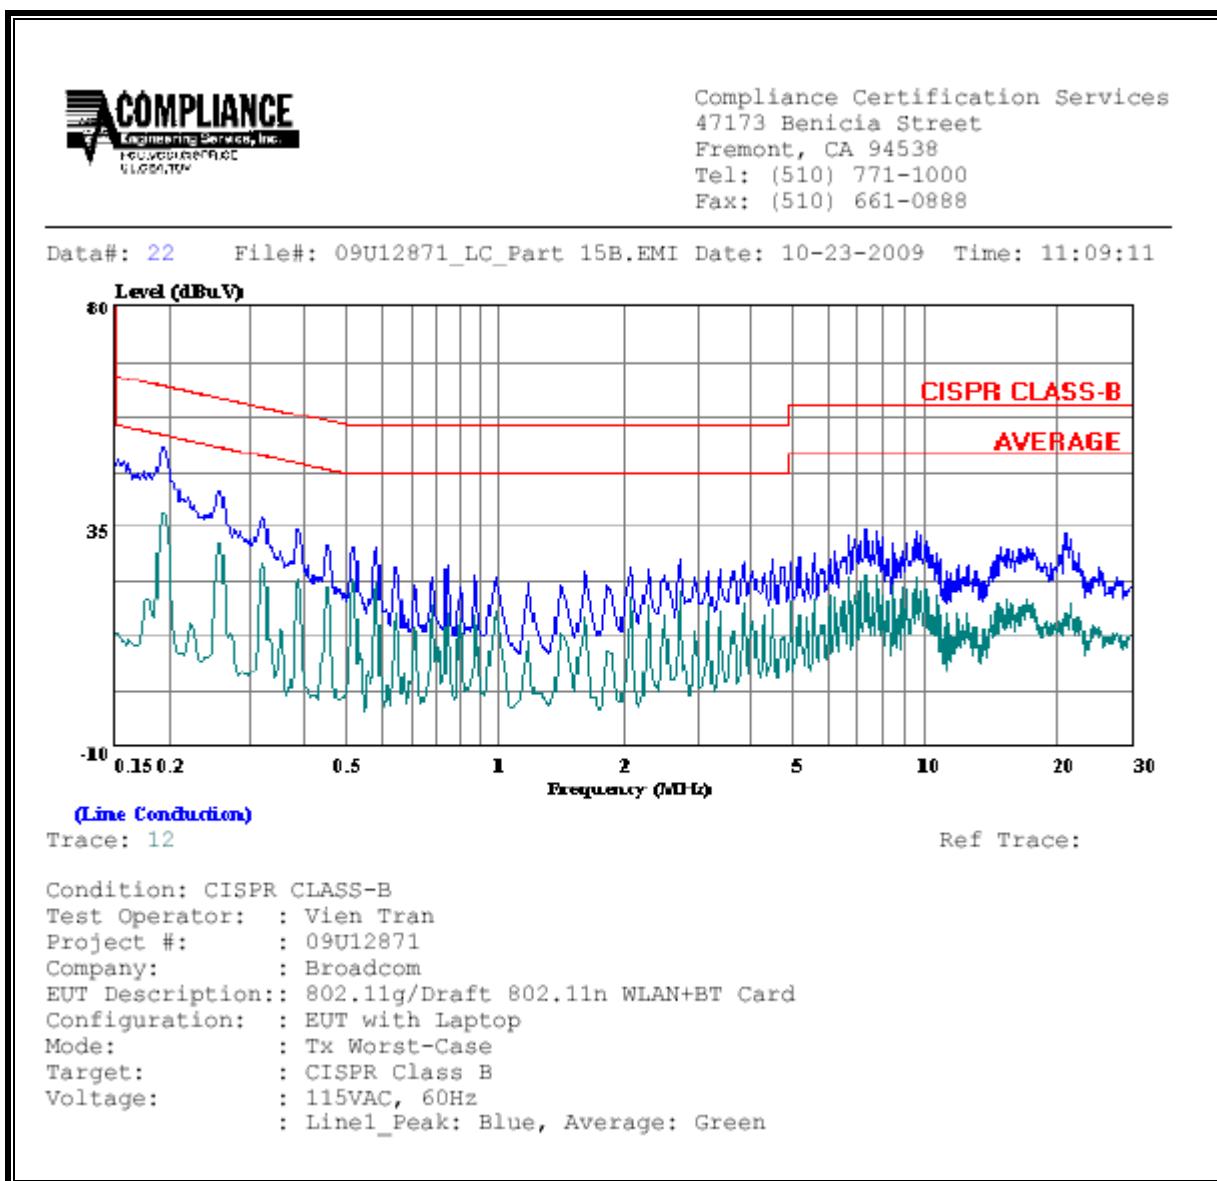

**LINE 2 RESULTS**

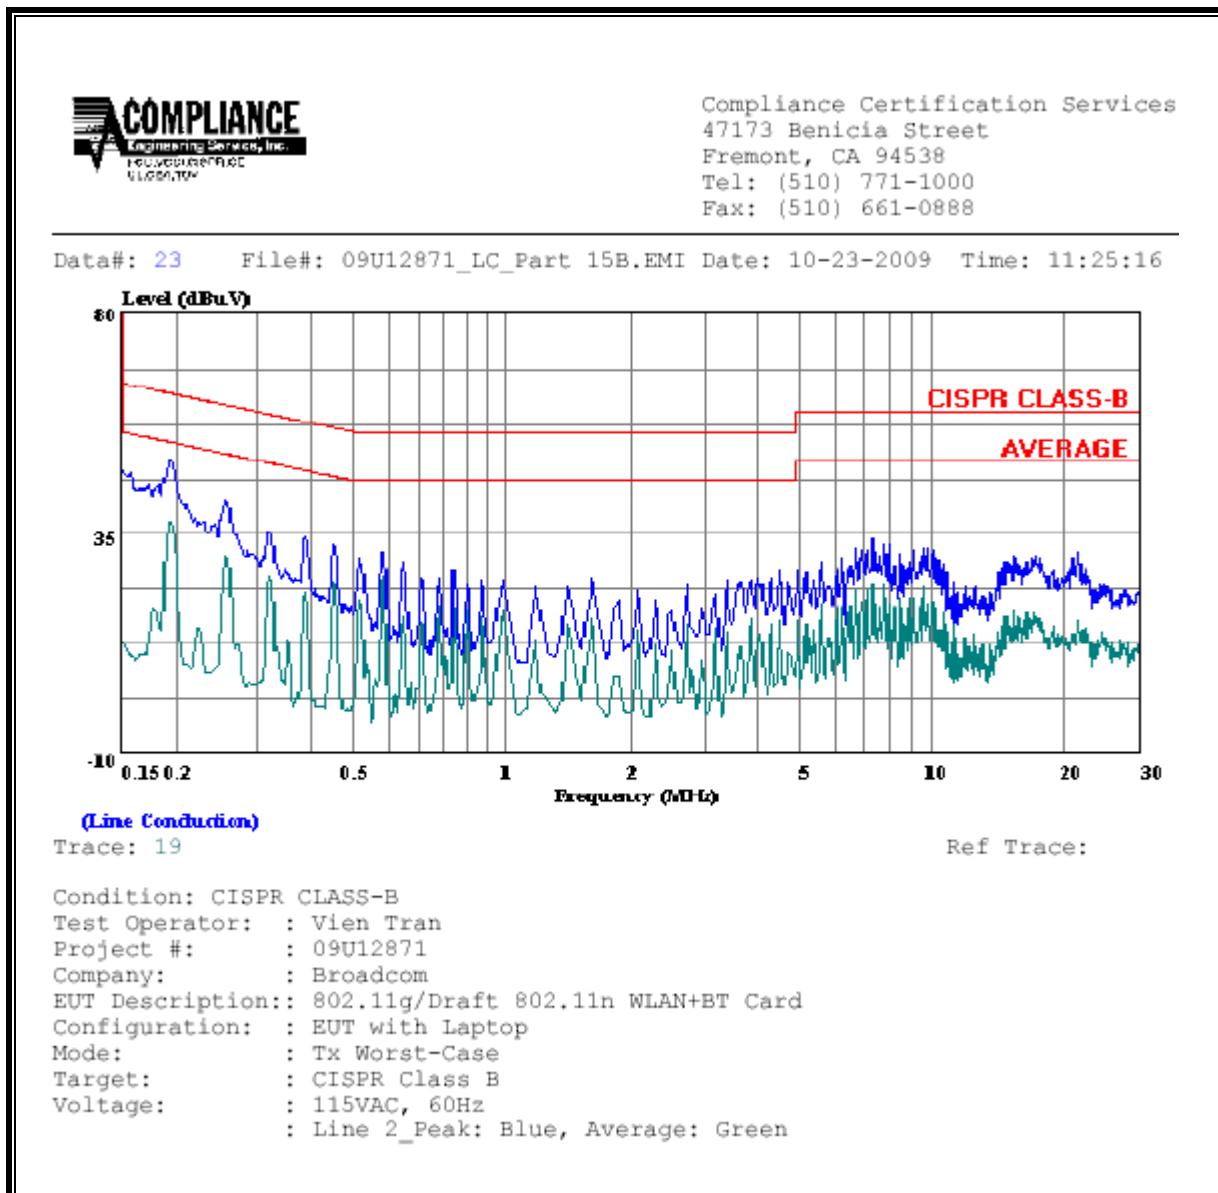


## 9.2. WORST-CASE LE MODE


### 6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit	FCC_B	Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP (dB)	AV (dB)	
0.17	55.38	--	39.44	0.00	65.16	55.16	-9.78	-15.72	L1
3.92	35.88	--	18.62	0.00	56.00	46.00	-20.12	-27.38	L1
21.49	42.11	--	27.35	0.00	60.00	50.00	-17.89	-22.65	L1
0.17	54.12	--	38.78	0.00	65.16	55.16	-11.04	-16.38	L2
3.92	34.82	--	17.19	0.00	56.00	46.00	-21.18	-28.81	L2
21.49	42.25	--	26.32	0.00	60.00	50.00	-17.75	-23.68	L2
6 Worst Data									

**LINE 1 RESULTS**

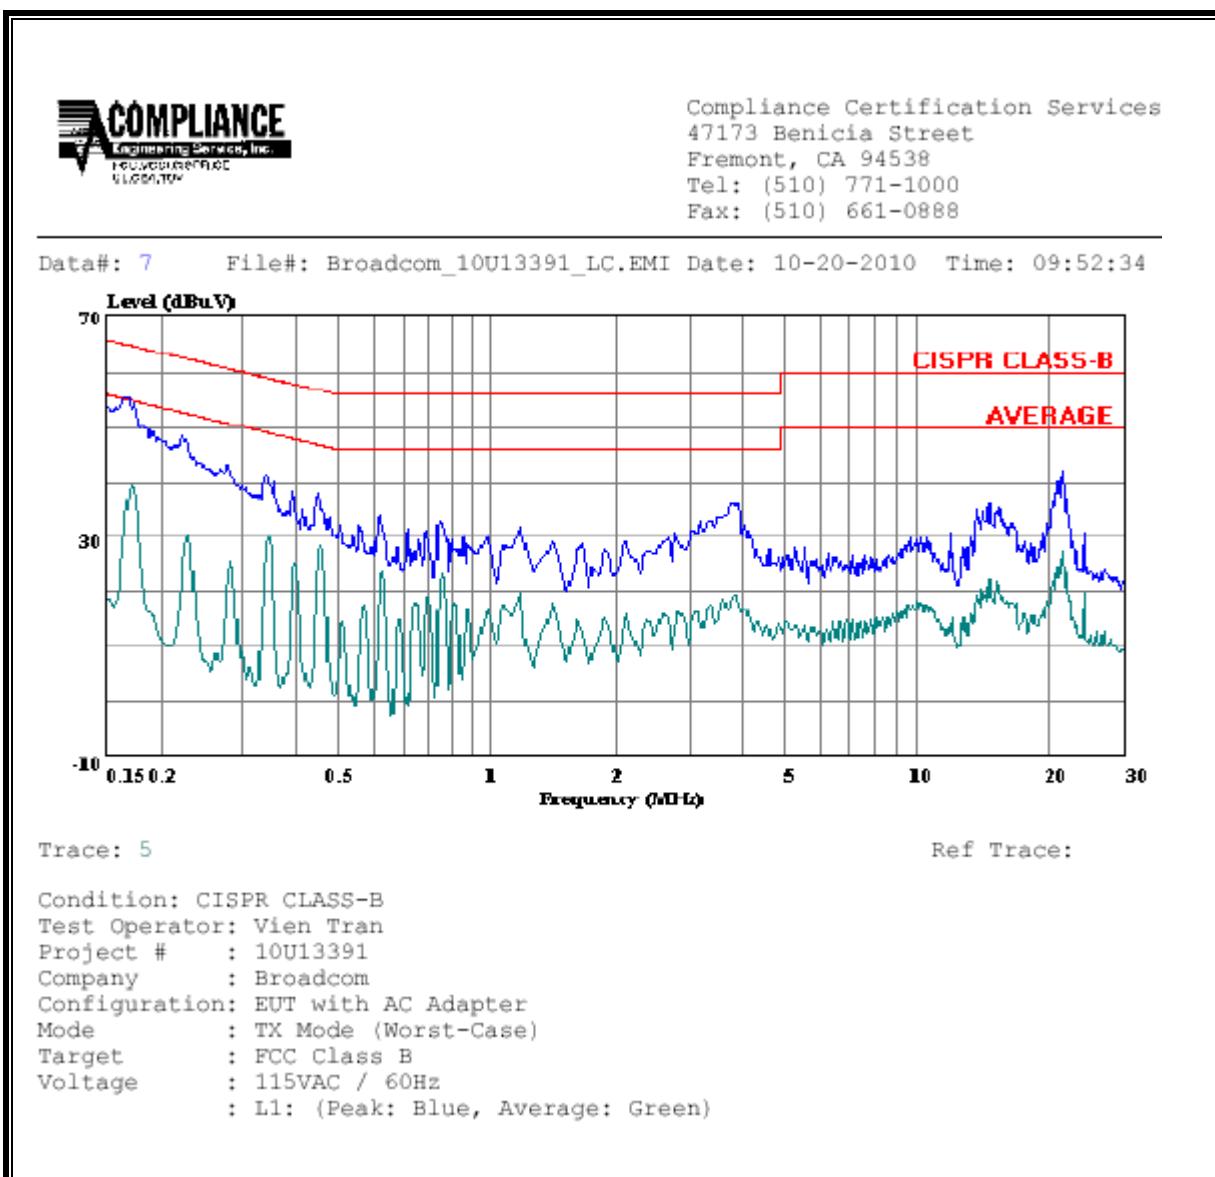

**LINE 2 RESULTS**

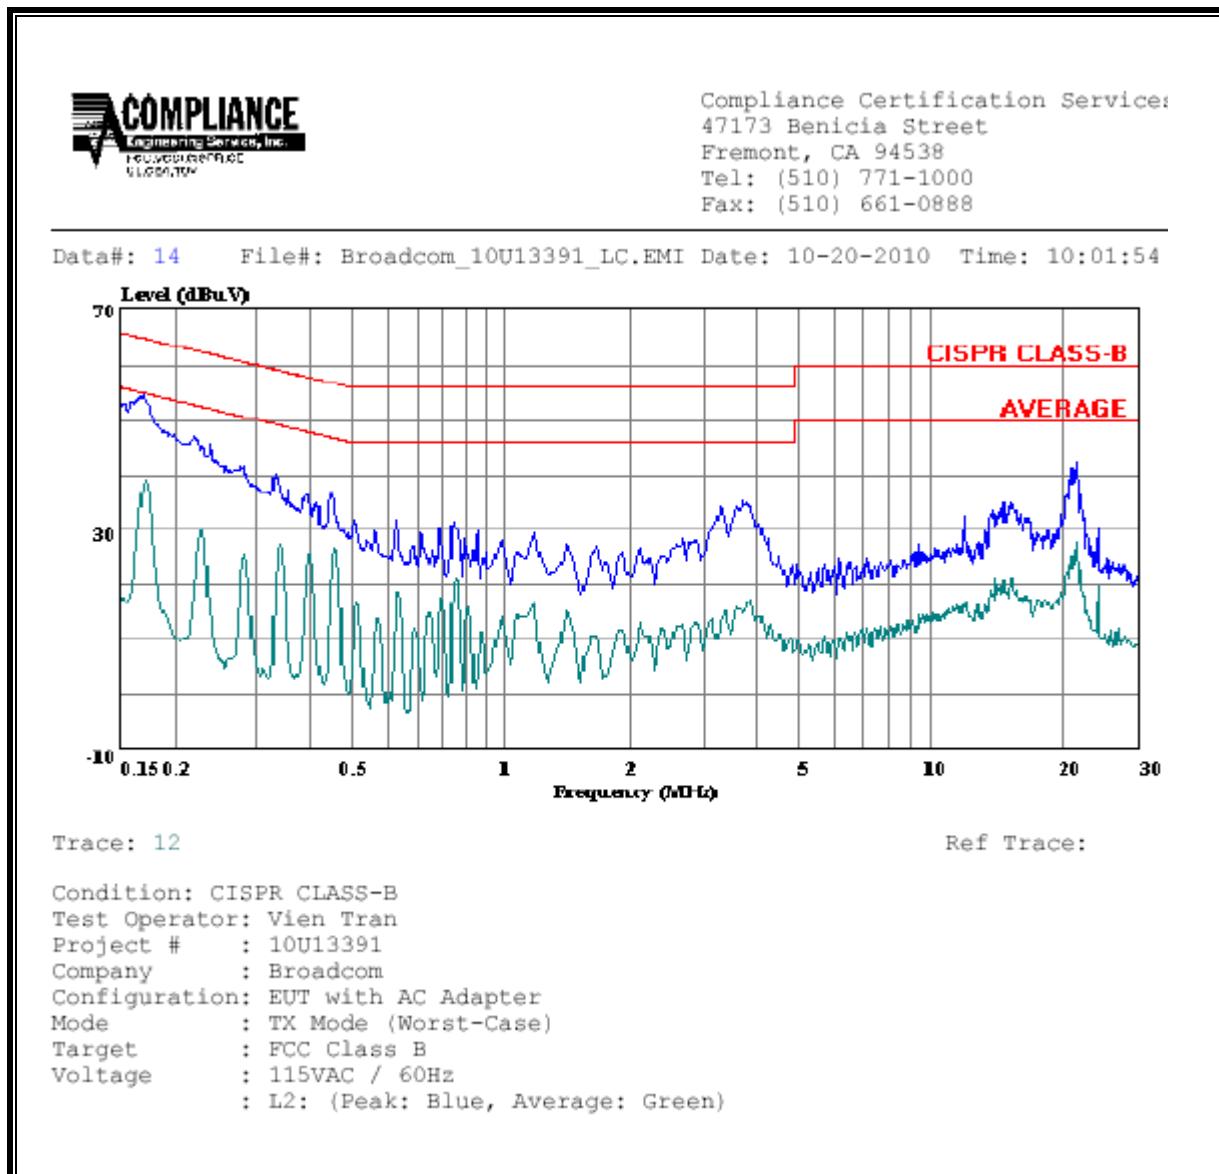

## 10. MAXIMUM PERMISSIBLE EXPOSURE

### FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0 .....	614	1.63	*(100)	6
3.0–30 .....	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30–300 .....	61.4	0.163	1.0	6
300–1500 .....	.....	.....	f/300	6
1500–100,000 .....	.....	.....	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34 .....	614	1.63	*(100)	30
1.34–30 .....	824/f	2.19/f	*(180/f <sup>2</sup> )	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
30–300 .....	27.5	0.073	0.2	30
300–1500 .....	.....	.....	f/1500	30
1500–100,000 .....	.....	.....	1.0	30

f = frequency in MHz

\* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

**IC RULES**

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

**Table 5**  
**Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)**

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m <sup>2</sup> )	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> <sup>0.5</sup>	0.0042 <i>f</i> <sup>0.5</sup>	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> <sup>1.2</sup>
150 000–300 000	0.158 <i>f</i> <sup>0.5</sup>	4.21 × 10 <sup>-4</sup> <i>f</i> <sup>0.5</sup>	6.67 × 10 <sup>-5</sup> <i>f</i>	616 000 / <i>f</i> <sup>1.2</sup>

\* Power density limit is applicable at frequencies greater than 100 MHz.

**Notes:**

1. Frequency, *f*, is in MHz.
2. A power density of 10 W/m<sup>2</sup> is equivalent to 1 mW/cm<sup>2</sup>.
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

## EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \pi * D^2)$$

where

S = Power density in W/m<sup>2</sup>

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m<sup>2</sup> is converted to units of mWc/m<sup>2</sup> by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \pi * S))$$

where

D = Separation distance in m

EIRP = Equivalent Isotropic Radiated Power in W

S = Power density in W/m<sup>2</sup>

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power \* Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)$$

where

Px = Power of transmitter x

Gx = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

## LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm<sup>2</sup>

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m<sup>2</sup>

## RESULTS

Band	Mode	Separation Distance (m)	Output Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m <sup>2</sup> )	FCC Power Density (mW/cm <sup>2</sup> )
2.4 GHz	Bluetooth	0.20	4.46	3.90	0.01	0.001