



FCC CFR47 PART 15 SUBPART B

DECLARATION OF CONFORMITY TEST REPORT

FOR

802.11agn WLAN + BLUETOOTH PCI-E MINICARD

MODEL NUMBER: BCM943224PCIEBT2

REPORT NUMBER: 10U13263-36, Revision A

ISSUE DATE: AUGUST 19, 2010

Prepared for
BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.

Prepared by
COMPLIANCE CERTIFICATION SERVICES
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	08/02/10	Initial Issue	T. Chan
A	08/19/10	Revised EUT description	A. Zaffar

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION.....</i>	5
4.2. <i>SAMPLE CALCULATION.....</i>	5
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT.....</i>	6
5.2. <i>GENERAL INFORMATION.....</i>	6
5.3. <i>PRELIMINARY TEST CONFIGURATIONS</i>	6
5.4. <i>MODE(s) OF OPERATION.....</i>	6
5.5. <i>SOFTWARE AND FIRMWARE.....</i>	6
5.6. <i>MODIFICATIONS.....</i>	6
5.7. <i>DETAILS OF TESTED SYSTEM</i>	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. APPLICABLE LIMITS AND TEST RESULTS	10
7.1. <i>RADIATED EMISSIONS</i>	10
7.1.1. <i>RADIATED EMISSIONS 30 to 1000 MHz</i>	11
7.2. <i>AC MAINS LINE CONDUCTED EMISSIONS</i>	12
8. SETUP PHOTOS.....	16

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BROADCOM CORP.
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.

EUT DESCRIPTION: 802.11agn WLAN + BLUETOOTH PCI-E MINICARD

MODEL: BCM943224PCIEBT2

SERIAL NUMBER: 489

DATE TESTED: JULY 21, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 15 SUBPART B	Pass

Compliance Certification Services, Inc. (CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For CCS By:



THU CHAN
ENGINEERING MANAGER
COMPLIANCE CERTIFICATION SERVICES

Tested By:



VIEN TRAN
EMC ENGINEER
COMPLIANCE CERTIFICATION SERVICES

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11agn WLAN + Bluetooth PCI-E Minicard.
The radio module is manufactured by Broadcom

5.2. GENERAL INFORMATION

Power Requirements	100-240 VAC / 50-60 Hz
List of frequencies generated or used by the EUT	20 MHz

5.3. PRELIMINARY TEST CONFIGURATIONS

The following configuration was investigated during testing:

EUT Configuration	Description
Typical Configuration	EUT connected to laptop via extended board with minimum configuration such as printer, USB mouse.

5.4. MODE(s) OF OPERATION

Mode	Description
EMC Test & TX	All I/O ports activate with H' patterns scrolling on the screen display with TX on.

5.5. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was Broadcom, rev. 5.10.131.31
The test utility software used during testing was BCM Internal, rev. 5.10.RC131.31

5.6. MODIFICATIONS

No modifications were made during testing.

5.7. DETAILS OF TESTED SYSTEM

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	4446	R8-CAD03	DoC
AC Adapter	Lenovo	ADP-65YBB	11S42T4458Z1ZF4K96B09D	DoC
Printer	HP	7850	MY56K1304B	DoC
USB Mouse	Logitech	90.00026.7730	HCA55002148	DoC


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	2	US 115V	Shielded	1.5m	NA
2	DC	2	DC	Un-shielded	1.5m	Ferrite at laptop's end
3	USB	1	Printer	Un-shielded	2.0m	Bundle
4	USB	1	USB	Un-shielded	2.0m	USB Mouse

TEST SETUP

The EUT is connected to a host laptop computer via Express card to MiniPCI-E adapter board during the test. Test software exercised the radio card.

TEST SETUP DIAGRAM

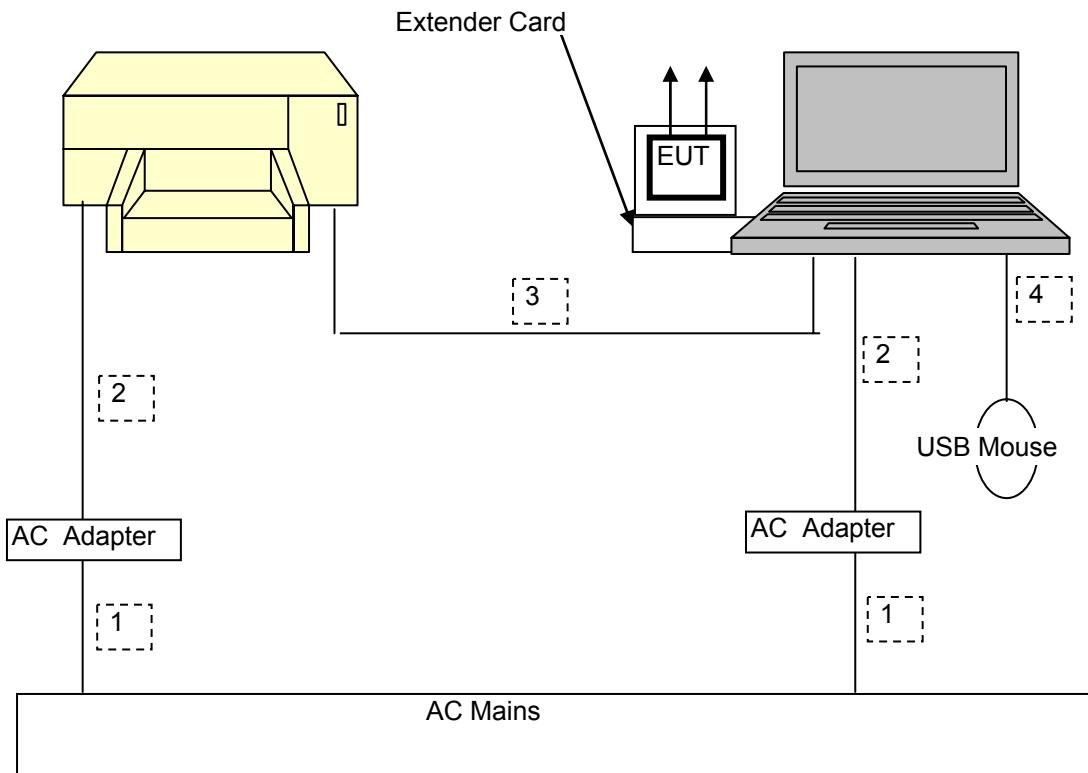

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST					
Description	Manufacturer	Model	Asset	Cal Date	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00996	04/29/10	10/29/11
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01171	01/14/09	07/14/11
Antenna, Horn, 18 GHz	EMCO	3115	C00872	01/29/09	07/29/10
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00778	01/06/10	07/06/11
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	02/04/09	08/04/10
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/06/09	11/06/10
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-BNC	N02481	10/29/08	10/29/10

7. APPLICABLE LIMITS AND TEST RESULTS

7.1. RADIATED EMISSIONS

TEST PROCEDURE

ANSI C63.4

The highest clock frequency generated or used in the EUT for the digital portion is 20 MHz; therefore the frequency range was investigated from 30 MHz to 1000 MHz.

LIMIT

§15.109 (a) Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Limits for radiated disturbance of Class B ITE at measuring distance of 3 m	
Frequency range (MHz)	Quasi-peak limits (dB μ V/m)
30 to 88	40
88 to 216	43.5
216 to 960	46
Above 960 MHz	54

Note: The lower limit shall apply at the transition frequency.

RESULTS

7.1.1. RADIATED EMISSIONS 30 to 1000 MHz

RADIATED EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

DATA

30-1000MHz Frequency Measurement
Compliance Certification Services, Fremont 5m Chamber

Test Engr: Chin Pang
Date: 06/21/10
Project #: 10U13263
Company: Broadcom
EUT Description: 802.11abgn Wlan + Bluetooth PCI-E mini card
EUT M/N: BCM943224PCIEBT2
Test Target: FCC 15B
Mode Oper: TX (Worst Case)

f	Measurement Frequency	Amp	Preamp Gain	Margin	Margin vs. Limit
Dist	Distance to Antenna	D	Corr. Distance Correct to 3 meters		
Read	Analyzer Reading	Filter	Filter Insert Loss		
AF	Antenna Factor	Corr.	Calculated Field Strength		
CL	Cable Loss	Limit	Field Strength Limit		

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filter dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
299.651	3.0	47.7	13.5	1.5	27.4	0.0	0.0	35.3	46.0	-10.7	V	P	
336.013	3.0	50.7	14.0	1.6	27.6	0.0	0.0	38.7	46.0	-7.3	V	P	
368.894	3.0	50.2	14.5	1.7	27.8	0.0	0.0	38.5	46.0	-7.5	V	P	
597.383	3.0	46.7	18.4	2.2	28.6	0.0	0.0	38.7	46.0	-7.3	V	P	
899.316	3.0	40.3	22.1	2.7	27.9	0.0	0.0	37.2	46.0	-8.8	V	P	
99.603	3.0	53.5	9.3	0.8	28.2	0.0	0.0	35.4	43.5	-8.1	H	P	
230.408	3.0	54.1	11.8	1.3	27.4	0.0	0.0	39.8	46.0	-6.2	H	P	
369.134	3.0	51.7	14.5	1.7	27.8	0.0	0.0	40.1	46.0	-5.9	H	P	
432.017	3.0	50.2	15.6	1.8	28.2	0.0	0.0	39.5	46.0	-6.5	H	P	
697.468	3.0	41.9	18.9	2.4	28.5	0.0	0.0	34.7	46.0	-11.3	H	P	

Note: No other emissions were detected above the system noise floor.

7.2. AC MAINS LINE CONDUCTED EMISSIONS

TEST PROCEDURE

ANSI C63.4

LIMIT

§15.107 (a) Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

Notes:


1. The lower limit shall apply at the transition frequencies
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

RESULTS

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit QP	EN B AV	Margin		Remark L1 / L2
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP (dB)	AV (dB)	
0.19	52.23	--	38.55	0.00	63.91	53.91	-11.68	-15.36	L1
0.59	35.27	--	30.22	0.00	56.00	46.00	-20.73	-15.78	L1
1.52	32.77	--	29.47	0.00	56.00	46.00	-23.23	-16.53	L1
0.19	51.53	--	38.25	0.00	63.91	53.91	-12.38	-15.66	L2
0.58	35.07	--	31.50	0.00	56.00	46.00	-20.93	-14.50	L2
1.52	33.50	--	29.38	0.00	56.00	46.00	-22.50	-16.62	L2
6 Worst Data									

LINE 1 RESULTS

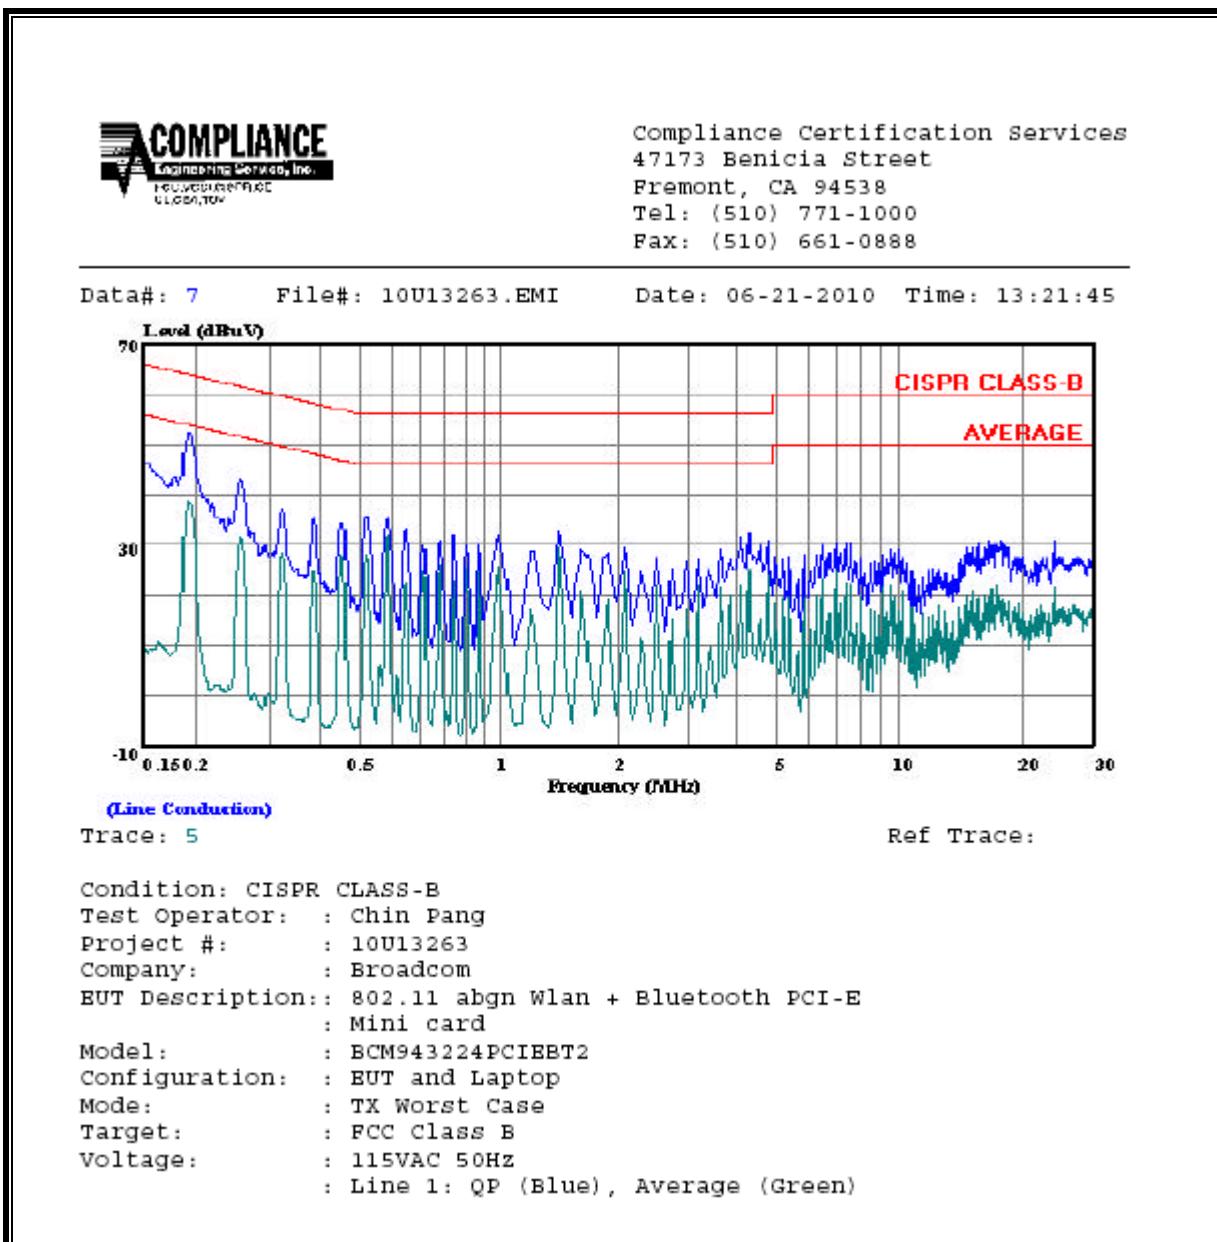

LINE 2 RESULTS

