

7.10. 802.11a LEGACY MODE IN THE 5.6 GHz BAND

7.10.1. 26 dB and 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the measured bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	36.076	18.271
Middle	5600	36.697	17.2868
High	5700	39.453	20.3308

26 dB and 99% BANDWIDTH

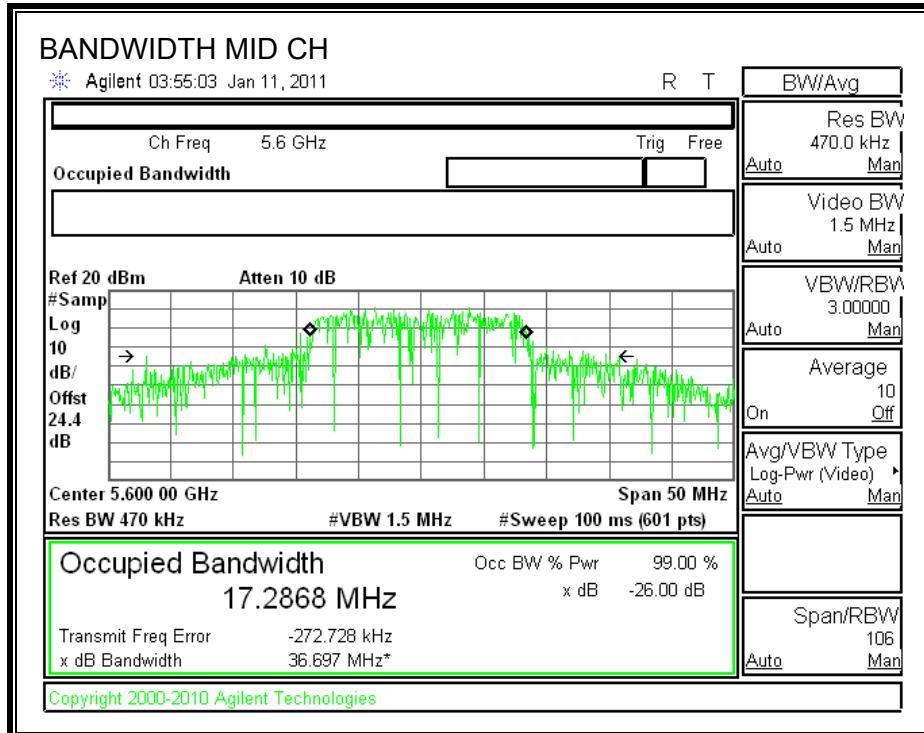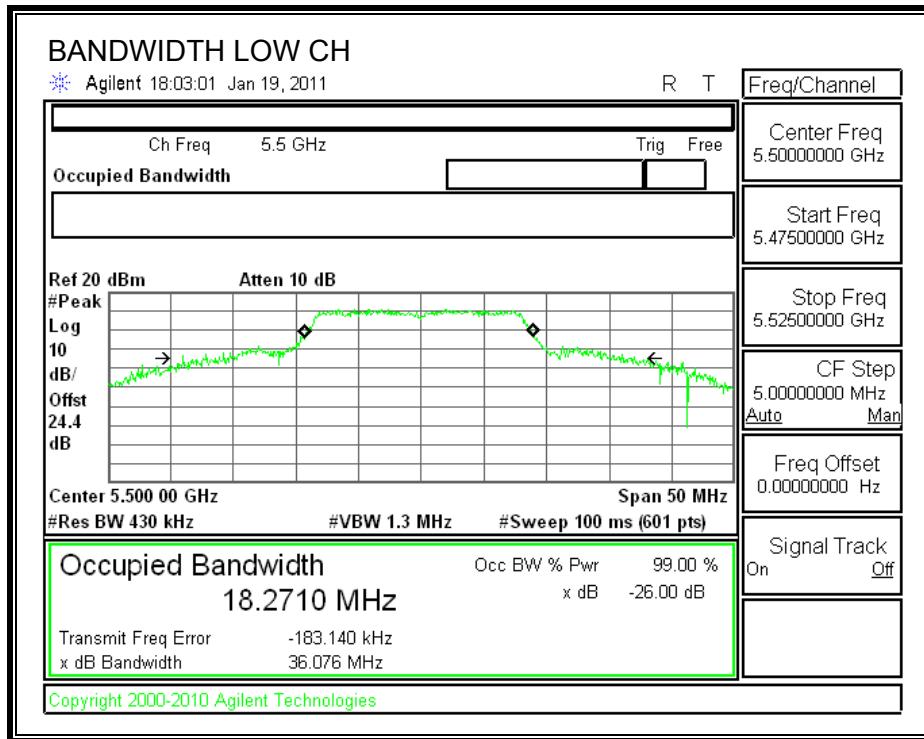



7.10.2. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.47-5.725 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

RESULTS

Limit

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5500	24	36.076	26.57	7.06	22.94
Mid	5600	24	36.697	26.65	7.06	22.94
High	5700	24	39.453	26.96	7.06	22.94



Results


Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dB)
Low	5500	18.47	22.94	-4.47
Mid	5600	20.26	22.94	-2.68
High	5700	20.32	22.94	-2.62

TPC Results


TPC Delta Power	Chain 0			
	4.00			
Worst-case TPC Power	Chain 0	Ant Gain	EIRP	
	High	5700	16.32	7.06
			TPC Limit (dBm)	23.38
			Margin (dB)	-0.62

OUTPUT POWER

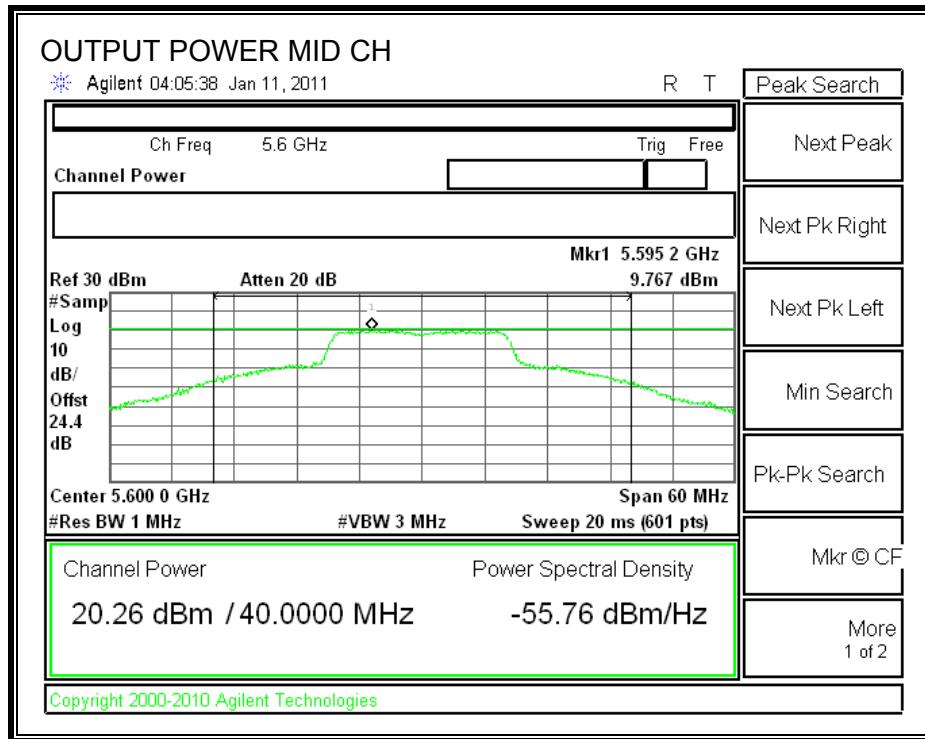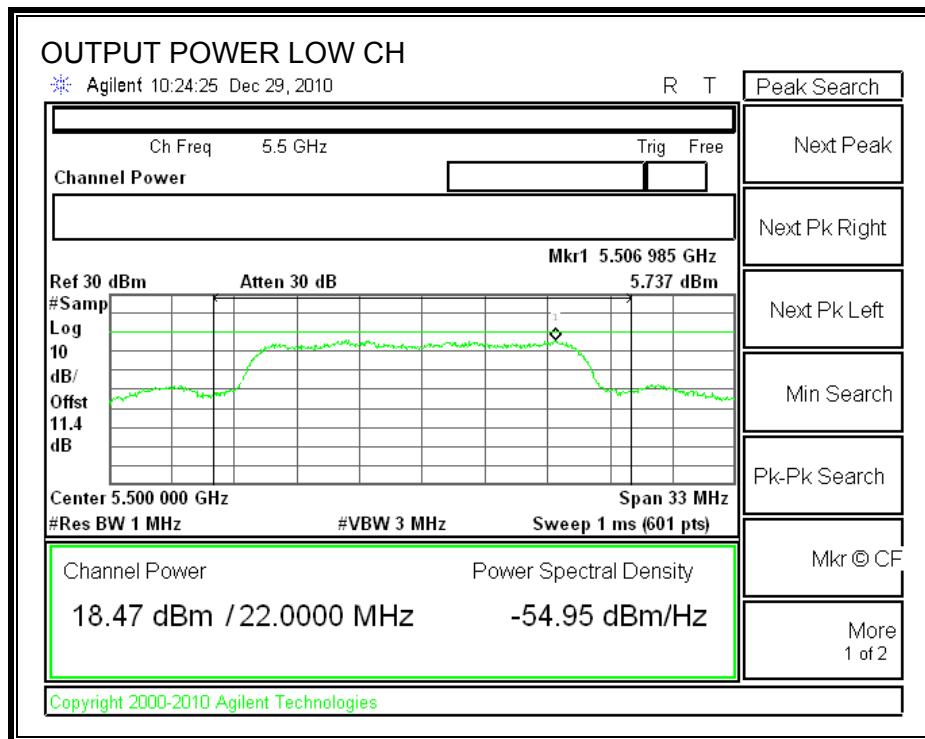

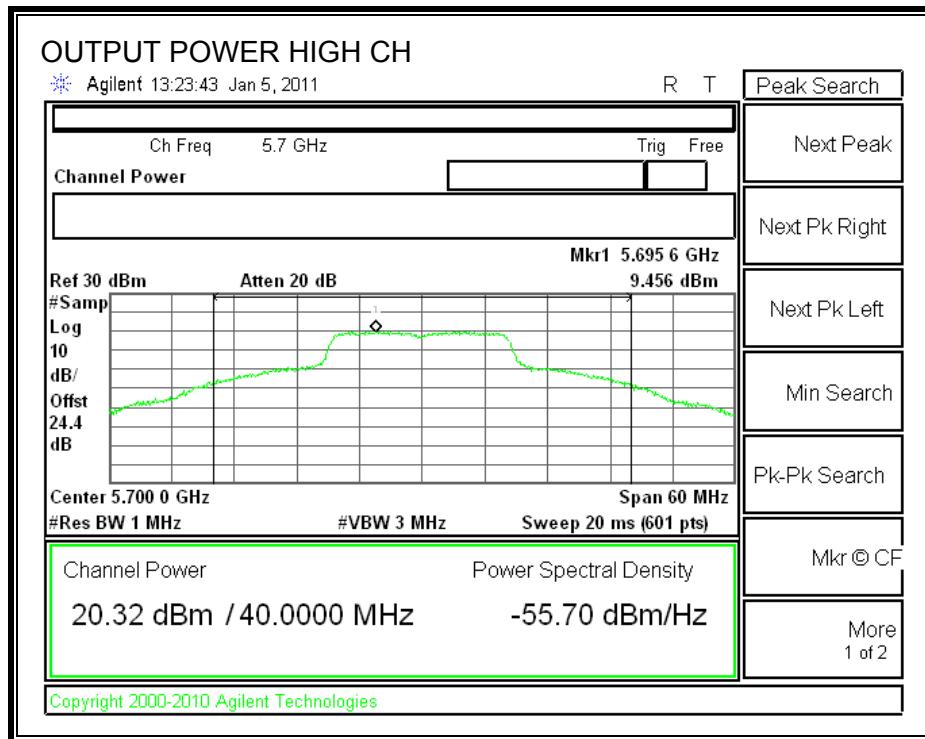

TPC OUTPUT POWER

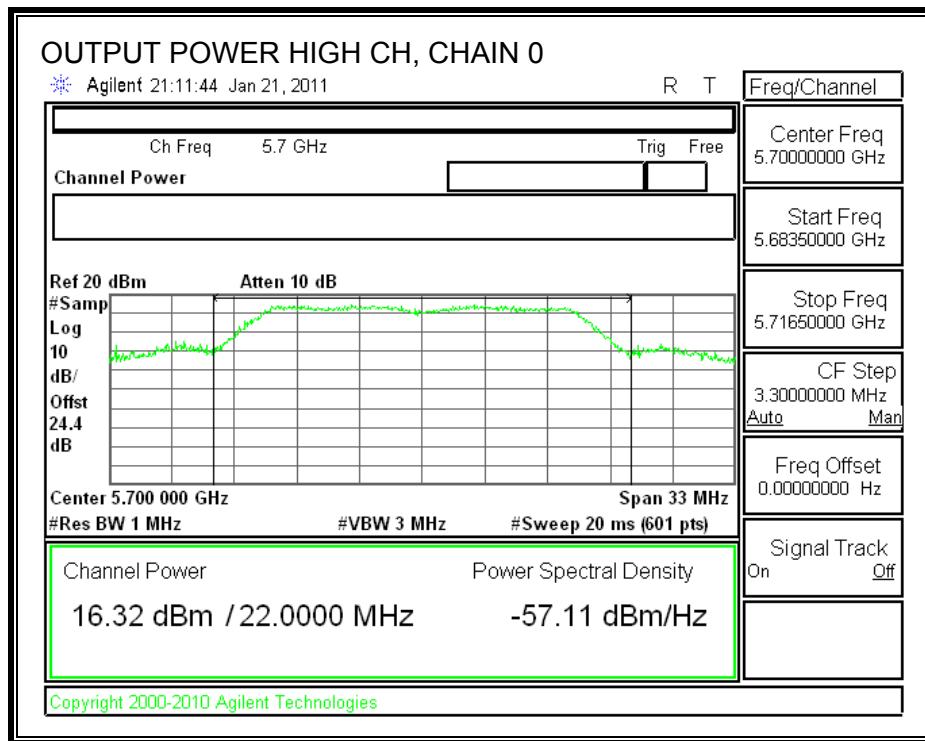

7.10.3. PEAK POWER SPECTRAL DENSITY

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.47-5.725 GHz band, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is equal to 7.06, therefore the limit is 9.94.



TEST PROCEDURE


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5500	5.74	9.94	-4.20
Middle	5600	9.77	9.94	-0.17
High	5700	9.46	9.94	-0.48

POWER SPECTRAL DENSITY

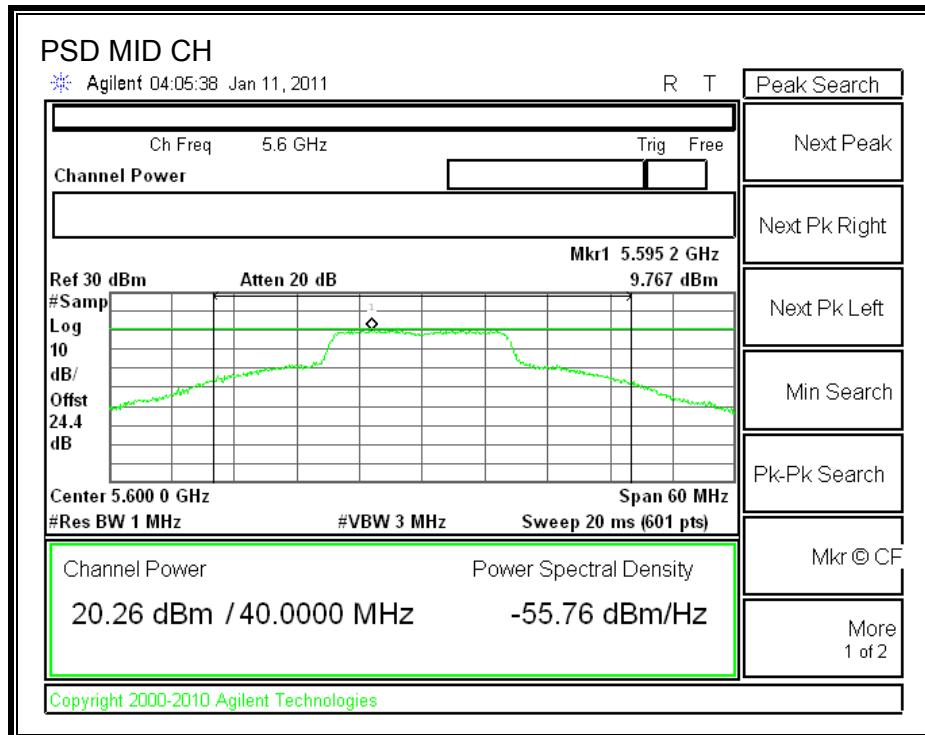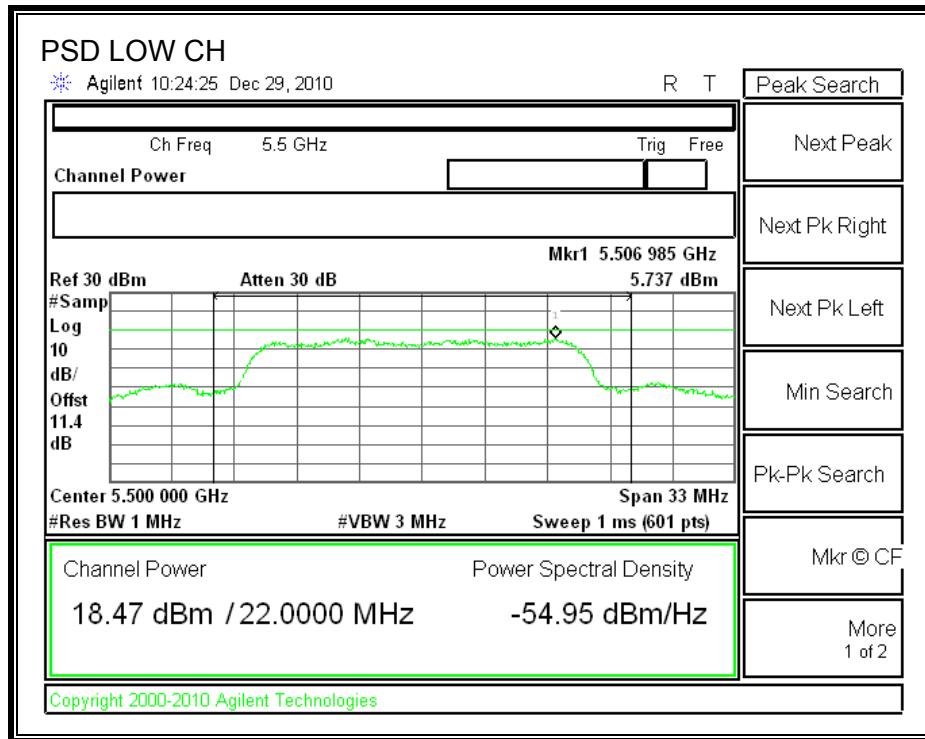

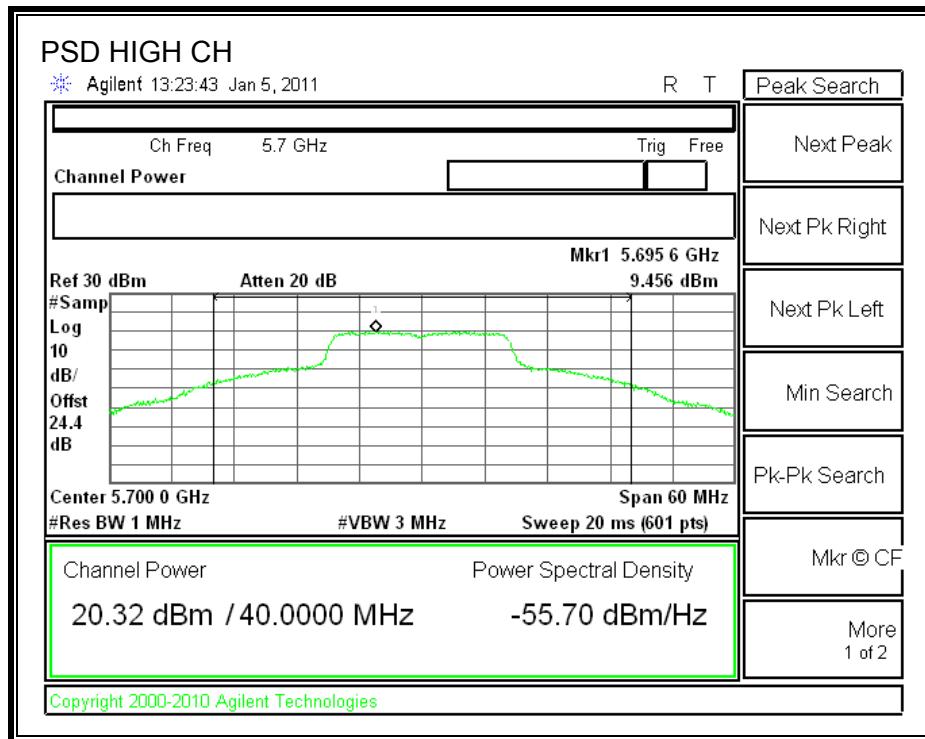

7.10.4. PEAK EXCURSION

LIMITS

FCC §15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

TEST PROCEDURE



The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.


Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5500	8.76	13	-4.24
Middle	5600	9.08	13	-3.92
High	5700	9.96	13	-3.04

PEAK EXCURSION

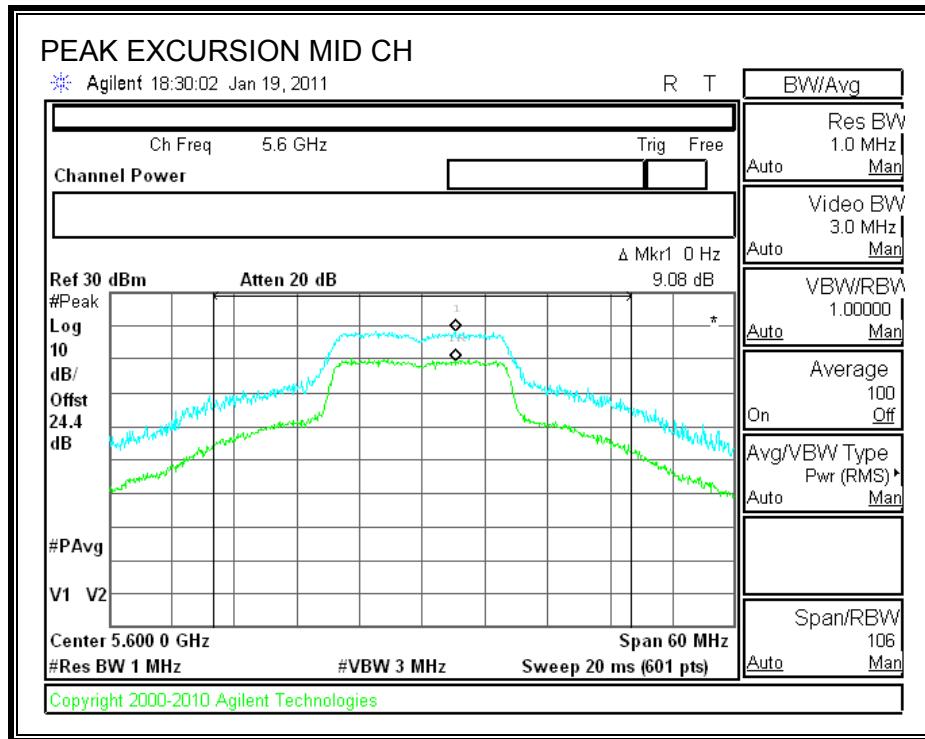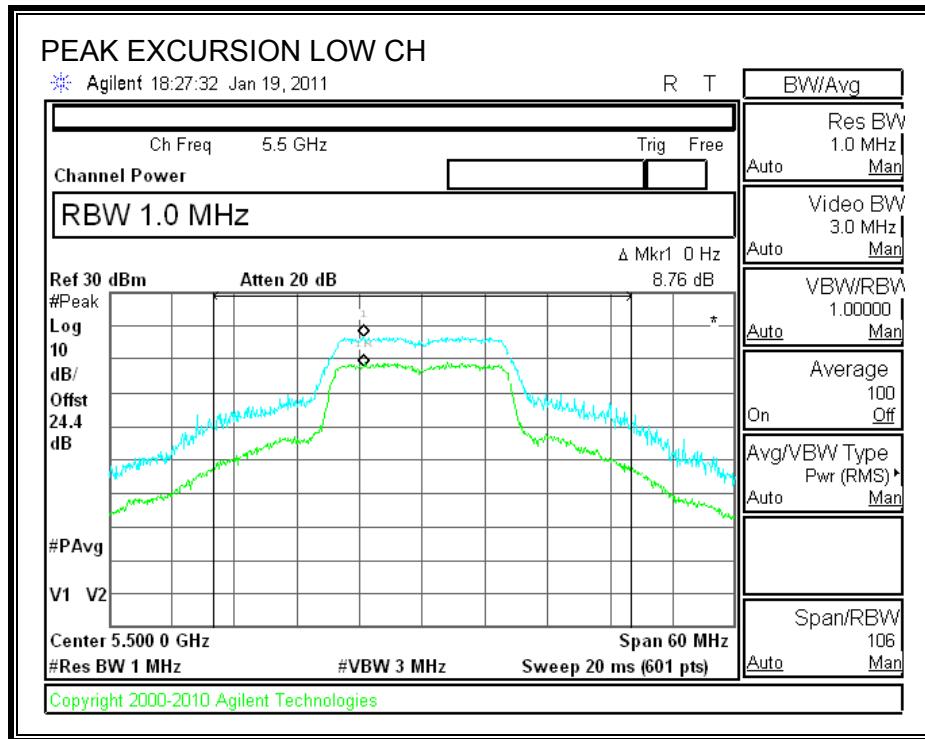

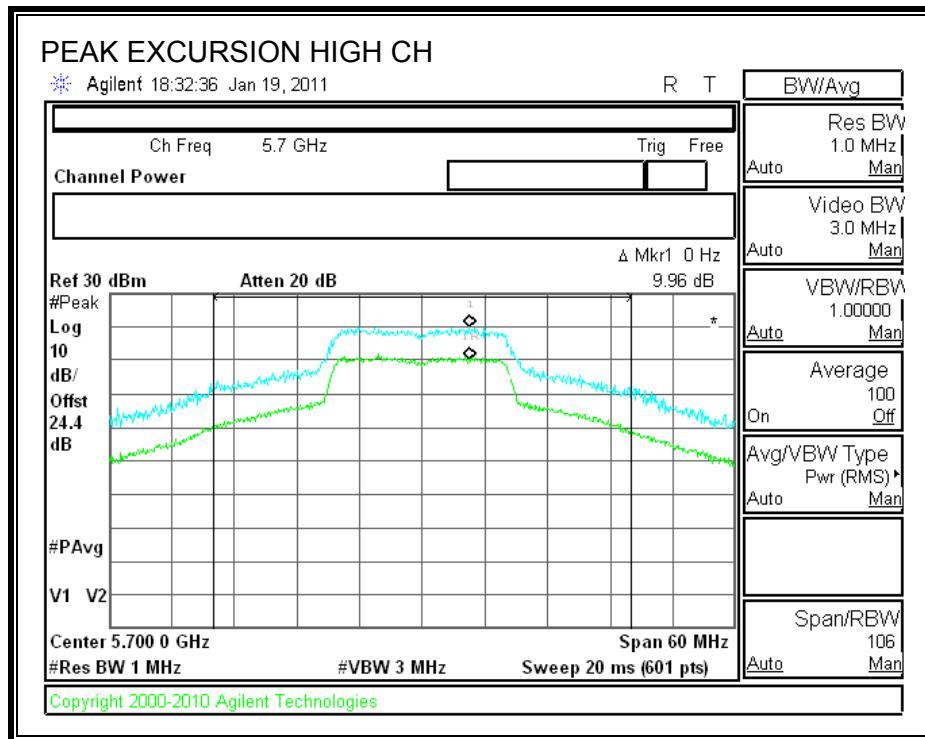

7.10.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.407 (b) (3)

IC RSS-210 A9.3 (3)

For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm / MHz.



TEST PROCEDURE



Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.



The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to EIRP limit, adjusted for the maximum antenna gain.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

RESULTS SPURIOUS EMISSIONS

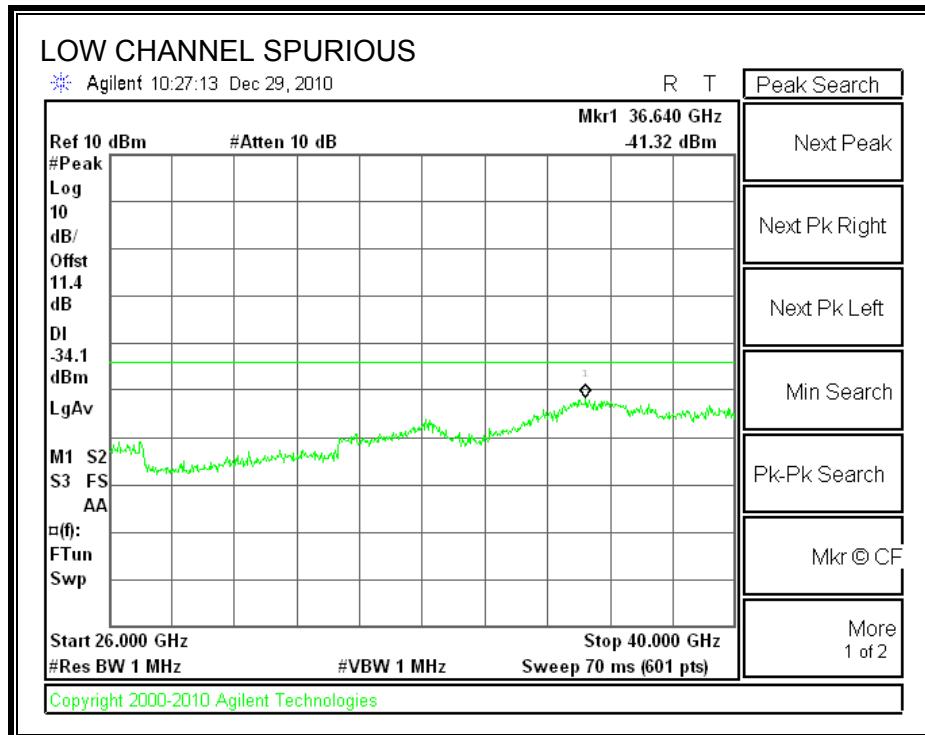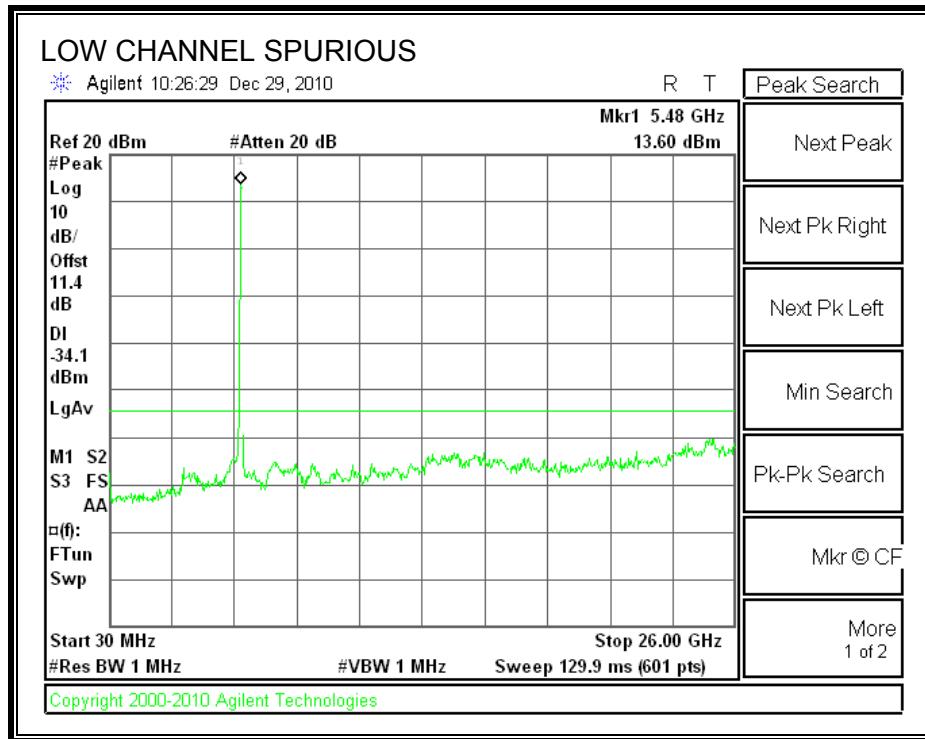

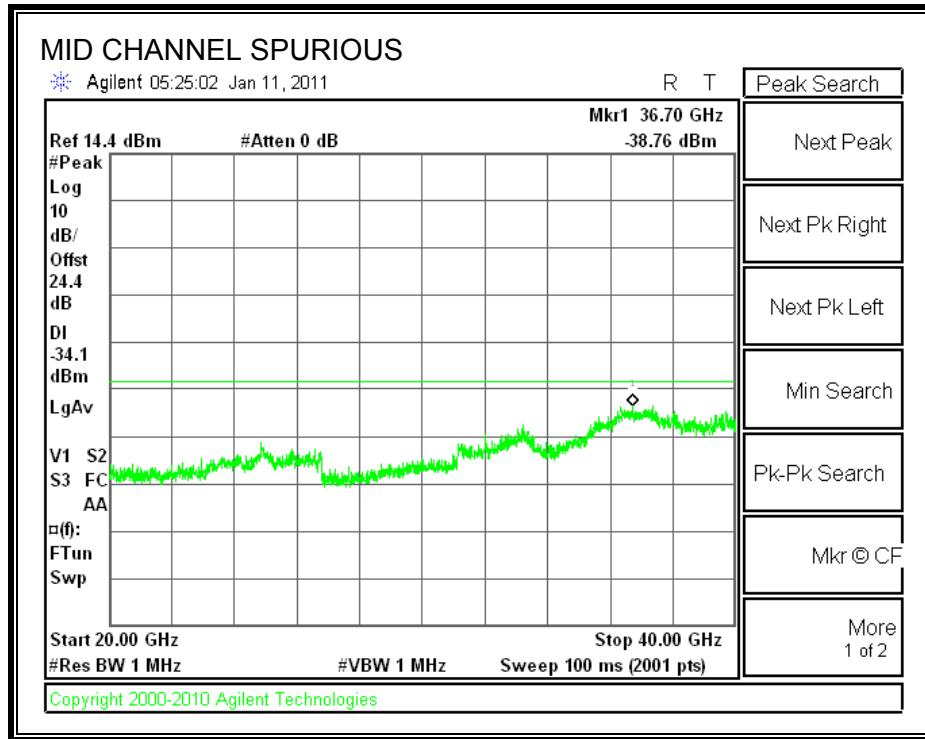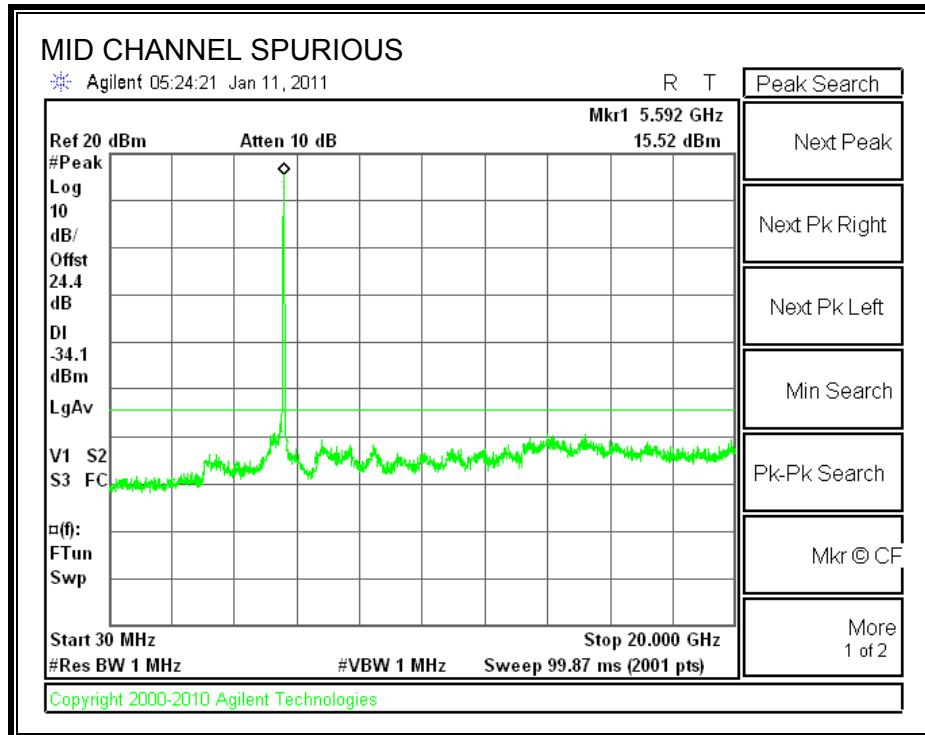

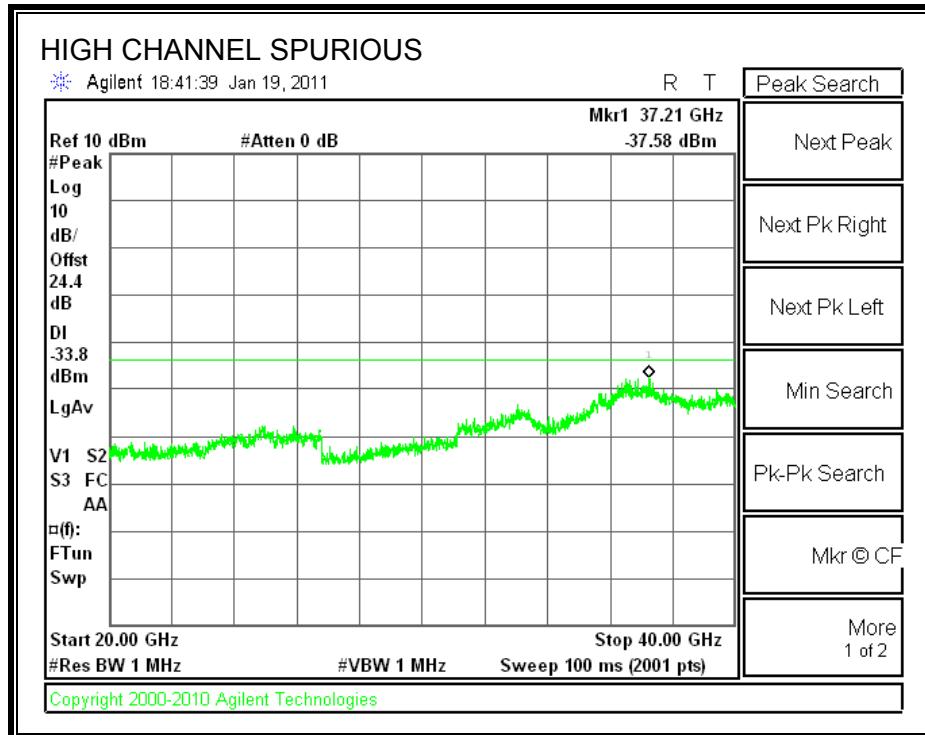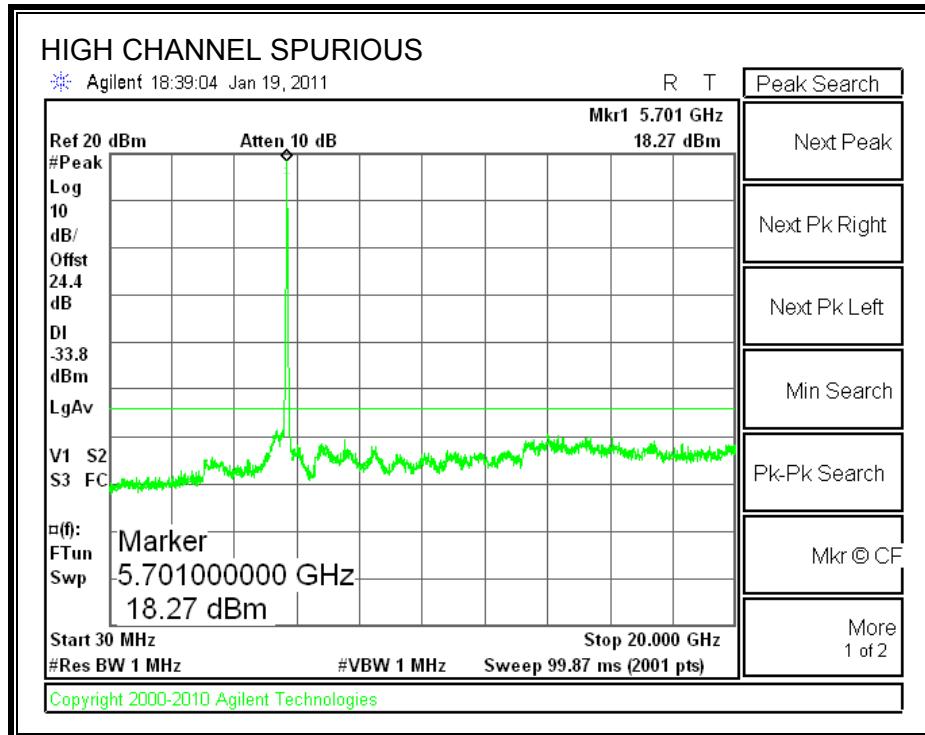

7.11. 802.11n THREE CHAINS HT20 MODE IN THE 5.6 GHz BAND

CDD MCS0

7.11.1. 26 dB and 99% BANDWIDTH

LIMITS

None; for reporting purposes only.

TEST PROCEDURE



The transmitter outputs are connected to the spectrum analyzer via a combiner. The RBW is set to 1% to 3% of the measured bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth function is utilized.


RESULTS

CHAIN 1

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	19.548	17.6906
Middle	5600	21.502	17.7613
High	5700	19.356	17.7158

26 dB and 99% BANDWIDTH

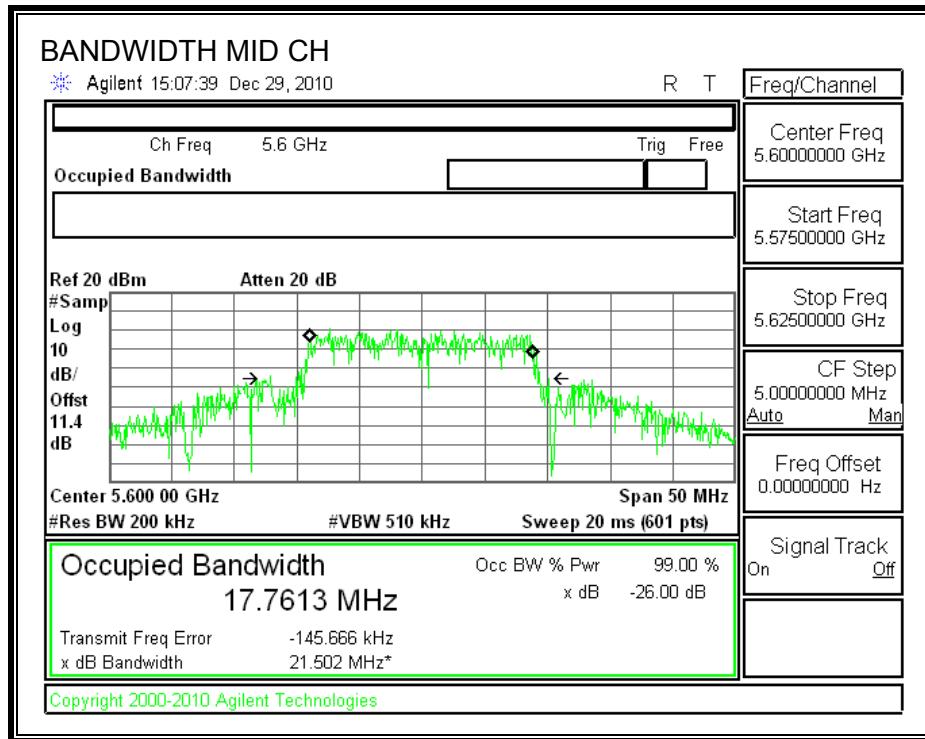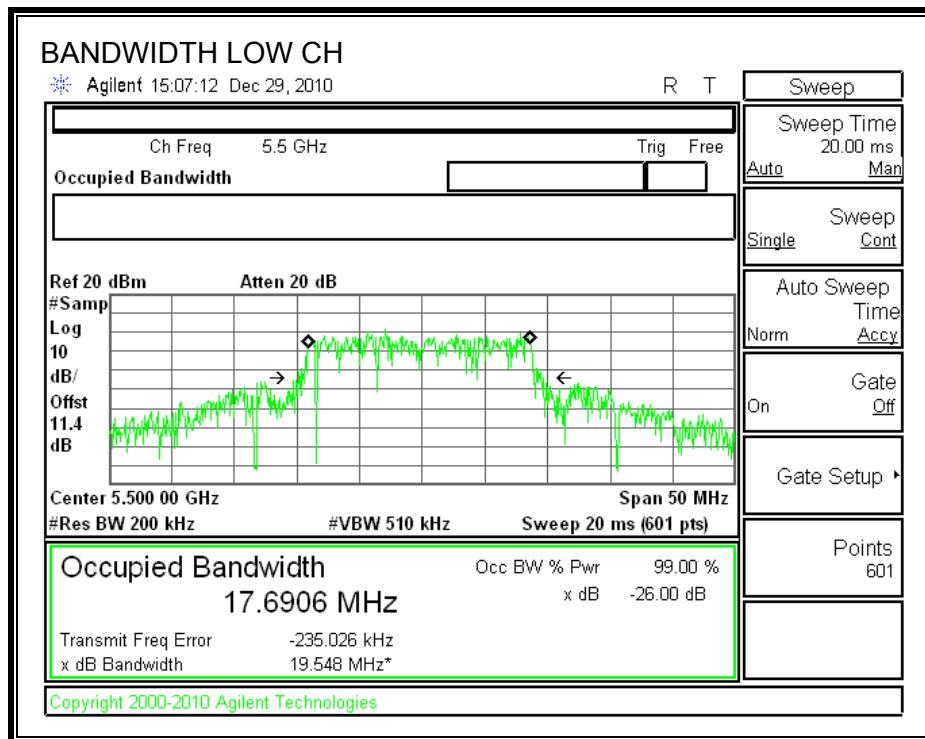

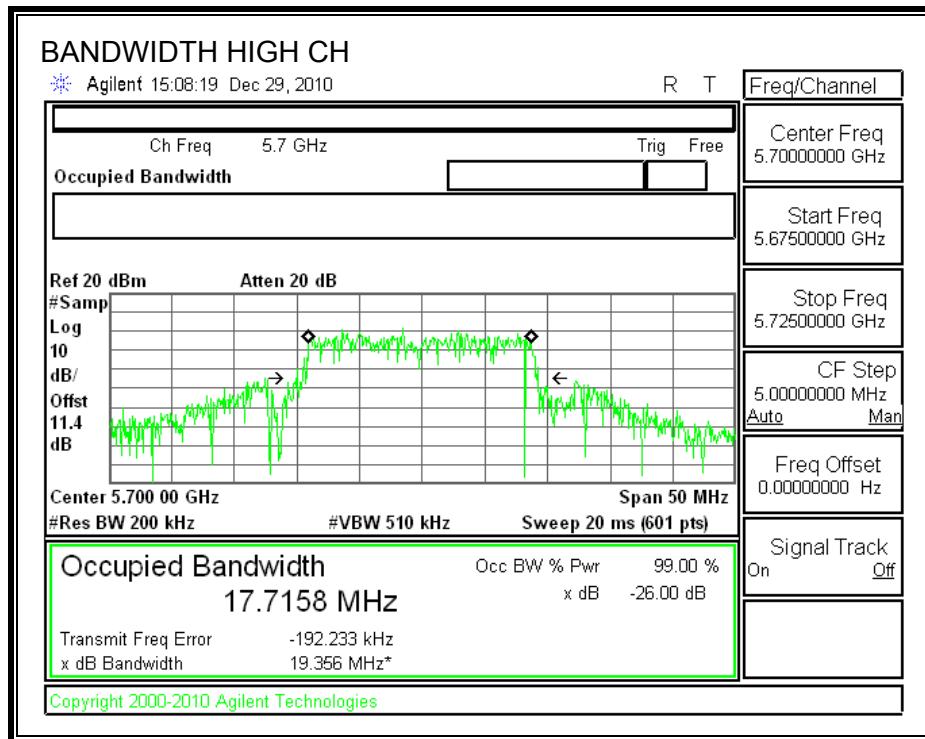

7.11.2. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.47-5.725 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

RESULTS

Limit

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5500	24	19.548	23.91	11.23	18.68
Mid	5600	24	21.502	24.32	11.23	18.77
High	5700	24	19.356	23.87	11.23	18.64



Individual Chain Results


Channel	Frequency (MHz)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Chain 3 Power (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5500	13.55	13.50	13.83	18.40	18.68	-0.28
Mid	5600	13.52	13.43	14.01	18.43	18.77	-0.34
High	5700	13.63	13.75	14.00	18.57	18.64	-0.07

TPC Results



TPC Delta Power	Chain 0	Chain 1	Chain 2			
	6.92	6.96	7.30			
Worst-case TPC Power	Chain 0	Chain 1	Chain 2	Total Power	Ant Gain	EIRP
High	5700	6.71	6.79	6.70	11.50	11.23
				TPC Limit (dBm)	24	
				Margin (dB)	-1.27	


CHAIN 1 OUTPUT POWER

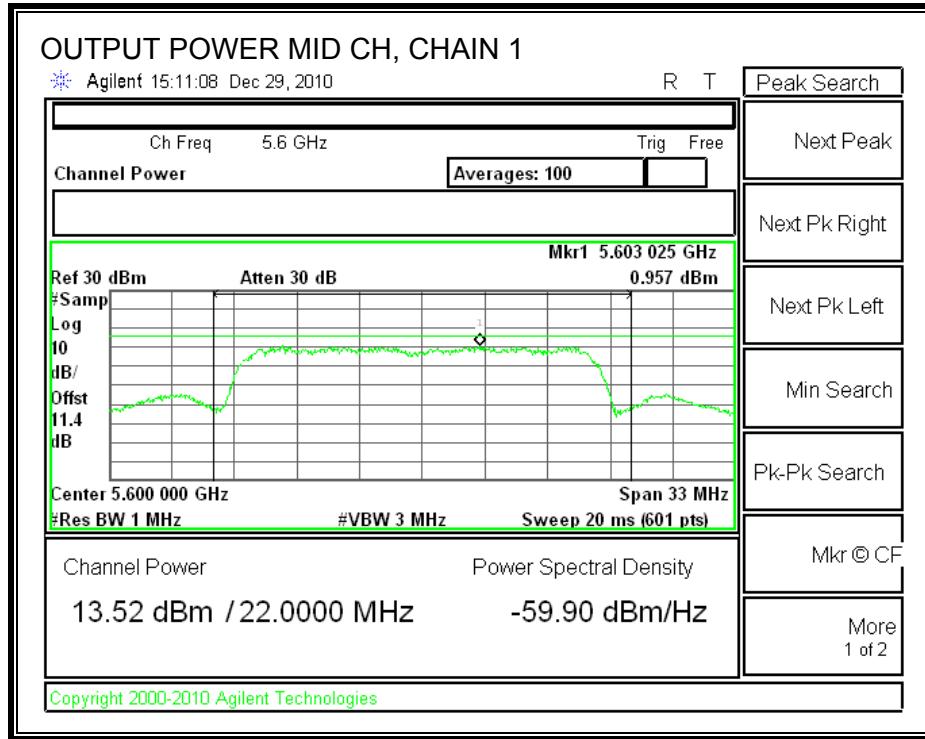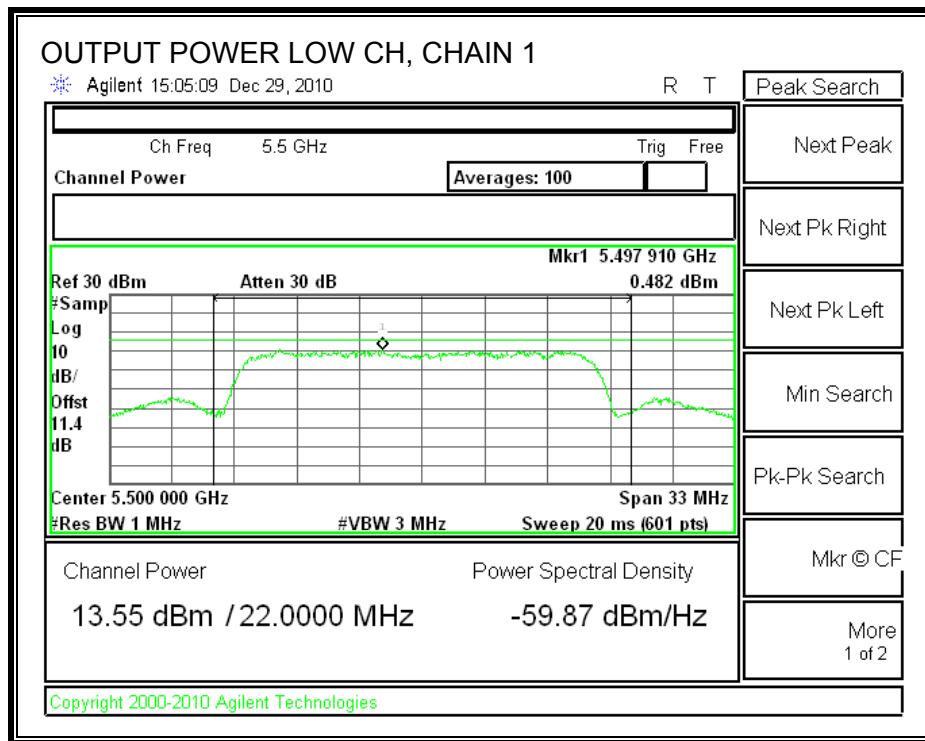


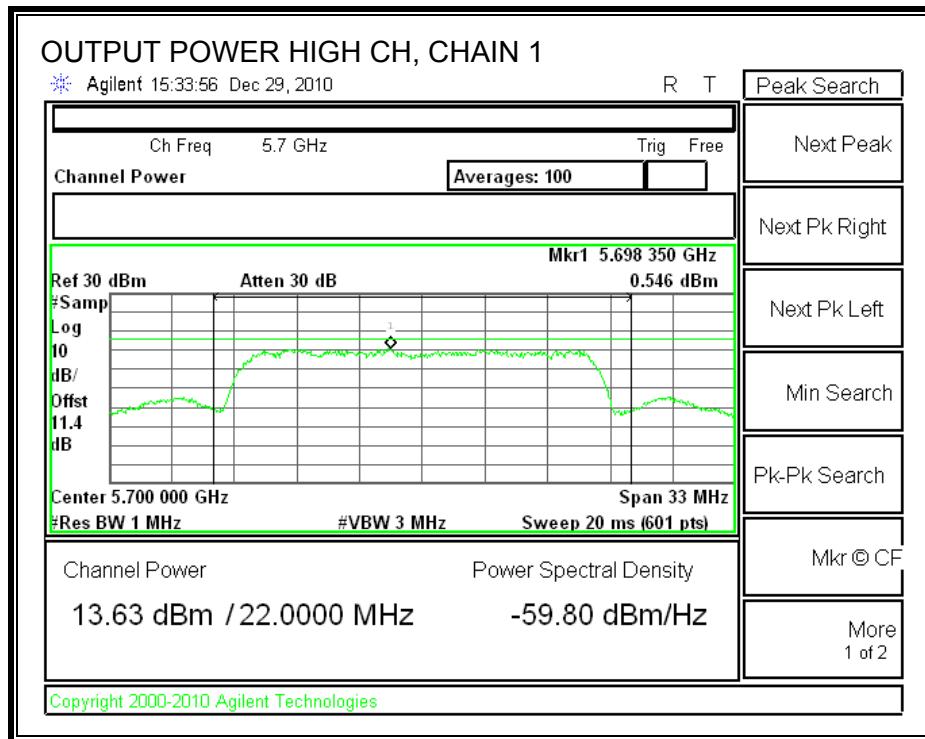



CHAIN 2 OUTPUT POWER

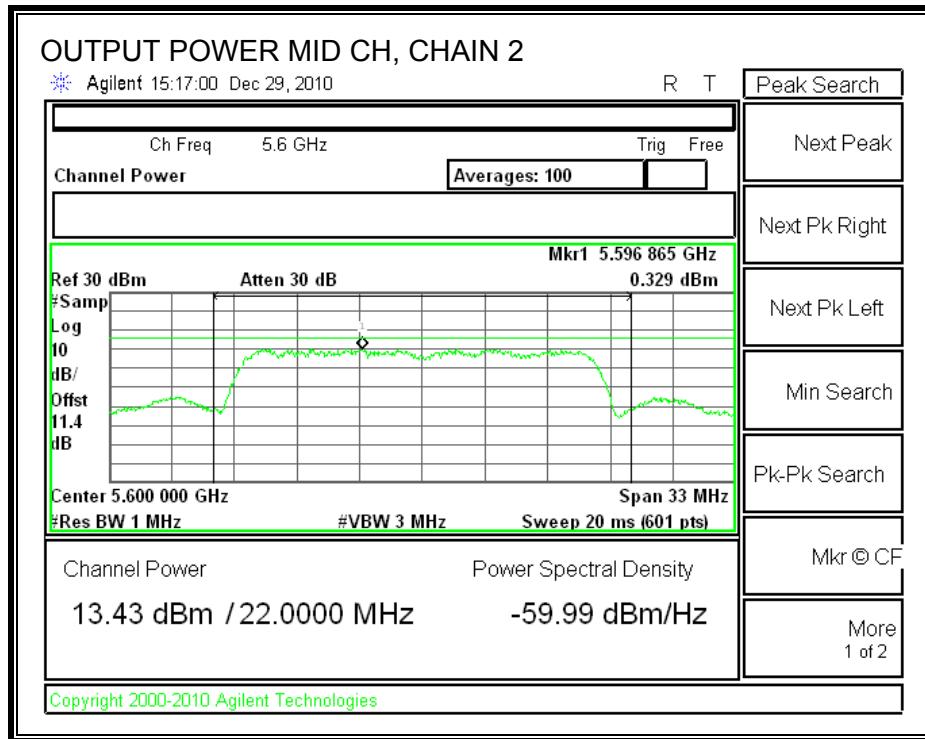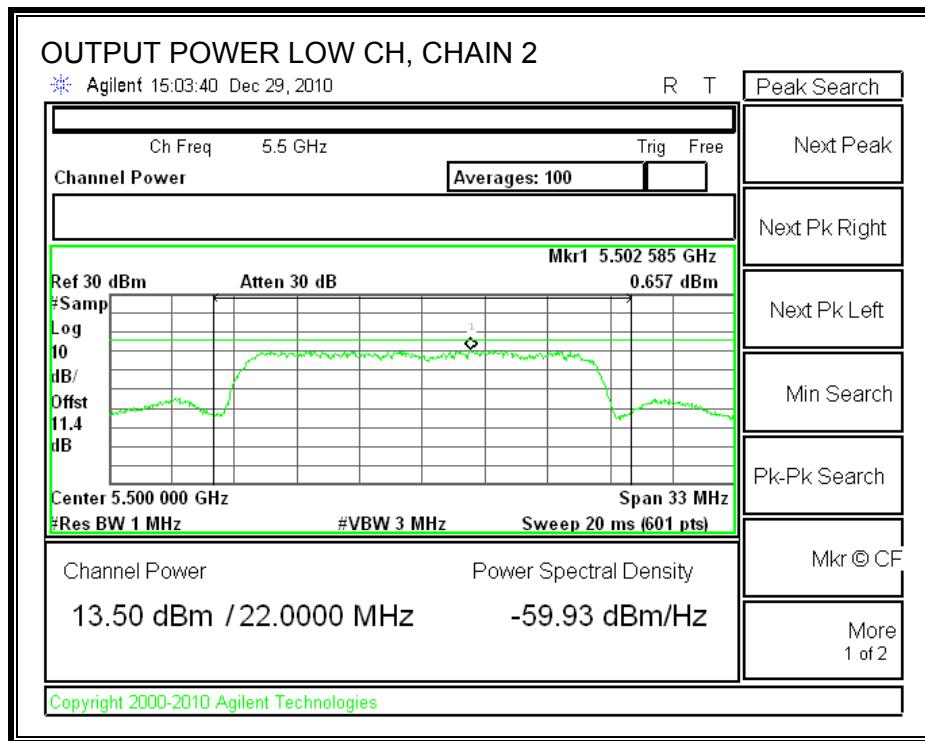


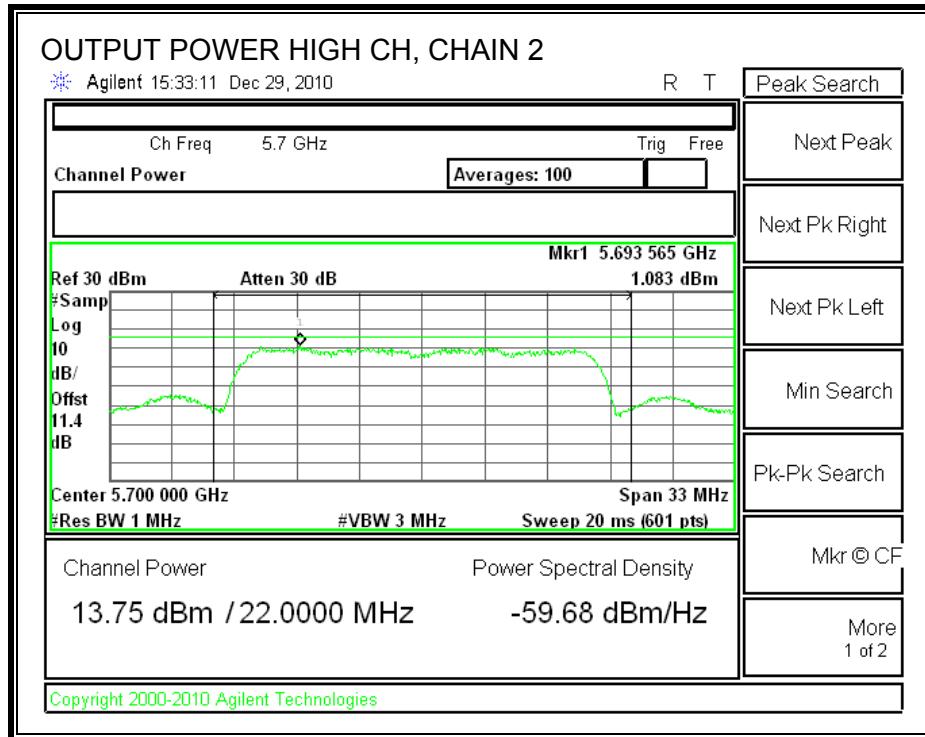



CHAIN 3 OUTPUT POWER

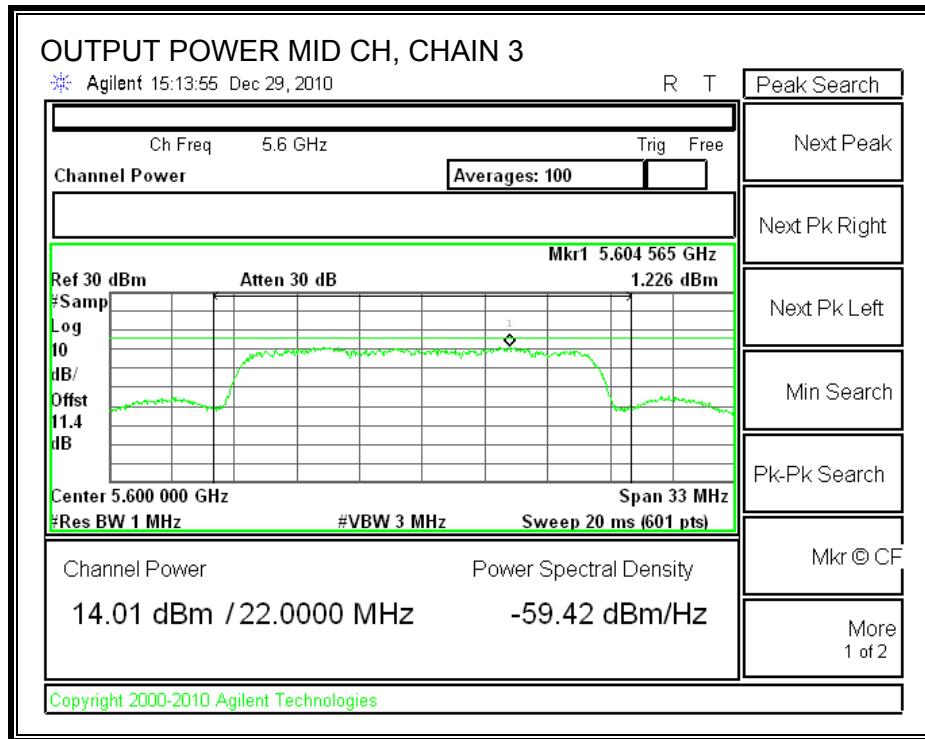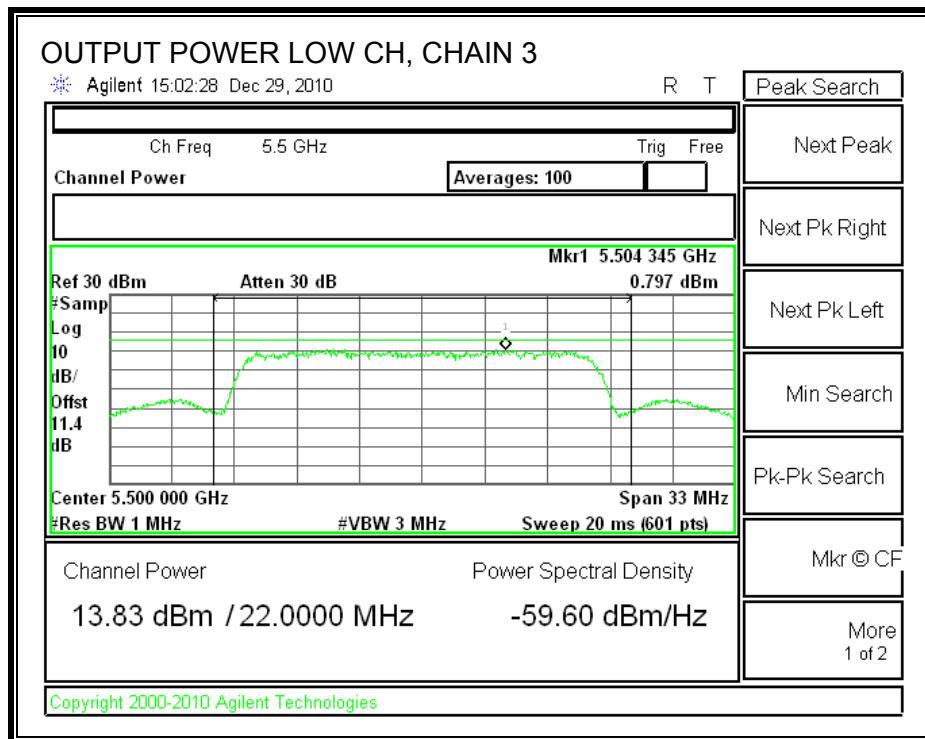

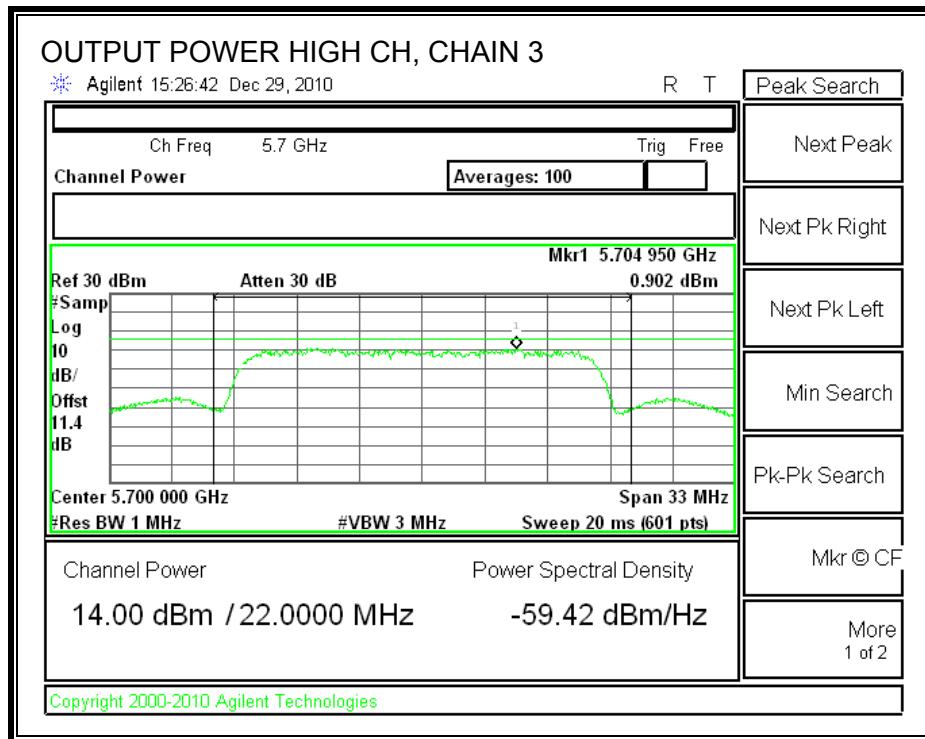

TPC OUTPUT POWER

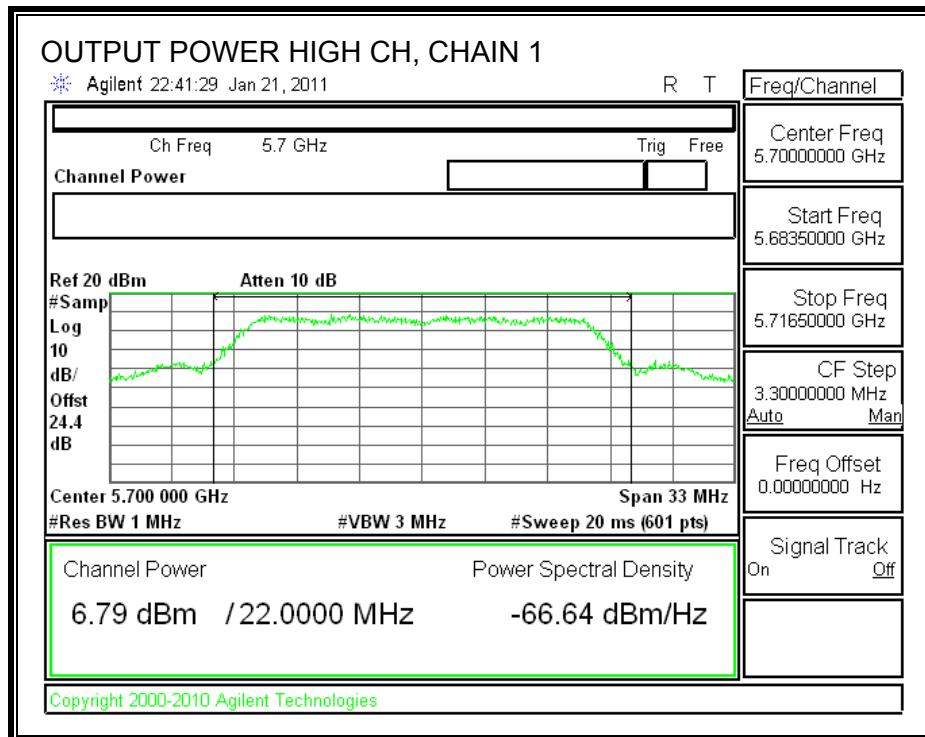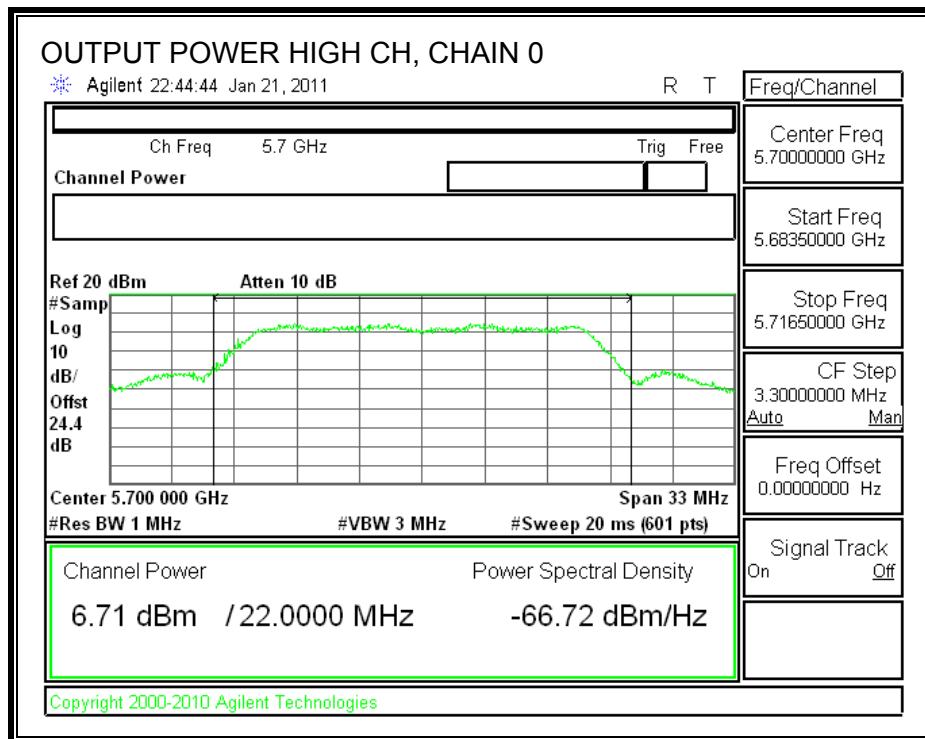

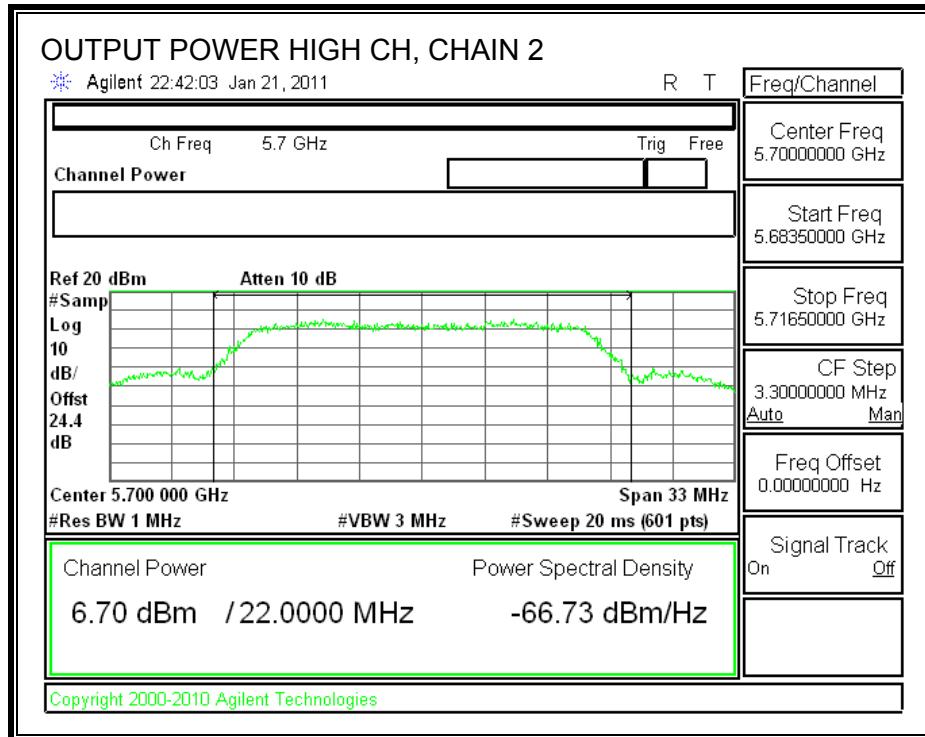

7.11.3. PEAK POWER SPECTRAL DENSITY

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.47-5.725 GHz band, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is 11.23 dBi, therefore the limit is 5.77 dBm.



TEST PROCEDURE


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

RESULTS



Channel	Frequency (MHz)	Chain 1 PPSD (dBm)	Chain 2 PPSD (dBm)	Chain 3 PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5500	0.482	0.657	0.797	5.77	-4.97
Middle	5600	0.957	0.329	1.226	5.77	-4.54
High	5700	0.546	1.083	0.902	5.77	-4.69


CHAIN 1 POWER SPECTRAL DENSITY

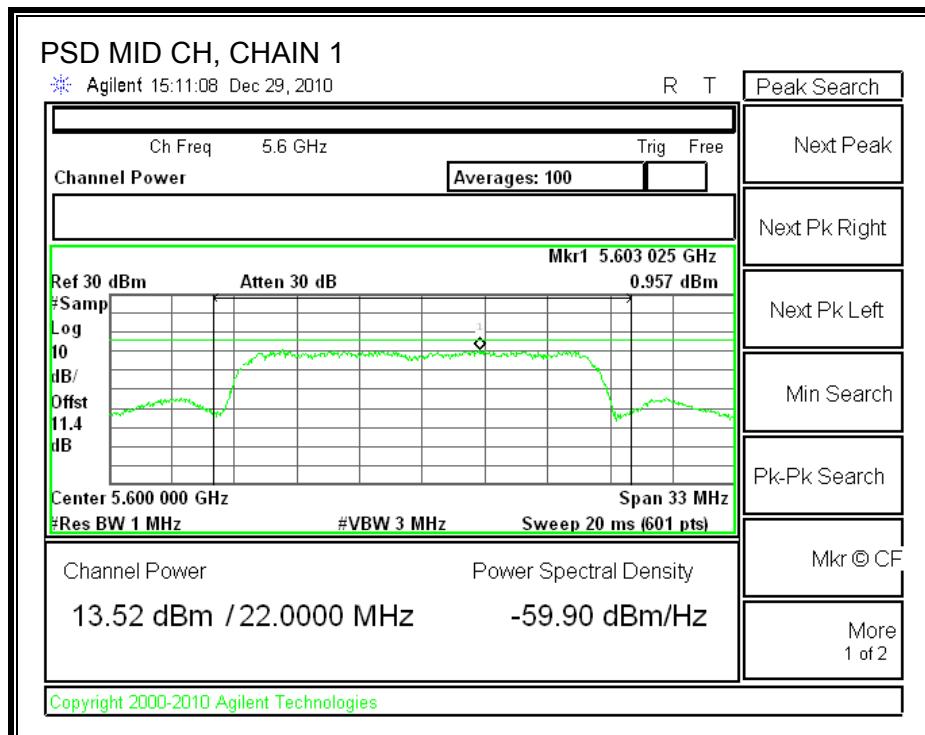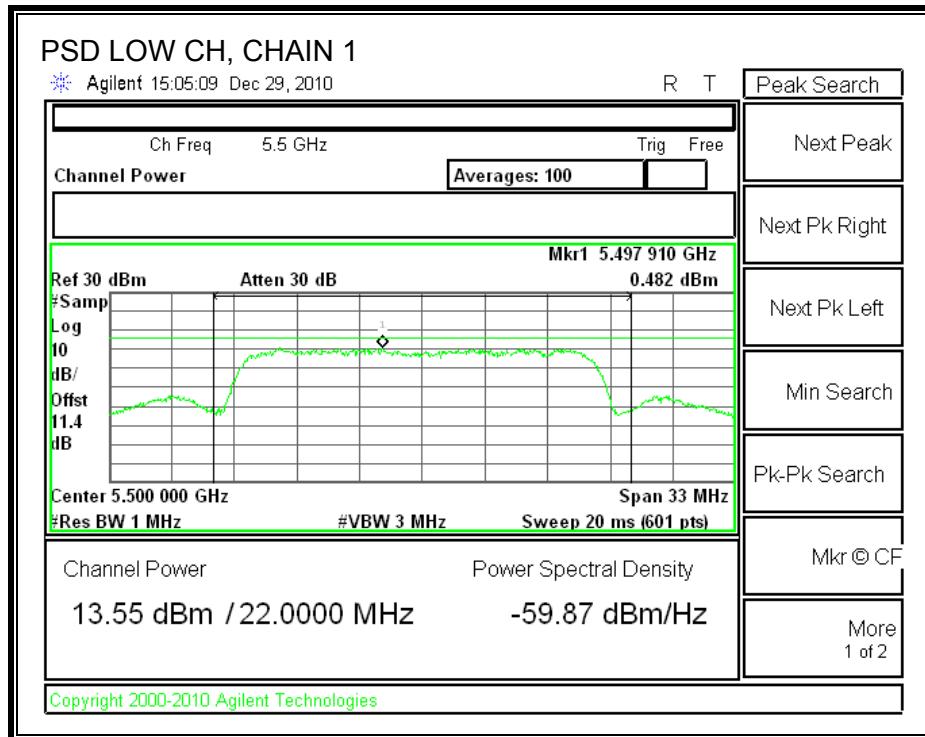


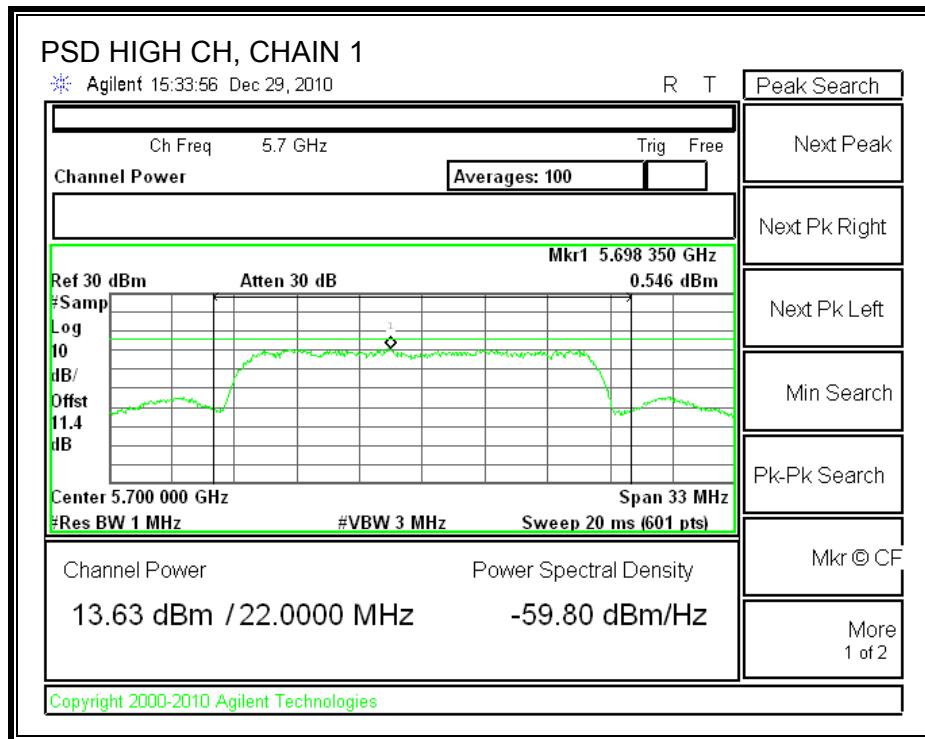



CHAIN 2 POWER SPECTRAL DENSITY

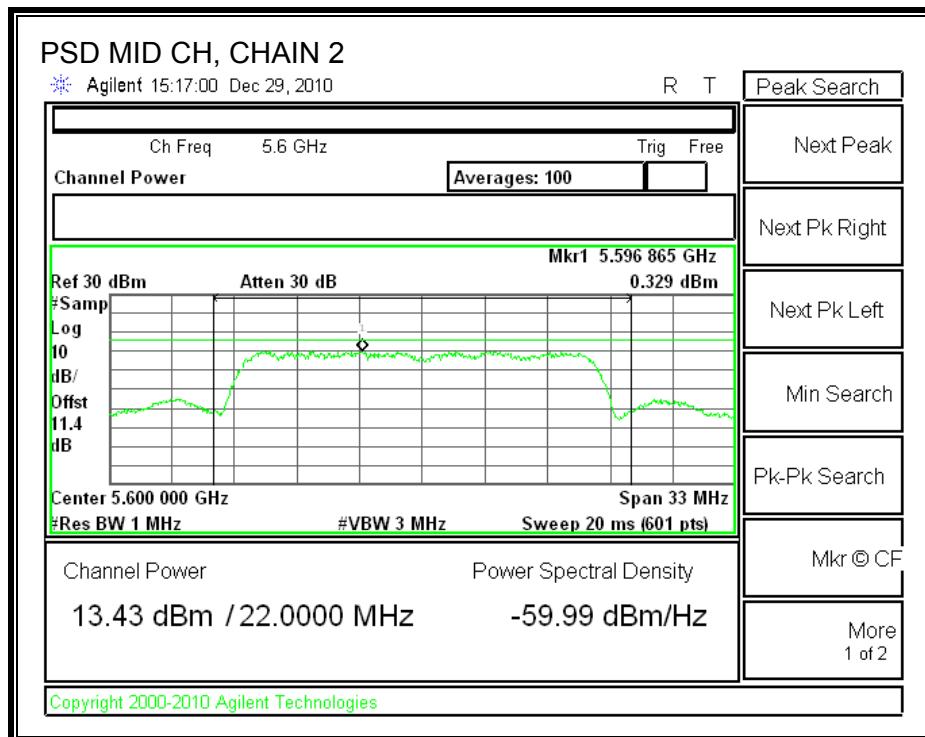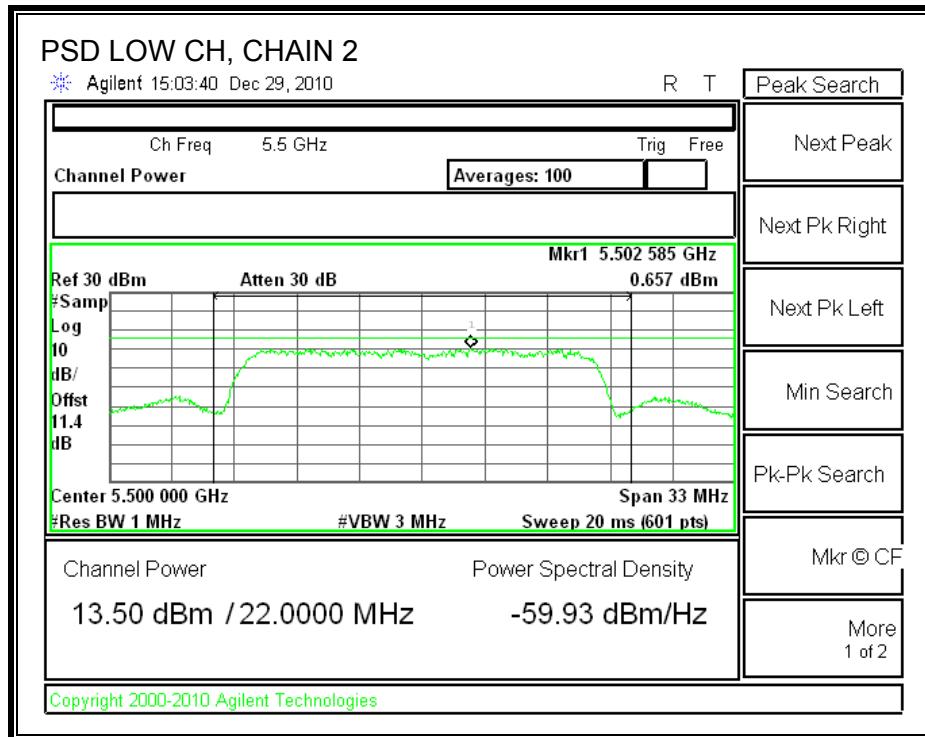

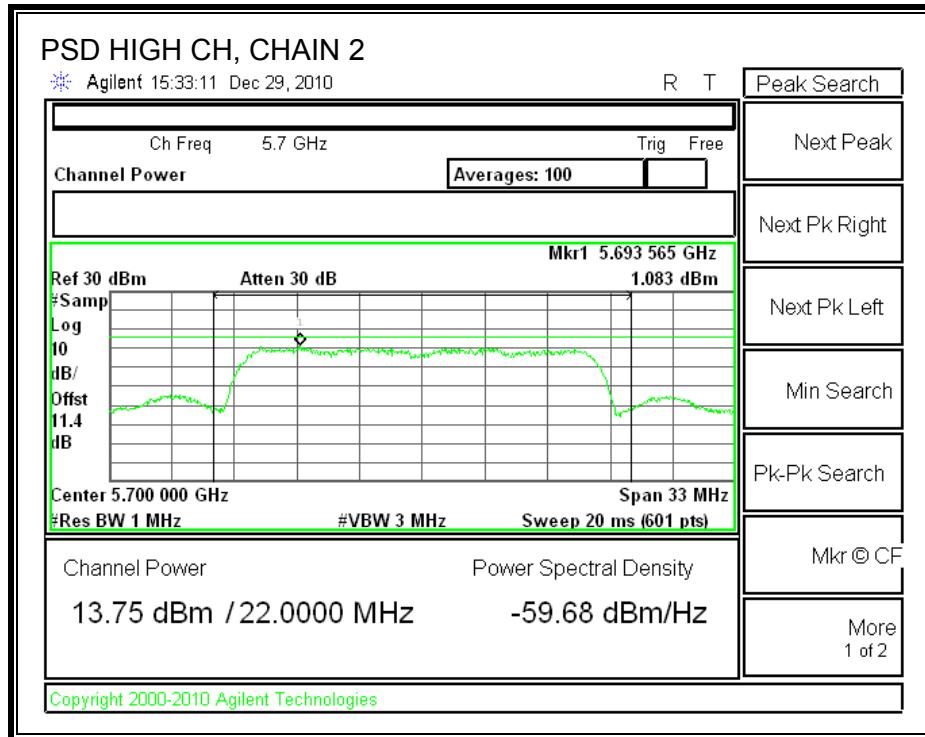

CHAIN 3 POWER SPECTRAL DENSITY

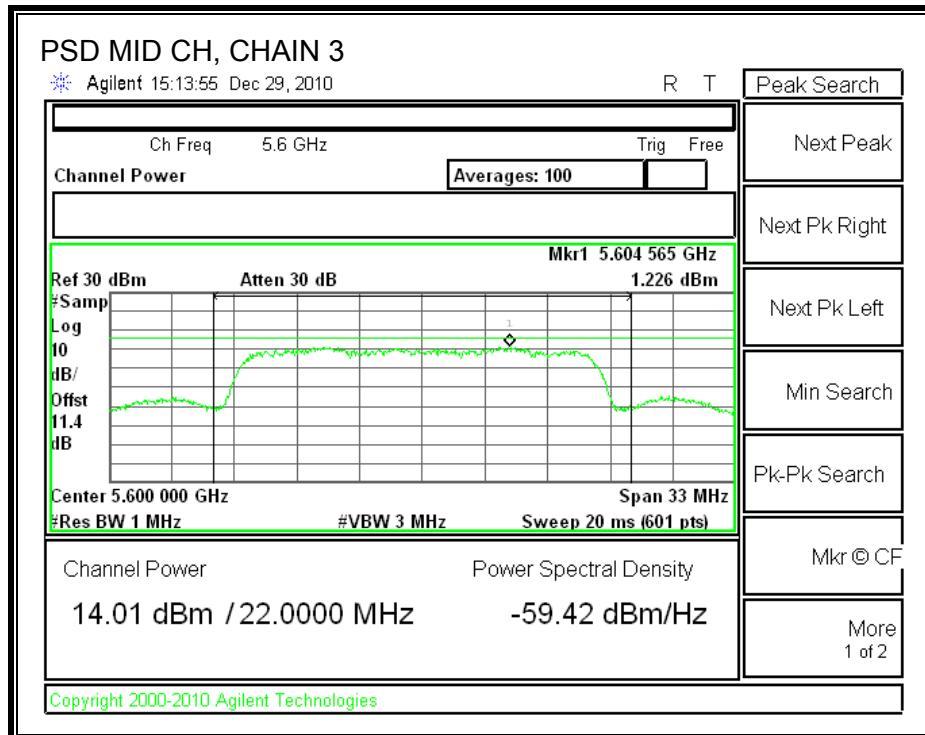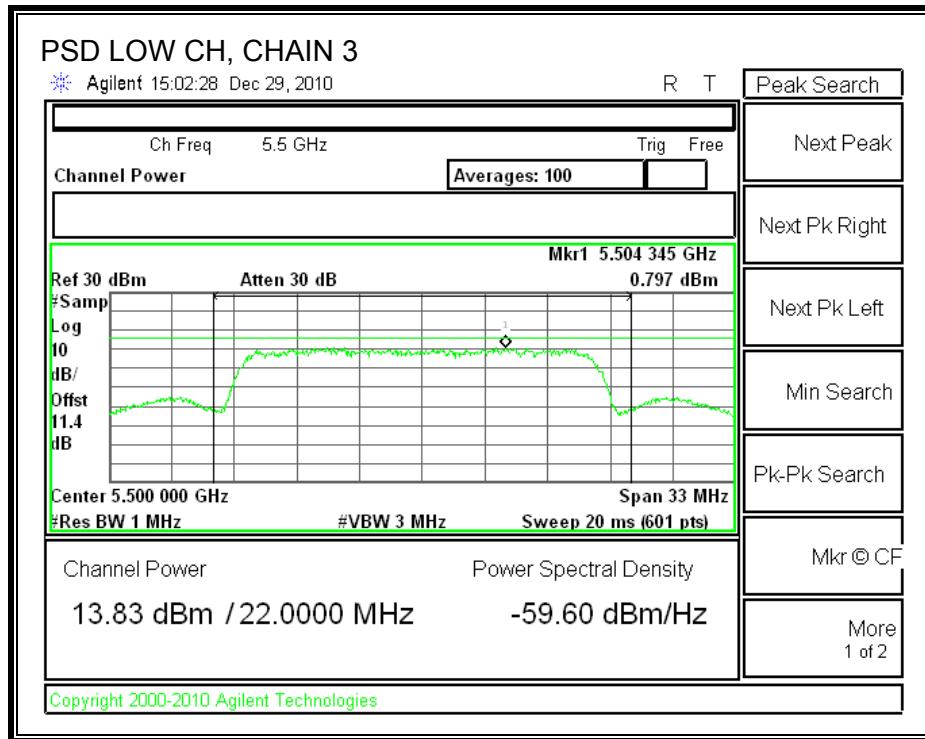

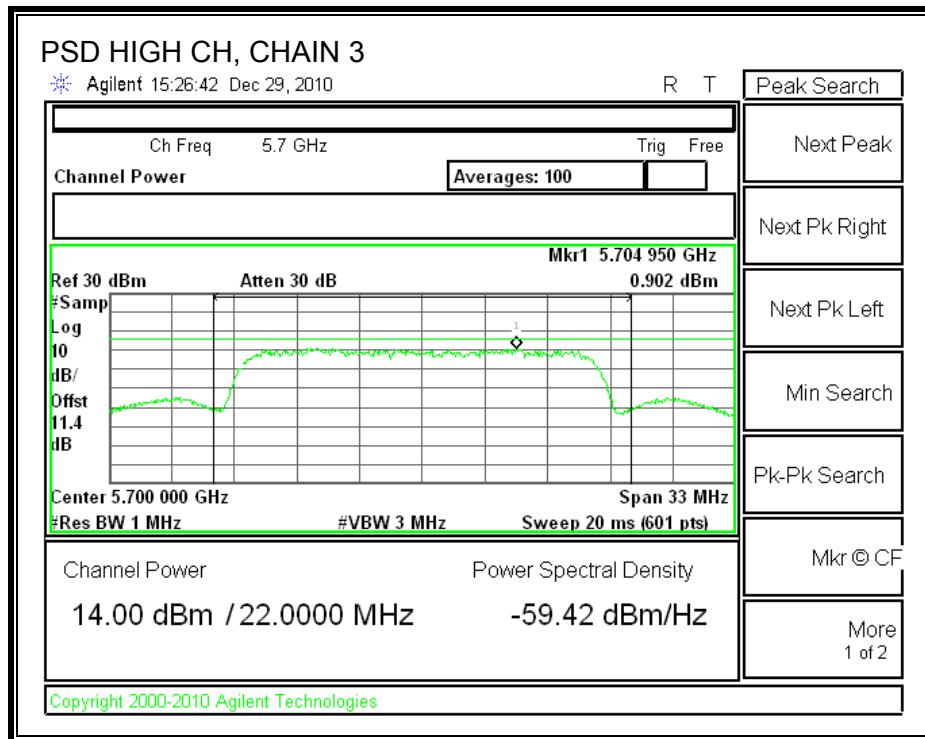

7.11.4. PEAK EXCURSION

LIMITS

FCC §15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.



Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.


RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5500	9.70	13	-3.30
Middle	5580	10.54	13	-2.46
High	5700	9.80	13	-3.20

CHAIN 1

PEAK EXCURSION

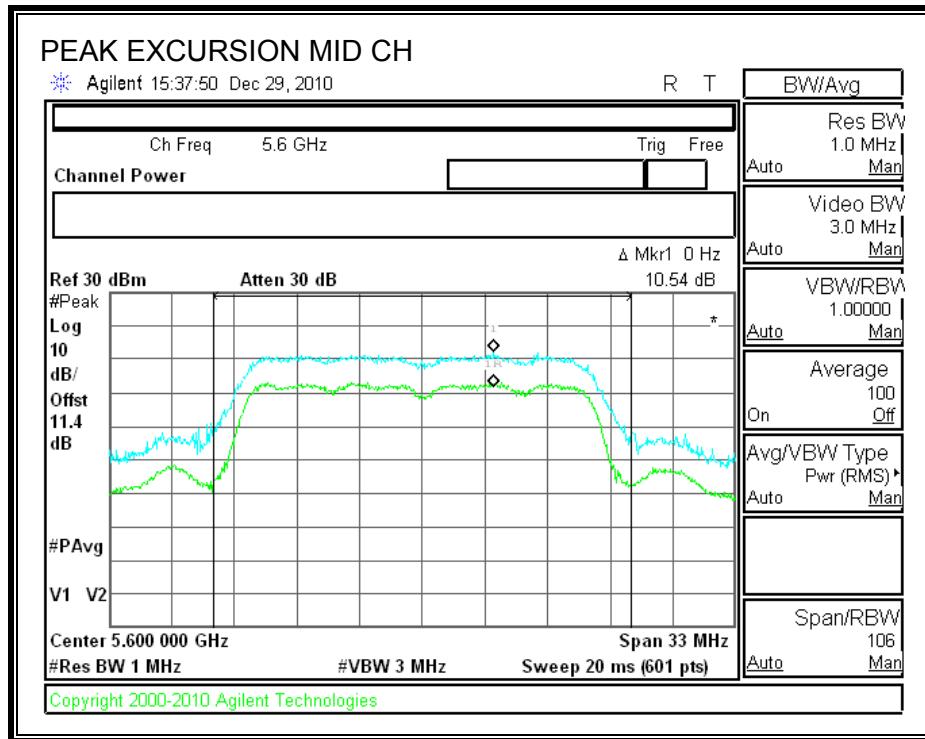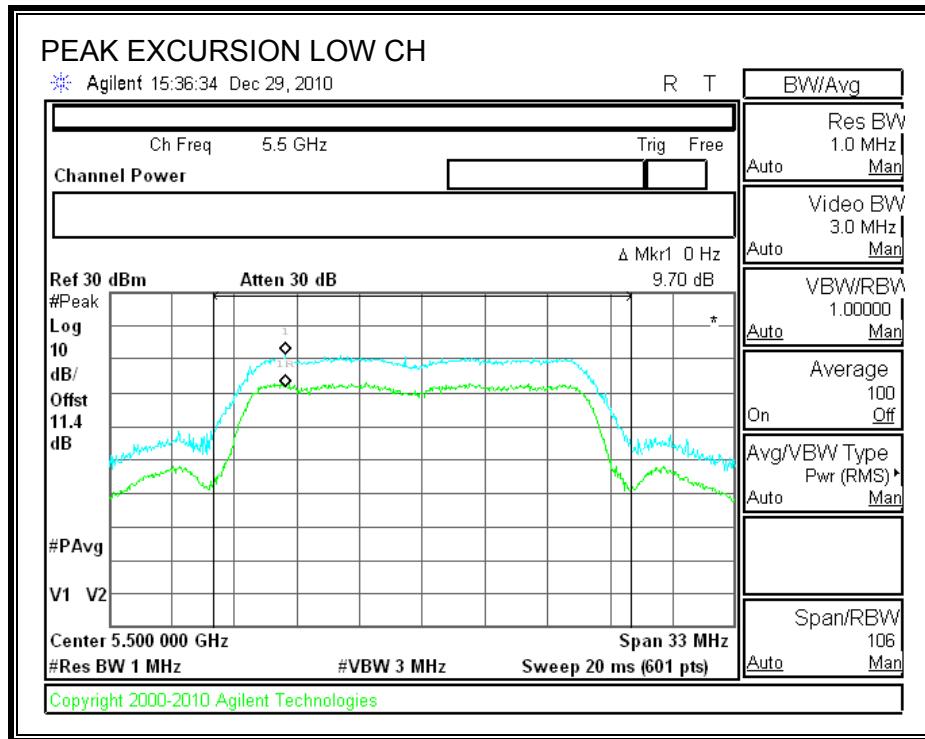

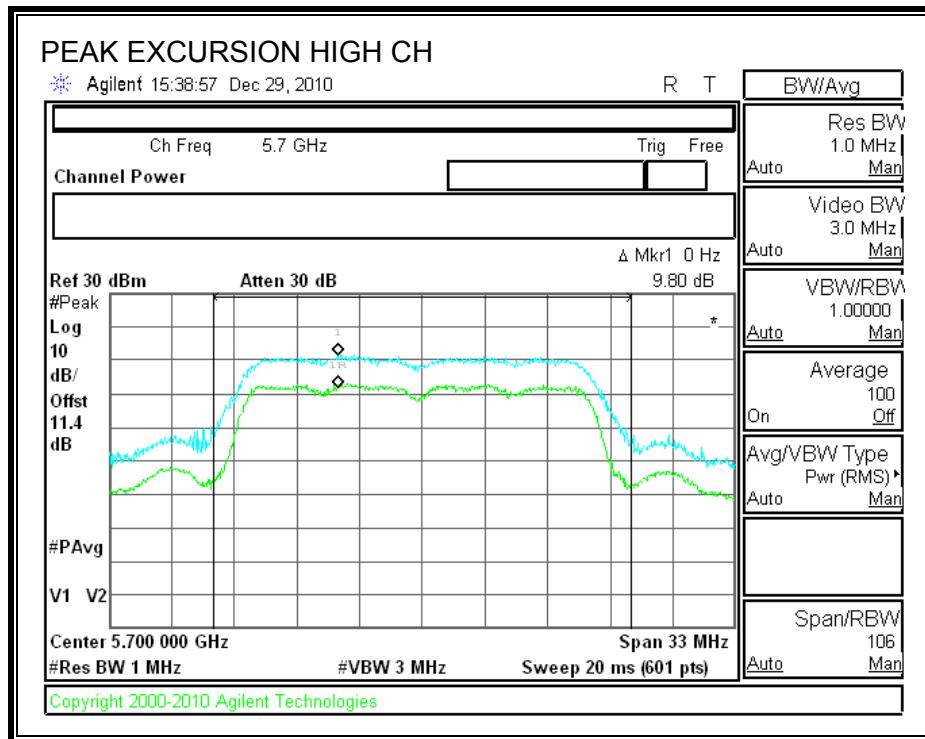

7.11.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.407 (b) (3)

IC RSS-210 A9.3 (3)

For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm / MHz.



TEST PROCEDURE



Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to EIRP limit, adjusted for the maximum antenna gain.


Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

RESULTS SPURIOUS EMISSIONS WITH COMBINER

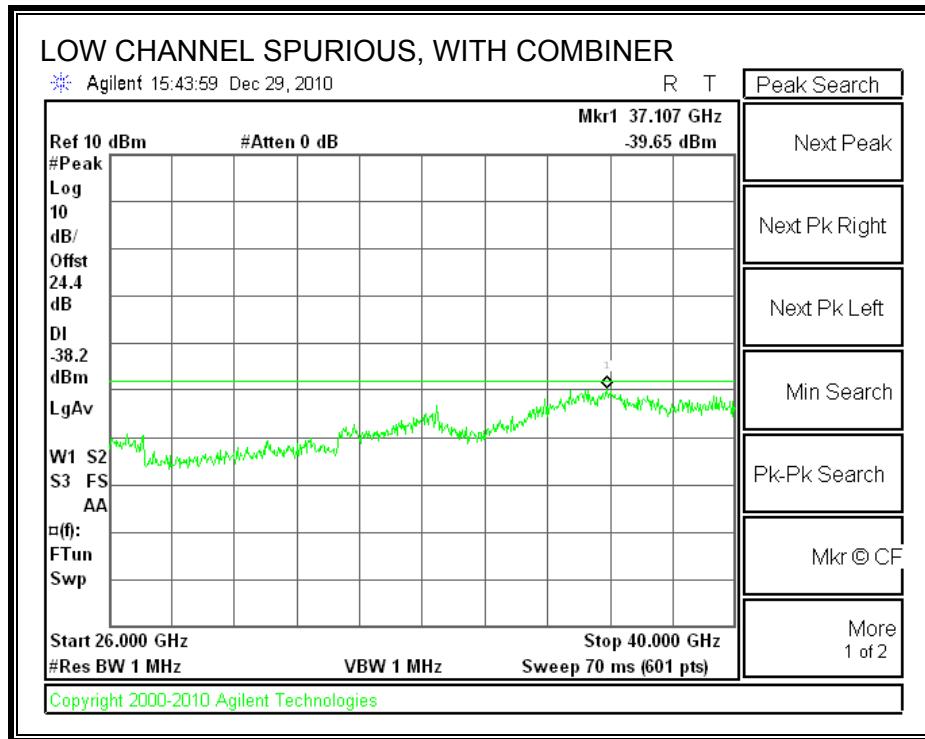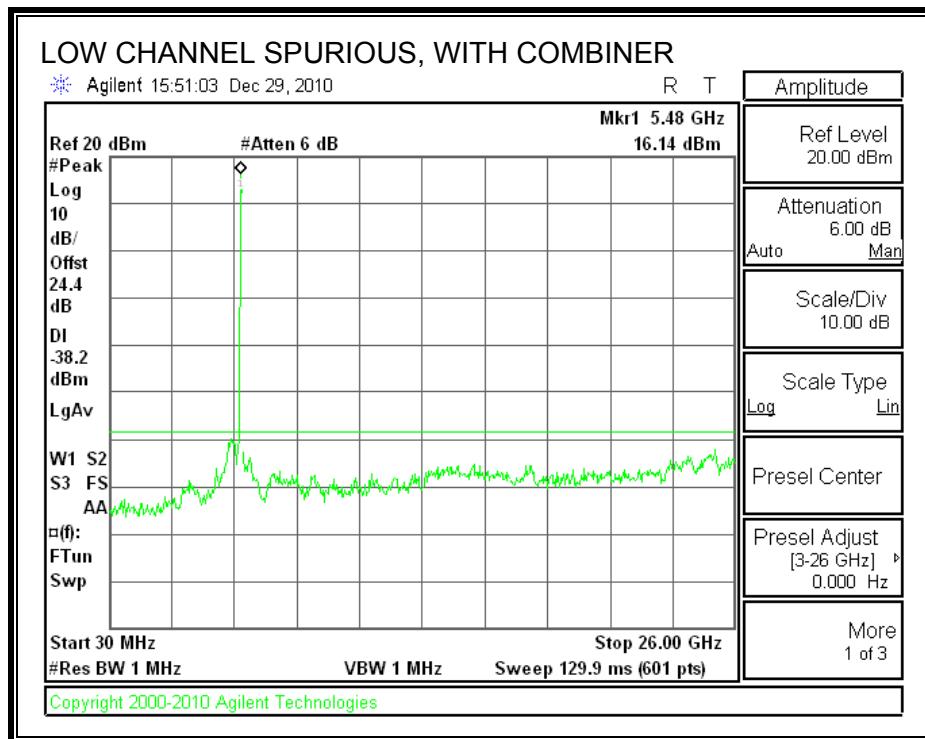

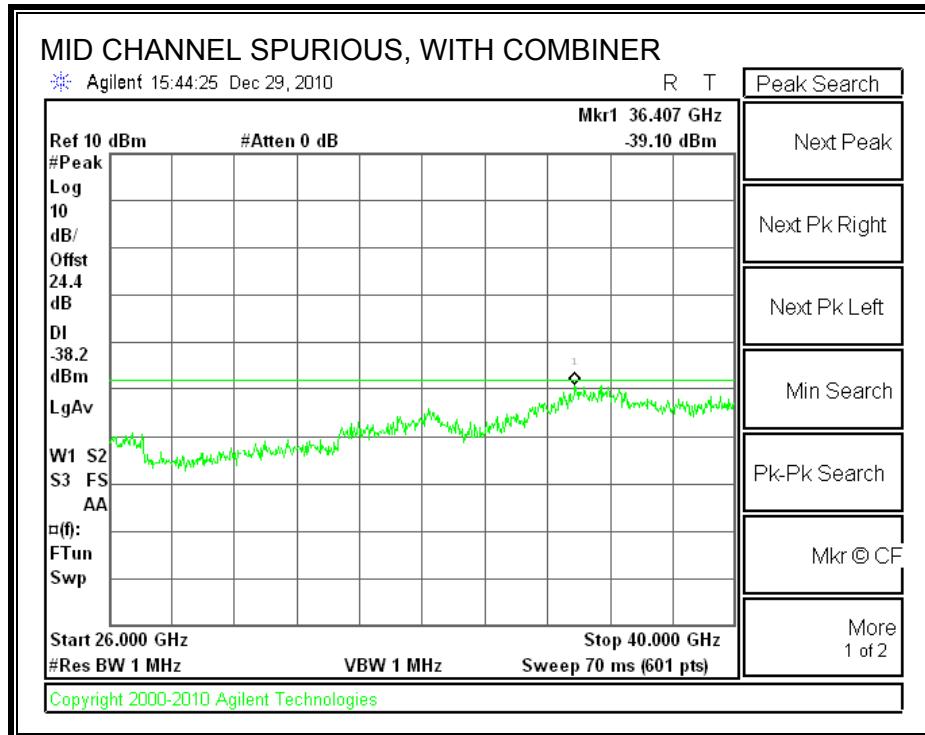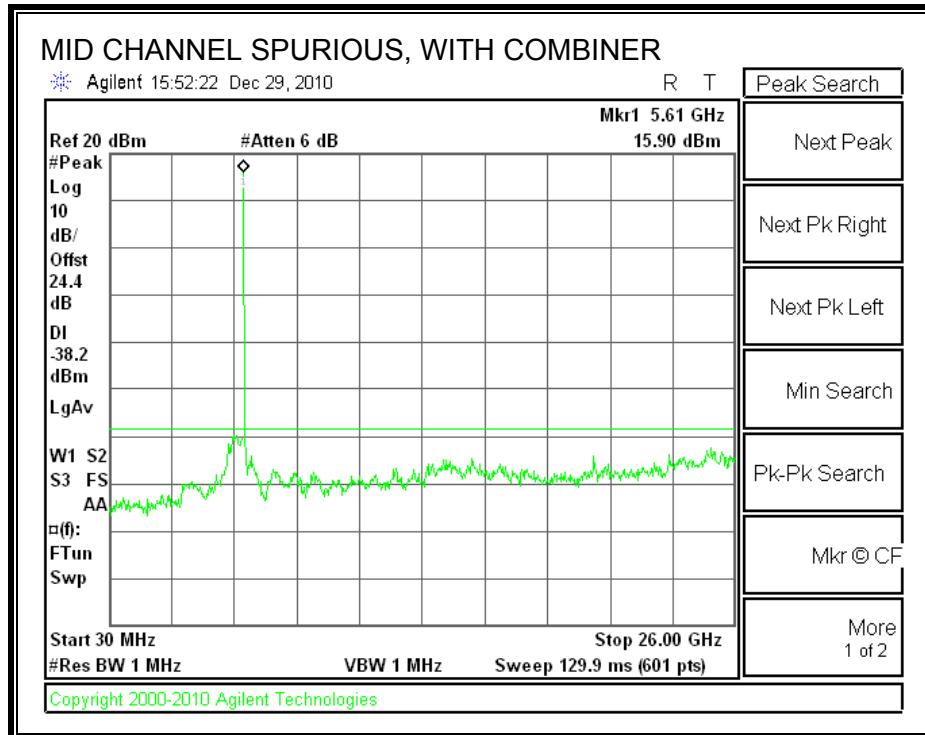


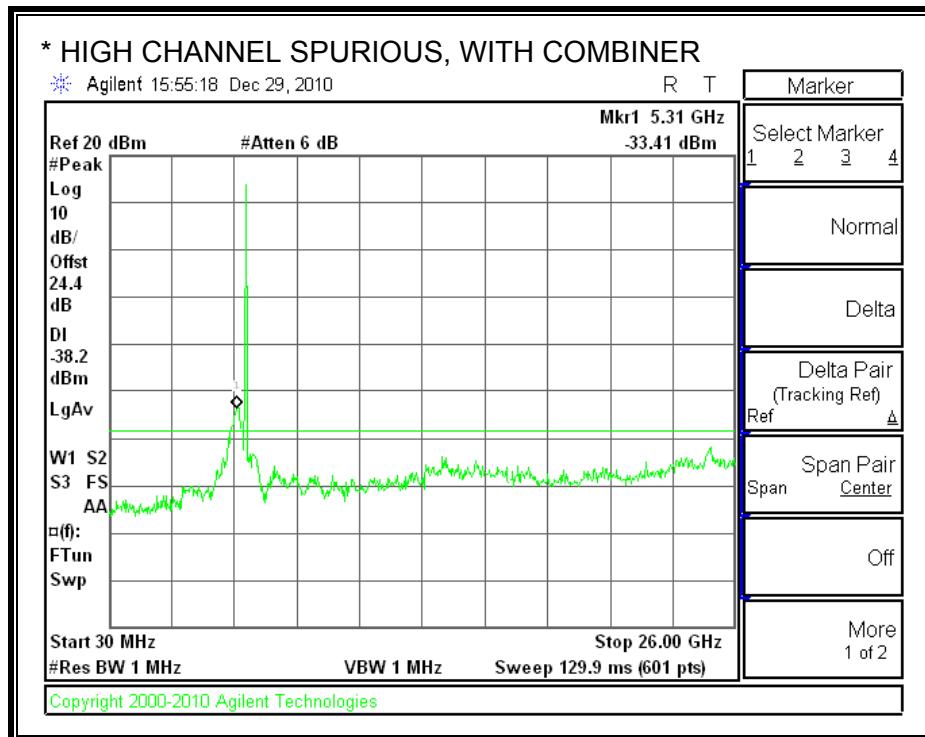

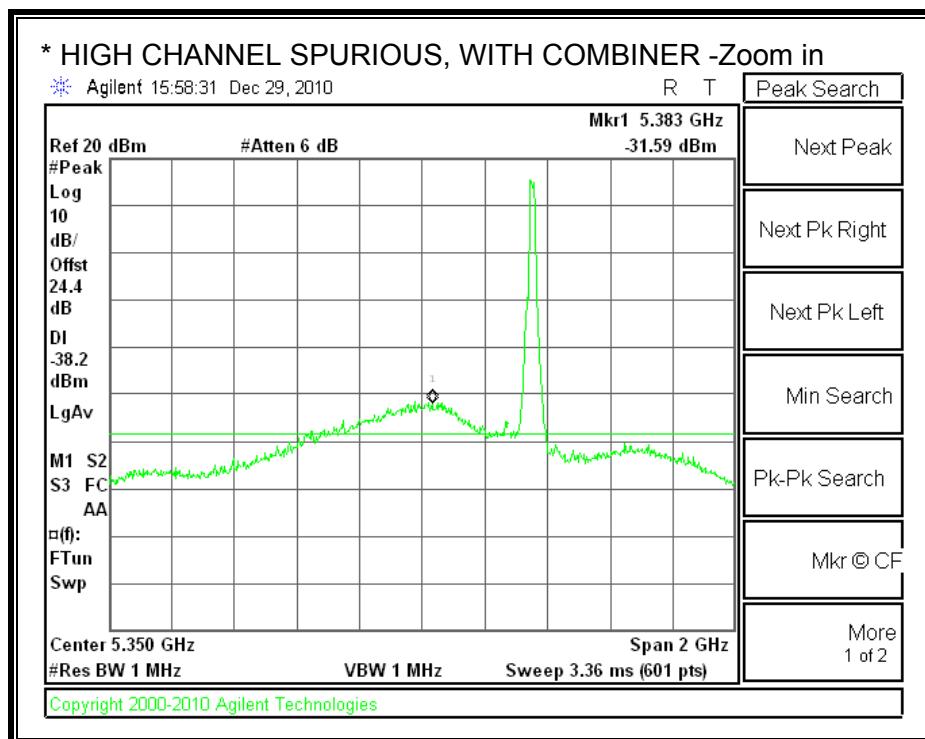

* Passed with EIRP Radiated Substitution

f MHz	SG reading (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Ant. Pol. (H/V)
5431	-38.0	1.2	11.0	-28.2	-27.0	-1.2	V
5431	-46.0	1.2	11.0	-35.0	-27.0	-8.0	H

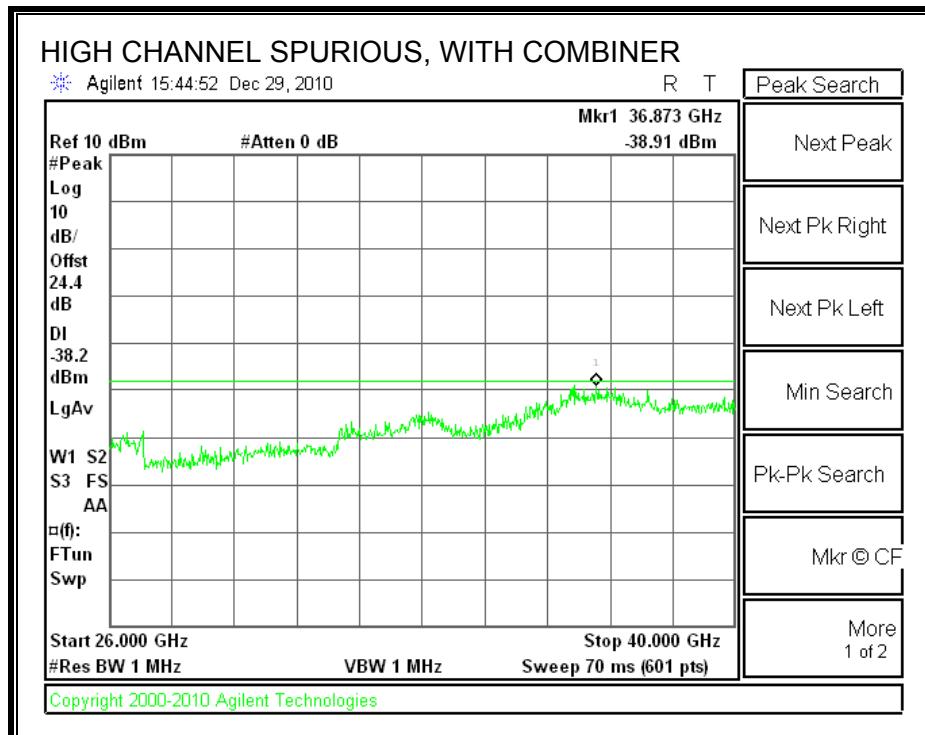

SDM MCS21

7.11.6. 26 dB and 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE

The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the measured bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5600	28.191	17.8379
High	5700	29.350	17.4956

26 dB and 99% BANDWIDTH

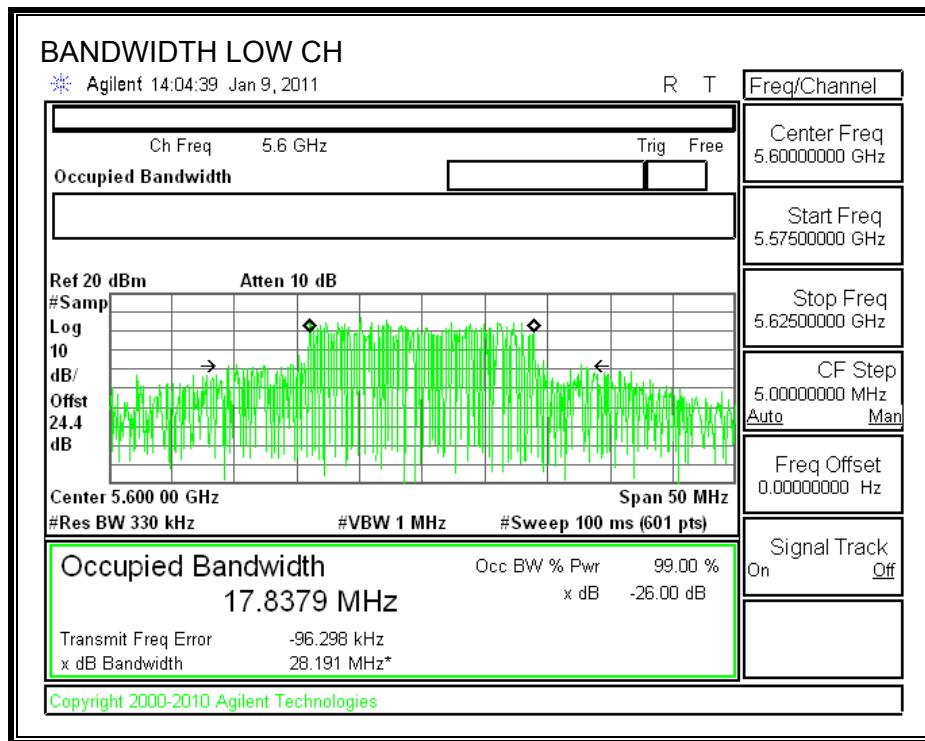

7.11.7. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.47-5.725 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

RESULTS

Limit

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5600	24	28.191	25.50	7.06	22.94
High	5700	24	29.35	25.68	7.06	22.94



Individual Chain Results

Channel	Frequency (MHz)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Chain 3 Power (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5600	16.62	16.79	16.47	21.40	22.94	-1.54
High	5700	16.22	16.28	16.53	21.12	22.94	-1.82



TPC Results

TPC Delta Power		Chain 0	Chain 1	Chain 2			
		5.58	4.88	5.35			
Worst-case TPC Power		Chain 0	Chain 1	Chain 2	Total Power	Ant Gain	EIRP
		High	5700	11.04	11.40	11.18	15.98
						TPC Limit (dBm)	24
						Margin (dB)	-0.96



CHAIN 1 OUTPUT POWER

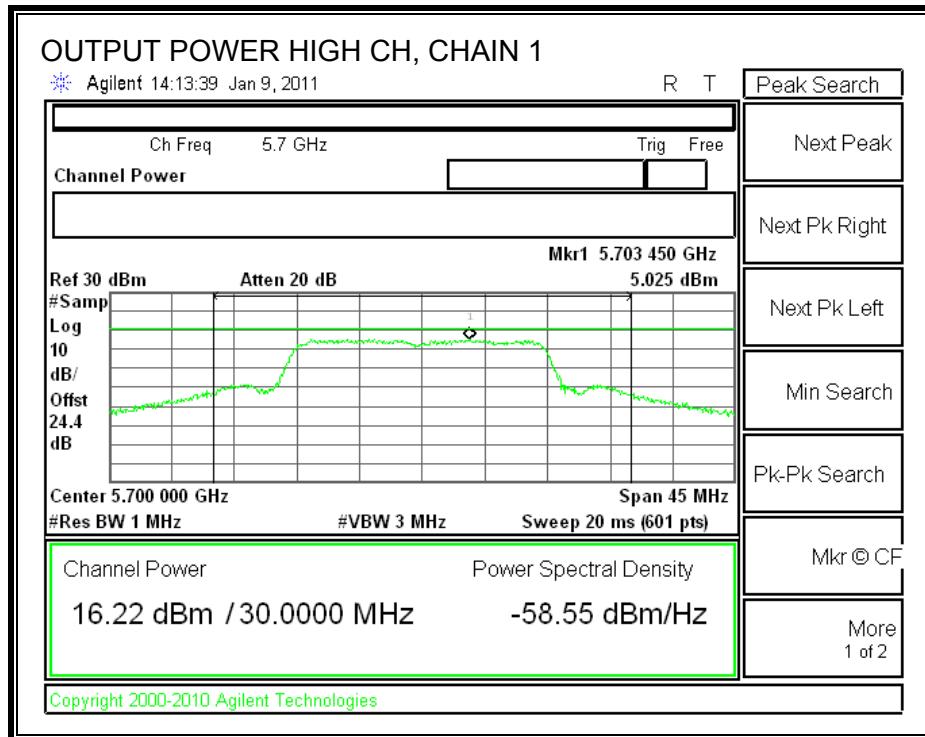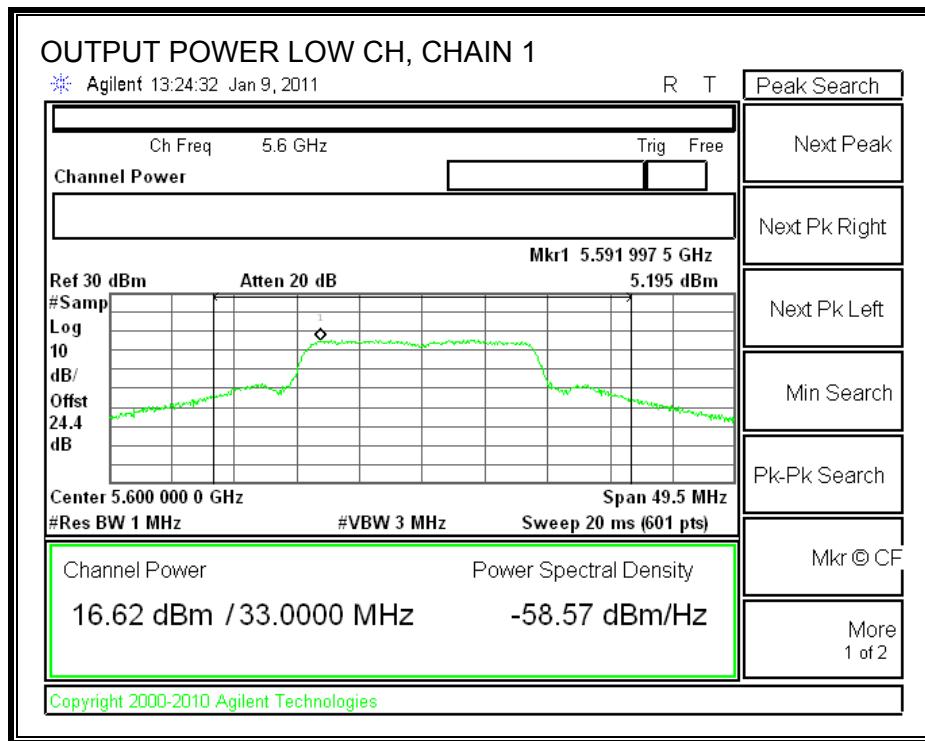



CHAIN 2 OUTPUT POWER

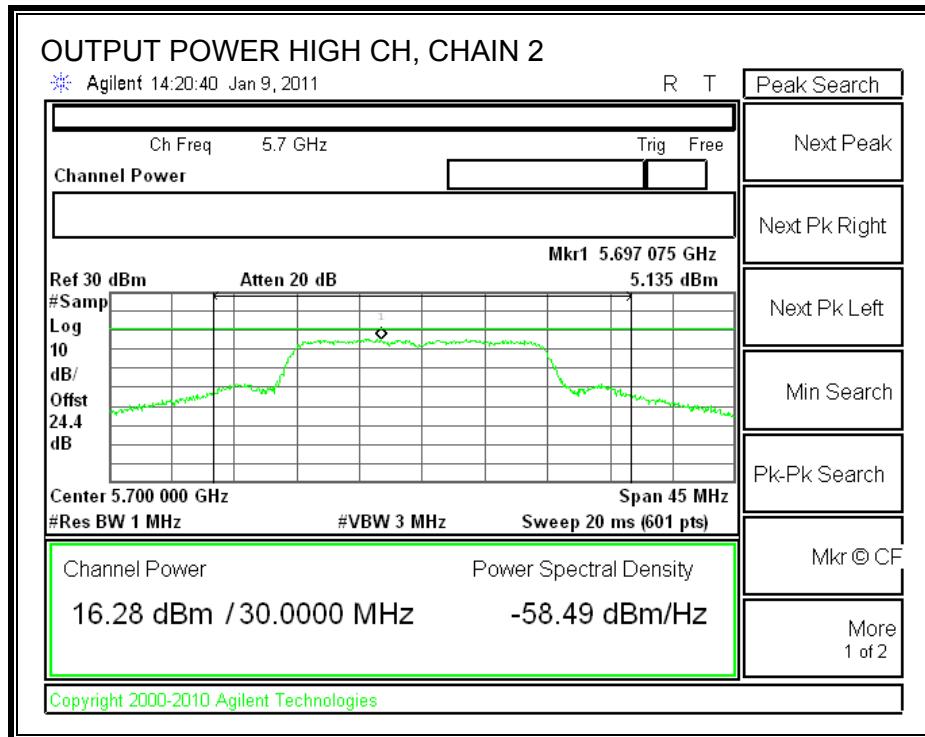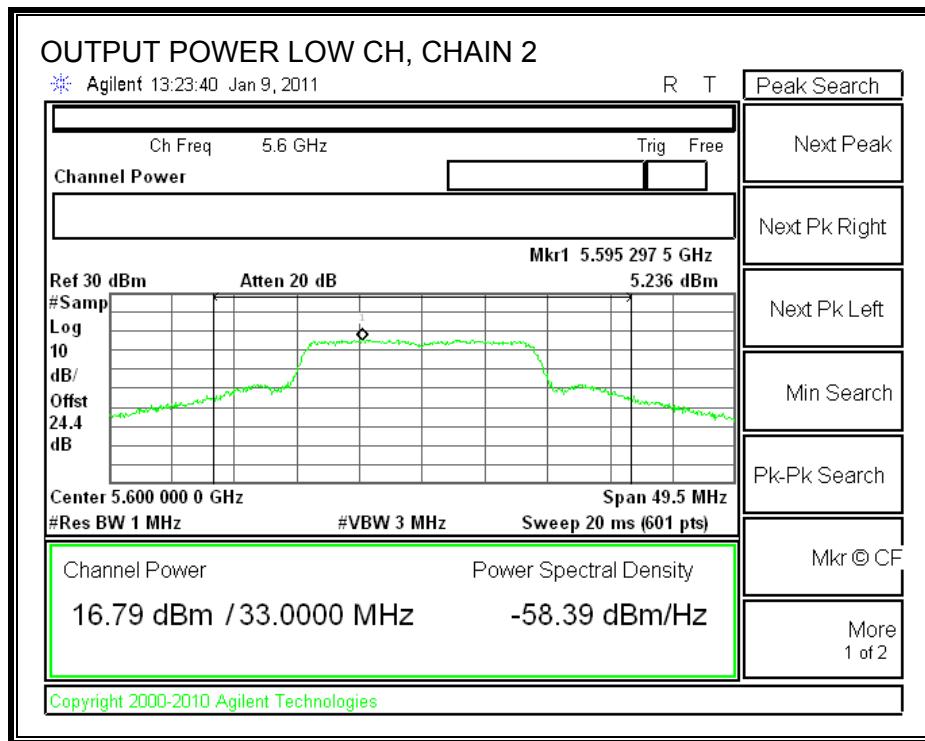


CHAIN 3 OUTPUT POWER

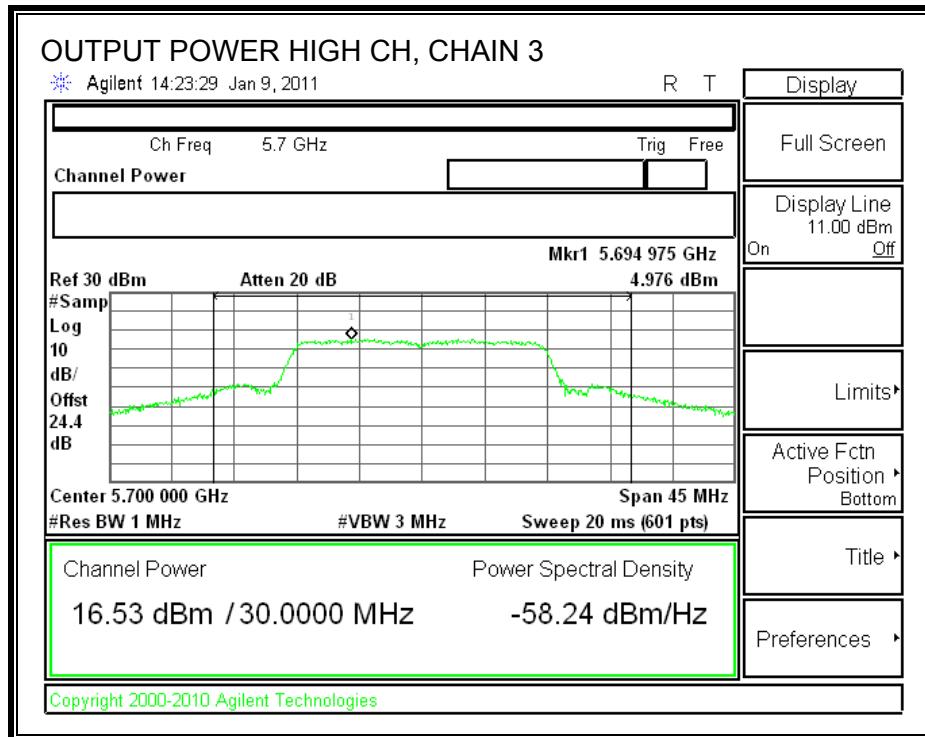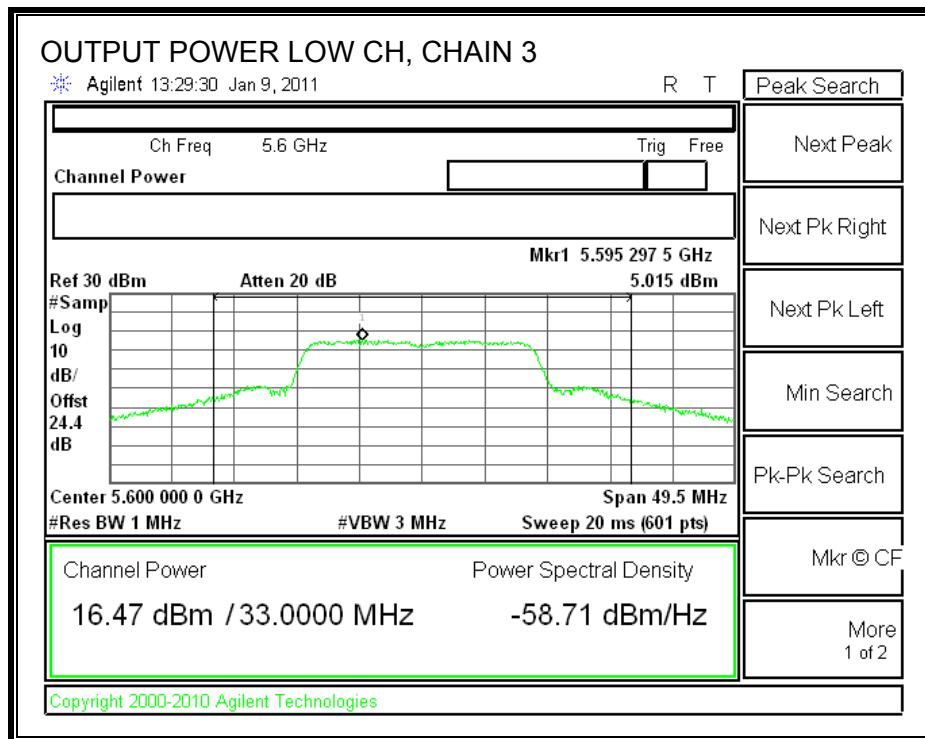

TPC OUTPUT POWER

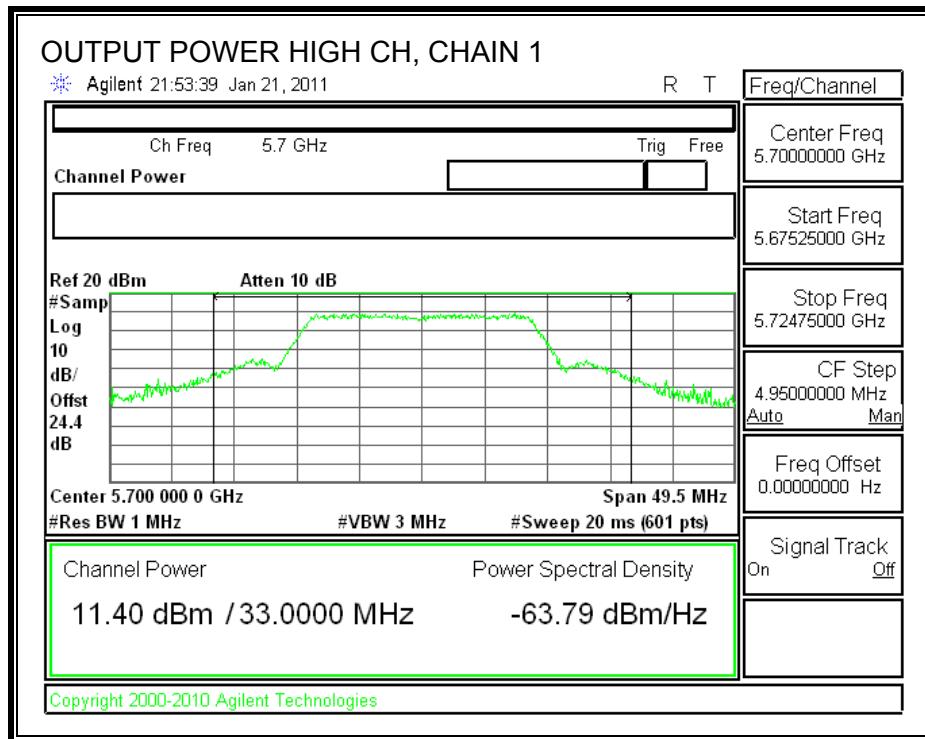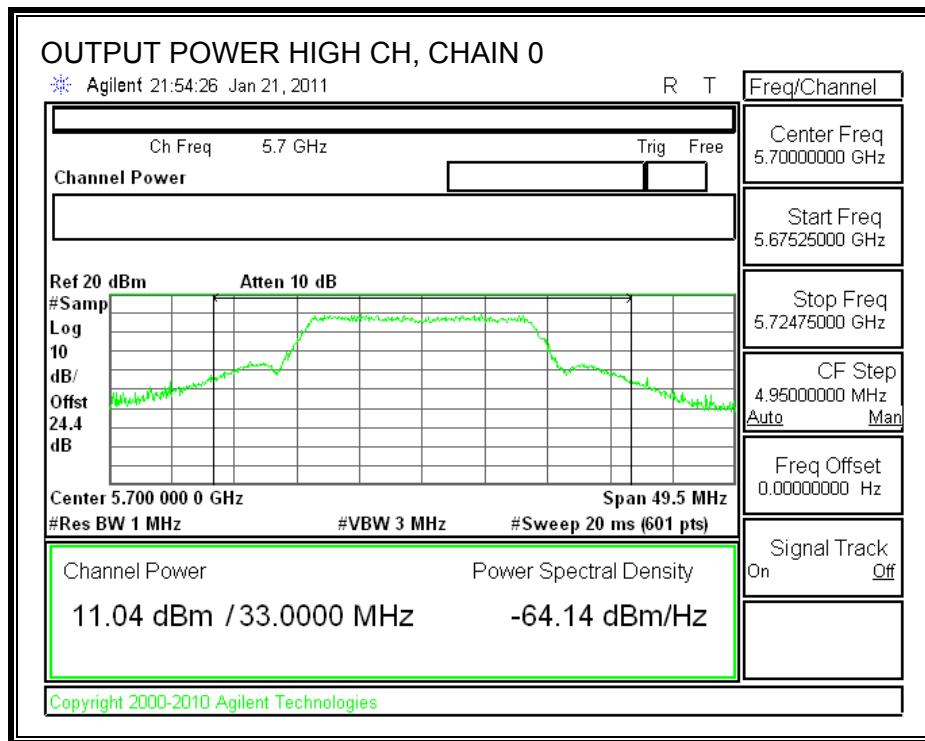

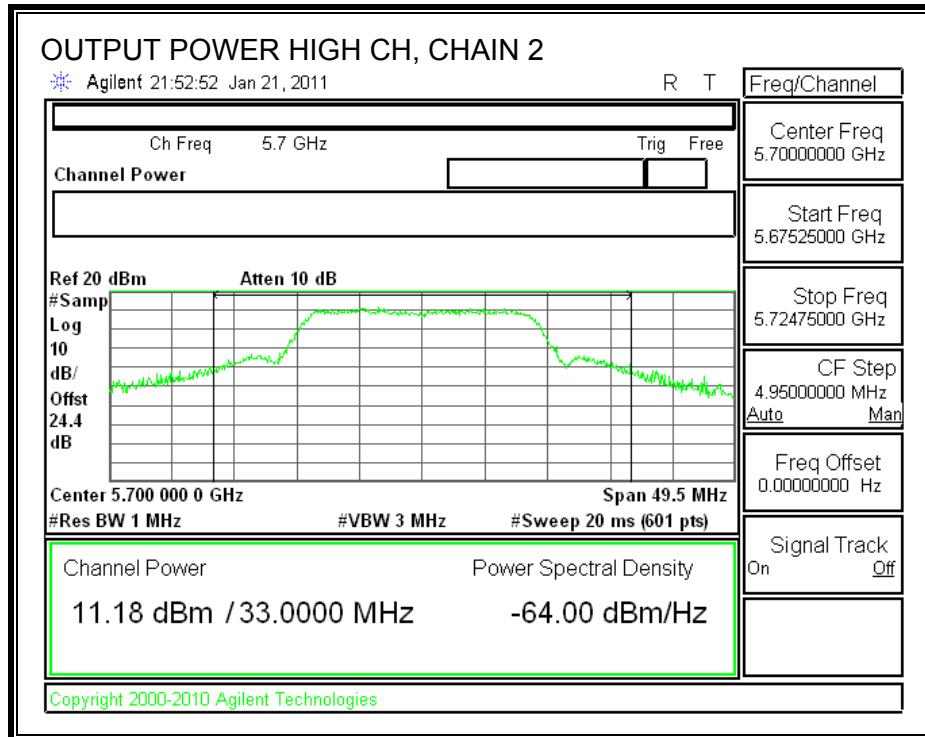

7.11.8. PEAK POWER SPECTRAL DENSITY

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.47-5.725 GHz band, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is 7.06 dBi, therefore the limit is 9.94 dBm.



TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.



RESULTS

Channel	Frequency (MHz)	Chain 1 PPSD (dBm)	Chain 2 PPSD (dBm)	Chain 3 PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5600	5.195	5.236	5.015	9.94	-4.70
High	5700	5.025	5.135	4.976	9.94	-4.81



CHAIN 1 POWER SPECTRAL DENSITY

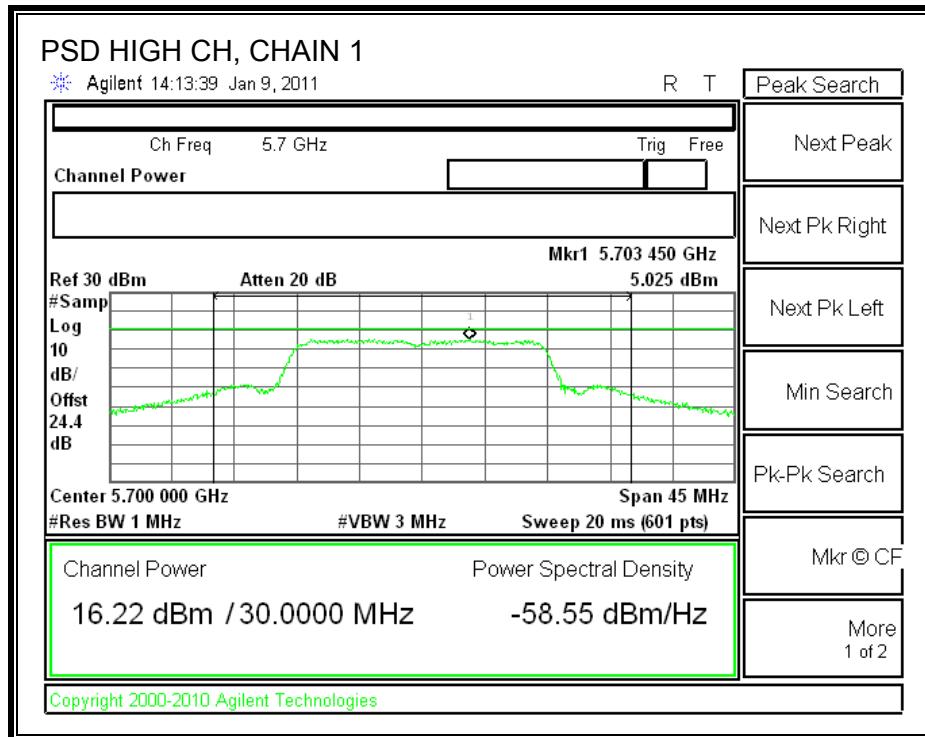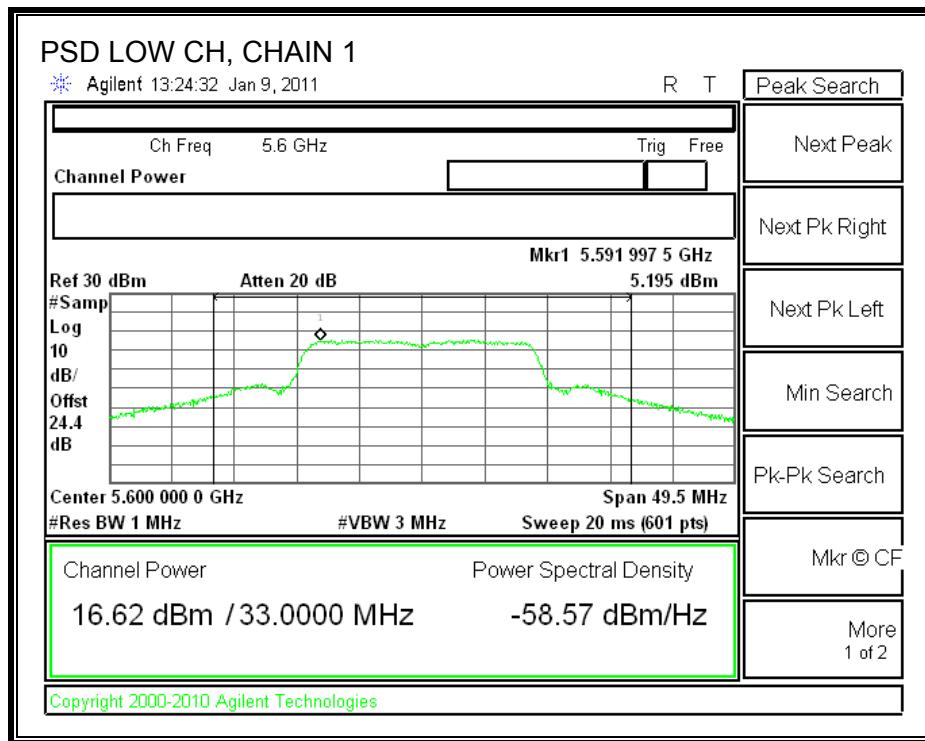

CHAIN 2 POWER SPECTRAL DENSITY

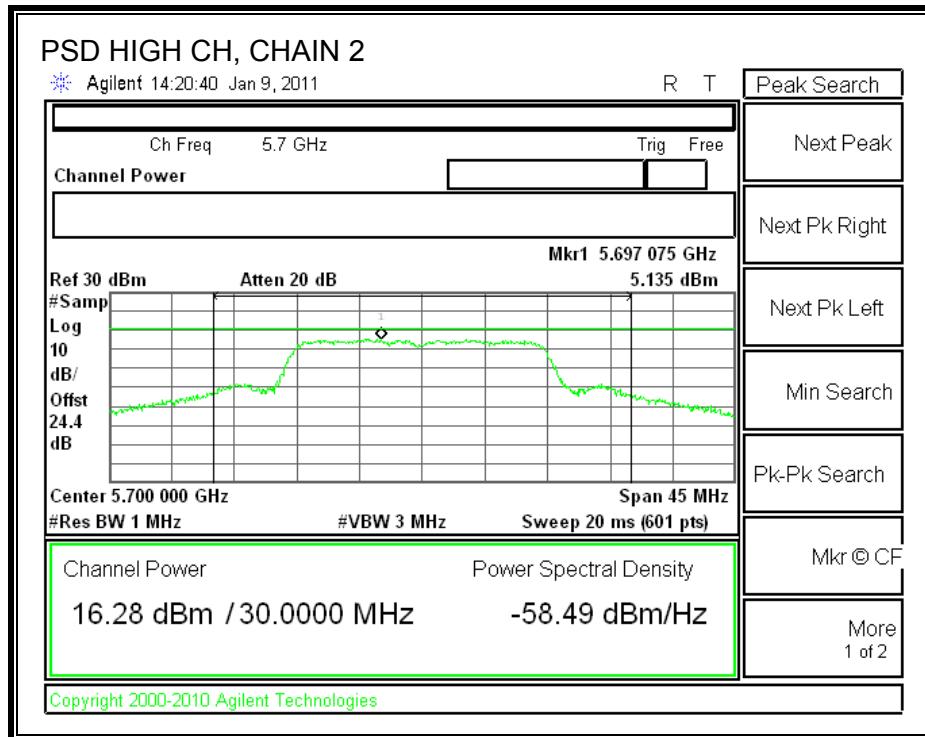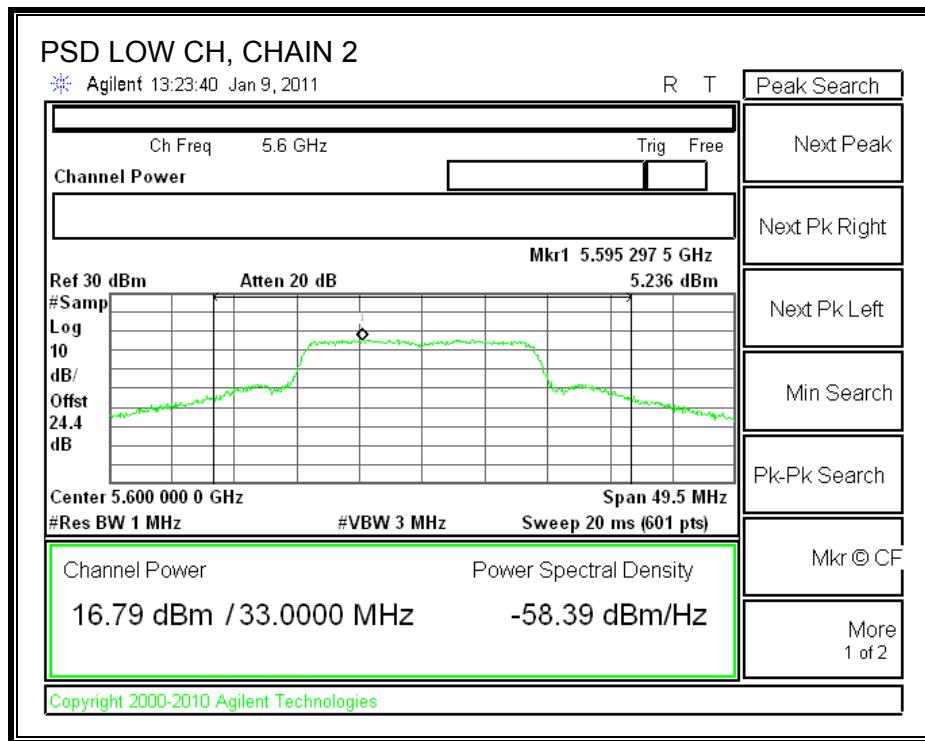

CHAIN 3 POWER SPECTRAL DENSITY

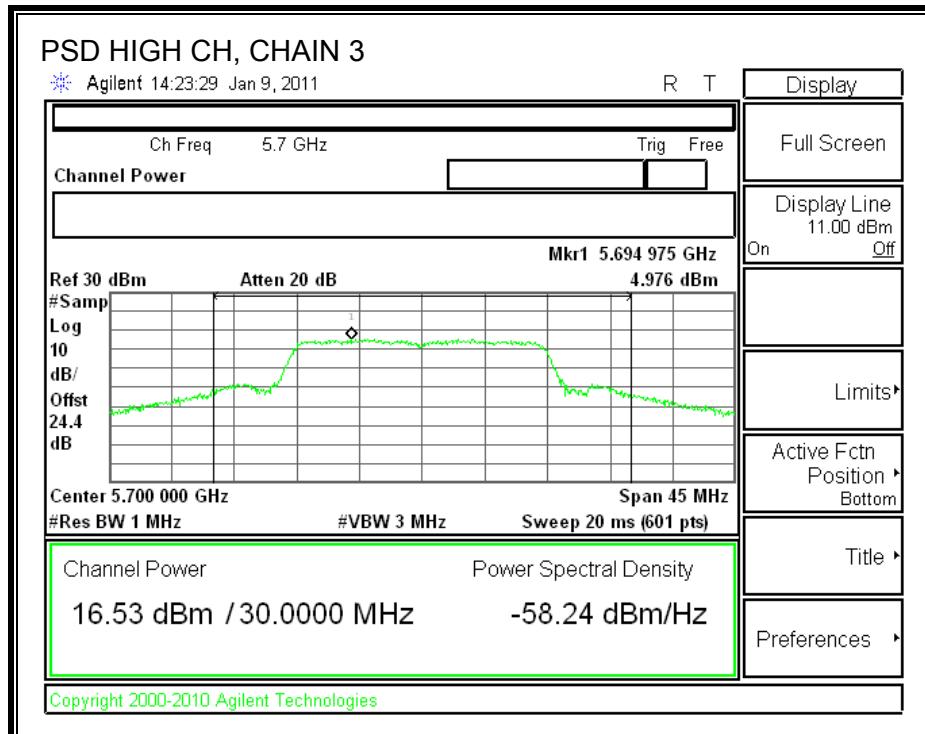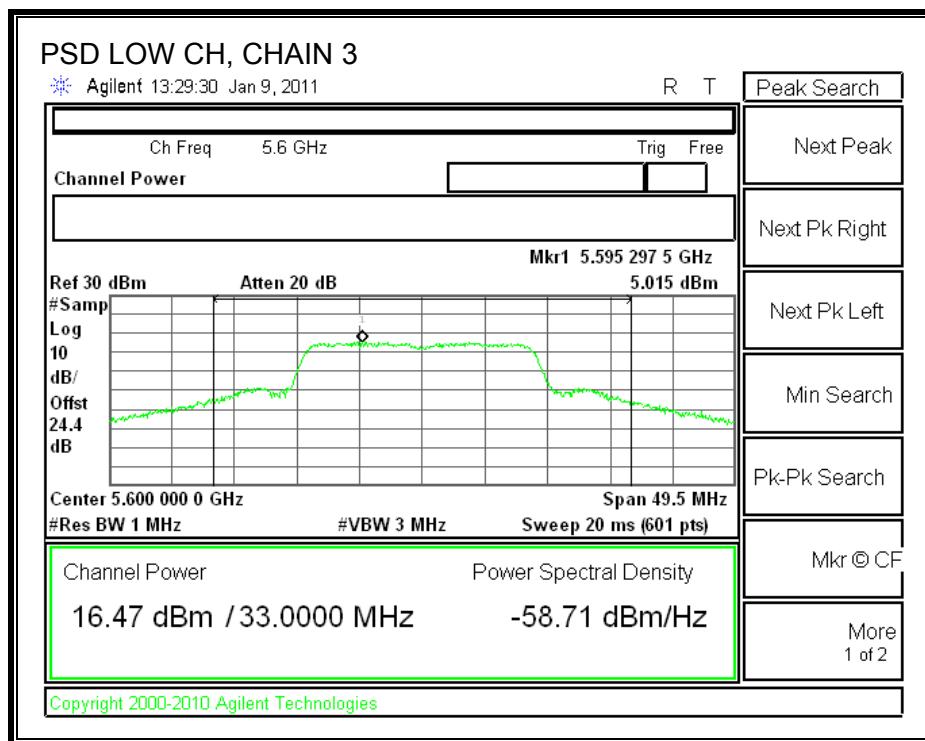

7.11.9. PEAK EXCURSION

LIMITS

FCC §15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

TEST PROCEDURE



The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5600	11.38	13	-1.62
High	5700	9.57	13	-3.43

PEAK EXCURSION

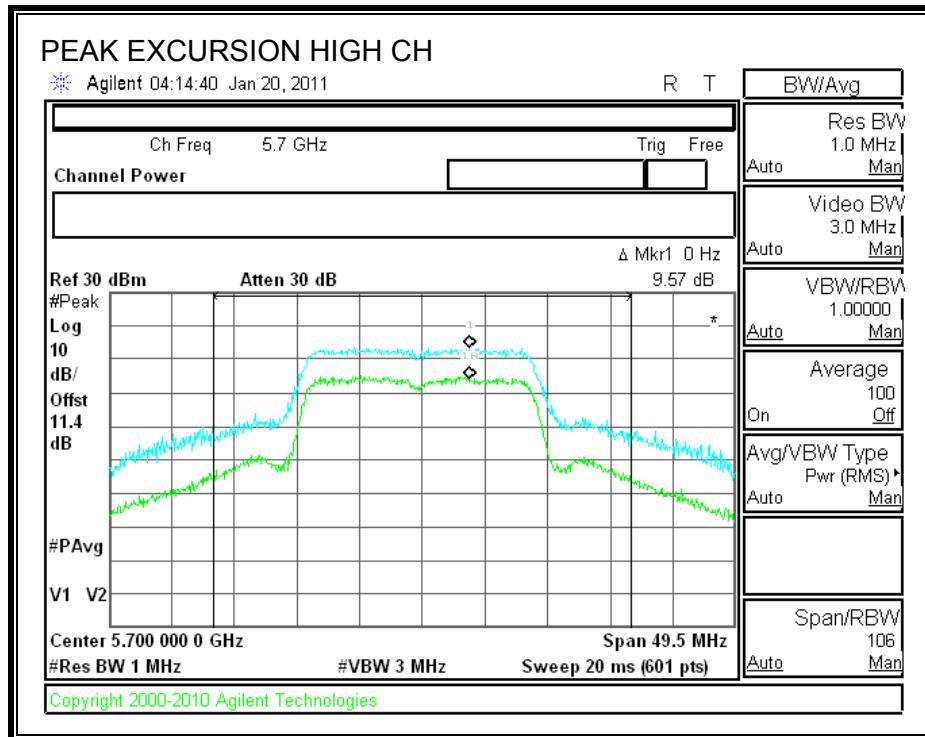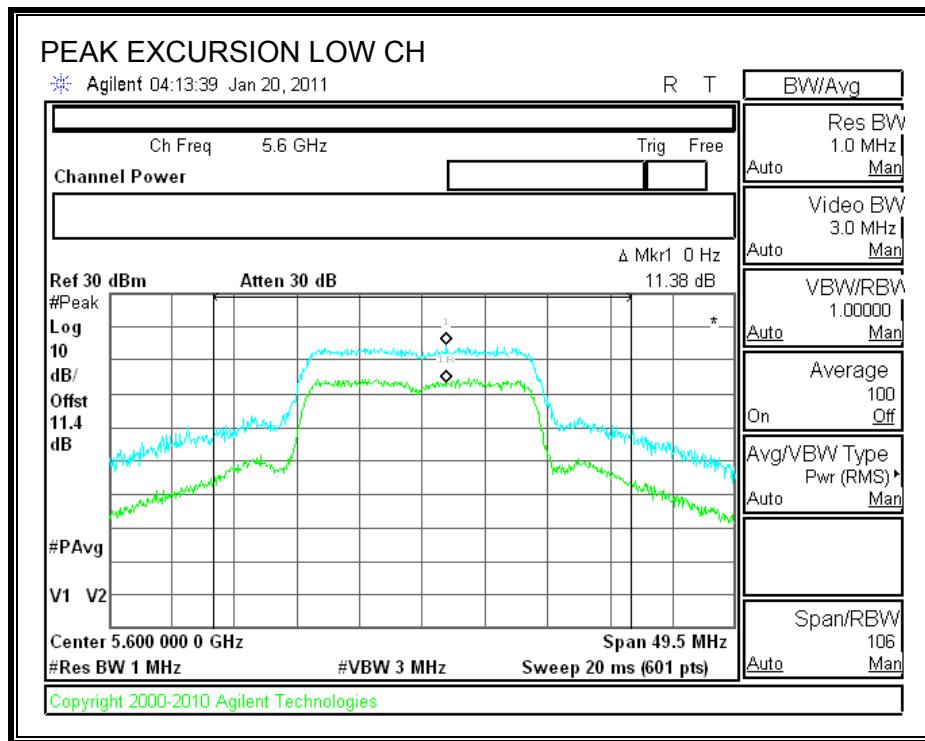

7.11.10. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.407 (b) (3)

IC RSS-210 A9.3 (3)

For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm / MHz.



TEST PROCEDURE


Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to EIRP limit, adjusted for the maximum antenna gain.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

RESULTS SPURIOUS EMISSIONS

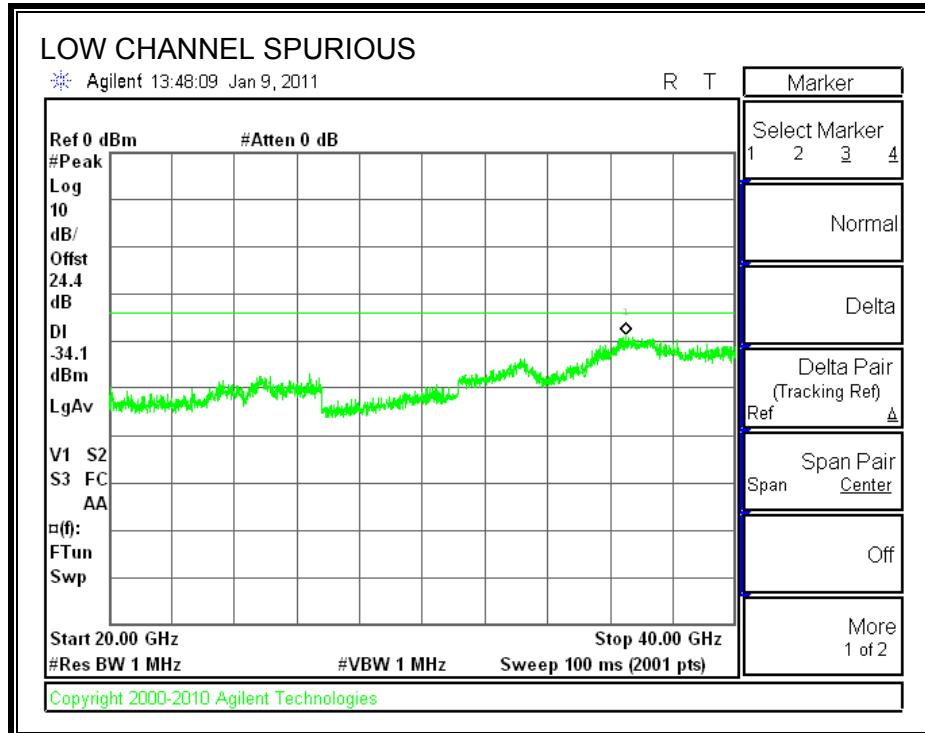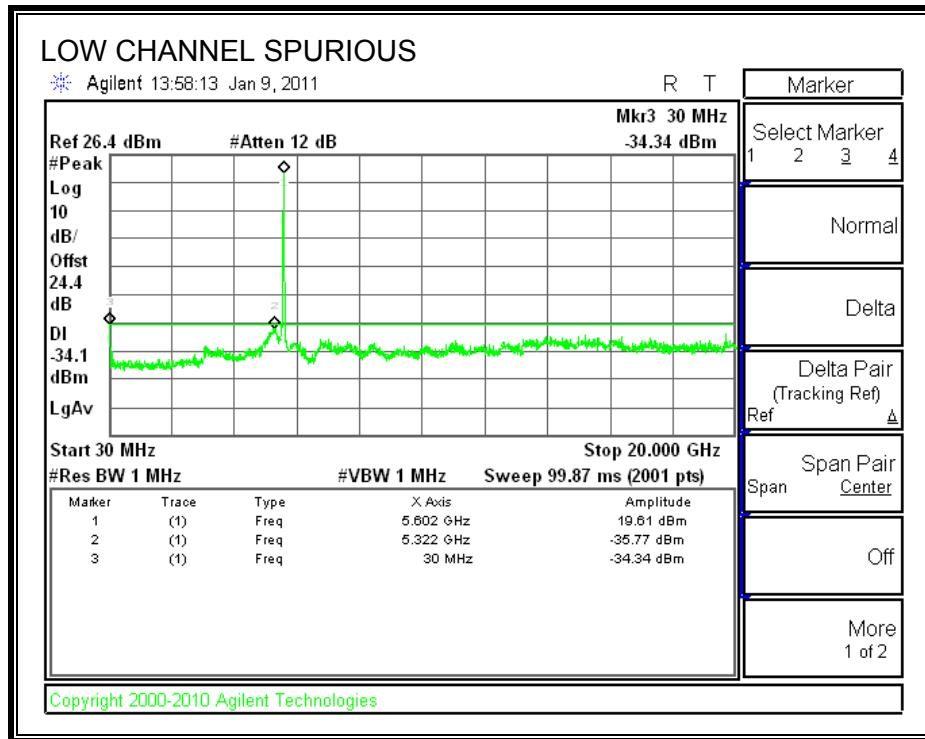


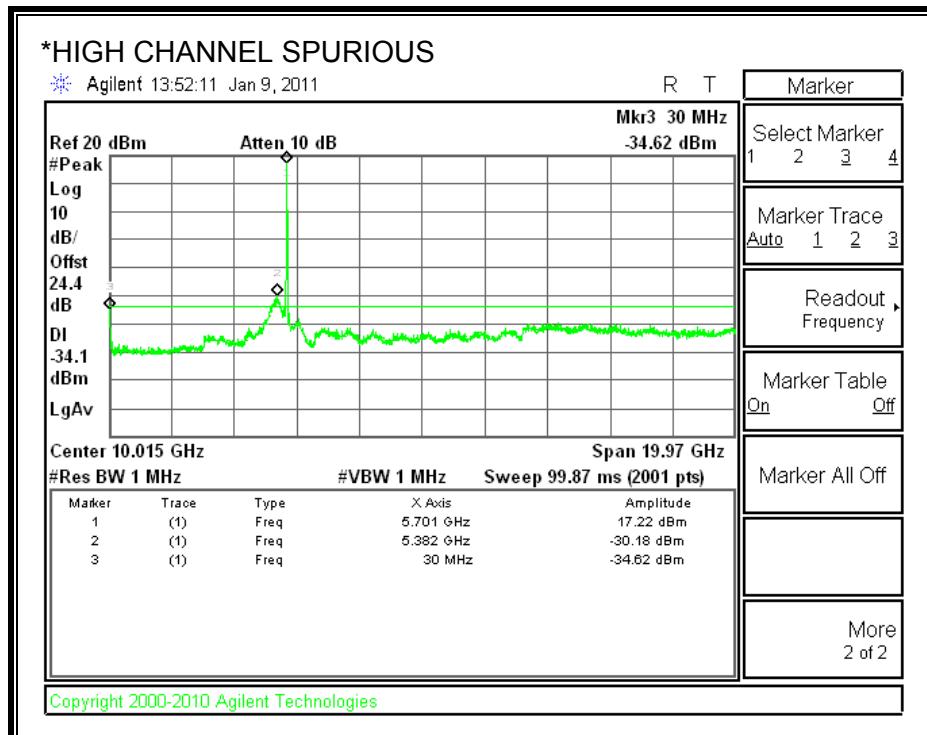

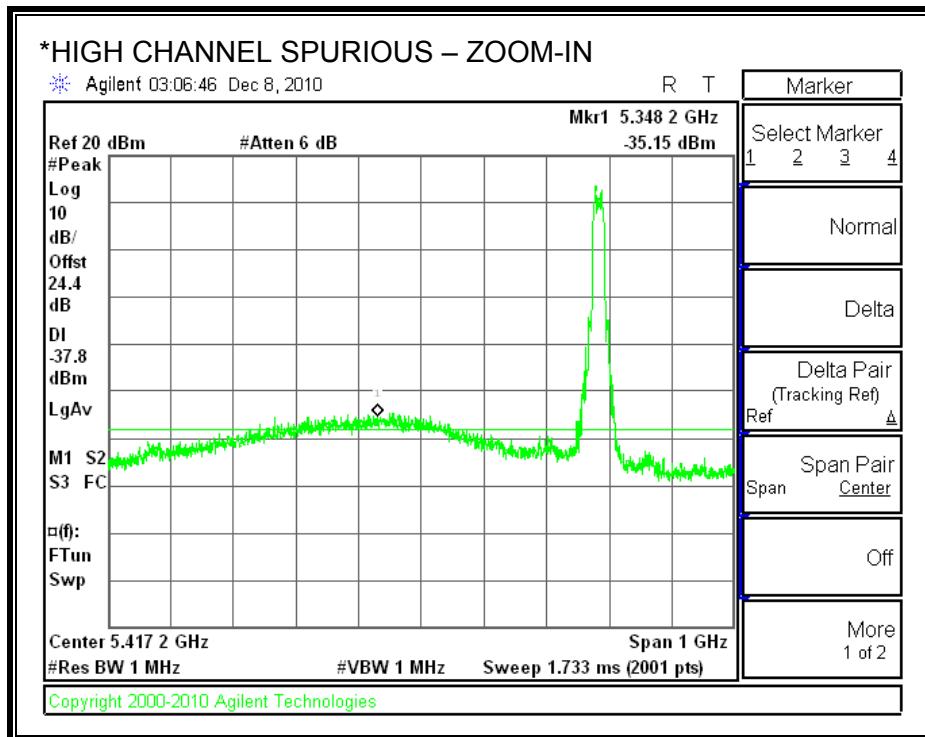

* Passed with EIRP Radiated Substitution

f MHz	SG reading (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Ant. Pol. (H/V)
5431	-38.0	1.2	11.0	-28.2	-27.0	-1.2	V
5431	-46.0	1.2	11.0	-35.0	-27.0	-8.0	H

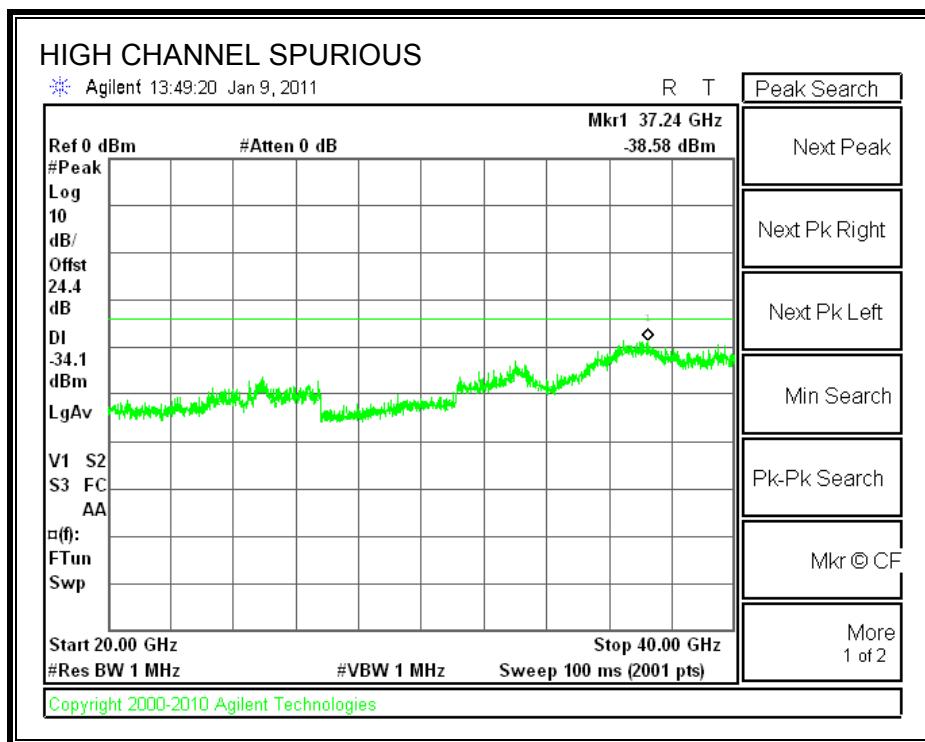

7.12. 802.11n HT40 SISO MODE IN THE 5.6 GHz BAND

SISO

7.12.1. 26 dB and 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to the spectrum analyzer. The RBW is set to 1% to 3% of the measured bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5500	38.793	36.3289
Middle	5580	79.163	60.7790
High	5700	38.858	36.3831

26 dB and 99% BANDWIDTH

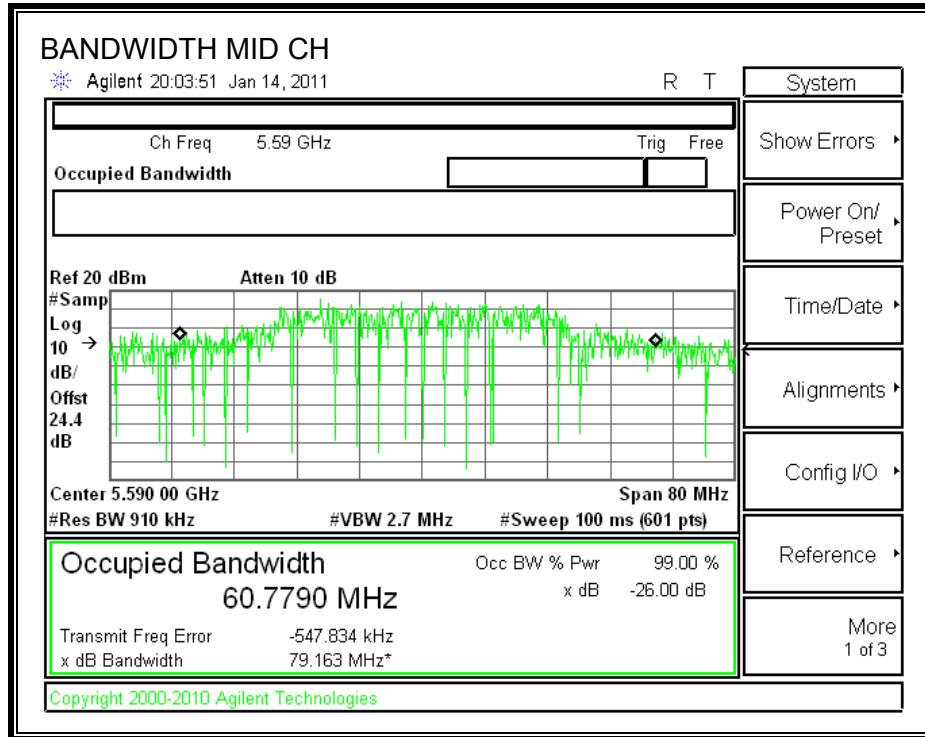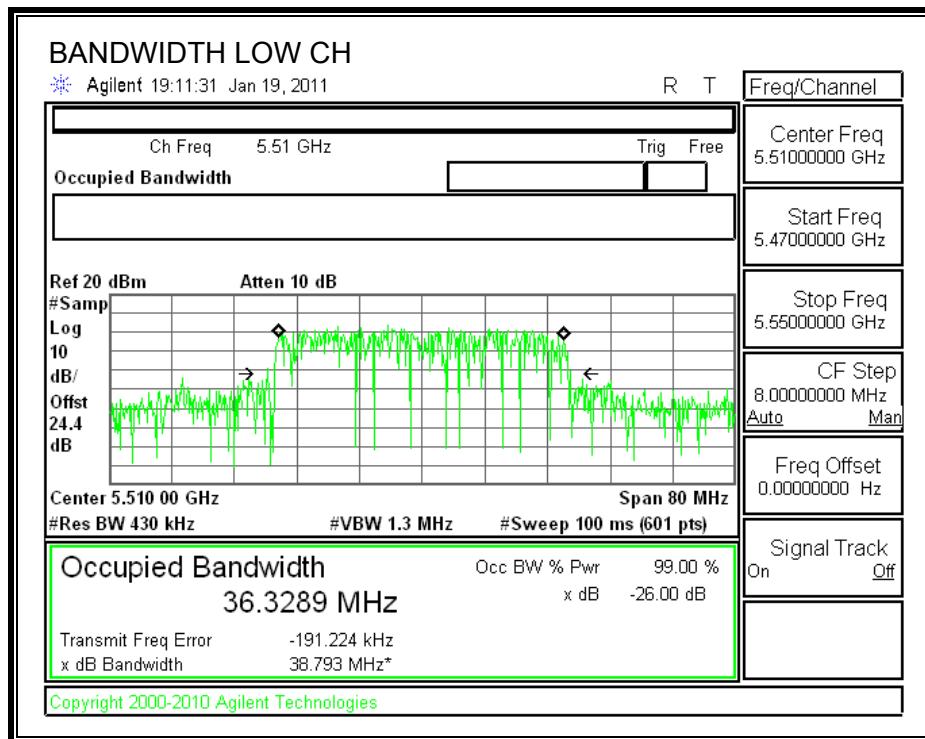

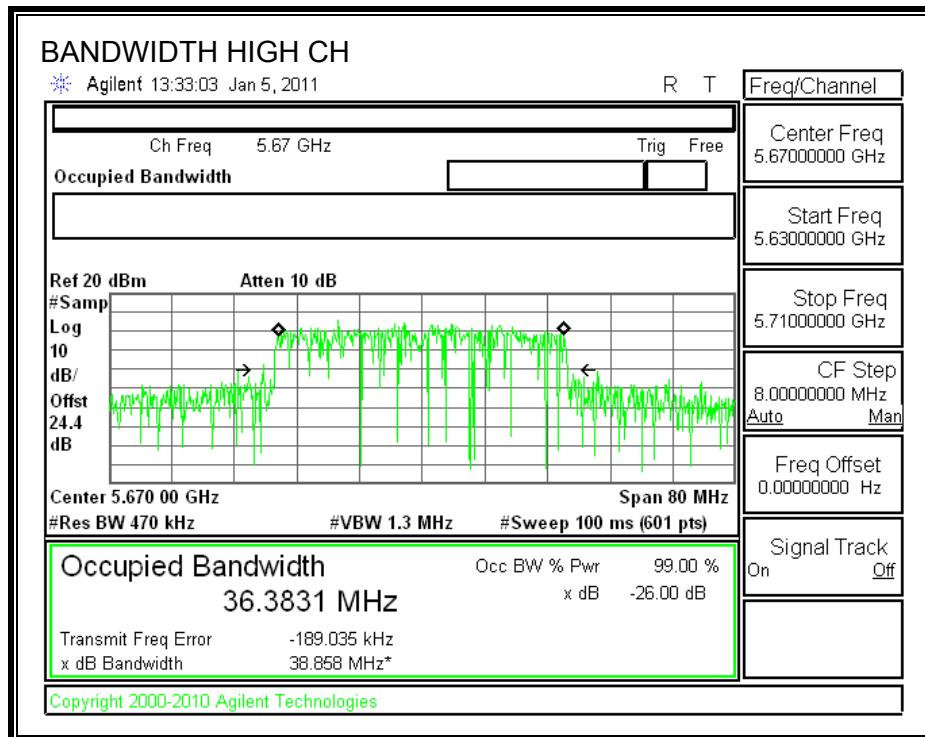

7.12.2. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.47-5.725 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

RESULTS

Limit

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	$11 + 10 \log B$ Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5510	24	38.793	26.89	7.06	22.94
Mid	5590	24	79.163	29.99	7.06	22.94
High	5670	24	38.858	26.89	7.06	22.94



Results


Channel	Frequency (MHz)	Power (dBm)	Limit (dBm)	Margin (dB)
Low	5510	15.90	22.94	-7.04
Mid	5590	22.39	22.94	-0.55
High	5670	22.00	22.94	-0.94

TPC Results


TPC Delta Power	Chain 0			
	6.30			
Worst-case TPC Power	Chain 0	Ant Gain	EIRP	
	Mid	5590	16.09	7.06
			TPC Limit (dBm)	24
			Margin (dB)	-0.85

OUTPUT POWER

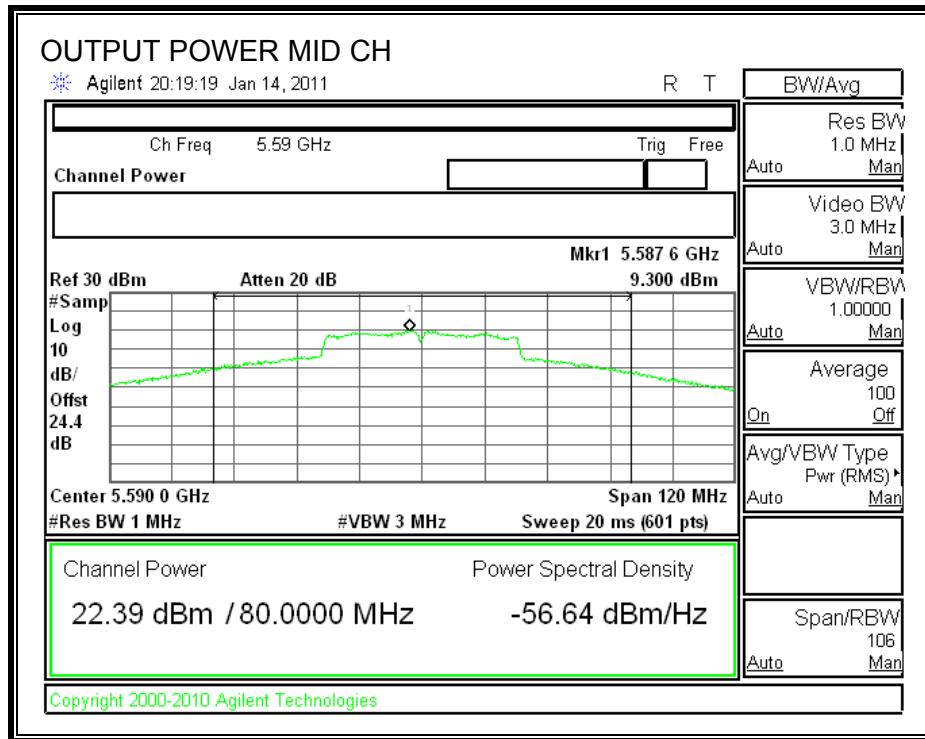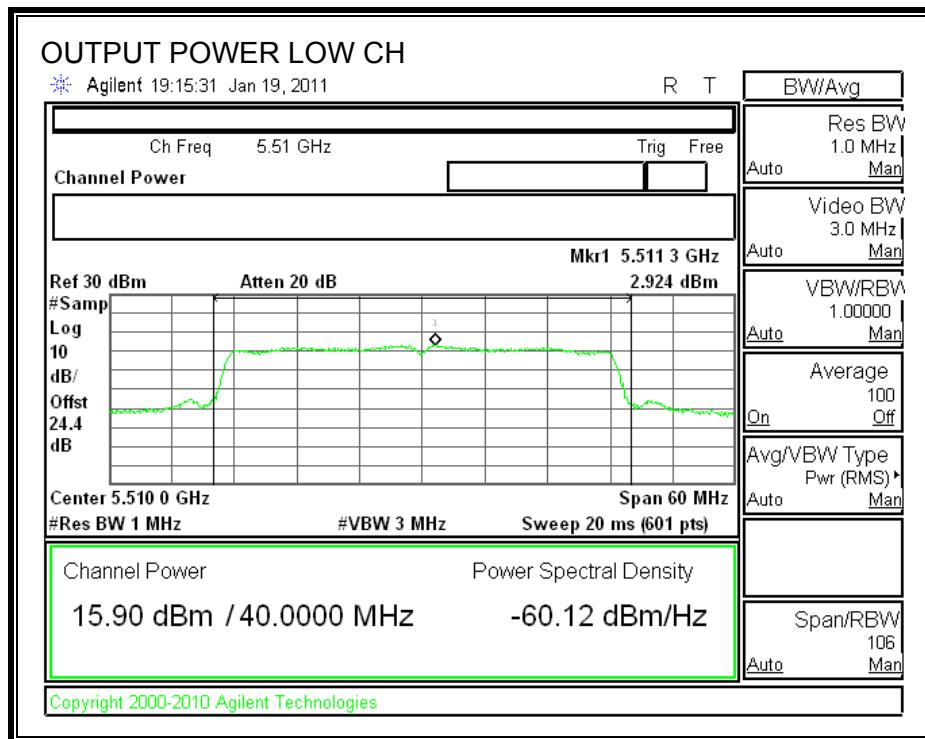

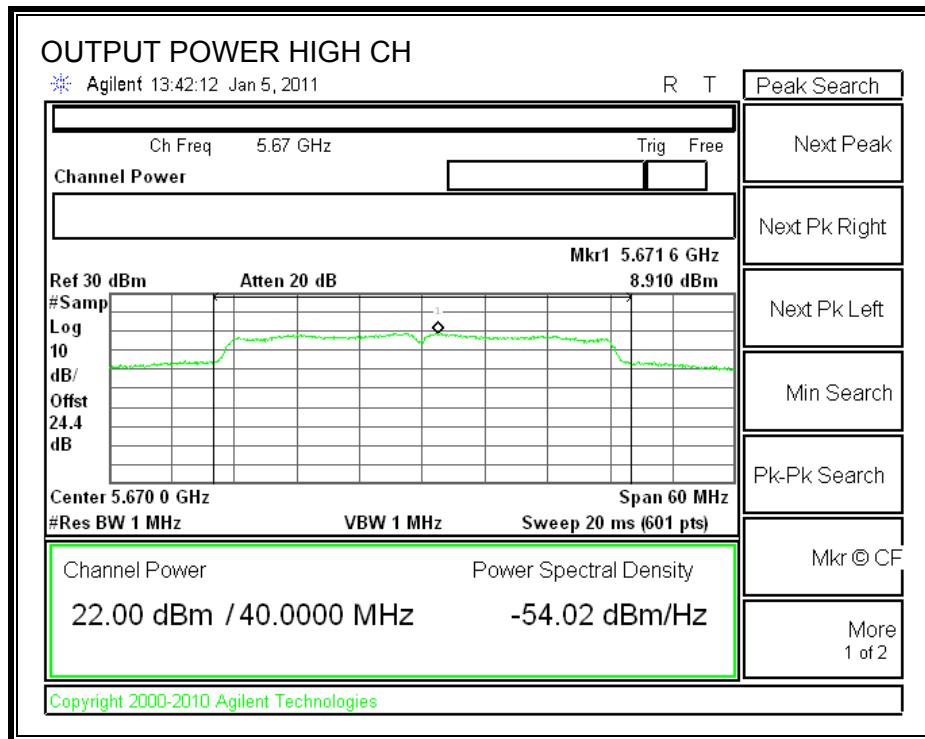

TPC OUTPUT POWER

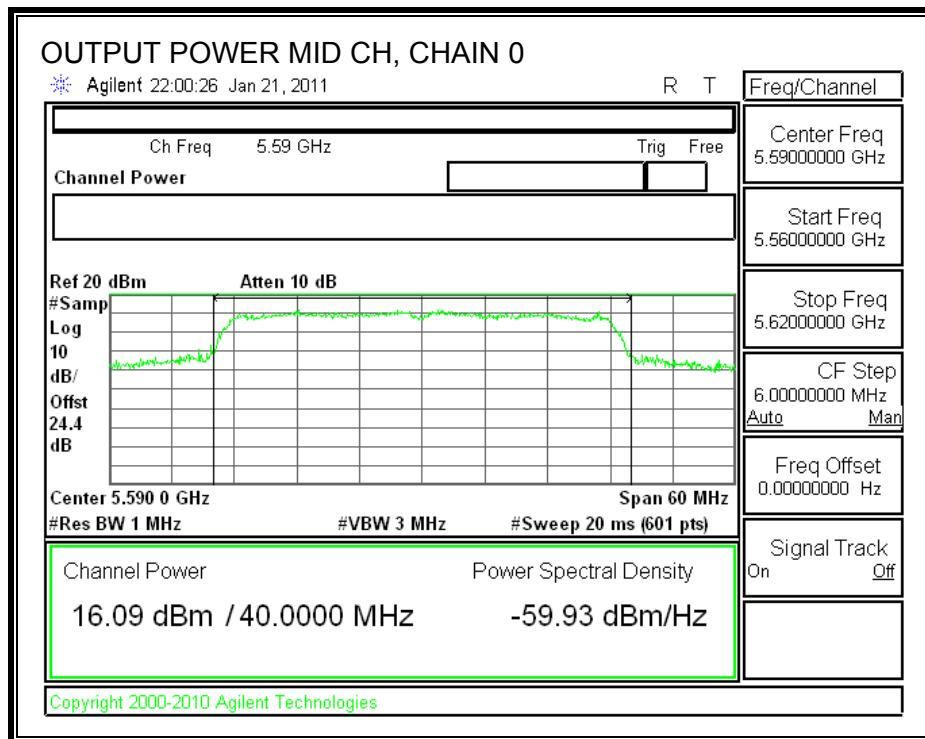

7.12.3. PEAK POWER SPECTRAL DENSITY

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.47-5.725 GHz band, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is equal to 7.06, therefore the limit is 9.94.



TEST PROCEDURE


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5510	2.92	9.94	-7.02
Middle	5590	9.30	9.94	-0.64
High	5760	8.91	9.94	-1.03

POWER SPECTRAL DENSITY

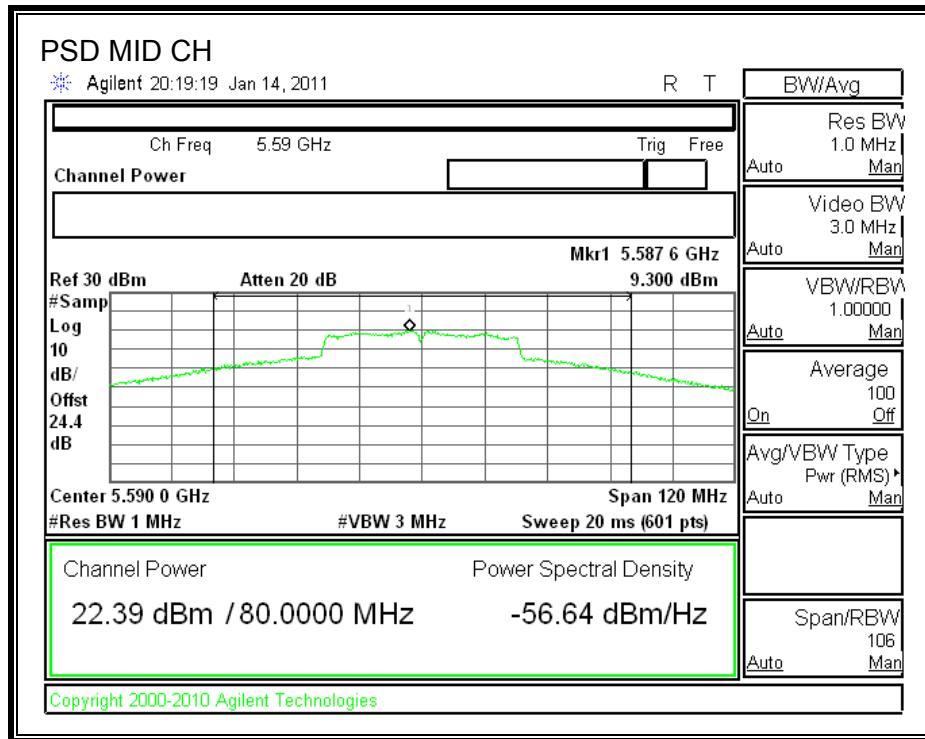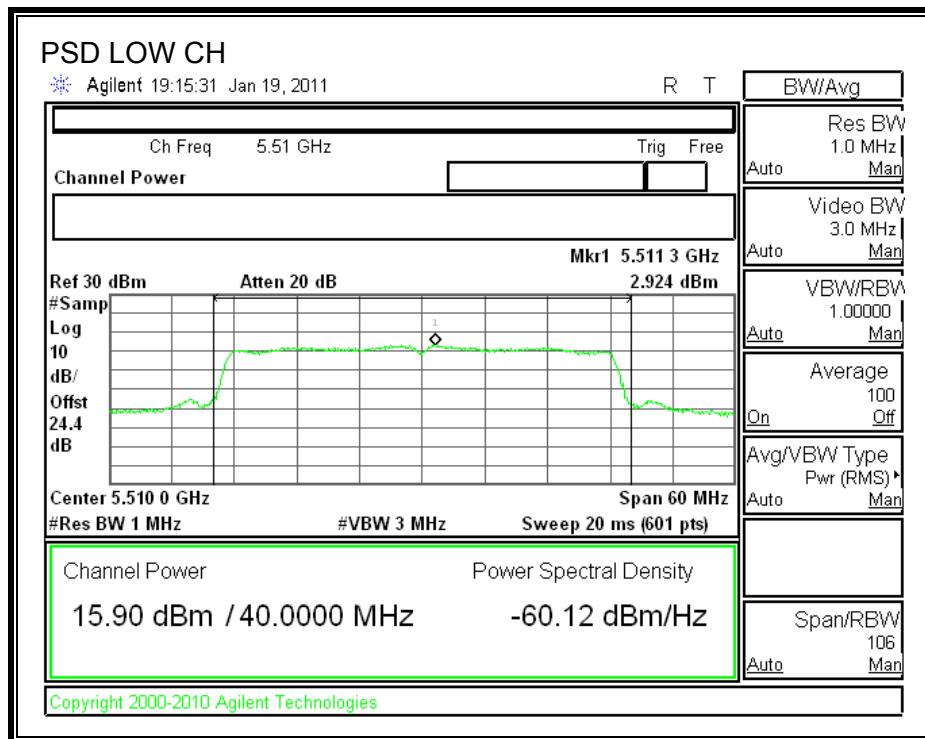

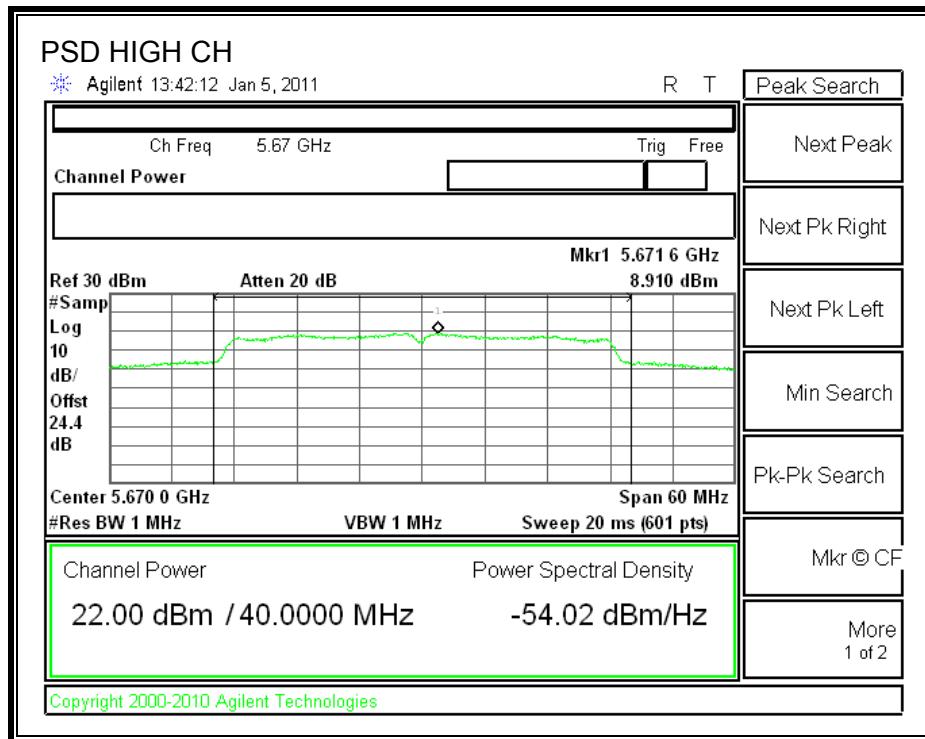

7.12.4. PEAK EXCURSION

LIMITS

FCC §15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

TEST PROCEDURE



The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.


Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5510	8.86	13	-4.14
Middle	5590	10.65	13	-2.35
High	5670	9.53	13	-3.47

PEAK EXCURSION

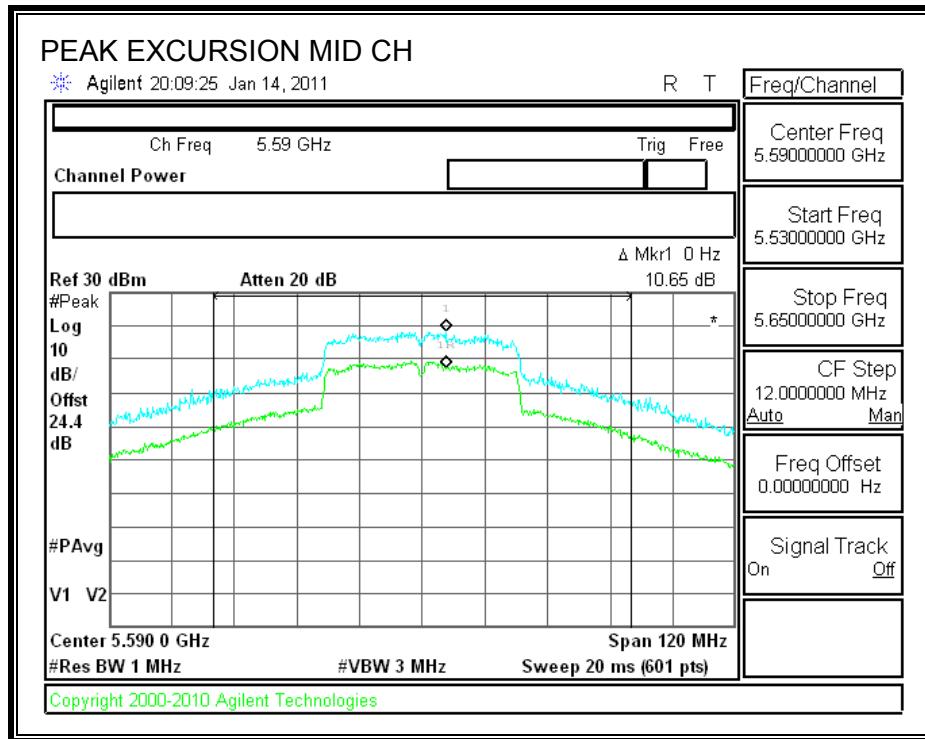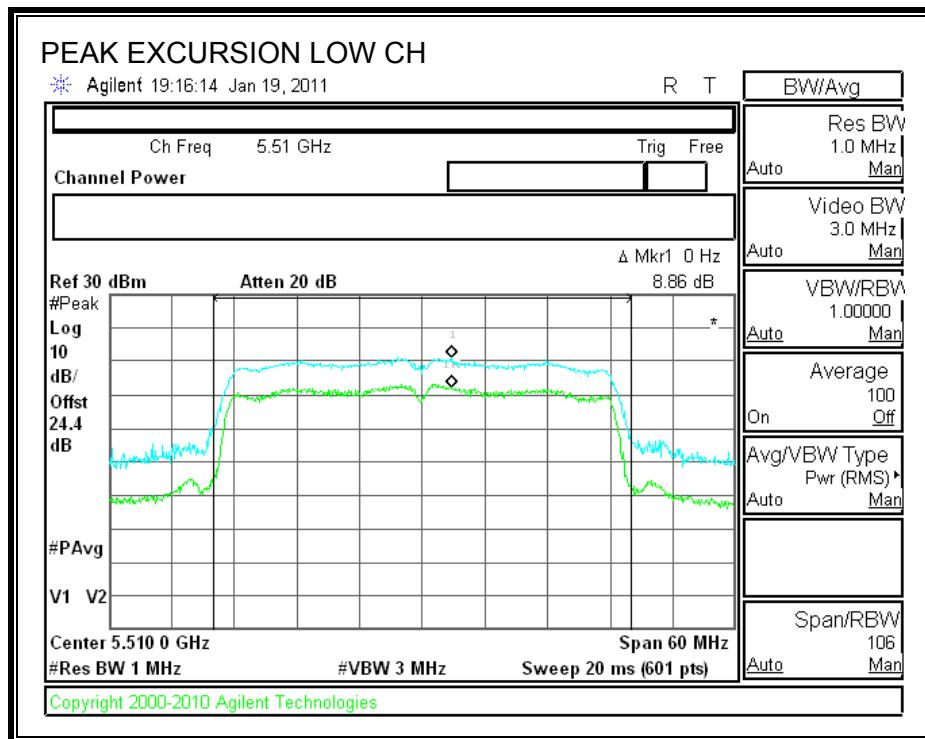

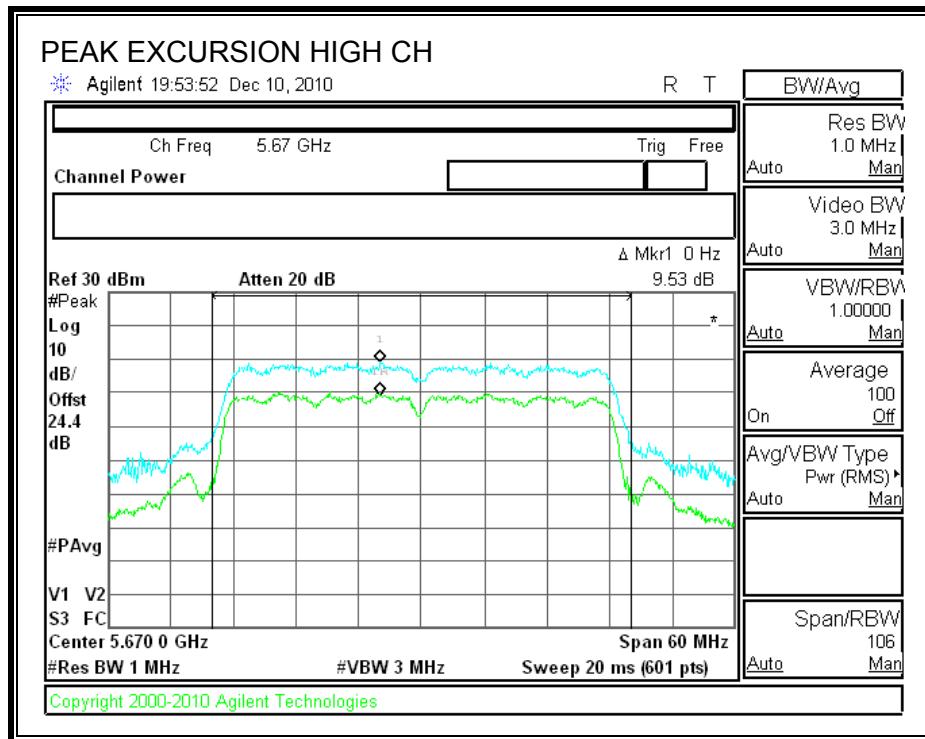

7.12.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.407 (b) (3)

IC RSS-210 A9.3 (3)

For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm / MHz.



TEST PROCEDURE



Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.



The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to EIRP limit, adjusted for the maximum antenna gain.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

SPURIOUS EMISSIONS - COMBINER

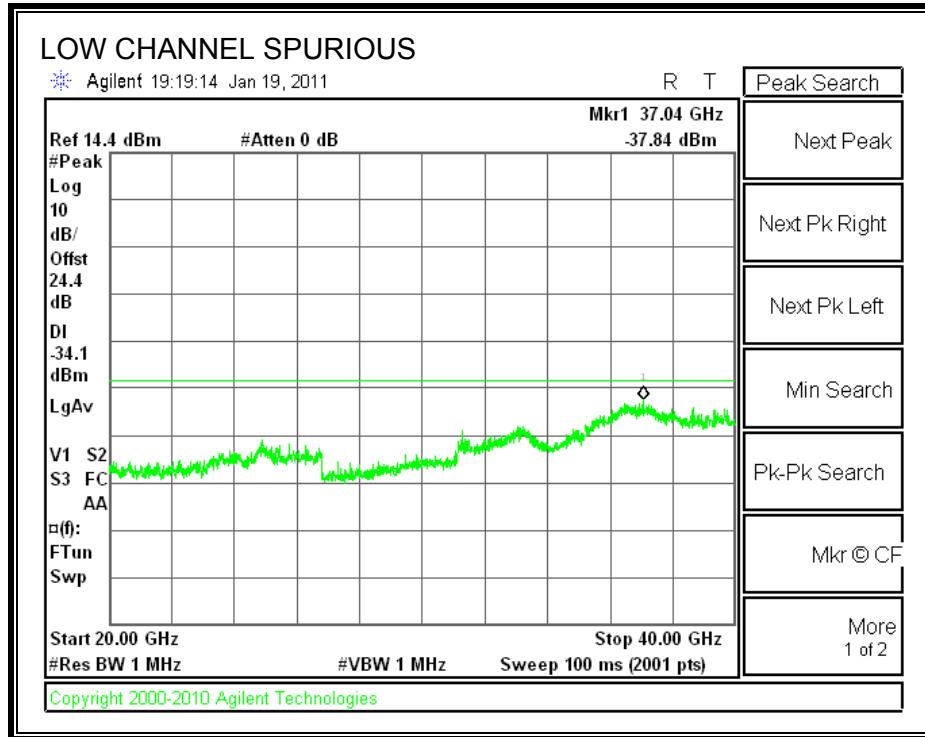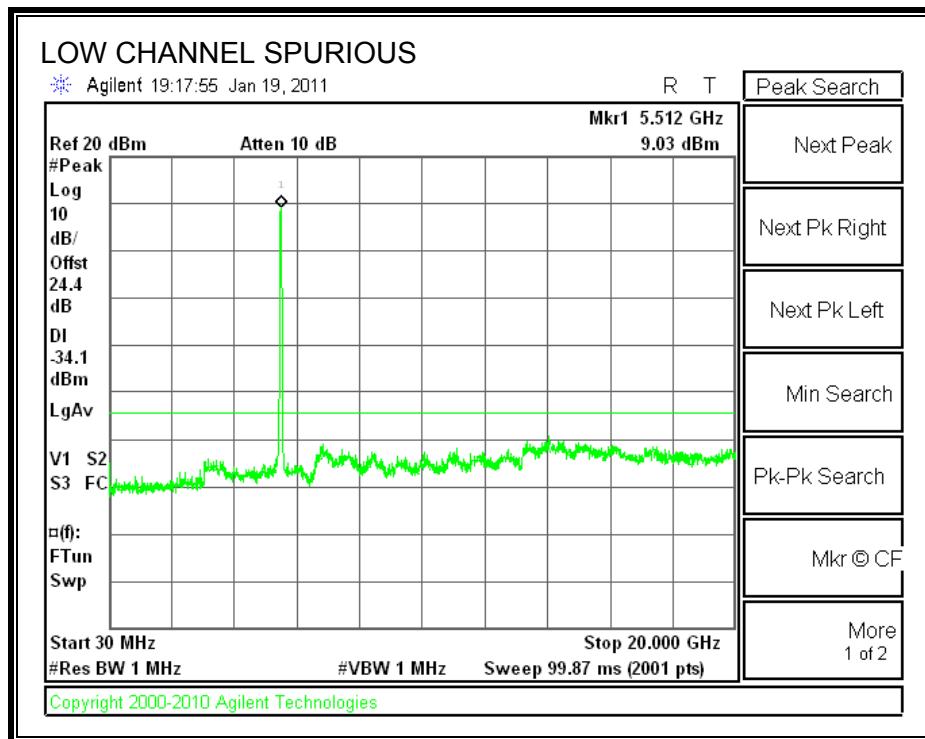

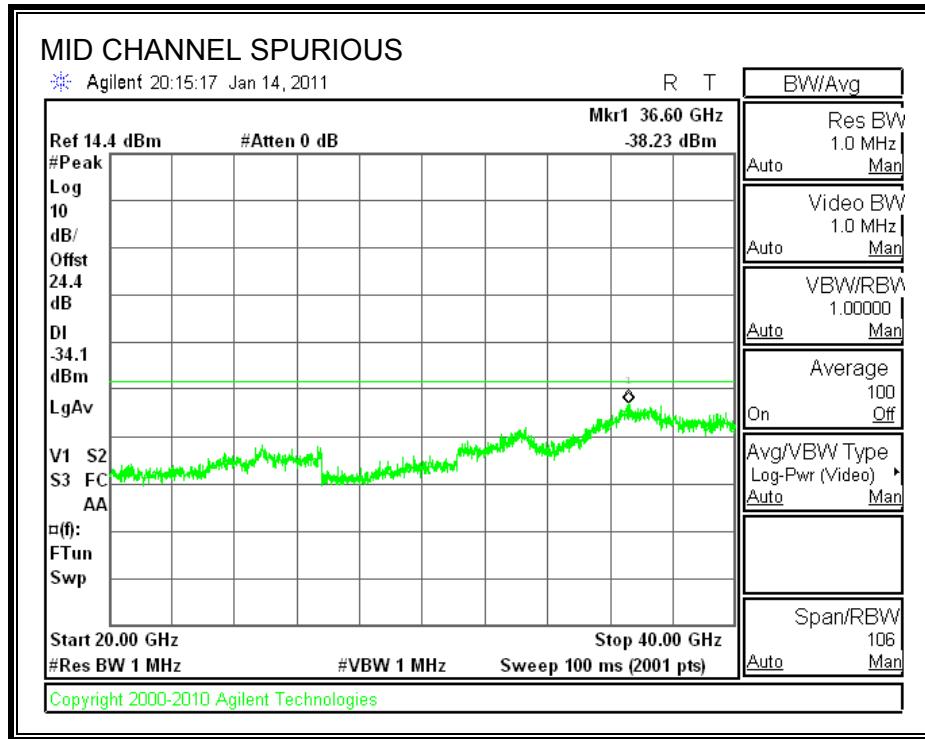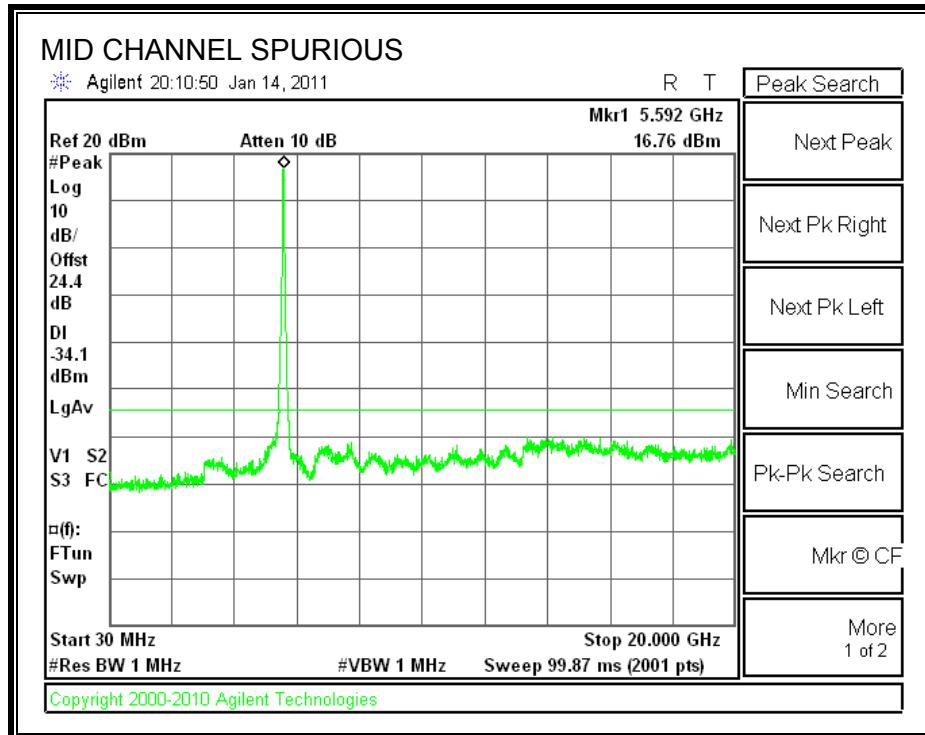

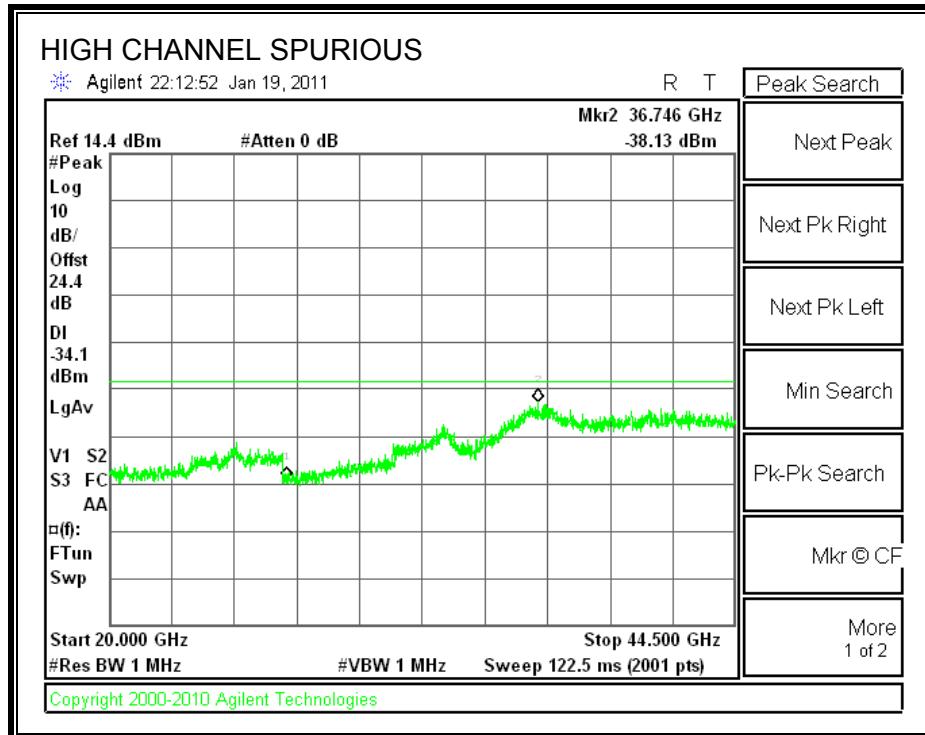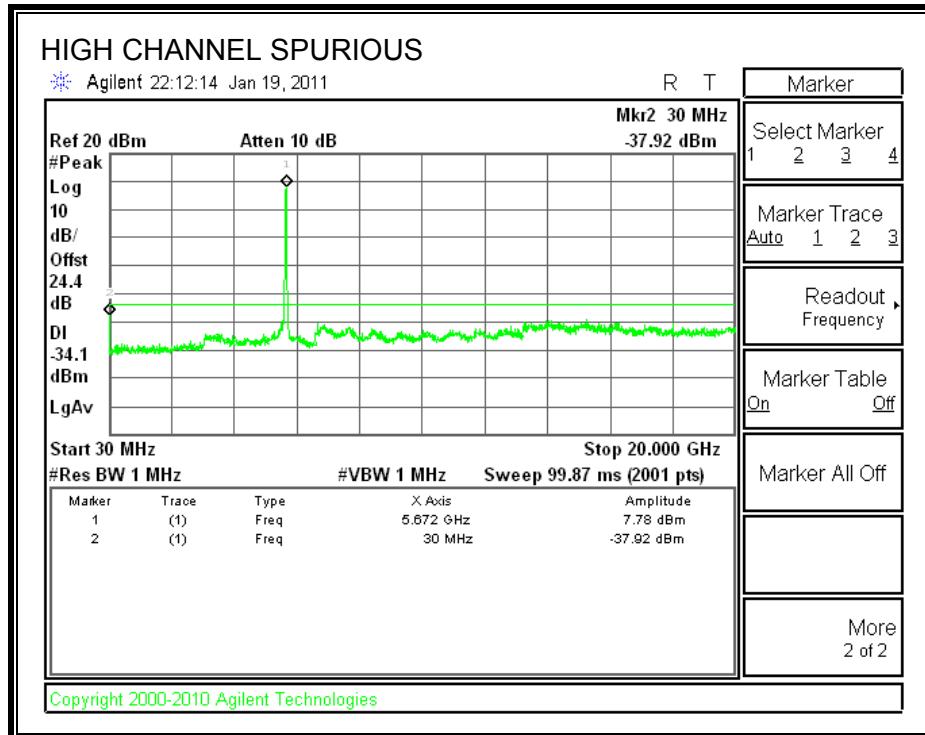

7.13. 802.11n THREE CHAINS HT40 MODE IN THE 5.6 GHz BAND

CDD MCS0

7.13.1. 26 dB and 99% BANDWIDTH

LIMITS

None; for reporting purposes only.



TEST PROCEDURE


The transmitter outputs are connected to the spectrum analyzer via a combiner. The RBW is set to 1% to 3% of the measured bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	38.008	35.4835
Middle	5590	38.366	35.9428
High	5670	38.679	36.6444

26 dB and 99% BANDWIDTH

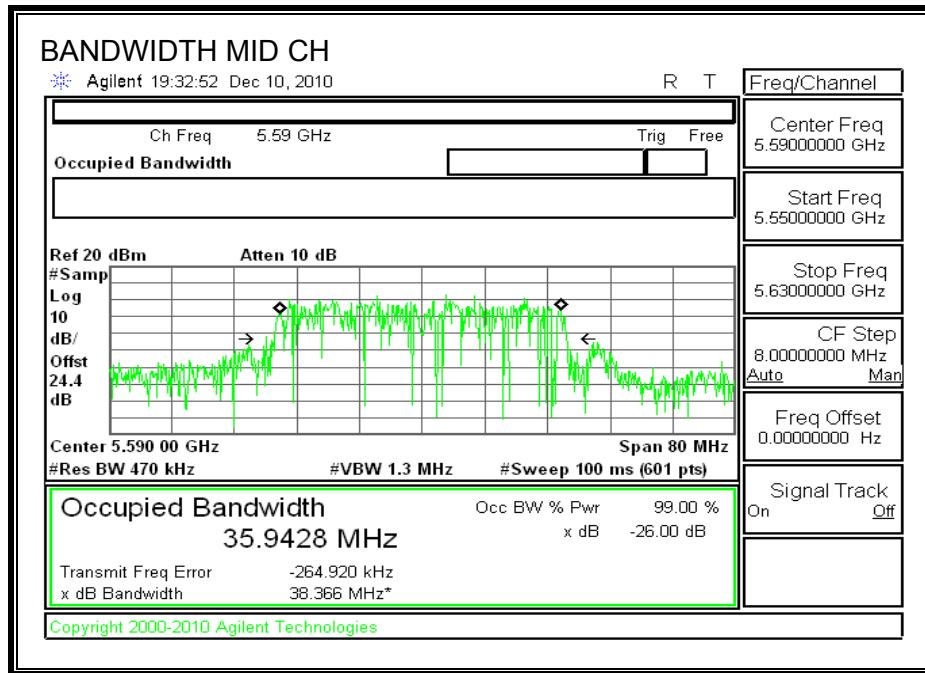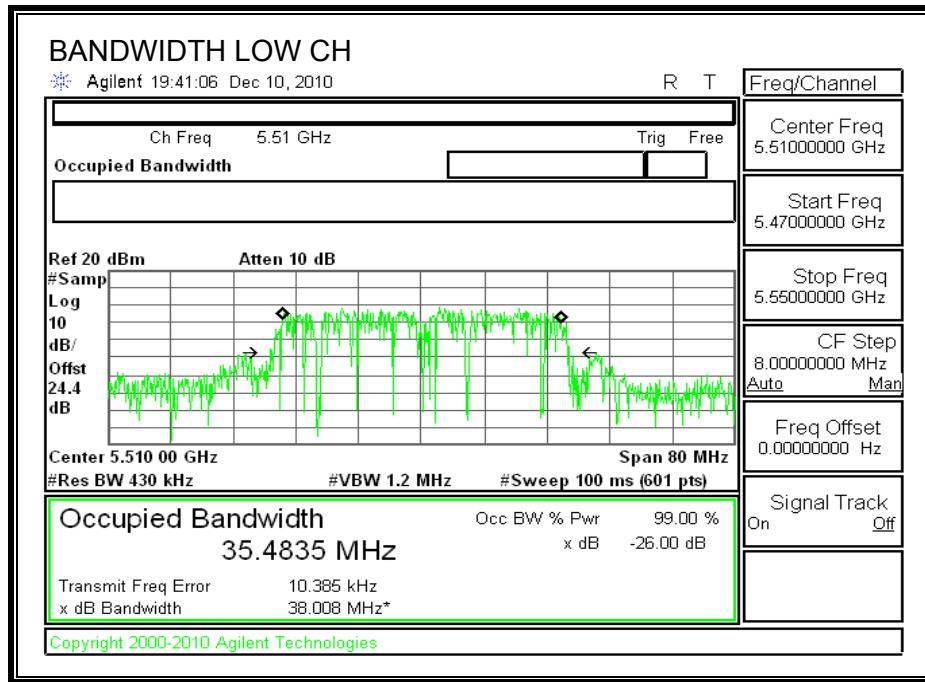

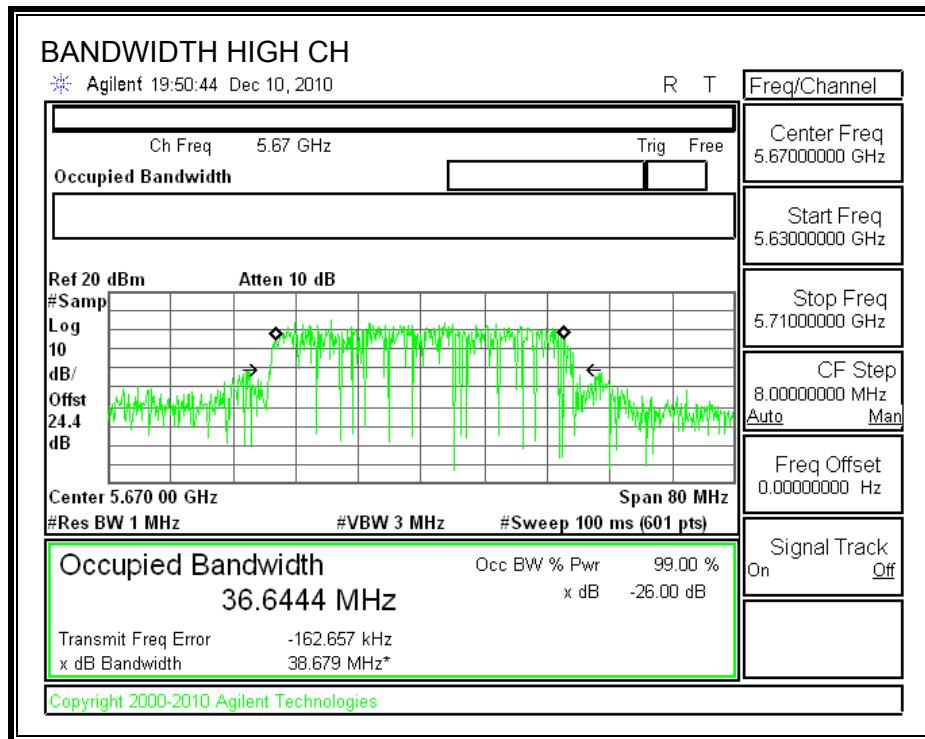

7.13.2. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.47-5.725 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

RESULTS

Limit

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5510	23.98	38.008	26.80	11.23	18.75
Mid	5590	23.98	38.366	26.84	11.23	18.75
High	5670	23.98	38.679	26.87	11.23	18.75



Individual Chain Results


Channel	Frequency (MHz)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Chain 3 Power (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5510	9.41	9.85	9.78	14.46	18.75	-4.29
Mid	5590	13.44	13.56	14.02	18.45	18.75	-0.30
High	5670	13.40	13.68	14.15	18.53	18.75	-0.22

TPC Results


TPC Delta Power	Chain 0	Chain 1	Chain 2			
	6.60	7.00	6.96			
Worst-case TPC Power	Chain 0	Chain 1	Chain 2	Total Power	Ant Gain	EIRP
High	5670	6.80	6.68	7.19	11.67	11.23
				TPC Limit (dBm)	24	
				Margin (dB)	-1.10	



CHAIN 1 OUTPUT POWER

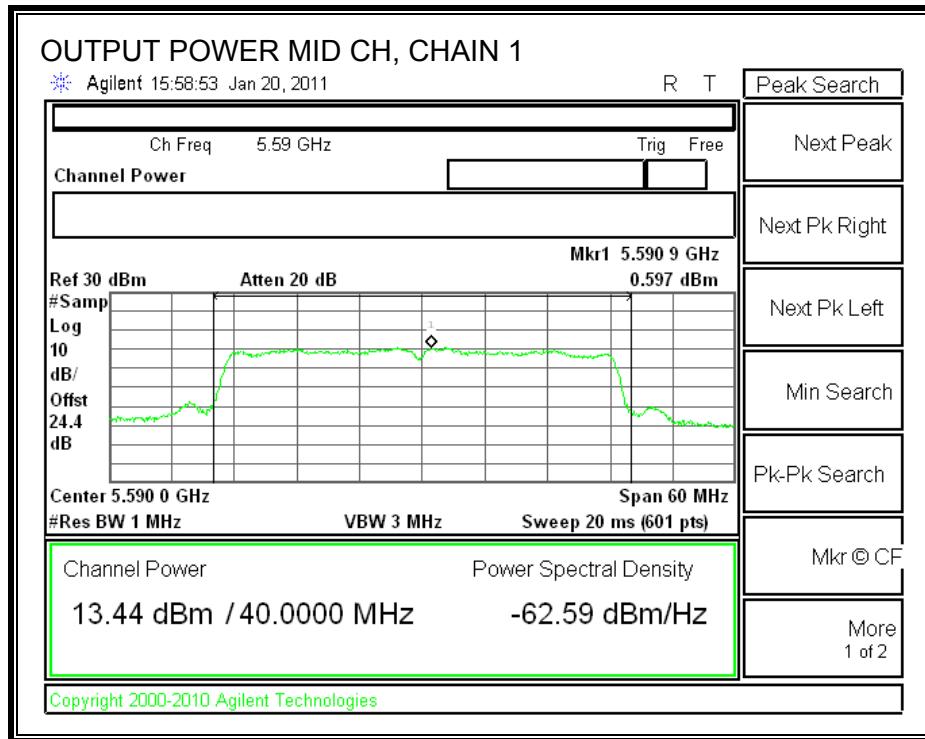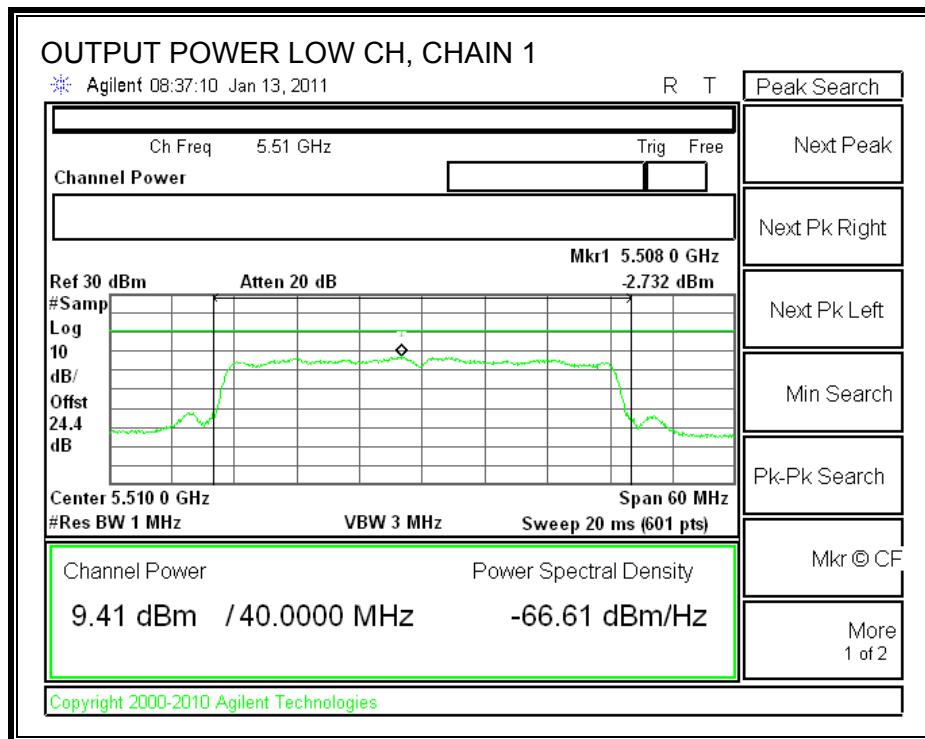


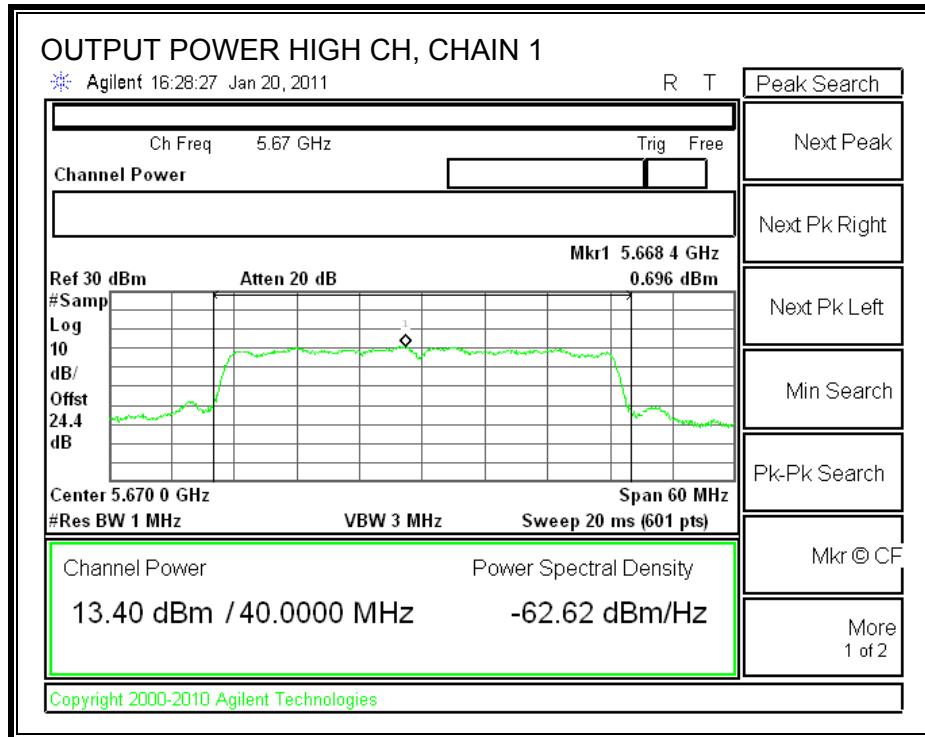



CHAIN 2 OUTPUT POWER

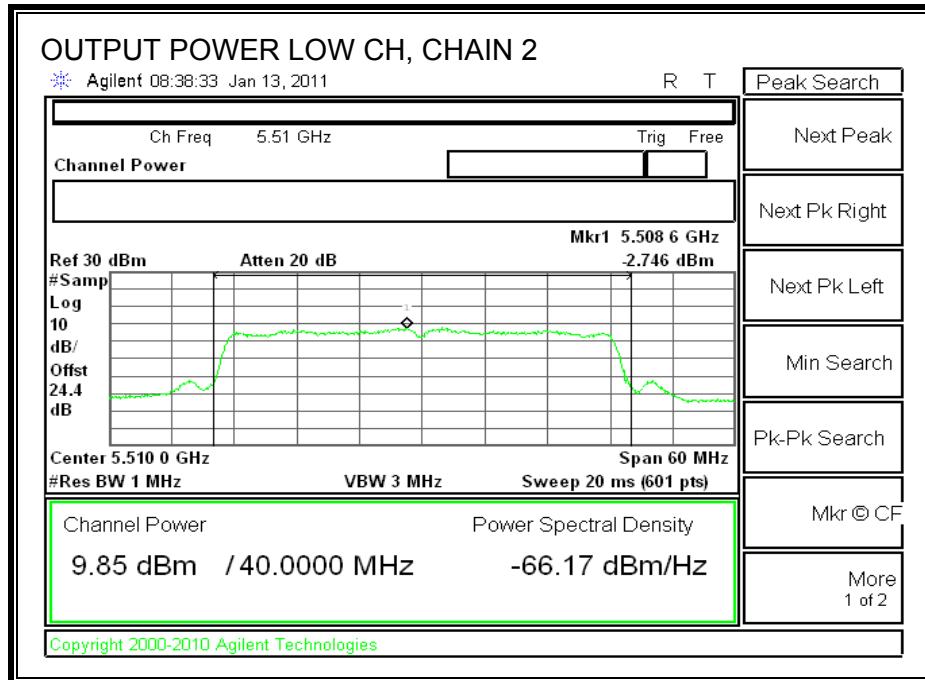

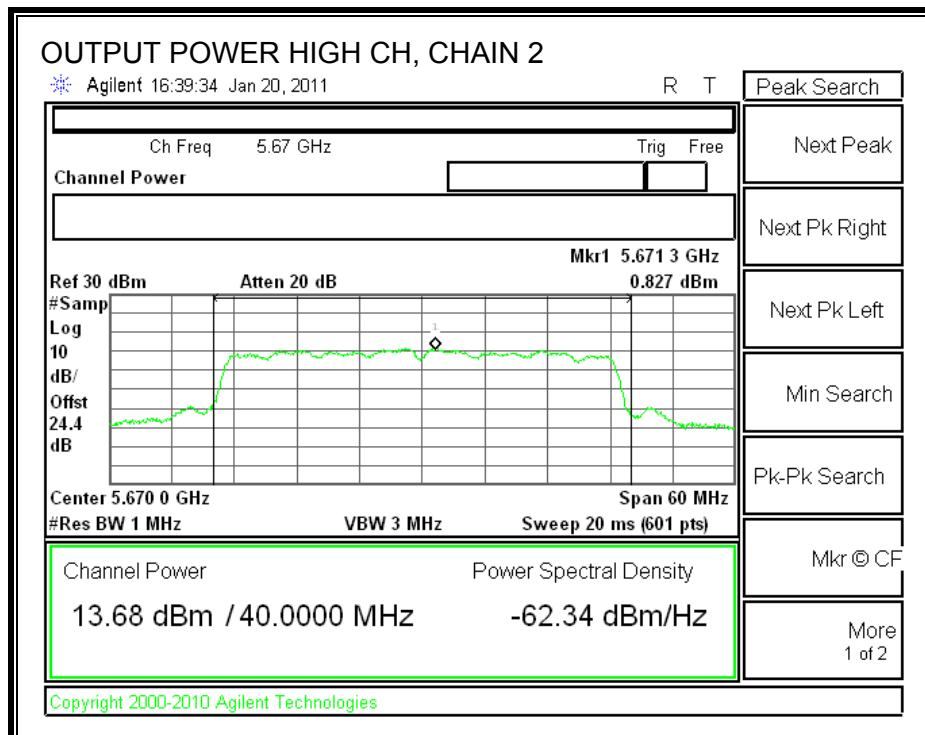
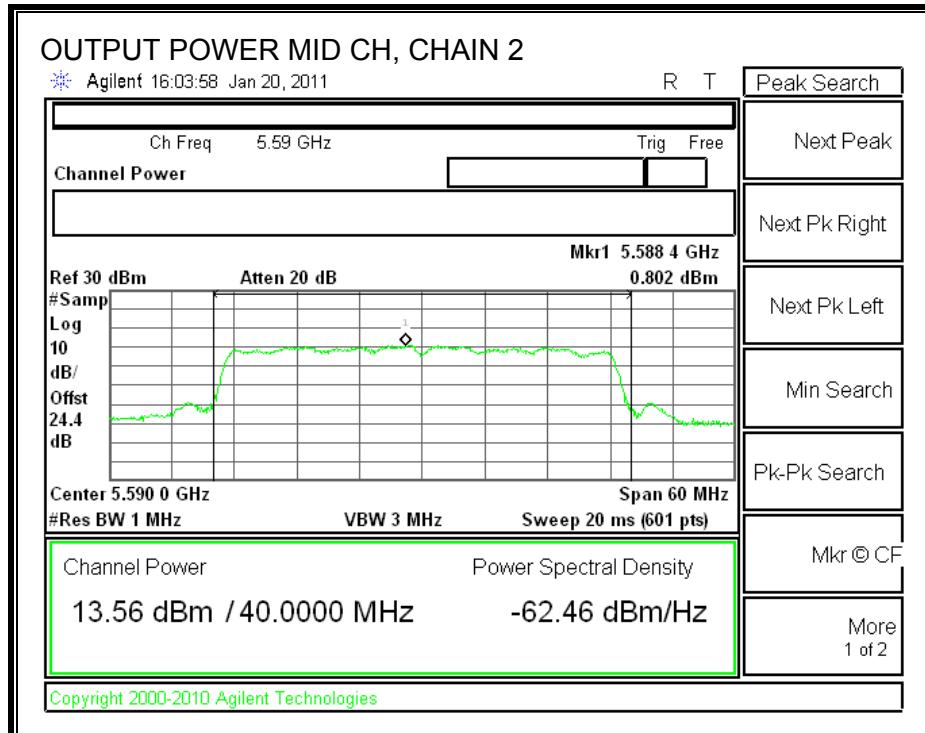



CHAIN 3 OUTPUT POWER

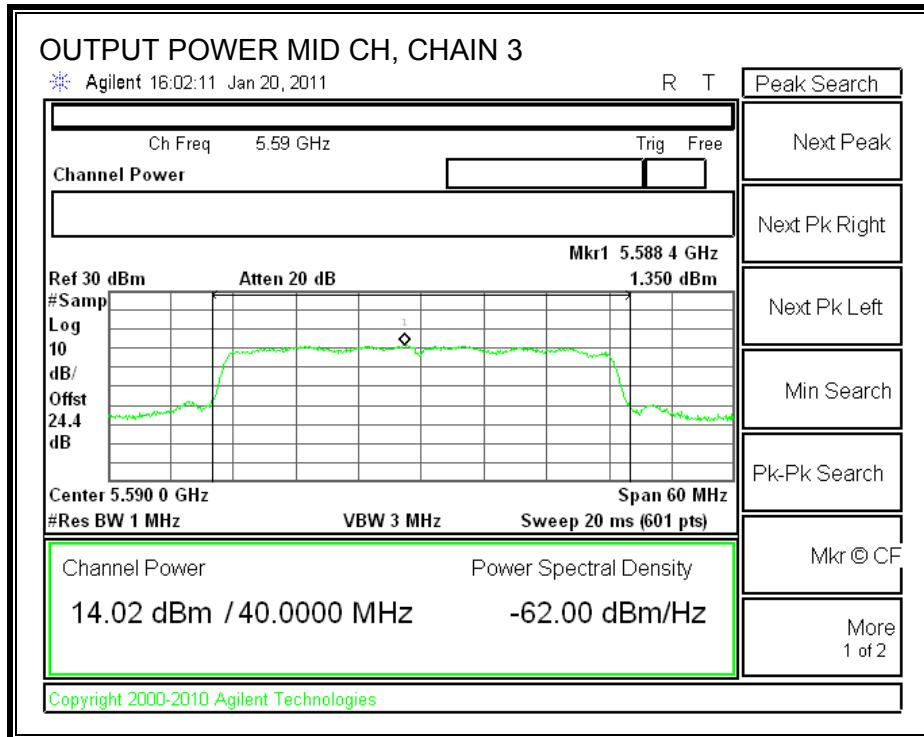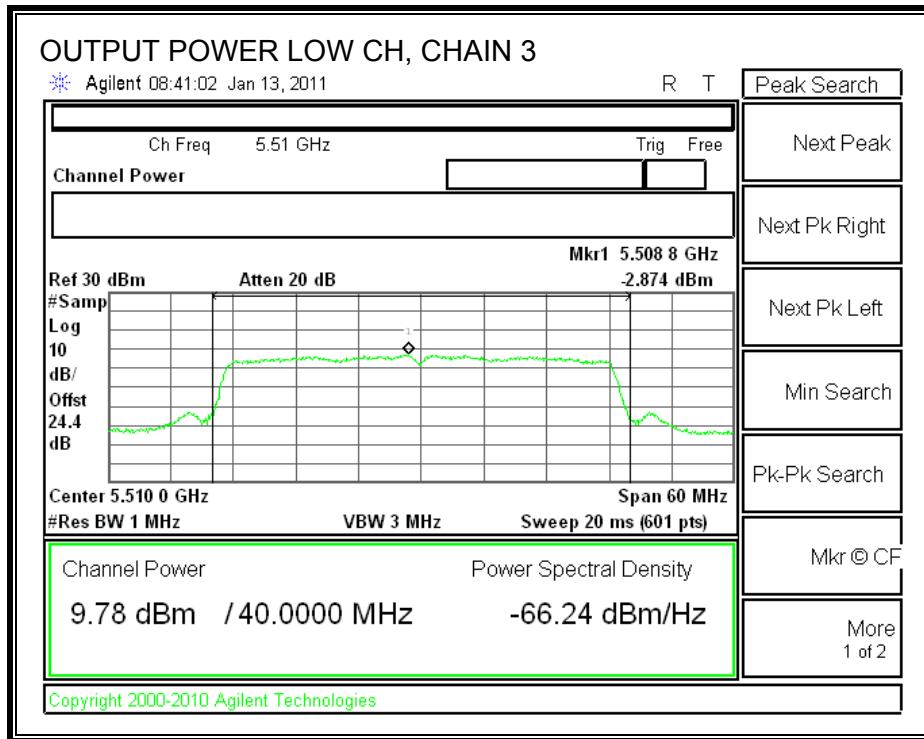

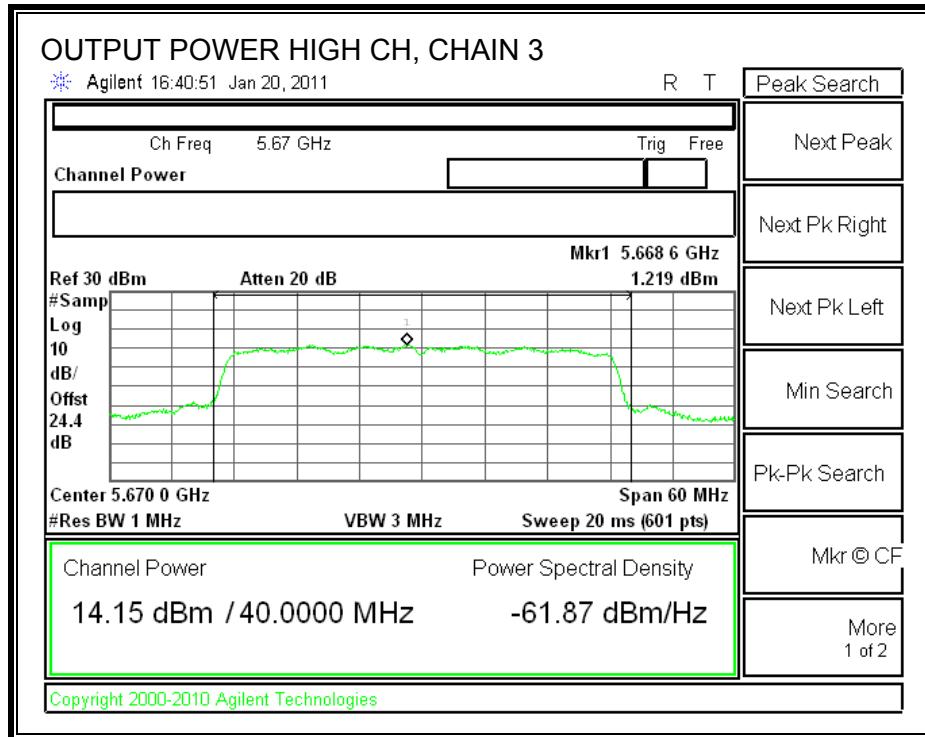

TPC OUTPUT POWER

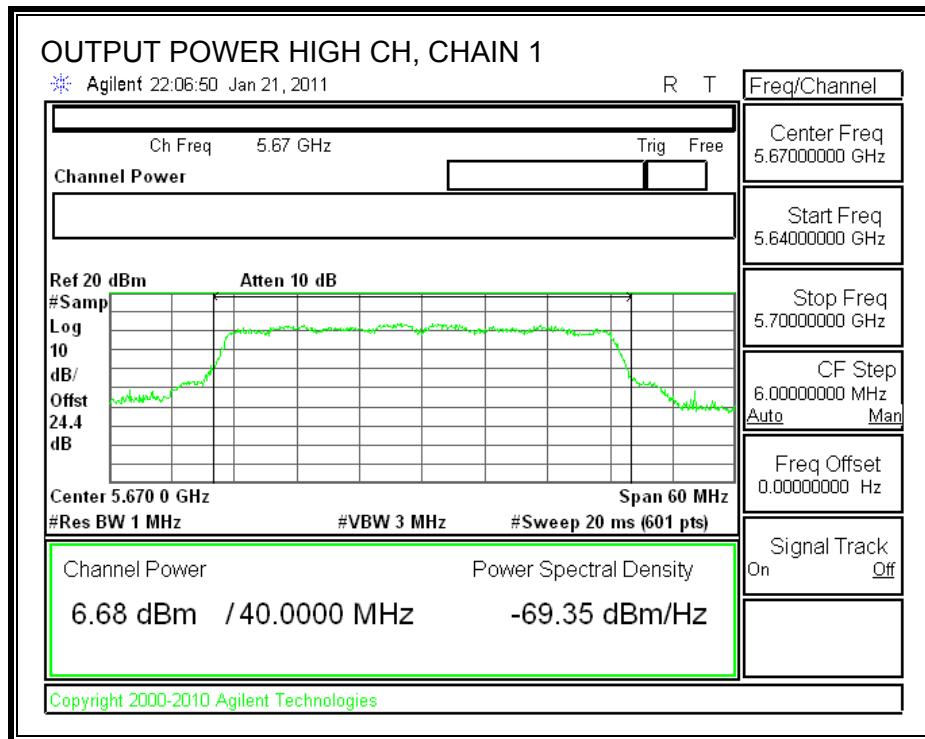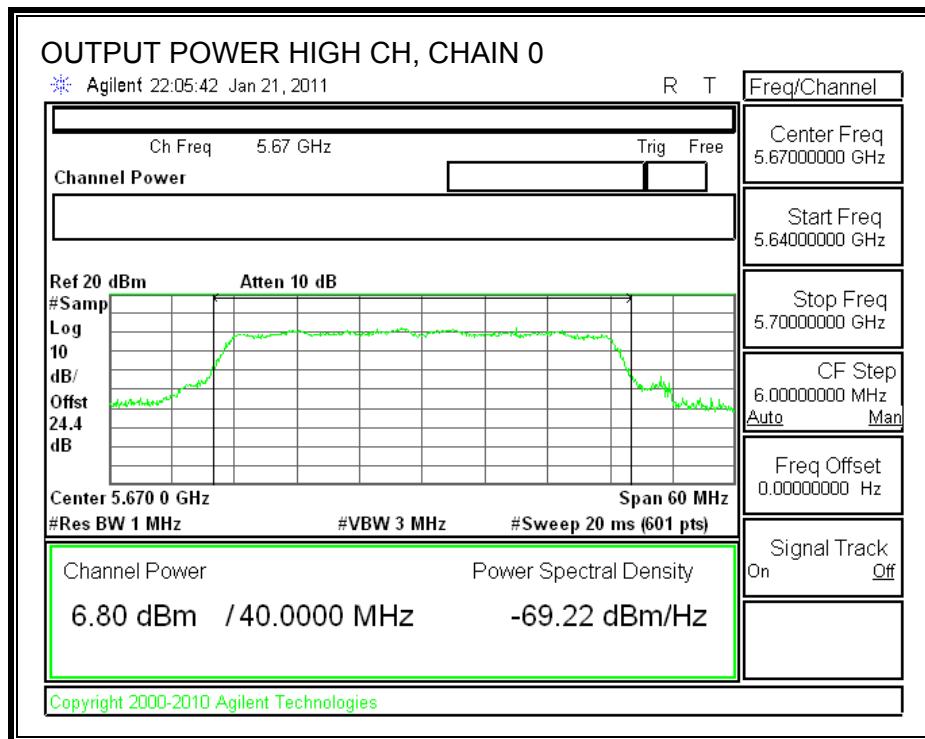

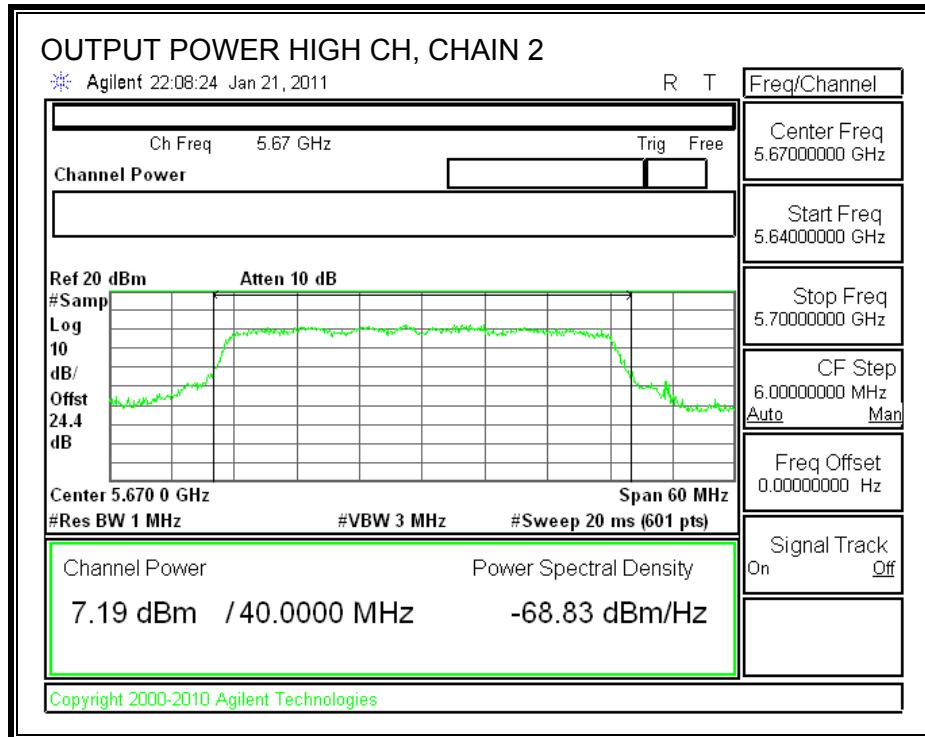

7.13.3. PEAK POWER SPECTRAL DENSITY

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.47-5.725 GHz band, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The composite antenna gain is 11.23 dBi, therefore the limit is 5.77 dBm.



TEST PROCEDURE


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

RESULTS


Channel	Frequency (MHz)	Chain 1 PPSD (dBm)	Chain 2 PPSD (dBm)	Chain 3 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5510	-2.732	-2.746	-2.874	1.988	5.77	-3.78
Middle	5590	0.597	0.802	1.35	5.699	5.77	-0.07
High	5670	0.696	0.827	1.219	5.691	5.77	-0.08



CHAIN 1 POWER SPECTRAL DENSITY

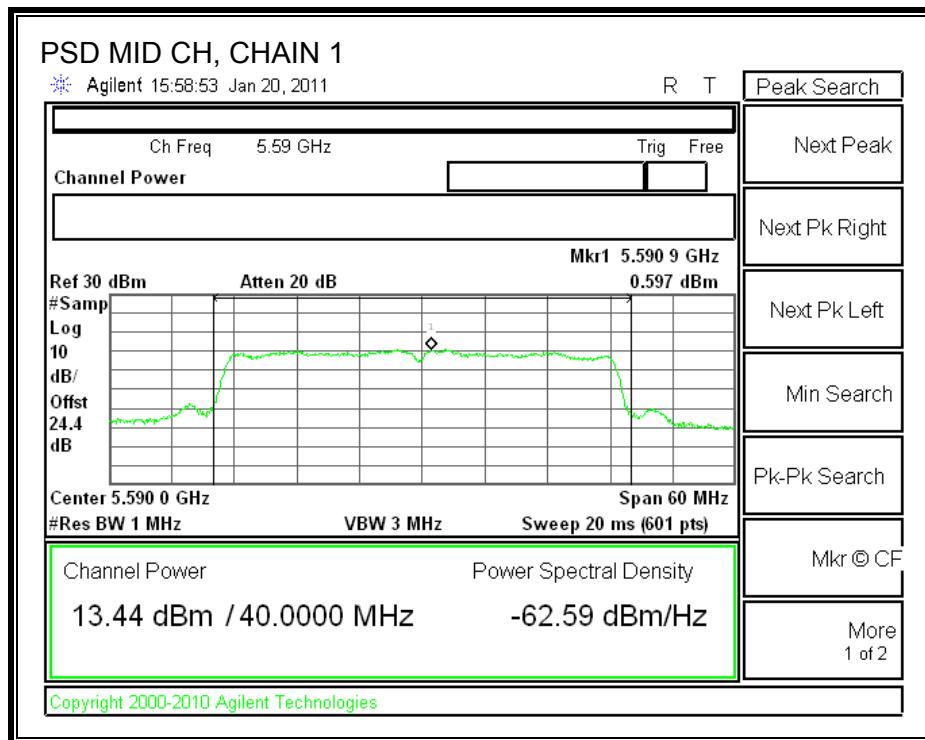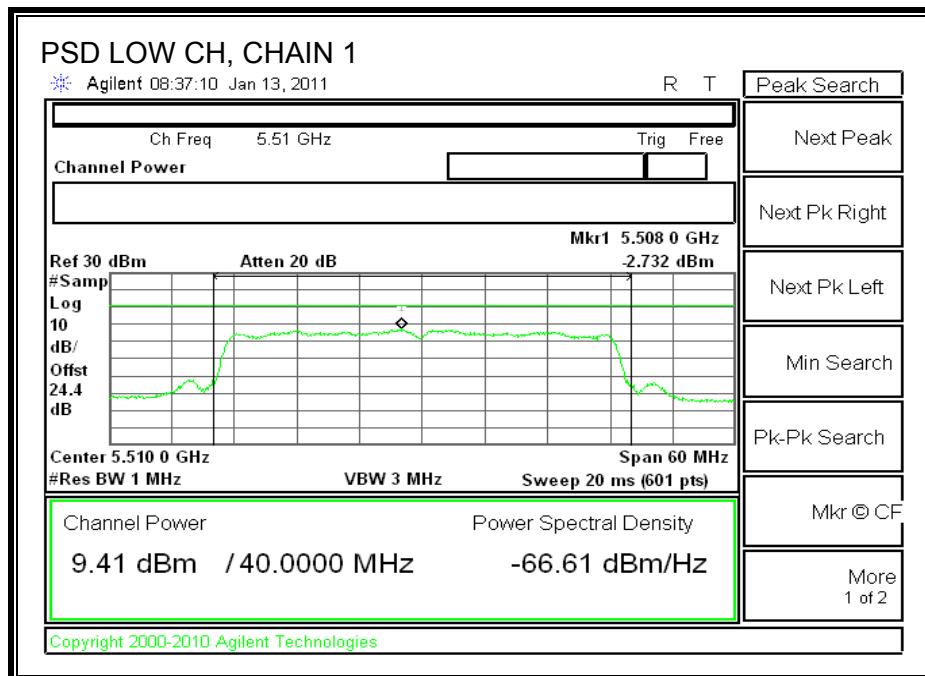


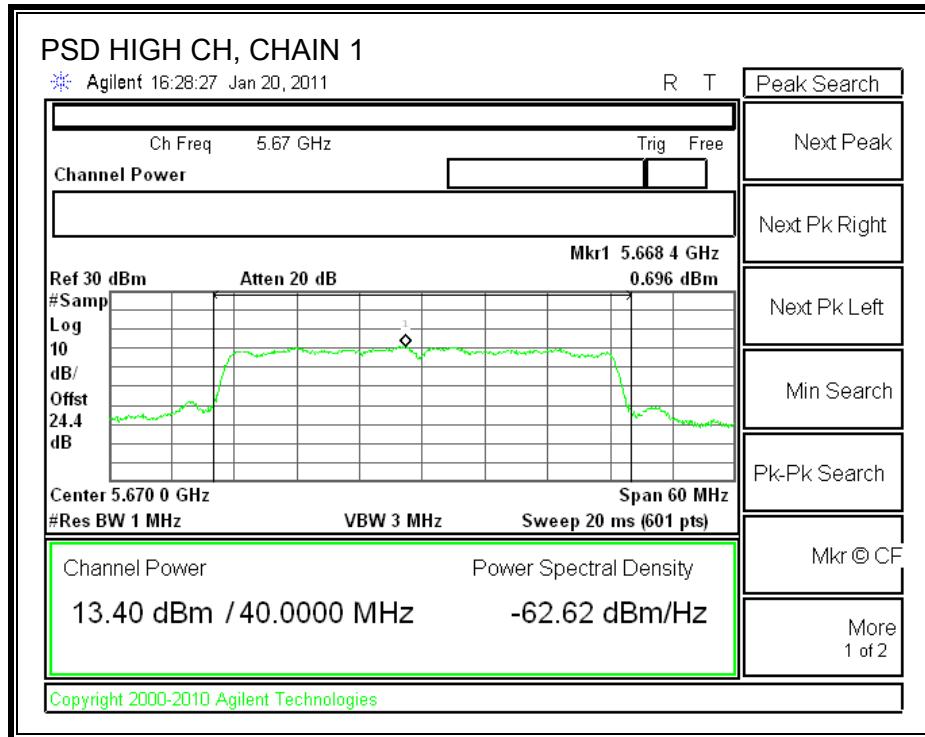



CHAIN 2 POWER SPECTRAL DENSITY

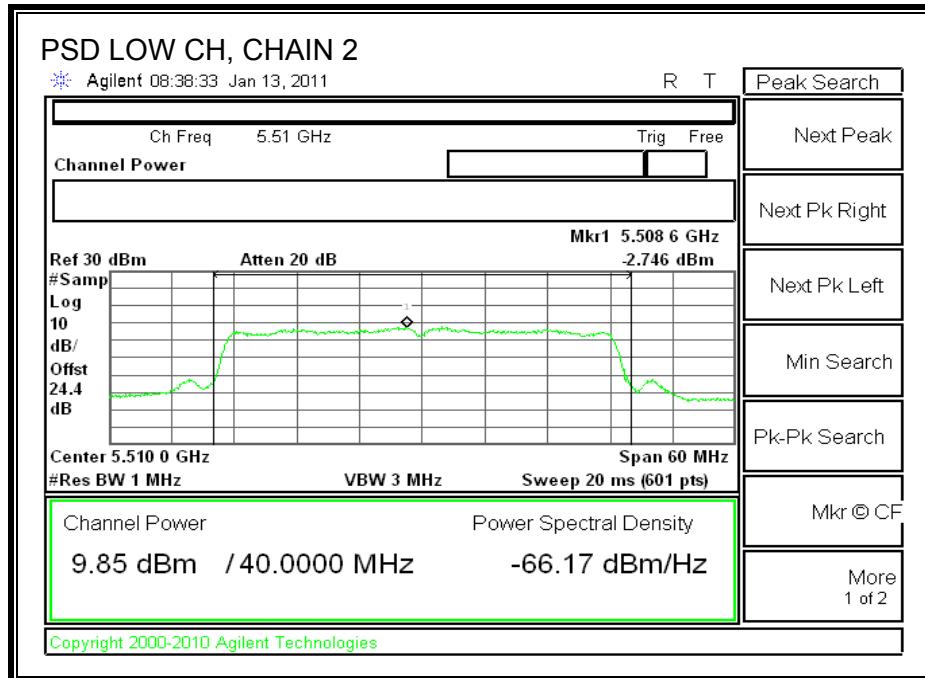

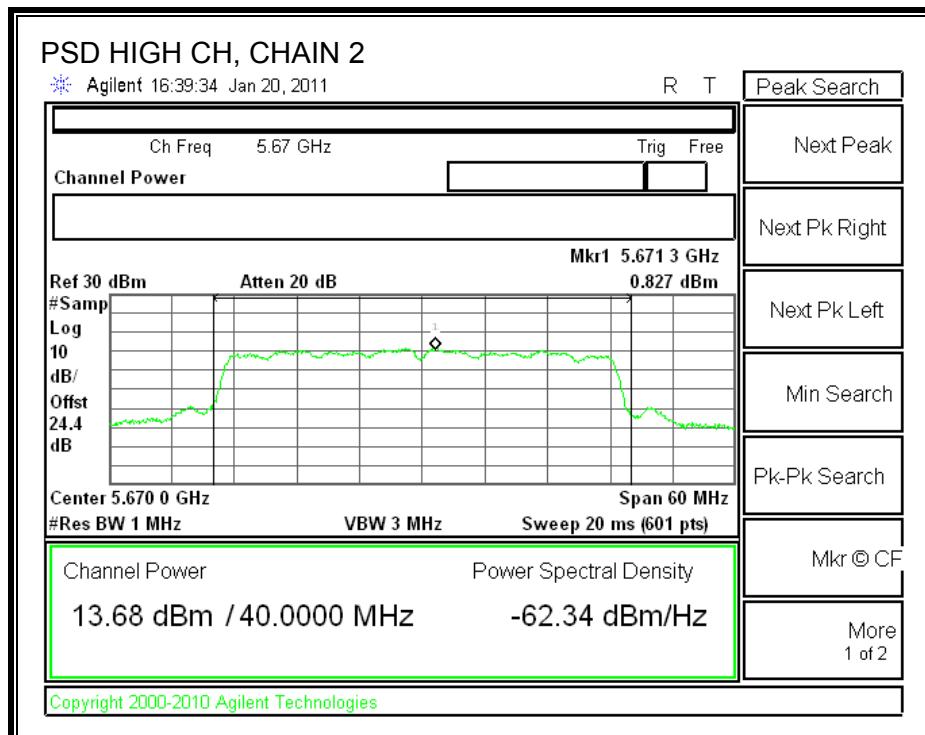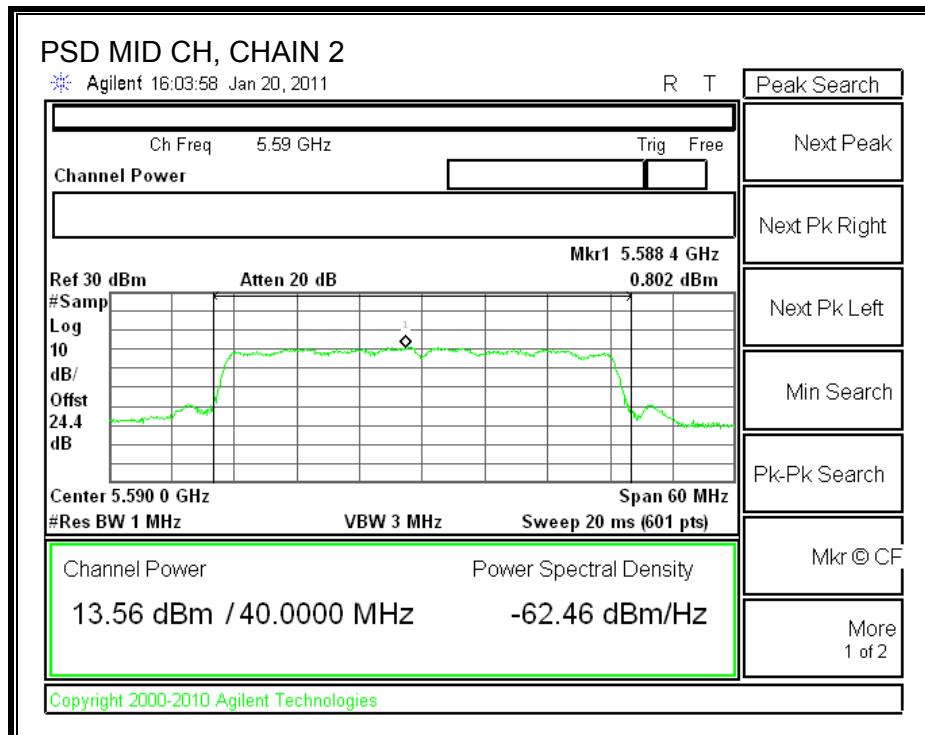

CHAIN 3 POWER SPECTRAL DENSITY

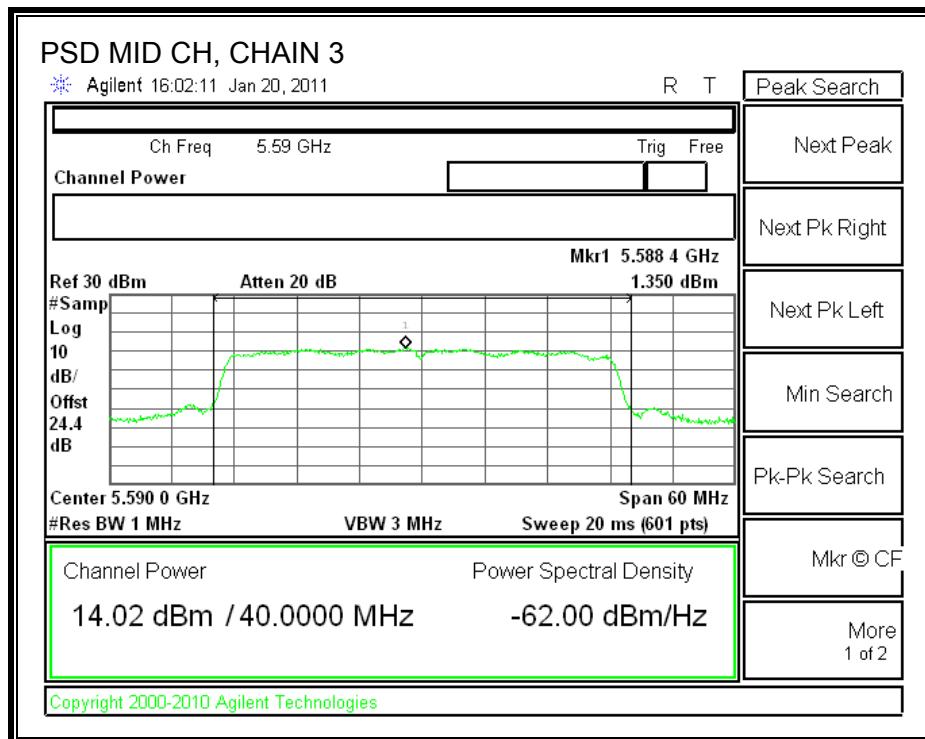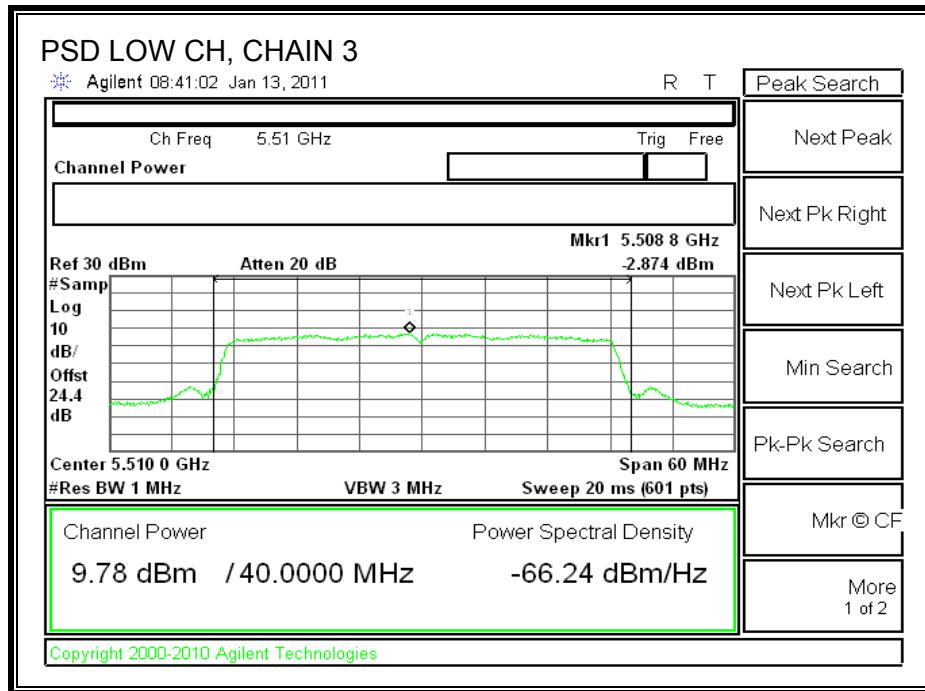

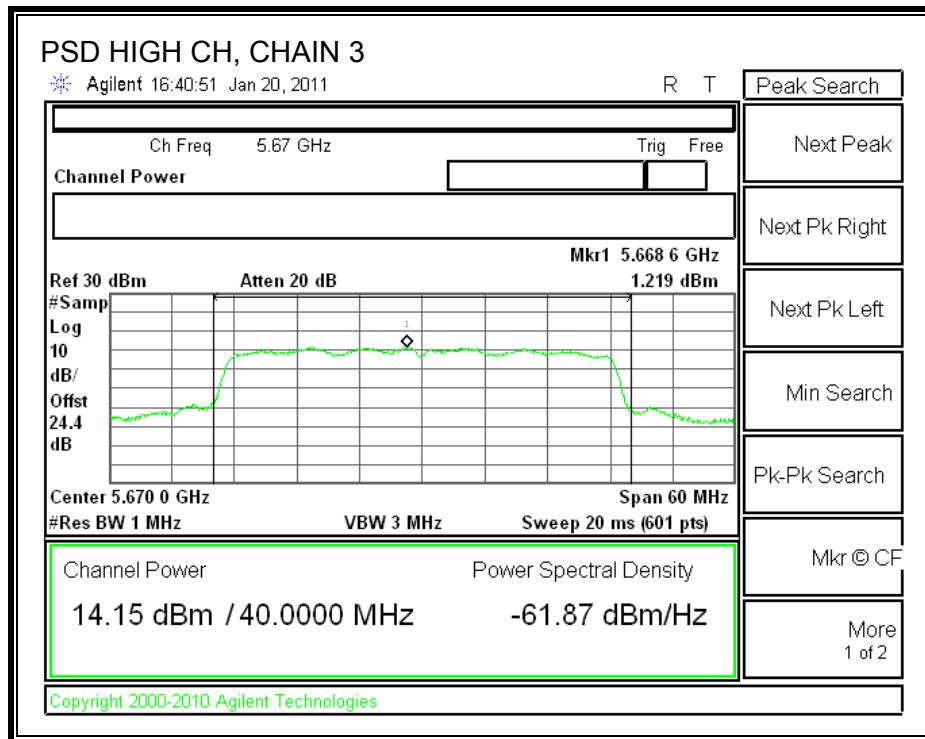

7.13.4. PEAK EXCURSION

LIMITS

FCC §15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

TEST PROCEDURE

The transmitter outputs are connected to the spectrum analyzer via a combiner.



The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.


Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5510	10.16	13	-2.84
Middle	5550	8.97	13	-4.03
High	5670	9.54	13	-3.46

PEAK EXCURSION

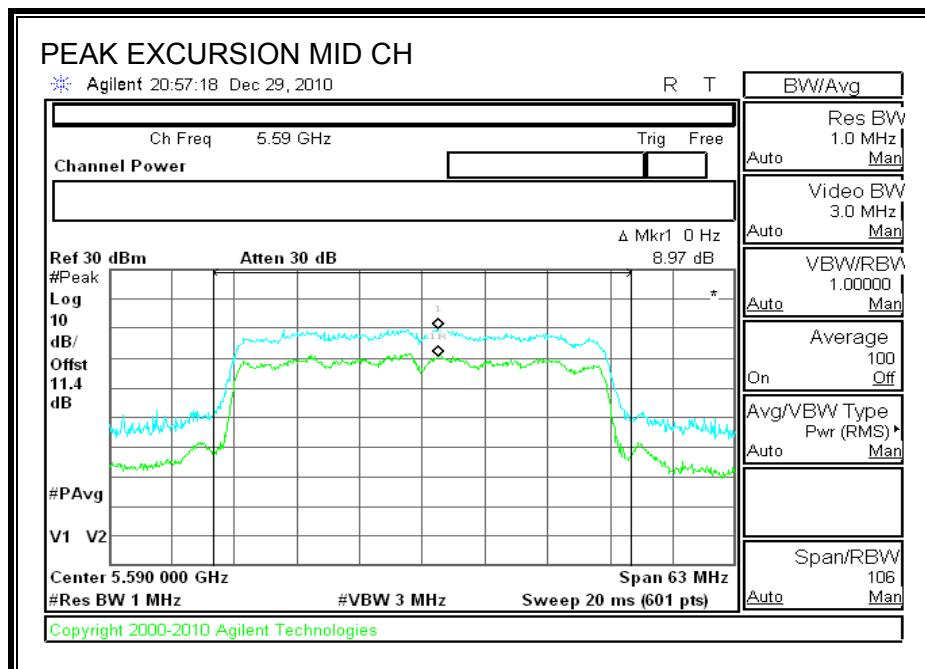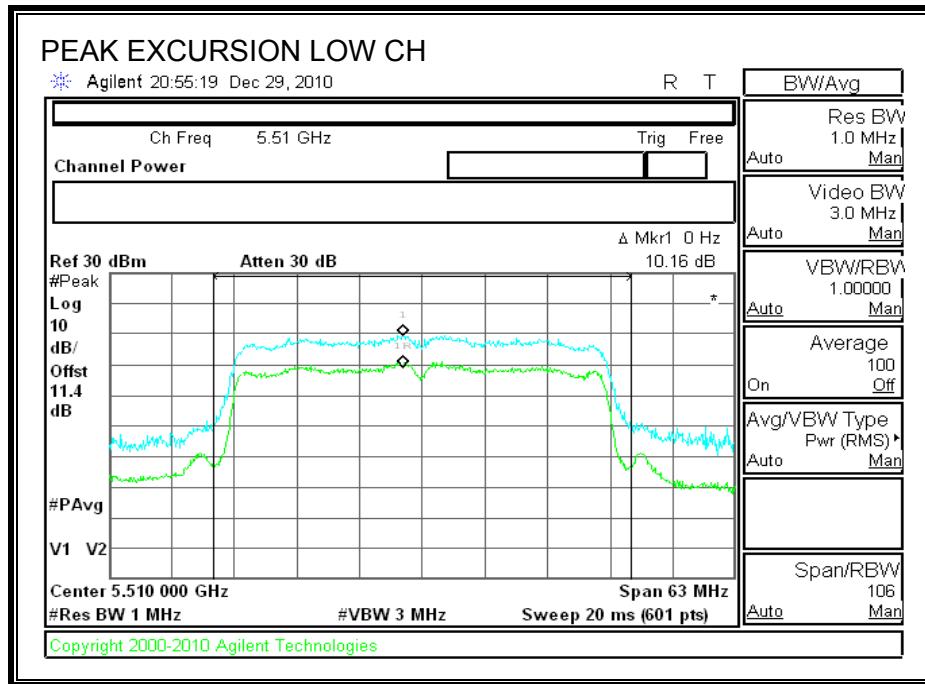

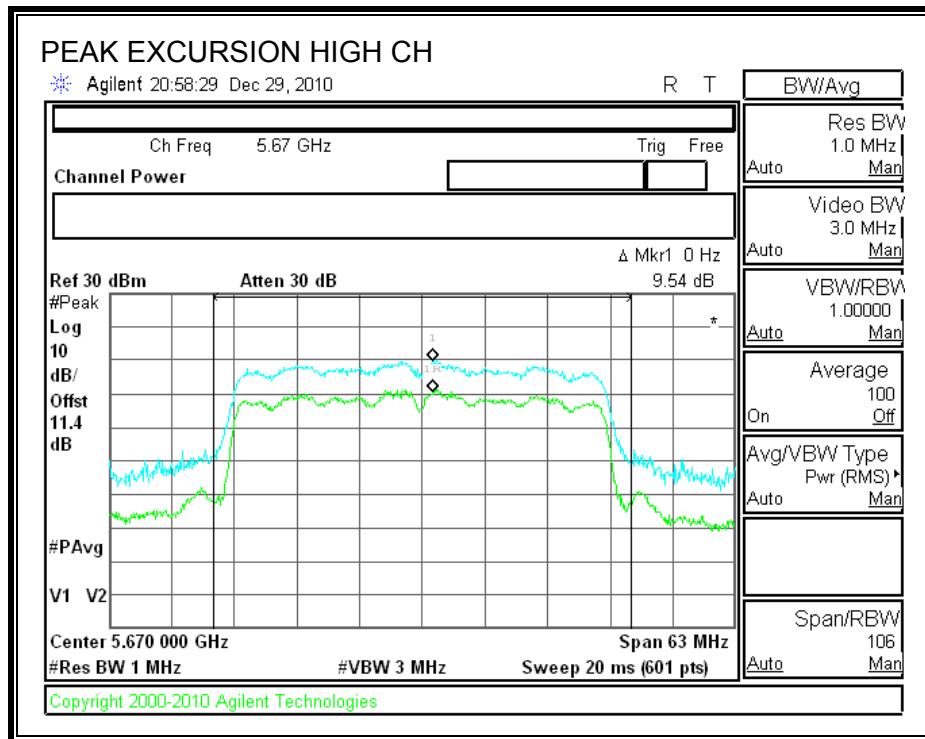

7.13.5. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.407 (b) (3)

IC RSS-210 A9.3 (3)

For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm / MHz.

TEST PROCEDURE



Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to EIRP limit, adjusted for the maximum antenna gain.


Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

RESULTS

SPURIOUS EMISSIONS WITH COMBINER

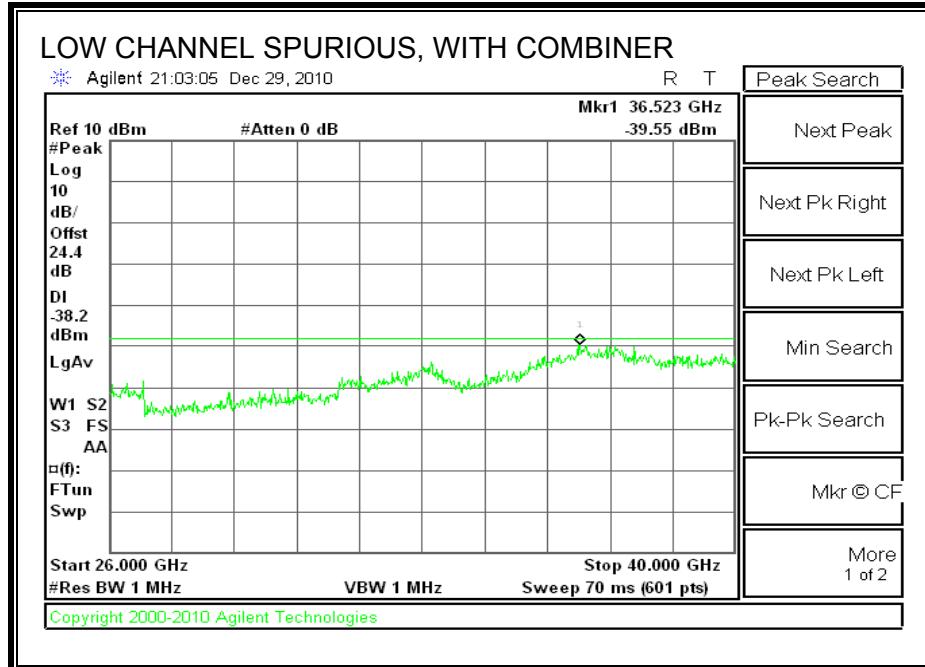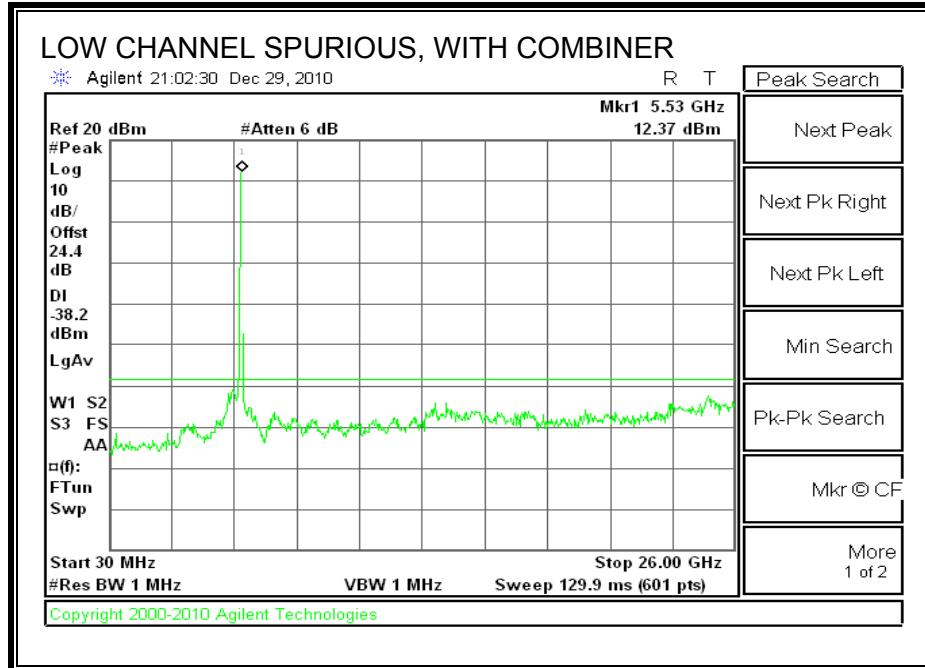


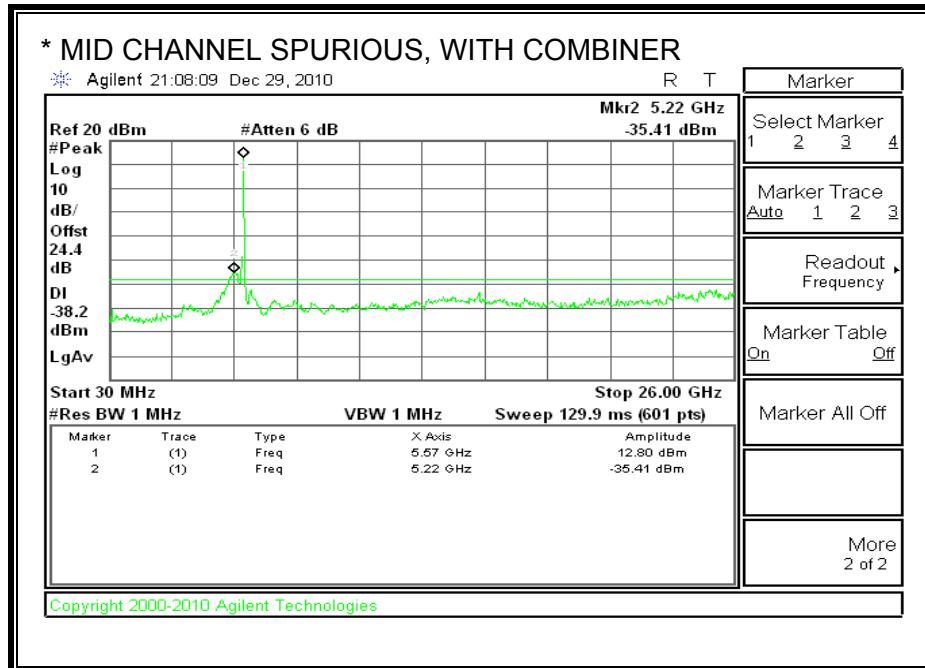


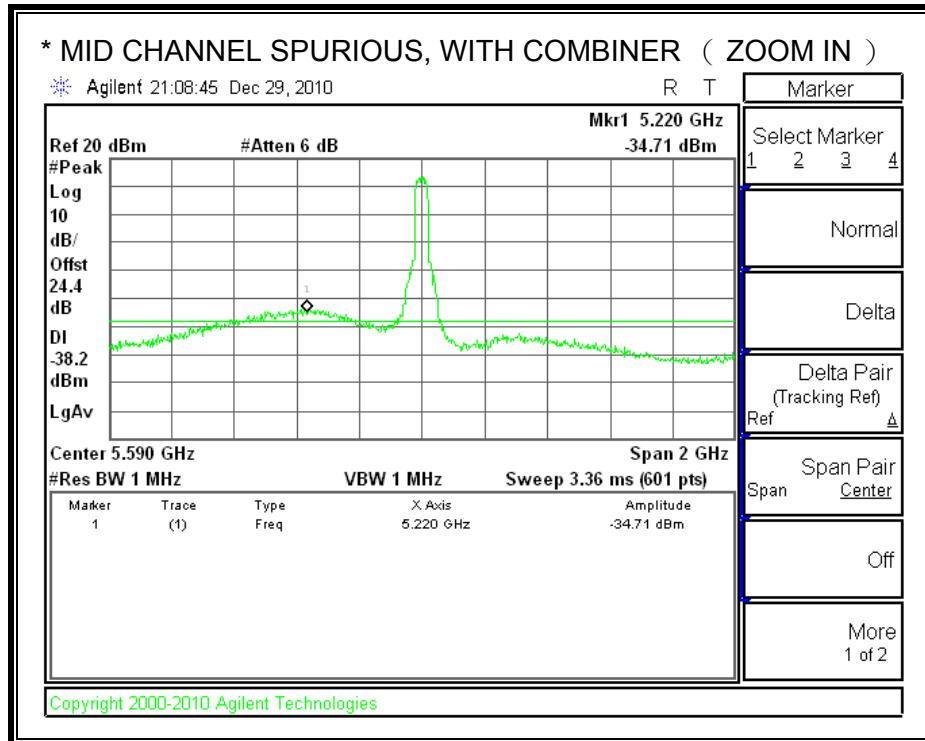


* Passed with EIRP Radiated Substitution

f MHz	SG reading (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Ant. Pol. (H/V)
5431	-38.0	1.2	11.0	-28.2	-27.0	-1.2	V
5431	-46.0	1.2	11.0	-35.0	-27.0	-8.0	H

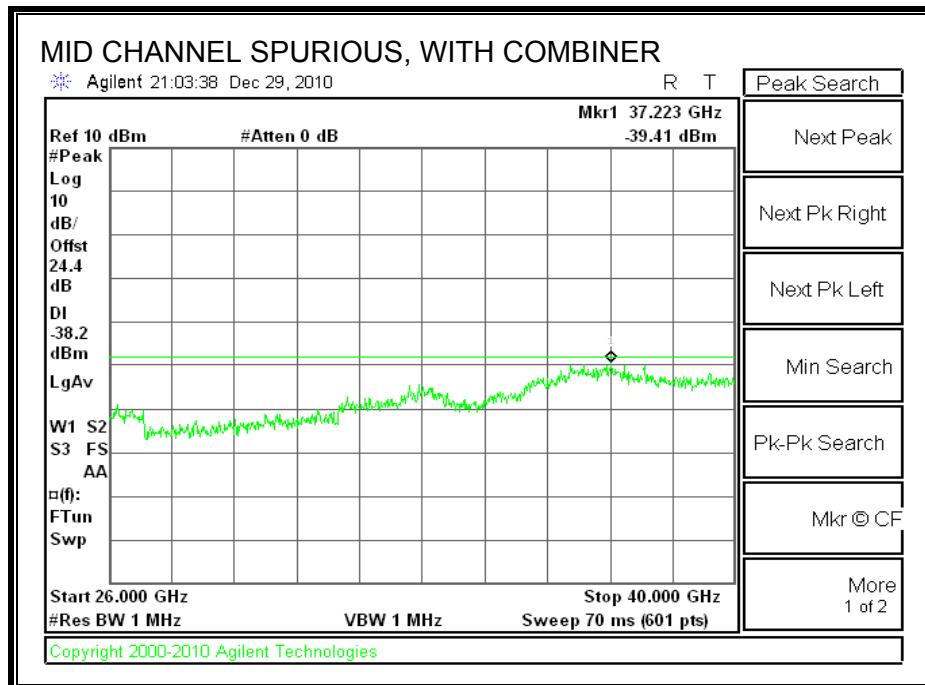


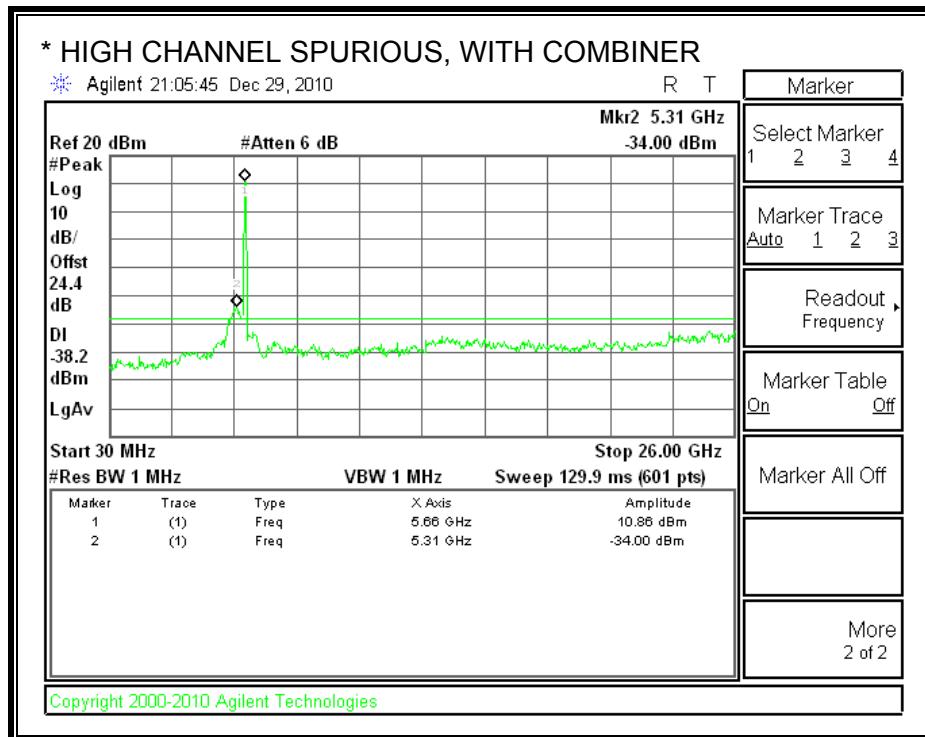

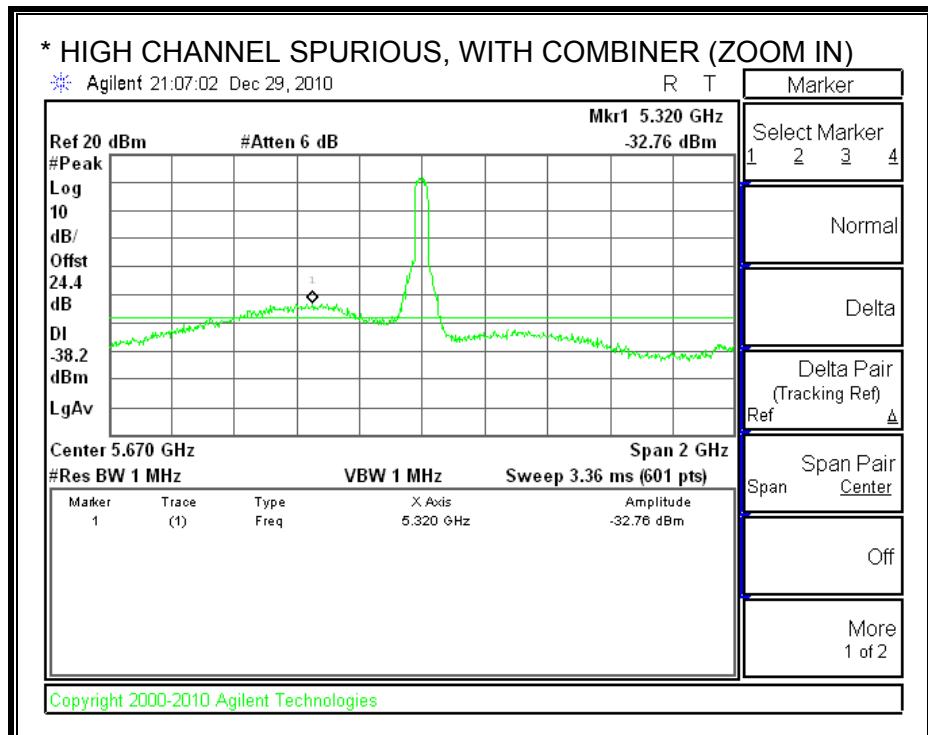

* Passed with EIRP Radiated Substitution

f MHz	SG reading (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Ant. Pol. (H/V)
5431	-38.0	1.2	11.0	-28.2	-27.0	-1.2	V
5431	-46.0	1.2	11.0	-35.0	-27.0	-8.0	H

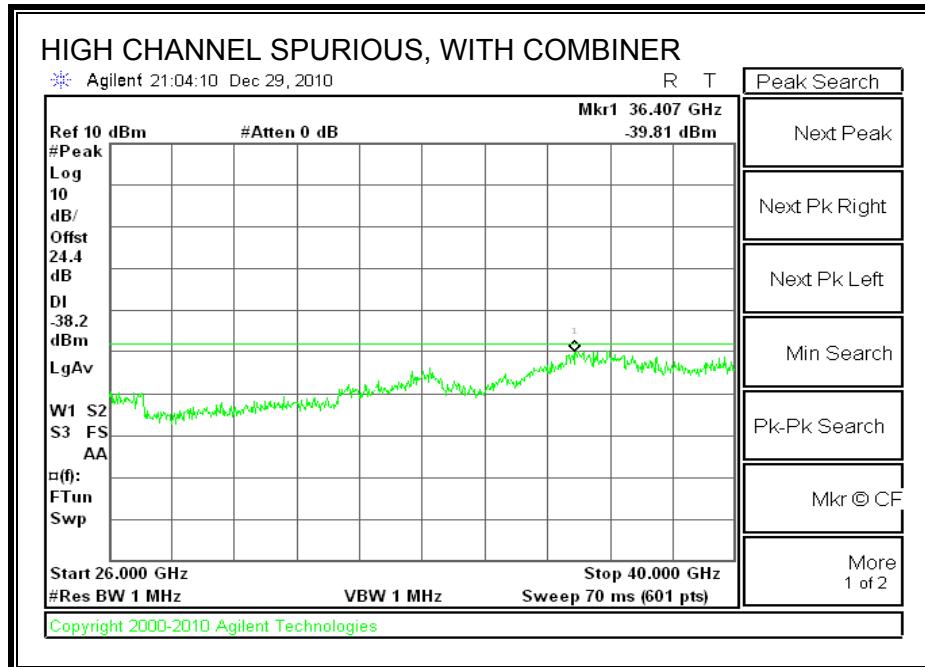

SDM MCS21

7.13.6. 26 dB and 99% BANDWIDTH

LIMITS

None; for reporting purposes only.


TEST PROCEDURE

The transmitter outputs are connected to the spectrum analyzer via a combiner. The RBW is set to 1% to 3% of the measured bandwidth. The VBW is set to 3 times the RBW. The sweep time is coupled. The spectrum analyzer internal bandwidth function is utilized.

RESULTS

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low	5510	37.893	35.4828
Middle	5590	64.737	36.8529
High	5670	68.178	36.7565

26 dB and 99% BANDWIDTH

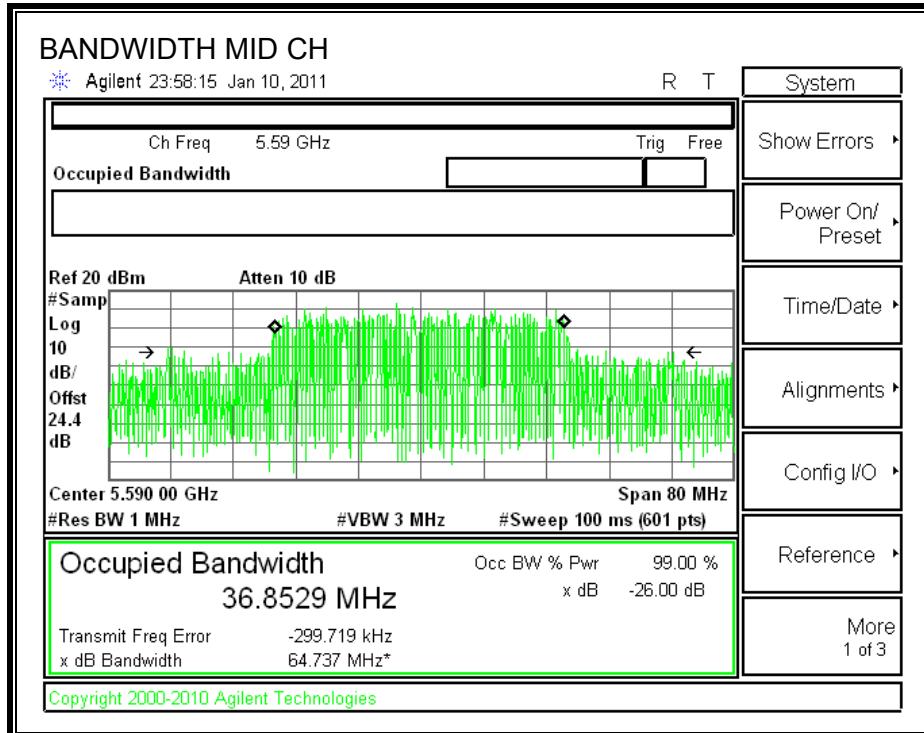



7.13.7. OUTPUT POWER

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.47-5.725 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26-dB emission bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

TEST PROCEDURE

The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.

The transmitter output operates continuously therefore Method # 1 is used.

RESULTS

Limit

Channel	Frequency (MHz)	Fixed Limit (dBm)	B (MHz)	11 + 10 Log B Limit (dBm)	Antenna Gain (dBi)	Limit (dBm)
Low	5510	23.98	37.893	26.79	7.06	22.92
Mid	5590	23.98	64.737	29.11	7.06	22.92
High	5670	23.98	68.178	29.34	7.06	22.92



Individual Chain Results


Channel	Frequency (MHz)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Chain 3 Power (dBm)	Total Power (dBm)	Limit (dBm)	Margin (dB)
Low	5510	10.40	11.00	10.58	15.44	22.92	-7.48
Mid	5590	18.19	18.08	18.09	22.89	22.92	-0.03
High	5670	17.01	18.44	18.31	22.74	22.92	-0.18

TPC Results


TPC Delta Power		Chain 0	Chain 1	Chain 2			
		5.38	7.00	5.78			
Worst-case TPC Power		Chain 0	Chain 1	Chain 2	Total Power	Ant Gain	EIRP
		Mid	5590	12.81	11.08	12.31	16.90
TPC Limit (dBm)						24	
Margin (dB)						-0.04	



CHAIN 1 OUTPUT POWER

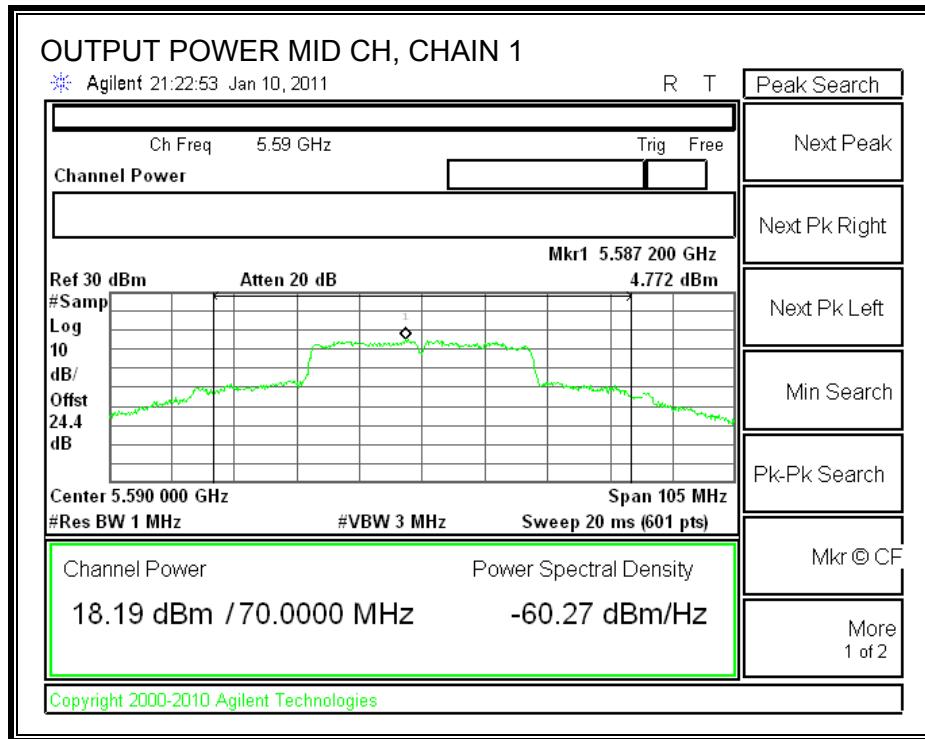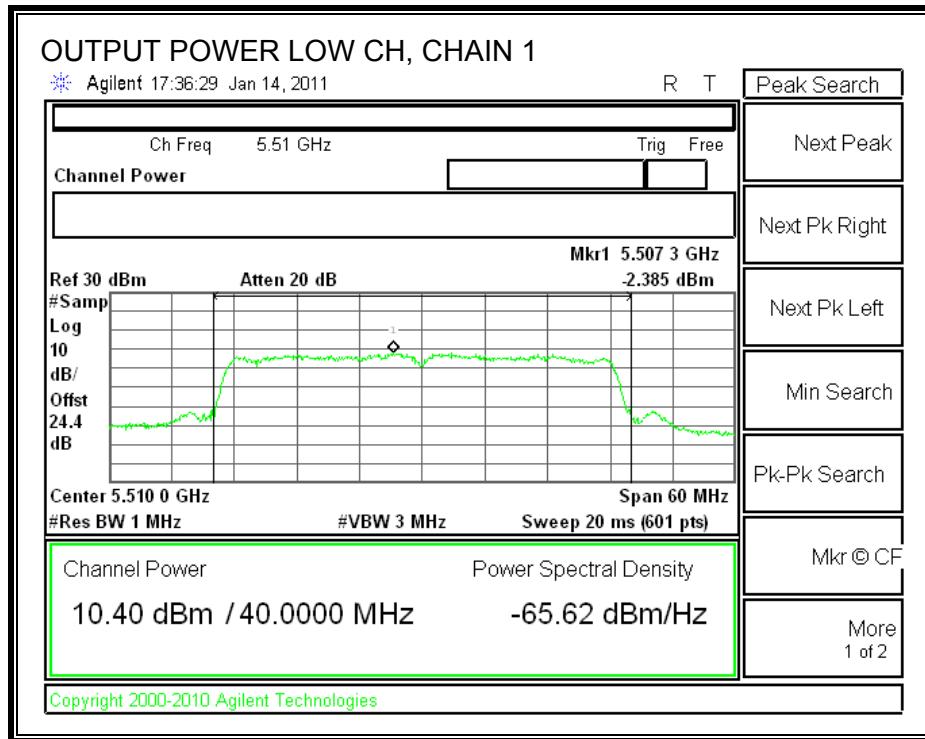


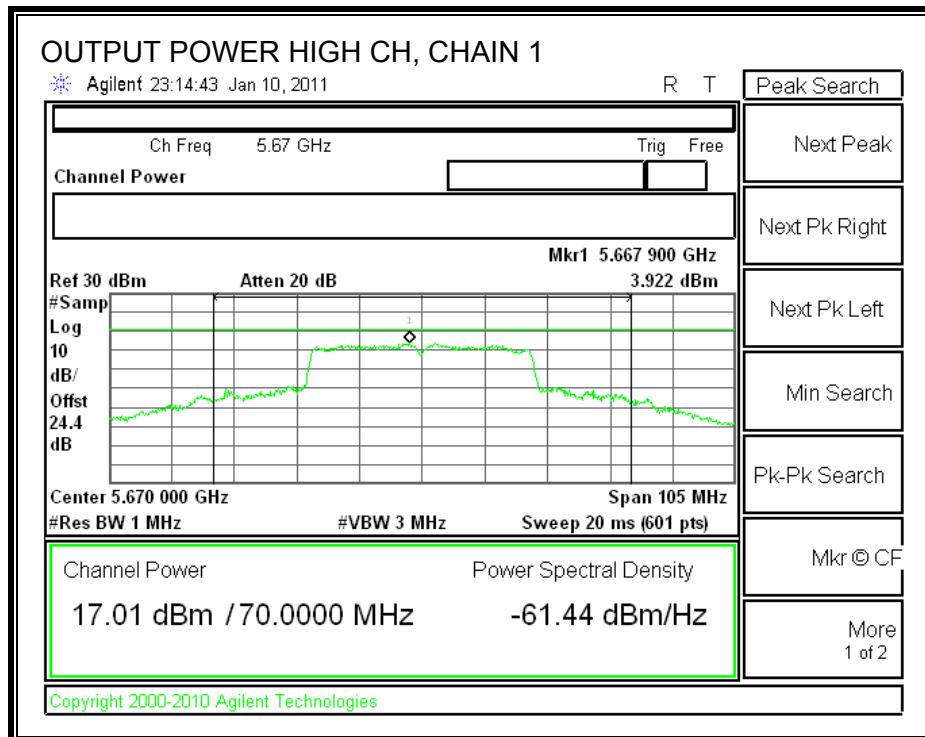



CHAIN 2 OUTPUT POWER

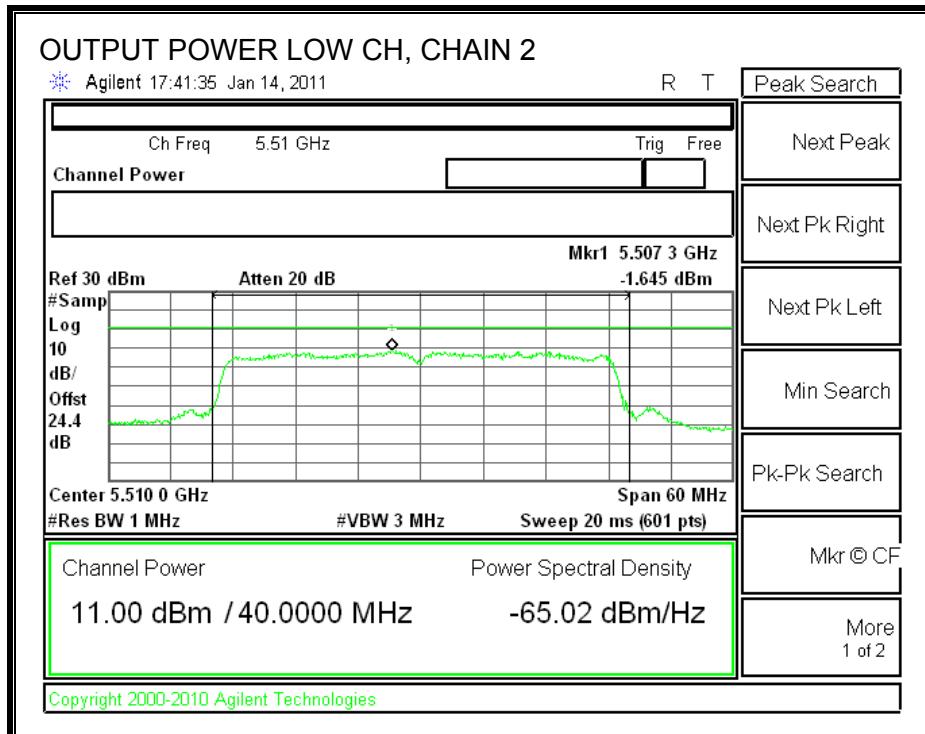

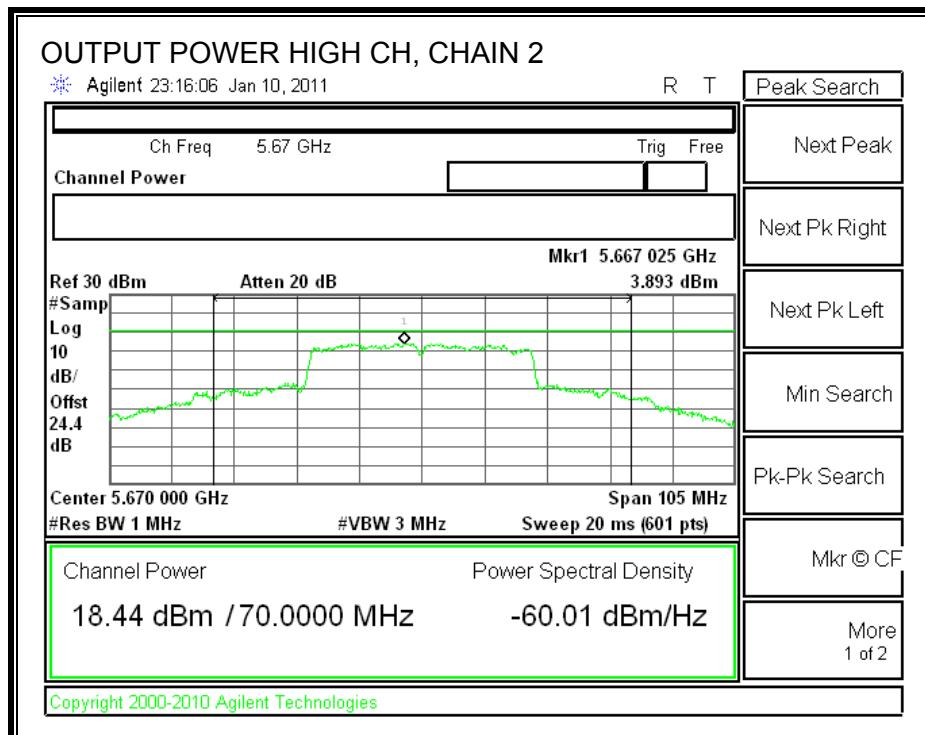
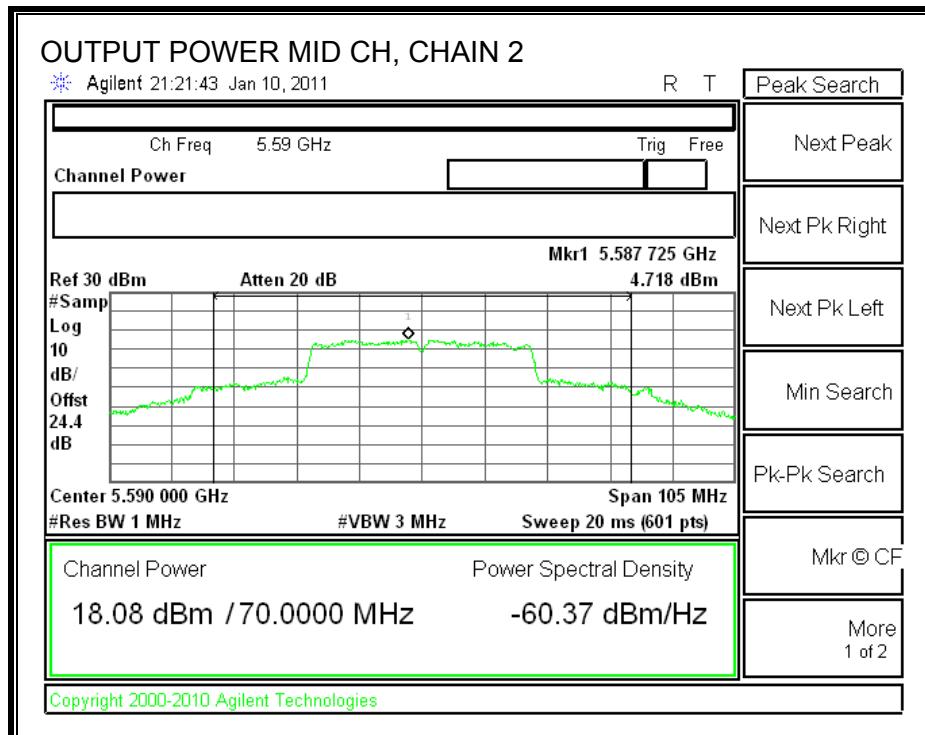



CHAIN 3 OUTPUT POWER

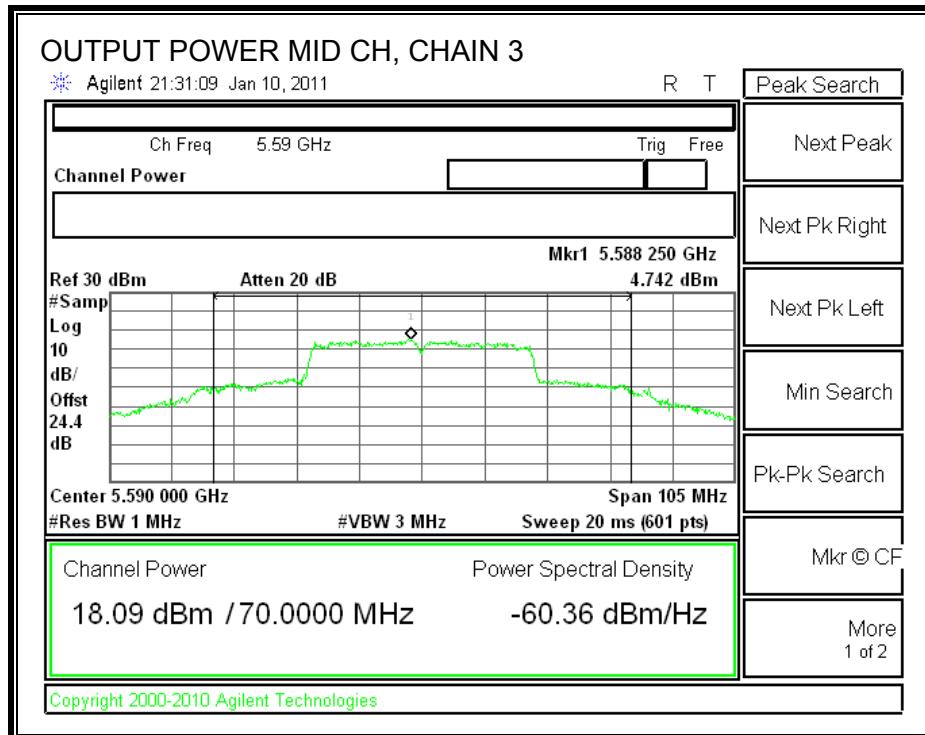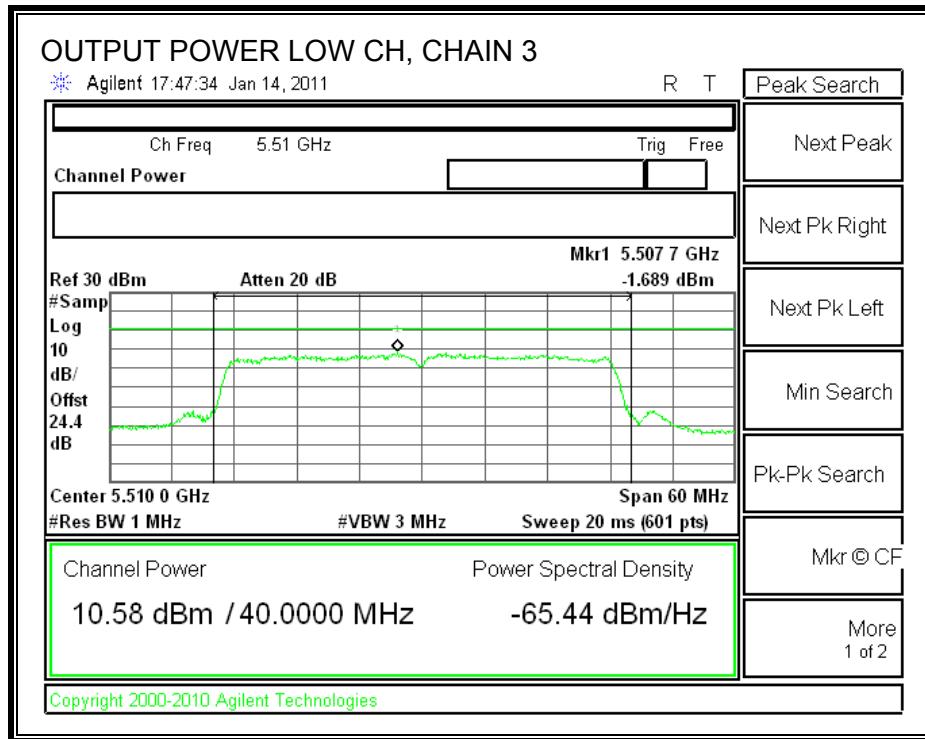

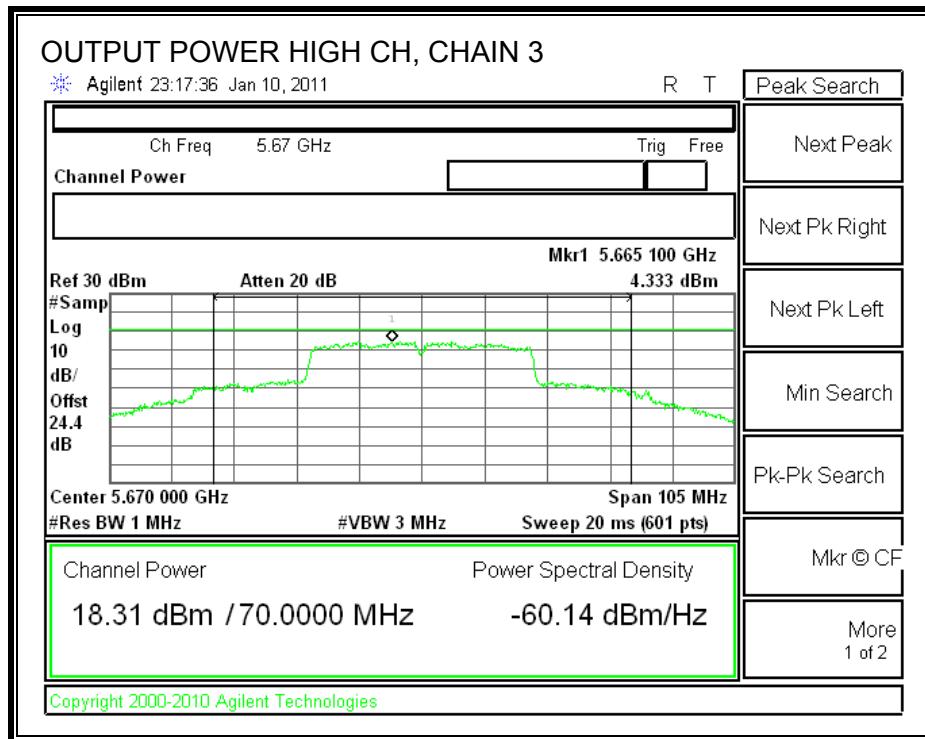

TPC OUTPUT POWER

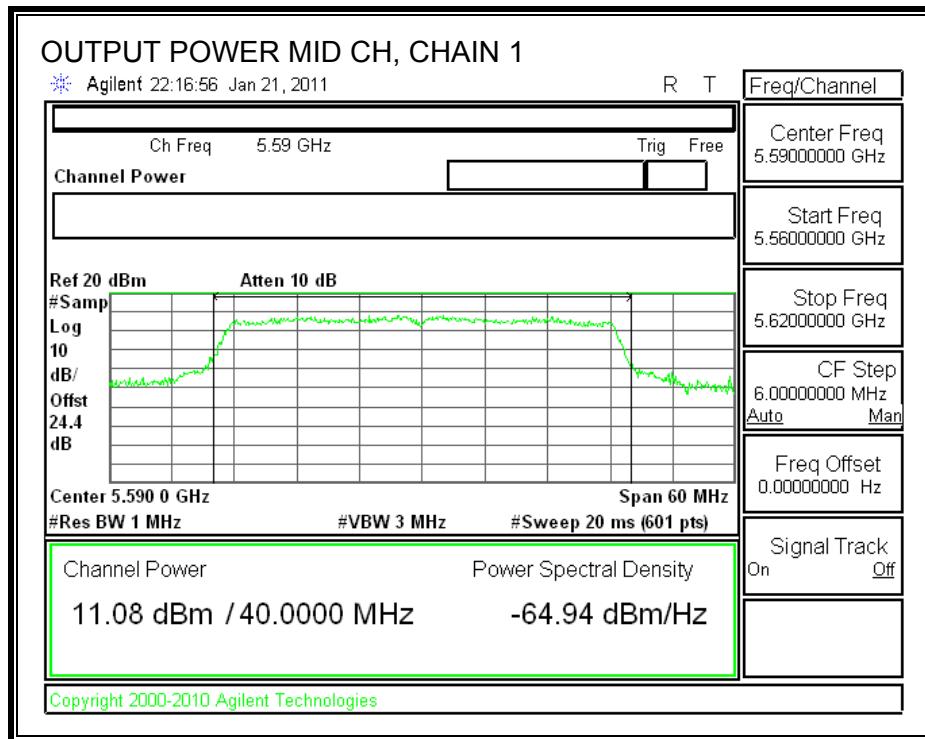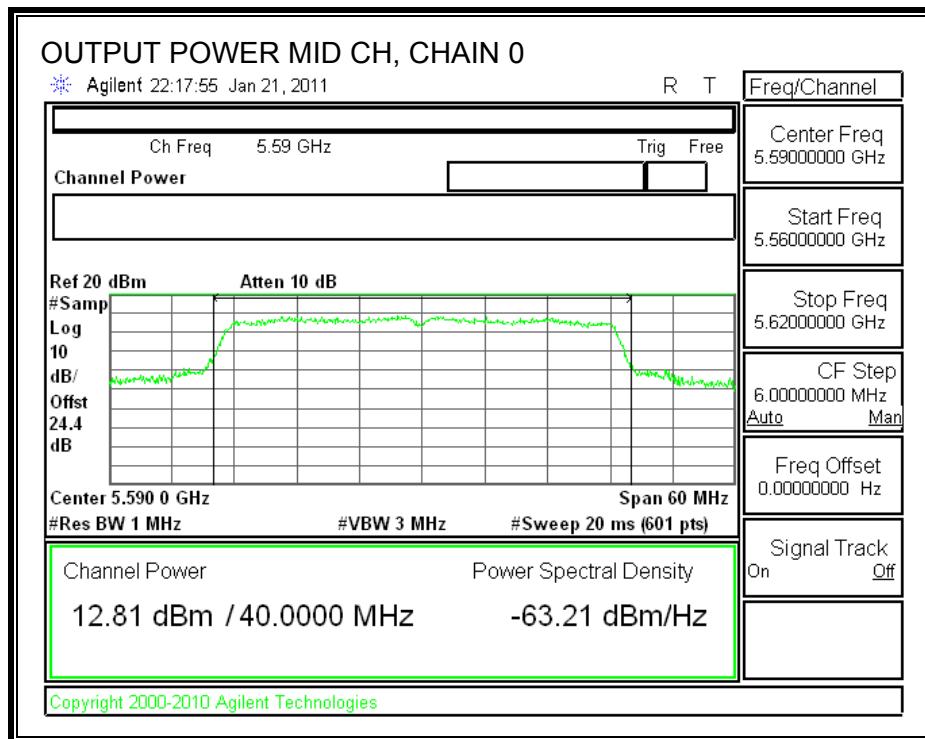

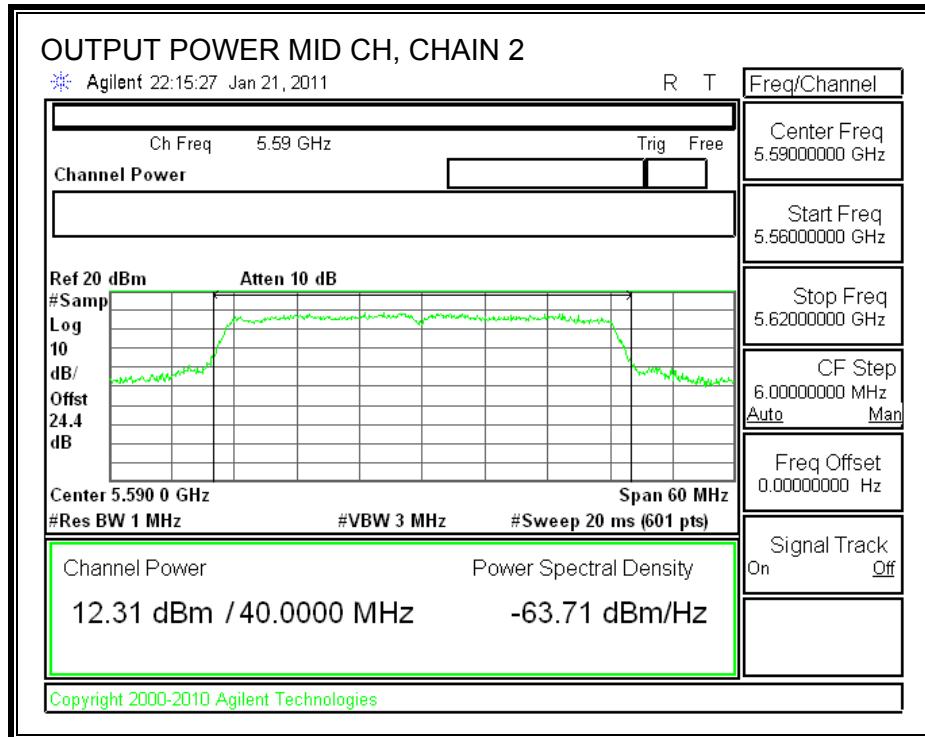

7.13.8. PEAK POWER SPECTRAL DENSITY

LIMITS

FCC §15.407 (a) (2)

IC RSS-210 A9.2 (2)

For the 5.47-5.725 GHz band, the peak power spectral density shall not exceed 11 dBm in any 1 MHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum antenna gain is 7.06 dBi, therefore the limit is 9.94 dBm.



TEST PROCEDURE


The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002. PPSD method #2 was used.

RESULTS


Channel	Frequency (MHz)	Chain 1 PPSD (dBm)	Chain 2 PPSD (dBm)	Chain 3 PPSD (dBm)	Total PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	5510	-2.385	-1.645	-1.689	2.88	10	-7.06
Middle	5590	4.772	4.718	4.742	9.52	10	-0.42
High	5670	3.922	3.893	4.333	8.83	10	-1.11



CHAIN 1 POWER SPECTRAL DENSITY

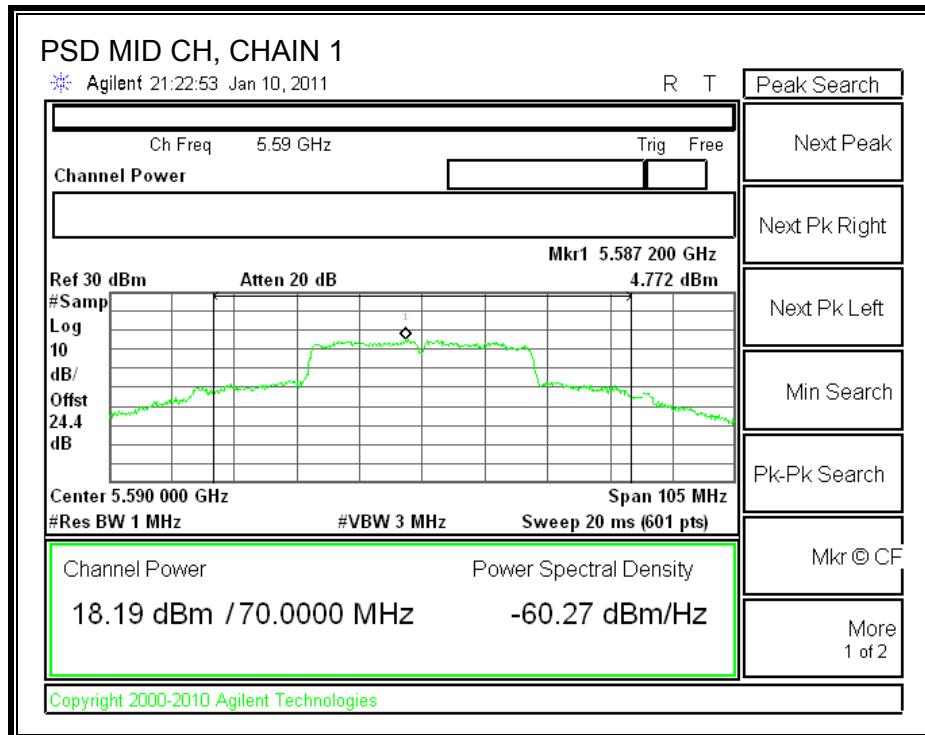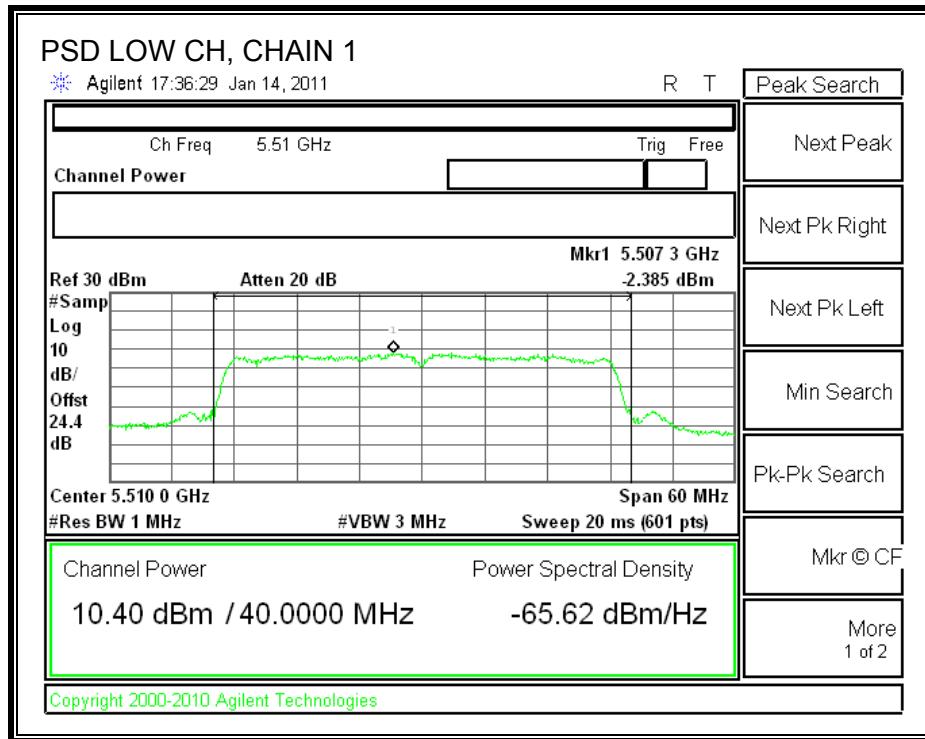


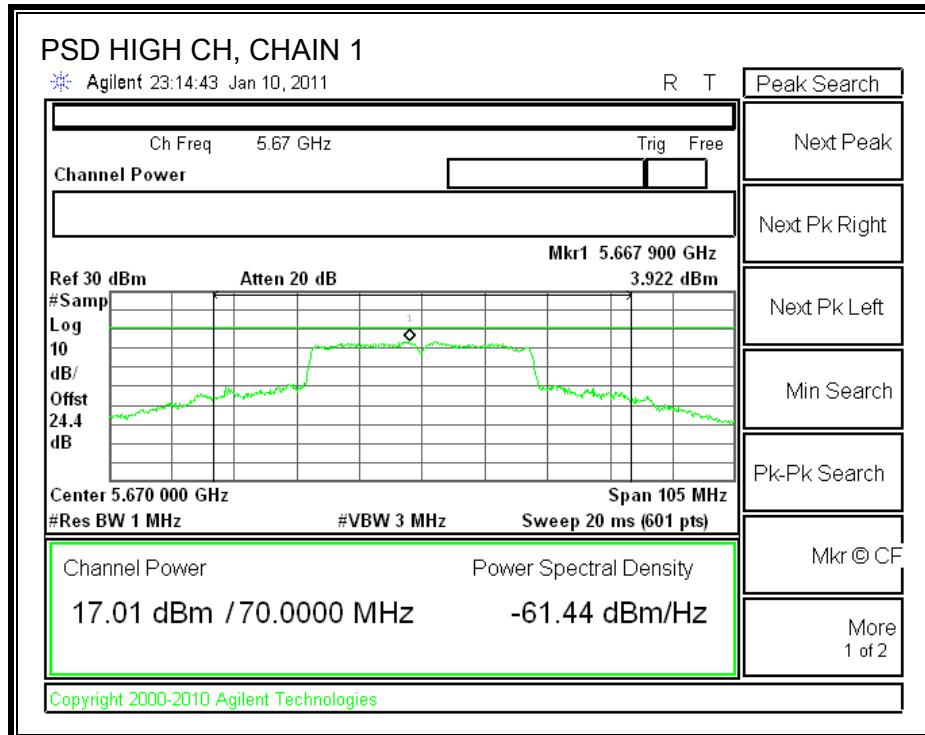



CHAIN 2 POWER SPECTRAL DENSITY

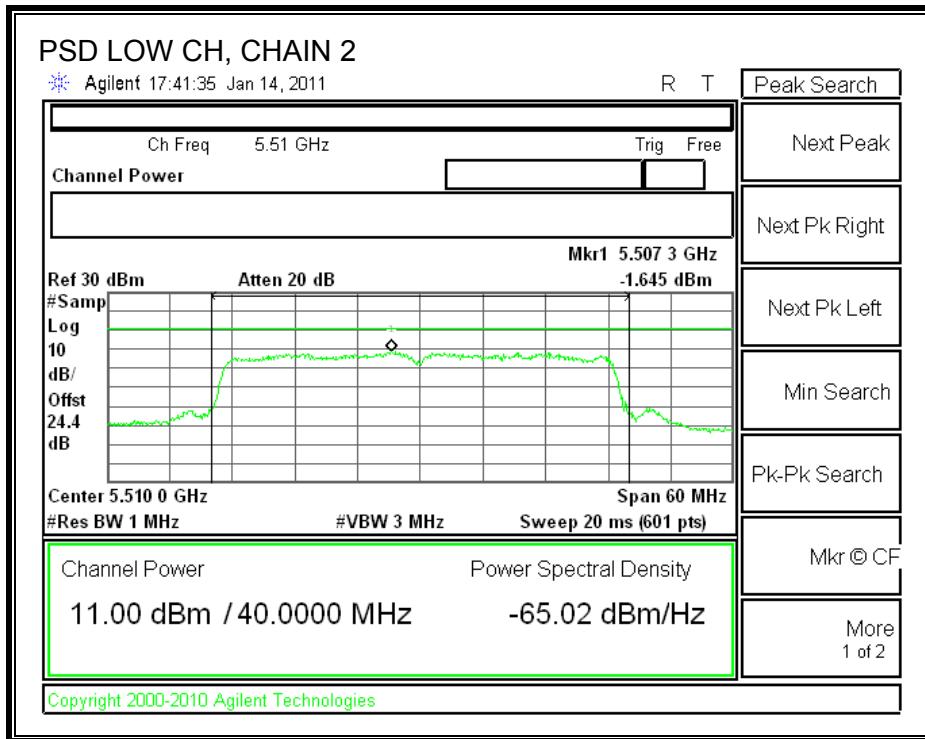

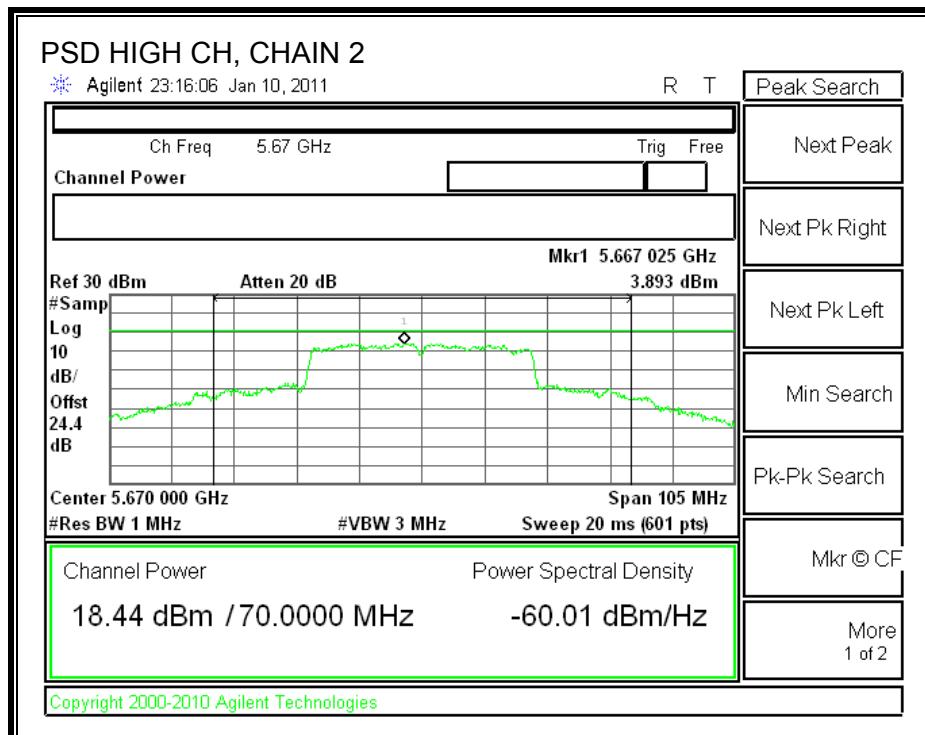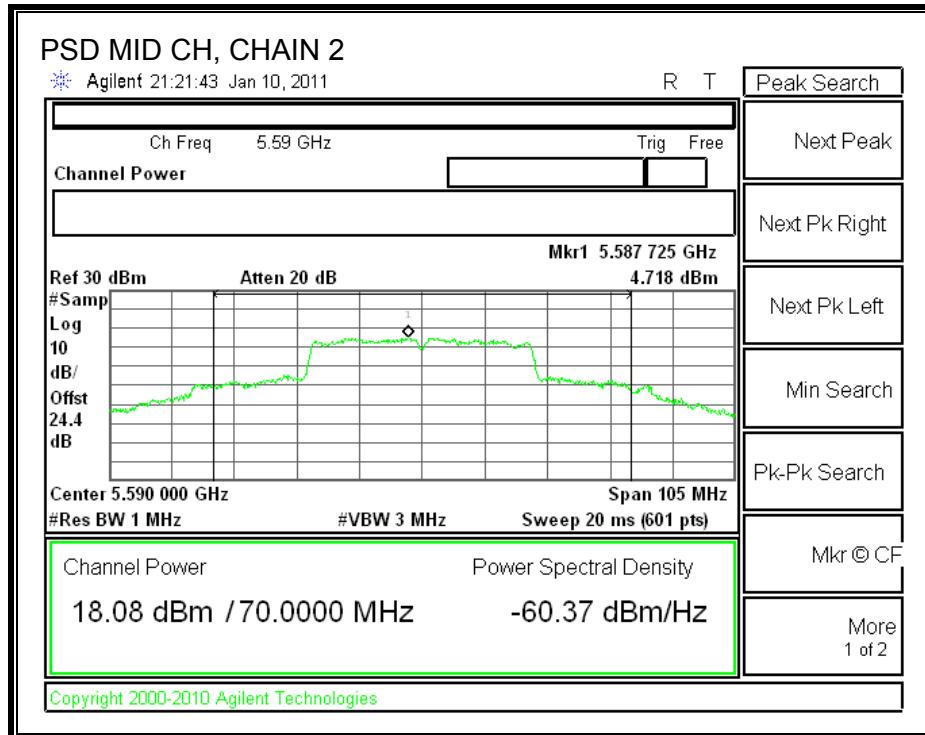

CHAIN 3 POWER SPECTRAL DENSITY

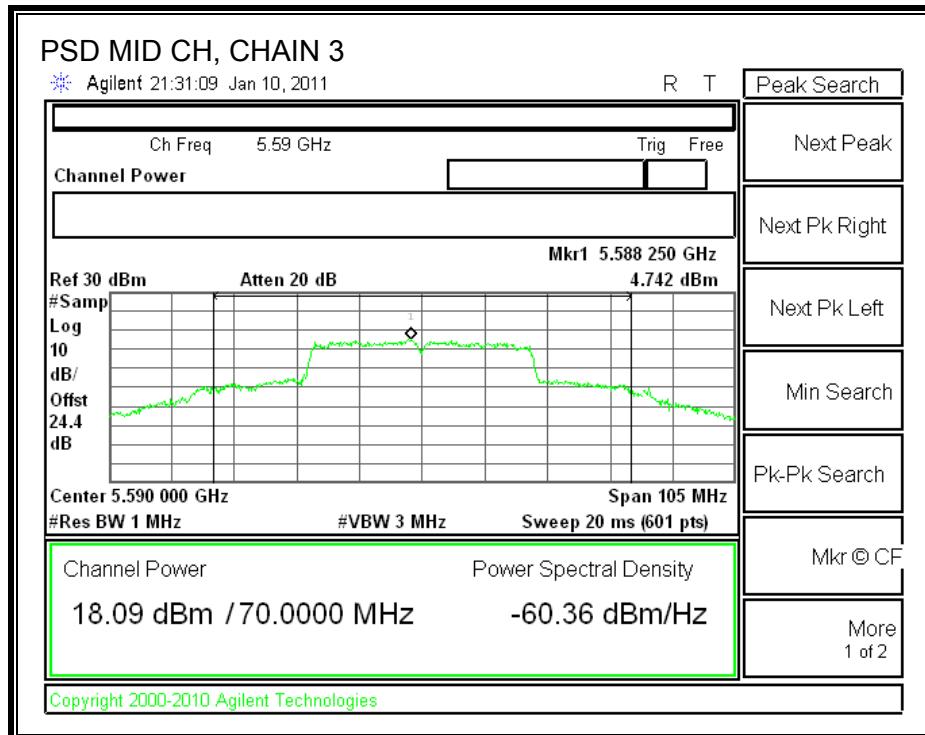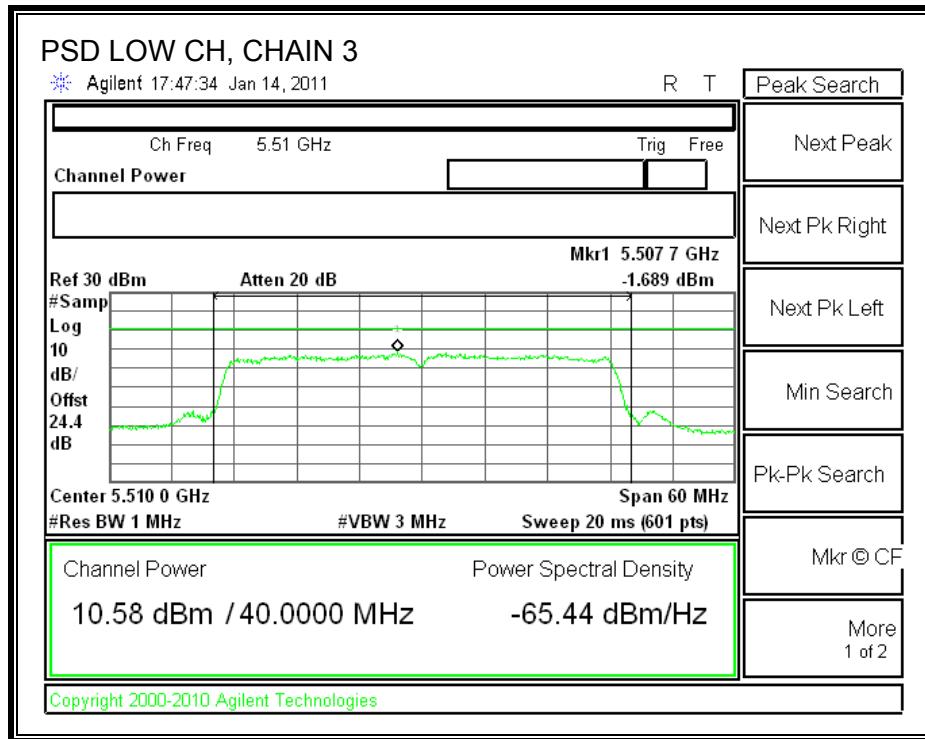

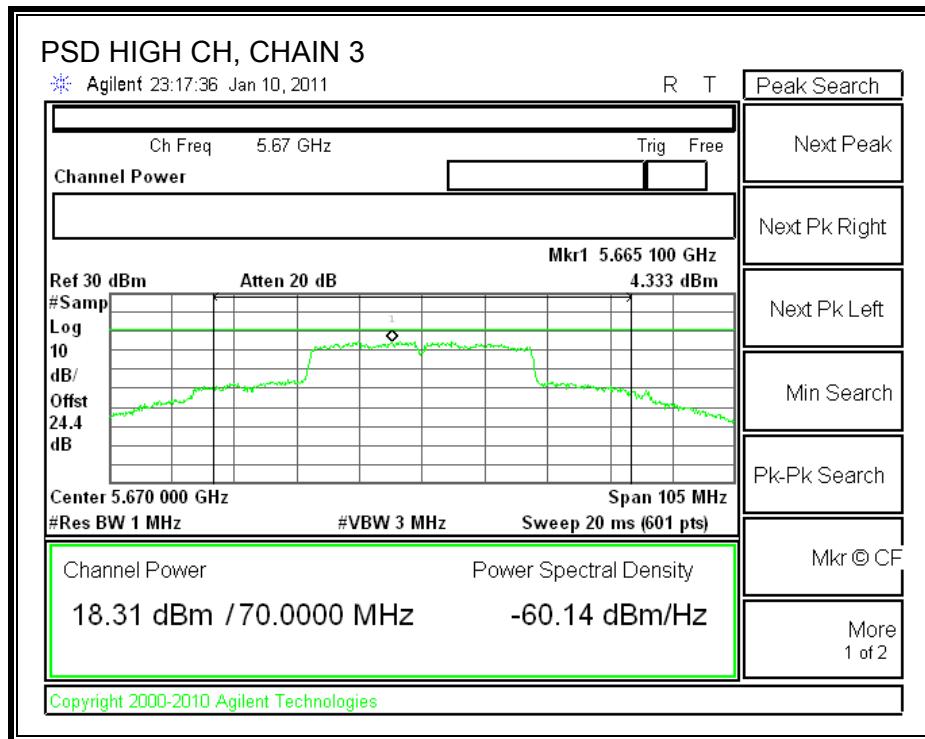

7.13.9. PEAK EXCURSION

LIMITS

FCC §15.407 (a) (6)

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the peak transmit power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emission bandwidth whichever is less.

TEST PROCEDURE

The transmitter outputs are connected to the spectrum analyzer via a combiner.



The test is performed in accordance with FCC Public Notice: APPENDIX A Guidelines for Assessing Unlicensed National Information Infrastructure (U-NII) Devices – Part 15, Subpart E, August 2002.


Since Method # 1 was used for peak power measurements, Method # 1 settings are used for the second PPSD trace.

RESULTS

Channel	Frequency (MHz)	Peak Excursion (dB)	Limit (dB)	Margin (dB)
Low	5510	10.69	13	-2.31
Middle	5590	8.97	13	-4.03
High	5670	8.97	13	-4.03

PEAK EXCURSION

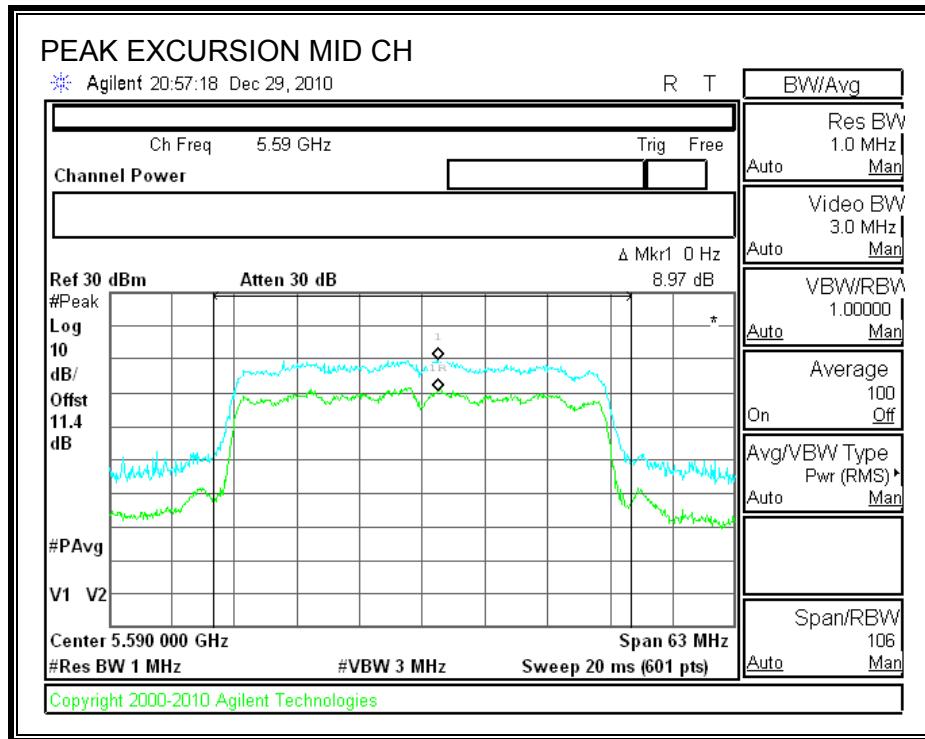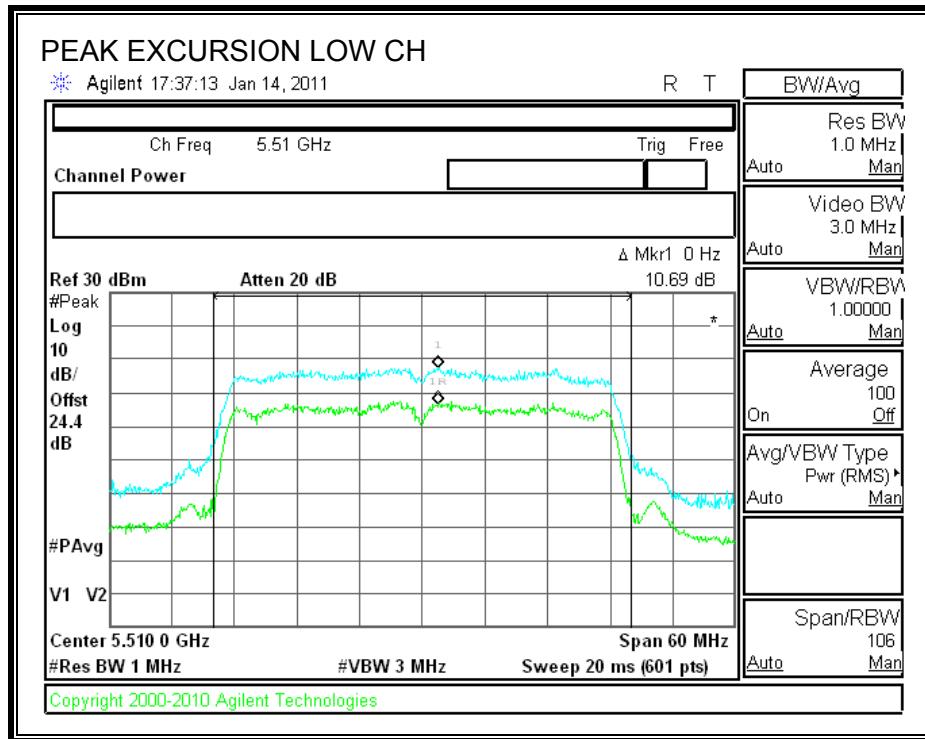

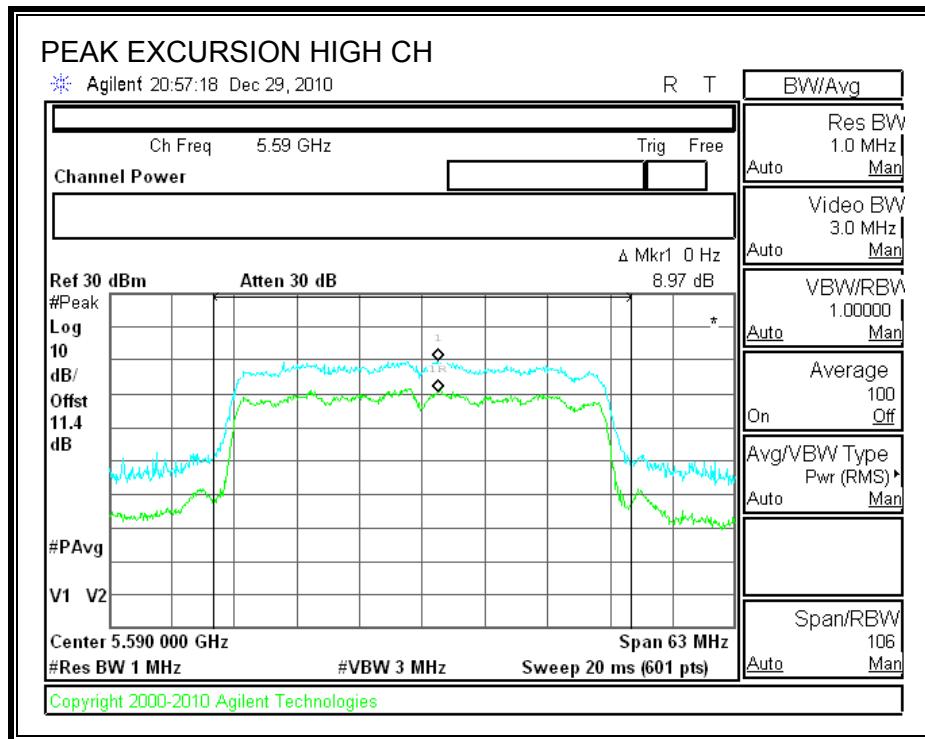

7.13.10. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.407 (b) (3)

IC RSS-210 A9.3 (3)

For transmitters operating in the 5.47-5.725 GHz band: all emissions outside of the 5.47-5.725 GHz band shall not exceed an EIRP of -27 dBm / MHz.



TEST PROCEDURE


Conducted RF measurements of the transmitter output are made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.


The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1 MHz. The video bandwidth is set to 1 MHz. Peak detection measurements are compared to EIRP limit, adjusted for the maximum antenna gain.

Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.

SPURIOUS EMISSIONS WITH COMBINER

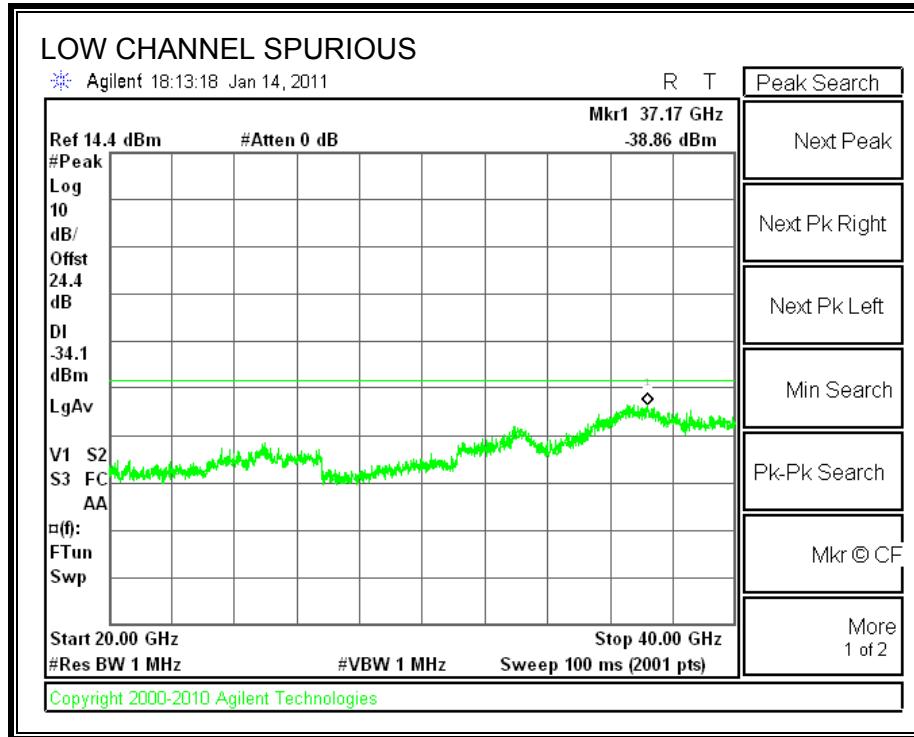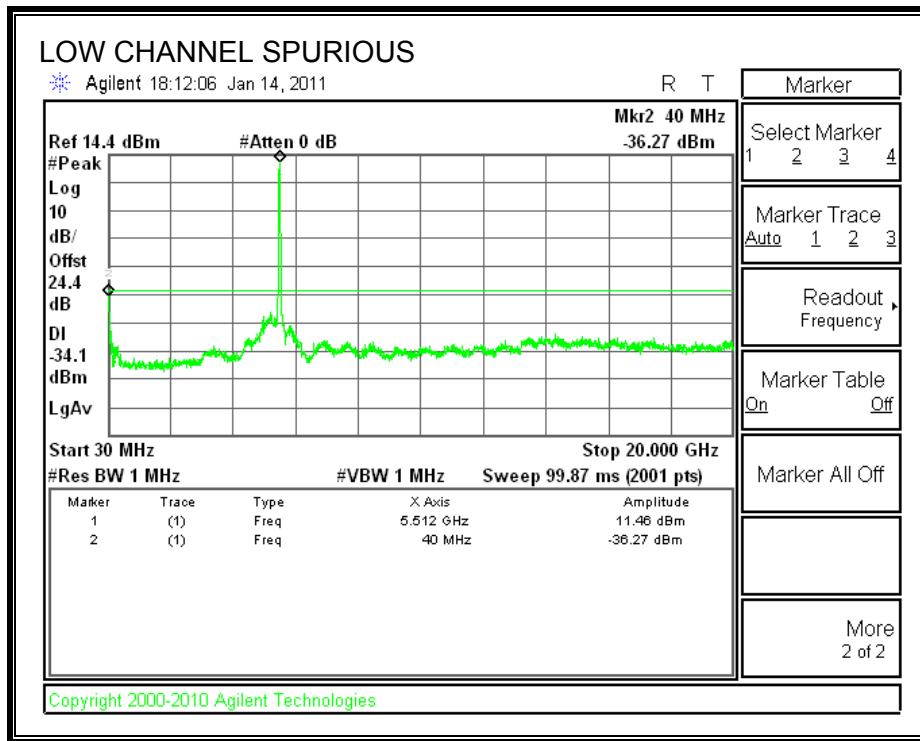


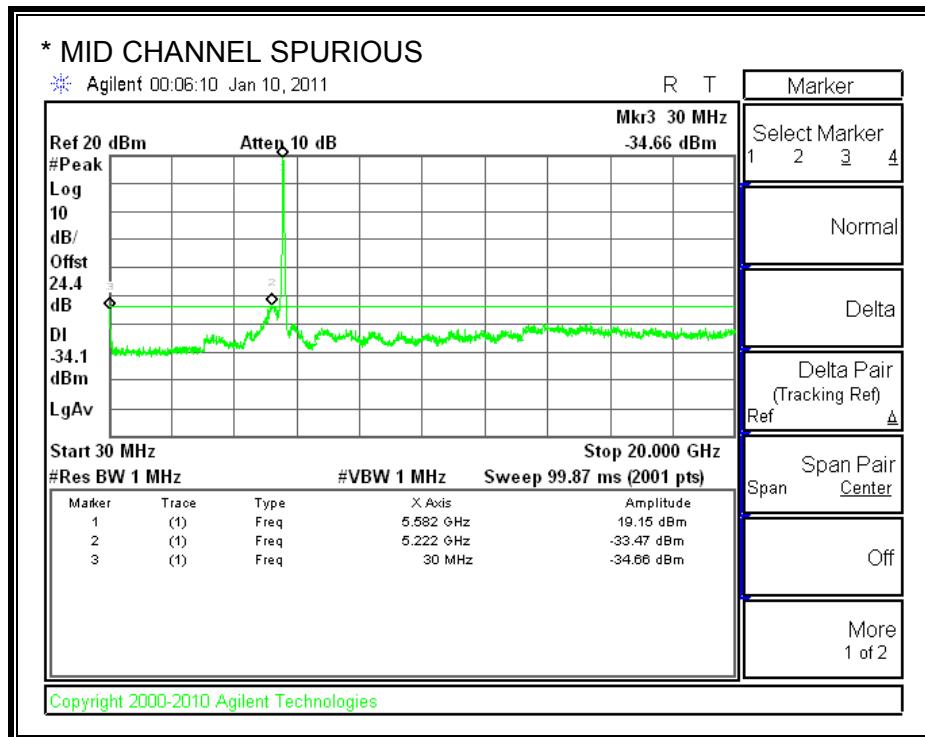


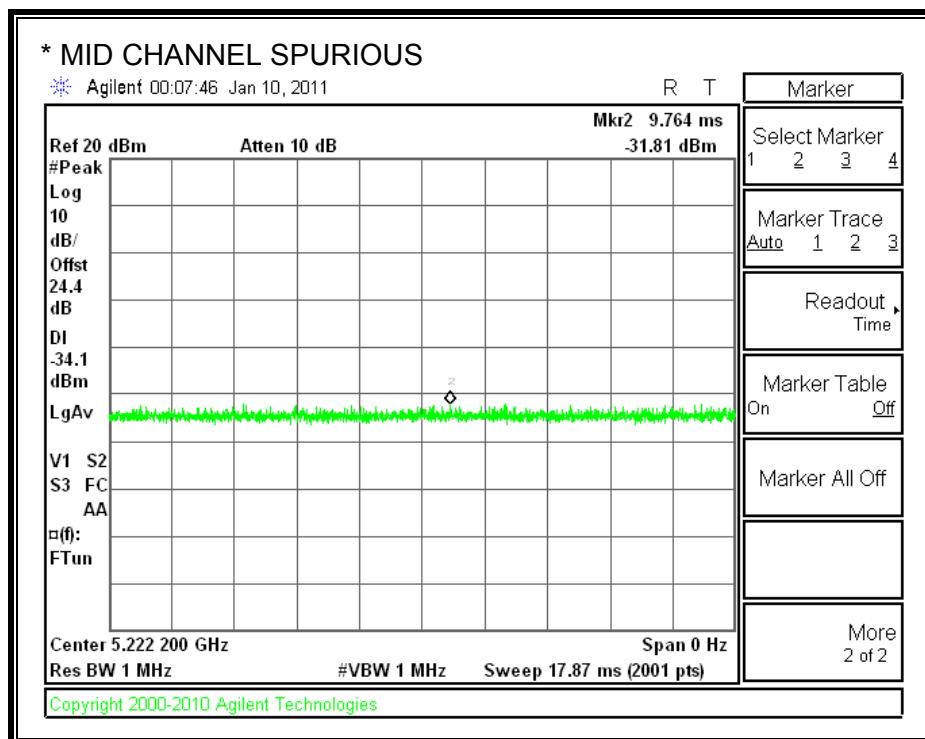


* Passed with EIRP Radiated Substitution

f MHz	SG reading (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Ant. Pol. (H/V)
5431	-38.0	1.2	11.0	-28.2	-27.0	-1.2	V
5431	-46.0	1.2	11.0	-35.0	-27.0	-8.0	H

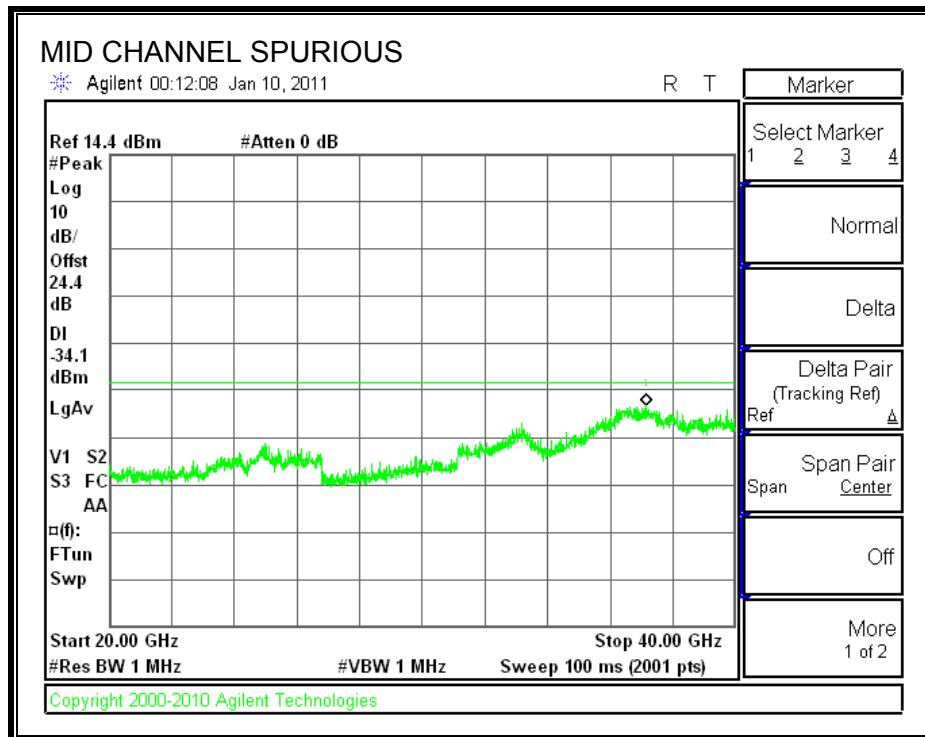


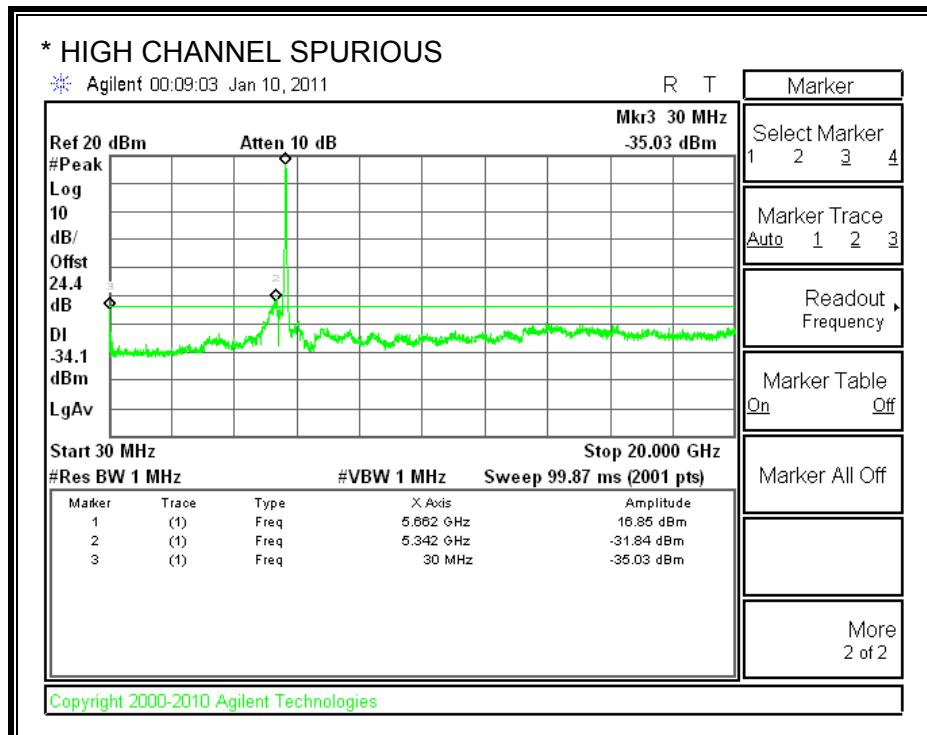

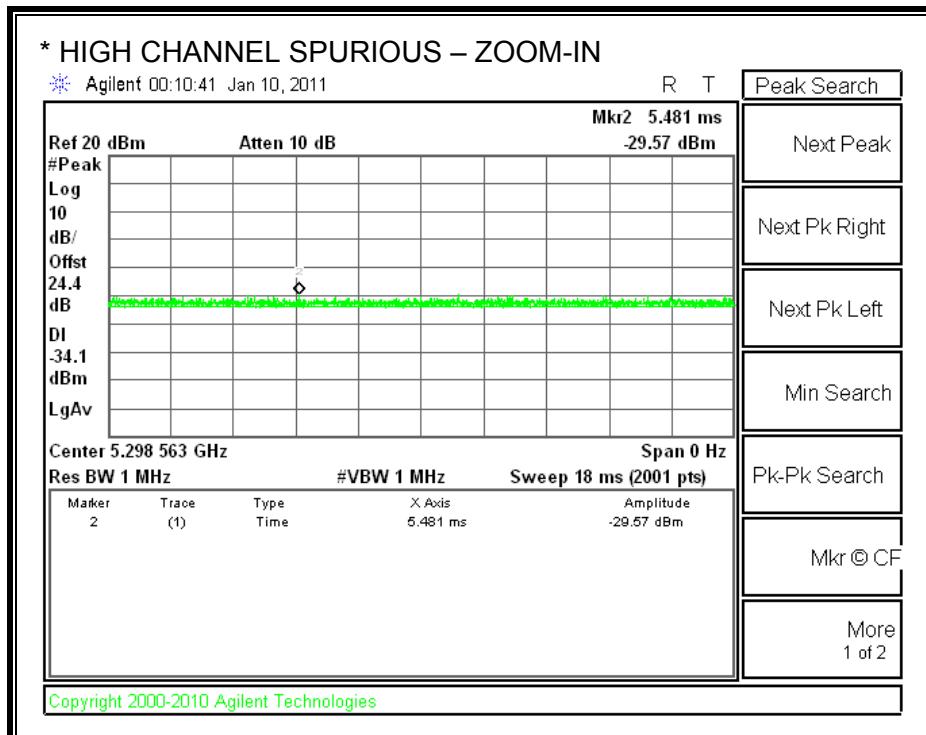

* Passed with EIRP Radiated Substitution

f MHz	SG reading (dBm)	Cable Loss (dB)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Delta (dB)	Ant. Pol. (H/V)
5431	-38.0	1.2	11.0	-28.2	-27.0	-1.2	V
5431	-46.0	1.2	11.0	-35.0	-27.0	-8.0	H

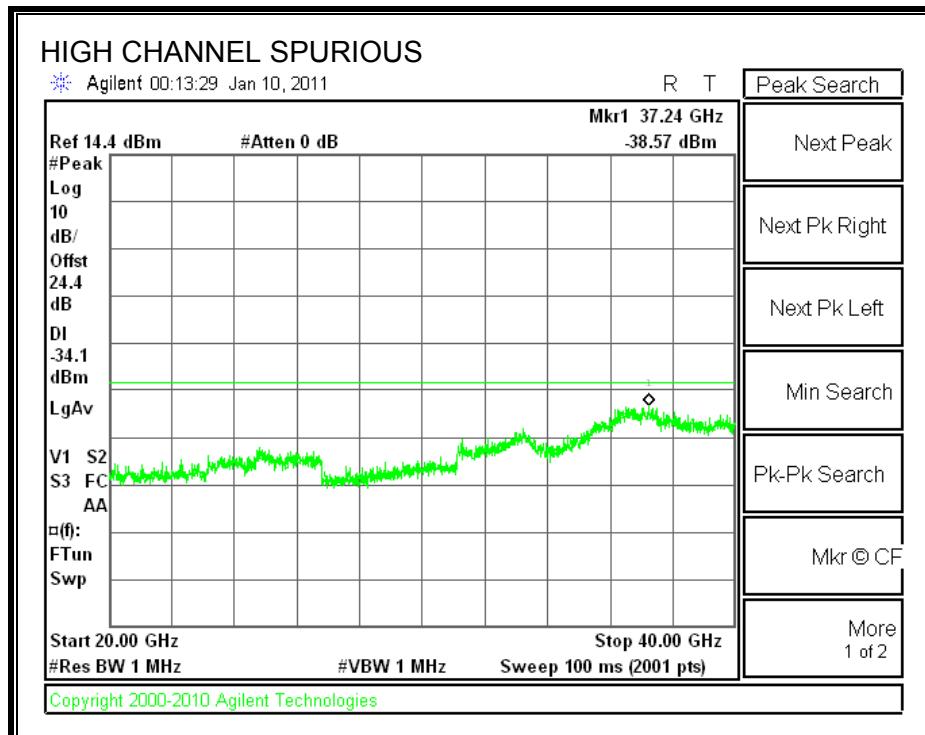

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



8.2. TRANSMITTER ABOVE 1 GHz

Except as shown by specific results below, all 20 MHz bandwidth modes not specifically referenced are covered by the HT20 3x3 CDD MCS0 mode, which was determined to be the worst case mode. HT20 3x3 CDD MCS0 radiated testing was performed at the highest, worst-case power of all modes covered by HT20 3x3 CDD MCS0 radiated test results.

Except as shown by specific results below, all 40 MHz bandwidth modes not specifically referenced are covered by the HT40 3x3 CDD MCS0 mode, which was determined to be the worst case mode. HT40 3x3 CDD MCS0 radiated testing was performed at the highest, worst-case power of all modes covered by HT40 3x3 CDD MCS0 radiated test results.

8.2.1. 802.11a MODE IN THE 5.2 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

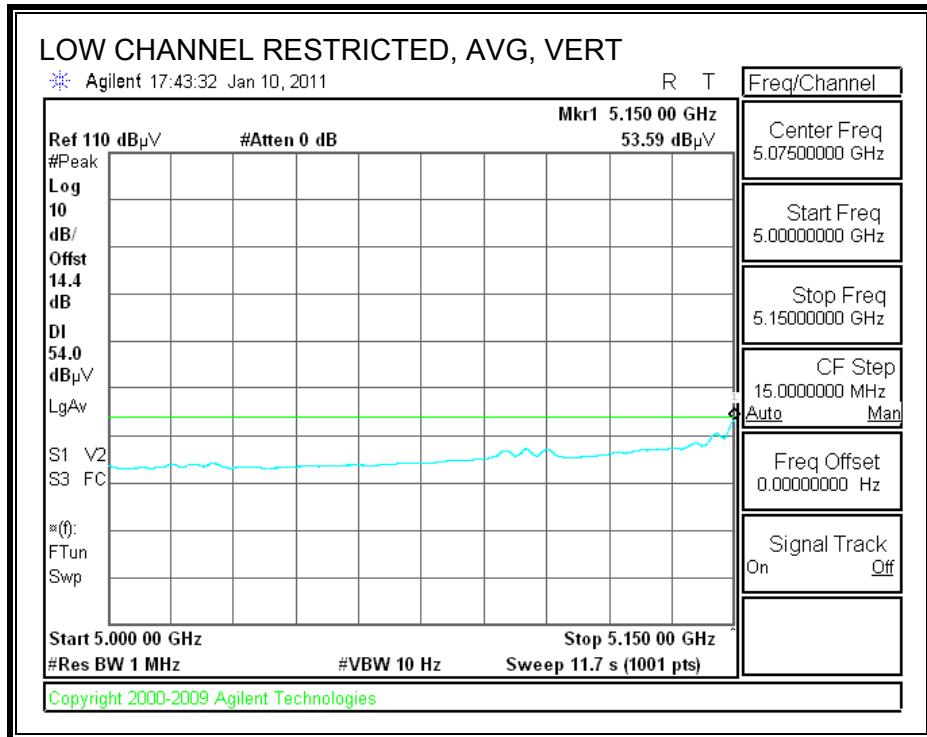
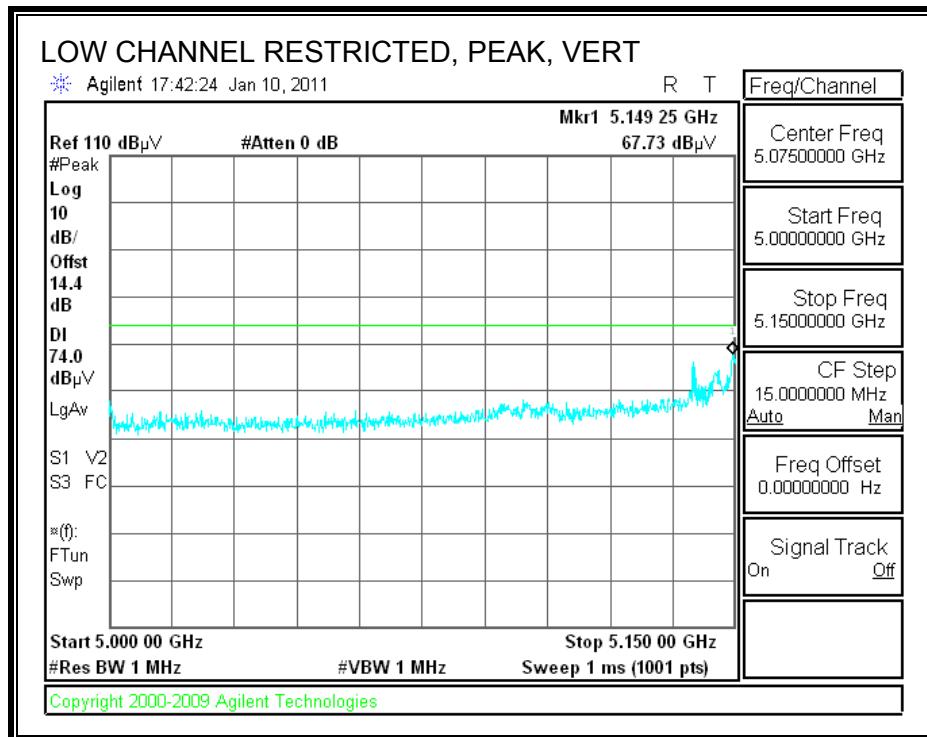


HARMONICS AND SPURIOUS EMISSIONS

Covered by 11n HT20 3x3 CDD MCS0 which was tested at the worst case of a-mode mid channel output power.

8.2.2. 802.11a MODE IN THE 5.3 GHz BAND

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

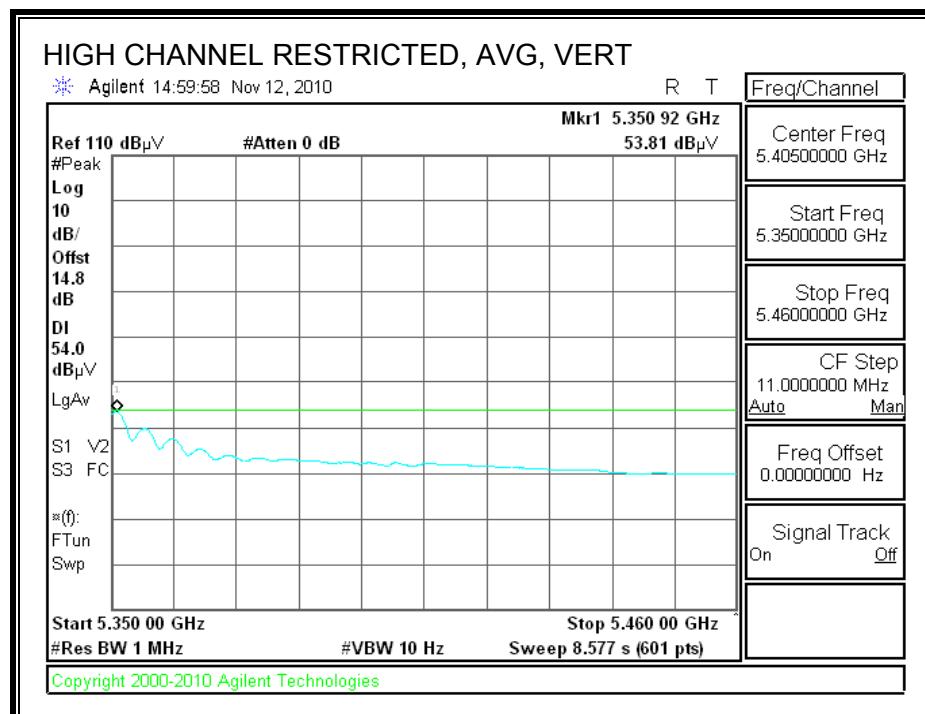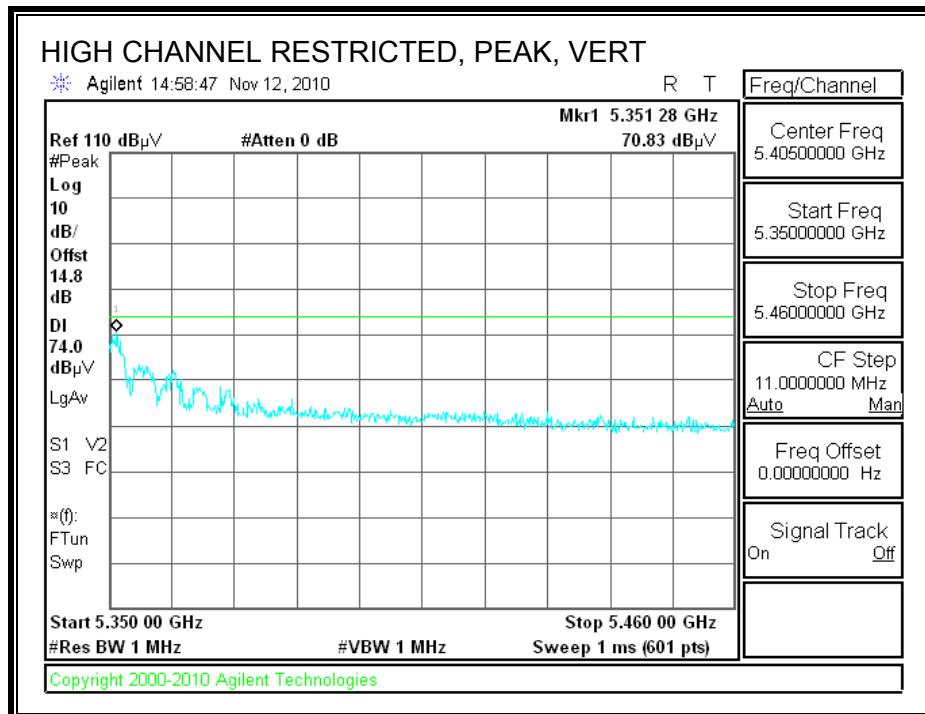

HARMONICS AND SPURIOUS EMISSIONS

Covered by 11n HT20 3x3 CDD MCS0 which was tested at the worst case of a-mode mid channel output power.

8.2.3. 802.11a MODE IN THE 5.6 GHz BAND



Covered by 11n HT20 3x3 CDD MCS0 which was tested at the worst case of a-mode output power.

802.11n HT20 THREE CHAINS MODE IN THE 5.2 GHz BAND (CDD MCS0)

The CDD MCS0 mode is not implemented in the 5.2 GHz band and will be disabled in production devices.

Preliminary testing demonstrated that CDD MCS0 was the worst case of various HT20 modes, therefore radiated measurements in the CDD MCS0 mode were performed at the highest, worst-case power of all modes covered by these radiated test results.

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

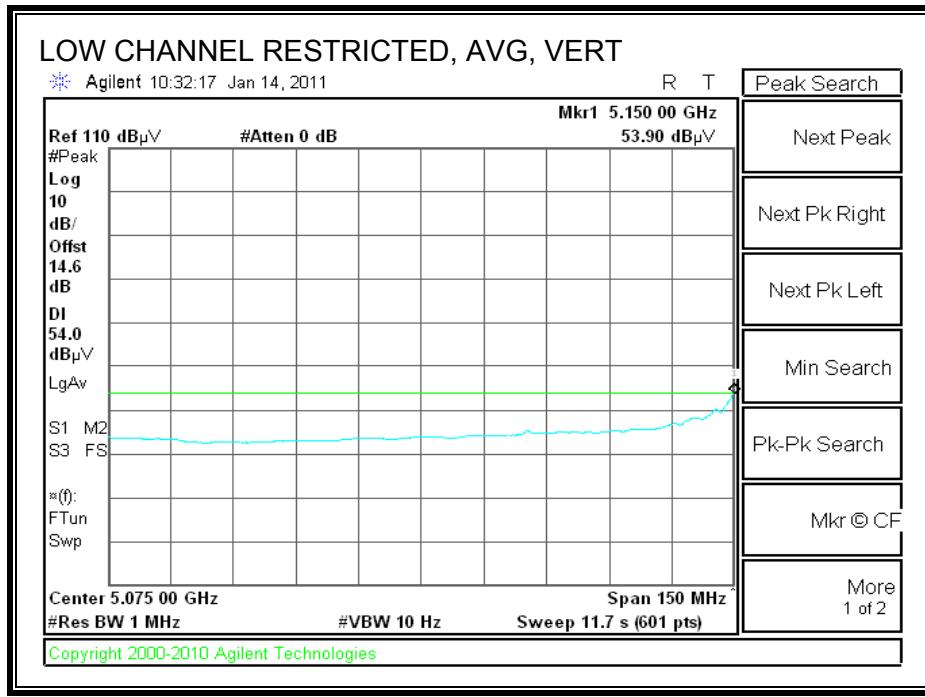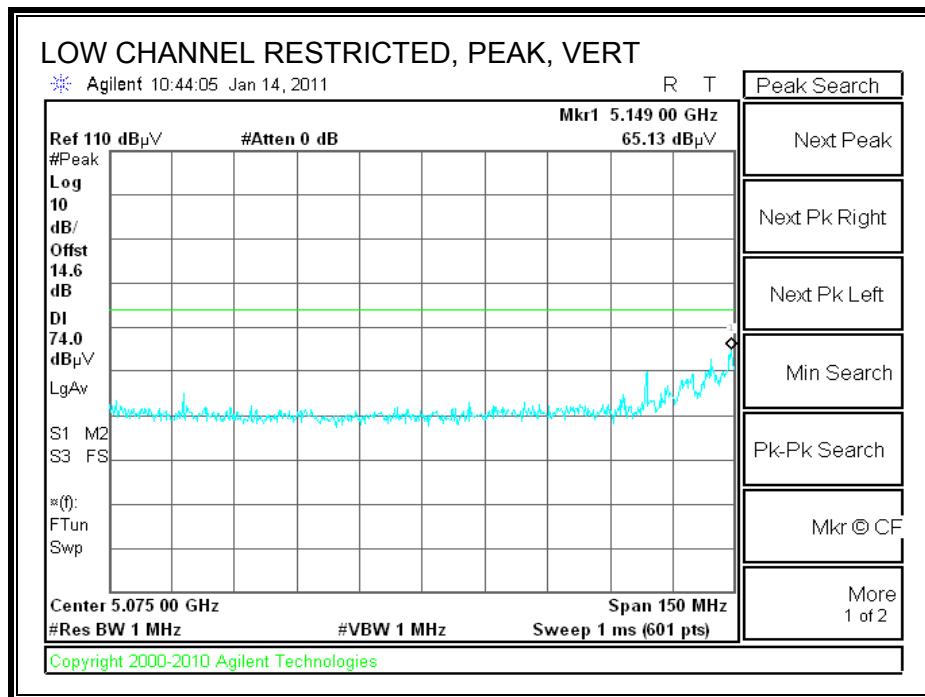

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement
Compliance Certification Services, Fremont 5m Chamber

Test Engr: Chin Pang
Date: 12/22/10
Project #: 10U13492
Company: Broadcom
Test Target: FCC 15.407
Mode Oper: TX, HT20 3x3 CDD

f	Measurement Frequency	Amp	Preamp Gain	Average Field Strength Limit
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Peak Field Strength Limit
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Margin vs. Average Limit
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Margin vs. Peak Limit
CL	Cable Loss	HPF	High Pass Filter	

f GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Notes
Low Ch, 5180MHz													
15.540	3.0	35.9	38.7	11.3	-34.8	0.0	0.0	51.0	74.0	-23.0	H	P	
15.540	3.0	23.7	38.7	11.3	-34.8	0.0	0.0	38.9	54.0	-15.1	H	A	
15.540	3.0	36.9	38.7	11.3	-34.8	0.0	0.0	52.0	74.0	-22.0	V	P	
15.540	3.0	24.9	38.7	11.3	-34.8	0.0	0.0	40.1	54.0	-13.9	V	A	
Mid Ch, 5200MHz													
15.600	3.0	41.2	38.5	11.4	-34.8	0.0	0.0	56.3	74.0	-17.7	V	P	
15.600	3.0	28.0	38.5	11.4	-34.8	0.0	0.0	43.1	54.0	-10.9	V	A	
15.600	3.0	37.0	38.5	11.4	-34.8	0.0	0.0	52.1	74.0	-21.9	H	P	
15.600	3.0	24.4	38.5	11.4	-34.8	0.0	0.0	39.5	54.0	-14.5	H	A	
High Ch, 5240MHz													
15.720	3.0	37.2	38.2	11.4	-34.7	0.0	0.0	52.2	74.0	-21.8	H	P	
15.720	3.0	24.9	38.2	11.4	-34.7	0.0	0.0	39.8	54.0	-14.2	H	A	
15.720	3.0	39.3	38.2	11.4	-34.7	0.0	0.0	54.2	74.0	-19.8	V	P	
15.720	3.0	28.1	38.2	11.4	-34.7	0.0	0.0	43.0	54.0	-11.0	V	A	



Rev. 4.1.2.7

Note: No other emissions were detected above the system noise floor.

Tested with the highest output power as worst case of 18 dBm for all modes covered by HT20 3x3 CDD MCS0.

8.2.4. 802.11n HT20 THREE CHAINS MODE IN THE 5.2 GHz BAND (SDM MCS16)

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

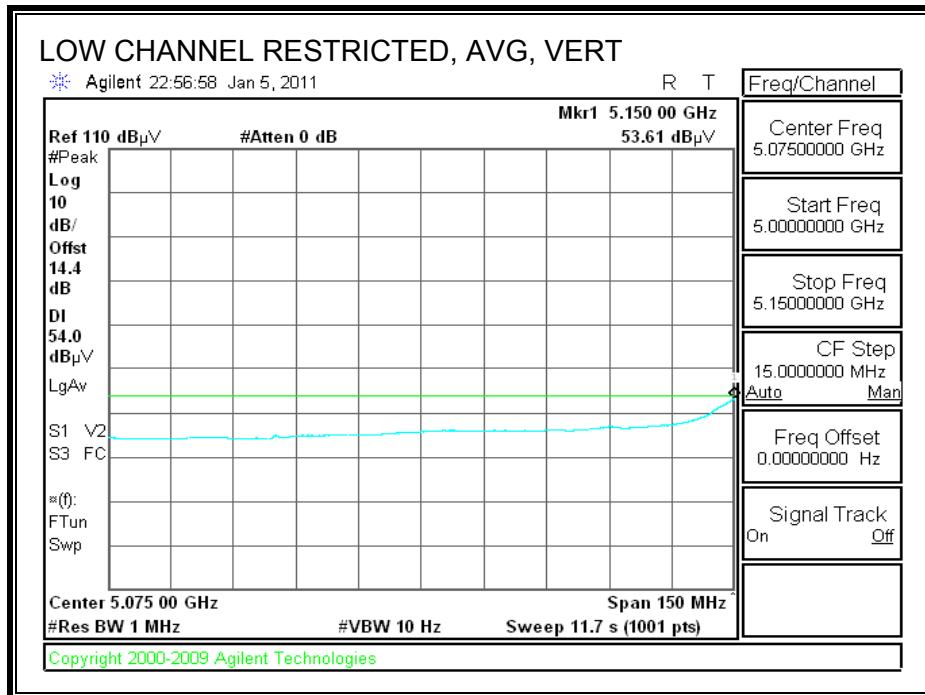
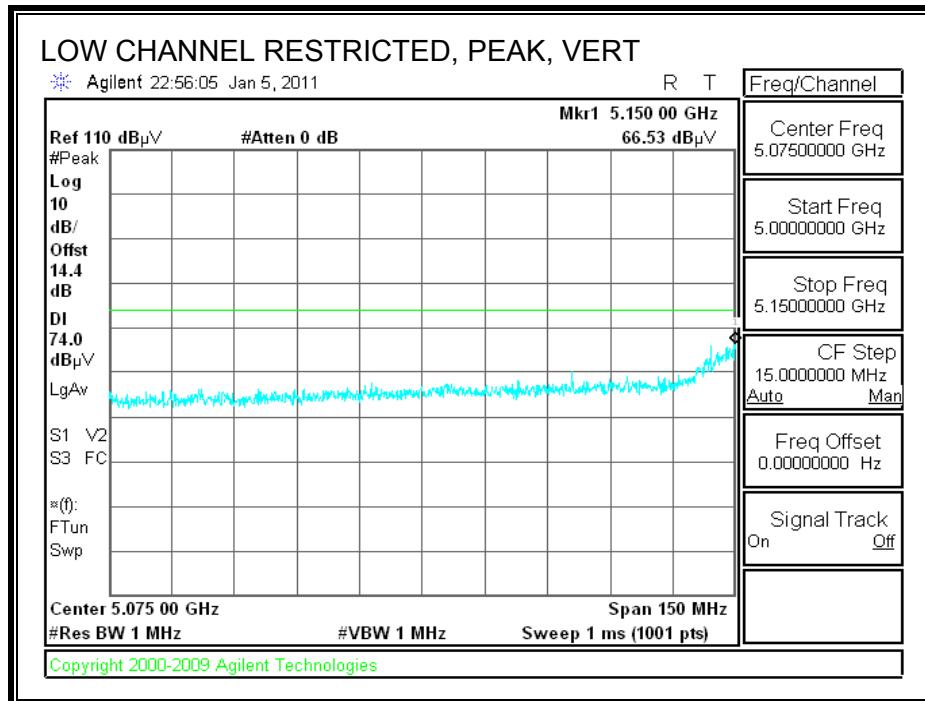


HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																	
Company: Broadcom	Project #: 10U13492	Date: 1/6/2011	Test Engineer: Mengistu Mekuria	Configuration: EUT / Laptop / 5GHz Antenna	Mode: Tx 5.2GHz Band_11n HT20 3x3 MCS 16												
<u>Test Equipment:</u>																	
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz		Limit									
T59; S/N: 3245 @3m		T145 Agilent 3008A005C						FCC 15.209									
Hi Frequency Cables																	
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz			Average Measurements RBW=1MHz ; VBW=10Hz	
3' cable 22807700	12' cable 22807600	20' cable 22807500							R_001								
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
LOW CHANNEL 5180MHz																	
10.360	3.0	49.6	36.0	37.4	8.9	-34.6	0.0	0.0	61.3	47.7	74	54	-12.7	-6.3	V		
10.360	3.0	38.1	26.1	37.4	8.9	-34.6	0.0	0.0	49.8	37.8	74	54	-24.2	-16.2	V		
HIGH CHANNEL 5240MHz																	
10.480	3.0	49.8	35.6	37.5	9.0	-34.5	0.0	0.0	61.8	47.6	74	54	-12.2	-6.4	V		
f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss					Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter					Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit							

8.2.5. 802.11n HT20 THREE CHAINS MODE IN THE 5.2 GHz BAND (SDM MCS21)

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

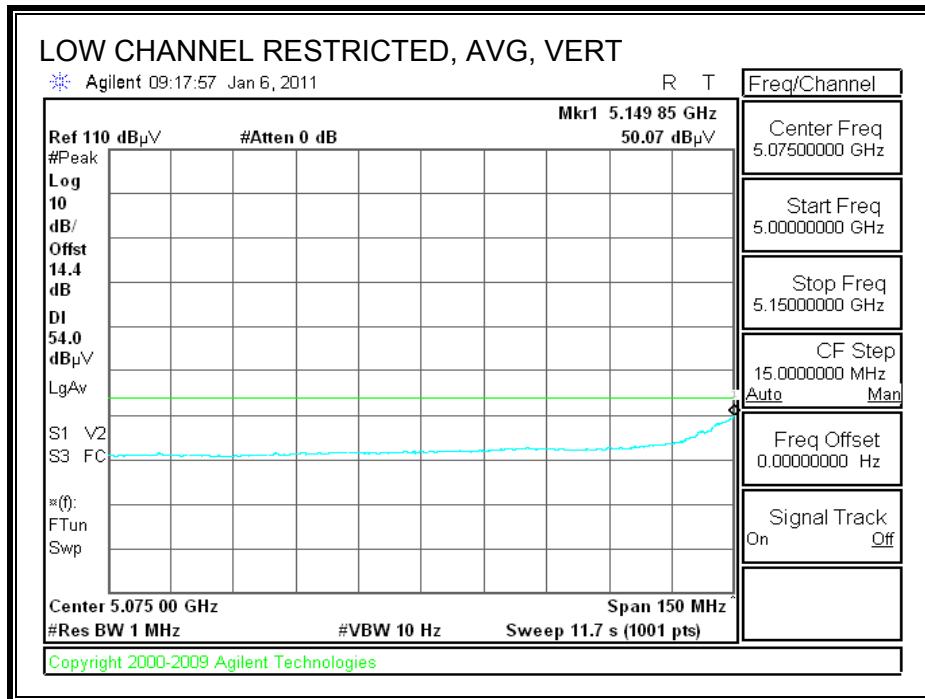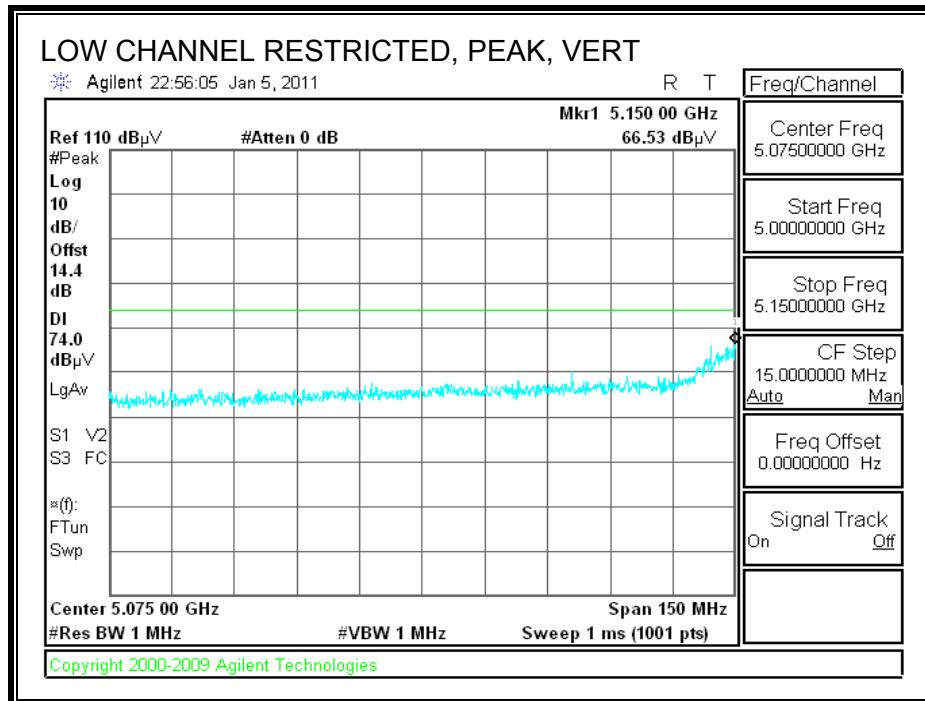



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																																																																																																																																																																																				
<p>Company: Broadcom Project #: 10U13492 Date: 1/6/2011 Test Engineer: Mengistu Mekuria Configuration: FUT / Laptop / 5GHz Antenna Mode: Tx 5.3GHz Band_11n HT20 3x3 MCS 21</p>																																																																																																																																																																																																																																																				
<p><u>Test Equipment:</u></p> <table border="1"><tr><td>Horn 1-18GHz</td><td>Pre-amplifier 1-26GHz</td><td>Pre-amplifier 26-40GHz</td><td colspan="4">Horn > 18GHz</td><td>Limit</td></tr><tr><td>T59; S/N: 3245 @3m</td><td>T145 Agilent 3008A005C</td><td></td><td colspan="4"></td><td>FCC 15.209</td></tr><tr><td colspan="15">Hi Frequency Cables</td></tr><tr><td>3' cable 22807700</td><td>12' cable 22807600</td><td>20' cable 22807500</td><td colspan="4">HPF</td><td>Reject Filter</td><td colspan="7">Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz</td></tr><tr><td>3' cable 22807700</td><td>12' cable 22807600</td><td>20' cable 22807500</td><td colspan="4"></td><td>R_001</td><td colspan="7"></td></tr><tr><th>f GHz</th><th>Dist (m)</th><th>Read Pk dBuV</th><th>Read Avg dBuV</th><th>AF dB/m</th><th>CL dB</th><th>Amp dB</th><th>D Corr dB</th><th>Fltr dB</th><th>Peak dBuV/m</th><th>Avg dBuV/m</th><th>Pk Lim dBuV/m</th><th>Avg Lim dBuV/m</th><th>Pk Mar dB</th><th>Avg Mar dB</th><th>Notes (V/H)</th></tr><tr><td colspan="15">LOW CHANNEL 5180MHz</td></tr><tr><td>10.360</td><td>3.0</td><td>49.6</td><td>33.8</td><td>37.4</td><td>8.9</td><td>-34.6</td><td>0.0</td><td>0.0</td><td>61.3</td><td>45.5</td><td>74</td><td>54</td><td>-12.7</td><td>-8.5</td><td>V</td></tr><tr><td>10.360</td><td>3.0</td><td>41.5</td><td>29.8</td><td>37.4</td><td>8.9</td><td>-34.6</td><td>0.0</td><td>0.0</td><td>53.2</td><td>41.5</td><td>74</td><td>54</td><td>-20.8</td><td>-12.5</td><td>H</td></tr><tr><td colspan="15">HIGH CHANNEL 5240MHz</td></tr><tr><td>10.480</td><td>3.0</td><td>48.6</td><td>33.3</td><td>37.5</td><td>9.0</td><td>-34.5</td><td>0.0</td><td>0.0</td><td>60.6</td><td>45.3</td><td>74</td><td>54</td><td>-13.4</td><td>-8.7</td><td>V</td></tr><tr><td>f</td><td colspan="2">Measurement Frequency</td><td>Amp</td><td colspan="2">Preamp Gain</td><td colspan="2"></td><td colspan="2"></td><td>Avg Lim</td><td colspan="4">Average Field Strength Limit</td></tr><tr><td>Dist</td><td colspan="2">Distance to Antenna</td><td>D Corr</td><td colspan="2">Distance Correct to 3 meters</td><td colspan="2"></td><td colspan="2"></td><td>Pk Lim</td><td colspan="4">Peak Field Strength Limit</td></tr><tr><td>Read</td><td colspan="2">Analyzer Reading</td><td>Avg</td><td colspan="2">Average Field Strength @ 3 m</td><td colspan="2"></td><td colspan="2"></td><td>Avg Mar</td><td colspan="4">Margin vs. Average Limit</td></tr><tr><td>AF</td><td colspan="2">Antenna Factor</td><td>Peak</td><td colspan="2">Calculated Peak Field Strength</td><td colspan="2"></td><td colspan="2"></td><td>Pk Mar</td><td colspan="4">Margin vs. Peak Limit</td></tr><tr><td>CL</td><td colspan="2">Cable Loss</td><td>HPF</td><td colspan="2">High Pass Filter</td><td colspan="2"></td><td colspan="2"></td><td></td><td colspan="4"></td></tr></table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T59; S/N: 3245 @3m	T145 Agilent 3008A005C						FCC 15.209	Hi Frequency Cables															3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz							3' cable 22807700	12' cable 22807600	20' cable 22807500					R_001								f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	LOW CHANNEL 5180MHz															10.360	3.0	49.6	33.8	37.4	8.9	-34.6	0.0	0.0	61.3	45.5	74	54	-12.7	-8.5	V	10.360	3.0	41.5	29.8	37.4	8.9	-34.6	0.0	0.0	53.2	41.5	74	54	-20.8	-12.5	H	HIGH CHANNEL 5240MHz															10.480	3.0	48.6	33.3	37.5	9.0	-34.5	0.0	0.0	60.6	45.3	74	54	-13.4	-8.7	V	f	Measurement Frequency		Amp	Preamp Gain						Avg Lim	Average Field Strength Limit				Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit				Read	Analyzer Reading		Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit				AF	Antenna Factor		Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit				CL	Cable Loss		HPF	High Pass Filter										
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																													
T59; S/N: 3245 @3m	T145 Agilent 3008A005C						FCC 15.209																																																																																																																																																																																																																																													
Hi Frequency Cables																																																																																																																																																																																																																																																				
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																												
3' cable 22807700	12' cable 22807600	20' cable 22807500					R_001																																																																																																																																																																																																																																													
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																					
LOW CHANNEL 5180MHz																																																																																																																																																																																																																																																				
10.360	3.0	49.6	33.8	37.4	8.9	-34.6	0.0	0.0	61.3	45.5	74	54	-12.7	-8.5	V																																																																																																																																																																																																																																					
10.360	3.0	41.5	29.8	37.4	8.9	-34.6	0.0	0.0	53.2	41.5	74	54	-20.8	-12.5	H																																																																																																																																																																																																																																					
HIGH CHANNEL 5240MHz																																																																																																																																																																																																																																																				
10.480	3.0	48.6	33.3	37.5	9.0	-34.5	0.0	0.0	60.6	45.3	74	54	-13.4	-8.7	V																																																																																																																																																																																																																																					
f	Measurement Frequency		Amp	Preamp Gain						Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																									
Dist	Distance to Antenna		D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																									
Read	Analyzer Reading		Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																									
AF	Antenna Factor		Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																									
CL	Cable Loss		HPF	High Pass Filter																																																																																																																																																																																																																																																

| f Measurement Frequency Dist Distance to Antenna Read Analyzer Reading AF Antenna Factor CL Cable Loss Amp Preamp Gain D Corr Distance Correct to 3 meters Avg Average Field Strength @ 3 m Peak Calculated Peak Field Strength HPF High Pass Filter Avg Lim Average Field Strength Limit Pk Lim Peak Field Strength Limit Avg Mar Margin vs. Average Limit Pk Mar Margin vs. Peak Limit | | | | | | | | | | | | | | |

8.2.6. 802.11n HT20 THREE CHAINS MODE IN THE 5.3 GHz BAND (CDD MCS0)

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

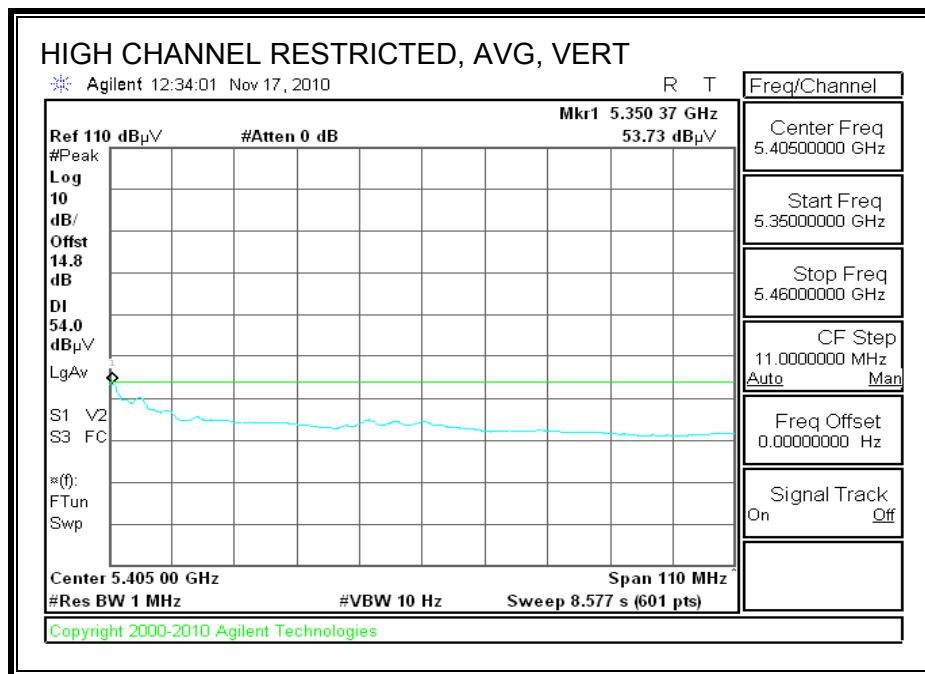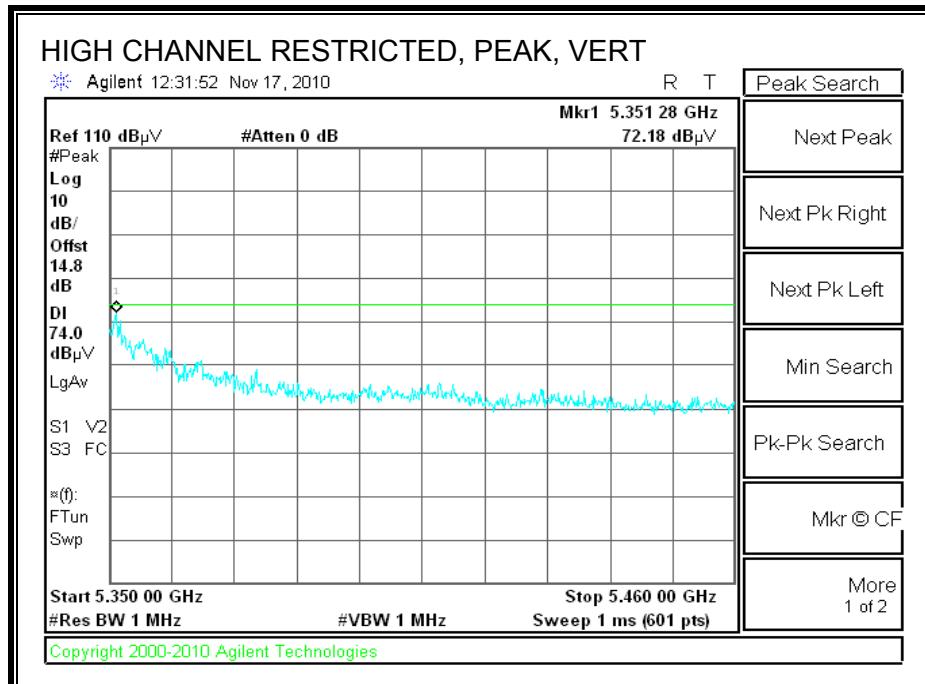



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																																																																																																																																																																																																																																																																				
<p>Company: BROADCOM Project #: 10U13492 Date: 12/29/2010 Test Engineer: MENGISTU MEKURIA Configuration: EUT WITH EXTERNAL ANTENNA AND LAPTOP Mode: Tx 5.2 & 5.3GHz Band_11n HT20 3x3 CDD</p> <p><u>Test Equipment:</u></p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="4">Horn > 18GHz</td> <td>Limit</td> </tr> <tr> <td>T60; S/N: 2238 @3m</td> <td>T34 HP 8449B</td> <td></td> <td colspan="4"></td> <td>FCC 15.205</td> </tr> <tr> <td colspan="15">Hi Frequency Cables</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4"></td> <td>HPF</td> <td>Reject Filter</td> <td colspan="5">Peak Measurements RBW=VBW=1MHz</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4"></td> <td></td> <td>R_001</td> <td colspan="5">Average Measurements RBW=1MHz ; VBW=10Hz</td> </tr> </table> <table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF</th> <th>CL</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr> <td colspan="15">LOW CHANNEL 5260MHz</td> </tr> <tr> <td>15.780</td> <td>3.0</td> <td>39.9</td> <td>26.7</td> <td>37.8</td> <td>11.5</td> <td>-32.2</td> <td>0.0</td> <td>0.0</td> <td>57.0</td> <td>43.8</td> <td>74</td> <td>54</td> <td>-17.0</td> <td>-10.2</td> <td>V</td> </tr> <tr> <td>15.780</td> <td>3.0</td> <td>38.8</td> <td>25.3</td> <td>37.8</td> <td>11.5</td> <td>-32.2</td> <td>0.0</td> <td>0.0</td> <td>55.9</td> <td>42.4</td> <td>74</td> <td>54</td> <td>-18.1</td> <td>-11.6</td> <td>H</td> </tr> <tr> <td colspan="15">MID CHANNEL 5300MHz</td> </tr> <tr> <td>10.600</td> <td>3.0</td> <td>40.8</td> <td>27.9</td> <td>37.6</td> <td>9.0</td> <td>-32.6</td> <td>0.0</td> <td>0.0</td> <td>54.8</td> <td>41.9</td> <td>74</td> <td>54</td> <td>-19.2</td> <td>-12.1</td> <td>V</td> </tr> <tr> <td>15.900</td> <td>3.0</td> <td>39.0</td> <td>26.8</td> <td>37.5</td> <td>11.5</td> <td>-32.1</td> <td>0.0</td> <td>0.0</td> <td>55.8</td> <td>43.6</td> <td>74</td> <td>54</td> <td>-18.2</td> <td>-10.4</td> <td>V</td> </tr> <tr> <td>10.600</td> <td>3.0</td> <td>38.6</td> <td>25.5</td> <td>37.6</td> <td>9.0</td> <td>-32.6</td> <td>0.0</td> <td>0.0</td> <td>52.6</td> <td>39.5</td> <td>74</td> <td>54</td> <td>-21.4</td> <td>-14.5</td> <td>H</td> </tr> <tr> <td>15.900</td> <td>3.0</td> <td>39.0</td> <td>26.0</td> <td>37.5</td> <td>11.5</td> <td>-32.1</td> <td>0.0</td> <td>0.0</td> <td>55.8</td> <td>42.8</td> <td>74</td> <td>54</td> <td>-18.2</td> <td>-11.2</td> <td>H</td> </tr> <tr> <td colspan="15">HIGH CHANNEL 5320MHz</td> </tr> <tr> <td>10.640</td> <td>3.0</td> <td>38.3</td> <td>26.0</td> <td>37.6</td> <td>9.1</td> <td>-32.6</td> <td>0.0</td> <td>0.0</td> <td>52.3</td> <td>40.0</td> <td>74</td> <td>54</td> <td>-21.7</td> <td>-14.0</td> <td>V</td> </tr> <tr> <td>15.960</td> <td>3.0</td> <td>40.2</td> <td>26.9</td> <td>37.3</td> <td>11.5</td> <td>-32.1</td> <td>0.0</td> <td>0.0</td> <td>56.9</td> <td>43.6</td> <td>74</td> <td>54</td> <td>-17.1</td> <td>-10.4</td> <td>V</td> </tr> <tr> <td>10.640</td> <td>3.0</td> <td>37.3</td> <td>25.6</td> <td>37.6</td> <td>9.1</td> <td>-32.6</td> <td>0.0</td> <td>0.0</td> <td>51.3</td> <td>39.6</td> <td>74</td> <td>54</td> <td>-22.7</td> <td>-14.4</td> <td>H</td> </tr> <tr> <td>15.960</td> <td>3.0</td> <td>39.1</td> <td>25.2</td> <td>37.3</td> <td>11.5</td> <td>-32.1</td> <td>0.0</td> <td>0.0</td> <td>55.8</td> <td>41.9</td> <td>74</td> <td>54</td> <td>-18.2</td> <td>-12.1</td> <td>H</td> </tr> </tbody> </table> <table border="1"> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td></td> <td></td> </tr> </table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.205	Hi Frequency Cables															3' cable 22807700	12' cable 22807600	20' cable 22807500					HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz					3' cable 22807700	12' cable 22807600	20' cable 22807500						R_001	Average Measurements RBW=1MHz ; VBW=10Hz					f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF	CL	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	LOW CHANNEL 5260MHz															15.780	3.0	39.9	26.7	37.8	11.5	-32.2	0.0	0.0	57.0	43.8	74	54	-17.0	-10.2	V	15.780	3.0	38.8	25.3	37.8	11.5	-32.2	0.0	0.0	55.9	42.4	74	54	-18.1	-11.6	H	MID CHANNEL 5300MHz															10.600	3.0	40.8	27.9	37.6	9.0	-32.6	0.0	0.0	54.8	41.9	74	54	-19.2	-12.1	V	15.900	3.0	39.0	26.8	37.5	11.5	-32.1	0.0	0.0	55.8	43.6	74	54	-18.2	-10.4	V	10.600	3.0	38.6	25.5	37.6	9.0	-32.6	0.0	0.0	52.6	39.5	74	54	-21.4	-14.5	H	15.900	3.0	39.0	26.0	37.5	11.5	-32.1	0.0	0.0	55.8	42.8	74	54	-18.2	-11.2	H	HIGH CHANNEL 5320MHz															10.640	3.0	38.3	26.0	37.6	9.1	-32.6	0.0	0.0	52.3	40.0	74	54	-21.7	-14.0	V	15.960	3.0	40.2	26.9	37.3	11.5	-32.1	0.0	0.0	56.9	43.6	74	54	-17.1	-10.4	V	10.640	3.0	37.3	25.6	37.6	9.1	-32.6	0.0	0.0	51.3	39.6	74	54	-22.7	-14.4	H	15.960	3.0	39.1	25.2	37.3	11.5	-32.1	0.0	0.0	55.8	41.9	74	54	-18.2	-12.1	H	f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter		
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																																																																																																													
T60; S/N: 2238 @3m	T34 HP 8449B						FCC 15.205																																																																																																																																																																																																																																																																																																																													
Hi Frequency Cables																																																																																																																																																																																																																																																																																																																																				
3' cable 22807700	12' cable 22807600	20' cable 22807500					HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz																																																																																																																																																																																																																																																																																																																											
3' cable 22807700	12' cable 22807600	20' cable 22807500						R_001	Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																																																																																																											
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF	CL	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																																																																																																					
LOW CHANNEL 5260MHz																																																																																																																																																																																																																																																																																																																																				
15.780	3.0	39.9	26.7	37.8	11.5	-32.2	0.0	0.0	57.0	43.8	74	54	-17.0	-10.2	V																																																																																																																																																																																																																																																																																																																					
15.780	3.0	38.8	25.3	37.8	11.5	-32.2	0.0	0.0	55.9	42.4	74	54	-18.1	-11.6	H																																																																																																																																																																																																																																																																																																																					
MID CHANNEL 5300MHz																																																																																																																																																																																																																																																																																																																																				
10.600	3.0	40.8	27.9	37.6	9.0	-32.6	0.0	0.0	54.8	41.9	74	54	-19.2	-12.1	V																																																																																																																																																																																																																																																																																																																					
15.900	3.0	39.0	26.8	37.5	11.5	-32.1	0.0	0.0	55.8	43.6	74	54	-18.2	-10.4	V																																																																																																																																																																																																																																																																																																																					
10.600	3.0	38.6	25.5	37.6	9.0	-32.6	0.0	0.0	52.6	39.5	74	54	-21.4	-14.5	H																																																																																																																																																																																																																																																																																																																					
15.900	3.0	39.0	26.0	37.5	11.5	-32.1	0.0	0.0	55.8	42.8	74	54	-18.2	-11.2	H																																																																																																																																																																																																																																																																																																																					
HIGH CHANNEL 5320MHz																																																																																																																																																																																																																																																																																																																																				
10.640	3.0	38.3	26.0	37.6	9.1	-32.6	0.0	0.0	52.3	40.0	74	54	-21.7	-14.0	V																																																																																																																																																																																																																																																																																																																					
15.960	3.0	40.2	26.9	37.3	11.5	-32.1	0.0	0.0	56.9	43.6	74	54	-17.1	-10.4	V																																																																																																																																																																																																																																																																																																																					
10.640	3.0	37.3	25.6	37.6	9.1	-32.6	0.0	0.0	51.3	39.6	74	54	-22.7	-14.4	H																																																																																																																																																																																																																																																																																																																					
15.960	3.0	39.1	25.2	37.3	11.5	-32.1	0.0	0.0	55.8	41.9	74	54	-18.2	-12.1	H																																																																																																																																																																																																																																																																																																																					
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																																																																																																															
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																																																																																																															
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																																																																																																															
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																																																																																																															
CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																																																																																																																	


Tested with the highest output power as worst case of 19 dBm for all modes covered by HT20 3x3 CDD MCS0.

8.2.7. 802.11n HT20 THREE CHAINS MODE IN THE 5.6 GHz BAND (CDD MCS0)

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

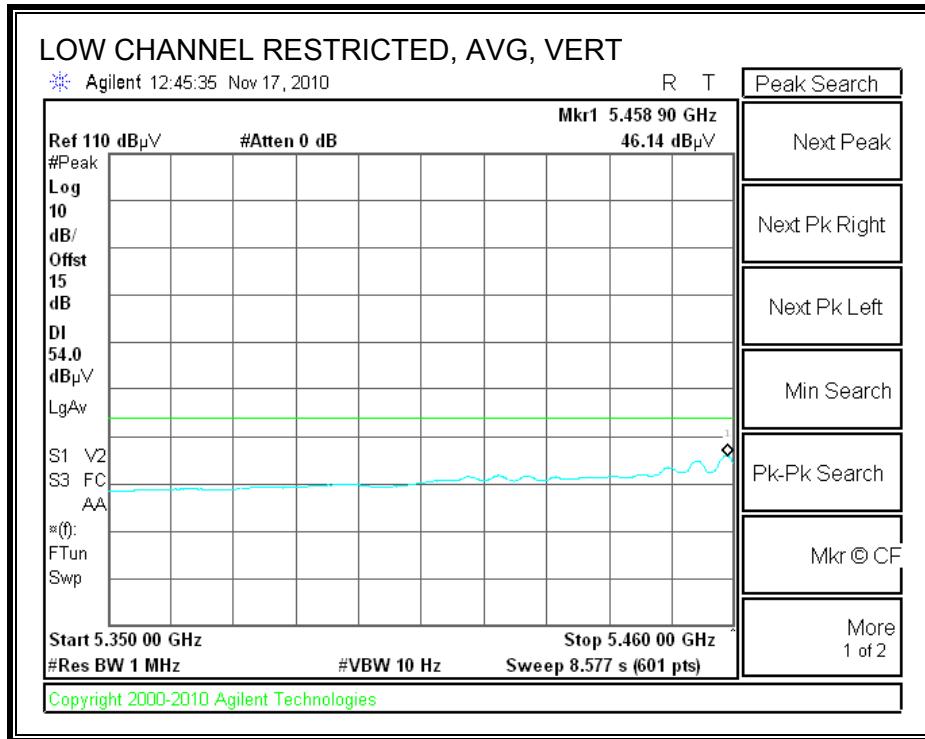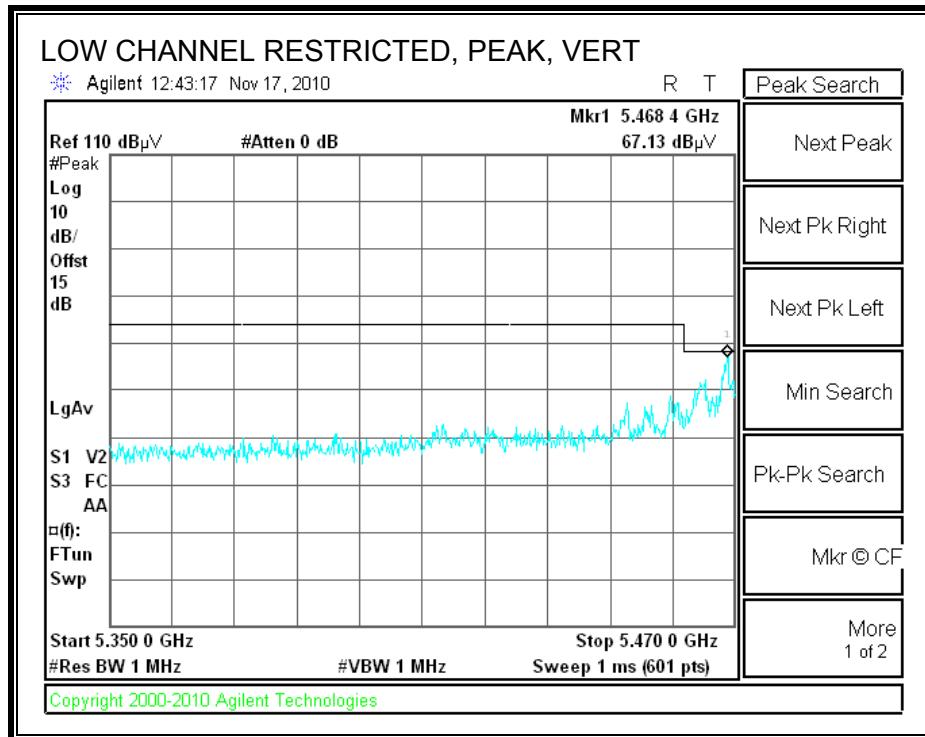

AUTHORIZED BANDEDGE (HIGH CHANNEL, VERTICAL)

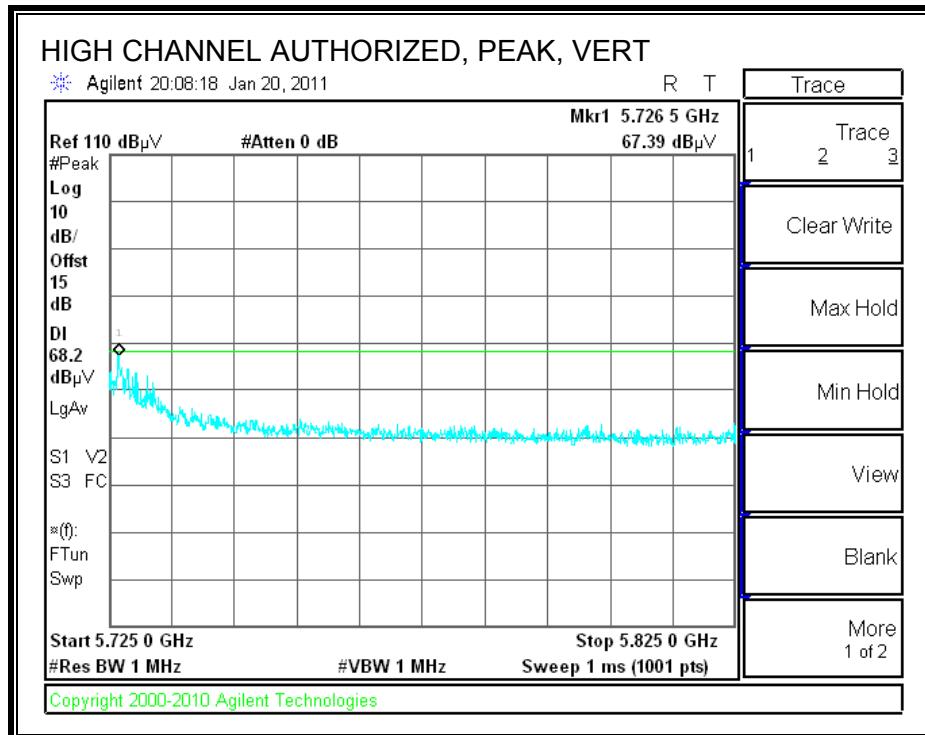



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																												
<p>Company: Broadcom Project #: 10U13492 Date: 11/17/2010 Test Engineer: Vien Tran Configuration: Mode: Tx 5.6GHz Band_11n HT20 3x3 CDD</p>																																												
<p><u>Test Equipment:</u></p> <table border="1"><tr><td>Horn 1-18GHz</td><td>Pre-amplifier 1-26GHz</td><td>Pre-amplifier 26-40GHz</td><td colspan="3">Horn > 18GHz</td></tr><tr><td>T60; S/N: 2238 @3m</td><td>T34 HP 8449B</td><td></td><td colspan="3"></td></tr><tr><td colspan="6">Hi Frequency Cables</td></tr><tr><td>3' cable 22807700</td><td>12' cable 22807600</td><td>20' cable 22807500</td><td>HPF</td><td>Reject Filter</td><td>Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz</td></tr><tr><td>3' cable 22807700</td><td>12' cable 22807600</td><td>20' cable 22807500</td><td></td><td></td><td>R_001</td></tr></table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz			T60; S/N: 2238 @3m	T34 HP 8449B					Hi Frequency Cables						3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz	3' cable 22807700	12' cable 22807600	20' cable 22807500			R_001
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz																																									
T60; S/N: 2238 @3m	T34 HP 8449B																																											
Hi Frequency Cables																																												
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																																							
3' cable 22807700	12' cable 22807600	20' cable 22807500			R_001																																							
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																													
LOW CHANNEL (100), 5500MHz																																												
11.000	3.0	50.1	34.6	37.6	9.2	-32.6	0.0	0.0	64.4	48.8	74	54	-9.6	-5.2	o 20																													
11.000	3.0	39.4	28.8	37.6	9.2	-32.6	0.0	0.0	53.6	43.0	74	54	-20.4	-11.0	H																													
MID CHANNEL (120), 5600MHz																																												
11.200	3.0	45.5	32.8	37.8	9.3	-32.6	0.0	0.0	60.0	47.3	74	54	-14.0	-6.7	V																													
11.200	3.0			37.8	9.3	-32.6	0.0	0.0	14.5	14.5	74	54	-59.5	-39.5	H																													
MID CHANNEL (140), 5700MHz																																												
11.400	3.0	46.6	31.8	38.0	9.4	-32.5	0.0	0.0	61.4	46.6	74	54	-12.6	-7.4	V																													
11.400	3.0	40.1	28.0	38.0	9.4	-32.5	0.0	0.0	54.9	42.8	74	54	-19.1	-11.2	H																													
															V																													
Rev. 07.22.09																																												
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit																																
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit																																
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit																																
AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit																																
CL	Cable Loss			HPF	High Pass Filter																																							

Tested with the highest output power as worst case of 21 dBm for all modes covered by HT20 3x3 CDD MCS0.

8.2.8. 802.11n HT40 SISO MODE IN THE 5.2 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

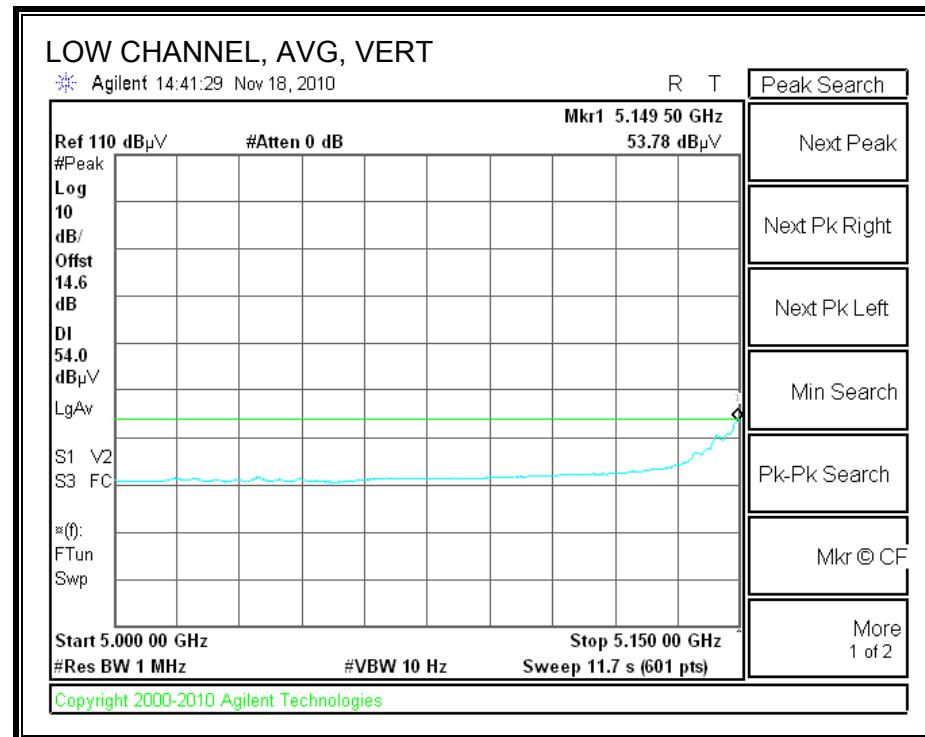
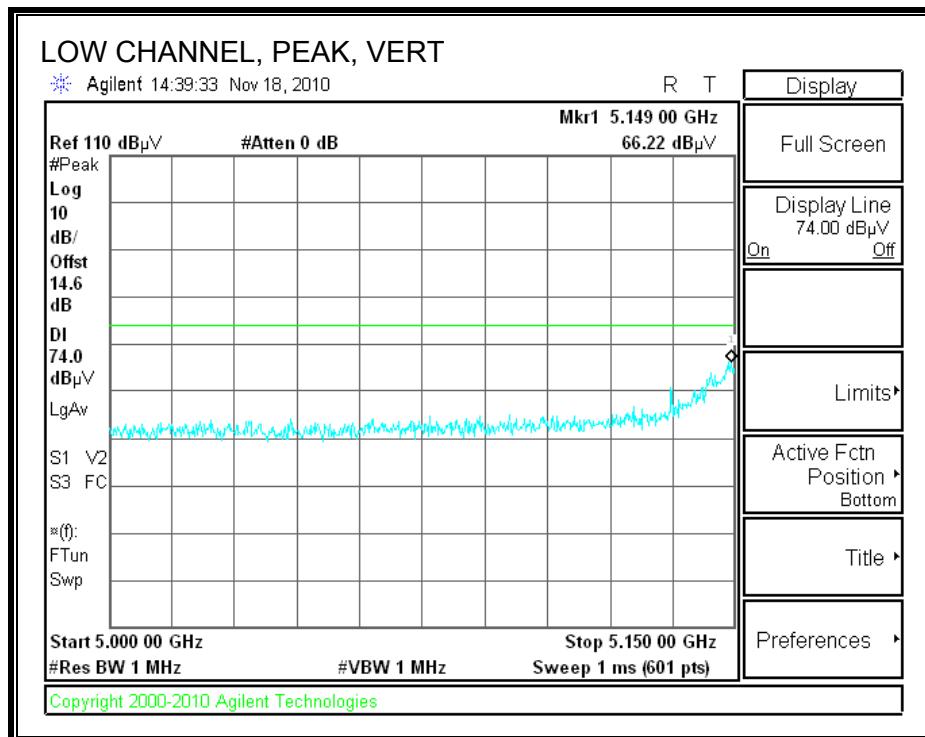


HARMONICS AND SPURIOUS EMISSIONS TESTS

It is covered by HT40 CDD 3x3 5MCS0 for radiated harmonics at worst case max power.

8.2.9. 802.11n HT40 SISO MODE IN THE 5.3 GHz BAND

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

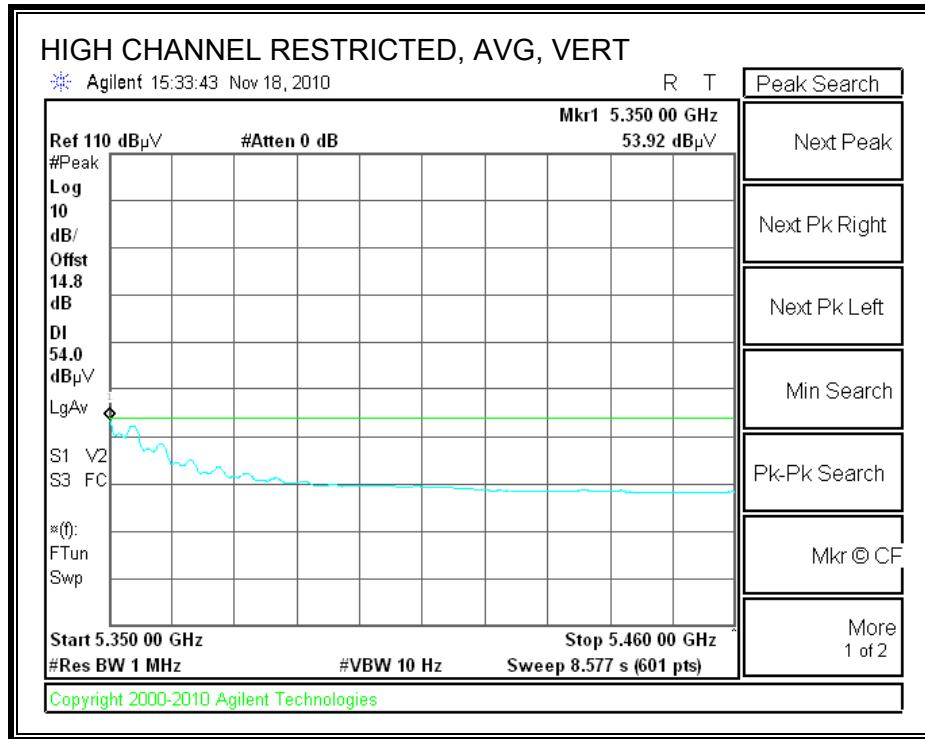
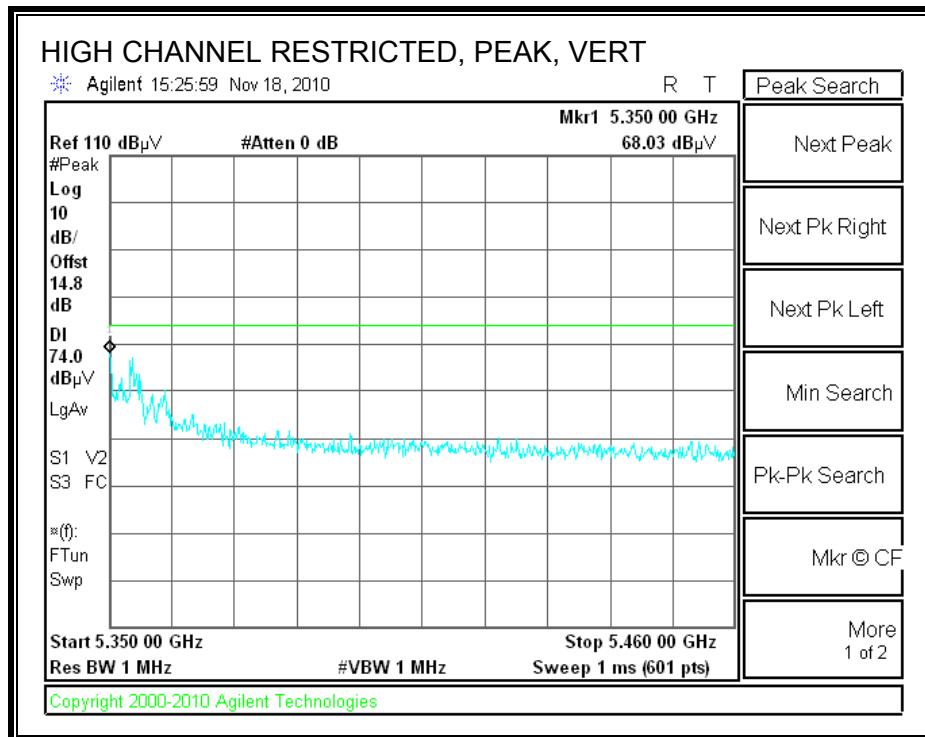


HARMONICS AND SPURIOUS EMISSIONS TESTS


Covered by HT40 3x3 CDD MCS0 for radiated harmonics at worst case max power.

8.2.10. 802.11n HT40 SISO MODE IN THE 5.6 GHz BAND

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

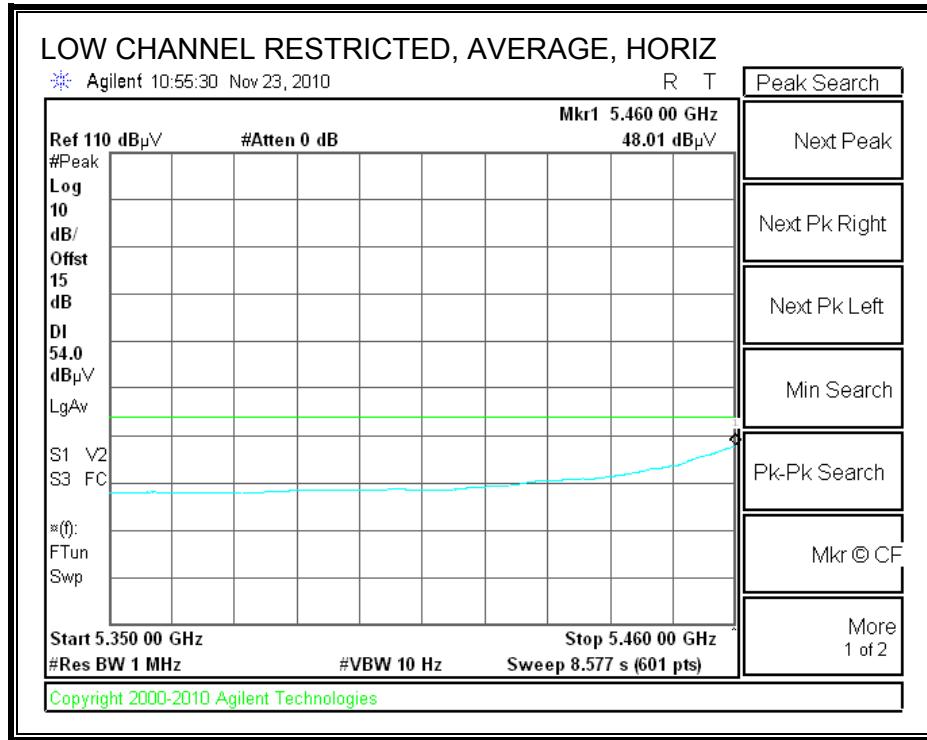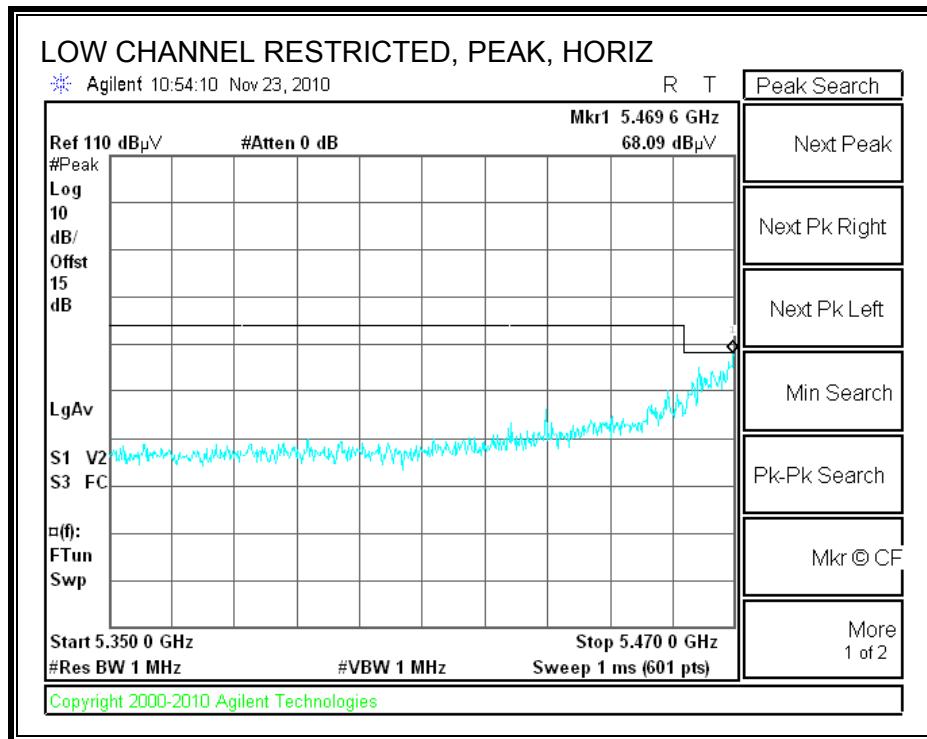

AUTHORIZED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

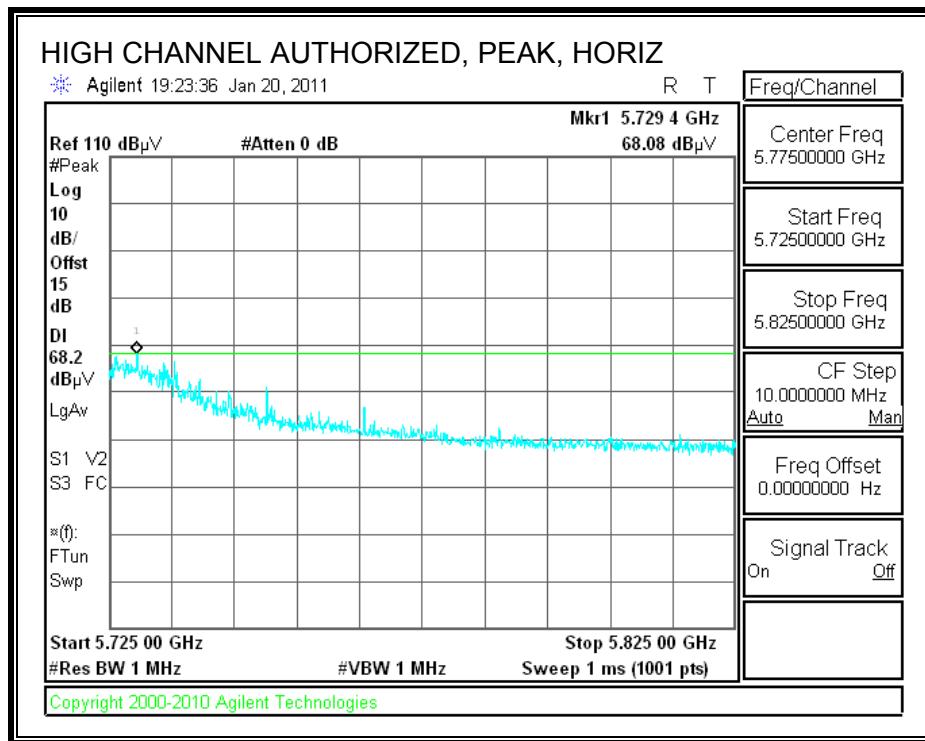

HARMONICS AND SPURIOUS EMISSIONS

Covered by HT40 3x3 CDD MCS0 for radiated harmonics at worst case max power.

8.2.11. 802.11n HT40 THREE CHAINS MODE IN THE 5.2 GHz BAND (CDD MCS0)

The CDD MCS0 mode is not implemented in the 5.2 GHz band and will be disabled in production devices.

Preliminary testing demonstrated that CDD MCS0 was the worst case of various HT40 modes, therefore radiated measurements in the CDD MCS0 mode were performed at the highest, worst-case power of all modes covered by these radiated test results.



HARMONICS AND SPURIOUS EMISSIONS

Tested at the worst case max output power of 17 dBm and apply to all the HT40 modes.

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																
Test Engr:	David Garcia															
Date:	01/13/11															
Project #:	10U13492															
Company:	Broadcom															
Test Target:	FCC 15.207															
Mode Oper:	TX, HT40 3x3 CDD MCS0															
f	Measurement Frequency															
Dist	Amp															
Read	Preamp Gain															
Read	Distance to Antenna															
AF	D Corr															
AF	Distance Correct to 3 meters															
CL	Avg															
CL	Average Field Strength @ 3 m															
CL	Margin vs. Average Limit															
CL	Margin vs. Peak Limit															
f	HPF															
f	High Pass Filter															
GHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol V/H	Det. P/A/QP	Notes			
Low Channel 5190 MHz																
15.570	3.0	29.7	38.4	11.4	-32.2	0.0	0.7	48.0	74.0	-26.0	V	P				
15.570	3.0	15.8	38.4	11.4	-32.2	0.0	0.7	34.1	54.0	-19.9	V	A				
High Channel 5230 MHz																
15.690	3.0	36.0	38.5	11.4	-34.7	0.0	0.7	51.9	74.0	-22.1	V	P				
15.690	3.0	24.5	38.5	11.4	-34.7	0.0	0.7	40.4	54.0	-13.6	V	A				
Rev. 4.1.2.7																
Note: No other emissions were detected above the system noise floor.																

8.2.12. 802.11n HT40 THREE CHAINS MODE IN THE 5.2 GHz BAND (STBC MCS0)

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

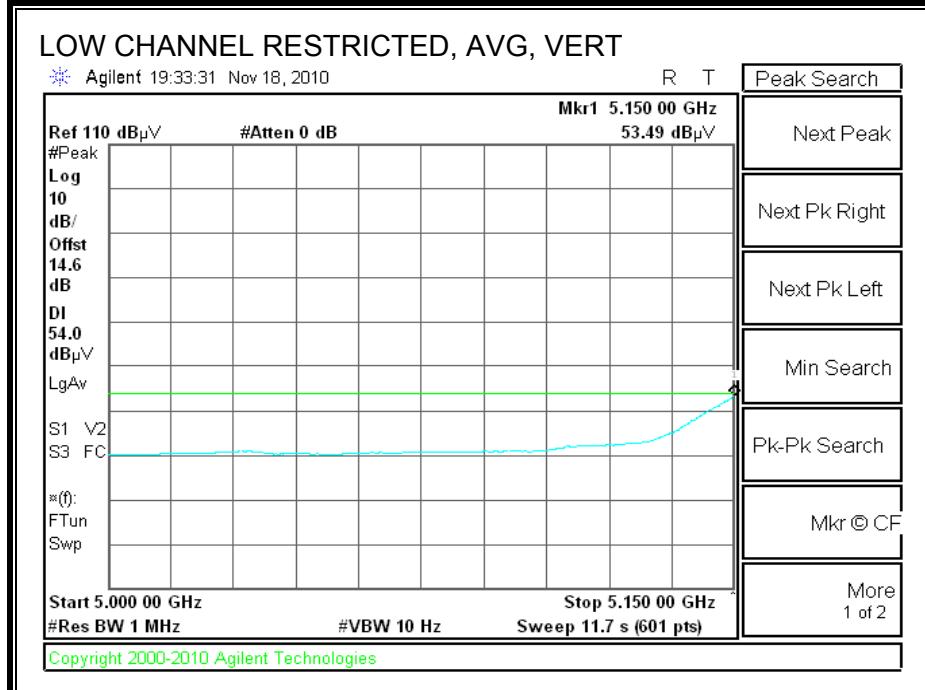
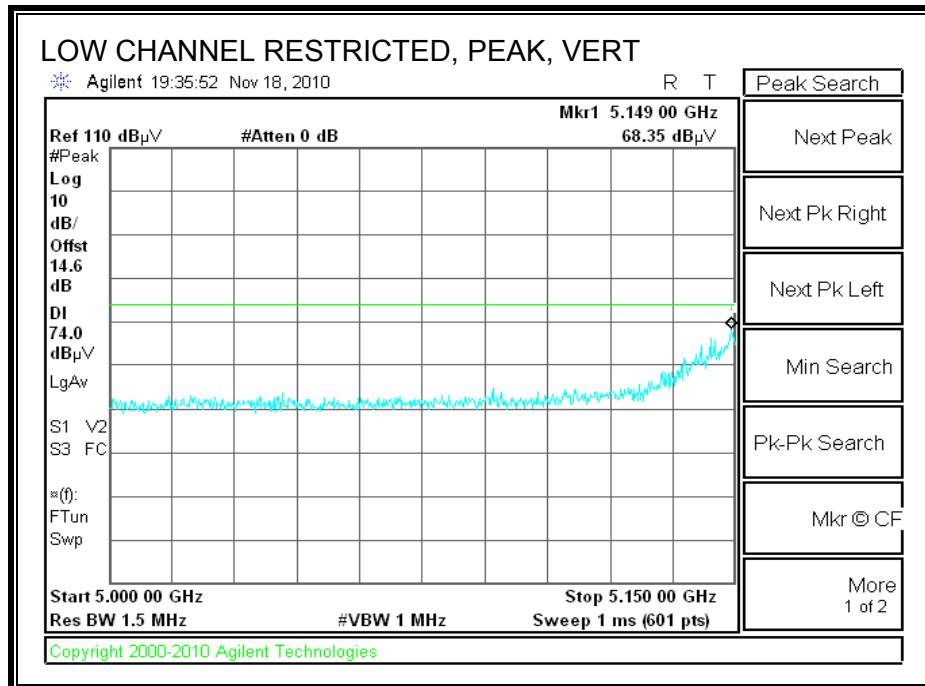


HARMONICS AND SPURIOUS EMISSIONS

Covered by HT40 3x3 CDD MCS0 radiated emission at worst case max power

8.2.13. 802.11n HT40 THREE CHAINS MODE IN THE 5.3 GHz BAND (CDD MCS0)

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

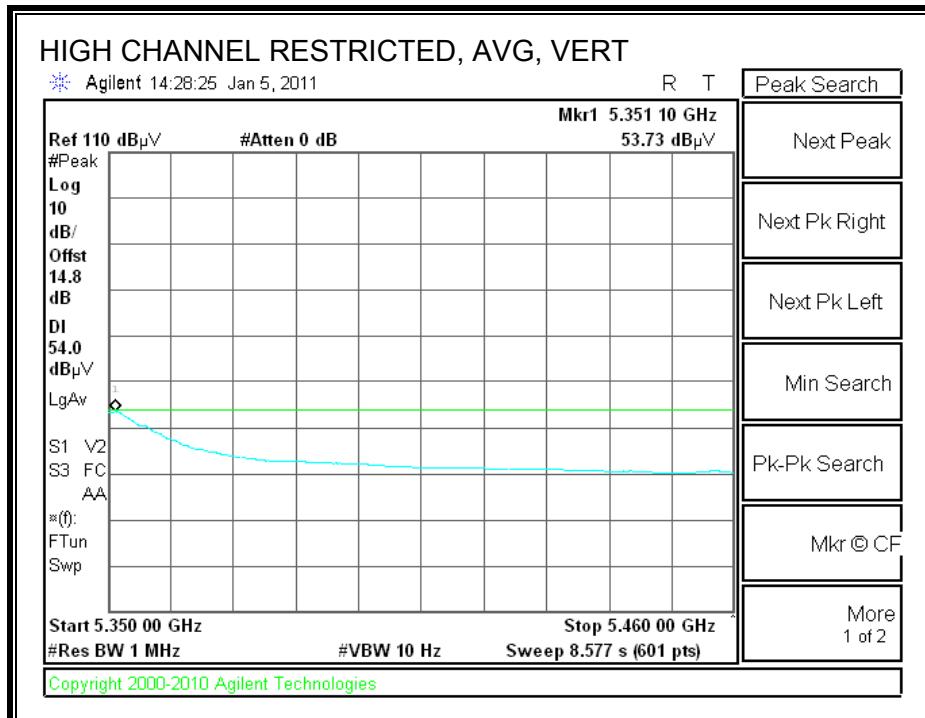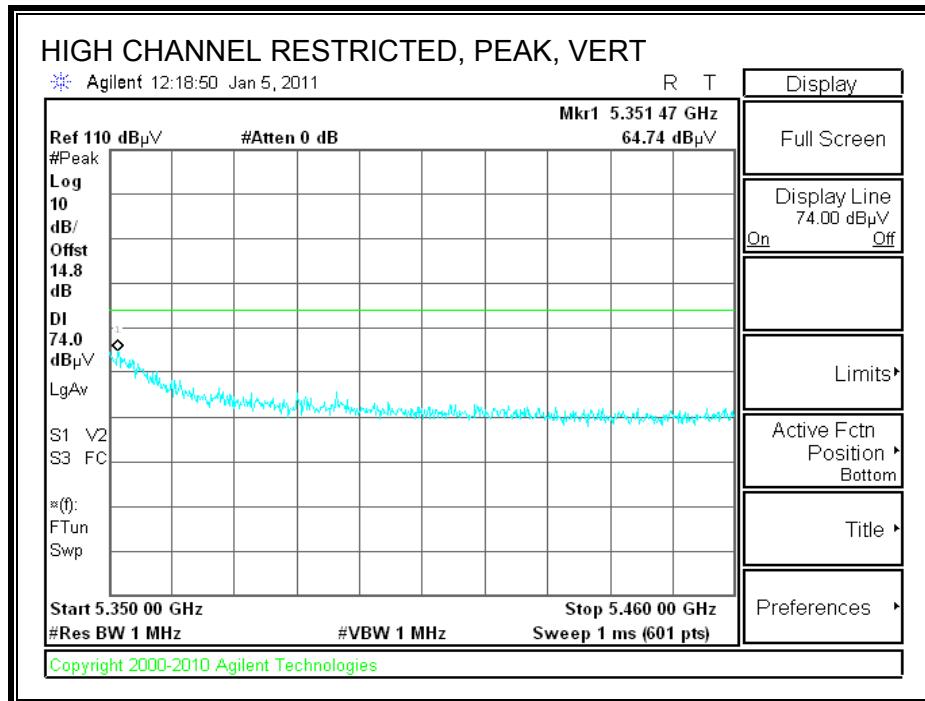

HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
Company:	BROADCOM														
Project #:	10U13492														
Date:	12/29/2010														
Test Engineer:	MENGISTU MEKURIA														
Configuration:	EUT WITH EXTERNAL ANTENNA AND LAPTOP														
Mode:	Tx 5.2 & 5.3GHz Band, 11in HT40 3x3 CDD														
Test Equipment:															
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit			
T73; S/N: 6717 @3m			T145 Agilent 3008A0056									FCC 16.209			
Hi Frequency Cables															
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001			Average Measurements RBW=1MHz ; VBW=10Hz
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF	CL	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
MID CHANNEL (54), S270MHz															
10.540	3.0	44.2	30.0	37.7	9.0	-34.4	0.0	0.0	56.5	42.3	74	54	-17.5	-11.7	V
10.540	3.0	40.0	27.4	37.7	9.0	-34.4	0.0	0.0	52.4	39.8	74	54	-21.6	-14.2	H
Rev. 07.22.09															
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit			
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit			
CL	Cable Loss			HPF	High Pass Filter										



Tested with the highest output power as worst case of 19 dBm for this mode HT40 3x3 CDD.

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber															
Company:	BROADCOM														
Project #:	10U13492														
Date:	11/17/2010														
Test Engineer:	VIEN TRAN														
Configuration:	EUT WITH EXTERNAL ANTENNA AND LAPTOP														
Mode:	Tx 5.3GHz Band_11n HT40 3x3 CDD														
Test Equipment:															
Horn 1-18GHz		Pre-amplifier 1-26GHz		Pre-amplifier 26-40GHz		Horn > 18GHz					Limit				
T60; S/N: 2238 @3m		T34 HP 8449B									FCC 15.205				
Hi Frequency Cables															
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF		Reject Filter		Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz		
3' cable 22807700			12' cable 22807600			20' cable 22807500					R_001				
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)
HIGH CHANNEL (64), 5310MHz															
10.620	3.0	39.9	27.8	37.6	9.0	-32.6	0.0	0.0	53.9	41.8	74	54	-20.1	-12.2	V
10.620	3.0	38.1	26.1	37.6	9.0	-32.6	0.0	0.0	52.1	40.1	74	54	-21.9	-13.9	H
Rev. 07.22.09															
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit			
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						PK Lim	Peak Field Strength Limit			
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit			
AF	Antenna Factor			Peak	Calculated Peak Field Strength						PK Mar	Margin vs. Peak Limit			
CL	Cable Loss			HPF	High Pass Filter										

Tested with the highest output power as worst case of 19 dBm for this mode HT40 3x3 CDD.

8.2.14. 802.11n HT40 THREE CHAINS MODE IN THE 5.3 GHz BAND (SDM MCS21)

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

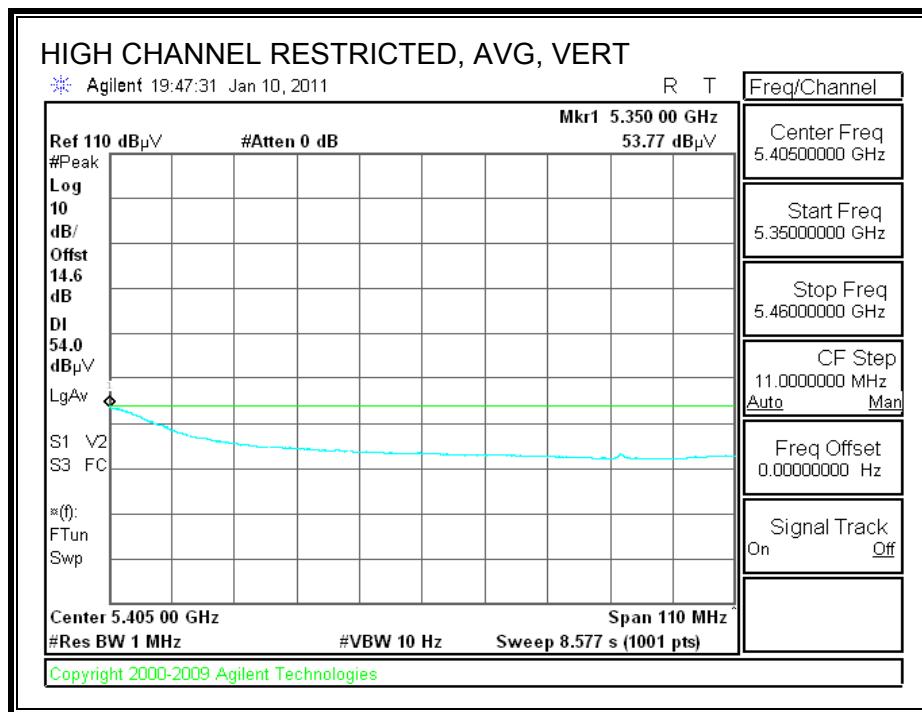
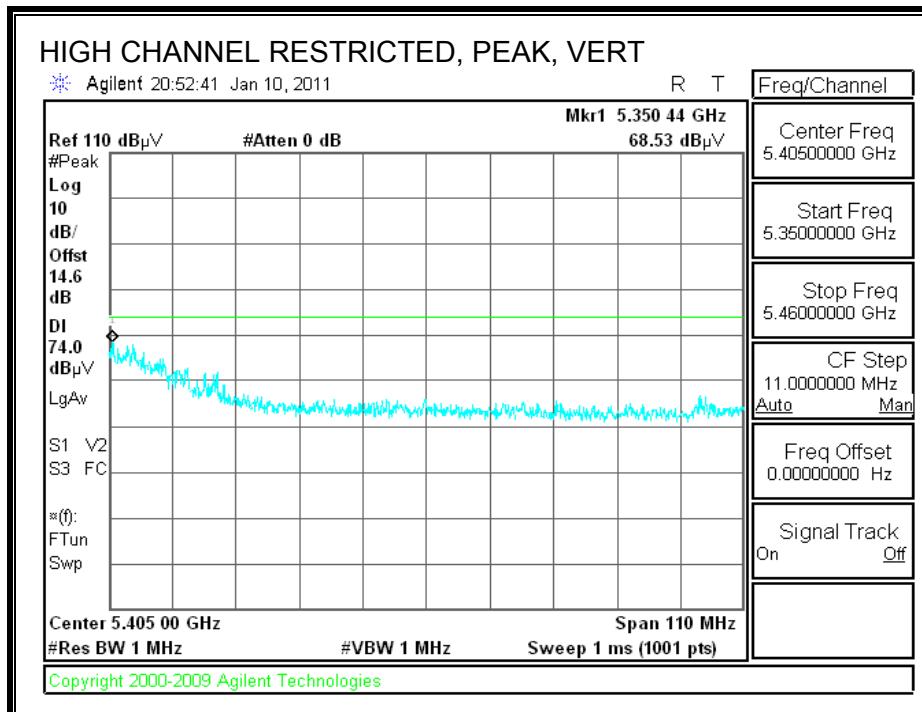


HARMONICS AND SPURIOUS EMISSIONS


Covered by HT40 3x3 CDD MCS0 for radiated harmonics at worst case max power.

8.2.15. 802.11n HT40 THREE CHAINS MODE IN THE 5.6 GHz BAND (CDD MCS0)

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

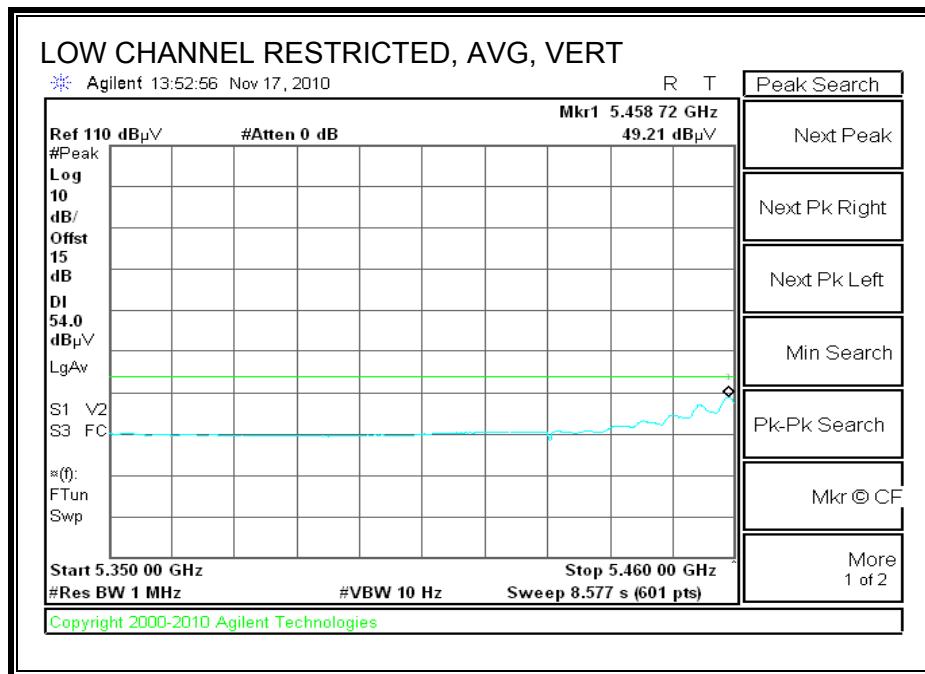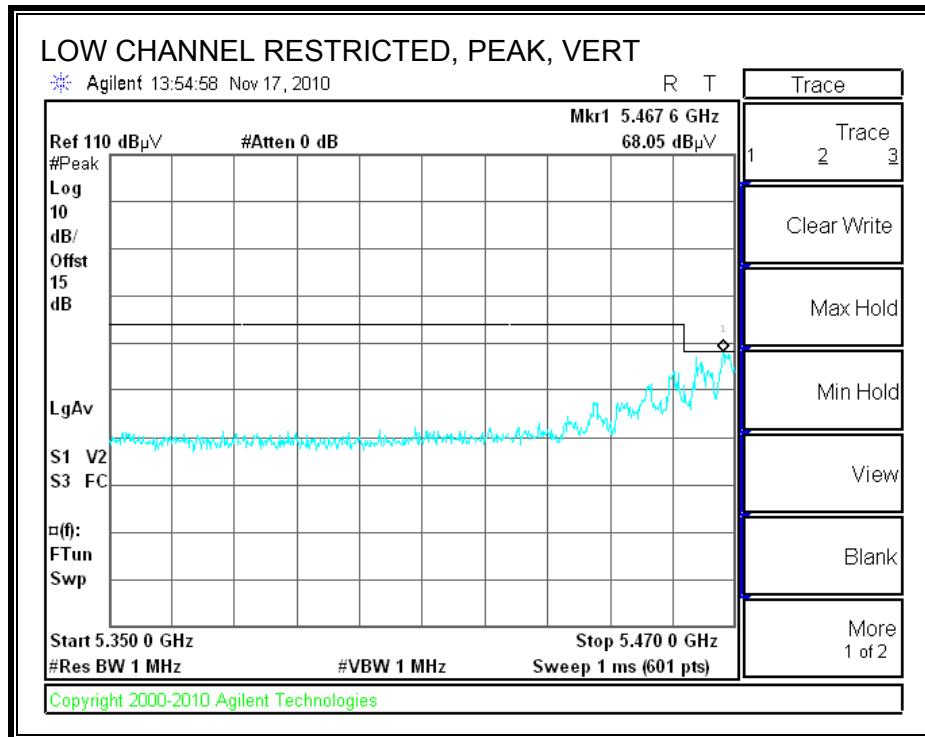

AUTHORIZED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

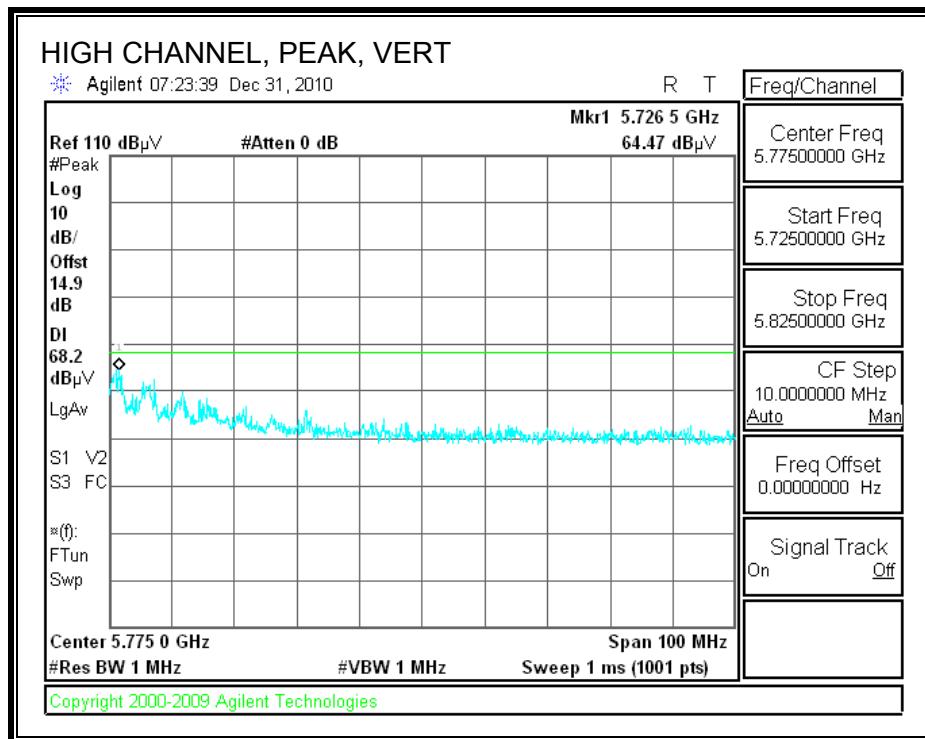



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																
Company: Broadcom Project #: 10U13492 Date: 11/17/2010 Test Engineer: Vien Tran Configuration: EUT/antenna Mode: Tx 5.6GHz Band_11n HT40 3x3 CDD																
Test Equipment:																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T60; S/N: 2238 @3m			T34 HP 8449B									FCC 15.205				
Hi Frequency Cables																
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz	
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001			Average Measurements RBW=1MHz ; VBW=10Hz	
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuVm	Avg dBuVm	Pk Lim dBuVm	Avg Lim dBuVm	Pk Mar dB	Avg Mar dB	Notes (V/H)	
LOW CHANNEL (102), 5510MHz																
11.020	3.0	38.9	28.5	37.6	9.2	-32.6	0.0	0.0	53.2	42.8	74	54	-20.8	-11.2	V	
11.020	3.0	36.8	25.8	37.6	9.2	-32.6	0.0	0.0	51.1	40.1	74	54	-22.9	-13.9	H	
MID CHANNEL (118), 5590MHz																
11.180	3.0	39.9	28.5	37.7	9.3	-32.6	0.0	0.0	54.4	43.0	74	54	-19.6	-11.0	V	
11.180	3.0	38.2	26.8	37.7	9.3	-32.6	0.0	0.0	52.7	41.3	74	54	-21.3	-12.7	H	
HIGH CHANNEL (134), 5670MHz																
11.340	3.0	45.1	32.3	37.9	9.4	-32.6	0.0	0.0	59.8	47.1	74	54	-14.2	-6.9	V	
11.340	3.0	42.5	29.6	37.9	9.4	-32.6	0.0	0.0	57.3	44.4	74	54	-16.7	-9.6	H	
Rev. 07.22.09																


Tested with the highest output power as worst case of 21 dBm for this mode HT40 3x3 CDD MCS0.

8.2.16. 802.11n HT40 THREE CHAINS MODE IN THE 5.6 GHz BAND (SDM MCS21)

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

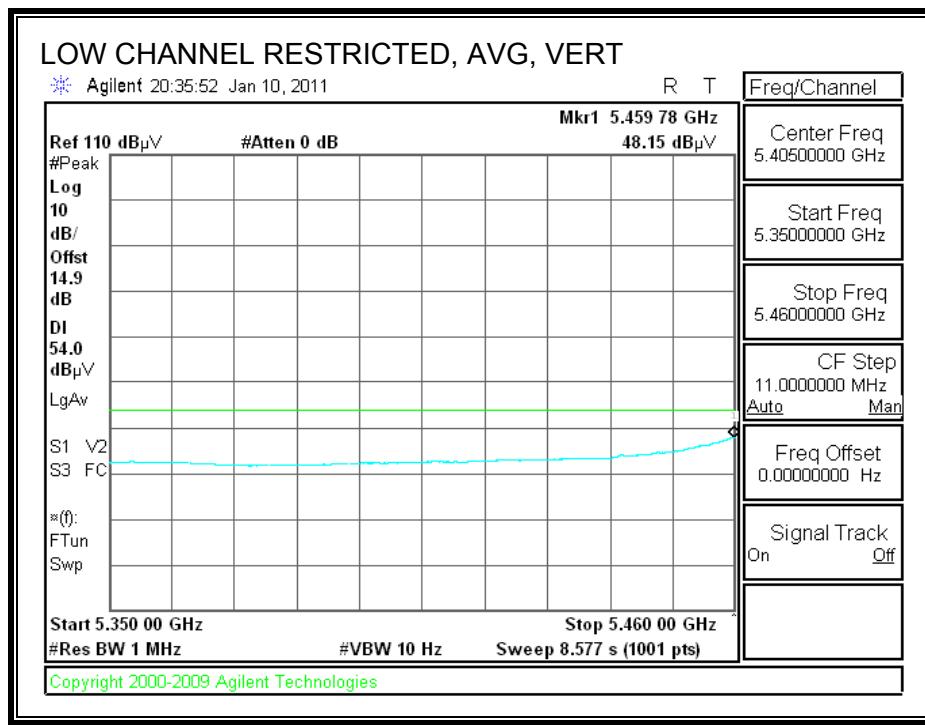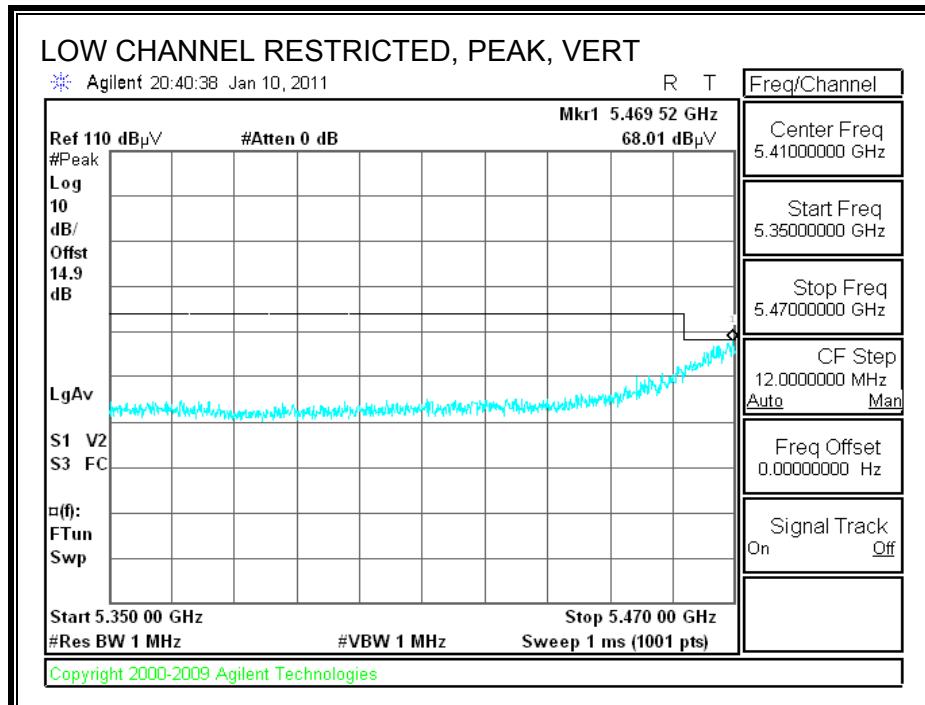

AUTHORIZED BANDEDGE (HIGH CHANNEL, VERTICAL)

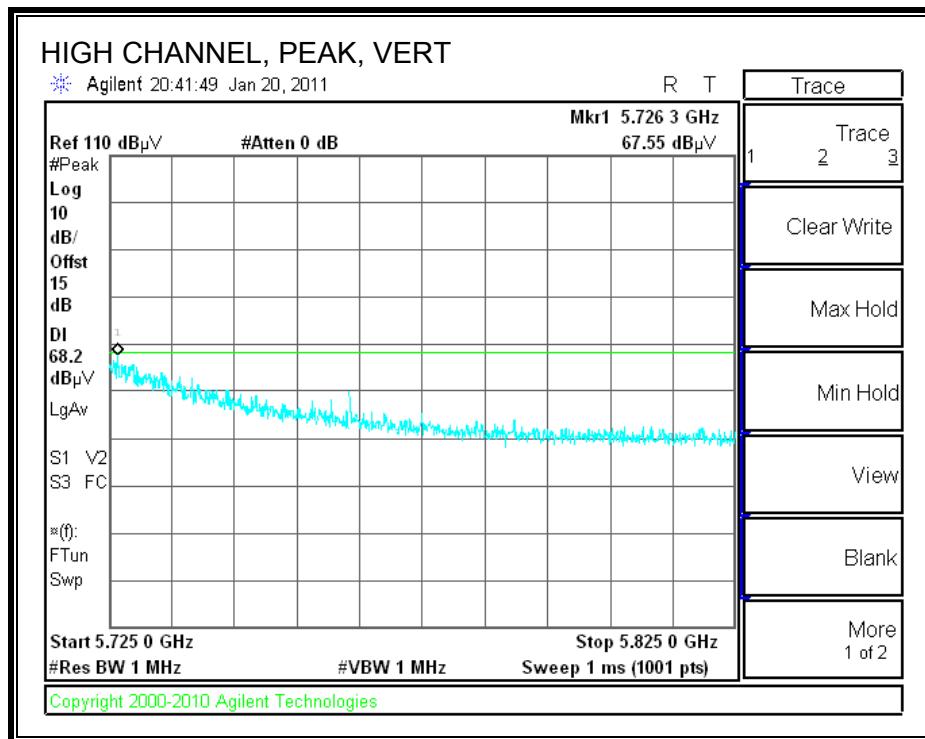

HARMONICS AND SPURIOUS EMISSIONS

Covered by HT40 3x3 CDD MCS0 for radiated harmonics at worst case max power.

8.3. RECEIVER ABOVE 1 GHz

8.3.1. 20 MHz BANDWIDTH

High Frequency Measurement Compliance Certification Services, Fremont 3m Chamber																																																																																																																																																																																																																																																																																									
<p>Company: Broadcom Project #: 10U13492 Date: 12/23/10 Test Engineer: Mengistu Mekuria Configuration: EUT / Laptop Mode: Rx Mode_20MHz Bandwidth</p> <p><u>Test Equipment:</u></p> <table border="1"> <tr> <th>Horn 1-18GHz</th> <th>Pre-amplifier 1-26GHz</th> <th>Pre-amplifier 26-40GHz</th> <th colspan="4">Horn > 18GHz</th> <th>Limit</th> </tr> <tr> <td>T73; S/N: 6717 @3m</td> <td>T145 Agilent 3008A005c</td> <td></td> <td colspan="4"></td> <td>RX RSS 210</td> </tr> <tr> <td colspan="15">Hi Frequency Cables</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4">HPF</td> <td>Reject Filter</td> <td colspan="4">Peak Measurements RBW=VBW=1MHz</td> <td colspan="3">Average Measurements RBW=1MHz ; VBW=10Hz</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4"></td> <td></td> <td colspan="4"></td> <td colspan="3"></td> </tr> </table> <table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr><td>1.320</td><td>3.0</td><td>55.7</td><td>35.8</td><td>24.9</td><td>2.7</td><td>-35.9</td><td>0.0</td><td>0.0</td><td>47.4</td><td>27.6</td><td>74</td><td>54</td><td>-26.6</td><td>-26.4</td><td>H</td></tr> <tr><td>1.595</td><td>3.0</td><td>53.4</td><td>37.8</td><td>25.9</td><td>3.0</td><td>-35.7</td><td>0.0</td><td>0.0</td><td>46.6</td><td>31.0</td><td>74</td><td>54</td><td>-27.4</td><td>-23.0</td><td>H</td></tr> <tr><td>1.795</td><td>3.0</td><td>52.9</td><td>35.1</td><td>26.5</td><td>3.2</td><td>-35.5</td><td>0.0</td><td>0.0</td><td>47.1</td><td>29.3</td><td>74</td><td>54</td><td>-26.9</td><td>-24.7</td><td>H</td></tr> <tr><td>2.500</td><td>3.0</td><td>53.8</td><td>33.0</td><td>28.5</td><td>3.9</td><td>-35.1</td><td>0.0</td><td>0.0</td><td>51.1</td><td>30.4</td><td>74</td><td>54</td><td>-22.9</td><td>-23.6</td><td>H</td></tr> <tr><td>5.000</td><td>3.0</td><td>48.3</td><td>27.3</td><td>33.2</td><td>5.9</td><td>-34.9</td><td>0.0</td><td>0.0</td><td>52.6</td><td>31.6</td><td>74</td><td>54</td><td>-21.4</td><td>-22.4</td><td>H</td></tr> <tr><td>1.035</td><td>3.0</td><td>55.6</td><td>38.7</td><td>24.0</td><td>2.4</td><td>-36.1</td><td>0.0</td><td>0.0</td><td>45.9</td><td>29.0</td><td>74</td><td>54</td><td>-28.1</td><td>-25.0</td><td>V</td></tr> <tr><td>1.106</td><td>3.0</td><td>57.4</td><td>41.5</td><td>24.2</td><td>2.5</td><td>-36.1</td><td>0.0</td><td>0.0</td><td>48.0</td><td>32.2</td><td>74</td><td>54</td><td>-26.0</td><td>-21.8</td><td>V</td></tr> <tr><td>1.795</td><td>3.0</td><td>53.3</td><td>34.9</td><td>26.5</td><td>3.2</td><td>-35.5</td><td>0.0</td><td>0.0</td><td>47.5</td><td>29.2</td><td>74</td><td>54</td><td>-26.5</td><td>-24.8</td><td>V</td></tr> <tr><td>2.490</td><td>3.0</td><td>55.2</td><td>33.5</td><td>28.5</td><td>3.9</td><td>-35.1</td><td>0.0</td><td>0.0</td><td>52.5</td><td>30.8</td><td>74</td><td>54</td><td>-21.5</td><td>-23.2</td><td>V</td></tr> <tr><td>5.000</td><td>3.0</td><td>51.5</td><td>27.9</td><td>33.2</td><td>5.9</td><td>-34.9</td><td>0.0</td><td>0.0</td><td>55.8</td><td>32.2</td><td>74</td><td>54</td><td>-18.2</td><td>-21.8</td><td>V</td></tr> </tbody> </table> <p>No other emissions were detected above system noise floor</p> <table border="1"> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td></td> <td></td> </tr> </table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T73; S/N: 6717 @3m	T145 Agilent 3008A005c						RX RSS 210	Hi Frequency Cables															3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz				Average Measurements RBW=1MHz ; VBW=10Hz			3' cable 22807700	12' cable 22807600	20' cable 22807500													f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	1.320	3.0	55.7	35.8	24.9	2.7	-35.9	0.0	0.0	47.4	27.6	74	54	-26.6	-26.4	H	1.595	3.0	53.4	37.8	25.9	3.0	-35.7	0.0	0.0	46.6	31.0	74	54	-27.4	-23.0	H	1.795	3.0	52.9	35.1	26.5	3.2	-35.5	0.0	0.0	47.1	29.3	74	54	-26.9	-24.7	H	2.500	3.0	53.8	33.0	28.5	3.9	-35.1	0.0	0.0	51.1	30.4	74	54	-22.9	-23.6	H	5.000	3.0	48.3	27.3	33.2	5.9	-34.9	0.0	0.0	52.6	31.6	74	54	-21.4	-22.4	H	1.035	3.0	55.6	38.7	24.0	2.4	-36.1	0.0	0.0	45.9	29.0	74	54	-28.1	-25.0	V	1.106	3.0	57.4	41.5	24.2	2.5	-36.1	0.0	0.0	48.0	32.2	74	54	-26.0	-21.8	V	1.795	3.0	53.3	34.9	26.5	3.2	-35.5	0.0	0.0	47.5	29.2	74	54	-26.5	-24.8	V	2.490	3.0	55.2	33.5	28.5	3.9	-35.1	0.0	0.0	52.5	30.8	74	54	-21.5	-23.2	V	5.000	3.0	51.5	27.9	33.2	5.9	-34.9	0.0	0.0	55.8	32.2	74	54	-18.2	-21.8	V	f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter		
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																																																																		
T73; S/N: 6717 @3m	T145 Agilent 3008A005c						RX RSS 210																																																																																																																																																																																																																																																																																		
Hi Frequency Cables																																																																																																																																																																																																																																																																																									
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF				Reject Filter	Peak Measurements RBW=VBW=1MHz				Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																																																													
3' cable 22807700	12' cable 22807600	20' cable 22807500																																																																																																																																																																																																																																																																																							
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																																																										
1.320	3.0	55.7	35.8	24.9	2.7	-35.9	0.0	0.0	47.4	27.6	74	54	-26.6	-26.4	H																																																																																																																																																																																																																																																																										
1.595	3.0	53.4	37.8	25.9	3.0	-35.7	0.0	0.0	46.6	31.0	74	54	-27.4	-23.0	H																																																																																																																																																																																																																																																																										
1.795	3.0	52.9	35.1	26.5	3.2	-35.5	0.0	0.0	47.1	29.3	74	54	-26.9	-24.7	H																																																																																																																																																																																																																																																																										
2.500	3.0	53.8	33.0	28.5	3.9	-35.1	0.0	0.0	51.1	30.4	74	54	-22.9	-23.6	H																																																																																																																																																																																																																																																																										
5.000	3.0	48.3	27.3	33.2	5.9	-34.9	0.0	0.0	52.6	31.6	74	54	-21.4	-22.4	H																																																																																																																																																																																																																																																																										
1.035	3.0	55.6	38.7	24.0	2.4	-36.1	0.0	0.0	45.9	29.0	74	54	-28.1	-25.0	V																																																																																																																																																																																																																																																																										
1.106	3.0	57.4	41.5	24.2	2.5	-36.1	0.0	0.0	48.0	32.2	74	54	-26.0	-21.8	V																																																																																																																																																																																																																																																																										
1.795	3.0	53.3	34.9	26.5	3.2	-35.5	0.0	0.0	47.5	29.2	74	54	-26.5	-24.8	V																																																																																																																																																																																																																																																																										
2.490	3.0	55.2	33.5	28.5	3.9	-35.1	0.0	0.0	52.5	30.8	74	54	-21.5	-23.2	V																																																																																																																																																																																																																																																																										
5.000	3.0	51.5	27.9	33.2	5.9	-34.9	0.0	0.0	55.8	32.2	74	54	-18.2	-21.8	V																																																																																																																																																																																																																																																																										
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																																																																				
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																																																																				
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																																																																				
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																																																																				
CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																																																																						

8.3.2. 40 MHz BANDWIDTH

High Frequency Measurement Compliance Certification Services, Fremont 3m Chamber																
Company:	Broadcom															
Project #:	10U13492															
Date:	12/23/10															
Test Engineer:	Mengistu Mekuria															
Configuration:	EUT / Laptop															
Mode:	Rx Mode_40MHz Bandwidth															
<u>Test Equipment:</u>																
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit				
T60; S/N: 2238 @3m			T34 HP 8449B									RX RSS 210				
Hi Frequency Cables																
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz	
3' cable 22807700			12' cable 22807600			20' cable 22807500									Average Measurements RBW=1MHz ; VBW=10Hz	
f GHz	Dist (m)	Read Pk dBuV	Read Avg dBuV	AF	CL	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	
1.395	3.0	56.0	34.4	25.8	2.8	-37.7	0.0	0.0	46.9	25.3	74	54	-27.1	-28.7	H	
1.595	3.0	54.3	38.5	26.5	3.0	-37.4	0.0	0.0	46.3	30.5	74	54	-27.7	-23.5	H	
1.795	3.0	53.8	35.7	27.1	3.2	-37.2	0.0	0.0	47.0	28.9	74	54	-27.0	-25.1	H	
2.500	3.0	54.3	34.0	28.3	3.9	-36.3	0.0	0.0	50.3	30.0	74	54	-23.7	-24.0	H	
5.000	3.0	47.2	28.1	32.8	5.9	-34.8	0.0	0.0	51.2	32.1	74	54	-22.8	-21.9	H	
1.105	3.0	58.9	43.0	24.8	2.5	-38.1	0.0	0.0	48.1	32.2	74	54	-25.9	-21.8	V	
1.655	3.0	55.4	38.2	26.7	3.1	-37.4	0.0	0.0	47.8	30.6	74	54	-26.2	-23.4	V	
2.125	3.0	56.7	36.3	27.9	3.6	-36.7	0.0	0.0	51.5	31.1	74	54	-22.5	-22.9	V	
2.490	3.0	55.9	34.2	28.3	3.9	-36.3	0.0	0.0	51.8	30.1	74	54	-22.2	-23.9	V	
5.000	3.0	52.1	34.4	32.8	5.9	-34.8	0.0	0.0	56.0	38.4	74	54	-18.0	-15.6	V	
No other emissions were detected above system noise floor																
f	Measurement Frequency			Amp	Preamp Gain						Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters						Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m						Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor			Peak	Calculated Peak Field Strength						Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss			HPF	High Pass Filter											

8.4. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

HORIZONTAL AND VERTICAL DATA

9. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE


ANSI C63.4

RESULTS


6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq. (MHz)	Reading			Closs (dB)	Limit	EN_B	Margin		Remark
	PK (dBuV)	QP (dBuV)	AV (dBuV)				QP	AV	
0.17	58.99	--	44.66	0.00	64.77	54.77	-5.78	-10.11	L1
0.23	53.31	--	40.82	0.00	62.31	52.31	-9.00	-11.49	L1
0.29	49.37	--	39.80	0.00	60.50	50.50	-11.13	-10.70	L1
0.17	58.41	--	44.41	0.00	64.77	54.77	-6.36	-10.36	L2
0.23	52.82	--	41.82	0.00	62.38	52.38	-9.56	-10.56	L2
0.29	49.57	--	41.22	0.00	60.50	50.50	-10.93	-9.28	L2
6 Worst Data									

LINE 1 RESULTS

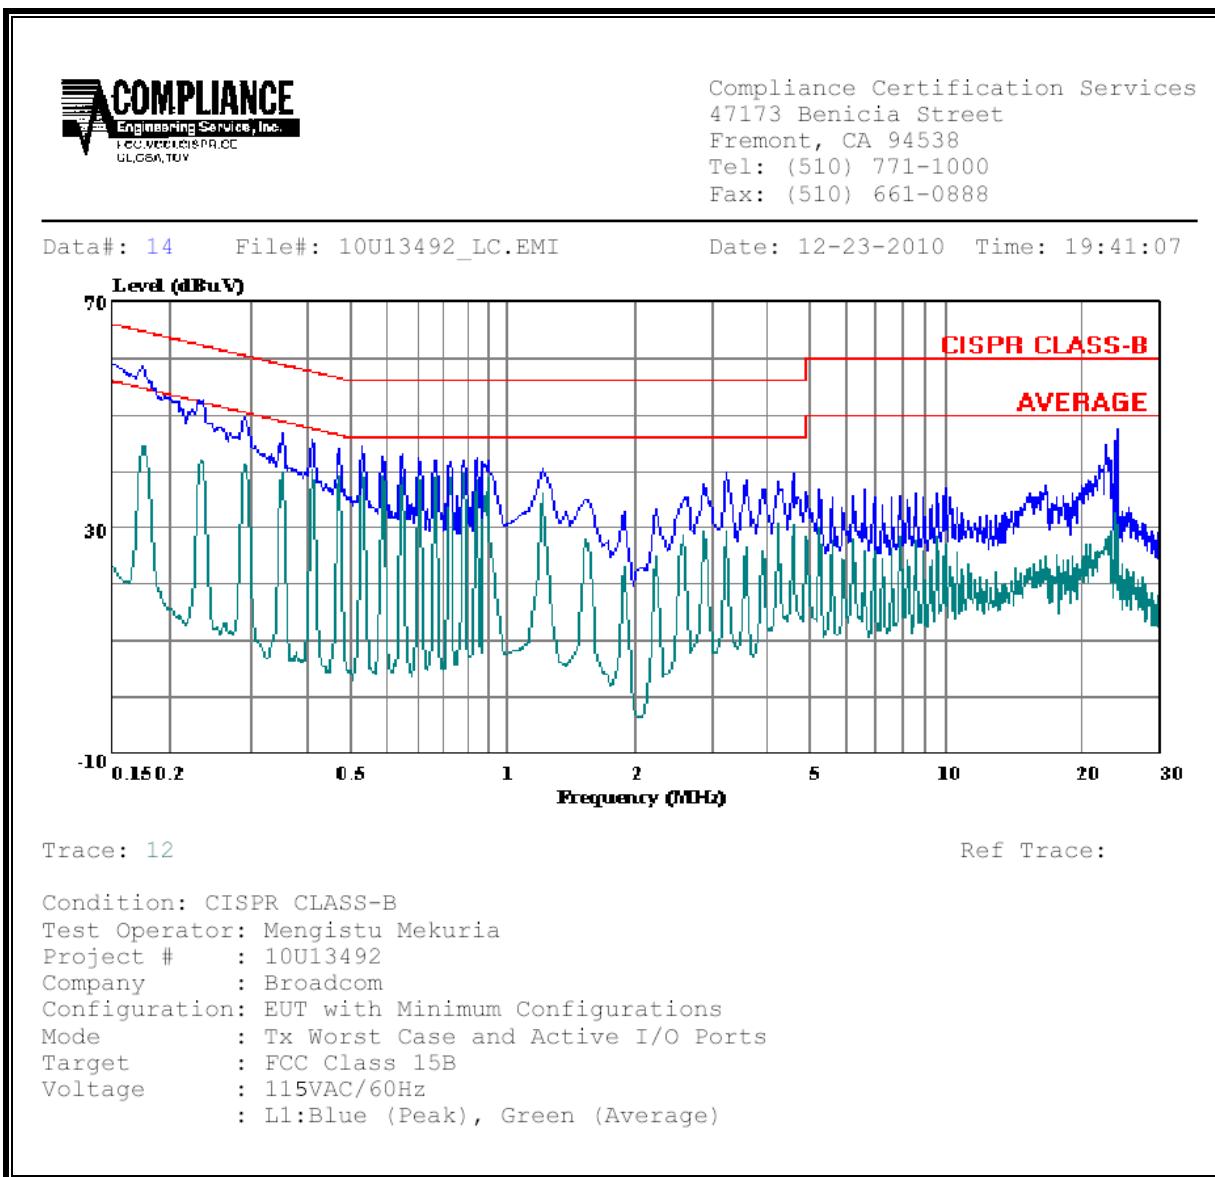

LINE 2 RESULTS

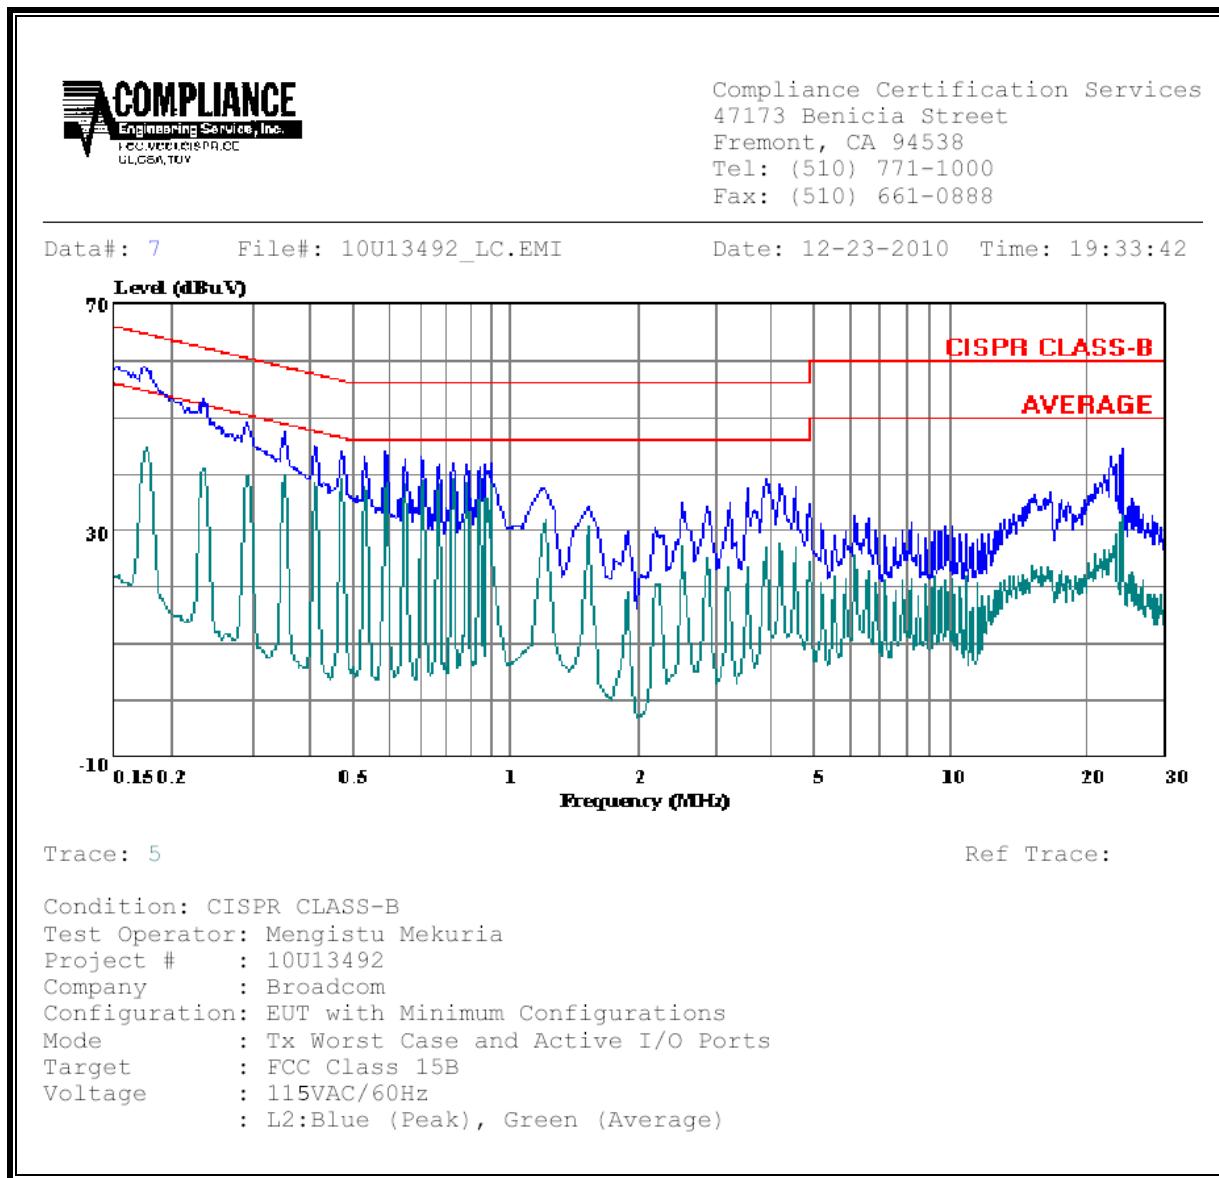

10. DYNAMIC FREQUENCY SELECTION

10.1. OVERVIEW

10.1.1. LIMITS

INDUSTRY CANADA

IC RSS-210 is closely harmonized with FCC Part 15 DFS rules. The deviations are as follows:

RSS-210 Issue 7 A9.4 (b) (ii) **Channel Availability Check Time:** ...

Additional requirements for the band 5600-5650 MHz: Until further notice, devices subject to this Section shall not be capable of transmitting in the band 5600-5650 MHz, so that Environment Canada weather radars operating in this band are protected.

RSS-210 Issue 7 A9.4 (b) (iv) **Channel closing time:** the maximum channel closing time is 260 ms.

FCC

§15.407 (h) and FCC 06-96 APPENDIX "COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVCIES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION".

Table 1: Applicability of DFS requirements prior to use of a channel

Requirement	Operational Mode		
	Master	Client (without radar detection)	Client (with radar detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
Uniform Spreading	Yes	Not required	Not required

Table 2: Applicability of DFS requirements during normal operation

Requirement	Operational Mode		
	Master	Client (without DFS)	Client (with DFS)
DFS Detection Threshold	Yes	Not required	Yes
Channel Closing Transmission Time	Yes	Yes	Yes
Channel Move Time	Yes	Yes	Yes

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64 dBm
< 200 milliwatt	-62 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna	
Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.	

Table 4: DFS Response requirement values

Parameter	Value
<i>Non-occupancy period</i>	30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds
<i>Channel Closing Transmission Time</i>	200 milliseconds + approx. 60 milliseconds over remaining 10 second period
The instant that the <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> begins is as follows:	
For the Short pulse radar Test Signals this instant is the end of the <i>Burst</i> .	
For the Frequency Hopping radar Test Signal, this instant is the end of the last radar burst generated.	
For the Long Pulse radar Test Signal this instant is the end of the 12 second period defining the radar transmission.	
The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate channel changes (an aggregate of approximately 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.	

Table 5 – Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (Microseconds)	PRI (Microseconds)	Pulses	Minimum Percentage of Successful Detection	Minimum Trials
1	1	1428	18	60%	30
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120

Table 6 – Long Pulse Radar Test Signal


Radar Waveform	Bursts	Pulses per Burst	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	.333	70%	30

10.1.2. TEST AND MEASUREMENT SYSTEM

RADIATED METHOD SYSTEM BLOCK DIAGRAM

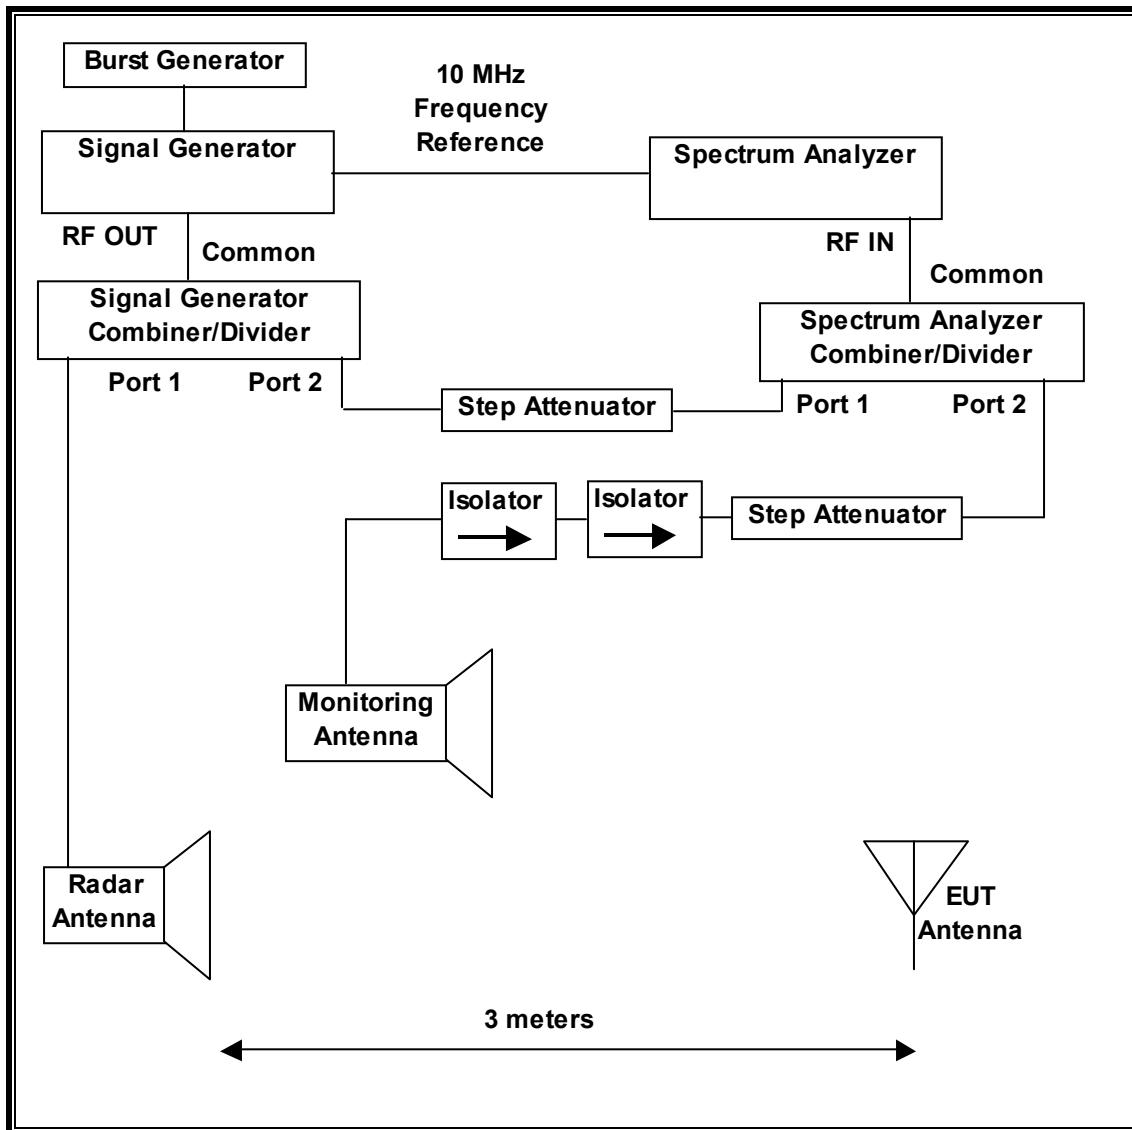

SYSTEM OVERVIEW

The short pulse and long pulse signal generating system utilizes the NTIA software. The Vector Signal Generator has been validated by the NTIA. The hopping signal generating system utilizes the CCS simulated hopping method and system, which has been validated by the DoD, FCC and NTIA. The software selects waveform parameters from within the bounds of the signal type on a random basis using uniform distribution.

The short pulse types 2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time.

The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the August 2005 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC 06-96 APPENDIX. The frequency of the signal generator is incremented in 1 MHz steps from F_L to F_H for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

SYSTEM CALIBRATION

A 50-ohm load is connected in place of the spectrum analyzer, and the spectrum analyzer is connected to a horn antenna via a coaxial cable, with the reference level offset set to (horn antenna gain – coaxial cable loss). The signal generator is set to CW mode. The amplitude of the signal generator is adjusted to yield a level of –64 dBm as measured on the spectrum analyzer.

Without changing any of the instrument settings, the spectrum analyzer is reconnected to the Common port of the Spectrum Analyzer Combiner/Divider. The Reference Level Offset of the spectrum analyzer is adjusted so that the displayed amplitude of the signal is –64 dBm.

The spectrum analyzer displays the level of the signal generator as received at the antenna ports of the Master Device. The interference detection threshold may be varied from the calibrated value of –64 dBm and the spectrum analyzer will still indicate the level as received by the Master Device.

ADJUSTMENT OF DISPLAYED TRAFFIC LEVEL

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. The video test file is streamed to generate WLAN traffic. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the DFS tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset Number	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00996	10/29/11
Vector Signal Generator, 20GHz	Agilent / HP	E8267C	C01066	02/12/12

10.1.3. SETUP OF EUT

RADIATED METHOD EUT TEST SETUP

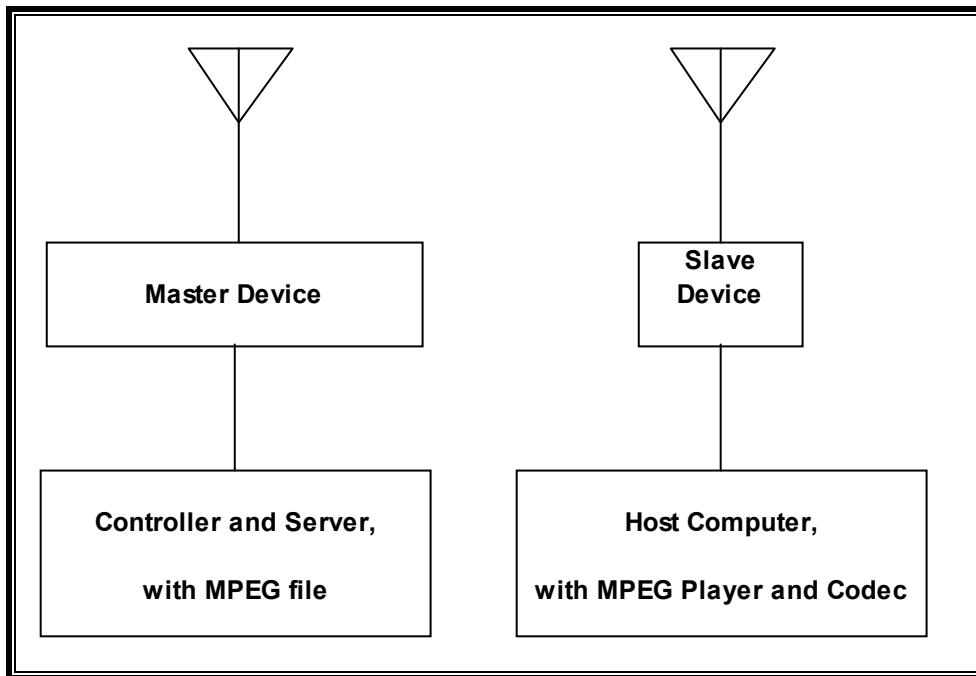

SUPPORT EQUIPMENT

The following test and measurement equipment was utilized for the DFS tests documented in this report:

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Wireless Access Point	Linksys	WRT600NV11	MNR007800466	Q87-WRT600NV11
AC Adapter (AP)	Linksys	DSA-30W-12	01008	DoC
Notebook PC (Host)	HP	Pavilion zv6000	CND5290401	DoC
AC Adapter (Host PC)	HP	PA-1121-12HD	58B240ALLRK0HU	DoC
Notebook PC (Client)	Dell	HEP-E2-C1	69 of 76	DoC
AC Adapter (Client PC)	Delta Electronics	DA65NS0-00	CN-0CF745-48661-741-2P2E	DoC

10.1.4. DESCRIPTION OF EUT

The EUT operates over the 5250-5350 MHz and 5470-5725 MHz ranges.

The EUT is a Slave Device without Radar Detection.

The highest power level within these bands is 29.91 dBm EIRP in the 5250-5350 MHz band and 27.12 dBm EIRP in the 5470-5725 MHz band.

The highest individual gain antenna assembly utilized with the EUT has a gain of 6.8 dBi in the 5250-5350 MHz band and 7.06 dBi in the 5470-5725 MHz band. The lowest individual gain antenna assembly utilized with the EUT has a gain of 2.98 dBi in the 5250-5350 MHz band and 4.04 dBi in the 5470-5725 MHz band.

Three non-identical antennas are utilized to meet the diversity and MIMO operational requirements.

The EUT uses three transmitter/receiver chains, each connected to an antenna to perform radiated tests.

WLAN traffic is generated by streaming the video file TestFile.mp2 "6 ½ Magic Hours" from the Master to the Slave in full motion video mode using Microsoft Media Player 9 version 9.00.00.3367 media player.

TPC is required since the maximum EIRP is greater than 500 mW (27 dBm).

The EUT utilizes the 802.11a/n architecture. Two nominal channel bandwidths are implemented: 20 MHz and 40 MHz.

The software installed in the EUT is revision 5.100.98.17

MANUFACTURER'S STATEMENT REGARDING UNIFORM CHANNEL SPREADING

Not Applicable for Slave Devices.

OVERVIEW OF MASTER DEVICE WITH RESPECT TO §15.407 (h) REQUIREMENTS

The Master Device is a Linux Access Point, FCC ID: Q87-WRT600NV11. The DFS software installed in the Master Device is Linux revision 4.101.27. The minimum antenna gain for the Master Device is 1.6 dBi.

The calibrated radiated DFS Detection Threshold level is set to -64 dBm.


10.2. RESULTS FOR 20 MHz BANDWIDTH

10.2.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5300 MHz.

10.2.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

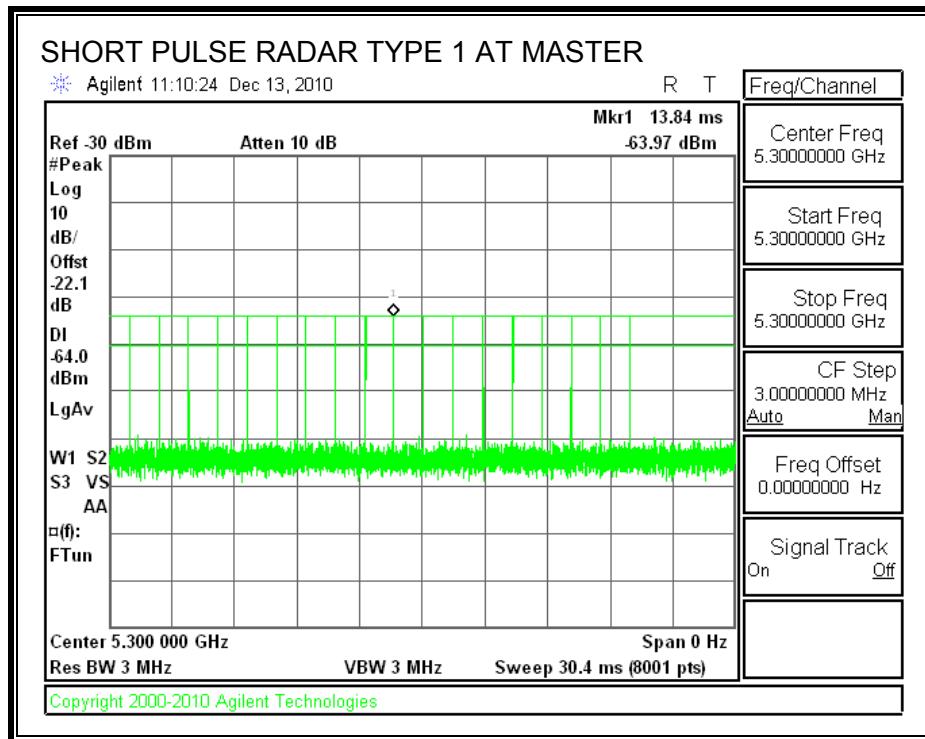

TRAFFIC

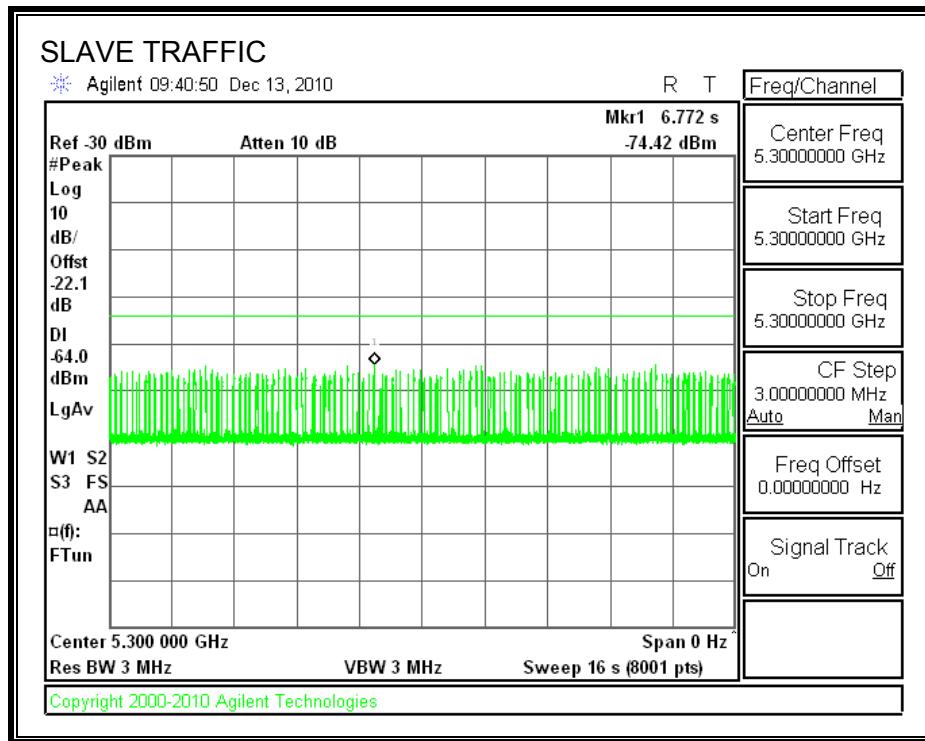

10.2.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

10.2.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the FCC aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).


The observation period over which the IC aggregate time is calculated begins at (Reference Marker) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


Agency	Channel Move Time (sec)	Limit (sec)
FCC / IC	4.024	10

Agency	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
FCC	48.0	60
IC	50.0	260

MOVE TIME

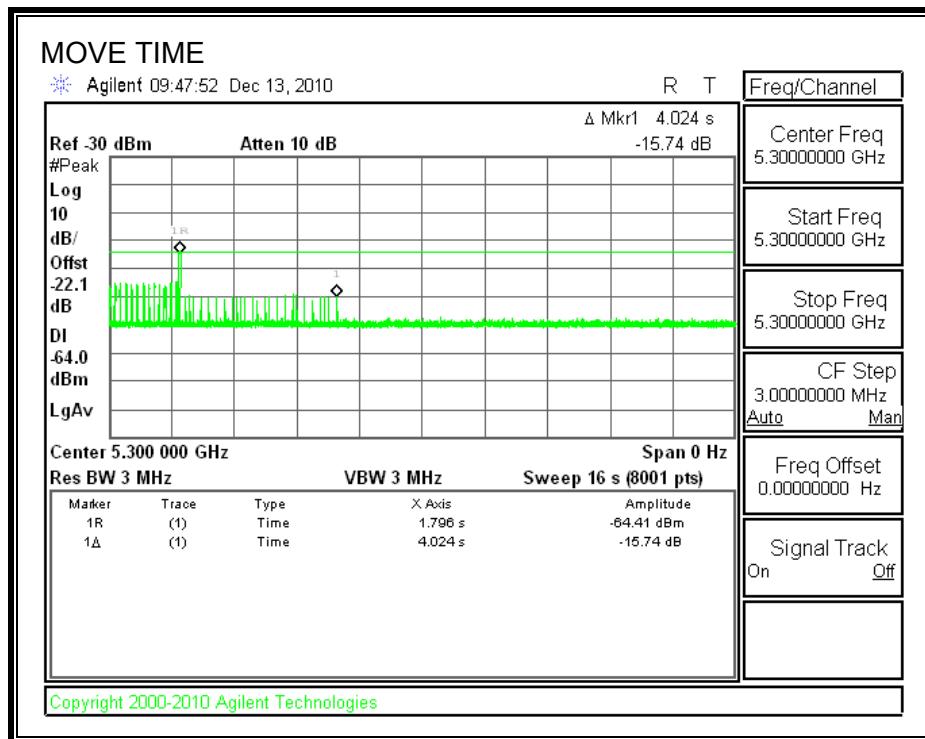


CHANNEL CLOSING TIME

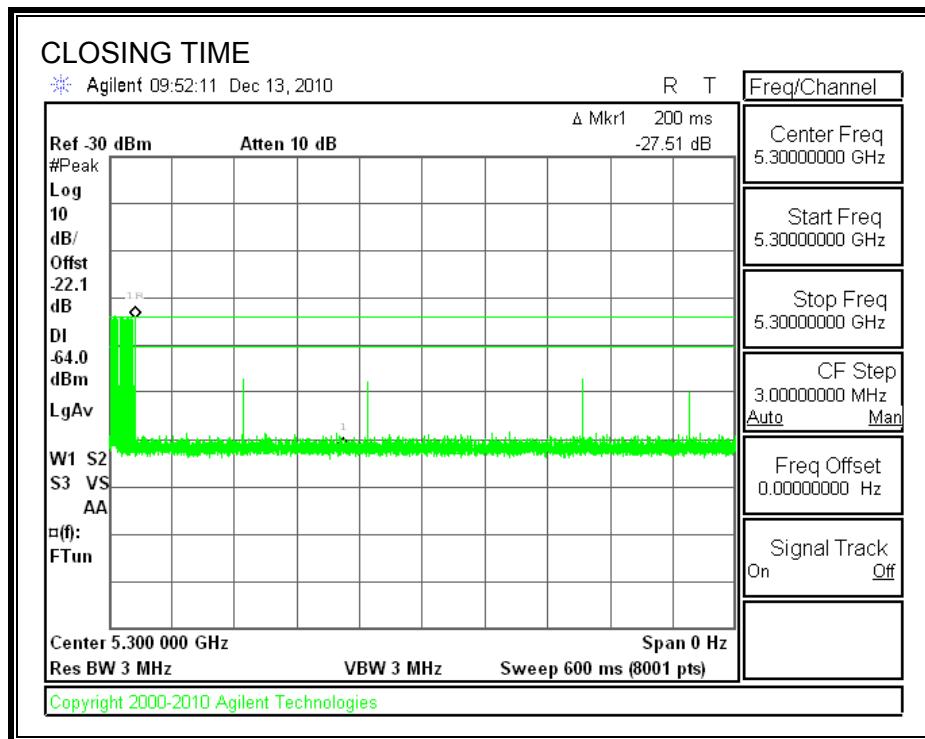


AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the FCC aggregate monitoring period.

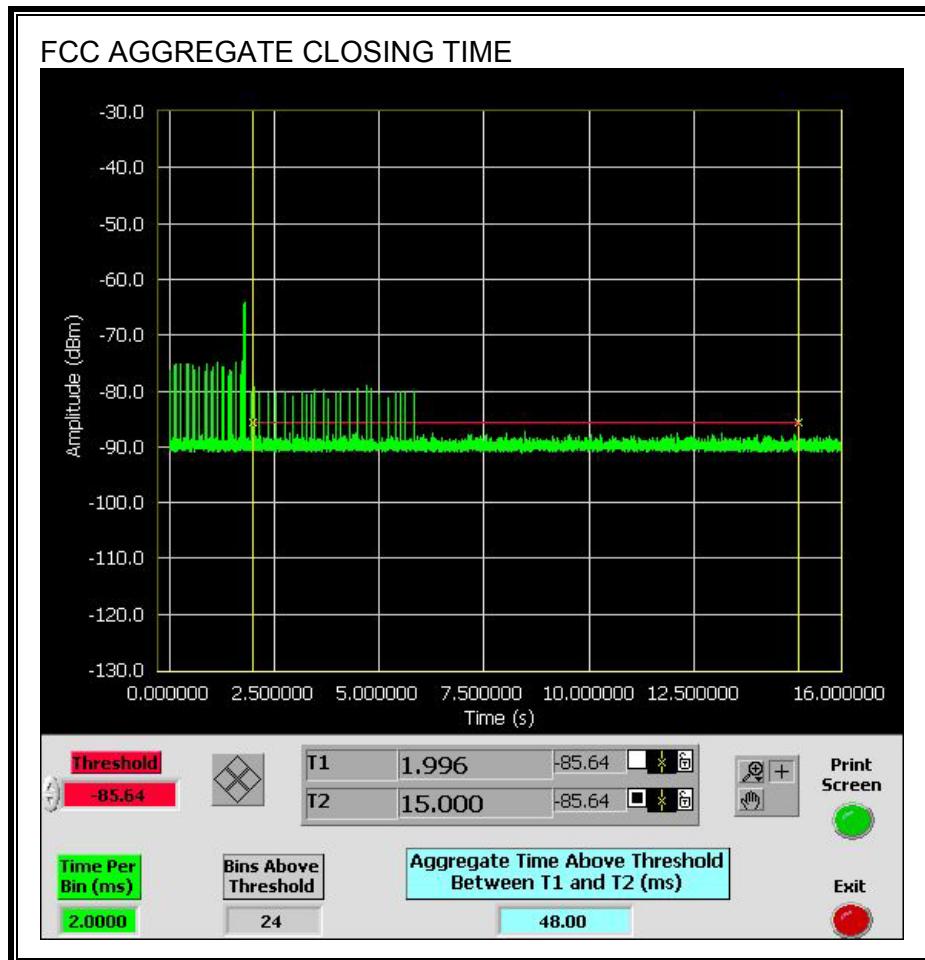

Only intermittent transmissions are observed during the IC aggregate monitoring period.

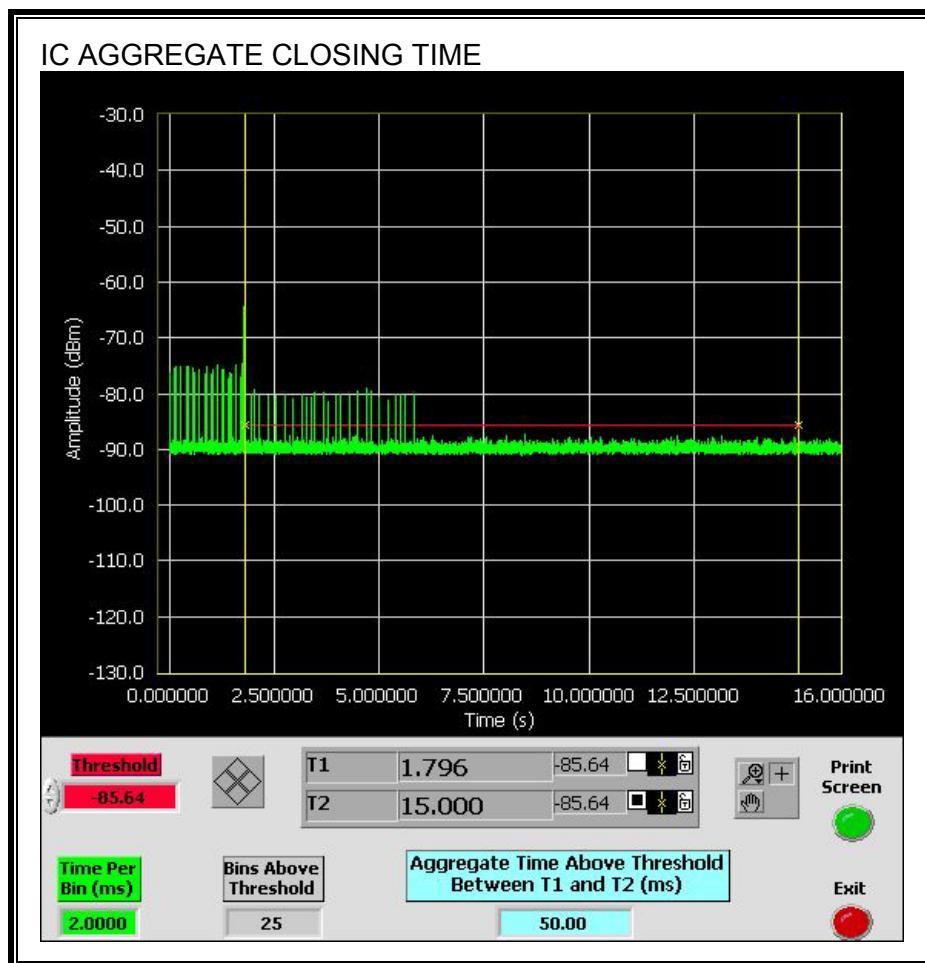


10.3. RESULTS FOR 40 MHz BANDWIDTH

10.3.1. TEST CHANNEL


All tests were performed at a channel center frequency of 5510 MHz.

10.3.2. RADAR WAVEFORM AND TRAFFIC

RADAR WAVEFORM

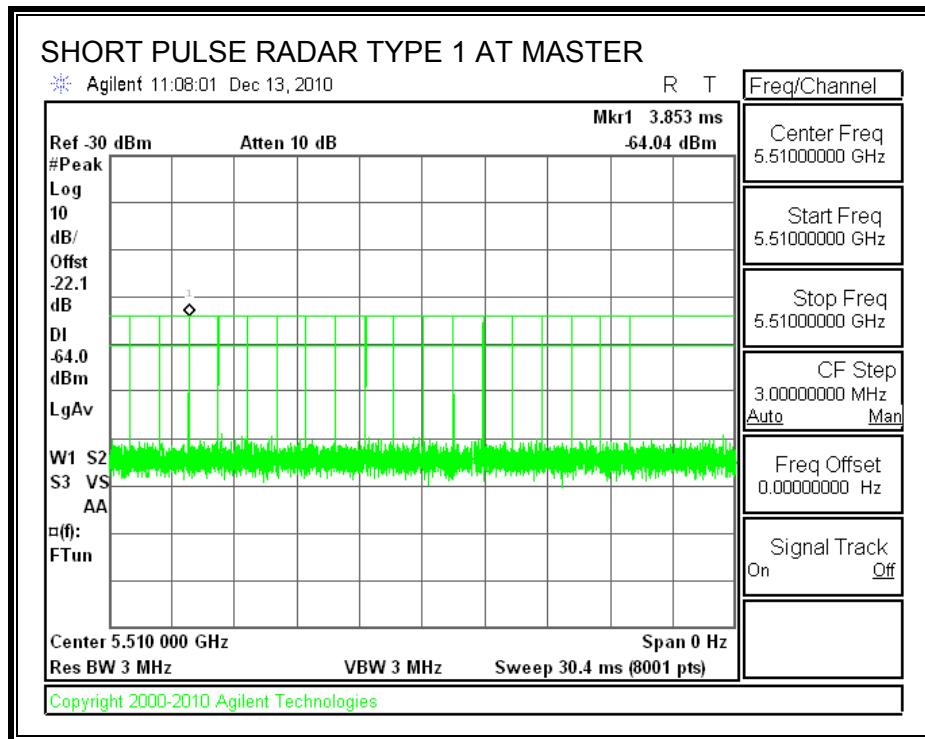

TRAFFIC

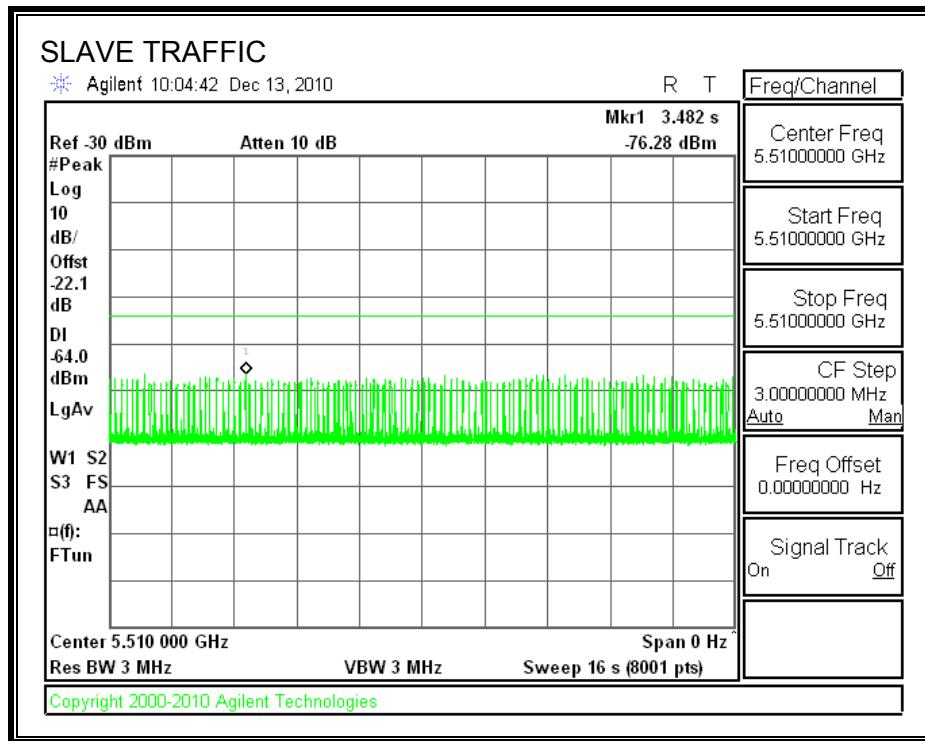

10.3.3. OVERLAPPING CHANNEL TESTS

RESULTS

These tests are not applicable.

10.3.4. MOVE AND CLOSING TIME

REPORTING NOTES

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse. This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time =
(Number of analyzer bins showing transmission) * (dwell time per bin)

The observation period over which the FCC aggregate time is calculated begins at (Reference Marker + 200 msec) and ends no earlier than (Reference Marker + 10 sec).


The observation period over which the IC aggregate time is calculated begins at (Reference Marker) and ends no earlier than (Reference Marker + 10 sec).

RESULTS


Agency	Channel Move Time (sec)	Limit (sec)
FCC / IC	5.966	10

Agency	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
FCC	27.0	60
IC	28.0	260

MOVE TIME

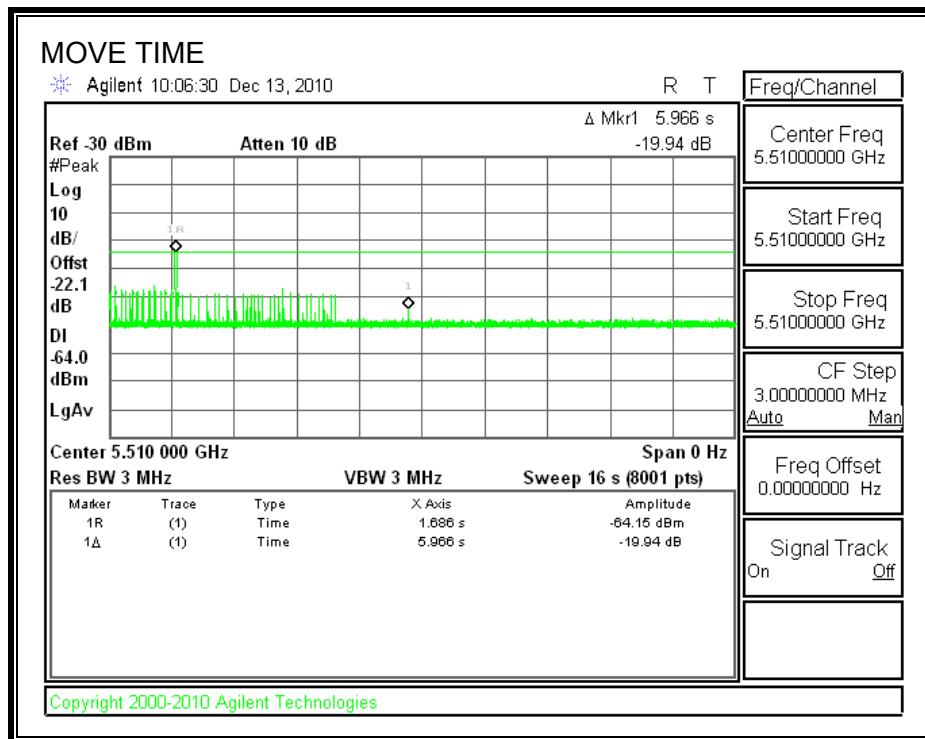


CHANNEL CLOSING TIME

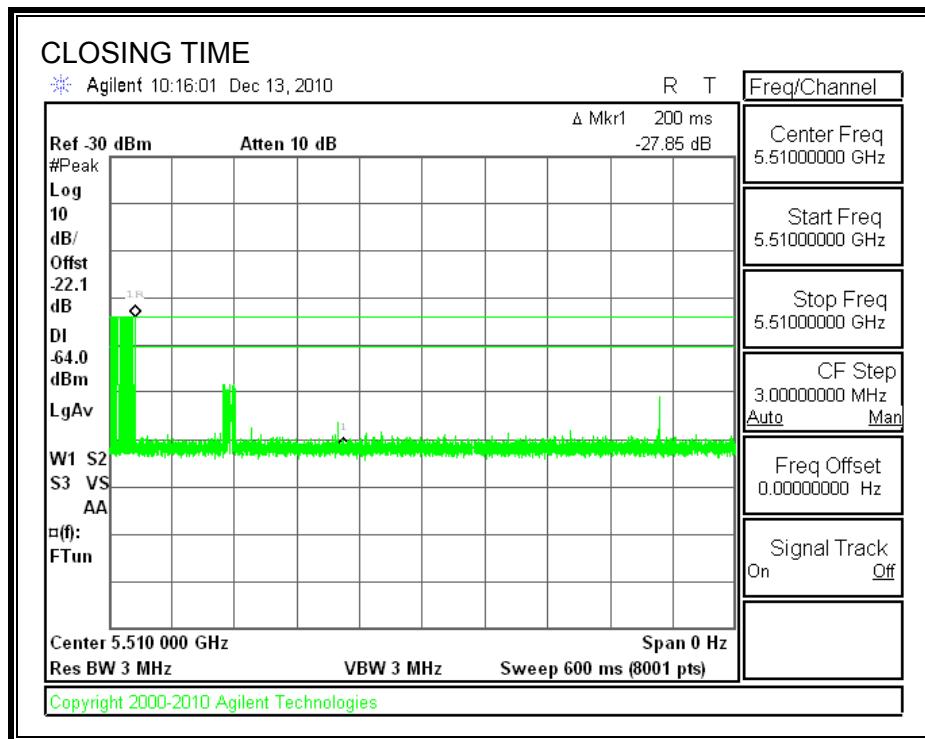


AGGREGATE CHANNEL CLOSING TRANSMISSION TIME

Only intermittent transmissions are observed during the FCC aggregate monitoring period.

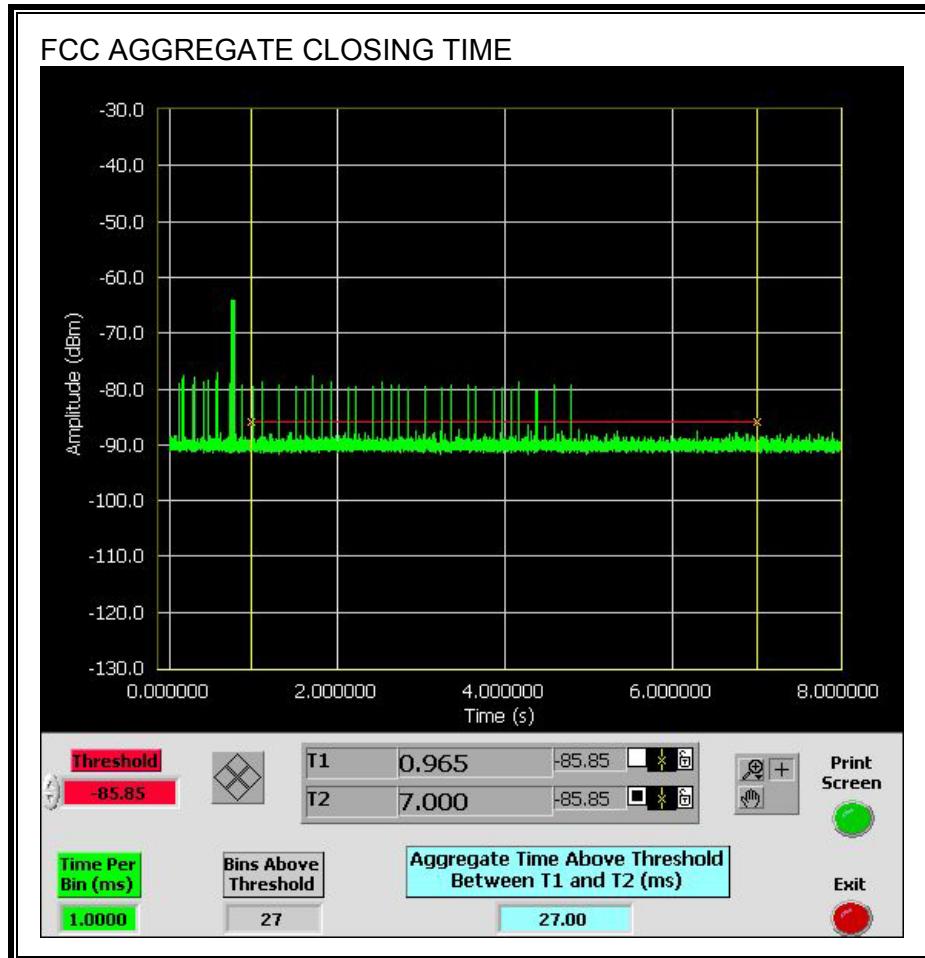

Only intermittent transmissions are observed during the IC aggregate monitoring period.

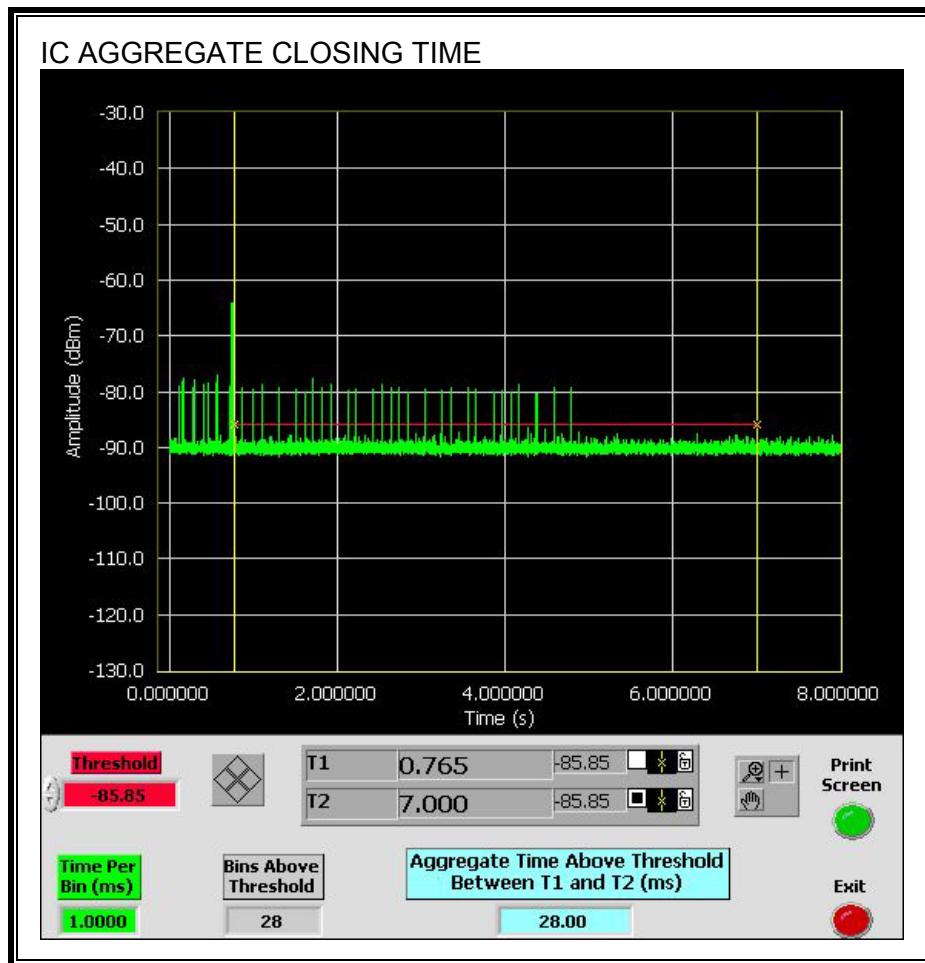

10.3.5. NON-OCCUPANCY PERIOD

RESULTS

No EUT transmissions were observed on the test channel during the 30-minute observation time.

