



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8**

CERTIFICATION TEST REPORT

FOR

802.11a/g/n WLAN + Bluetooth PCI-E Custom Combination Card

MODEL NUMBER: BCM94331PCIEBT3A

**FCC ID: QDS-BRCM1059
IC: 4324A- BRCM1059**

REPORT NUMBER: 11U13734-6

ISSUE DATE: MAY 04, 2011

Prepared for
**BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**

NVLAP[®]

NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	05/04/11	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY	5
4.1. <i>MEASURING INSTRUMENT CALIBRATION</i>	5
4.2. <i>SAMPLE CALCULATION.....</i>	5
4.3. <i>MEASUREMENT UNCERTAINTY.....</i>	5
5. EQUIPMENT UNDER TEST	6
5.1. <i>DESCRIPTION OF EUT</i>	6
5.2. <i>MAXIMUM OUTPUT POWER</i>	6
5.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS</i>	6
5.4. <i>SOFTWARE AND FIRMWARE</i>	6
5.5. <i>WORST-CASE CONFIGURATION AND MODE.....</i>	6
5.6. <i>DESCRIPTION OF TEST SET</i>	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. ANTENNA PORT TEST RESULTS	10
7.1. <i>LE (LOW ENERGY) MODULATION</i>	10
7.1.1. <i>6 dB BANDWIDTH</i>	10
7.1.2. <i>99% BANDWIDTH</i>	13
7.1.1. <i>OUTPUT POWER</i>	16
7.1.2. <i>POWER SPECTRAL DENSITY</i>	19
7.1.3. <i>CONDUCTED SPURIOUS EMISSIONS.....</i>	22
8. RADIATED TEST RESULTS	27
8.1. <i>LIMITS AND PROCEDURE</i>	27
8.2. <i>WORST-CASE RECEIVER ABOVE 1 GHz</i>	33
8.3. <i>WORST-CASE BELOW 1 GHz</i>	34
8.4. <i>AC POWER LINE CONDUCTED EMISSIONS</i>	37
9. MAXIMUM PERMISSIBLE EXPOSURE	41
10. SETUP PHOTOS	44

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: BROADCOM CORPORATION
190 MATHILDA PLACE
SUNNYVALE, CA 94086, U.S.A.

EUT DESCRIPTION: 802.11a/g/n WLAN + Bluetooth PCI-E Custom Combination Card

MODEL: BCM94331PCIEBT3AX

SERIAL NUMBER: C961095004UDJY01W

DATE TESTED: APRIL 26 – 27 & MAY 04, 2011

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL CCS By:



THU CHAN
ENGINEERING MANAGER
UL CCS

Tested By:



THANH NGUEN
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2009, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11a/g/n WLAN + Bluetooth PCI-E Custom Combination Card.

The radio module is manufactured by Broadcom.

5.2. MAXIMUM OUTPUT POWER

The transmitter has a maximum peak conducted output power as follows:

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)
2402 - 2480	Low Energy BLE	-2.06	0.62

5.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an 802.11bgn WLAN and Bluetooth antenna with a maximum gain of 1.11 dBi.

5.4. SOFTWARE AND FIRMWARE

The EUT driver software installed during testing was Broadcom Bluetooth Version 1.4.3

The test utility software used during testing was Bluetool, ver. 1.4.3.0 and BCM_BTDL,ver 1.8.4.pl

5.5. WORST-CASE CONFIGURATION AND MODE

The worst-case channel is determined as the channel with the highest output power.

5.6. DESCRIPTION OF TEST SET


SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Dell	PP09S	N/A	DoC
AC Adapter	Dell	PA-1650-05D	CN-05U092-71615-49Q-18B8	DoC
Converter Board	Broadcom	BCM94319SDB	1396825	N/A
USB Cable	N/A	N/A	N/A	N/A

I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC	1	US 115V	Shielded	1.5m	NA
2	DC	1	DC	Un-shielded	1.5m	Ferrite at laptop's end
4	USB	1	USB	Un-shielded	1.0m	NA

SETUP DIAGRAM

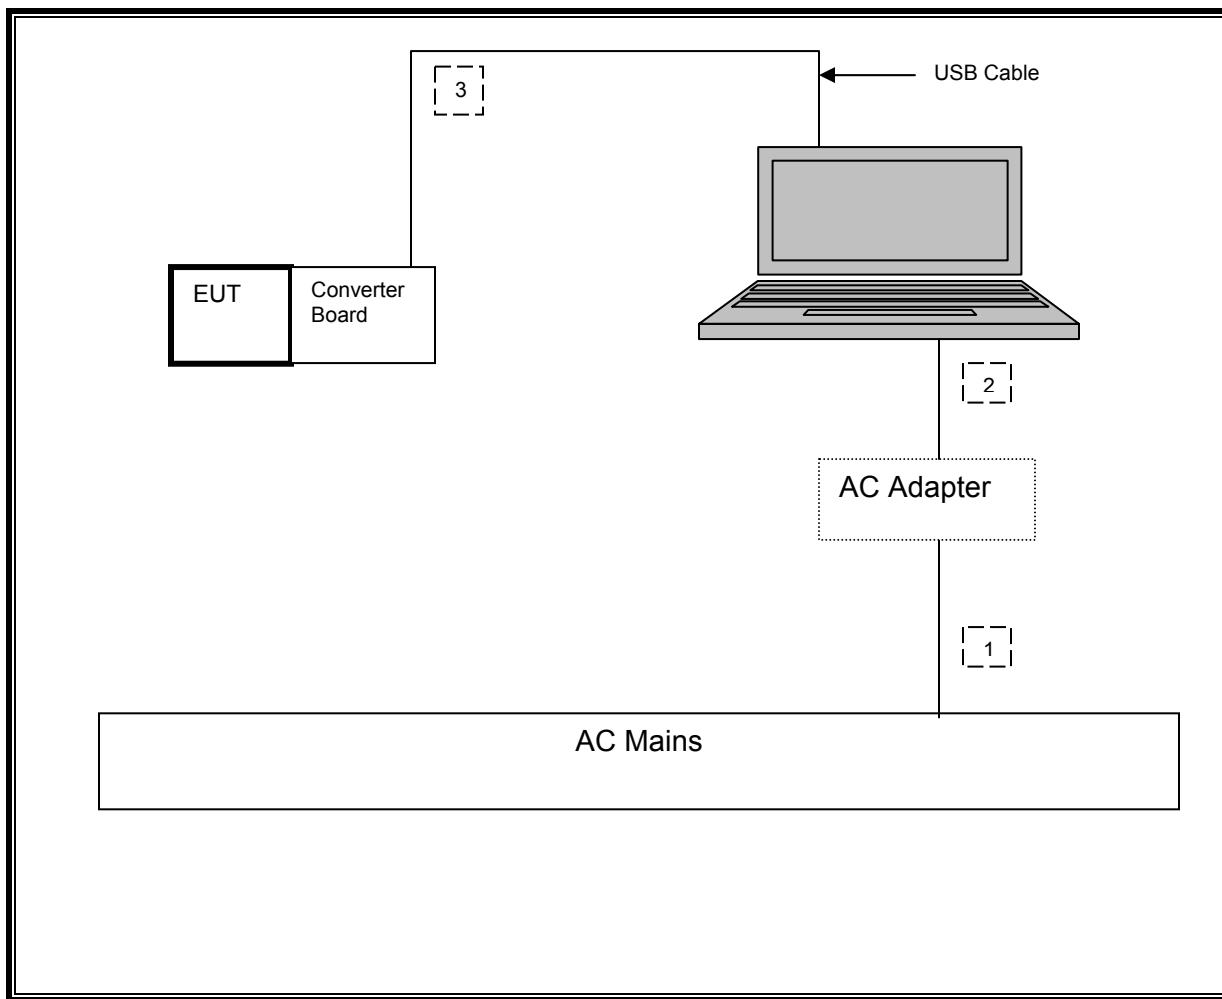

TEST SETUP

The EUT was tested as an external module that installed on a converter board connected to a host Laptop PC USB cable.

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C00996	10/29/11
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01171	07/14/11
Antenna, Horn, 18 GHz	EMCO	3115	C00872	07/29/11
Antenna, Horn, 26.5 GHz	ARA	MWH-1826/B	C00980	07/29/11
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00778	01/26/12
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C00749	08/04/11
Peak Power Meter	Agilent / HP	E9327A	C00964	12/04/11
Peak Power Sensor	Agilent / HP	E4416A	C00963	12/04/11
Reject Filter, 2.4-2.5 GHz	Micro-Tronics	BRM50702	N02685	CNR
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	11/06/11
EMI Test Receiver, 30 MHz	R & S	ESHS 20	N02396	05/06/11

7. ANTENNA PORT TEST RESULTS

7.1. LE (LOW ENERGY) MODULATION

7.1.1. 6 dB BANDWIDTH

LIMITS

FCC §15.247 (a) (2)

IC RSS-210 A8.2 (a)

The minimum 6 dB bandwidth shall be at least 500 kHz.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to 100 kHz and the VBW is set to 300 kHz. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	2402	0.700	0.5
Middle	2442	0.700	0.5
High	2480	0.700	0.5

6 dB BANDWIDTH

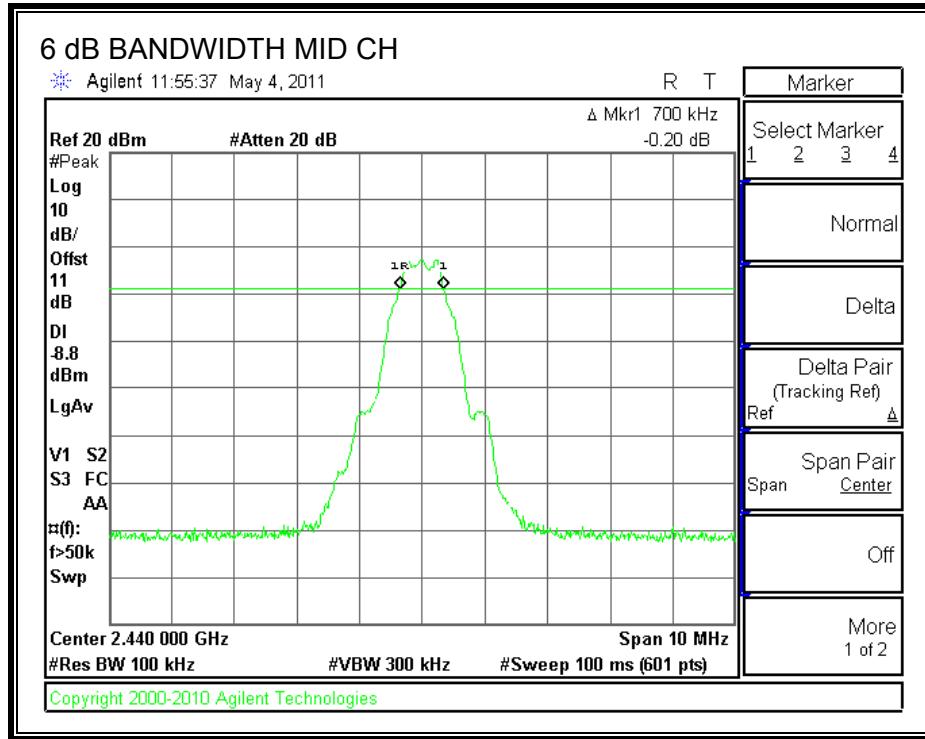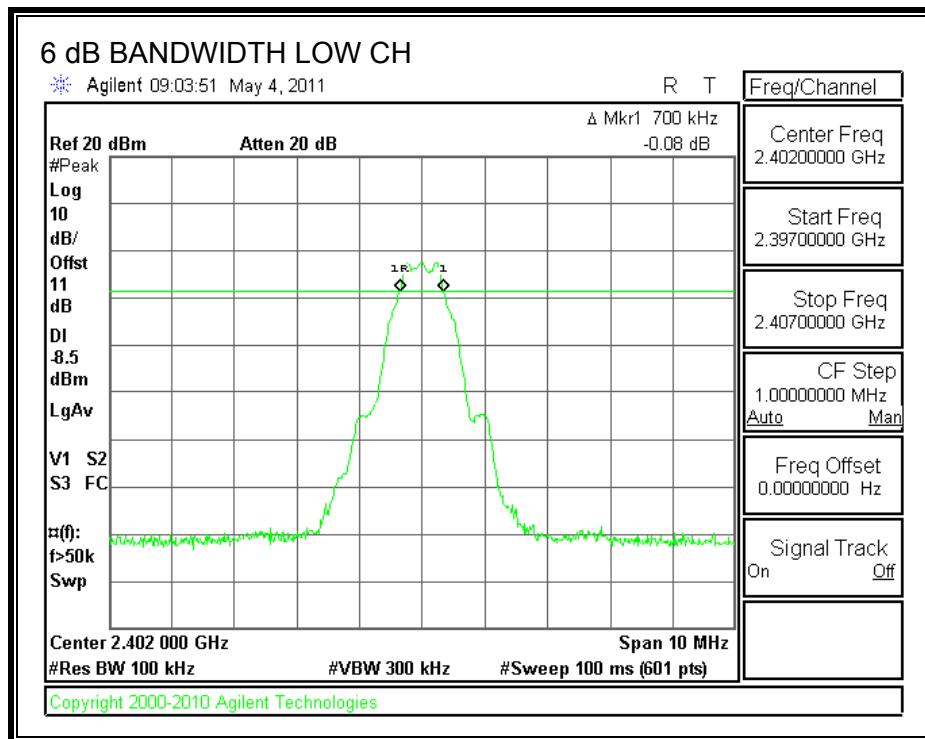

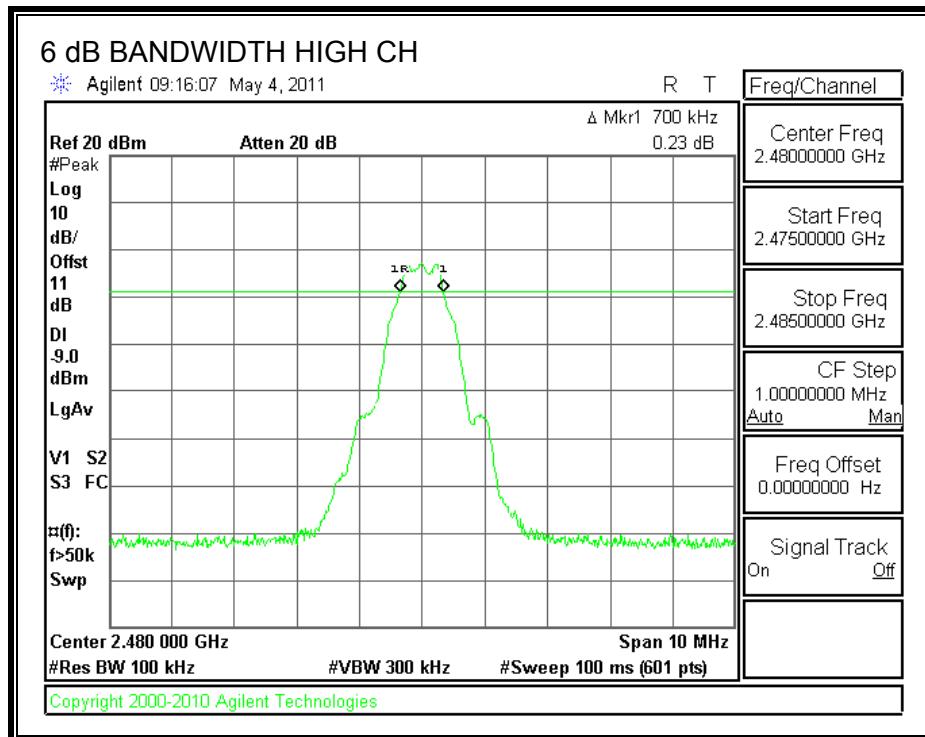

7.1.2. 99% BANDWIDTH

LIMIT

None; for reporting purposes only.



TEST PROCEDURE


The transmitter output is connected to a spectrum analyzer. The RBW is set to $\geq 1\%$ of the 99% bandwidth. The VBW is set to \geq RBW. The sweep time is coupled.

RESULTS

Channel	Frequency (MHz)	99% Bandwidth (MHz)
Low	2402	1.0766
Middle	2440	1.0687
High	2480	1.0692

99% BANDWIDTH

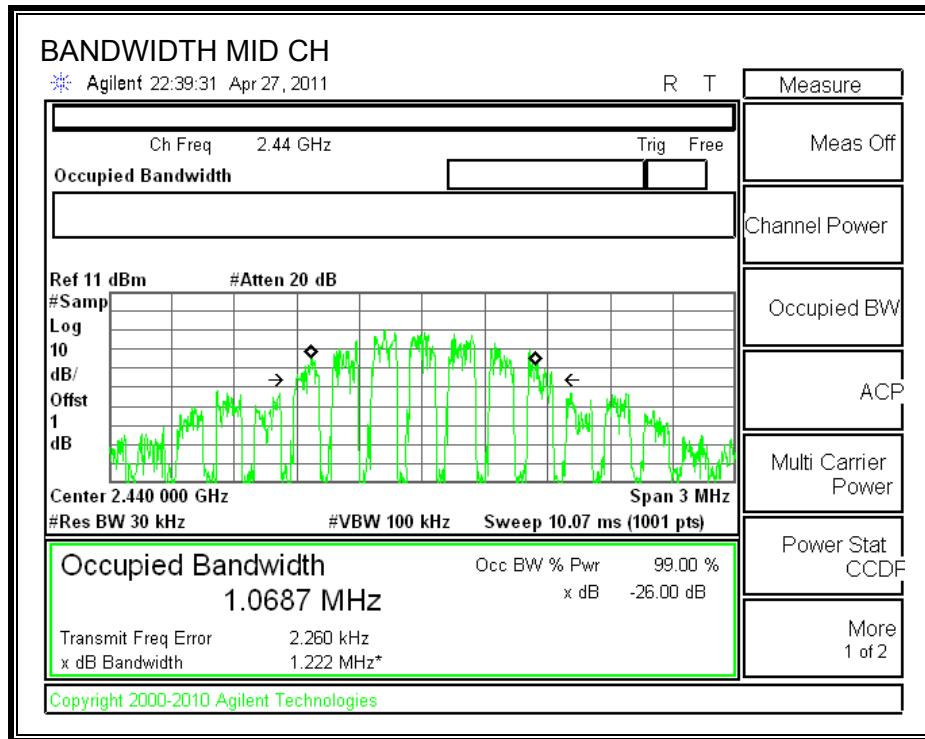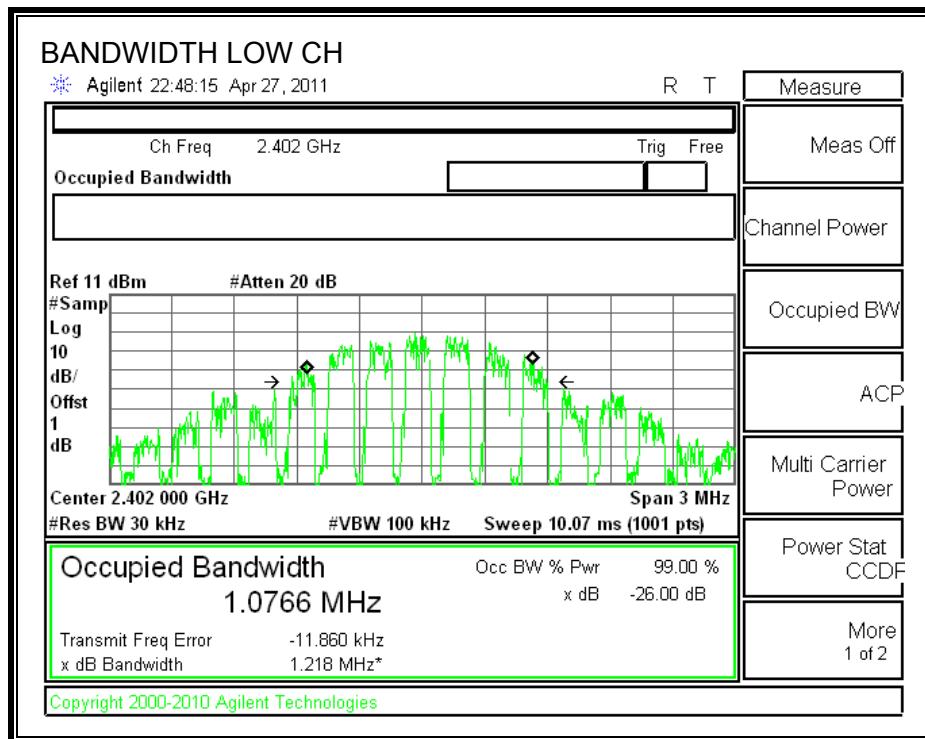

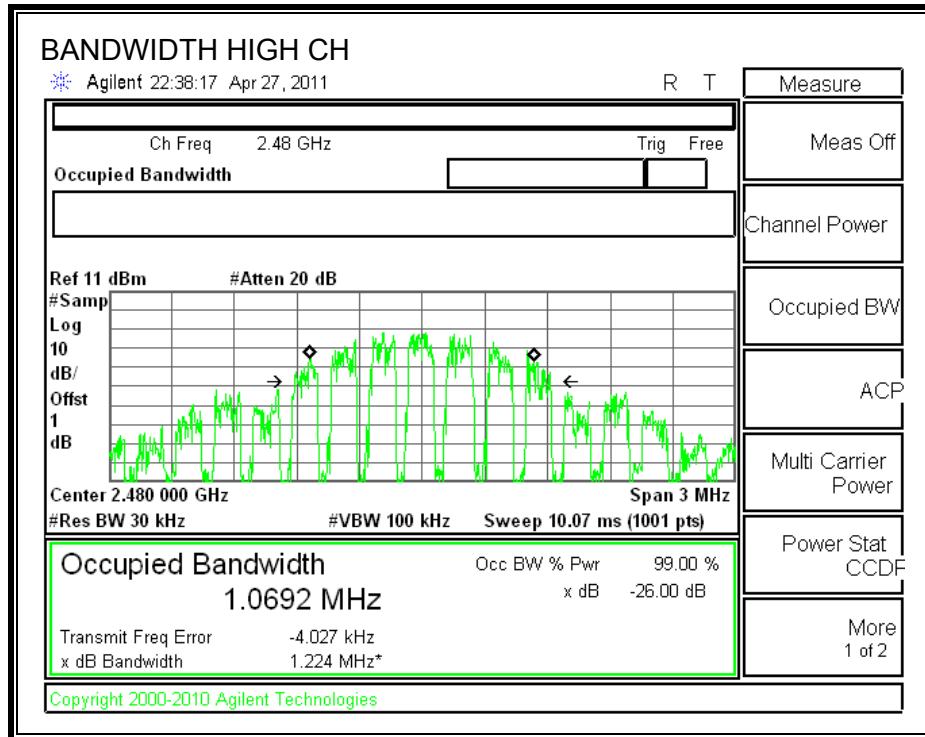

7.1.1. OUTPUT POWER

LIMIT

§15.247 (b) (1)

RSS-210 Issue 7 Clause A8.4

The maximum antenna gain is less than 6 dBi, therefore the limit is 30 dBm.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

TEST PROCEDURE



The transmitter output is connected to a spectrum analyzer the analyzer bandwidth is set to a value greater than the 20 dB bandwidth of the EUT.


RESULTS

LE MODE

Channel	Frequency (MHz)	Output Power (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-2.14	30	-32.14
Middle	2440	-2.06	30	-32.06
High	2480	-2.67	30	-32.67

LE MODE

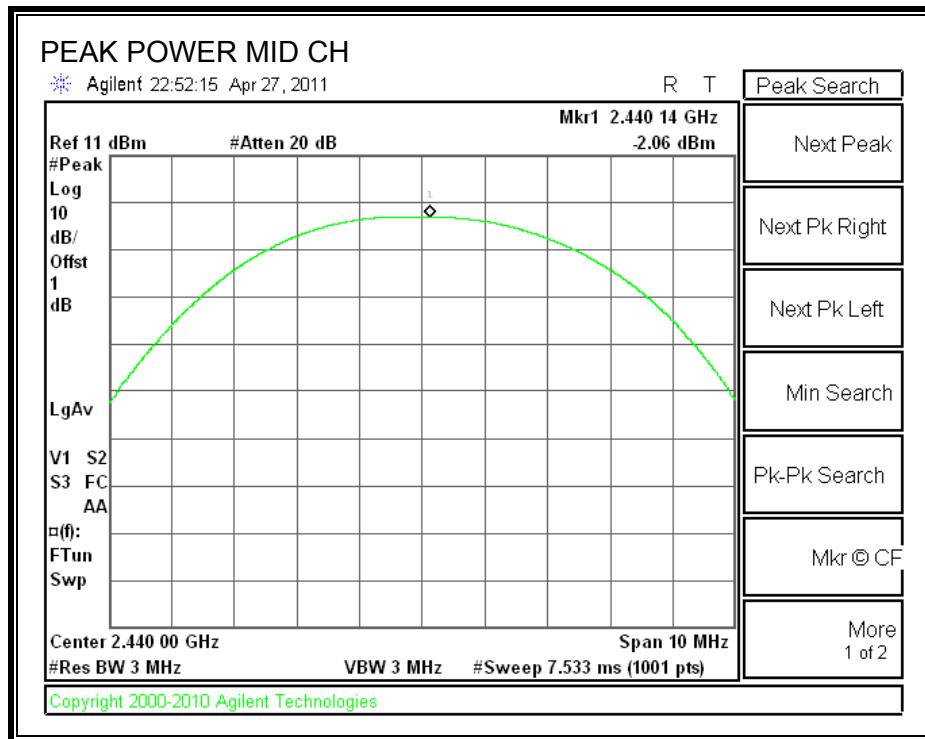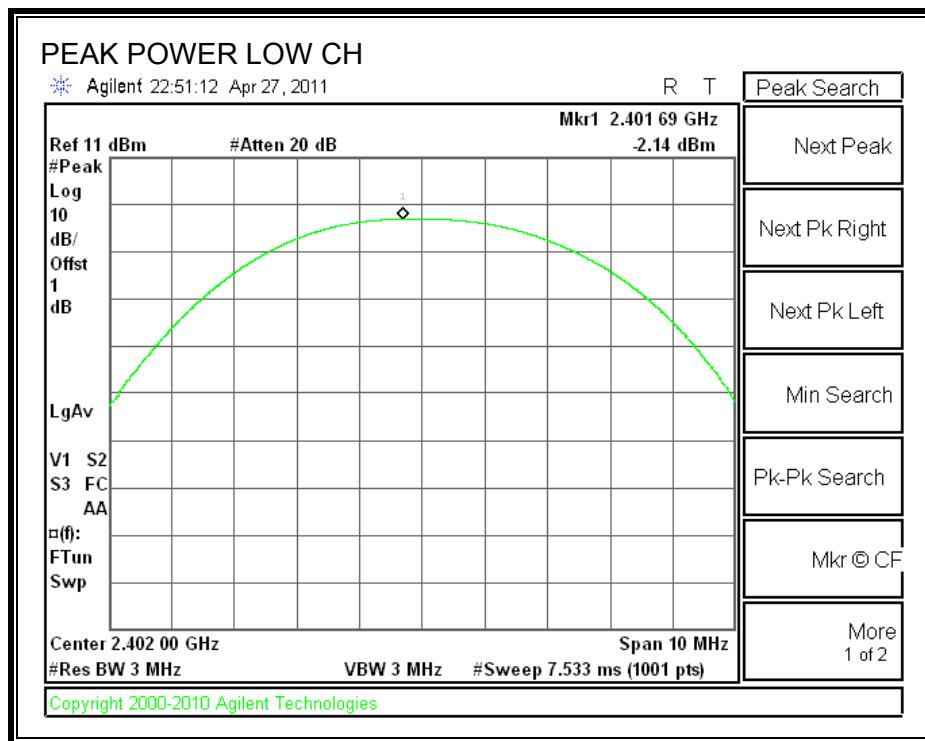

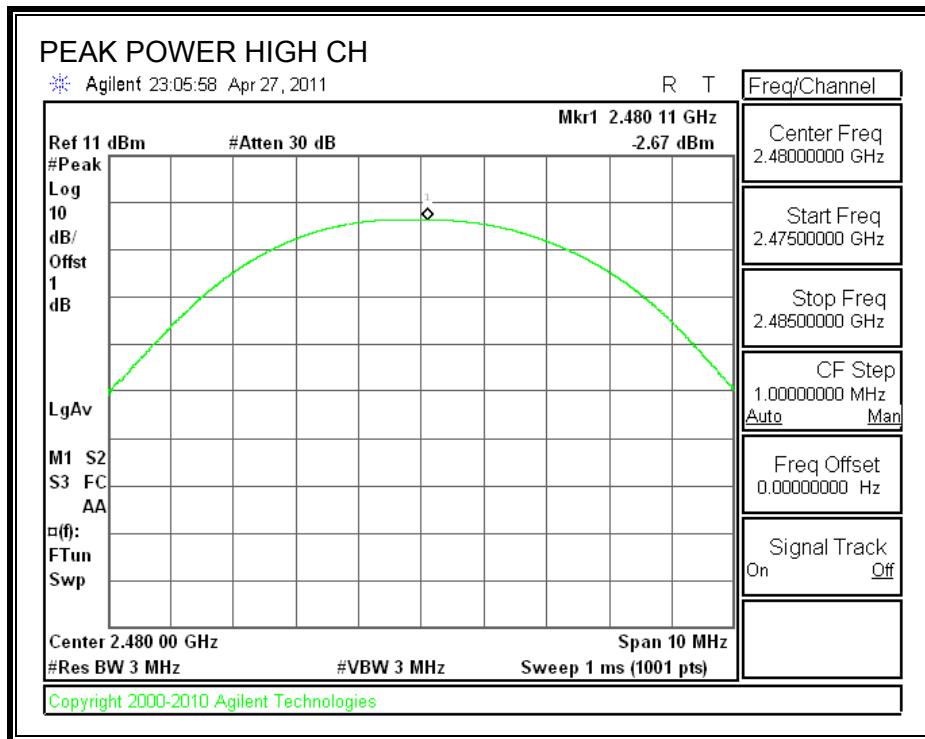

7.1.2. POWER SPECTRAL DENSITY

LIMITS

FCC §15.247 (e)

IC RSS-210 A8.2 (b)

The power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.



TEST PROCEDURE


Output power was measured based on the use of a peak measurement, therefore the power spectral density was measured using PSD Option 1 in accordance with FCC document "Measurement of Digital Transmission Systems Operating under Section 15.247", March 23, 2005.

RESULTS

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Margin (dB)
Low	2402	-16.19	8	-24.19
Middle	2442	-16.39	8	-24.39
High	2480	-16.66	8	-24.66

POWER SPECTRAL DENSITY

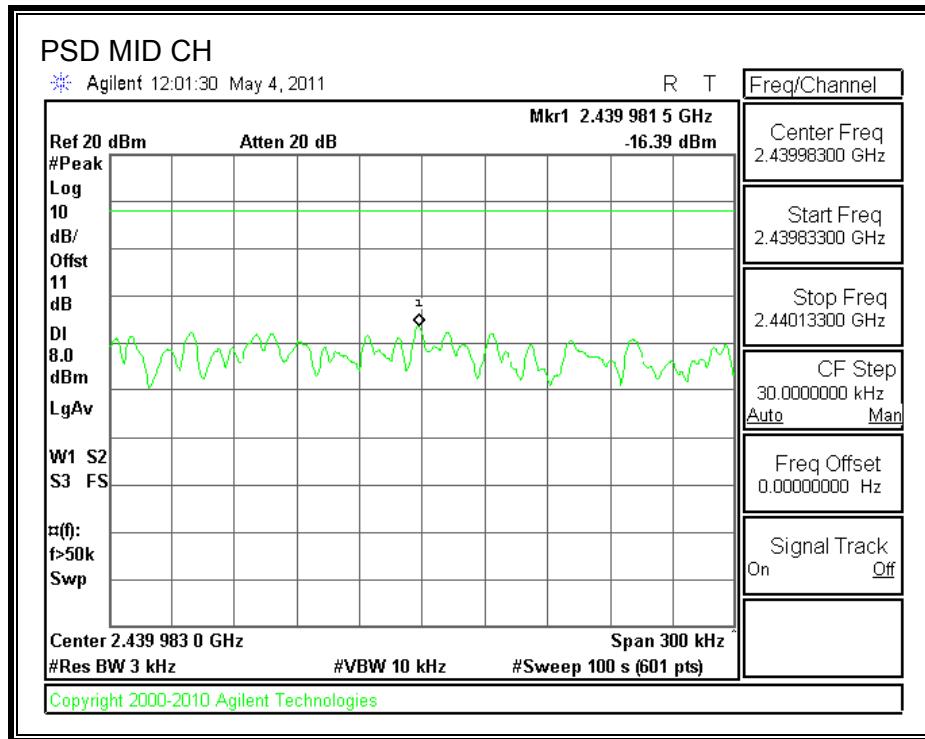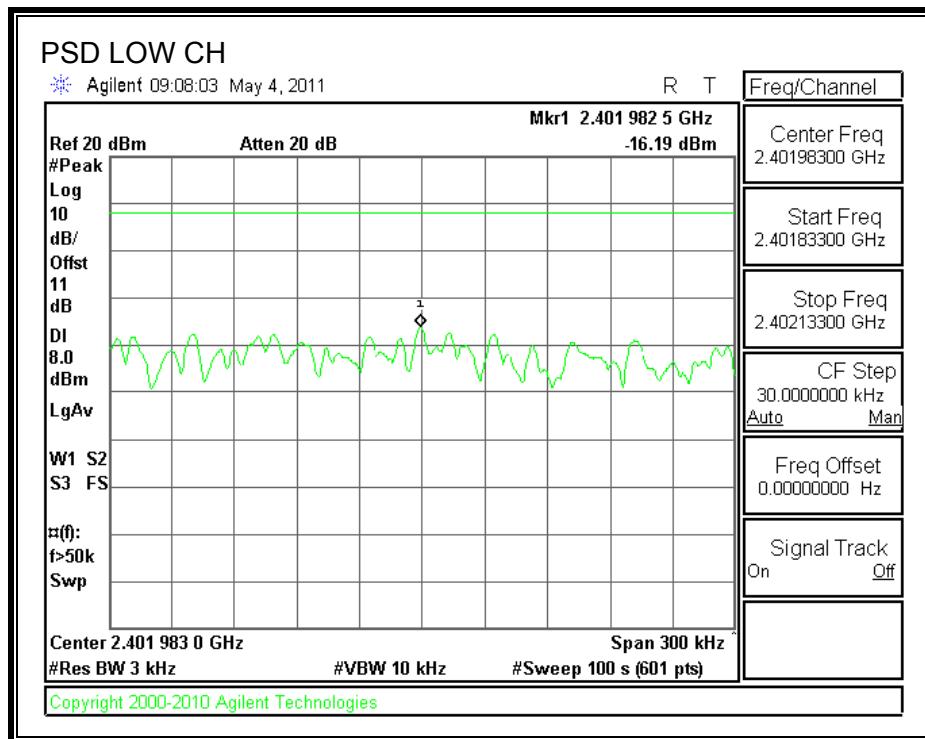

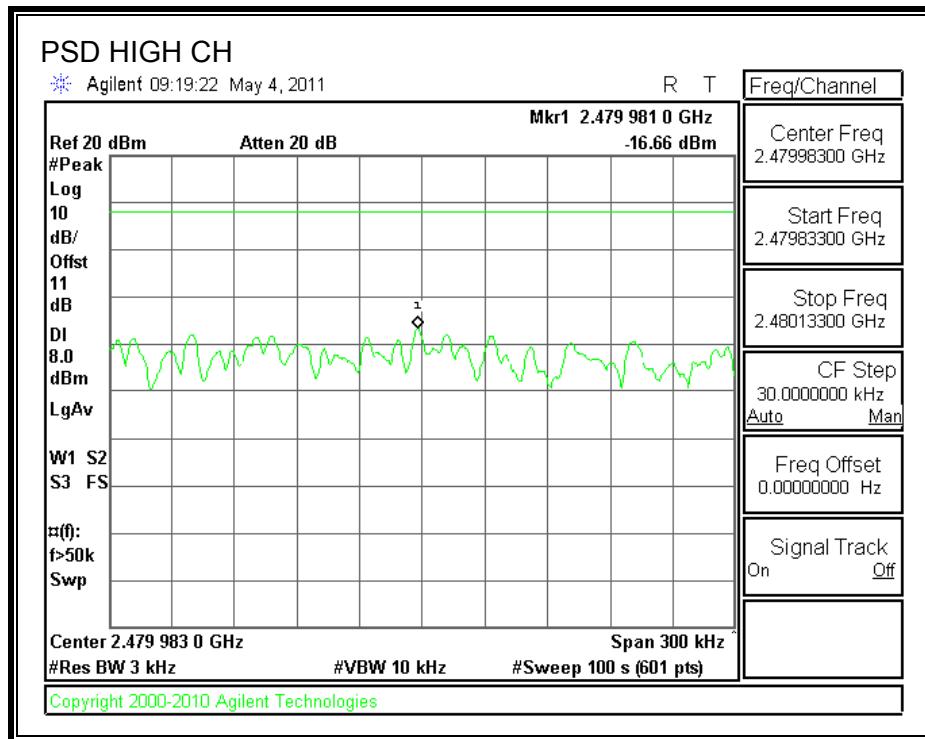

7.1.3. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Limit = -20 dBc

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

The band edges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal hopping mode.



RESULTS

LE MODE



SPURIOUS EMISSIONS, LOW CHANNEL

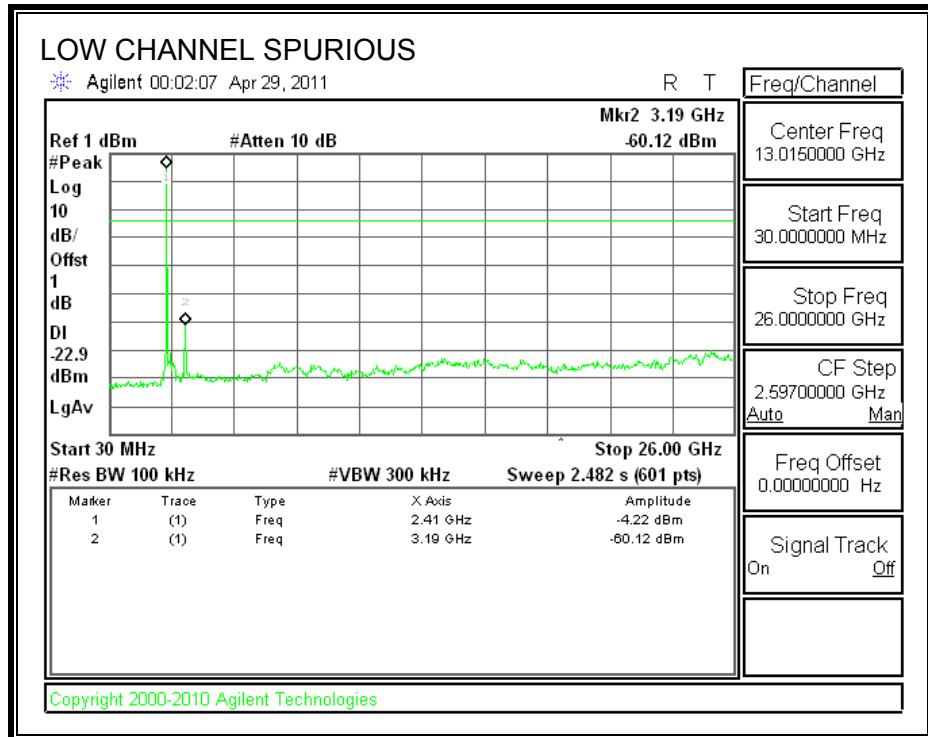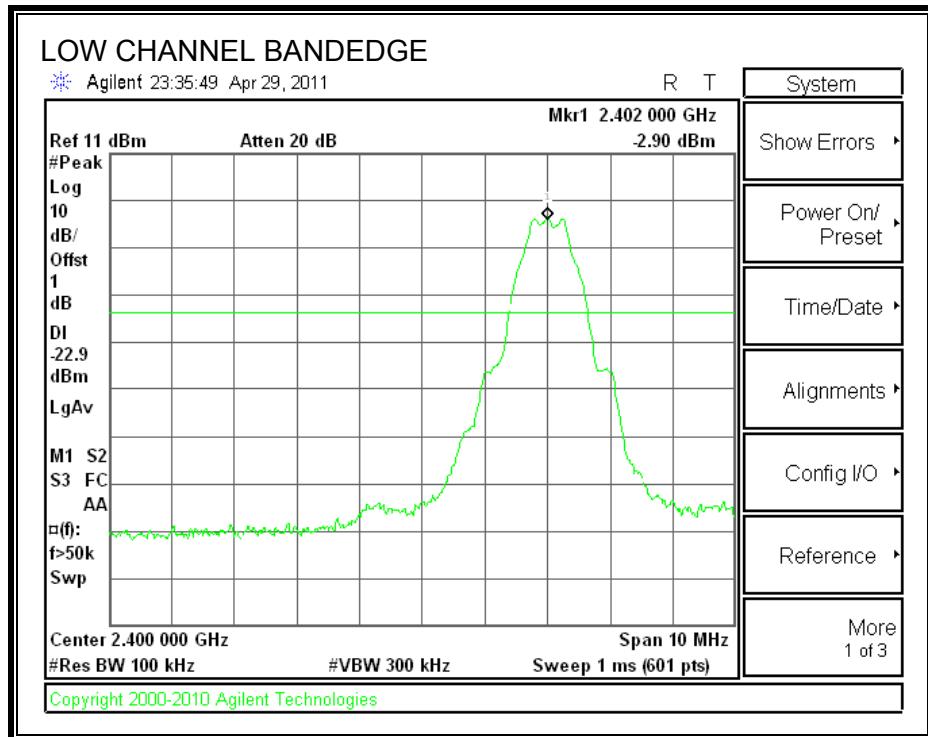



SPURIOUS EMISSIONS, MID CHANNEL

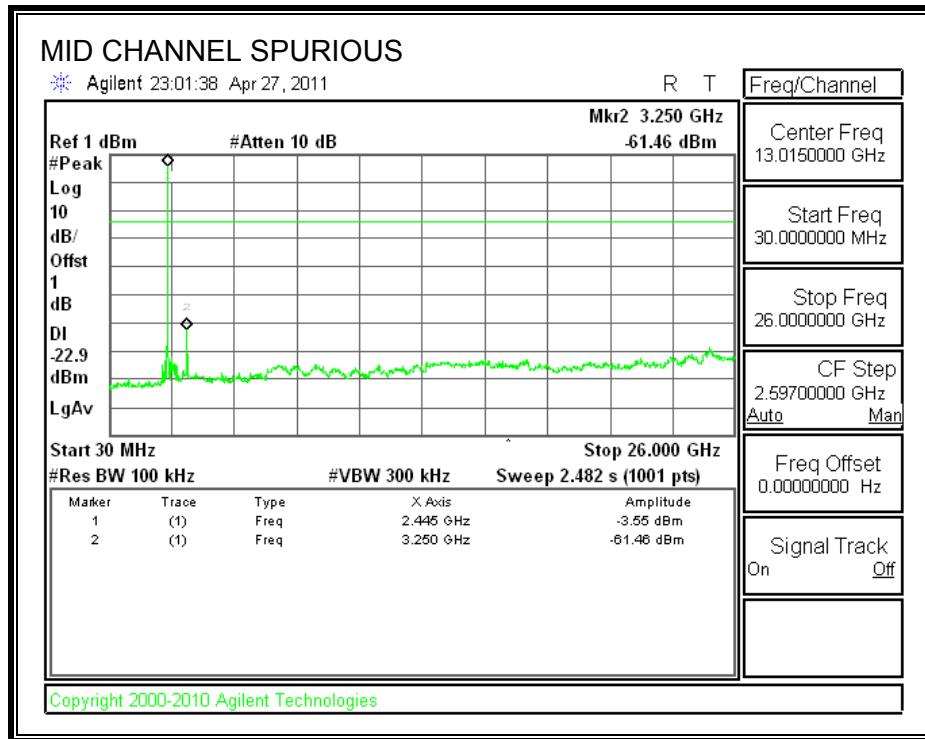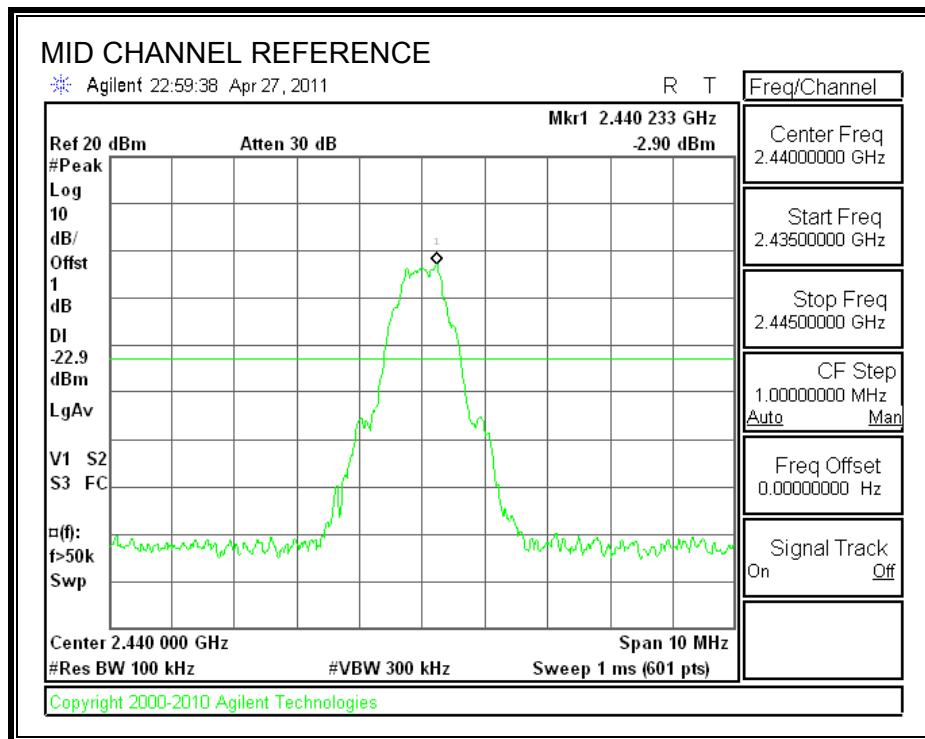

SPURIOUS EMISSIONS, HIGH CHANNEL

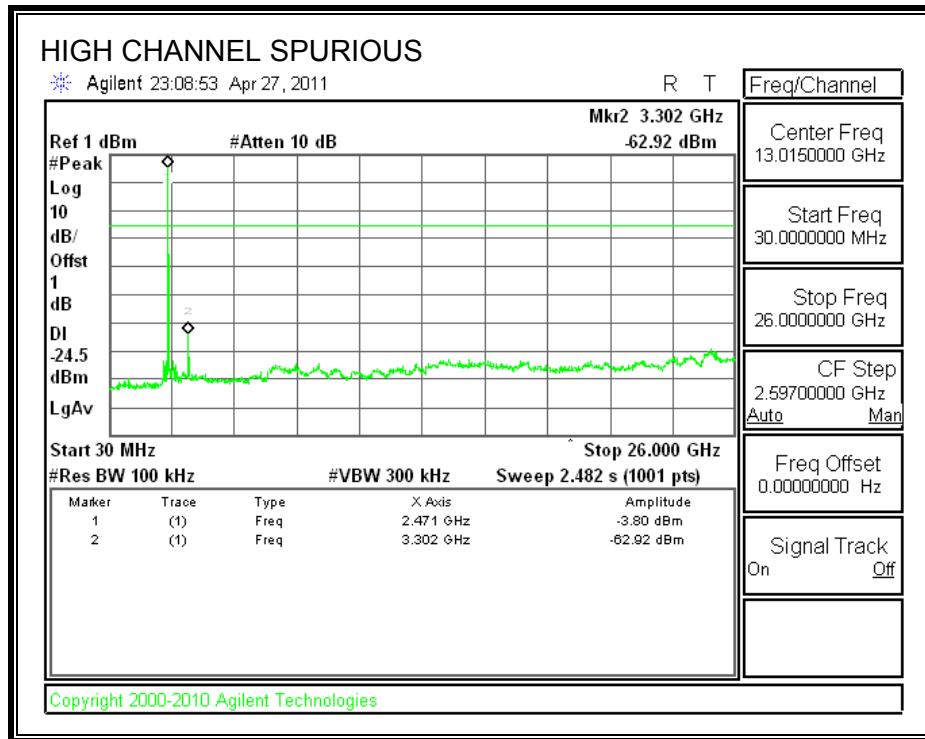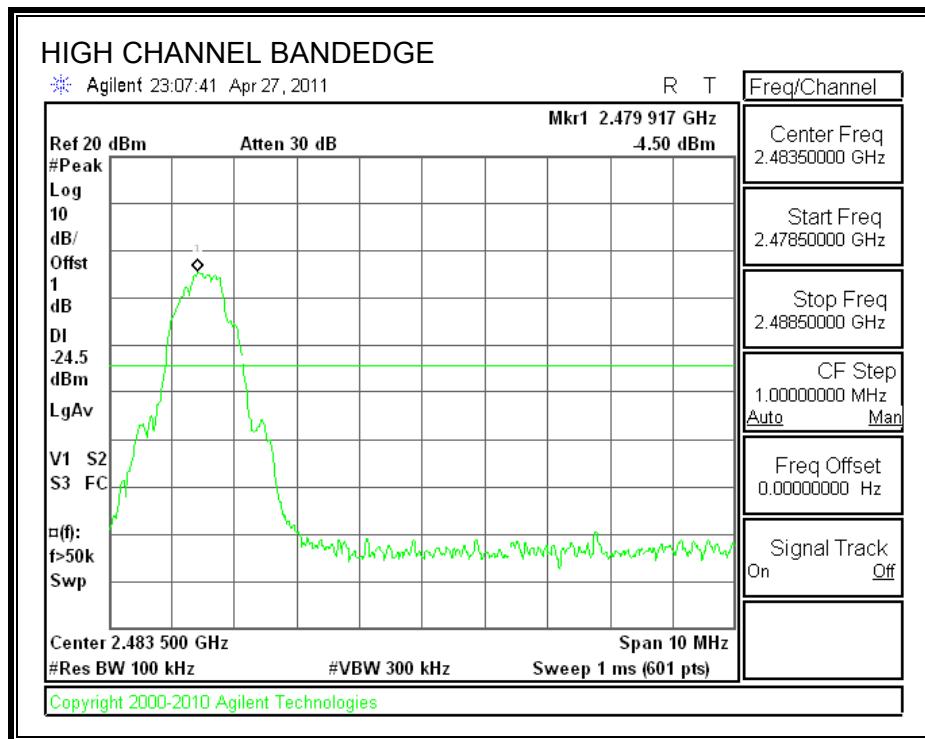

SPURIOUS BANDEDGE EMISSIONS WITH HOPPING ON

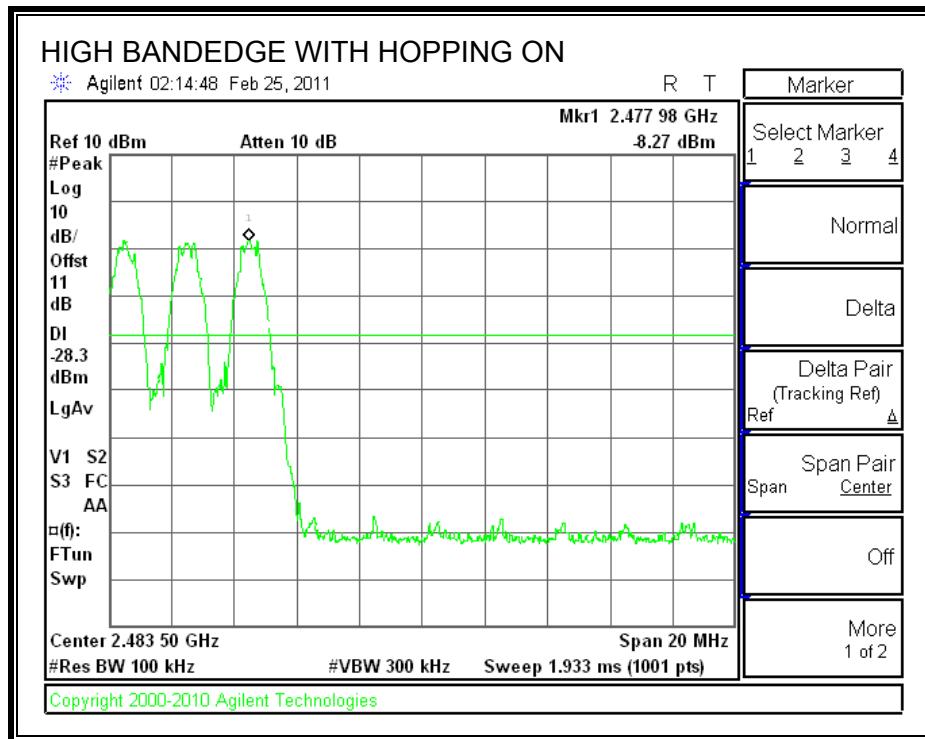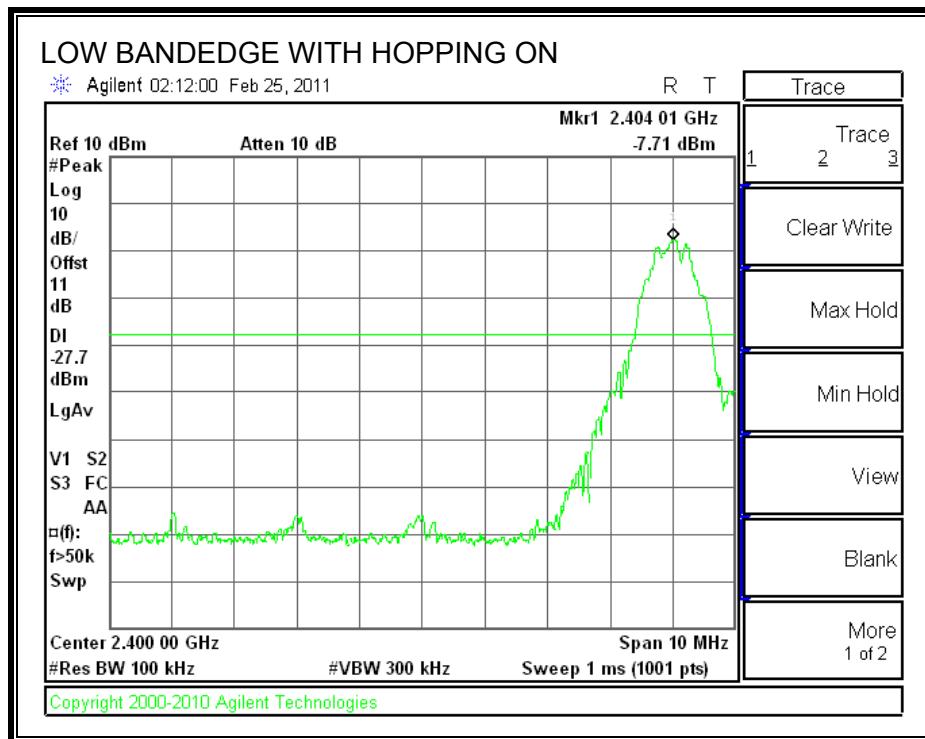

8. RADIATED TEST RESULTS

8.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.



For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, and then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.



The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.



RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

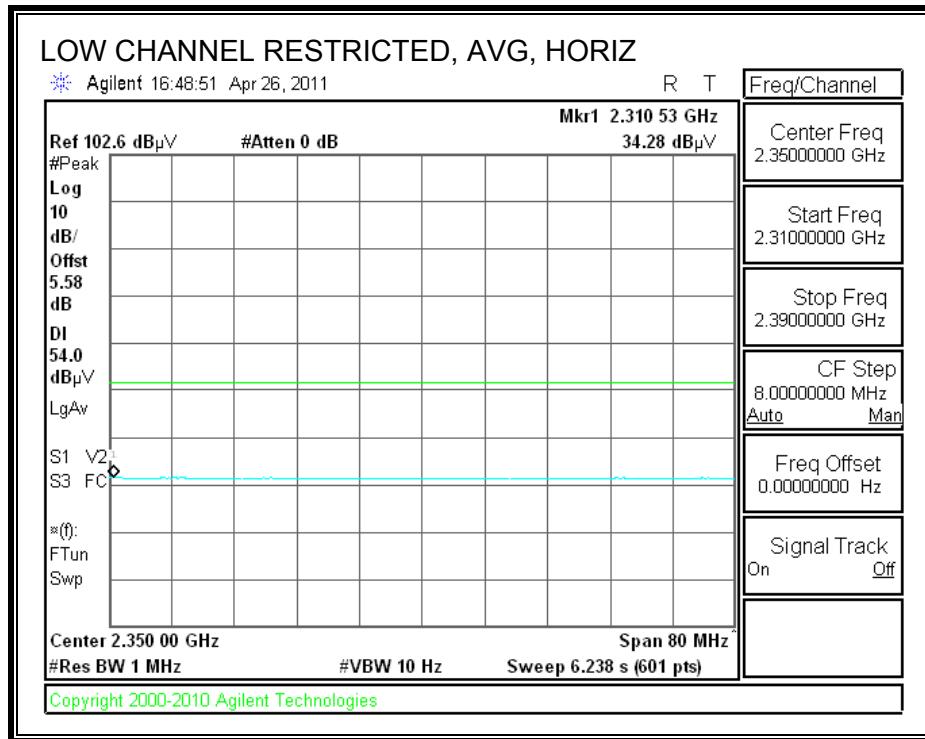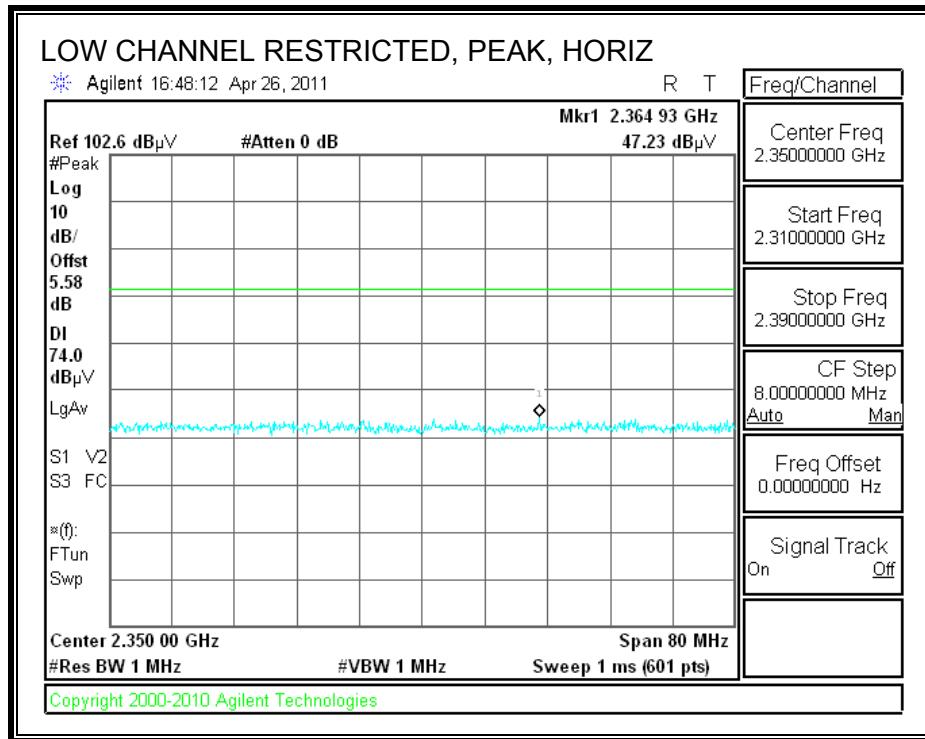



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

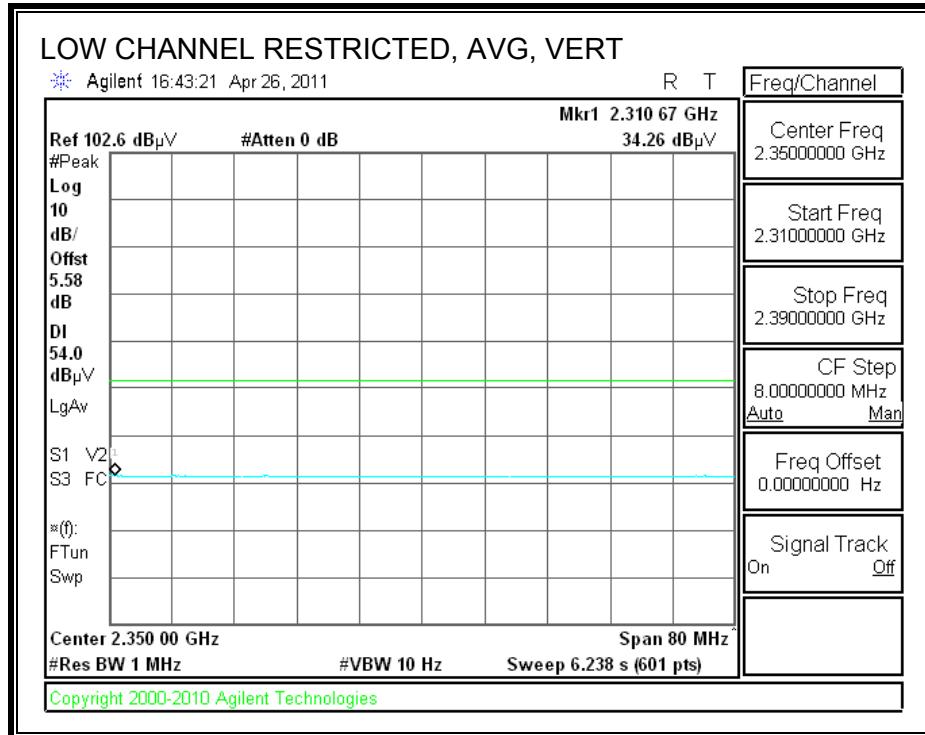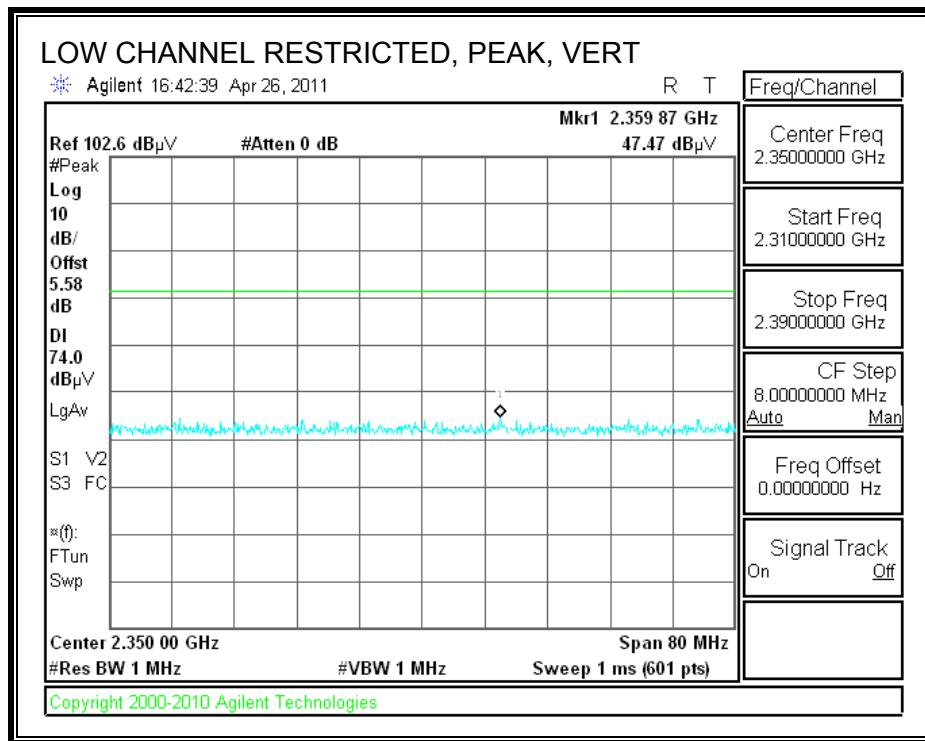

RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

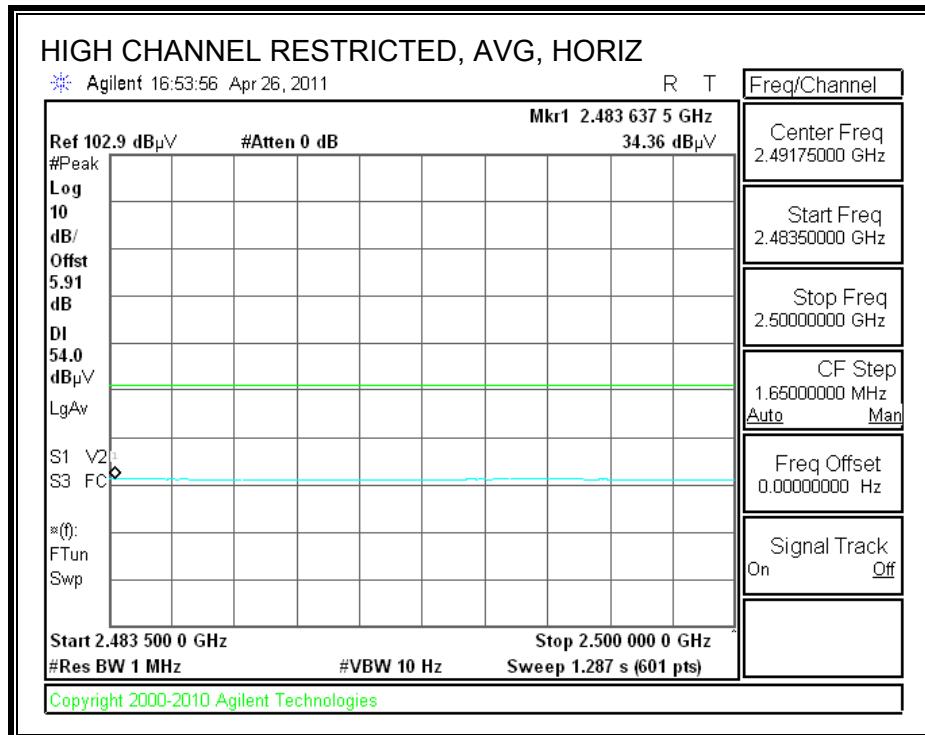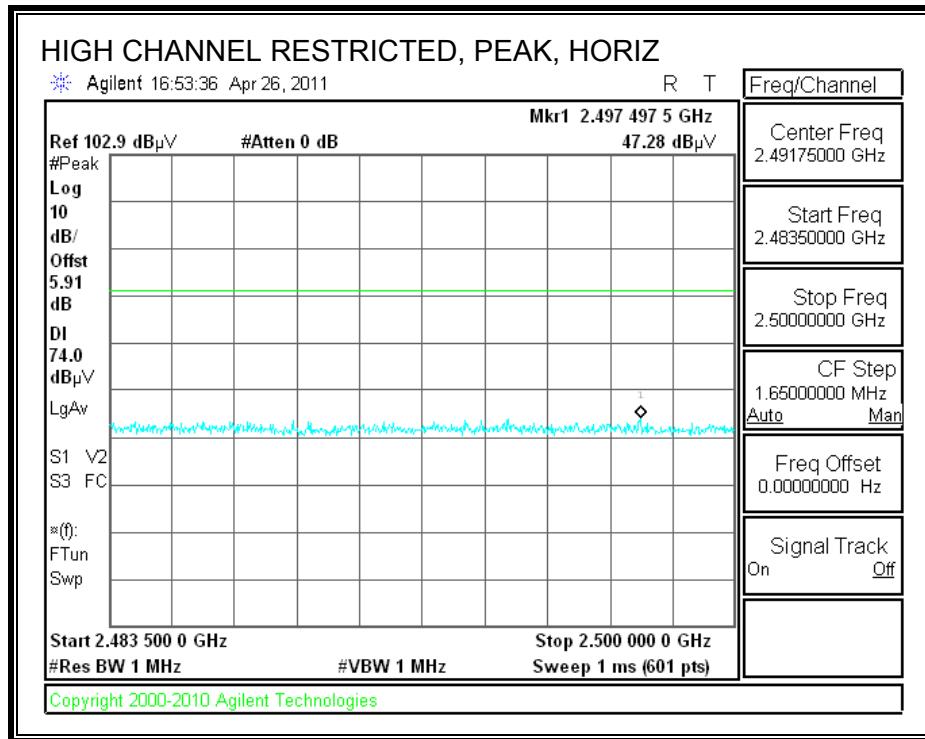

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

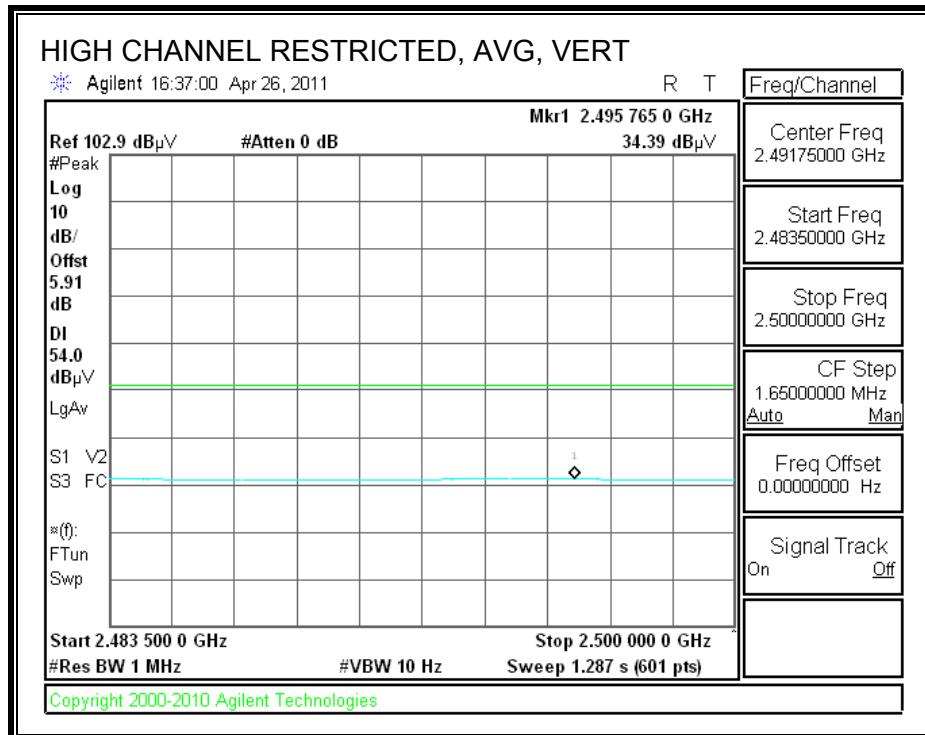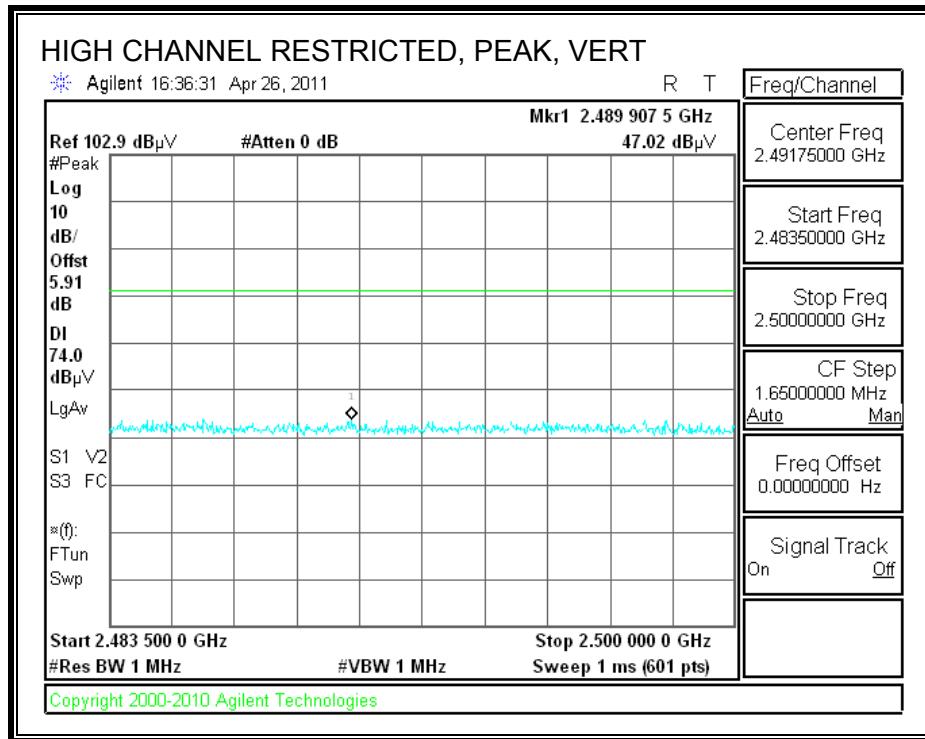

HARMONICS AND SPURIOUS EMISSIONS


High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																																																																																																																																																																																																																																																																																																																																																																																																																																				
<p>Company: BroadCom Corporation Project #: 11U3734 Date: 4/26/2011 Test Engineer: Thanh Nguyen Configuration: EUT, Antenna, remote support Laptop Mode: Transmit LE Mode</p> <p>Test Equipment:</p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td colspan="4">Horn > 18GHz</td> <td>Limit</td> </tr> <tr> <td>T60; S/N: 2238 @3m</td> <td>T34 HP 8449B</td> <td></td> <td colspan="4">T125; ARA 18-26GHz; S/N:1007</td> <td>FCC 15.209</td> </tr> <tr> <td colspan="15">Hi Frequency Cables</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4"></td> <td>HPF</td> <td>Reject Filter</td> <td colspan="5">Peak Measurements RBW=VBW=1MHz</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td colspan="4"></td> <td></td> <td>R_001</td> <td colspan="5">Average Measurements RBW=1MHz ; VBW=10Hz</td> </tr> </table> <table border="1"> <thead> <tr> <th>f GHz</th> <th>Dist (m)</th> <th>Read Pk dBuV</th> <th>Read Avg. dBuV</th> <th>AF dB/m</th> <th>CL dB</th> <th>Amp dB</th> <th>D Corr dB</th> <th>Fltr dB</th> <th>Peak dBuV/m</th> <th>Avg dBuV/m</th> <th>Pk Lim dBuV/m</th> <th>Avg Lim dBuV/m</th> <th>Pk Mar dB</th> <th>Avg Mar dB</th> <th>Notes (V/H)</th> </tr> </thead> <tbody> <tr> <td colspan="15">Harmonics Spurious</td> </tr> <tr> <td colspan="15">Low Ch 2402MHz</td> </tr> <tr> <td>4.804</td> <td>3.0</td> <td>36.9</td> <td>24.4</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>40.5</td> <td>28.0</td> <td>74</td> <td>54</td> <td>-33.5</td> <td>-26.0</td> <td>V</td> </tr> <tr> <td>7.206</td> <td>3.0</td> <td>35.7</td> <td>23.0</td> <td>35.4</td> <td>7.2</td> <td>-34.2</td> <td>0.0</td> <td>0.0</td> <td>44.1</td> <td>31.5</td> <td>74</td> <td>54</td> <td>-29.9</td> <td>-22.5</td> <td>Noise floor</td> </tr> <tr> <td>4.804</td> <td>3.0</td> <td>36.9</td> <td>24.4</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>40.5</td> <td>28.0</td> <td>74</td> <td>54</td> <td>-33.5</td> <td>-26.0</td> <td>H</td> </tr> <tr> <td>7.206</td> <td>3.0</td> <td>35.7</td> <td>23.0</td> <td>35.4</td> <td>7.2</td> <td>-34.2</td> <td>0.0</td> <td>0.0</td> <td>44.1</td> <td>31.5</td> <td>74</td> <td>54</td> <td>-29.9</td> <td>-22.5</td> <td>Noise floor</td> </tr> <tr> <td colspan="15">Mid Ch 2440MHz</td> </tr> <tr> <td>4.880</td> <td>3.0</td> <td>38.4</td> <td>25.3</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>42.1</td> <td>29.1</td> <td>74</td> <td>54</td> <td>-31.9</td> <td>-24.9</td> <td>V</td> </tr> <tr> <td>7.320</td> <td>3.0</td> <td>35.1</td> <td>23.0</td> <td>35.5</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>43.8</td> <td>31.7</td> <td>74</td> <td>54</td> <td>-30.2</td> <td>-22.3</td> <td>Noise floor</td> </tr> <tr> <td>4.880</td> <td>3.0</td> <td>37.0</td> <td>24.2</td> <td>32.7</td> <td>5.8</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>40.7</td> <td>27.9</td> <td>74</td> <td>54</td> <td>-33.3</td> <td>-26.1</td> <td>H</td> </tr> <tr> <td>7.320</td> <td>3.0</td> <td>35.4</td> <td>23.4</td> <td>35.5</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>44.0</td> <td>32.0</td> <td>74</td> <td>54</td> <td>-30.0</td> <td>-22.0</td> <td>Noise floor</td> </tr> <tr> <td colspan="15">High Ch 2480MHz</td> </tr> <tr> <td>4.960</td> <td>3.0</td> <td>37.9</td> <td>25.3</td> <td>32.8</td> <td>5.9</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>41.8</td> <td>29.2</td> <td>74</td> <td>54</td> <td>-32.2</td> <td>-24.8</td> <td>V</td> </tr> <tr> <td>7.440</td> <td>3.0</td> <td>36.2</td> <td>23.2</td> <td>35.6</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>45.1</td> <td>32.1</td> <td>74</td> <td>54</td> <td>-28.9</td> <td>-21.9</td> <td>Noise floor</td> </tr> <tr> <td>4.960</td> <td>3.0</td> <td>35.3</td> <td>24.4</td> <td>32.8</td> <td>5.9</td> <td>-34.8</td> <td>0.0</td> <td>0.0</td> <td>39.1</td> <td>28.2</td> <td>74</td> <td>54</td> <td>-34.9</td> <td>-25.8</td> <td>H</td> </tr> <tr> <td>7.440</td> <td>3.0</td> <td>34.3</td> <td>23.5</td> <td>35.6</td> <td>7.3</td> <td>-34.1</td> <td>0.0</td> <td>0.0</td> <td>43.2</td> <td>32.4</td> <td>74</td> <td>54</td> <td>-30.8</td> <td>-21.6</td> <td>Noise floor</td> </tr> <tr> <td colspan="15">Spurious Emissions</td> </tr> <tr> <td>1.130</td> <td>3.0</td> <td>54.4</td> <td>43.4</td> <td>24.9</td> <td>2.5</td> <td>-38.1</td> <td>0.0</td> <td>0.0</td> <td>43.7</td> <td>32.8</td> <td>74</td> <td>54</td> <td>-30.3</td> <td>-21.2</td> <td>V</td> </tr> <tr> <td>1.207</td> <td>3.0</td> <td>54.2</td> <td>40.6</td> <td>25.2</td> <td>2.6</td> <td>-38.0</td> <td>0.0</td> <td>0.0</td> <td>44.0</td> <td>30.3</td> <td>74</td> <td>54</td> <td>-30.0</td> <td>-23.7</td> <td>V</td> </tr> <tr> <td>1.270</td> <td>3.0</td> <td>54.2</td> <td>34.2</td> <td>25.4</td> <td>2.7</td> <td>-37.9</td> <td>0.0</td> <td>0.0</td> <td>44.3</td> <td>24.4</td> <td>74</td> <td>54</td> <td>-29.7</td> <td>-29.6</td> <td>V</td> </tr> <tr> <td>1.702</td> <td>3.0</td> <td>53.7</td> <td>35.3</td> <td>26.8</td> <td>3.2</td> <td>-37.3</td> <td>0.0</td> <td>0.0</td> <td>46.4</td> <td>28.0</td> <td>74</td> <td>54</td> <td>-27.6</td> <td>-26.0</td> <td>V</td> </tr> <tr> <td>1.867</td> <td>3.0</td> <td>45.6</td> <td>34.3</td> <td>27.4</td> <td>3.3</td> <td>-37.1</td> <td>0.0</td> <td>0.0</td> <td>39.3</td> <td>27.9</td> <td>74</td> <td>54</td> <td>-34.7</td> <td>-26.1</td> <td>V</td> </tr> </tbody> </table>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit	T60; S/N: 2238 @3m	T34 HP 8449B		T125; ARA 18-26GHz; S/N:1007				FCC 15.209	Hi Frequency Cables															3' cable 22807700	12' cable 22807600	20' cable 22807500					HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz					3' cable 22807700	12' cable 22807600	20' cable 22807500						R_001	Average Measurements RBW=1MHz ; VBW=10Hz					f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)	Harmonics Spurious															Low Ch 2402MHz															4.804	3.0	36.9	24.4	32.7	5.8	-34.8	0.0	0.0	40.5	28.0	74	54	-33.5	-26.0	V	7.206	3.0	35.7	23.0	35.4	7.2	-34.2	0.0	0.0	44.1	31.5	74	54	-29.9	-22.5	Noise floor	4.804	3.0	36.9	24.4	32.7	5.8	-34.8	0.0	0.0	40.5	28.0	74	54	-33.5	-26.0	H	7.206	3.0	35.7	23.0	35.4	7.2	-34.2	0.0	0.0	44.1	31.5	74	54	-29.9	-22.5	Noise floor	Mid Ch 2440MHz															4.880	3.0	38.4	25.3	32.7	5.8	-34.8	0.0	0.0	42.1	29.1	74	54	-31.9	-24.9	V	7.320	3.0	35.1	23.0	35.5	7.3	-34.1	0.0	0.0	43.8	31.7	74	54	-30.2	-22.3	Noise floor	4.880	3.0	37.0	24.2	32.7	5.8	-34.8	0.0	0.0	40.7	27.9	74	54	-33.3	-26.1	H	7.320	3.0	35.4	23.4	35.5	7.3	-34.1	0.0	0.0	44.0	32.0	74	54	-30.0	-22.0	Noise floor	High Ch 2480MHz															4.960	3.0	37.9	25.3	32.8	5.9	-34.8	0.0	0.0	41.8	29.2	74	54	-32.2	-24.8	V	7.440	3.0	36.2	23.2	35.6	7.3	-34.1	0.0	0.0	45.1	32.1	74	54	-28.9	-21.9	Noise floor	4.960	3.0	35.3	24.4	32.8	5.9	-34.8	0.0	0.0	39.1	28.2	74	54	-34.9	-25.8	H	7.440	3.0	34.3	23.5	35.6	7.3	-34.1	0.0	0.0	43.2	32.4	74	54	-30.8	-21.6	Noise floor	Spurious Emissions															1.130	3.0	54.4	43.4	24.9	2.5	-38.1	0.0	0.0	43.7	32.8	74	54	-30.3	-21.2	V	1.207	3.0	54.2	40.6	25.2	2.6	-38.0	0.0	0.0	44.0	30.3	74	54	-30.0	-23.7	V	1.270	3.0	54.2	34.2	25.4	2.7	-37.9	0.0	0.0	44.3	24.4	74	54	-29.7	-29.6	V	1.702	3.0	53.7	35.3	26.8	3.2	-37.3	0.0	0.0	46.4	28.0	74	54	-27.6	-26.0	V	1.867	3.0	45.6	34.3	27.4	3.3	-37.1	0.0	0.0	39.3	27.9	74	54	-34.7	-26.1	V
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz				Limit																																																																																																																																																																																																																																																																																																																																																																																																																																													
T60; S/N: 2238 @3m	T34 HP 8449B		T125; ARA 18-26GHz; S/N:1007				FCC 15.209																																																																																																																																																																																																																																																																																																																																																																																																																																													
Hi Frequency Cables																																																																																																																																																																																																																																																																																																																																																																																																																																																				
3' cable 22807700	12' cable 22807600	20' cable 22807500					HPF	Reject Filter	Peak Measurements RBW=VBW=1MHz																																																																																																																																																																																																																																																																																																																																																																																																																																											
3' cable 22807700	12' cable 22807600	20' cable 22807500						R_001	Average Measurements RBW=1MHz ; VBW=10Hz																																																																																																																																																																																																																																																																																																																																																																																																																																											
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																																																																																																																																																																																																																																																																																																																																																																																																																																					
Harmonics Spurious																																																																																																																																																																																																																																																																																																																																																																																																																																																				
Low Ch 2402MHz																																																																																																																																																																																																																																																																																																																																																																																																																																																				
4.804	3.0	36.9	24.4	32.7	5.8	-34.8	0.0	0.0	40.5	28.0	74	54	-33.5	-26.0	V																																																																																																																																																																																																																																																																																																																																																																																																																																					
7.206	3.0	35.7	23.0	35.4	7.2	-34.2	0.0	0.0	44.1	31.5	74	54	-29.9	-22.5	Noise floor																																																																																																																																																																																																																																																																																																																																																																																																																																					
4.804	3.0	36.9	24.4	32.7	5.8	-34.8	0.0	0.0	40.5	28.0	74	54	-33.5	-26.0	H																																																																																																																																																																																																																																																																																																																																																																																																																																					
7.206	3.0	35.7	23.0	35.4	7.2	-34.2	0.0	0.0	44.1	31.5	74	54	-29.9	-22.5	Noise floor																																																																																																																																																																																																																																																																																																																																																																																																																																					
Mid Ch 2440MHz																																																																																																																																																																																																																																																																																																																																																																																																																																																				
4.880	3.0	38.4	25.3	32.7	5.8	-34.8	0.0	0.0	42.1	29.1	74	54	-31.9	-24.9	V																																																																																																																																																																																																																																																																																																																																																																																																																																					
7.320	3.0	35.1	23.0	35.5	7.3	-34.1	0.0	0.0	43.8	31.7	74	54	-30.2	-22.3	Noise floor																																																																																																																																																																																																																																																																																																																																																																																																																																					
4.880	3.0	37.0	24.2	32.7	5.8	-34.8	0.0	0.0	40.7	27.9	74	54	-33.3	-26.1	H																																																																																																																																																																																																																																																																																																																																																																																																																																					
7.320	3.0	35.4	23.4	35.5	7.3	-34.1	0.0	0.0	44.0	32.0	74	54	-30.0	-22.0	Noise floor																																																																																																																																																																																																																																																																																																																																																																																																																																					
High Ch 2480MHz																																																																																																																																																																																																																																																																																																																																																																																																																																																				
4.960	3.0	37.9	25.3	32.8	5.9	-34.8	0.0	0.0	41.8	29.2	74	54	-32.2	-24.8	V																																																																																																																																																																																																																																																																																																																																																																																																																																					
7.440	3.0	36.2	23.2	35.6	7.3	-34.1	0.0	0.0	45.1	32.1	74	54	-28.9	-21.9	Noise floor																																																																																																																																																																																																																																																																																																																																																																																																																																					
4.960	3.0	35.3	24.4	32.8	5.9	-34.8	0.0	0.0	39.1	28.2	74	54	-34.9	-25.8	H																																																																																																																																																																																																																																																																																																																																																																																																																																					
7.440	3.0	34.3	23.5	35.6	7.3	-34.1	0.0	0.0	43.2	32.4	74	54	-30.8	-21.6	Noise floor																																																																																																																																																																																																																																																																																																																																																																																																																																					
Spurious Emissions																																																																																																																																																																																																																																																																																																																																																																																																																																																				
1.130	3.0	54.4	43.4	24.9	2.5	-38.1	0.0	0.0	43.7	32.8	74	54	-30.3	-21.2	V																																																																																																																																																																																																																																																																																																																																																																																																																																					
1.207	3.0	54.2	40.6	25.2	2.6	-38.0	0.0	0.0	44.0	30.3	74	54	-30.0	-23.7	V																																																																																																																																																																																																																																																																																																																																																																																																																																					
1.270	3.0	54.2	34.2	25.4	2.7	-37.9	0.0	0.0	44.3	24.4	74	54	-29.7	-29.6	V																																																																																																																																																																																																																																																																																																																																																																																																																																					
1.702	3.0	53.7	35.3	26.8	3.2	-37.3	0.0	0.0	46.4	28.0	74	54	-27.6	-26.0	V																																																																																																																																																																																																																																																																																																																																																																																																																																					
1.867	3.0	45.6	34.3	27.4	3.3	-37.1	0.0	0.0	39.3	27.9	74	54	-34.7	-26.1	V																																																																																																																																																																																																																																																																																																																																																																																																																																					
Rev. 07.22.09																																																																																																																																																																																																																																																																																																																																																																																																																																																				
<table> <tr> <td>f</td> <td>Measurement Frequency</td> <td>Amp</td> <td>Preamp Gain</td> <td>Avg Lim</td> <td>Average Field Strength Limit</td> </tr> <tr> <td>Dist</td> <td>Distance to Antenna</td> <td>D Corr</td> <td>Distance Correct to 3 meters</td> <td>Pk Lim</td> <td>Peak Field Strength Limit</td> </tr> <tr> <td>Read</td> <td>Analyzer Reading</td> <td>Avg</td> <td>Average Field Strength @ 3 m</td> <td>Avg Mar</td> <td>Margin vs. Average Limit</td> </tr> <tr> <td>AF</td> <td>Antenna Factor</td> <td>Peak</td> <td>Calculated Peak Field Strength</td> <td>Pk Mar</td> <td>Margin vs. Peak Limit</td> </tr> <tr> <td>CL</td> <td>Cable Loss</td> <td>HPF</td> <td>High Pass Filter</td> <td></td> <td></td> </tr> </table>					f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit	Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit	Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit	AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit	CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																																																																																																																																																																																																				
f	Measurement Frequency	Amp	Preamp Gain	Avg Lim	Average Field Strength Limit																																																																																																																																																																																																																																																																																																																																																																																																																																															
Dist	Distance to Antenna	D Corr	Distance Correct to 3 meters	Pk Lim	Peak Field Strength Limit																																																																																																																																																																																																																																																																																																																																																																																																																																															
Read	Analyzer Reading	Avg	Average Field Strength @ 3 m	Avg Mar	Margin vs. Average Limit																																																																																																																																																																																																																																																																																																																																																																																																																																															
AF	Antenna Factor	Peak	Calculated Peak Field Strength	Pk Mar	Margin vs. Peak Limit																																																																																																																																																																																																																																																																																																																																																																																																																																															
CL	Cable Loss	HPF	High Pass Filter																																																																																																																																																																																																																																																																																																																																																																																																																																																	


8.2. WORST-CASE RECEIVER ABOVE 1 GHz

High Frequency Measurement Compliance Certification Services, Fremont 5m Chamber																																							
<p>Company: BroadCom Corporation Project #: 11U13734 Date: 4/26/2011 Test Engineer: Thanh Nguyen Configuration: EUT, Antenna, remote support Laptop Mode: Receive Mode</p> <p><u>Test Equipment:</u></p> <table border="1"> <tr> <td>Horn 1-18GHz</td> <td>Pre-amplifier 1-26GHz</td> <td>Pre-amplifier 26-40GHz</td> <td>Horn > 18GHz</td> <td>Limit</td> </tr> <tr> <td>T60; S/N: 2238 @3m</td> <td>T34 HP 8449B</td> <td></td> <td></td> <td>RX RSS 210</td> </tr> <tr> <td colspan="5">Hi Frequency Cables</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td>HPF</td> <td>Reject Filter</td> </tr> <tr> <td>3' cable 22807700</td> <td>12' cable 22807600</td> <td>20' cable 22807500</td> <td></td> <td></td> </tr> </table> <p>Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz</p>															Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit	T60; S/N: 2238 @3m	T34 HP 8449B			RX RSS 210	Hi Frequency Cables					3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter	3' cable 22807700	12' cable 22807600	20' cable 22807500		
Horn 1-18GHz	Pre-amplifier 1-26GHz	Pre-amplifier 26-40GHz	Horn > 18GHz	Limit																																			
T60; S/N: 2238 @3m	T34 HP 8449B			RX RSS 210																																			
Hi Frequency Cables																																							
3' cable 22807700	12' cable 22807600	20' cable 22807500	HPF	Reject Filter																																			
3' cable 22807700	12' cable 22807600	20' cable 22807500																																					
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Fltr dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)																								
Low Ch 2402MHz																																							
1.134	3.0	54.0	41.3	24.9	2.5	-38.1	0.0	0.0	43.4	30.7	74	54	-30.6	-23.3	V																								
1.204	3.0	52.5	38.6	25.1	2.6	-38.0	0.0	0.0	42.2	28.3	74	54	-31.8	-25.7	V																								
1.274	3.0	53.3	37.6	25.4	2.7	-37.9	0.0	0.0	43.5	27.7	74	54	-30.5	-26.3	V																								
1.996	3.0	49.2	36.6	27.8	3.5	-36.9	0.0	0.0	43.5	30.9	74	54	-30.5	-23.1	H																								
1.204	3.0	52.7	38.8	25.1	2.6	-38.0	0.0	0.0	42.4	28.5	74	54	-31.6	-25.5	H																								
1.274	3.0	55.5	34.2	25.4	2.7	-37.9	0.0	0.0	45.7	24.4	74	54	-28.3	-29.6	H																								
Mid Ch 2440MHz																																							
1.210	3.0	51.4	32.5	25.2	2.6	-38.0	0.0	0.0	41.2	22.3	74	54	-32.8	-31.7	V																								
1.275	3.0	52.3	31.6	25.4	2.7	-37.9	0.0	0.0	42.5	21.8	74	54	-31.5	-32.2	V																								
1.705	3.0	54.7	33.6	26.8	3.2	-37.3	0.0	0.0	47.4	26.3	74	54	-26.6	-27.7	V																								
1.205	3.0	52.3	30.6	25.2	2.6	-38.0	0.0	0.0	42.1	20.3	74	54	-31.9	-33.7	H																								
1.275	3.0	54.1	32.6	25.4	2.7	-37.9	0.0	0.0	44.3	22.7	74	54	-29.7	-31.3	H																								
High Ch 2480MHz																																							
1.130	3.0	54.4	42.3	24.9	2.5	-38.1	0.0	0.0	43.7	31.7	74	54	-30.3	-22.3	V																								
1.207	3.0	54.2	39.3	25.2	2.6	-38.0	0.0	0.0	44.0	29.1	74	54	-30.0	-24.9	V																								
1.270	3.0	54.2	33.6	25.4	2.7	-37.9	0.0	0.0	44.3	23.7	74	54	-29.7	-30.3	V																								
1.702	3.0	53.7	34.6	26.8	3.2	-37.3	0.0	0.0	46.4	27.3	74	54	-27.6	-26.7	H																								
1.867	3.0	45.6	33.3	27.4	3.3	-37.1	0.0	0.0	39.3	26.9	74	54	-34.7	-27.1	H																								
Rev. 07.22.09																																							
f	Measurement Frequency			Amp	Preamp Gain					Avg Lim	Average Field Strength Limit																												
Dist	Distance to Antenna			D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit																												
Read	Analyzer Reading			Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit																												
AF	Antenna Factor			Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit																												
CL	Cable Loss			HPF	High Pass Filter																																		

8.3. WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL & VERTICAL)

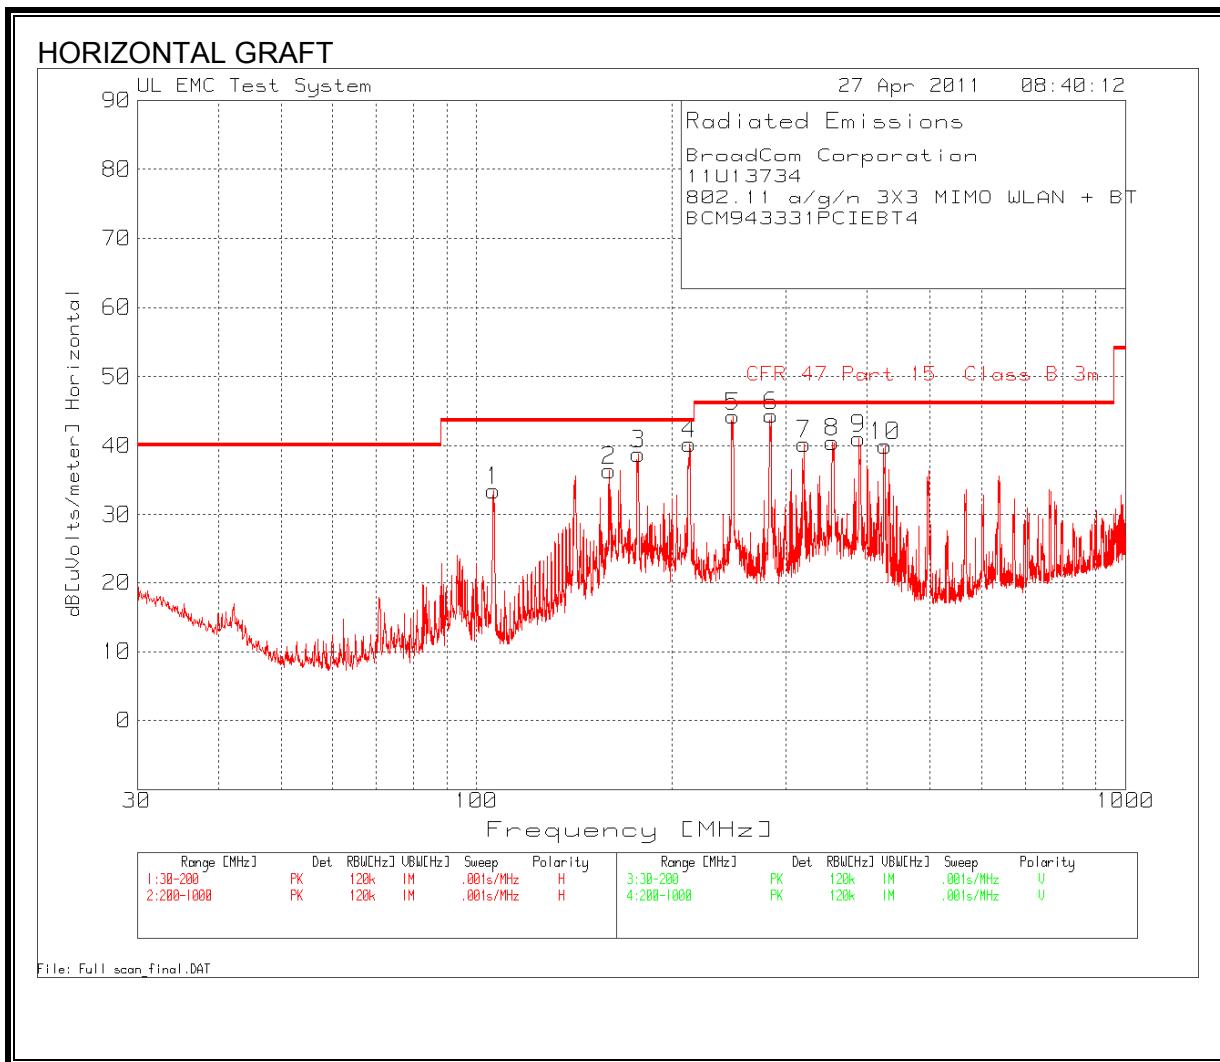

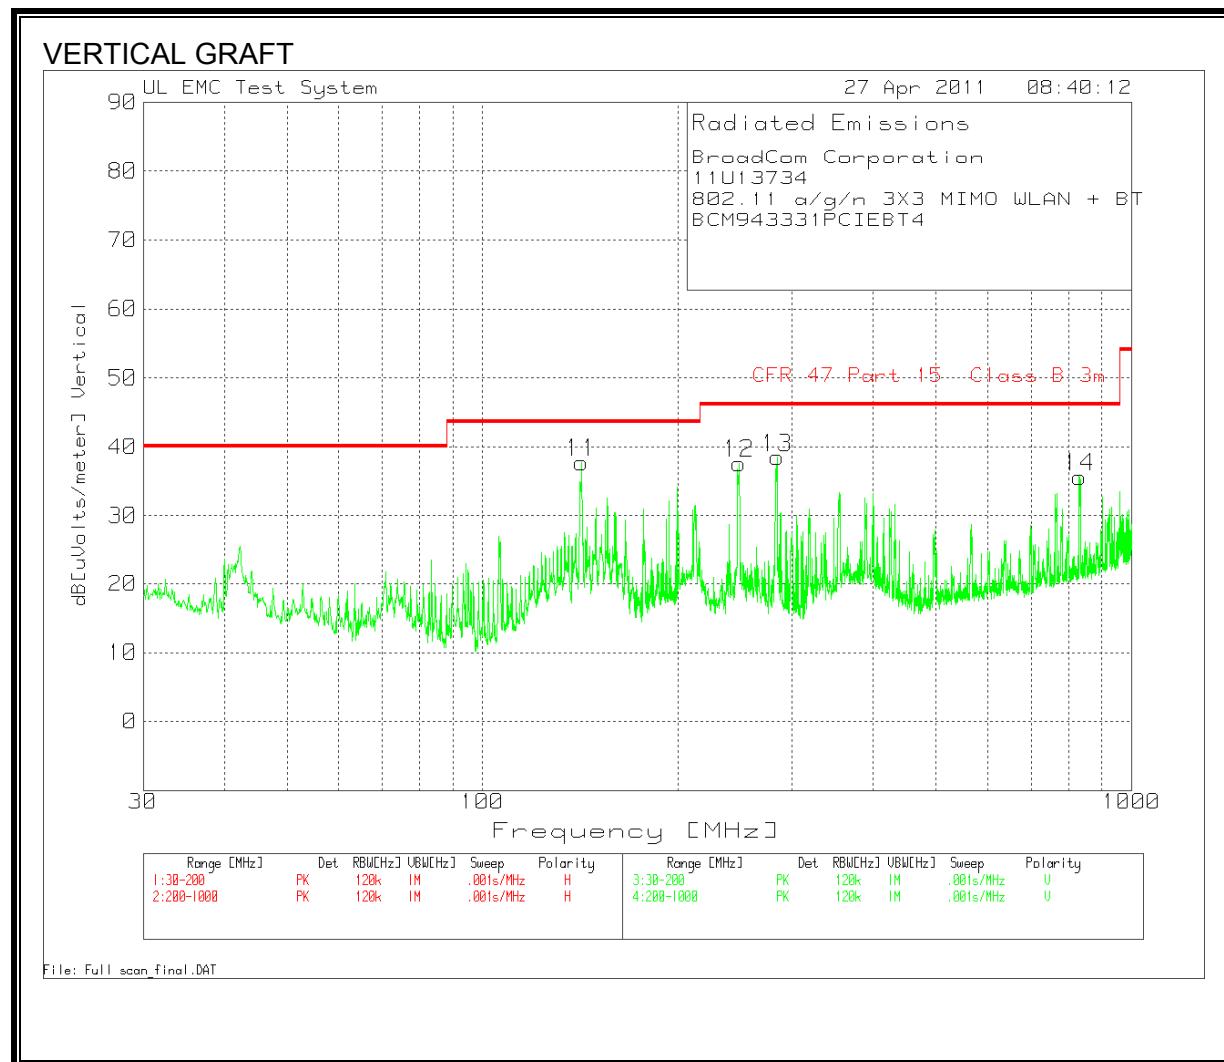

HORIZONTAL AND VERTICAL DATA

BroadCom Corporation

11U13734

802.11 a/g/n 3X3 MIMO WLAN + BT

BCM943331PCIEBT4

Range: 1 30 - 200MHz

Frequenc	Reading	Detector	3m below	PreAmp [dB]	Ant [dB]	Correction	Limit	Margin	Height [cm]	Polarity
106.1219	49.92	PK	1	-28	10.6	33.52	43.5	-9.98	200	Horz
159.9001	49.68	PK	1.3	-27.8	13.2	36.38	43.5	-7.12	200	Horz
177.6562	54.53	PK	1.3	-27.7	10.6	38.73	43.5	-4.77	200	Horz

Range: 3 200 - 1000MHz

Frequenc	Reading	Detector	3m below	PreAmp [dB]	Ant [dB]	Correction	Limit	Margin	Height [cm]	Polarity
213.058	54.49	PK	1.4	-27.6	11.9	40.19	43.5	-3.31	100	Horz
248.7675	58.37	PK	1.6	-27.5	11.8	44.27	46	-1.73	200	Horz
284.2105	57	PK	1.7	-27.3	13	44.4	46	-1.6	200	Horz
319.6536	51.98	PK	1.8	-27.4	13.8	40.18	46	-5.82	150	Horz
353.2312	51.88	PK	1.9	-27.6	14.3	40.48	46	-5.52	200	Horz
388.4077	51.92	PK	2.1	-27.8	14.8	41.02	46	-4.98	150	Horz
426.2492	50.38	PK	2.1	-28	15.5	39.98	46	-6.02	150	Horz

Range: 2 30 - 200MHz

Frequenc	Reading	Detector	3m below	PreAmp [dB]	Ant [dB]	Correction	Limit	Margin	Height [cm]	Polarity
142.1439	51.45	PK	1.2	-27.9	13	37.75	43.5	-5.75	115	Vert

Range: 4 200 - 1000MHz

Frequenc	Reading	Detector	3m below	PreAmp [dB]	Ant [dB]	Correction	Limit	Margin	Height [cm]	Polarity
248.7675	51.65	PK	1.6	-27.5	11.8	37.55	46	-8.45	100	Vert
284.2105	51.05	PK	1.7	-27.3	13	38.45	46	-7.55	100	Vert
833.1779	39.18	PK	3	-27.9	21.3	35.58	46	-10.42	100	Vert

Range: 3 200 - 1000MHz

Frequenc	Reading	Detector	3m below	PreAmp [dB]	Ant [dB]	Correction	Limit	Margin	Height [cm]	Azimuth	Polarity
248.67	54.23	QP	1.6	-27.5	11.8	40.13	46	-5.87	101	157	Horz
284.22	44.9	QP	1.7	-27.3	13	32.3	46	-13.7	81	120	Horz

8.4. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 [*]	56 to 46 [*]
0.5-5	56	46
5-30	60	50

^{*} Decreases with the logarithm of the frequency.

TEST PROCEDURE

The EUT is placed on a non-conducting table 40 cm from the vertical ground plane and 80 cm above the horizontal ground plane. The EUT is configured in accordance with ANSI C63.4.

The receiver is set to a resolution bandwidth of 9 kHz. Peak detection is used unless otherwise noted as quasi-peak or average.


Line conducted data is recorded for both NEUTRAL and HOT lines.

RESULTS


6 WORST EMISSIONS

BroadCom Corporation													
11U13734													
M/N BCM94331PCIEBT3AX													
Line-L1 .15 - 30MHz													
Test	Meter	Detector	dB[uVolts	Class B	Margin	Class B	Margin						
Frequency	Reading			QP Limit		Avg Limit							
0.384	45.89	PK	45.89	58.2	-12.31	48.2	-2.31						
0.384	44.8	Av	44.8	58.2	-13.4	48.2	-3.4						
0.51	44.71	PK	44.71	56	-11.29	46	-1.29						
0.51	43.84	Av	43.84	56	-12.16	46	-2.16						
1.4055	41.9	PK	41.9	56	-14.1	46	-4.1						
1.4055	38.92	Av	38.92	56	-17.08	46	-7.08						
Line-L2 .15 - 30MHz													
Test	Meter	Detector	dB[uVolts	Class B	Margin	Class B	Margin						
Frequency	Reading			QP Limit		Avg Limit							
0.258	47.64	PK	47.64	61.5	-13.86	51.5	-3.86						
0.258	40.35	Av	40.35	61.5	-21.15	51.5	-11.15						
0.7665	40.67	PK	40.67	56	-15.33	46	-5.33						
0.7665	39.6	Av	39.6	56	-16.4	46	-6.4						
1.5945	41.48	PK	41.48	56	-14.52	46	-4.52						
1.5945	40.03	Av	40.03	56	-15.97	46	-5.97						
PK - Peak detector													
QP - Quasi-Peak detector													
LnAv - Linear Average detector													
LgAv - Log Average detector													
Av - Average detector													
CAV - CISPR Average detector													
RMS - RMS detection													
CRMS - CISPR RMS detection													
Text File: Final.TXT													

LINE 1 RESULTS

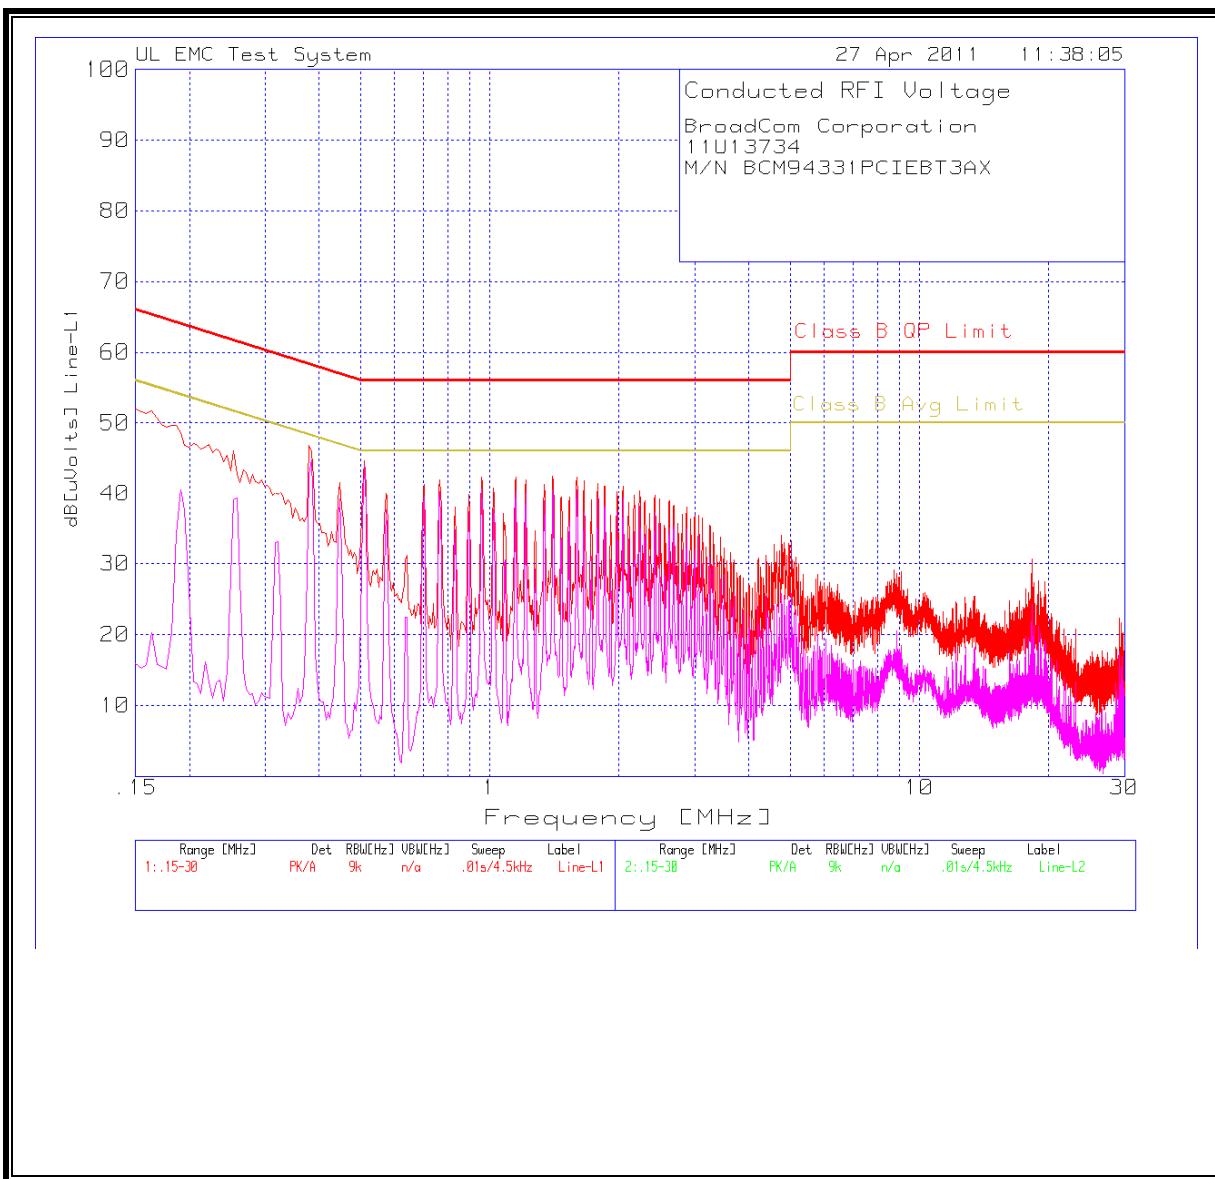

LINE 2 RESULTS

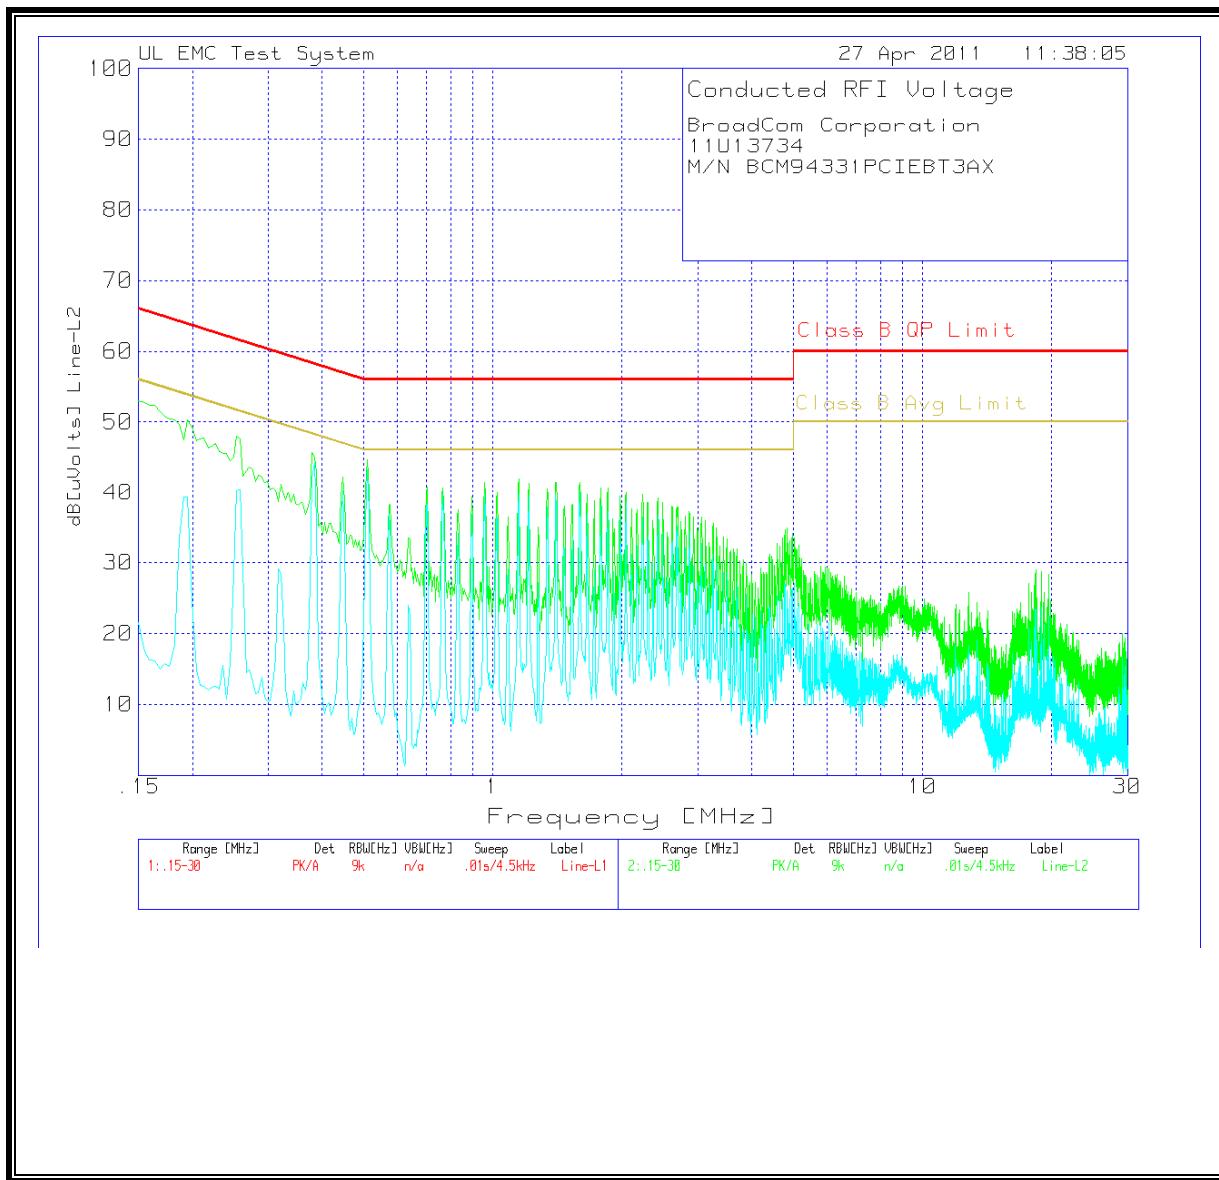

9. MAXIMUM PERMISSIBLE EXPOSURE

FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500	f/300	6
1500–100,000	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500	f/1500	30
1500–100,000	1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

IC RULES

IC Safety Code 6, Section 2.2.1 (a) A person other than an RF and microwave exposed worker shall not be exposed to electromagnetic radiation in a frequency band listed in Column 1 of Table 5, if the field strength exceeds the value given in Column 2 or 3 of Table 5, when averaged spatially and over time, or if the power density exceeds the value given in Column 4 of Table 5, when averaged spatially and over time.

Table 5
Exposure Limits for Persons Not Classed As RF and Microwave Exposed Workers (Including the General Public)

1 Frequency (MHz)	2 Electric Field Strength; rms (V/m)	3 Magnetic Field Strength; rms (A/m)	4 Power Density (W/m ²)	5 Averaging Time (min)
0.003–1	280	2.19		6
1–10	280/ <i>f</i>	2.19/ <i>f</i>		6
10–30	28	2.19/ <i>f</i>		6
30–300	28	0.073	2*	6
300–1 500	1.585 <i>f</i> ^{0.5}	0.0042 <i>f</i> ^{0.5}	<i>f</i> /150	6
1 500–15 000	61.4	0.163	10	6
15 000–150 000	61.4	0.163	10	616 000 / <i>f</i> ^{1.2}
150 000–300 000	0.158 <i>f</i> ^{0.5}	4.21 × 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 × 10 ⁻⁵ <i>f</i>	616 000 / <i>f</i> ^{1.2}

* Power density limit is applicable at frequencies greater than 100 MHz.

Notes:

1. Frequency, *f*, is in MHz.
2. A power density of 10 W/m² is equivalent to 1 mW/cm².
3. A magnetic field strength of 1 A/m corresponds to 1.257 microtesla (μT) or 12.57 milligauss (mG).

EQUATIONS

Power density is given by:

$$S = \text{EIRP} / (4 * \pi * D^2)$$

where

S = Power density in W/m²

EIRP = Equivalent Isotropic Radiated Power in W

D = Separation distance in m

Power density in units of W/m² is converted to units of mW/cm² by dividing by 10.

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \pi * S))$$

where

D = Separation distance in m

EIRP = Equivalent Isotropic Radiated Power in W

S = Power density in W/m²

For multiple colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the Power * Gain product (in linear units) of each transmitter.

$$\text{Total EIRP} = (P1 * G1) + (P2 * G2) + \dots + (Pn * Gn)$$

where

Px = Power of transmitter x

Gx = Numeric gain of antenna x

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

LIMITS

From FCC §1.1310 Table 1 (B), the maximum value of S = 1.0 mW/cm²

From IC Safety Code 6, Section 2.2 Table 5 Column 4, S = 10 W/m²

RESULTS

Band	Mode	Separation Distance (m)	Output Power (dBm)	Antenna Gain (dBi)	IC Power Density (W/m ²)	FCC Power Density (mW/cm ²)
2.4 GHz	Bluetooth	0.20	1.02	1.11	0.0033	0.0003