


*EMC Test Report  
Information Technology Equipment  
Class B Digital Device  
FCC Part 15  
Industry Canada ICES 003*

*Model: BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card*


FCC ID: QDS-BRCM1060  
COMPANY: Broadcom Corporation  
190 Mathilda Ave  
Sunnyvale, CA 94086  
TEST SITE(S): Elliott Laboratories  
41039 Boyce Road  
Fremont, CA. 94538-2435  
REPORT DATE: July 13, 2011  
FINAL TEST DATES: May 26 and 27, 2011  
TOTAL NUMBER OF PAGES: 31

PROGRAM MGR /  
TECHNICAL REVIEWER:

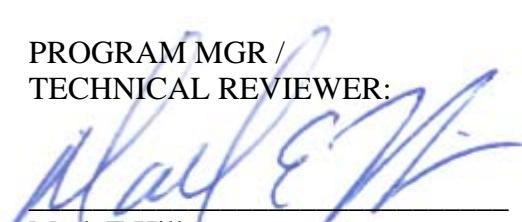

Mark E Hill  
Staff Engineer

QUALITY ASSURANCE DELEGATE /  
FINAL REPORT PREPARER:



David Guidotti  
Senior Technical Writer



Testing Cert #2016.01

Elliott Laboratories is accredited by the A2LA, certificate number 2016.01, to perform the test(s) listed in this report, except where noted otherwise. This report and the information contained herein represent the results of testing test articles identified and selected by the client performed to specifications and/or procedures selected by the client. National Technical Systems (NTS) makes no representations, expressed or implied, that such testing is adequate (or inadequate) to demonstrate efficiency, performance, reliability, or any other characteristic of the articles being tested, or similar products. This report should not be relied upon as an endorsement or certification by NTS of the equipment tested, nor does it represent any statement whatsoever as to its merchantability or fitness of the test article, or similar products, for a particular purpose. This report shall not be reproduced except in full.

***REVISION HISTORY***

Rev#	Date	Comments	Modified By
-	07-13-2011	First release	

**TABLE OF CONTENTS**

<b>REVISION HISTORY .....</b>	<b>2</b>
<b>TABLE OF CONTENTS .....</b>	<b>3</b>
<b>SCOPE.....</b>	<b>4</b>
<b>OBJECTIVE.....</b>	<b>4</b>
<b>STATEMENT OF COMPLIANCE.....</b>	<b>4</b>
<b>DEVIATIONS FROM THE STANDARDS.....</b>	<b>4</b>
<b>INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS .....</b>	<b>5</b>
CONDUCTED EMISSIONS (MAINS PORT) .....	5
RADIATED EMISSIONS .....	5
<b>MEASUREMENT UNCERTAINTIES.....</b>	<b>6</b>
<b>EQUIPMENT UNDER TEST (EUT) DETAILS.....</b>	<b>7</b>
GENERAL.....	7
OTHER EUT DETAILS .....	7
ENCLOSURE.....	7
MODIFICATIONS.....	7
SUPPORT EQUIPMENT.....	7
EUT INTERFACE PORTS .....	8
EUT OPERATION .....	8
<b>EMISSIONS TESTING .....</b>	<b>9</b>
RADIATED AND CONDUCTED EMISSIONS .....	9
RADIATED EMISSIONS CONSIDERATIONS .....	9
CONDUCTED EMISSIONS CONSIDERATIONS .....	9
<b>EMISSIONS MEASUREMENT INSTRUMENTATION.....</b>	<b>10</b>
RECEIVER SYSTEM .....	10
INSTRUMENT CONTROL COMPUTER .....	10
LINE IMPEDANCE STABILIZATION NETWORK (LISN).....	10
FILTERS/ATTENUATORS .....	10
ANTENNAS.....	11
ANTENNA MAST AND EQUIPMENT TURNTABLE.....	11
INSTRUMENT CALIBRATION.....	11
<b>EMISSIONS TEST PROCEDURES .....</b>	<b>12</b>
EUT AND CABLE PLACEMENT .....	12
CONDUCTED EMISSIONS (MAINS) .....	12
RADIATED EMISSIONS (SEMI-ANECHOIC AND/OR OATS TEST ENVIRONMENT) .....	13
Preliminary Scan.....	13
Final Maximization.....	13
<b>SAMPLE CALCULATIONS .....</b>	<b>14</b>
SAMPLE CALCULATIONS - CONDUCTED EMISSIONS .....	14
SAMPLE CALCULATIONS - RADIATED EMISSIONS.....	14
<b>APPENDIX A TEST EQUIPMENT CALIBRATION DATA .....</b>	<b>15</b>
<b>APPENDIX B TEST DATA .....</b>	<b>16</b>
<b>APPENDIX C PRODUCT LABELING REQUIREMENTS .....</b>	<b>28</b>
<b>APPENDIX D USER MANUAL REGULATORY STATEMENTS .....</b>	<b>29</b>
<b>APPENDIX E BASIC AND REFERENCE STANDARDS .....</b>	<b>30</b>
SUBPART B OF PART 15 OF FCC RULES FOR DIGITAL DEVICES .....	30
<b>END OF REPORT .....</b>	<b>31</b>

**SCOPE**

Governments and standards organizations around the world have published requirements regarding the electromagnetic compatibility (EMC) of electronic equipment. Testing has been performed on the Broadcom Corporation model BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card, pursuant to the following standards.

Standard	Title	Standard Date
FCC Part 15, Subpart B	Radio Frequency Devices	October 2010 as Amended
ICES-003, Issue 4	Digital apparatus	2004

All measurements and evaluations have been in accordance with these specifications, test procedures, and measurement guidelines as outlined in Elliott Laboratories test procedures, and in accordance with the standards referenced therein (refer to Appendix E).

**OBJECTIVE**

The objective of Broadcom Corporation is to verify compliance with FCC requirements for digital devices and Canada's requirements for digital devices;

**STATEMENT OF COMPLIANCE**

The tested sample of Broadcom Corporation model BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card complied with the requirements of:

Standard/Regulation	Equipment Type/Class	Standard Date
Subpart B of Part 15 of the FCC Rules (CFR title 47)	Class B	2010 as amended
ICES-003, Issue 4	Class B	2004

The test results recorded herein are based on a single type test of the Broadcom Corporation model BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card and therefore apply only to the tested sample(s). The sample was selected and prepared by Anne Liang of Broadcom Corporation.

Maintenance of compliance is the responsibility of the company. Any modification of the product that could result in increased emissions or susceptibility should be checked to ensure compliance has been maintained (i.e., printed circuit board layout changes, different enclosure, different line filter or power supply, harnessing and/or interface cable changes, etc.).

**DEVIATIONS FROM THE STANDARDS**

No deviations were made from the published requirements listed in the scope of this report.

**INFORMATION TECHNOLOGY EQUIPMENT EMISSIONS TEST RESULTS**

The following emissions tests were performed on the Broadcom Corporation model BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card. The measurements were extracted from the data recorded during testing and represent the highest amplitude emissions relative to the specification limits. The complete test data is provided in the appendices of this report.

**CONDUCTED EMISSIONS (MAINS PORT)**

Frequency Range Operating Voltage	Standard/Section	Requirement	Measurement	Margin	Status
0.15-30 MHz, 120V, 60Hz	FCC § 15.107(a) (Class B)	0.15-0.5 MHz: 66-56 dB $\mu$ V QP 56-46 dB $\mu$ V Av 0.5-5.0 MHz: 56 dB $\mu$ V QP 46 dB $\mu$ V Av 5.0-30.0 MHz: 60 dB $\mu$ V QP 50 dB $\mu$ V Av	40.9dB $\mu$ V @ 2.447MHz	-5.1dB	Complied

**RADIATED EMISSIONS**

Frequency Range	Standard/Section	Requirement	Measurement	Margin	Status
30-1000 MHz	FCC §15.109(g) Class B	30 – 230, 30 dB $\mu$ V/m 230 – 1000, 37 dB $\mu$ V/m (10m limit)	36.1dB $\mu$ V/m @74.57 MHz	-3.9dB	Complied

Note 1 Testing above 1GHz against FCC 15.109(a) requirements was not required because the highest frequency generated in the EUT was declared to be less than 108 MHz.

**MEASUREMENT UNCERTAINTIES**

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below were calculated using the approach described in CISPR 16-4-2:2003 using a coverage factor of  $k=2$ , which gives a level of confidence of approximately 95%. The levels were found to be below levels of  $U_{cispr}$  and therefore no adjustment of the data for measurement uncertainty is required.

Measurement Type	Measurement Unit	Frequency Range	Expanded Uncertainty
Conducted Emissions	dB <sub>uV</sub> or dB <sub>uA</sub>	150kHz – 30MHz	± 2.2 dB
Radiated Electric Field	dB <sub>uV/m</sub>	30 – 1000 MHz 1000 – 40,000 MHz	± 3.6 dB ± 6.0 dB

**EQUIPMENT UNDER TEST (EUT) DETAILS****GENERAL**

The Broadcom Corporation model BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card is a WLAN+Bluetooth PCI-E Minicard, that is designed to enable WLAN or Bluetooth connections when installed in PCs. Since the EUT would be placed on a table top during operation, the EUT was treated as table-top equipment during testing to simulate the end-user environment. The electrical rating of the EUT is 3.3Vdc, 800mA.

The sample was received on May 18, 2011 and tested on May 26 and 27, 2011. The EUT consisted of the following component(s):

Company	Model	Description	Serial Number	FCC ID
Broadcom	BCM943227H MB	2.4GHz WLAN + BT 2.1		

**OTHER EUT DETAILS**

The BT and Wifi share the aux antenna. Can not transmit at the same time.

The antenna connects to the EUT via a non-standard I-PEX antenna connector, thereby meeting the requirements of FCC 15.203.

**ENCLOSURE**

The EUT does not have an enclosure as it is designed to be installed within the enclosure of a host computer or system.

**MODIFICATIONS**

No modifications were made to the EUT during the time the product was at Elliott.

**SUPPORT EQUIPMENT**

The following equipment was used as local support equipment for emissions testing:

Company	Model	Description	Serial Number	FCC ID
Hewlett Packard	-	Printer	-	-

The following equipment was used as remote support equipment for emissions testing:

Company	Model	Description	Serial Number	FCC ID
NetGear	-	Hub	-	-

**EUT INTERFACE PORTS**

The I/O cabling configuration during emissions testing was as follows:

Port		Description	Cable(s)	
From	To		Shielded/Unshielded	Length(m)
Host Laptop – Ethernet	Remote Hub	CAT 5	Unshielded	30
Host Laptop – USB	Printer	multiconductor	Shielded	1.5

**EUT OPERATION**

During emissions testing the EUT was transmitting and running an H pattern on the laptop.

**EMISSIONS TESTING****RADIATED AND CONDUCTED EMISSIONS**

Final test measurements were taken at the Elliott Laboratories Anechoic Chambers listed below. The test sites contain separate areas for radiated and conducted emissions testing. The sites conform to the requirements of ANSI C63.4: 2003 *American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz* and CISPR 16-1-4:2007 - *Specification for radio disturbance and immunity measuring apparatus and methods Part 1-4: Radio disturbance and immunity measuring apparatus Ancillary equipment Radiated disturbances*. They are registered with the VCCI and are on file with the FCC and Industry Canada.

Site	Registration Numbers			Location
	VCCI	FCC	Canada	
Chamber 4	C-1796	211948	IC 2845B-4	41039 Boyce Road Fremont, CA 94538-2435
Chamber 7	R-3389	A2LA accredited	IC 2845B-7	

**RADIATED EMISSIONS CONSIDERATIONS**

Radiated emissions measurements were made with the EUT powered from a supply voltage within the expected tolerances of each nominal operating voltage/frequency for each geographical regions covered by the scope of the standards referenced in this report.

**CONDUCTED EMISSIONS CONSIDERATIONS**

Conducted emissions testing is performed in conformance with ANSI C63.4 and CISPR 22.

Mains port measurements are made with the EUT connected to the public power network through a nominal, standardized RF impedance, which is provided by a line impedance stabilization network, known as a LISN. A LISN is inserted in series with each current-carrying conductor in the EUT power cord.

**EMISSIONS MEASUREMENT INSTRUMENTATION****RECEIVER SYSTEM**

An EMI receiver as specified in CISPR 16-1-1:2006 is used for emissions measurements. The receivers used can measure over the frequency range of 9 kHz up to 7 GHz. These receivers allow both ease of measurement and high accuracy to be achieved. The receivers have Peak, Average, and CISPR (Quasi-peak) detectors built into their design so no external adapters are necessary. The receiver automatically sets the required bandwidth for the CISPR detector used during measurements.

For measurements above the frequency range of the receivers, a spectrum analyzer is utilized because it provides visibility of the entire spectrum along with the precision and versatility required to support engineering analysis. Average measurements above 1000 MHz are performed on the spectrum analyzer using the linear-average method with a resolution bandwidth of 1 MHz and a video bandwidth of 10 Hz.

**INSTRUMENT CONTROL COMPUTER**

Measurements are converted to the field strength at an antenna or voltage developed at the LISN (or ISN) measurement port, which is then compared directly with the appropriate specification limit under software control of the test receivers and spectrum analyzers. This provides added accuracy since all site correction factors, such as cable loss and antenna factors are added automatically.

**LINE IMPEDANCE STABILIZATION NETWORK (LISN)**

Line conducted emission measurements utilize a fifty micro-Henry Line Impedance Stabilization Network as the monitoring point. The LISN used also contains a 250-uH CISPR adapter. This network provides for calibrated radio-frequency noise measurements by the design of the internal low-pass and high-pass filters on the EUT and measurement ports, respectively.

**FILTERS/ATTENUATORS**

External filters and precision attenuators are often connected between the receiving antenna or LISN and the receiver. This eliminates saturation effects and non-linear operation due to high-amplitude transient events.

**ANTENNAS**

A bilog antenna or combination of biconical and log periodic antennas are used to cover the range from 30 MHz to 1000 MHz. Narrowband tuned dipole antennas may be used over the entire 30 to 1000 MHz frequency range for precision measurements of field strength. Above 1000 MHz, horn antennas are used. The antenna calibration factors are included in site factors that are programmed into the test receivers or data collection software.

**ANTENNA MAST AND EQUIPMENT TURNTABLE**

The antennas used to measure the radiated electric field strength are mounted on a non-conductive antenna mast equipped with a motor drive to vary the antenna height.

ANSI C63.4, CISPR 22 and KN22 specify that the test height above ground for table-mounted devices shall be 80 centimeters. Floor-mounted equipment shall be placed on the ground plane if the device is normally used on a conductive floor or separated from the ground plane by insulating material up to 12-mm thick if the device is normally used on a non-conductive floor. During radiated measurements, the EUT is positioned on a motorized turntable in conformance with this requirement.

**INSTRUMENT CALIBRATION**

All test equipment is regularly checked to ensure that performance is maintained in accordance with the company's specifications. An appendix of this report contains the list of test equipment used and calibration information.

**EMISSIONS TEST PROCEDURES****EUT AND CABLE PLACEMENT**

The standards require that interconnecting cables be connected to the available ports of the unit and that the placement of the unit and the attached cables simulate the worst case orientation that can be expected from a typical installation, so far as practicable. To this end, the position of the unit and associated cabling is varied within the guidelines of ANSI C63.4, CISPR 22 and KN22, and the worst-case orientation is used for final measurements.

**CONDUCTED EMISSIONS (MAINS)**

Conducted emissions are measured at the plug end of the power cord supplied with the EUT. Excess power cord length is wrapped in a bundle between 30 and 40 centimeters in length near the center of the cord. Preliminary measurements are made to determine the highest-amplitude emission relative to the specification limit for all the modes of operation. Placement of system components and varying of cable positions are performed in each mode. A final peak-mode scan is then performed in the position and mode for which the highest emission was noted on all current carrying conductors of the power cord. Emissions that have peak values close to the specification limit are also measured in the quasi-peak and average detection modes to determine compliance except when the amplitude of the emission when measured with the quasi-peak detector is more than 10 dB below the specification limit for average measurements. In this case only quasi-peak measurements are performed.

**RADIATED EMISSIONS (SEMI-ANECHOIC and/or OATS TEST ENVIRONMENT)**

Radiated emissions measurements in a semi-anechoic environment are performed in two phases (preliminary scan and final maximization). Final maximization may be performed on an OATS.

**Preliminary Scan**

A preliminary scan of emissions is conducted in which all significant EUT frequencies are identified with the system in a nominal configuration. At least two scans are performed from 30 MHz up to the frequency required by the regulations specified on page 1. One or more of these are performed with the antenna polarized vertically and one or more of these are performed with the antenna polarized horizontally. During the preliminary scans, the EUT is rotated through 360°, the antenna height is varied and cable positions are varied to determine the highest emission relative to the limit. A speaker is provided in the receiver to aid in discriminating between EUT and ambient emissions if required. Other methods used during the preliminary scan for EUT emissions involve scanning with near-field magnetic loops, monitoring I/O cables with RF current clamps, and cycling power to the EUT.

**Final Maximization**

During final maximization, the highest-amplitude emissions identified in the spectral search are viewed while the EUT azimuth angle is varied from 0 to 360 degrees relative to the receiving antenna. The azimuth that results in the highest emission is then maintained while varying the antenna height from one to four meters. The result is the identification of the highest amplitude for each of the highest peaks. Each recorded level is corrected in the receiver using appropriate factors for cables, connectors, antennas, and preamplifier gain. Emissions that have values close to the specification limit may also be measured with a tuned dipole antenna to determine compliance.

For measurements above 1GHz every effort is made to ensure the EUT remains within the cone of radiation of the measurement antenna (i.e. 3dB beam-width of the antenna). This may include rotating the product and/or angling the measurement antenna.

When Testing above 18 GHz, the receive antenna is located at 1 meter from the EUT and the antenna height is restricted to a maximum of 2.5m. Maximum emissions are found within this restricted range because emission levels decrease over distance and as the antenna is raised above 2.5m, the distance from the EUT increases. As a result of the increased measurement distance, at antenna heights above 2.5m, lower emission levels are measured as compared to emissions levels measured at antenna heights at 2.5m and below.

**SAMPLE CALCULATIONS****SAMPLE CALCULATIONS - CONDUCTED EMISSIONS**

Receiver readings are compared directly to the conducted emissions specification limit (decibel form). The calculation is as follows:

$$R_r - S = M$$

where:

$R_r$  = Receiver Reading in dBuV

$S$  = Specification Limit in dBuV

$M$  = Margin to Specification in +/- dB

**SAMPLE CALCULATIONS - RADIATED EMISSIONS**

Receiver readings are compared directly to the specification limit (decibel form). The receiver internally corrects for cable loss, preamplifier gain, and antenna factor. The calculations are in the reverse direction of the actual signal flow, thus cable loss is added and the amplifier gain is subtracted. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements. A distance factor, when used for electric field measurements, is calculated by using the following formula:

$$F_d = 20 * \text{LOG10} (D_m/D_s)$$

where:

$F_d$  = Distance Factor in dB

$D_m$  = Measurement Distance in meters

$D_s$  = Specification Distance in meters

Measurement Distance is the distance at which the measurements were taken and Specification Distance is the distance at which the specification limits are based. The Antenna Factor converts the voltage at the antenna coaxial connector to the field strength at the antenna elements.

The margin of a given emission peak relative to the limit is calculated as follows:

$$R_c = R_r + F_d$$

and

$$M = R_c - L_s$$

where:

$R_r$  = Receiver Reading in dBuV/m

$F_d$  = Distance Factor in dB

$R_c$  = Corrected Reading in dBuV/m

$L_s$  = Specification Limit in dBuV/m

$M$  = Margin in dB Relative to Spec

*Appendix A Test Equipment Calibration Data***Radiated Emissions, 30 - 1,000 MHz, 26-May-11**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Hewlett Packard	EMC Spectrum Analyzer, 9 KHz - 22 GHz	8593EM	1319	11/22/2011
Rohde & Schwarz	Test Receiver, 0.009-2750 MHz	ESN	1332	1/17/2012
Sunol Sciences	Biconilog, 30-3000 MHz	JB3	1548	6/24/2012
Com-Power Corp.	Preamplifier, 30-1000 MHz	PA-103A	2359	2/15/2012

**Conducted Emissions - AC Power Ports, 27-May-11**

<u>Manufacturer</u>	<u>Description</u>	<u>Model</u>	<u>Asset #</u>	<u>Cal Due</u>
Rohde & Schwarz	Pulse Limiter	ESH3 Z2	372	1/25/2012
EMCO	LISN, 10 kHz-100 MHz	3825/2	1292	3/1/2012
Rohde & Schwarz	EMI Test Receiver, 20 Hz-7 GHz	ESIB7	1538	11/2/2011

*Appendix B Test Data*

T83268 Pages 17 - 27



## EMC Test Data

Client:	Broadcom Corporation	Job Number:	J83157
Model:	BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card	T-Log Number:	T83268
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Emissions Standard(s):	FCC 15.247/RSS-210	Class:	-
Immunity Standard(s):	-	Environment:	-

## EMC Test Data

For The

### Broadcom Corporation

Model

BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card

Date of Last Test: 8/9/2011



## *EMC Test Data*

Client:	Broadcom Corporation	Job Number:	J83157
Model:	BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card	T-Log Number:	T83268
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247/RSS-210	Class:	-

## Conducted Emissions

*(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)*

## Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 5/27/2011

Config. Used: 2

Test Engineer: Suresh Kondapalli

Config Change: None

Test Location: Fremont Chamber #4

EUT Voltage: Refer to individual run

## General Test Configuration

For tabletop equipment, the EUT installed in host system was located on a wooden table inside the semi-anechoic chamber, 40 cm from a vertical coupling plane and 80cm from the LISN. A second LISN was used for all local support equipment. Remote support equipment was located outside of the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

**Ambient Conditions:** Temperature: 22 °C  
Rel. Humidity: 35 %

## Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	CE, AC Power, 120V/60Hz	Class B	PASS	40.9dB $\mu$ V @ 2.447MHz (-5.1dB)
2	CE, AC Power, 230V/50Hz	Class B	PASS	40.0dB $\mu$ V @ 2.081MHz (-6.0dB)

## Modifications Made During Testing

No modifications were made to the EUT during testing


## Deviations From The Standard

No deviations were made from the requirements of the standard.


Client:	Broadcom Corporation	Job Number:	J83157
Model:	BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card	T-Log Number:	T83268
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247/RSS-210	Class:	-

**Run #1: AC Power Port Conducted Emissions, 0.15 - 30MHz, 120V/60Hz**
**Preliminary peak readings captured during pre-scan (peak readings vs. average limit)**

Frequency MHz	Level dB $\mu$ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.151	50.5	Line 1	56.0	-5.5	Peak	
0.222	42.3	Line 1	52.8	-10.5	Peak	
0.239	42.3	Line 1	52.1	-9.8	Peak	
0.393	38.9	Line 1	48.0	-9.1	Peak	
2.349	46.2	Line 1	46.0	0.2	Peak	
2.421	44.9	Line 1	46.0	-1.1	Peak	
2.511	45.6	Line 1	46.0	-0.4	Peak	
2.736	45.5	Line 1	46.0	-0.5	Peak	
0.158	49.7	Neutral	55.6	-5.9	Peak	
0.197	44.7	Neutral	53.7	-9.0	Peak	
2.132	43.2	Neutral	46.0	-2.8	Peak	
2.448	43.4	Neutral	46.0	-2.6	Peak	
2.917	43.6	Neutral	46.0	-2.4	Peak	
3.160	42.7	Neutral	46.0	-3.3	Peak	

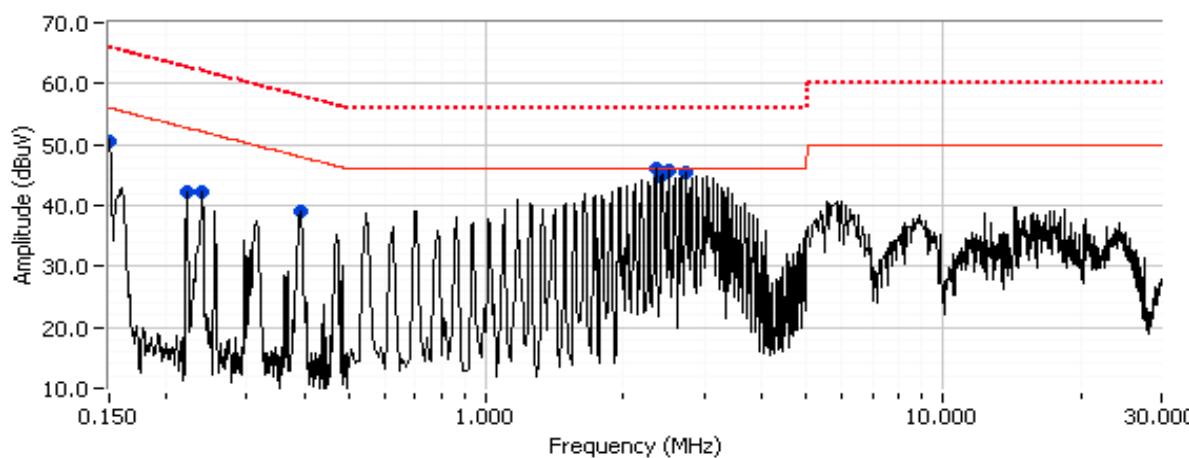**Line1: 120V 60Hz**


Client:	Broadcom Corporation	Job Number:	J83157
Model:	BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card	T-Log Number:	T83268
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247/RSS-210	Class:	-

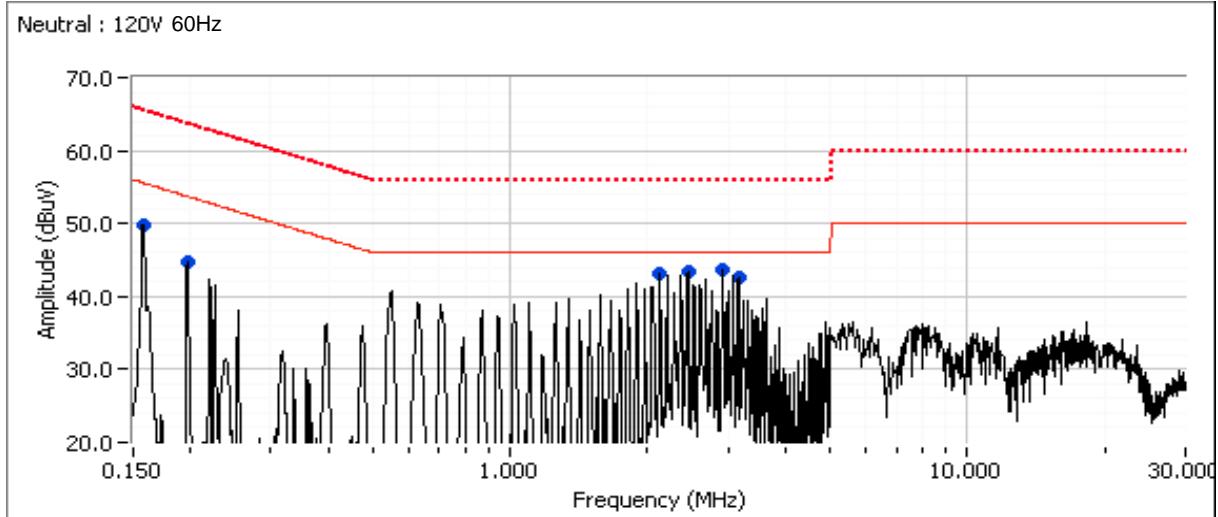



## EMC Test Data

Client:	Broadcom Corporation	Job Number:	J83157
Model:	BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card	T-Log Number:	T83268
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247/RSS-210	Class:	-


### Final quasi-peak and average readings

Frequency MHz	Level dB $\mu$ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
2.447	40.9	Neutral	46.0	-5.1	AVG	AVG (0.10s)
2.520	40.2	Line 1	46.0	-5.8	AVG	AVG (0.10s)
2.128	39.5	Neutral	46.0	-6.5	AVG	AVG (0.10s)
2.921	37.9	Neutral	46.0	-8.1	AVG	AVG (0.10s)
0.392	37.5	Line 1	48.0	-10.5	AVG	AVG (0.10s)
3.155	34.9	Neutral	46.0	-11.1	AVG	AVG (0.10s)
2.447	43.1	Neutral	56.0	-12.9	QP	QP (1.00s)
2.520	42.9	Line 1	56.0	-13.1	QP	QP (1.00s)
2.128	42.2	Neutral	56.0	-13.8	QP	QP (1.00s)
2.921	42.1	Neutral	56.0	-13.9	QP	QP (1.00s)
2.358	30.2	Line 1	46.0	-15.8	AVG	AVG (0.10s)
3.155	39.0	Neutral	56.0	-17.0	QP	QP (1.00s)
0.157	36.6	Neutral	55.6	-19.0	AVG	AVG (0.10s)
0.392	38.5	Line 1	58.0	-19.5	QP	QP (1.00s)
0.239	31.7	Line 1	52.1	-20.4	AVG	AVG (0.10s)
0.151	45.0	Line 1	65.9	-20.9	QP	QP (1.00s)
0.157	44.2	Neutral	65.6	-21.4	QP	QP (1.00s)
2.358	34.4	Line 1	56.0	-21.6	QP	QP (1.00s)
2.729	30.7	Line 1	56.0	-25.3	QP	QP (1.00s)
0.197	38.3	Neutral	63.7	-25.4	QP	QP (1.00s)
0.239	35.5	Line 1	62.1	-26.6	QP	QP (1.00s)
0.151	28.9	Line 1	55.9	-27.0	AVG	AVG (0.10s)
0.221	35.8	Line 1	62.8	-27.0	QP	QP (1.00s)
2.729	18.7	Line 1	46.0	-27.3	AVG	AVG (0.10s)
0.221	13.1	Line 1	52.8	-39.7	AVG	AVG (0.10s)
0.197	13.8	Neutral	53.7	-39.9	AVG	AVG (0.10s)


Client:	Broadcom Corporation	Job Number:	J83157
Model:	BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card	T-Log Number:	T83268
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247/RSS-210	Class:	-

**Run #2: AC Power Port Conducted Emissions, 0.15 - 30MHz, 230V/50Hz**
**Preliminary peak readings captured during pre-scan (peak readings vs. average limit)**

Frequency MHz	Level dB $\mu$ V	AC Line	Class B		Detector QP/Ave	Comments
			Limit	Margin		
0.163	51.6	Line1	55.3	-3.7	Peak	
0.194	47.4	Line1	53.9	-6.5	Peak	
0.243	45.5	Line1	52.0	-6.5	Peak	
1.997	45.2	Line1	46.0	-0.8	Peak	
2.078	45.9	Line1	46.0	-0.1	Peak	
2.457	46.9	Line1	46.0	0.9	Peak	
2.619	46.0	Line1	46.0	0.0	Peak	
2.854	45.9	Line1	46.0	-0.1	Peak	

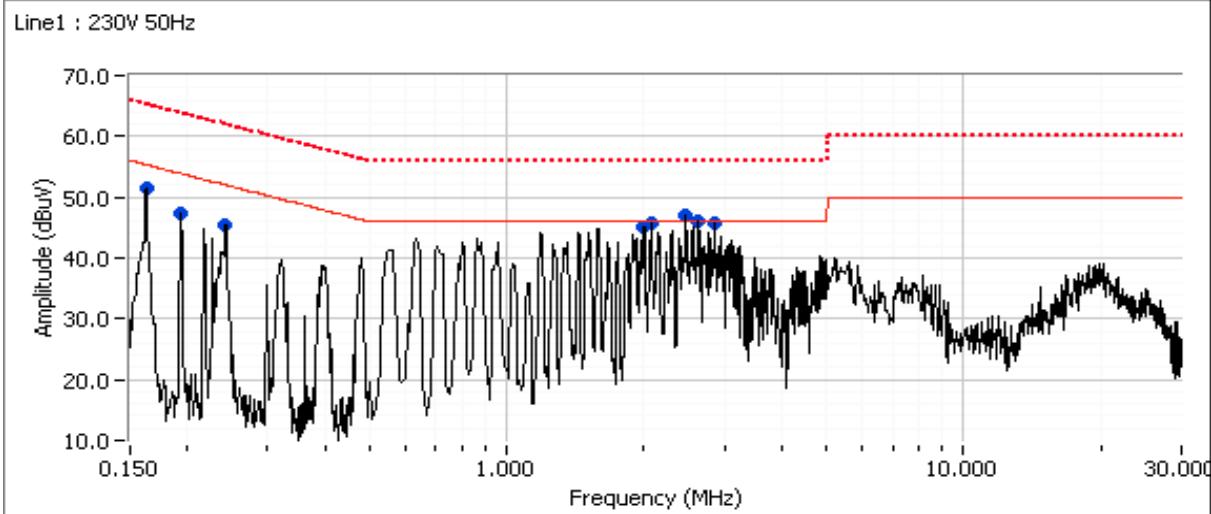

Client:	Broadcom Corporation	Job Number:	J83157
Model:	BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card	T-Log Number:	T83268
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247/RSS-210	Class:	-

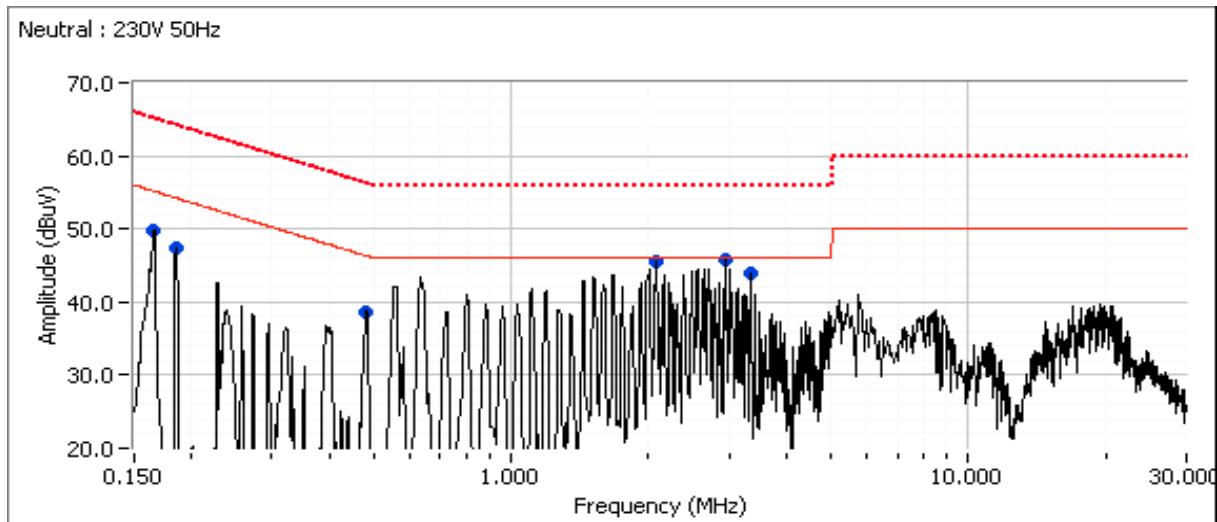



## EMC Test Data

Client:	Broadcom Corporation	Job Number:	J83157
Model:	BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card	T-Log Number:	T83268
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247/RSS-210	Class:	-

### Final quasi-peak and average readings

Frequency MHz	Level dB $\mu$ V	AC Line	Class B Limit	Margin	Detector QP/Ave	Comments
2.081	40.0	Neutral	46.0	-6.0	AVG	AVG (0.10s)
1.999	38.8	Line1	46.0	-7.2	AVG	AVG (0.10s)
2.079	37.7	Line1	46.0	-8.3	AVG	AVG (0.10s)
2.936	35.5	Neutral	46.0	-10.5	AVG	AVG (0.10s)
2.936	45.3	Neutral	56.0	-10.7	QP	QP (1.00s)
2.081	45.1	Neutral	56.0	-10.9	QP	QP (1.00s)
2.622	44.4	Line1	56.0	-11.6	QP	QP (1.00s)
0.482	34.3	Neutral	46.3	-12.0	AVG	AVG (0.10s)
1.999	43.7	Line1	56.0	-12.3	QP	QP (1.00s)
2.079	43.5	Line1	56.0	-12.5	QP	QP (1.00s)
3.332	32.8	Neutral	46.0	-13.2	AVG	AVG (0.10s)
0.242	38.5	Line1	52.0	-13.5	AVG	AVG (0.10s)
3.332	42.4	Neutral	56.0	-13.6	QP	QP (1.00s)
0.162	40.0	Line1	55.4	-15.4	AVG	AVG (0.10s)
2.861	38.7	Line1	56.0	-17.3	QP	QP (1.00s)
2.622	28.1	Line1	46.0	-17.9	AVG	AVG (0.10s)
0.482	37.6	Neutral	56.3	-18.7	QP	QP (1.00s)
2.861	27.0	Line1	46.0	-19.0	AVG	AVG (0.10s)
0.162	45.6	Line1	65.4	-19.8	QP	QP (1.00s)
0.166	44.5	Neutral	65.2	-20.7	QP	QP (1.00s)
0.242	40.1	Line1	62.0	-21.9	QP	QP (1.00s)
2.450	33.2	Line1	56.0	-22.8	QP	QP (1.00s)
0.185	41.5	Neutral	64.3	-22.8	QP	QP (1.00s)
0.193	40.0	Line1	63.9	-23.9	QP	QP (1.00s)
2.450	21.9	Line1	46.0	-24.1	AVG	AVG (0.10s)
0.166	30.6	Neutral	55.2	-24.6	AVG	AVG (0.10s)
0.193	14.8	Line1	53.9	-39.1	AVG	AVG (0.10s)
0.185	15.2	Neutral	54.3	-39.1	AVG	AVG (0.10s)



## EMC Test Data

Client:	Broadcom Corporation	Job Number:	J83157
Model:	BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card	T-Log Number:	T83268
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247/RSS-210	Class:	-

### Radiated Emissions

*(Elliott Laboratories Fremont Facility, Semi-Anechoic Chamber)*

#### Test Specific Details

Objective: The objective of this test session is to perform final qualification testing of the EUT with respect to the specification listed above.

Date of Test: 5/26/2011  
Test Engineer: Peter Sales  
Test Location: Fremont Chamber #7

Config. Used: 2  
Config Change: None  
EUT Voltage: 230V/50Hz

#### General Test Configuration

The EUT and any local support equipment were located on the turntable for radiated emissions testing. Any remote support equipment was located outside the semi-anechoic chamber. Any cables running to remote support equipment were routed through metal conduit and when possible passed through a ferrite clamp upon exiting the chamber.

The test distance and extrapolation factor (if applicable) are detailed under each run description.

Note, preliminary testing indicates that the emissions were maximized by orientation of the EUT and elevation of the measurement antenna. Maximized testing indicated that the emissions were maximized by orientation of the EUT, elevation of the measurement antenna, and manipulation of the EUT's interface cables.

#### Ambient Conditions:

Temperature: 22 °C  
Rel. Humidity: 33 %

#### Summary of Results

Run #	Test Performed	Limit	Result	Margin
1	Radiated Emissions 30 - 1000 MHz, Preliminary	Class B	Pass	36.1dB $\mu$ V/m @ 74.57MHz (-3.9dB)
2	Radiated Emissions 30 - 1000 MHz, Maximized	Class B	Pass	36.1dB $\mu$ V/m @ 74.57MHz (-3.9dB)


#### Modifications Made During Testing

No modifications were made to the EUT during testing

#### Deviations From The Standard

No deviations were made from the requirements of the standard.

Client:	Broadcom Corporation	Job Number:	J83157
Model:	BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card	T-Log Number:	T83268
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247/RSS-210	Class:	-

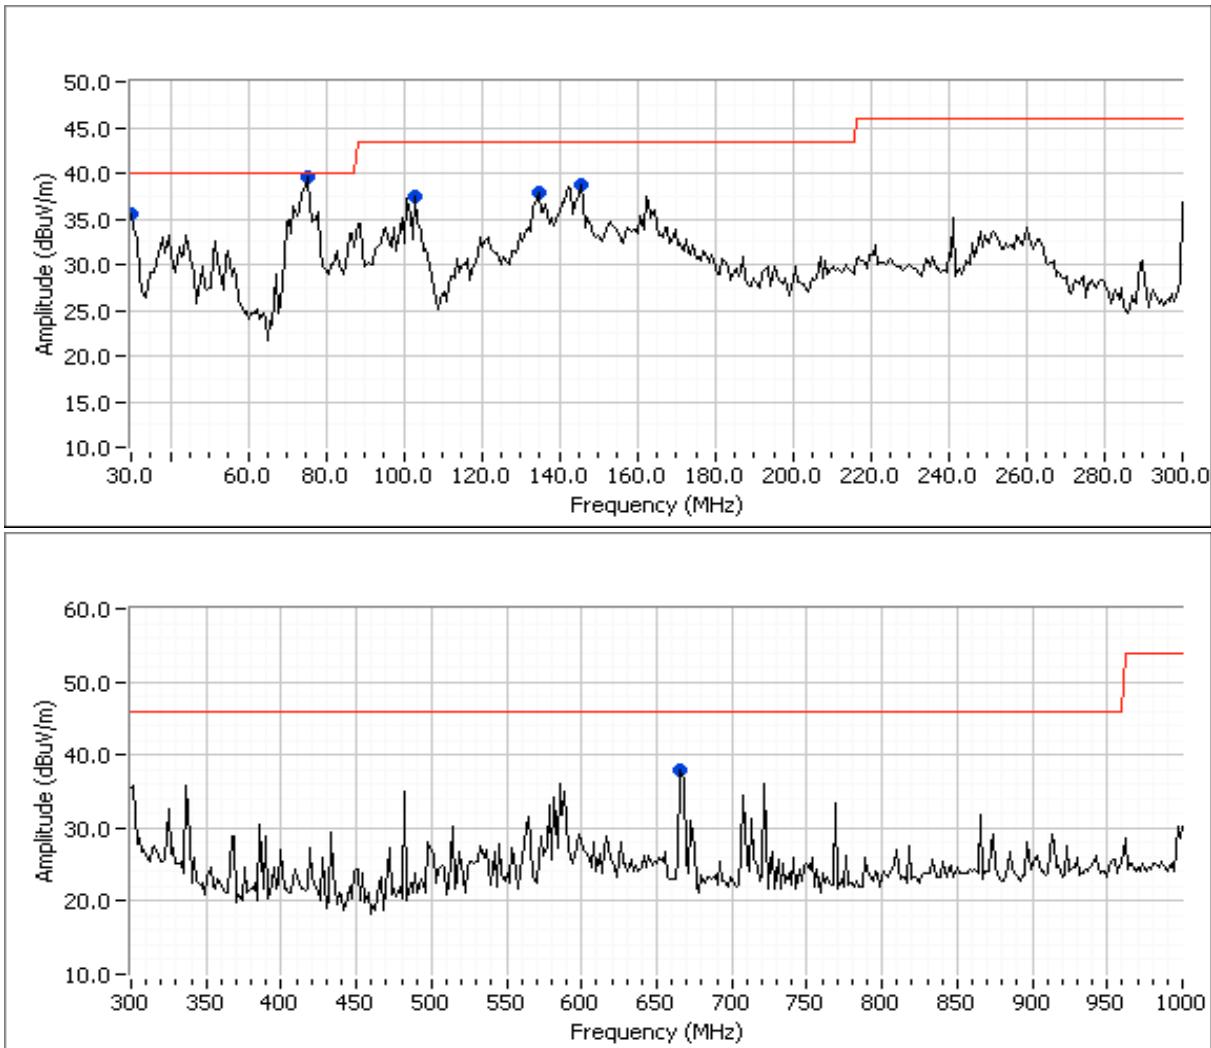**Run #1: Preliminary Radiated Emissions, 30 - 1000 MHz**


Continue Run #1 next page...



## EMC Test Data

Client:	Broadcom Corporation	Job Number:	J83157
Model:	BCM943227HMB 802.11bgn WLAN + Bluetooth Mini Card	T-Log Number:	T83268
Contact:	Anne Liang	Account Manager:	Sheareen Washington
Standard:	FCC 15.247/RSS-210	Class:	-

### Run #1: Preliminary Radiated Emissions, 30 - 1000 MHz (continue)

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
30 - 1000 MHz	3	3	0.0

#### Preliminary peak readings captured during pre-scan

Frequency	Level	Pol	FCC B		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
74.569	39.6	V	40.0	-0.4	Peak	217	1.0	
30.631	35.6	V	40.0	-4.4	Peak	251	1.0	
144.011	38.8	V	43.5	-4.7	Peak	335	1.0	
132.736	37.9	H	43.5	-5.6	Peak	14	2.0	
101.860	37.5	V	43.5	-6.0	Peak	242	1.0	
666.012	37.8	V	46.0	-8.2	Peak	42	1.0	

#### Preliminary quasi-peak readings (no manipulation of EUT interface cables)

Frequency	Level	Pol	FCC B		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
74.569	36.1	V	40.0	-3.9	QP	217	1.0	QP (1.00s)
30.631	34.3	V	40.0	-5.7	QP	251	1.0	QP (1.00s)
101.860	36.1	V	43.5	-7.4	QP	242	1.0	QP (1.00s)
144.011	34.4	V	43.5	-9.1	QP	335	1.0	QP (1.00s)
666.012	35.7	V	46.0	-10.3	QP	42	1.0	QP (1.00s)
132.736	31.8	H	43.5	-11.7	QP	14	2.0	QP (1.00s)

### Run #2: Maximized Readings From Run #1

#### Maximized quasi-peak readings (includes manipulation of EUT interface cables)

Frequency Range	Test Distance	Limit Distance	Extrapolation Factor
30 - 1000 MHz	3	3	0.0

Frequency	Level	Pol	FCC B		Detector	Azimuth	Height	Comments
MHz	dB $\mu$ V/m	v/h	Limit	Margin	Pk/QP/Avg	degrees	meters	
74.569	36.1	V	40.0	-3.9	QP	217	1.0	QP (1.00s)
30.631	34.3	V	40.0	-5.7	QP	251	1.0	QP (1.00s)
101.860	36.1	V	43.5	-7.4	QP	242	1.0	QP (1.00s)
144.011	34.4	V	43.5	-9.1	QP	335	1.0	QP (1.00s)
666.012	35.7	V	46.0	-10.3	QP	42	1.0	QP (1.00s)
132.736	31.8	H	43.5	-11.7	QP	14	2.0	QP (1.00s)

## Appendix C Product Labeling Requirements

The following information has been provided to clarify notification, equipment labeling requirements and information that must be included in the operator's manual. These requirements may be found in the standards/regulations listed in the scope of this report.

### *Label Location*

The required label(s) must be in a *conspicuous location* on the product, which is defined as any location readily visible to the user of the device without the use of tools.

### *Label Attachment*

The label(s) must be *permanently attached* to the product, which is defined as attached such that it can normally be expected to remain fastened to the equipment during the equipment's expected useful life. A paper gum label will generally not meet this condition.

### *United States Class B Label*

FCC ID: ABC1234567

This device complies with Part 15 of FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The FCC Identifier is comprised of the grantee code (in the example above **ABC**) that was assigned by the FCC plus a unique alpha-numeric specific to the product being certified. The ID must appear on the device.

If the device is too small or for such use that it is not practicable to place the US label statement on it, the statement shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed

### *Industry Canada*

For ICES-003 (digital apparatus), the product must be labeled with a notice indicating compliance e.g.

This Class B digital apparatus complies with Canadian ICES-003

Cet appareil numérique de la classe B est conforme à la norme NMB-003  
du Canada

If there is limited space on the product then the text may be placed in the manual:

## Appendix D User Manual Regulatory Statements

Where special accessories, such as shielded cables, are required in order to meet the emission limits, appropriate instructions regarding the need to use such accessories must be contained on the first page of text concerned with the installation of the device in the operator's manual.

A requirement by FCC regulations, and recommended for all regulatory markets, is a cautionary statement to the end user that changes or modifications to the device not expressly approved by you, the manufacturer, could void their right to operate the equipment.

### *United States Class B Manual Statement*

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Note: Additional information about corrective measures may also be provided to the user at the company's option.

The FCC has indicated that the radio interference statement be bound in the same manner as the operator's manual. Thus, a loose-leaf insert page in a bound or center-spine and stapled manual would not meet this condition.

## Appendix E Basic and Reference Standards

*Subpart B of Part 15 of FCC Rules for digital devices.*

FCC Part 15 Subpart B references the use of ANSI C63.4–2003: “*Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz*” for the purposes of evaluating the radiated and conducted emissions from digital devices.

*End of Report*

This page is intentionally blank and  
marks the last page of this test report.