

FCC 2.4G System Validation-D2450V2_SN926-20140507

Communication System: CW ; Frequency: 2450 MHz ; Duty Cycle: 1:1

Medium: MSL_2.4G; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.976$ S/m; $\epsilon_r = 51.351$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.4, 7.4, 7.4); Calibrated: 2014/02/17;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 right; Type: QDOVA001BB; Serial: TP:1232
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 19.8 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.3 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 25.8 W/kg

SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.91 W/kg

Maximum value of SAR (measured) = 19.3 W/kg

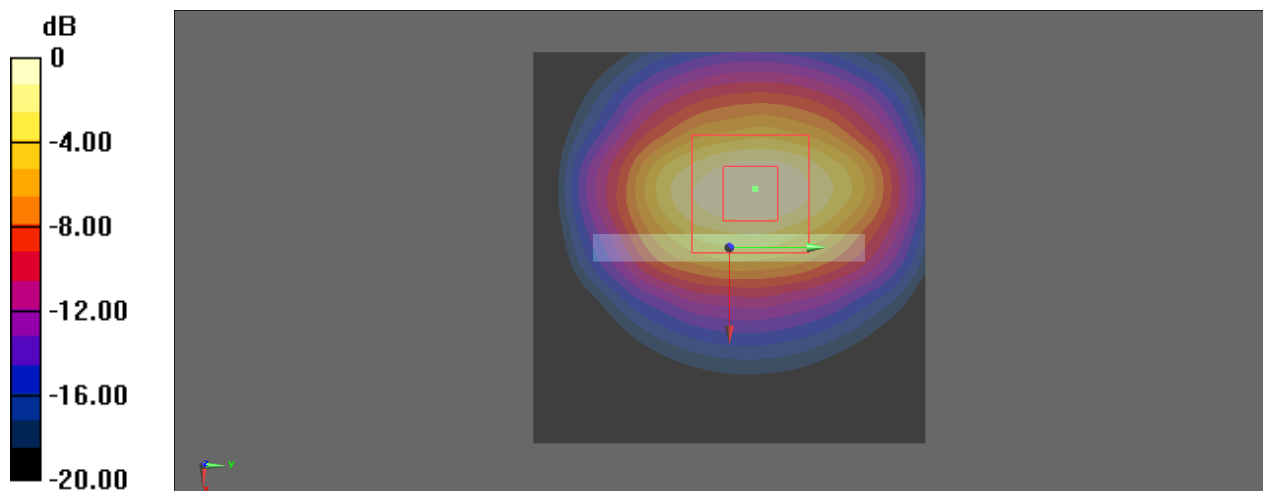

0 dB = 19.3 W/kg = 12.86 dBW/kg

FCC 2.4G System Validation-D2450V2_SN926-20140512

Communication System: CW ; Frequency: 2450 MHz ; Duty Cycle: 1:1

Medium: MSL_2.4G; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.979$ S/m; $\epsilon_r = 51.25$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.4, 7.4, 7.4); Calibrated: 2014/02/17;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 right; Type: QDOVA001BB; Serial: TP:1232
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.8 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 100.0 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 25.7 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.88 W/kg

Maximum value of SAR (measured) = 19.2 W/kg

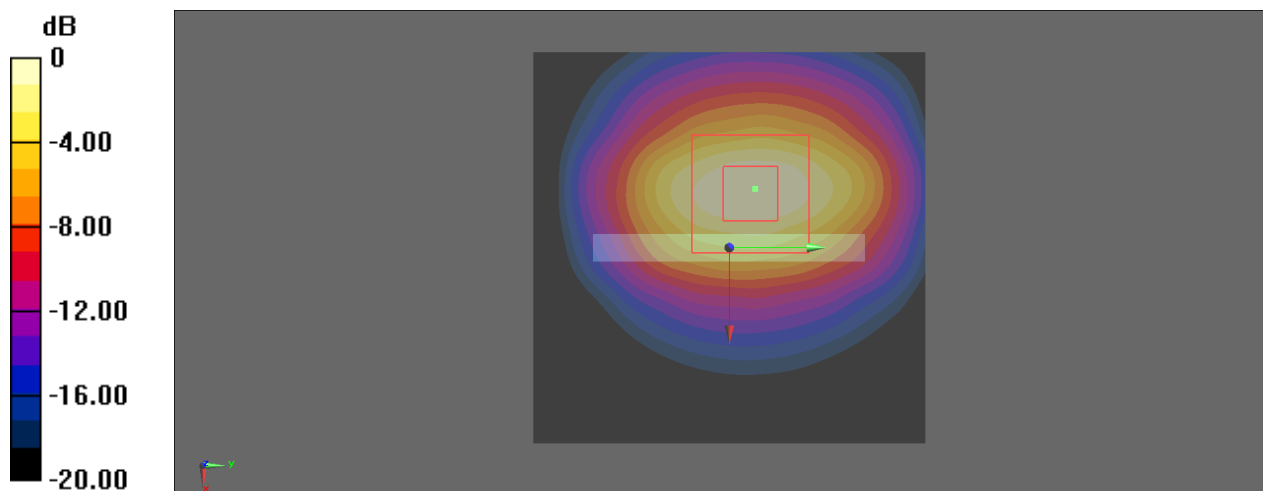

0 dB = 19.2 W/kg = 12.83 dBW/kg

FCC 2.4G System Validation-D2450V2_SN926-20140515

Communication System: CW ; Frequency: 2450 MHz ; Duty Cycle: 1:1

Medium: MSL_2.4G; Medium parameters used: $f = 2450$ MHz; $\sigma = 1.911$ S/m; $\epsilon_r = 50.839$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.4, 7.4, 7.4); Calibrated: 2014/02/17;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 right; Type: QDOVA001BB; Serial: TP:1232
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 18.8 W/kg


Configuration/Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.133 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 24.5 W/kg

SAR(1 g) = 12 W/kg; SAR(10 g) = 5.63 W/kg

Maximum value of SAR (measured) = 18.3 W/kg

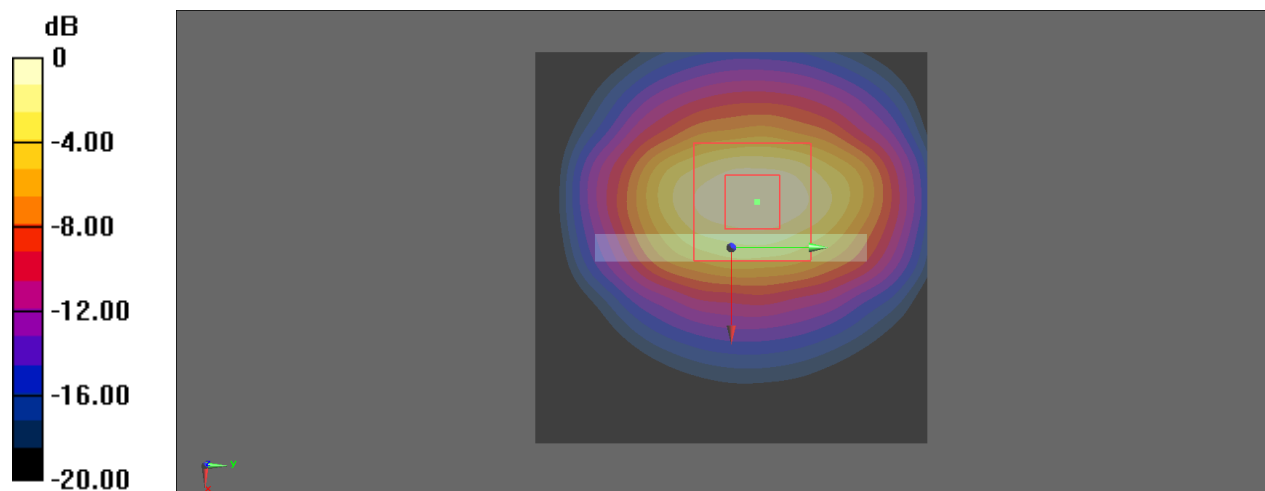

0 dB = 18.3 W/kg = 12.62 dBW/kg

FCC 5.2G System Validation-D5GHzV2_SN1171-20140507

Communication System: CW ; Frequency: 5200 MHz ; Duty Cycle: 1:1

Medium: MSL_5G; Medium parameters used: $f = 5200$ MHz; $\sigma = 5.401$ S/m; $\epsilon_r = 47.064$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.61, 4.61, 4.61); Calibrated: 2014/02/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 front; Type: QDOVA001BB; Serial: TP:1233
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.2 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.340 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 29.1 W/kg

SAR(1 g) = 7.39 W/kg; SAR(10 g) = 2.11 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

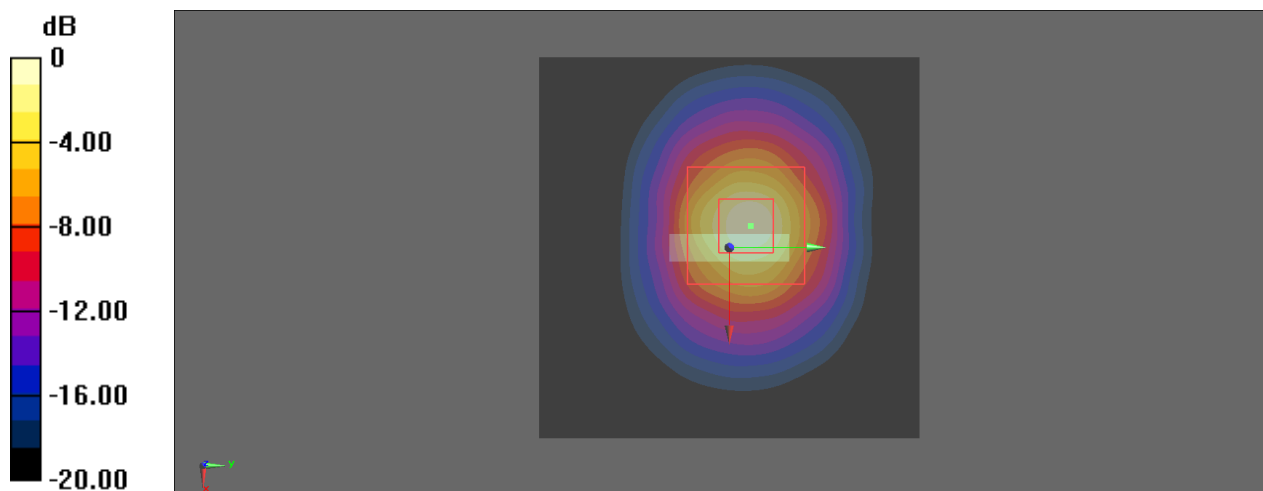

0 dB = 18.6 W/kg = 12.70 dBW/kg

FCC 5.2G System Validation-D5GHzV2_SN1171-20140512

Communication System: CW ; Frequency: 5200 MHz ; Duty Cycle: 1:1

Medium: MSL_5G; Medium parameters used: $f = 5200$ MHz; $\sigma = 5.371$ S/m; $\epsilon_r = 47.238$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.61, 4.61, 4.61); Calibrated: 2014/02/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 front; Type: QDOVA001BB; Serial: TP:1233
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.0 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.334 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 29.3 W/kg

SAR(1 g) = 7.23 W/kg; SAR(10 g) = 2.04 W/kg

Maximum value of SAR (measured) = 18.6 W/kg

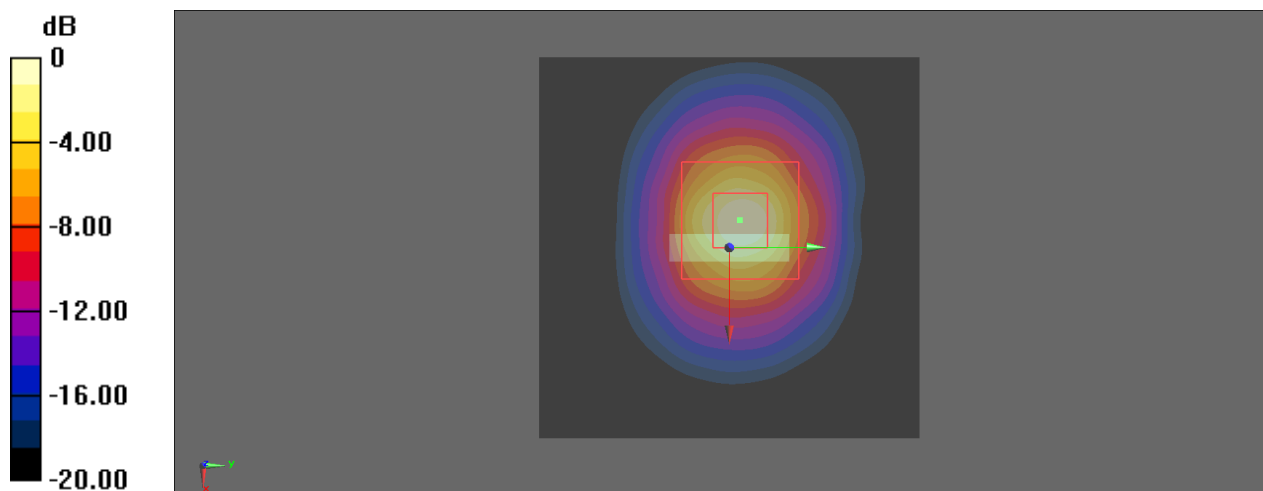

0 dB = 18.6 W/kg = 12.70 dBW/kg

FCC 5.2G System Validation-D5GHzV2_SN1171-20140515

Communication System: CW ; Frequency: 5200 MHz ; Duty Cycle: 1:1

Medium: MSL_5G; Medium parameters used: $f = 5200$ MHz; $\sigma = 5.387$ S/m; $\epsilon_r = 47.398$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.61, 4.61, 4.61); Calibrated: 2014/02/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 front; Type: QDOVA001BB; Serial: TP:1233
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.3 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.005 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 30.1 W/kg

SAR(1 g) = 7.41 W/kg; SAR(10 g) = 2.09 W/kg

Maximum value of SAR (measured) = 19.0 W/kg

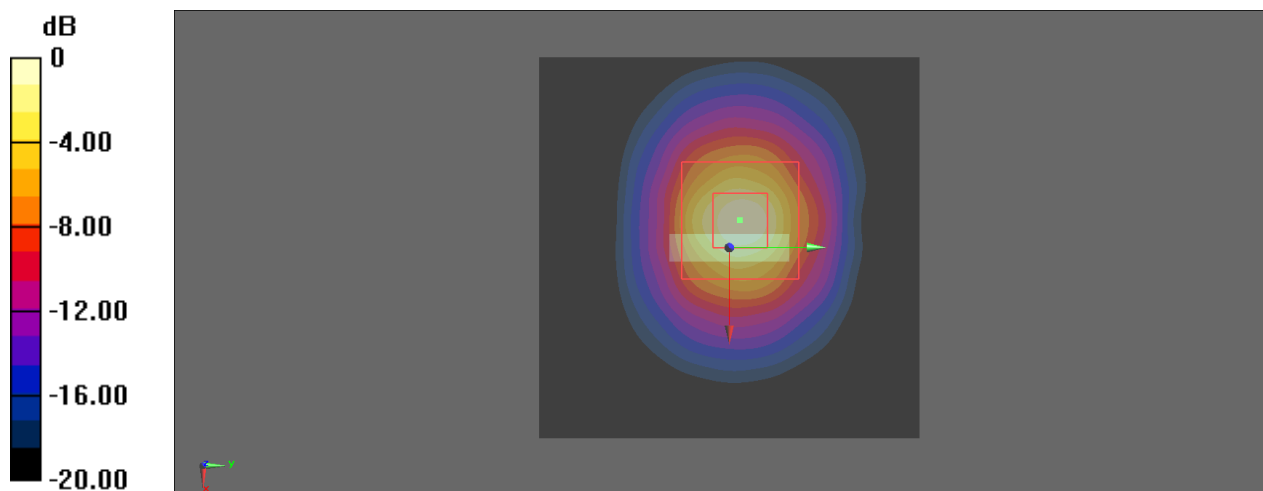

0 dB = 19.0 W/kg = 12.79 dBW/kg

FCC 5.3G System Validation-D5GHzV2_SN1171-20140507

Communication System: CW ; Frequency: 5300 MHz ; Duty Cycle: 1:1

Medium: MSL_5G; Medium parameters used: $f = 5300$ MHz; $\sigma = 5.528$ S/m; $\epsilon_r = 46.88$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.39, 4.39, 4.39); Calibrated: 2014/02/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 front; Type: QDOVA001BB; Serial: TP:1233
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.2 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.125 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 30.4 W/kg

SAR(1 g) = 7.31 W/kg; SAR(10 g) = 2.06 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

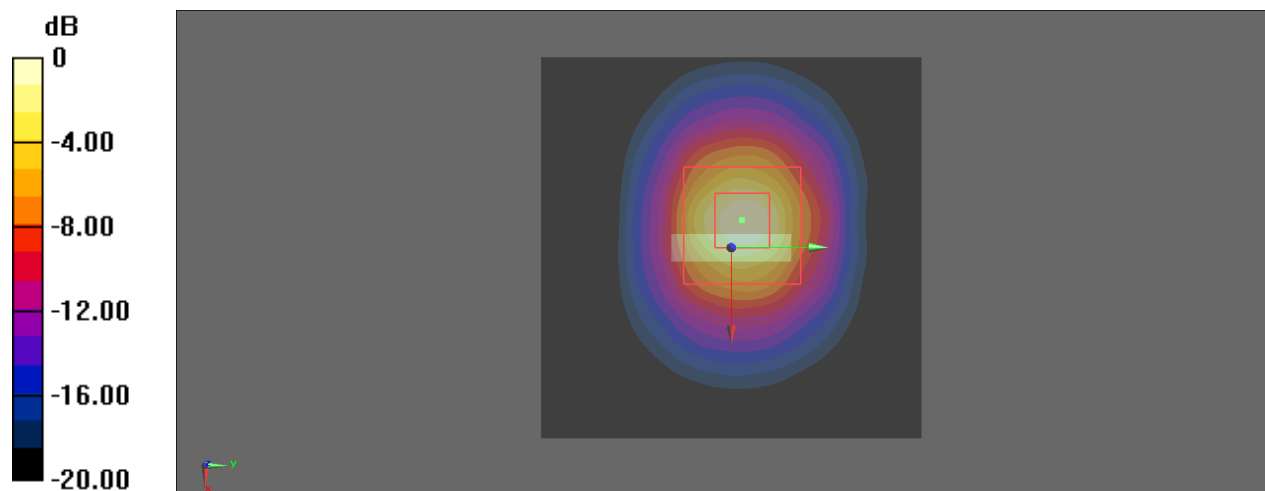

0 dB = 18.9 W/kg = 12.76 dBW/kg

FCC 5.3G System Validation-D5GHzV2_SN1171-20140512

Communication System: CW ; Frequency: 5300 MHz ; Duty Cycle: 1:1

Medium: MSL_5G; Medium parameters used: $f = 5300$ MHz; $\sigma = 5.509$ S/m; $\epsilon_r = 47.051$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.39, 4.39, 4.39); Calibrated: 2014/02/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 front; Type: QDOVA001BB; Serial: TP:1233
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 18.6 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 66.745 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 30.7 W/kg

SAR(1 g) = 7.46 W/kg; SAR(10 g) = 2.1 W/kg

Maximum value of SAR (measured) = 19.1 W/kg

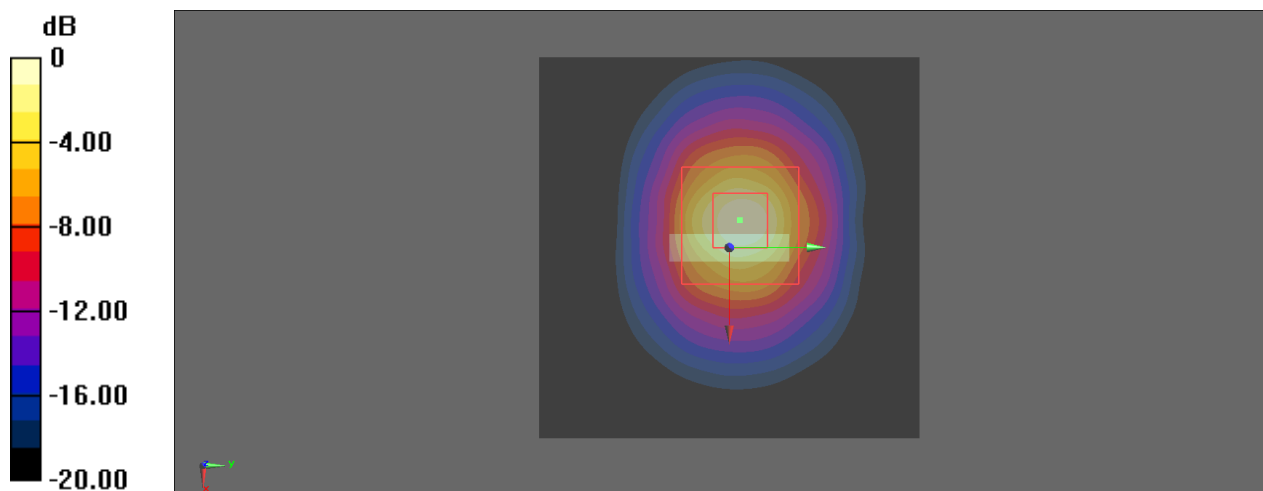

0 dB = 19.1 W/kg = 12.81 dBW/kg

FCC 5.3G System Validation-D5GHzV2_SN1171-20140515

Communication System: CW ; Frequency: 5300 MHz ; Duty Cycle: 1:1

Medium: MSL_5G; Medium parameters used: $f = 5300$ MHz; $\sigma = 5.524$ S/m; $\epsilon_r = 47.248$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.39, 4.39, 4.39); Calibrated: 2014/02/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 front; Type: QDOVA001BB; Serial: TP:1233
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.2 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 67.892 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 31.9 W/kg

SAR(1 g) = 7.69 W/kg; SAR(10 g) = 2.17 W/kg

Maximum value of SAR (measured) = 19.8 W/kg

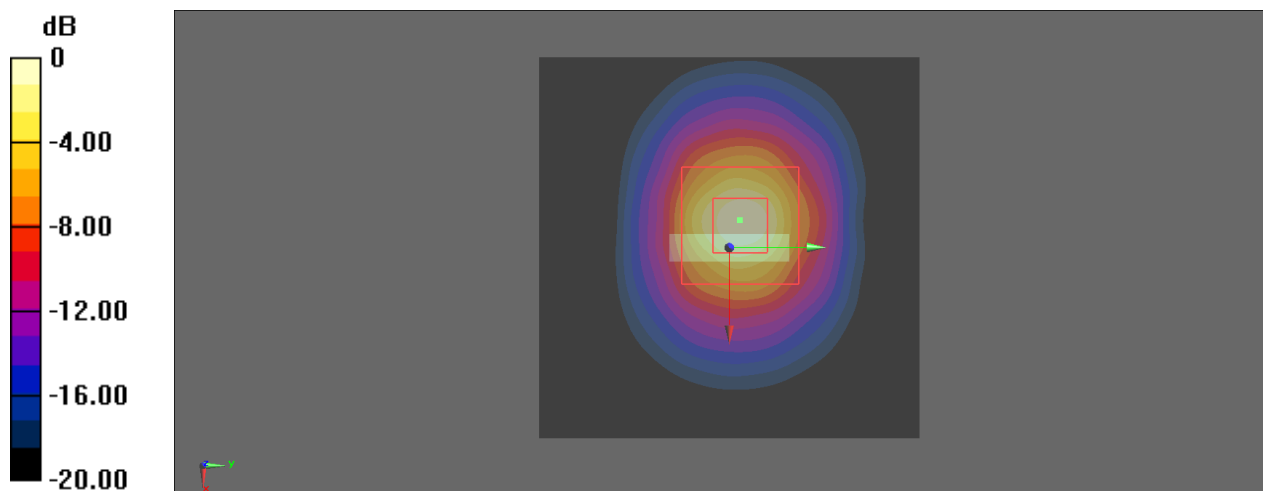

0 dB = 19.8 W/kg = 12.97 dBW/kg

FCC 5.6G System Validation-D5GHzV2_SN1171-20140507

Communication System: CW ; Frequency: 5600 MHz ; Duty Cycle: 1:1

Medium: MSL_5G; Medium parameters used: $f = 5600$ MHz; $\sigma = 5.928$ S/m; $\epsilon_r = 46.403$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(3.69, 3.69, 3.69); Calibrated: 2014/02/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 front; Type: QDOVA001BB; Serial: TP:1233
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 20.2 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.192 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 31.9 W/kg

SAR(1 g) = 7.99 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 20.7 W/kg

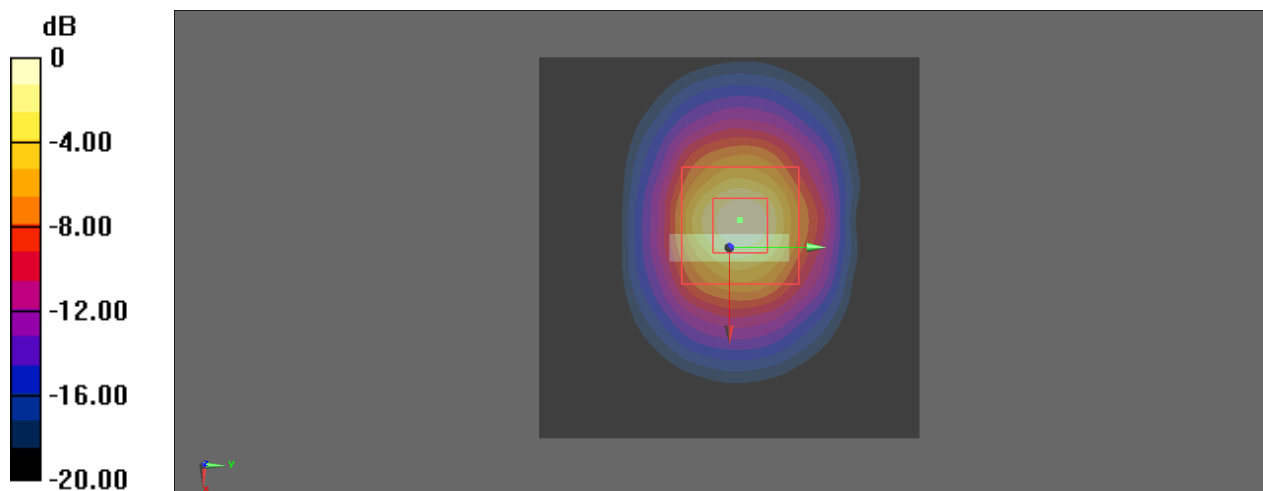

0 dB = 20.7 W/kg = 13.16 dBW/kg

FCC 5.6G System Validation-D5GHzV2_SN1171-20140512

Communication System: CW ; Frequency: 5600 MHz ; Duty Cycle: 1:1

Medium: MSL_5G; Medium parameters used: $f = 5600$ MHz; $\sigma = 5.887$ S/m; $\epsilon_r = 46.554$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(3.69, 3.69, 3.69); Calibrated: 2014/02/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 front; Type: QDOVA001BB; Serial: TP:1233
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.9 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.050 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 31.8 W/kg

SAR(1 g) = 7.9 W/kg; SAR(10 g) = 2.2 W/kg

Maximum value of SAR (measured) = 20.5 W/kg

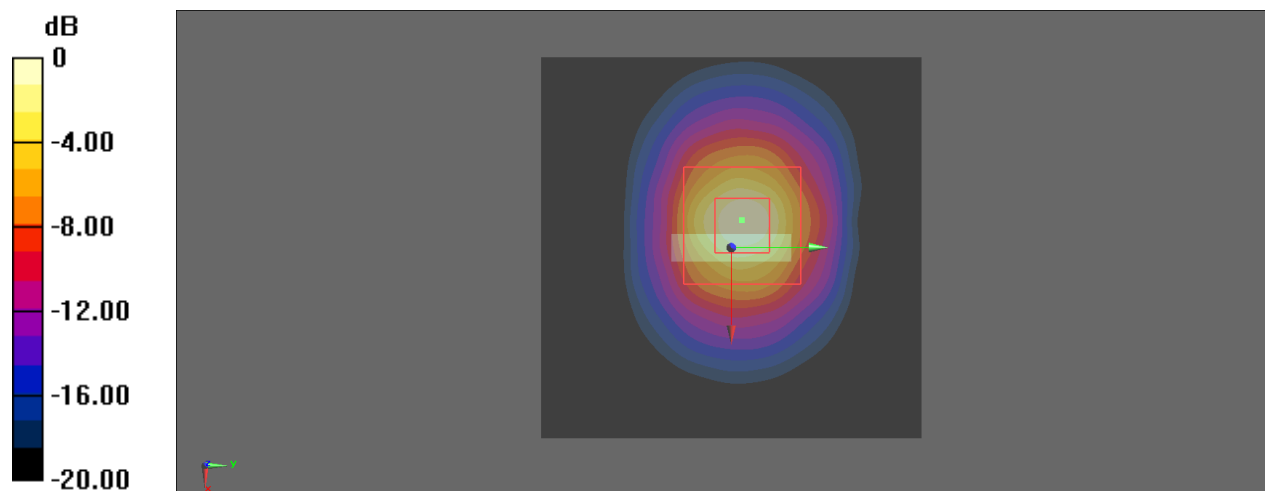

0 dB = 20.5 W/kg = 13.12 dBW/kg

FCC 5.6G System Validation-D5GHzV2_SN1171-20140515

Communication System: CW ; Frequency: 5600 MHz ; Duty Cycle: 1:1

Medium: MSL_5G; Medium parameters used: $f = 5600$ MHz; $\sigma = 5.917$ S/m; $\epsilon_r = 46.658$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(3.69, 3.69, 3.69); Calibrated: 2014/02/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 front; Type: QDOVA001BB; Serial: TP:1233
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 20.8 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 71.195 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 33.1 W/kg

SAR(1 g) = 8.22 W/kg; SAR(10 g) = 2.3 W/kg

Maximum value of SAR (measured) = 21.4 W/kg

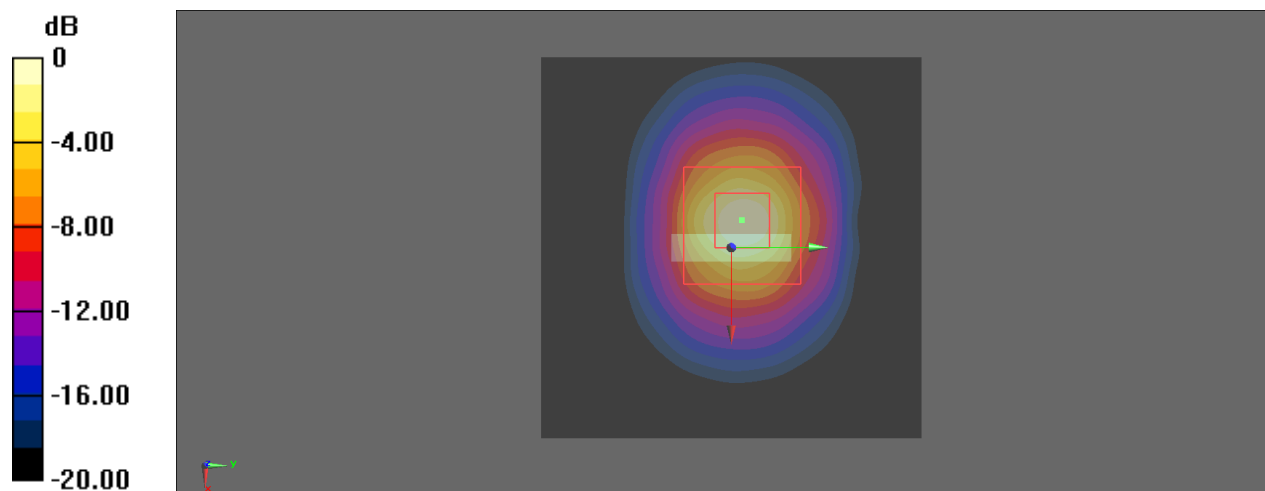

0 dB = 21.4 W/kg = 13.30 dBW/kg

FCC 5.8G System Validation-D5GHzV2_SN1171-20140507

Communication System: CW ; Frequency: 5800 MHz ; Duty Cycle: 1:1

Medium: MSL_5G; Medium parameters used: $f = 5800$ MHz; $\sigma = 6.198$ S/m; $\epsilon_r = 46.042$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.26, 4.26, 4.26); Calibrated: 2014/02/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 front; Type: QDOVA001BB; Serial: TP:1233
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.3 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 65.007 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 33.7 W/kg

SAR(1 g) = 7.42 W/kg; SAR(10 g) = 2.07 W/kg

Maximum value of SAR (measured) = 19.9 W/kg

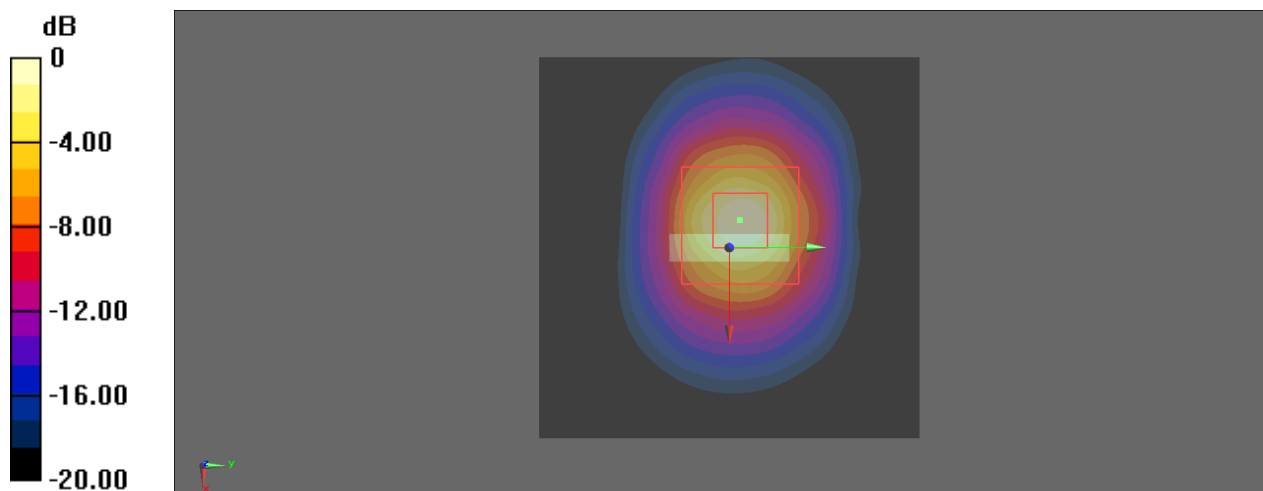

0 dB = 19.9 W/kg = 12.99 dBW/kg

FCC 5.8G System Validation-D5GHzV2_SN1171-20140512

Communication System: CW ; Frequency: 5800 MHz ; Duty Cycle: 1:1


Medium: MSL_5G; Medium parameters used: $f = 5800$ MHz; $\sigma = 6.18$ S/m; $\epsilon_r = 46.239$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.26, 4.26, 4.26); Calibrated: 2014/02/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 front; Type: QDOVA001BB; Serial: TP:1233
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 18.7 W/kg

Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm
Reference Value = 64.191 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 32.7 W/kg
SAR(1 g) = 7.25 W/kg; SAR(10 g) = 2.03 W/kg
Maximum value of SAR (measured) = 19.3 W/kg

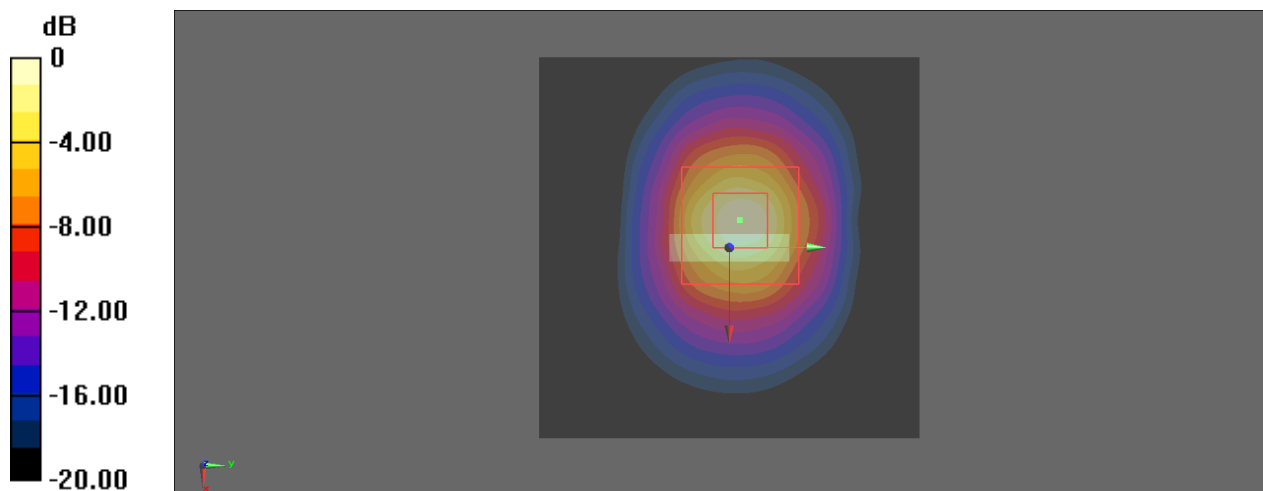

0 dB = 19.3 W/kg = 12.86 dBW/kg

FCC 5.8G System Validation-D5GHzV2_SN1171-20140515

Communication System: CW ; Frequency: 5800 MHz ; Duty Cycle: 1:1

Medium: MSL_5G; Medium parameters used: $f = 5800$ MHz; $\sigma = 6.207$ S/m; $\epsilon_r = 46.421$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.26, 4.26, 4.26); Calibrated: 2014/02/17;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02
- Phantom: ELI v4.0 front; Type: QDOVA001BB; Serial: TP:1233
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10(7164)

Configuration/Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 19.2 W/kg


Configuration/Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.893 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 34.2 W/kg

SAR(1 g) = 7.45 W/kg; SAR(10 g) = 2.08 W/kg

Maximum value of SAR (measured) = 20.1 W/kg

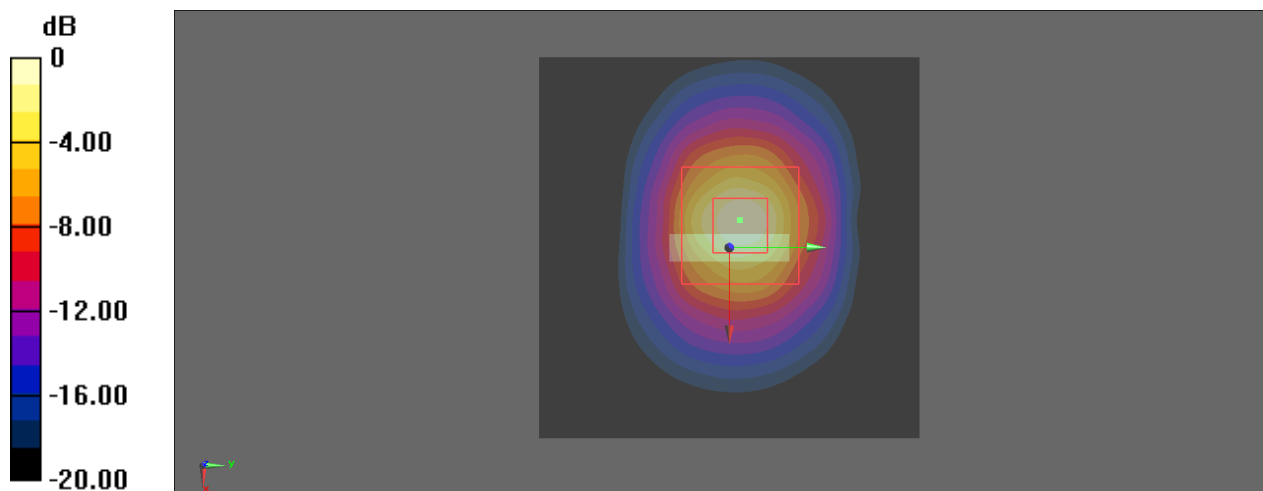

0 dB = 20.1 W/kg = 13.03 dBW/kg

System Check_B2450_140701

DUT: Dipole 2450 MHz_SN:926

Communication System: CW ; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: B2450_140701 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.943$ S/m; $\epsilon_r = 50.858$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(7.6, 7.6, 7.6); Calibrated: 12/09/2013;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 12/02/2013
- Phantom: ELI v4.0 right; Type: QDOVA001BB; Serial: TP:1232
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 19.2 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 99.36 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 25.0 W/kg

SAR(1 g) = 12.5 W/kg; SAR(10 g) = 5.89 W/kg

Maximum value of SAR (measured) = 18.8 W/kg

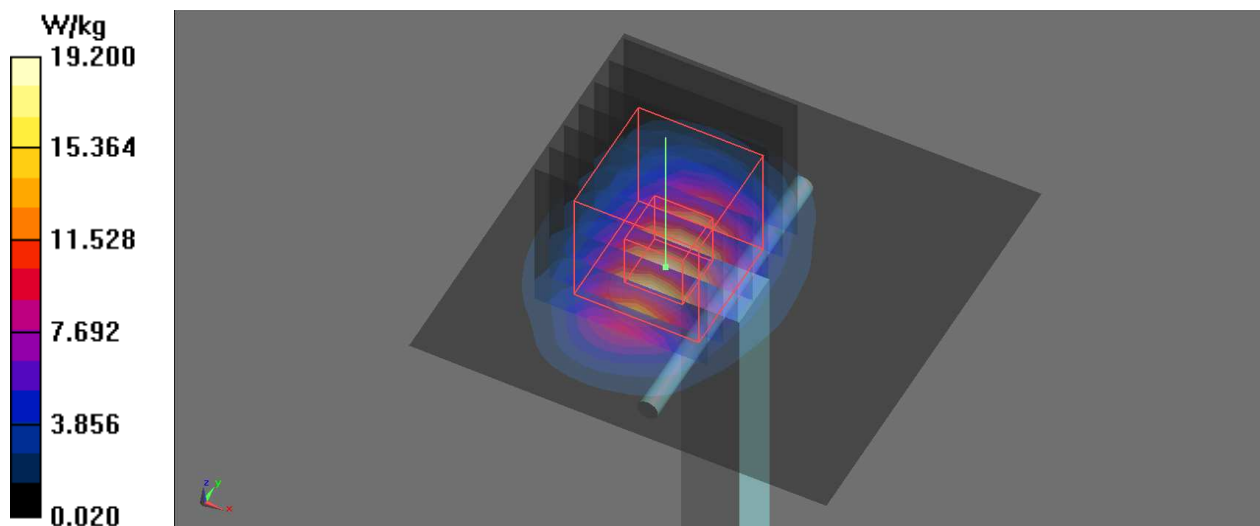

System Check_B5200_140701

DUT: Dipole D5GHzV2_SN:1167

Communication System: CW ; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: B5G_140701 Medium parameters used: $f = 5200$ MHz; $\sigma = 5.32$ S/m; $\epsilon_r = 47.85$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN3958; ConvF(4.55, 4.55, 4.55); Calibrated: 2013/12/09/;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2013/12/02/
- Phantom: ELI v4.0 front; Type: QDOVA001BB; Serial: TP:1233
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 17.8 W/kg

Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 64.65 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 29.6 W/kg

SAR(1 g) = 7.17 W/kg; SAR(10 g) = 2.04 W/kg

Maximum value of SAR (measured) = 18.2 W/kg

