



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

|                        |                                              |
|------------------------|----------------------------------------------|
| Applicant's company    | Broadcom Corporation                         |
| Applicant Address      | 190 Mathilda Place Sunnyvale CA 94086 U.S.A. |
| FCC ID                 | QDS-BRCM1084                                 |
| Manufacturer's company | Broadcom Corporation                         |
| Manufacturer Address   | 190 Mathilda Place Sunnyvale CA 94086 U.S.A. |

|                   |                                                            |
|-------------------|------------------------------------------------------------|
| Product Name      | Broadcom 802.11a/b/g/n WLAN+ Bluetooth PCI-E NGFF2230 card |
| Brand Name        | Broadcom                                                   |
| Model No.         | BCM943228Z                                                 |
| Test Rule Part(s) | 47 CFR FCC Part 15 Subpart C § 15.247                      |
| Test Freq. Range  | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz                          |
| Received Date     | Apr. 01, 2014                                              |
| Final Test Date   | Jul. 22, 2015                                              |
| Submission Type   | Class II Change                                            |

### Statement

**Test result included is only for the IEEE 802.11n, IEEE 802.11b/g and IEEE 802.11a of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C, KDB558074 D01 v03r03 and KDB 662911 D01 v02r01.**

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

|                                                                |                |
|----------------------------------------------------------------|----------------|
| <b>1. VERIFICATION OF COMPLIANCE .....</b>                     | <b>1</b>       |
| <b>2. SUMMARY OF THE TEST RESULT .....</b>                     | <b>2</b>       |
| <b>3. GENERAL INFORMATION .....</b>                            | <b>3</b>       |
| 3.1. Product Details.....                                      | 3              |
| 3.2. Accessories.....                                          | 4              |
| 3.3. Table for Filed Antenna.....                              | 5              |
| 3.4. Table for Carrier Frequencies .....                       | 7              |
| 3.5. Table for Test Modes .....                                | 8              |
| 3.6. Table for Testing Locations.....                          | 10             |
| 3.7. Table for Class II Change .....                           | 10             |
| 3.8. Table for Supporting Units .....                          | 11             |
| 3.9. Table for Parameters of Test Software Setting .....       | 12             |
| 3.10. EUT Operation during Test .....                          | 13             |
| 3.11. Duty Cycle.....                                          | 13             |
| 3.12. Maximum Conducted Output Power for original report ..... | 14             |
| 3.13. Test Configurations .....                                | 18             |
| <b>4. TEST RESULT .....</b>                                    | <b>21</b>      |
| 4.1. AC Power Line Conducted Emissions Measurement.....        | 21             |
| 4.2. Maximum Conducted Output Power Measurement.....           | 25             |
| 4.3. Power Spectral Density Measurement .....                  | 27             |
| 4.4. 6dB Spectrum Bandwidth Measurement .....                  | 32             |
| 4.5. Radiated Emissions Measurement .....                      | 38             |
| 4.6. Emissions Measurement .....                               | 73             |
| 4.7. Antenna Requirements .....                                | 134            |
| <b>5. LIST OF MEASURING EQUIPMENTS .....</b>                   | <b>135</b>     |
| <b>6. MEASUREMENT UNCERTAINTY.....</b>                         | <b>137</b>     |
| <b>APPENDIX A. TEST PHOTOS .....</b>                           | <b>A1 ~ A8</b> |
| <b>APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....</b>   | <b>B1 ~ B5</b> |

## History of This Test Report

| REPORT NO.    | VERSION | DESCRIPTION             | ISSUED DATE   |
|---------------|---------|-------------------------|---------------|
| FR440181-03AA | Rev. 01 | Initial issue of report | Jul. 29, 2015 |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |
|               |         |                         |               |

## 1. VERIFICATION OF COMPLIANCE

Product Name : Broadcom 802.11a/b/g/n WLAN+ Bluetooth PCI-E NGFF2230 card  
Brand Name : Broadcom  
Model No. : BCM943228Z  
Applicant : Broadcom Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Apr. 01, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

| Applied Standard: 47 CFR FCC Part 15 Subpart C |              |                                   |          |             |
|------------------------------------------------|--------------|-----------------------------------|----------|-------------|
| Part                                           | Rule Section | Description of Test               | Result   | Under Limit |
| 4.1                                            | 15.207       | AC Power Line Conducted Emissions | Complies | 14.38 dB    |
| 4.2                                            | 15.247(b)(3) | Maximum Conducted Output Power    | Complies | 7.34 dB     |
| 4.3                                            | 15.247(e)    | Power Spectral Density            | Complies | 16.14 dB    |
| 4.4                                            | 15.247(a)(2) | 6dB Spectrum Bandwidth            | Complies | -           |
| 4.5                                            | 15.247(d)    | Radiated Emissions                | Complies | 0.04 dB     |
| 4.6                                            | 15.247(d)    | Band Edge Emissions               | Complies | 0.12 dB     |
| 4.7                                            | 15.203       | Antenna Requirements              | Complies | -           |

### 3. GENERAL INFORMATION

#### 3.1. Product Details

| Items                          | Description                                                                                                                                                                                                                                                                                   |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Type                   | <u>For 2.4GHz Band:</u><br>IEEE 802.11b: WLAN (1TX, 1RX)<br>IEEE 802.11g: WLAN (2TX, 2RX)<br>IEEE 802.11n: WLAN (2TX, 2RX)<br><u>For 5GHz Band:</u><br>IEEE 802.11a: WLAN (2TX, 2RX)<br>IEEE 802.11n: WLAN (2TX, 2RX)                                                                         |
| Radio Type                     | Intentional Transceiver                                                                                                                                                                                                                                                                       |
| Power Type                     | From host system                                                                                                                                                                                                                                                                              |
| Modulation                     | IEEE 802.11b: DSSS<br>IEEE 802.11a/g: OFDM<br>IEEE 802.11n: see the below table                                                                                                                                                                                                               |
| Data Modulation                | IEEE 802.11b: DSSS (BPSK / QPSK / CCK)<br>IEEE 802.11a/g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM)                                                                                                                                                                                                |
| Data Rate (Mbps)               | IEEE 802.11b: DSSS (1/ 2/ 5.5/11)<br>IEEE 802.11a/g: OFDM (6/9/12/18/24/36/48/54)<br>IEEE 802.11n: see the below table                                                                                                                                                                        |
| Frequency Range                | 2400 ~ 2483.5MHz / 5725 ~ 5850MHz                                                                                                                                                                                                                                                             |
| Channel Number                 | <u>For 2.4GHz Band:</u><br>13 for 20MHz bandwidth ; 9 for 40MHz bandwidth<br><u>For 5GHz Band:</u><br>5 for 20MHz bandwidth ; 2 for 40MHz bandwidth                                                                                                                                           |
| Maximum Conducted Output Power | <u>For 2.4GHz Band:</u><br>IEEE 802.11b: 18.71 dBm<br>IEEE 802.11g: 22.40 dBm<br>IEEE 802.11n MCS0 (HT20): 22.66 dBm<br>IEEE 802.11n MCS0 (HT40): 15.04 dBm<br><u>For 5GHz Band:</u><br>IEEE 802.11a: 18.38 dBm<br>IEEE 802.11n MCS0 (HT20): 18.33 dBm<br>IEEE 802.11n MCS0 (HT40): 20.17 dBm |
| Carrier Frequencies            | Please refer to section 3.4                                                                                                                                                                                                                                                                   |
| Antenna                        | Please refer to section 3.3                                                                                                                                                                                                                                                                   |

Note: The MIMO transmission mode is correlated.

| Items                | Description                               |                                                         |
|----------------------|-------------------------------------------|---------------------------------------------------------|
| Beamforming Function | <input type="checkbox"/> With beamforming | <input checked="" type="checkbox"/> Without beamforming |

#### Antenna and Band width

| Antenna         |              | Single (TX) |        | Two (TX) |        |
|-----------------|--------------|-------------|--------|----------|--------|
| Band width Mode |              | 20 MHz      | 40 MHz | 20 MHz   | 40 MHz |
| 2.4G            | IEEE 802.11b | V           | X      | X        | X      |
|                 | IEEE 802.11g | X           | X      | V        | X      |
|                 | IEEE 802.11n | X           | X      | V        | V      |
| 5G              | IEEE 802.11a | X           | X      | V        | X      |
|                 | IEEE 802.11n | X           | X      | V        | V      |

#### IEEE 11n Spec.

| Protocol |                | Number of Transmit Chains (NTX) | Data Rate / MCS |
|----------|----------------|---------------------------------|-----------------|
| 2.4G     | 802.11n (HT20) | 2                               | MCS 0-15        |
|          | 802.11n (HT40) | 2                               | MCS 0-15        |
| 5G       | 802.11n (HT20) | 2                               | MCS 0-15        |
|          | 802.11n (HT40) | 2                               | MCS 0-15        |

Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput).

Then EUT supports HT20 and HT40.

Note 2: Modulation modes consist of below configuration: HT20/HT40: IEEE 802.11n

### 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

| Set | Ant. | Brand | Model Name<br>(Part Number)  | Antenna<br>Type   | Connector    | Gain (dBi) |          |          |          |          |
|-----|------|-------|------------------------------|-------------------|--------------|------------|----------|----------|----------|----------|
|     |      |       |                              |                   |              | 2.4G       | 5G<br>B1 | 5G<br>B2 | 5G<br>B3 | 5G<br>B4 |
| 1   | 1    | WNC   | 81XCAA15.G03<br>(497317-003) | Dipole<br>antenna | Reversed-SMA | 1.26       | 1.58     | 1.58     | 1.01     | 1.09     |
|     | 2    | WNC   | 81XCAA15.G03<br>(497317-003) | Dipole<br>antenna | Reversed-SMA | 1.26       | 1.58     | 1.58     | 1.01     | 1.09     |
| 2   | 1    | ACON  | DM(External) SMA Dipole      | Dipole<br>antenna | Reversed-SMA | -1.04      | -2.45    | -3.28    | -4.13    | -4.17    |
|     | 2    | ACON  | DM(External) SMA Dipole      | Dipole<br>antenna | Reversed-SMA | -1.04      | -2.45    | -3.28    | -4.13    | -4.17    |

**Note1:** The each set has two antennas.

**Note2:** Set 1~2 are the same type antenna. Only the highest gain antenna was selected to test and record in this report.

**For 2.4GHz:**

**For IEEE 802.11b mode (1TX/1RX)**

Only Chain 1 can be used as transmitting/receiving antenna.

**For IEEE 802.11g/n mode (2TX/2RX)**

Chain 1 and Chain 2 can be used as transmitting/receiving antenna.

Chain 1 and Chain 2 could transmit/receive simultaneously.

**For 5GHz:**


**For IEEE 802.11a/n mode (2TX/2RX)**

Chain 1 and Chain 2 can be used as transmitting/receiving antenna.


Chain 1 and Chain 2 could transmit/receive simultaneously.

**For Bluetooth mode (1TX/1RX)**

Only Chain 2 can be used as transmitting/receiving antenna.

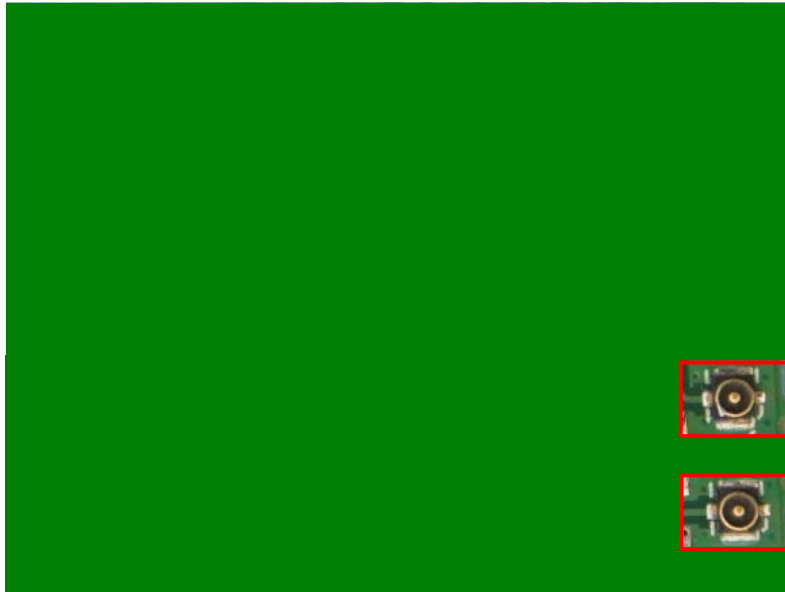

Chain 1 (Connect in Ant. 1 for WLAN 2.4G / 5G)



Chain 2 (Connect in Ant. 2 for WLAN 2.4G / 5G and BT)

### 3.4. Table for Carrier Frequencies

#### For 2.4GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 1~Channel 13.

For 40MHz bandwidth systems, use Channel 3~Channel 11.

| Frequency Band | Channel No. | Frequency | Channel No. | Frequency |
|----------------|-------------|-----------|-------------|-----------|
| 2400~2483.5MHz | 1           | 2412 MHz  | 8           | 2447 MHz  |
|                | 2           | 2417 MHz  | 9           | 2452 MHz  |
|                | 3           | 2422 MHz  | 10          | 2457 MHz  |
|                | 4           | 2427 MHz  | 11          | 2462 MHz  |
|                | 5           | 2432 MHz  | 12          | 2467 MHz  |
|                | 6           | 2437 MHz  | 13          | 2472 MHz  |
|                | 7           | 2442 MHz  | -           | -         |

#### For 5GHz Band:

There are two bandwidth systems.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

| Frequency Band          | Channel No. | Frequency | Channel No. | Frequency |
|-------------------------|-------------|-----------|-------------|-----------|
| 5725~5850 MHz<br>Band 4 | 149         | 5745 MHz  | 159         | 5795 MHz  |
|                         | 151         | 5755 MHz  | 161         | 5805 MHz  |
|                         | 153         | 5765 MHz  | 165         | 5825 MHz  |
|                         | 157         | 5785 MHz  | -           | -         |

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

#### For 2.4GHz Band

| Test Items                        | Mode        | Data Rate | Channel      | Chain |
|-----------------------------------|-------------|-----------|--------------|-------|
| AC Power Line Conducted Emissions | Normal Link | -         | -            | -     |
| Maximum Conducted Output Power    | 11b/CCK     | 1 Mbps    | 11           | 1     |
| Power Spectral Density            | 11b/CCK     | 1 Mbps    | 11           | 1     |
| 6dB Spectrum Bandwidth            | 11b/CCK     | 1 Mbps    | 11           | 1     |
| Radiated Emissions Below 1GHz     | Normal Link | -         | -            | -     |
| Radiated Emissions Above 1GHz     | 11b/CCK     | 1 Mbps    | 1/6/11/12/13 | 1     |
|                                   | 11g/BPSK    | 6 Mbps    | 1/6/11/12/13 | 1+2   |
|                                   | 11n HT20    | MCS0      | 1/6/11/12/13 | 1+2   |
|                                   | 11n HT40    | MCS0      | 3/6/9/10/11  | 1+2   |
| Band Edge Emissions               | 11b/CCK     | 1 Mbps    | 1/6/11/12/13 | 1     |
|                                   | 11g/BPSK    | 6 Mbps    | 1/6/11/12/13 | 1+2   |
|                                   | 11n HT20    | MCS0      | 1/6/11/12/13 | 1+2   |
|                                   | 11n HT40    | MCS0      | 3/6/9/10/11  | 1+2   |

#### For 5GHz Band

| Test Items                        | Mode        | Data Rate | Channel     | Chain |
|-----------------------------------|-------------|-----------|-------------|-------|
| AC Power Line Conducted Emissions | Normal Link | -         | -           | -     |
| Maximum Conducted Output Power    | 11n HT40    |           | 159         | 1+2   |
| Power Spectral Density            | 11n HT40    | MCS0      | 159         | 1+2   |
| 6dB Spectrum Bandwidth            | 11n HT40    | MCS0      | 159         | 1+2   |
| Radiated Emissions Below 1GHz     | Normal Link | -         | -           | -     |
| Radiated Emissions Above 1GHz     | 11a/BPSK    | 6 Mbps    | 149/157/165 | 1+2   |
|                                   | 11n HT20    | MCS0      | 149/157/165 | 1+2   |
|                                   | 11n HT40    | MCS0      | 151/159     | 1+2   |
| Band Edge Emissions               | 11a/BPSK    | 6 Mbps    | 149/157/165 | 1+2   |
|                                   | 11n HT20    | MCS0      | 149/157/165 | 1+2   |
|                                   | 11n HT40    | MCS0      | 151/159     | 1+2   |

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. 2.4GHz WLAN Function + Bluetooth Function

Mode 2. 5GHz WLAN Function + Bluetooth Function

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission Below 1GHz test:**

Mode 1. 2.4GHz WLAN Function + Bluetooth Function

Mode 2. 5GHz WLAN Function + Bluetooth Function

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission Above 1GHz test:**

Mode 1. CTX-EUT

**For Co-location test:**

Mode 1. 2.4GHz WLAN function + Bluetooth function

Mode 2. 5GHz WLAN function + Bluetooth function

### 3.6. Table for Testing Locations

| Test Site Location |                                                                            |          |              |             |
|--------------------|----------------------------------------------------------------------------|----------|--------------|-------------|
| Address:           | No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C. |          |              |             |
| TEL:               | 886-3-656-9065                                                             |          |              |             |
| FAX:               | 886-3-656-9085                                                             |          |              |             |
| Test Site No.      | Site Category                                                              | Location | FCC Reg. No. | IC File No. |
| 03CH01-CB          | SAC                                                                        | Hsin Chu | 262045       | IC 4086D    |
| CO01-CB            | Conduction                                                                 | Hsin Chu | 262045       | IC 4086D    |
| TH01-CB            | OVEN Room                                                                  | Hsin Chu | -            | -           |

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Class II Change

This product is an extension of original one reported under Sporton project number: FR440181AA

Below is the table for the change of the product with respect to the original one.

| Modifications                                  | Performance Checking                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Adding two set dipole antennas for the device. | <ol style="list-style-type: none"> <li>1. AC Conducted Emissions</li> <li>2. Maximum Conducted Output Power Measurement</li> <li>3. Power Spectral Density Measurement</li> <li>4. 6dB Spectrum Bandwidth Measurement</li> <li>5. Radiated Emissions Measurement</li> <li>6. Emissions Measurement</li> <li>7. Radiated Emission Co-location</li> </ol> |

Note1: The above test items will be based on original output power to re-test.

Note2: There is no change in hardware or in existing RF relevant portion.

Note3: Configuration IEEE 802.11b 1 Mbps Channel 11 / IEEE 802.11n MCS0 HT40 Channel 159 power reduced due to limitation of Radiated Out of Band Emission, so the Maximum Conducted Output Power Measurement, Power Spectral Density Measurement and 6dB Spectrum Bandwidth Measurement were retested.

### 3.8. Table for Supporting Units

For Test Site No: CO01-CB

| Support Unit                                                              | Brand      | Model         | FCC ID           |
|---------------------------------------------------------------------------|------------|---------------|------------------|
| NB                                                                        | DELL       | E6220         | DoC              |
| AP Router                                                                 | Planex     | GW-AP54SGX    | KA220030603014-1 |
| Broadcom 802.11a/b/g/n<br>WLAN+ Bluetooth PCI-E<br>NGFF2230 card (Device) | Broadcom   | BCM943228Z    | QDS-BRCM1084     |
| NB                                                                        | DELL       | E6430         | DoC              |
| Mouse                                                                     | HP         | FM100         | DoC              |
| Earphone                                                                  | SHYARO CHI | MIC-04        | N/A              |
| Test Fixture*2                                                            | Broadcom   | BCM9NGFF2EC_1 | N/A              |

For Test Site No: 03CH01-CB (For Below 1GHz)

| Support Unit                                                              | Brand    | Model         | FCC ID       |
|---------------------------------------------------------------------------|----------|---------------|--------------|
| NB                                                                        | DELL     | E4300         | DoC          |
| Wireless ac AP                                                            | Netgear  | R6300V2       | PY313200227  |
| Broadcom 802.11a/b/g/n<br>WLAN+ Bluetooth PCI-E<br>NGFF2230 card (Device) | Broadcom | BCM943228Z    | QDS-BRCM1084 |
| NB                                                                        | DELL     | E4300         | DoC          |
| Mouse                                                                     | Logitech | M-U0026       | DoC          |
| Earphone                                                                  | e-Power  | S90W          | N/A          |
| Test Fixture*2                                                            | Broadcom | BCM9NGFF2EC_1 | N/A          |

For Test Site No: 03CH01-CB (For Above 1GHz) and TH01-CB

| Support Unit | Brand    | Model         | FCC ID |
|--------------|----------|---------------|--------|
| NB           | DELL     | E4300         | DoC    |
| Test Fixture | Broadcom | BCM9NGFF2EC_1 | N/A    |

### 3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### For 2.4GHz Band

| Test Software Version | MTool 2.0.1.6        |          |          |          |          |
|-----------------------|----------------------|----------|----------|----------|----------|
| Mode                  | Test Frequency (MHz) |          |          |          |          |
|                       | NCB: 20MHz           |          |          |          |          |
|                       | 2412 MHz             | 2437 MHz | 2462 MHz | 2467 MHz | 2472 MHz |
| 802.11b               | 64                   | 71       | 60       | 64       | 46       |
| 802.11g               | 50                   | 74       | 54       | 45       | 38       |
| 802.11n MCS0 HT20     | 50                   | 75       | 48       | 43       | 34       |

| Test Software Version | MTool 2.0.1.6        |          |          |          |          |
|-----------------------|----------------------|----------|----------|----------|----------|
| Mode                  | Test Frequency (MHz) |          |          |          |          |
|                       | NCB: 40MHz           |          |          |          |          |
|                       | 2422 MHz             | 2437 MHz | 2452 MHz | 2457 MHz | 2462 MHz |
| 802.11n MCS0 HT40     | 42                   | 43       | 42       | 40       | 25       |

#### For 5GHz Band

| Test Software Version | MTool 2.0.1.6        |          |          |            |          |
|-----------------------|----------------------|----------|----------|------------|----------|
| Mode                  | Test Frequency (MHz) |          |          |            |          |
|                       | NCB: 20MHz           |          |          | NCB: 40MHz |          |
|                       | 5745 MHz             | 5785 MHz | 5825 MHz | 5755 MHz   | 5795 MHz |
| 802.11a               | 62                   | 62       | 61       | -          | -        |
| 802.11n MCS0 HT20     | 62                   | 62       | 61       | -          | -        |
| 802.11n MCS0 HT40     | -                    | -        | -        | 50         | 70       |

### 3.10. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

### 3.11. Duty Cycle

| Band | Mode              | On Time<br>(ms) | On+Off Time<br>(ms) | Duty Cycle<br>(%) | Duty Factor<br>(dB) | 1/T Minimum VBW<br>(kHz) |
|------|-------------------|-----------------|---------------------|-------------------|---------------------|--------------------------|
| 2.4G | 802.11b           | -               | -                   | 100               | 0.00                | 0.01                     |
|      | 802.11g           | 2.070           | 2.090               | 99.04             | 0.04                | 0.01                     |
|      | 802.11n MCS0 HT20 | 1.920           | 1.940               | 98.97             | 0.05                | 0.01                     |
|      | 802.11n MCS0 HT40 | 0.950           | 0.975               | 97.44             | 0.11                | 1.05                     |
| 5G   | 802.11a           | 2.060           | 2.090               | 98.56             | 0.06                | 0.01                     |
|      | 802.11n MCS0 HT20 | 1.910           | 1.940               | 98.45             | 0.07                | 0.01                     |
|      | 802.11n MCS0 HT40 | 0.930           | 0.950               | 97.89             | 0.09                | 1.08                     |

### 3.12. Maximum Conducted Output Power for original report

For 2.4GHz Band

Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2

| Channel | Frequency | Duty Factor | Conducted Power (dBm) |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------|---------|-------|------------------|----------|
|         |           |             | Chain 1               | Chain 2 | Total |                  |          |
| 1       | 2412 MHz  | 0.05        | 12.82                 | 14.02   | 16.47 | 30.00            | Complies |
| 6       | 2437 MHz  |             | 18.77                 | 20.38   | 22.66 | 30.00            | Complies |
| 11      | 2462 MHz  |             | 12.63                 | 12.96   | 15.81 | 30.00            | Complies |
| 12      | 2467 MHz  |             | 11.14                 | 11.64   | 14.41 | 30.00            | Complies |
| 13      | 2472 MHz  |             | 7.74                  | 8.87    | 11.35 | 30.00            | Complies |

Only for power table of SAR

| Channel | Frequency | Duty Factor | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------------|------------------|----------|
| 1       | 2412 MHz  | 0.05        | 16.47                       | 30.00            | Complies |
| 6       | 2437 MHz  |             | 18.18                       | 30.00            | Complies |
| 11      | 2462 MHz  |             | 15.81                       | 30.00            | Complies |

Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2

| Channel | Frequency | Duty Factor | Conducted Power (dBm) |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------|---------|-------|------------------|----------|
|         |           |             | Chain 1               | Chain 2 | Total |                  |          |
| 3       | 2422 MHz  | 0.11        | 11.14                 | 12.76   | 15.04 | 30.00            | Complies |
| 6       | 2437 MHz  |             | 11.17                 | 12.53   | 14.91 | 30.00            | Complies |
| 9       | 2452 MHz  |             | 10.54                 | 11.82   | 14.24 | 30.00            | Complies |
| 10      | 2457 MHz  |             | 9.77                  | 11.29   | 13.61 | 30.00            | Complies |
| 11      | 2462 MHz  |             | 1.96                  | 5.43    | 7.04  | 30.00            | Complies |

Only for power table of SAR

| Channel | Frequency | Duty Factor | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------------|------------------|----------|
| 3       | 2422 MHz  | 0.11        | 15.04                       | 30.00            | Complies |
| 6       | 2437 MHz  |             | 14.91                       | 30.00            | Complies |
| 9       | 2452 MHz  |             | 14.24                       | 30.00            | Complies |

### For 5GHz Band

#### Configuration IEEE 802.11n MCS0 HT20 / Chain 1 + Chain 2

| Channel | Frequency | Duty Factor | Conducted Power (dBm) |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------|---------|-------|------------------|----------|
|         |           |             | Chain 1               | Chain 2 | Total |                  |          |
| 149     | 5745 MHz  | 0.07        | 15.62                 | 14.78   | 18.23 | 29.79            | Complies |
| 157     | 5785 MHz  |             | 15.88                 | 14.67   | 18.33 | 29.79            | Complies |
| 165     | 5825 MHz  |             | 15.49                 | 14.05   | 17.84 | 29.79            | Complies |

Note: Antenna gain=6.21dBi>6dBi,so B4 Power Limit=30-(6.21-6)=29.79dBm

#### Only for power table of SAR

| Channel | Frequency | Duty Factor | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------------|------------------|----------|
| 149     | 5745 MHz  | 0.07        | 16.23                       | 30.00            | Complies |
| 153     | 5765 MHz  |             | 16.24                       | 30.00            | Complies |
| 157     | 5785 MHz  |             | 16.23                       | 30.00            | Complies |
| 161     | 5805 MHz  |             | 16.26                       | 30.00            | Complies |
| 165     | 5825 MHz  |             | 16.28                       | 30.00            | Complies |

#### Configuration IEEE 802.11n MCS0 HT40 / Chain 1 + Chain 2

| Channel | Frequency | Duty Factor | Conducted Power (dBm) |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------|---------|-------|------------------|----------|
|         |           |             | Chain 1               | Chain 2 | Total |                  |          |
| 151     | 5755 MHz  | 0.09        | 15.69                 | 15.27   | 18.50 | 29.79            | Complies |
| 159     | 5795 MHz  |             | 17.44                 | 16.85   | 20.17 | 29.79            | Complies |

Note: Antenna gain=6.21dBi>6dBi,so B4 Power Limit=30-(6.21-6)=29.79dBm

#### Only for power table of SAR

| Channel | Frequency | Duty Factor | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------------|------------------|----------|
| 151     | 5755 MHz  | 0.09        | 16.21                       | 30.00            | Complies |
| 159     | 5795 MHz  |             | 16.15                       | 30.00            | Complies |

**Configuration IEEE 802.11b / Chain 1**

| Channel | Frequency | Duty Factor | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------|------------------|----------|
| 1       | 2412 MHz  | 0           | 16.84                 | 30.00            | Complies |
| 6       | 2437 MHz  |             | 18.71                 | 30.00            | Complies |
| 11      | 2462 MHz  |             | 18.54                 | 30.00            | Complies |
| 12      | 2467 MHz  |             | 16.89                 | 30.00            | Complies |
| 13      | 2472 MHz  |             | 11.75                 | 30.00            | Complies |

**Only for power table of SAR**

| Channel | Frequency | Duty Factor | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------------|------------------|----------|
| 1       | 2412 MHz  | 0           | 14.73                       | 30.00            | Complies |
| 6       | 2437 MHz  |             | 14.75                       | 30.00            | Complies |
| 11      | 2462 MHz  |             | 14.71                       | 30.00            | Complies |

**Configuration IEEE 802.11g / Chain 1 + Chain 2**

| Channel | Frequency | Duty Factor | Conducted Power (dBm) |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------|---------|-------|------------------|----------|
|         |           |             | Chain 1               | Chain 2 | Total |                  |          |
| 1       | 2412 MHz  | 0.04        | 13.04                 | 13.83   | 16.46 | 30.00            | Complies |
| 6       | 2437 MHz  |             | 18.49                 | 20.14   | 22.40 | 30.00            | Complies |
| 11      | 2462 MHz  |             | 14.18                 | 14.69   | 17.45 | 30.00            | Complies |
| 12      | 2467 MHz  |             | 11.44                 | 12.36   | 14.93 | 30.00            | Complies |
| 13      | 2472 MHz  |             | 9.36                  | 10.71   | 13.10 | 30.00            | Complies |

**Only for power table of SAR**

| Channel | Frequency | Duty Factor | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------------|------------------|----------|
| 1       | 2412 MHz  | 0.04        | 16.46                       | 30.00            | Complies |
| 6       | 2437 MHz  |             | 18.25                       | 30.00            | Complies |
| 11      | 2462 MHz  |             | 17.45                       | 30.00            | Complies |

**Configuration IEEE 802.11a / Chain 1 + Chain 2**

| Channel | Frequency | Duty Factor | Conducted Power (dBm) |         |       | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------|---------|-------|------------------|----------|
|         |           |             | Chain 1               | Chain 2 | Total |                  |          |
| 149     | 5745 MHz  | 0.06        | 15.78                 | 14.92   | 18.38 | 29.79            | Complies |
| 157     | 5785 MHz  |             | 15.54                 | 14.72   | 18.16 | 29.79            | Complies |
| 165     | 5825 MHz  |             | 15.47                 | 14.23   | 17.90 | 29.79            | Complies |


Note: Antenna gain=6.21dBi>6dBi,so B4 Power Limit=30-(6.21-6)=29.79dBm

**Only for power table of SAR**

| Channel | Frequency | Duty Factor | Total Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-------------|-----------------------------|------------------|----------|
| 149     | 5745 MHz  | 0.06        | 16.18                       | 30.00            | Complies |
| 153     | 5765 MHz  |             | 16.15                       | 30.00            | Complies |
| 157     | 5785 MHz  |             | 16.22                       | 30.00            | Complies |
| 161     | 5805 MHz  |             | 16.20                       | 30.00            | Complies |
| 165     | 5825 MHz  |             | 16.16                       | 30.00            | Complies |

### 3.13. Test Configurations


#### 3.13.1. AC Power Line Conduction Emissions Test Configuration

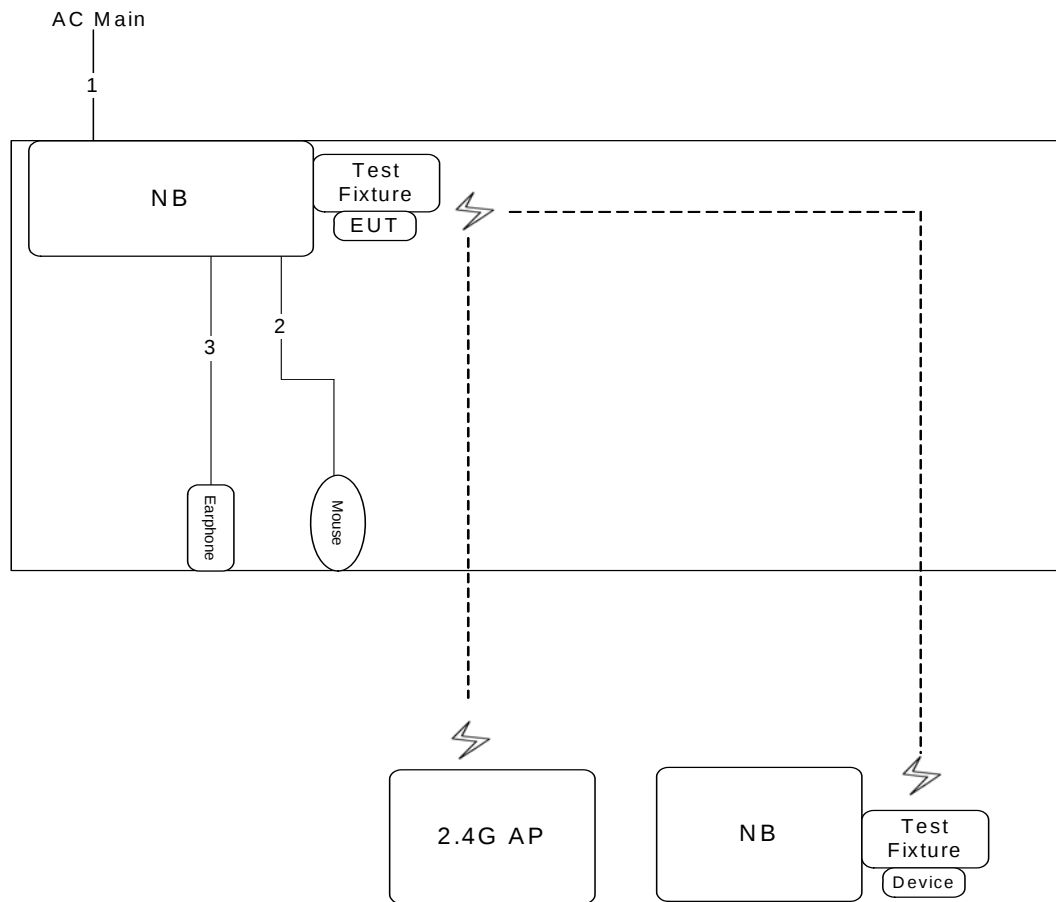

| Item | Connection  | Shielded | Length(m) |
|------|-------------|----------|-----------|
| 1    | Power cable | No       | 2.6       |
| 2    | USB cable   | Yes      | 1.8       |
| 3    | Audio cable | No       | 1.1       |


### 3.13.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

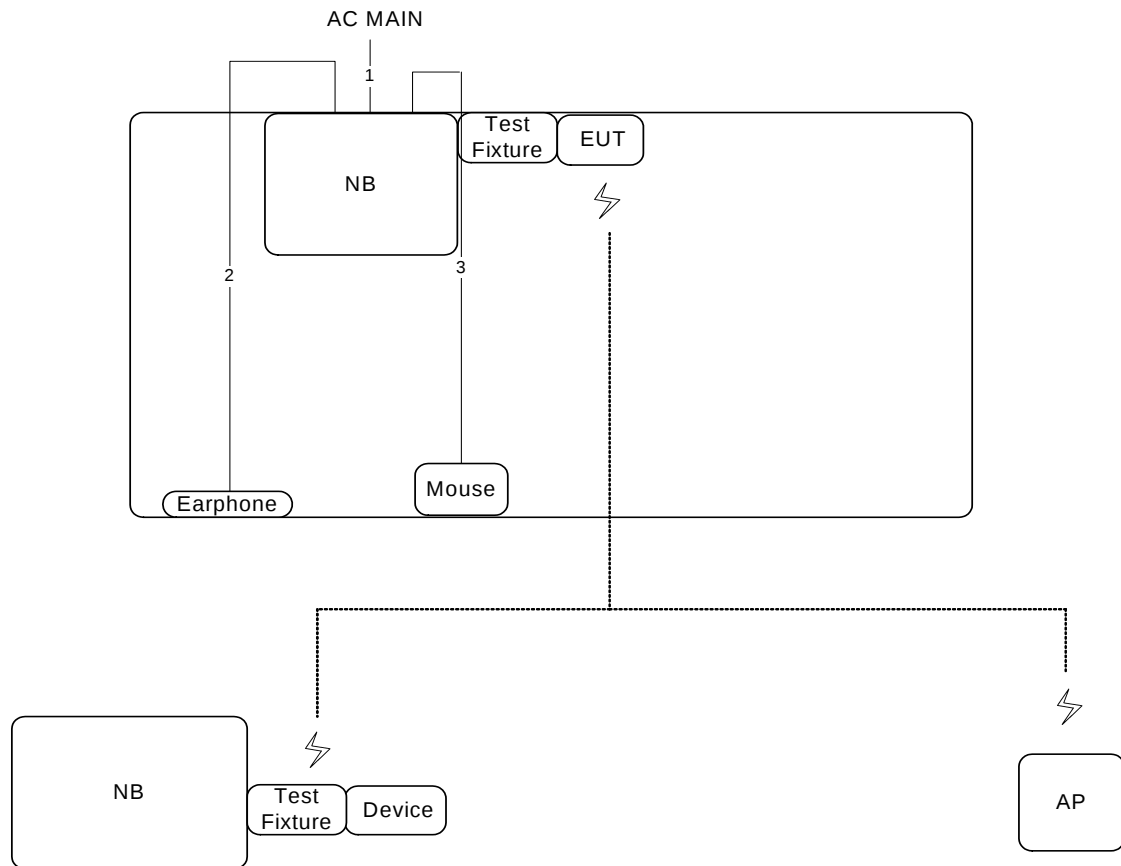

| Item | Connection  | Shielded | Length(m) |
|------|-------------|----------|-----------|
| 1    | Power cable | No       | 2.6       |
| 2    | Audio cable | No       | 1.4       |
| 3    | USB cable   | Yes      | 1.8       |

Test Configuration: above 1GHz

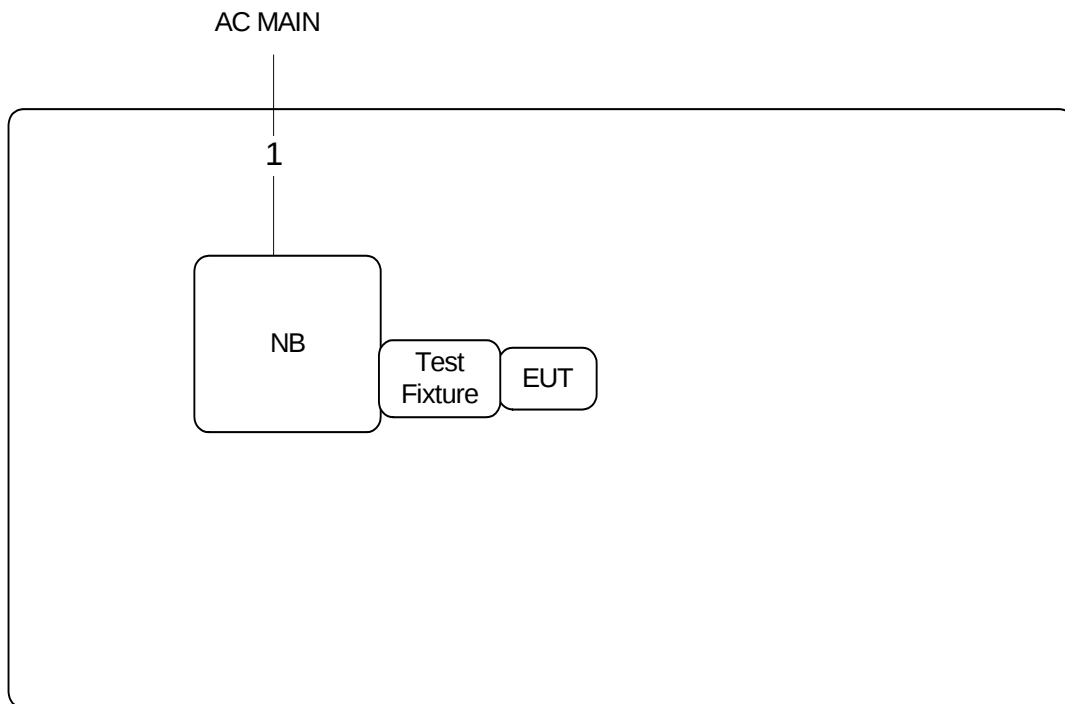

| Item | Connection  | Shielded | Length(m) |
|------|-------------|----------|-----------|
| 1    | Power cable | No       | 2.6       |

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

| Frequency (MHz) | QP Limit (dBuV) | AV Limit (dBuV) |
|-----------------|-----------------|-----------------|
| 0.15~0.5        | 66~56           | 56~46           |
| 0.5~5           | 56              | 46              |
| 5~30            | 60              | 50              |

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

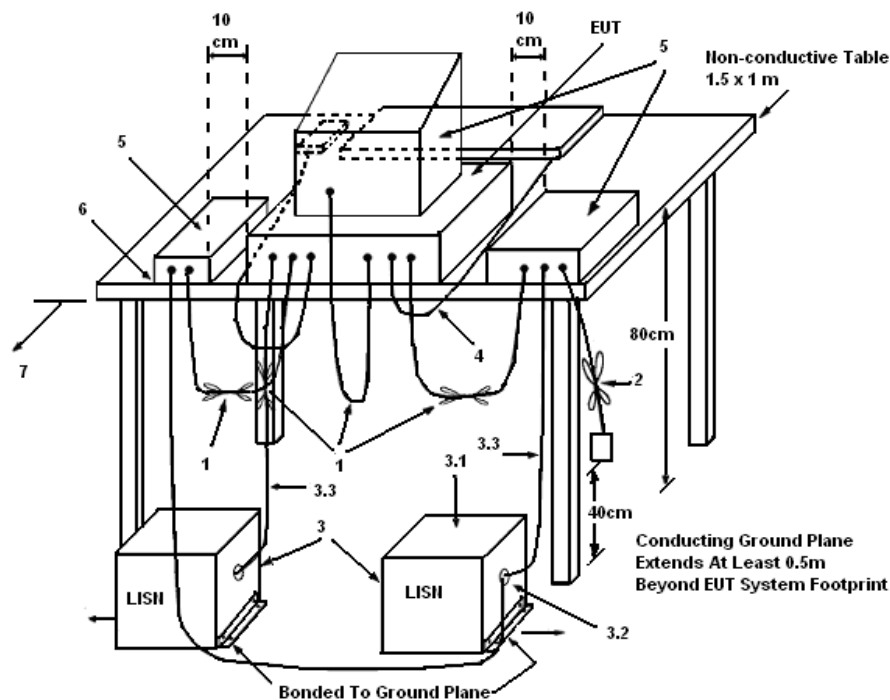

**LEGEND:**

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

|               |             |           |        |
|---------------|-------------|-----------|--------|
| Temperature   | 22°C        | Humidity  | 58%    |
| Test Engineer | Ryo Fan     | Phase     | Line   |
| Configuration | Normal Link | Test Mode | Mode 1 |

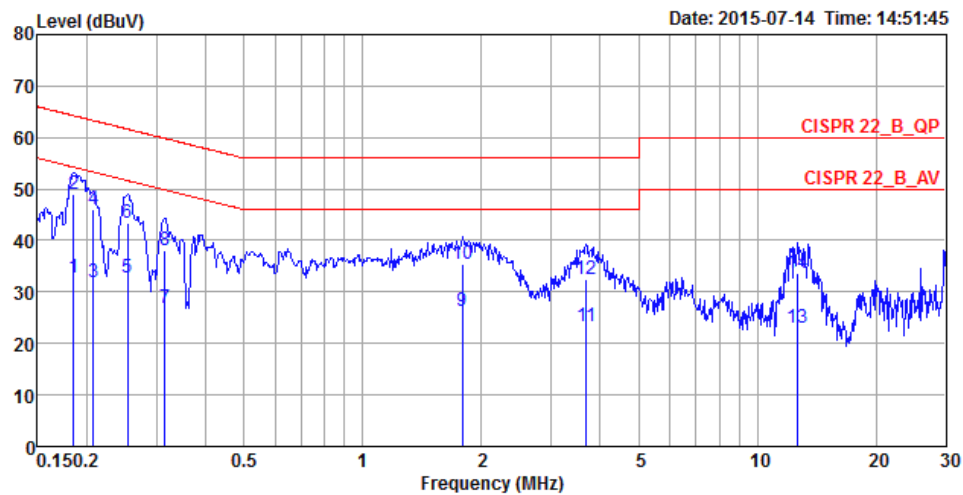

|    | Freq    | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Pol/Phase | Remark  |
|----|---------|-------|------------|------------|------------|-------------|------------|-----------|---------|
|    | MHz     | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |           |         |
| 1  | 0.1854  | 32.82 | -21.42     | 54.24      | 22.62      | 10.01       | 0.19       | LINE      | Average |
| 2  | 0.1854  | 48.90 | -15.34     | 64.24      | 38.70      | 10.01       | 0.19       | LINE      | QP      |
| 3  | 0.2072  | 31.85 | -21.47     | 53.32      | 21.65      | 10.01       | 0.19       | LINE      | Average |
| 4  | 0.2072  | 46.05 | -17.27     | 63.32      | 35.85      | 10.01       | 0.19       | LINE      | QP      |
| 5  | 0.2535  | 32.71 | -18.93     | 51.64      | 22.51      | 10.01       | 0.19       | LINE      | Average |
| 6  | 0.2535  | 43.52 | -18.12     | 61.64      | 33.32      | 10.01       | 0.19       | LINE      | QP      |
| 7  | 0.3149  | 26.93 | -22.91     | 49.84      | 16.72      | 10.01       | 0.20       | LINE      | Average |
| 8  | 0.3149  | 38.01 | -21.83     | 59.84      | 27.80      | 10.01       | 0.20       | LINE      | QP      |
| 9  | 1.7905  | 26.25 | -19.75     | 46.00      | 15.95      | 10.05       | 0.25       | LINE      | Average |
| 10 | 1.7905  | 35.54 | -20.46     | 56.00      | 25.24      | 10.05       | 0.25       | LINE      | QP      |
| 11 | 3.6806  | 23.43 | -22.57     | 46.00      | 13.05      | 10.08       | 0.30       | LINE      | Average |
| 12 | 3.6806  | 32.60 | -23.40     | 56.00      | 22.22      | 10.08       | 0.30       | LINE      | QP      |
| 13 | 12.5821 | 22.96 | -27.04     | 50.00      | 12.27      | 10.28       | 0.41       | LINE      | Average |
| 14 | 12.5821 | 33.67 | -26.33     | 60.00      | 22.98      | 10.28       | 0.41       | LINE      | QP      |

|               |             |           |         |
|---------------|-------------|-----------|---------|
| Temperature   | 22°C        | Humidity  | 58%     |
| Test Engineer | Ryo Fan     | Phase     | Neutral |
| Configuration | Normal Link | Test Mode | Mode 1  |

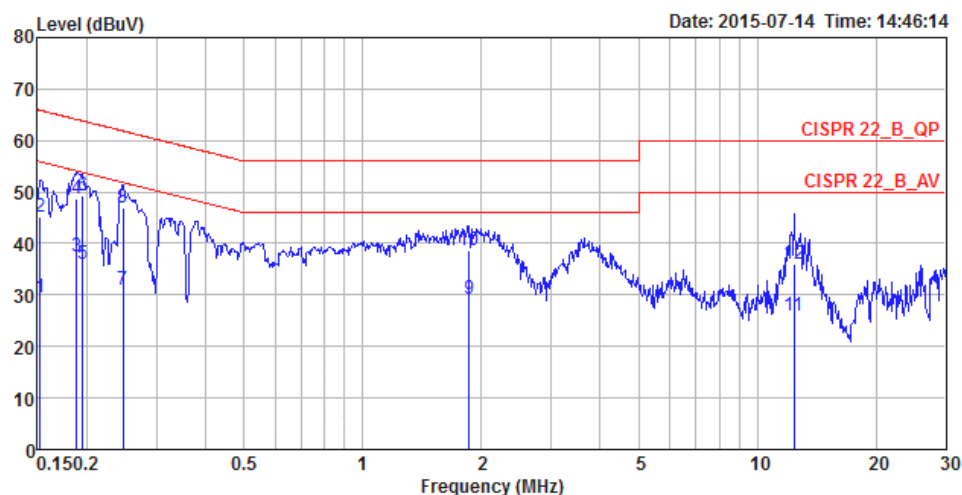

|    | Freq    | Level | Over<br>Limit | Limit<br>Line | Read<br>Level | LISN<br>Factor | Cable<br>Loss | Pol/Phase | Remark  |
|----|---------|-------|---------------|---------------|---------------|----------------|---------------|-----------|---------|
|    | MHz     | dBuV  | dB            | dBuV          | dBuV          | dB             | dB            |           |         |
| 1  | 0.1524  | 29.49 | -26.38        | 55.87         | 19.32         | 10.00          | 0.17          | NEUTRAL   | Average |
| 2  | 0.1524  | 45.02 | -20.85        | 65.87         | 34.85         | 10.00          | 0.17          | NEUTRAL   | QP      |
| 3  | 0.1884  | 37.43 | -16.68        | 54.11         | 27.23         | 10.01          | 0.19          | NEUTRAL   | Average |
| 4  | 0.1884  | 48.81 | -15.30        | 64.11         | 38.61         | 10.01          | 0.19          | NEUTRAL   | QP      |
| 5  | 0.1955  | 35.97 | -17.83        | 53.80         | 25.77         | 10.01          | 0.19          | NEUTRAL   | Average |
| 6  | 0.1955  | 49.42 | -14.38        | 63.80         | 39.22         | 10.01          | 0.19          | NEUTRAL   | QP      |
| 7  | 0.2468  | 30.90 | -20.96        | 51.86         | 20.70         | 10.01          | 0.19          | NEUTRAL   | Average |
| 8  | 0.2468  | 46.82 | -15.04        | 61.86         | 36.62         | 10.01          | 0.19          | NEUTRAL   | QP      |
| 9  | 1.8581  | 29.22 | -16.78        | 46.00         | 18.92         | 10.04          | 0.26          | NEUTRAL   | Average |
| 10 | 1.8581  | 38.74 | -17.26        | 56.00         | 28.44         | 10.04          | 0.26          | NEUTRAL   | QP      |
| 11 | 12.3837 | 25.97 | -24.03        | 50.00         | 15.30         | 10.27          | 0.40          | NEUTRAL   | Average |
| 12 | 12.3837 | 36.10 | -23.90        | 60.00         | 25.43         | 10.27          | 0.40          | NEUTRAL   | QP      |

Note:

Level = Read Level + LISN Factor + Cable Loss

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

The limit for output power is 30dBm.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

| Power Meter Parameter | Setting                                                    |
|-----------------------|------------------------------------------------------------|
| Bandwidth             | 50MHz bandwidth is greater than the EUT emission bandwidth |
| Detector              | Average                                                    |

### 4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r03 section 9.2.3.2 Measurement using a power meter (PM).
2. Multiple antenna systems was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

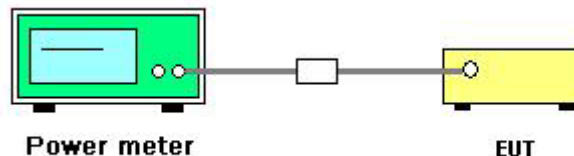

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

|               |          |           |               |
|---------------|----------|-----------|---------------|
| Temperature   | 25°C     | Humidity  | 45%           |
| Test Engineer | Roki Liu | Test Date | Jul. 20, 2015 |

##### For 2.4GHz Band

| Mode    | Frequency | Conducted Power (dBm) | Max. Limit (dBm) | Result   |
|---------|-----------|-----------------------|------------------|----------|
|         |           | Chain 1               |                  |          |
| 802.11b | 2462 MHz  | 15.67                 | 30.00            | Complies |

##### For 5GHz Band

| Mode                 | Frequency | Conducted Power (dBm) |         |       | Max. Limit (dBm) | Result   |
|----------------------|-----------|-----------------------|---------|-------|------------------|----------|
|                      |           | Chain 1               | Chain 2 | Total |                  |          |
| 802.11n<br>MCS0 HT40 | 5795 MHz  | 13.23                 | 13.28   | 16.27 | 30.00            | Complies |

### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter | Setting                                              |
|--------------------|------------------------------------------------------|
| Attenuation        | Auto                                                 |
| Span Frequency     | Set the span to 1.5 times the DTS channel bandwidth. |
| RBW                | $3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$   |
| VBW                | $\geq 3 \times \text{RBW}$                           |
| Detector           | Peak                                                 |
| Trace              | Max Hold                                             |
| Sweep Time         | Auto couple                                          |

#### 4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD) and KDB 662911 D01 v02r01 section In-Band Power Spectral Density (PSD) Measurements option (b) Measure and sum spectral maximal across the outputs.
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span/RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

#### 4.3.4. Test Setup Layout

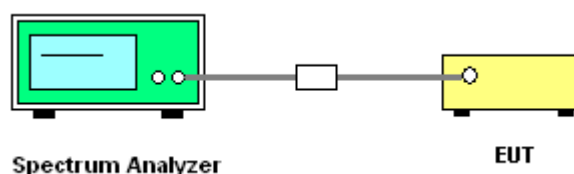

#### **4.3.5. Test Deviation**

There is no deviation with the original standard.

#### **4.3.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

|               |          |          |     |
|---------------|----------|----------|-----|
| Temperature   | 25°C     | Humidity | 45% |
| Test Engineer | Roki Liu |          |     |

##### For 2.4GHz Band

| Mode    | Frequency | Power Density (dBm/3kHz) | Power Density Limit (dBm/3kHz) | Result   |
|---------|-----------|--------------------------|--------------------------------|----------|
|         |           | Chain 1                  |                                |          |
| 802.11b | 2462 MHz  | -8.14                    | 8.00                           | Complies |


##### For 5GHz Band

| Mode                 | Frequency | Power Density (dBm/3kHz) |         |        | Power Density Limit (dBm/3kHz) | Result   |
|----------------------|-----------|--------------------------|---------|--------|--------------------------------|----------|
|                      |           | Chain 1                  | Chain 2 | Total  |                                |          |
| 802.11n<br>MCS0 HT40 | 5755 MHz  | -15.11                   | -15.53  | -12.30 | 8.00                           | Complies |

Note:  $DirectionalGain = 10 \cdot \log \left[ \frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right] = 4.10\text{dBi} < 6\text{dBi}$ , so the limit doesn't reduce.

For 2.4GHz Band


Power Density Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1

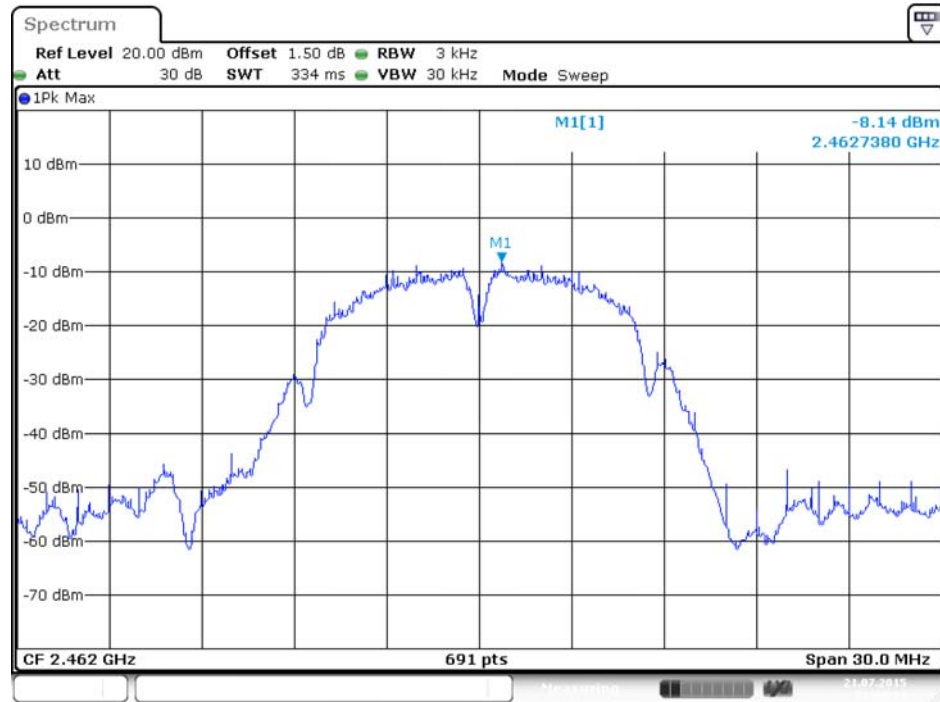

Date: 21.JUL 2015 23:43:18


For 5GHz Band

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 5755 MHz / Chain 1

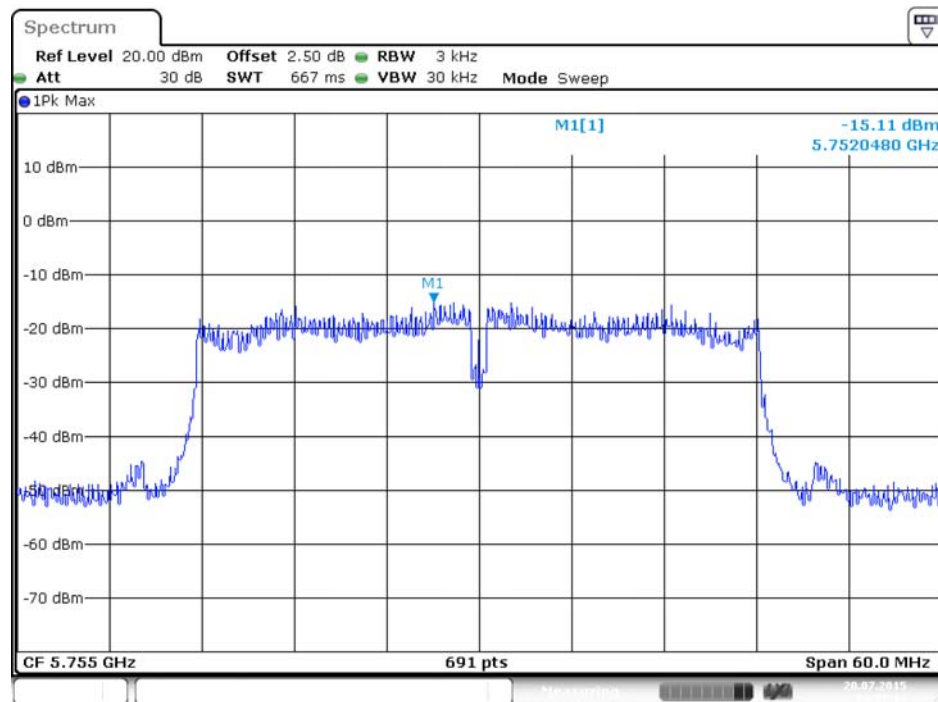

Date: 20.JUL.2015 14:57:41

Power Density Plot on Configuration IEEE 802.11n MCS0 HT40 / 5755 MHz / Chain 2

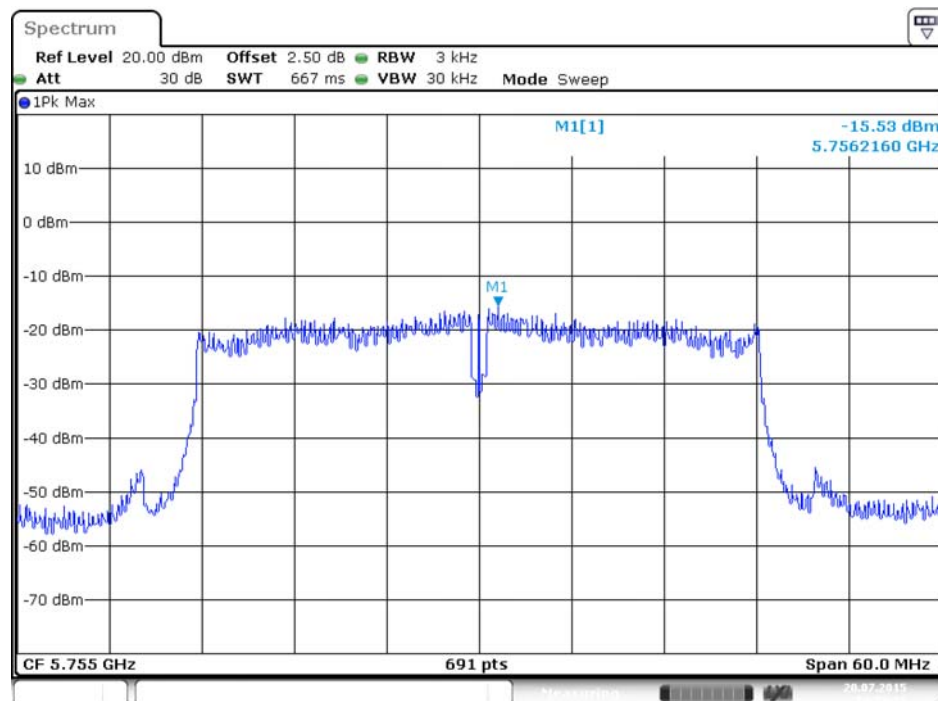

Date: 20.JUL.2015 14:59:11

#### 4.4. 6dB Spectrum Bandwidth Measurement

##### 4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

##### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| 6dB Spectrum Bandwidth |                                |
|------------------------|--------------------------------|
| Spectrum Parameters    | Setting                        |
| Attenuation            | Auto                           |
| Span Frequency         | > 6dB Bandwidth                |
| RBW                    | 100kHz                         |
| VBW                    | $\geq 3 \times \text{RBW}$     |
| Detector               | Peak                           |
| Trace                  | Max Hold                       |
| Sweep Time             | Auto                           |
| 99% Occupied Bandwidth |                                |
| Spectrum Parameters    | Setting                        |
| Span                   | 1.5 times to 5.0 times the OBW |
| RBW                    | 1 % to 5 % of the OBW          |
| VBW                    | $\geq 3 \times \text{RBW}$     |
| Detector               | Peak                           |
| Trace                  | Max Hold                       |

##### 4.4.3. Test Procedures

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 8.0 DTS 6-dB signal bandwidth option 1.
3. Multiple antenna system was performed in accordance with KDB 662911 D01 v02r01 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
4. Measurement perform conducted of each port.
5. Measured the spectrum width with power higher than 6dB below carrier.

##### 4.4.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.3.4.

#### **4.4.5. Test Deviation**

There is no deviation with the original standard.

#### **4.4.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth

|               |          |          |     |
|---------------|----------|----------|-----|
| Temperature   | 25°C     | Humidity | 45% |
| Test Engineer | Roki Liu |          |     |

##### For 2.4GHz Band


| Mode    | Frequency | 6dB Bandwidth (MHz) | 99% Occupied Bandwidth (MHz) | Min. Limit (kHz) | Test Result |
|---------|-----------|---------------------|------------------------------|------------------|-------------|
|         |           | Chain 1             | Chain 1                      |                  |             |
| 802.11b | 2462 MHz  | 8.06                | 10.25                        | 500              | Complies    |

##### For 5GHz Band

| Mode              | Frequency | 6dB Bandwidth (MHz) |         | 99% Occupied Bandwidth (MHz) |         | Min. Limit (kHz) | Test Result |
|-------------------|-----------|---------------------|---------|------------------------------|---------|------------------|-------------|
|                   |           | Chain 1             | Chain 2 | Chain 1                      | Chain 2 |                  |             |
| 802.11n MCS0 HT40 | 5755 MHz  | 36.29               | 36.90   | 36.29                        | 36.90   | 500              | Complies    |


For 2.4GHz Band

6 dB Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1

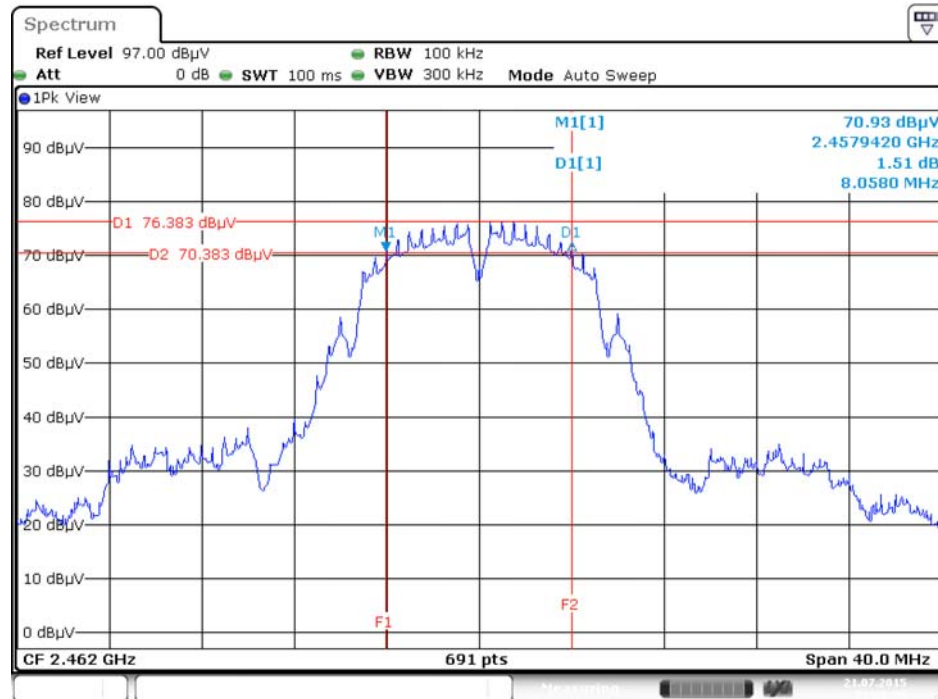

Date: 21.JUL.2015 23:28:26


99% Occupied Bandwidth Plot on Configuration IEEE 802.11b / 2462 MHz / Chain 1

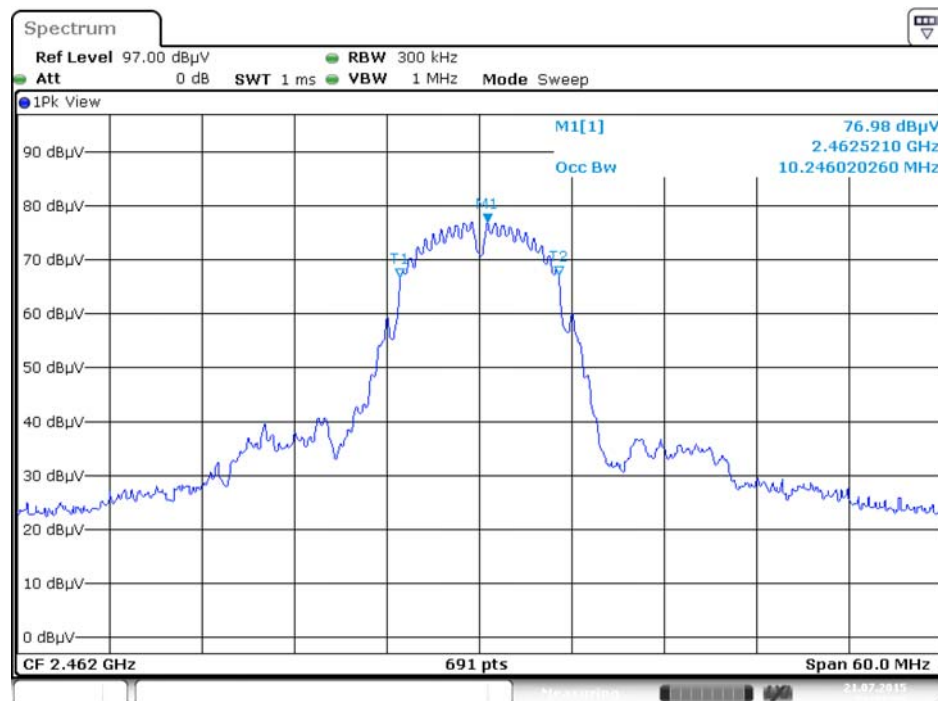

Date: 21.JUL.2015 23:37:26


## For 5GHz Band

### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 5755MHz / Chain 1

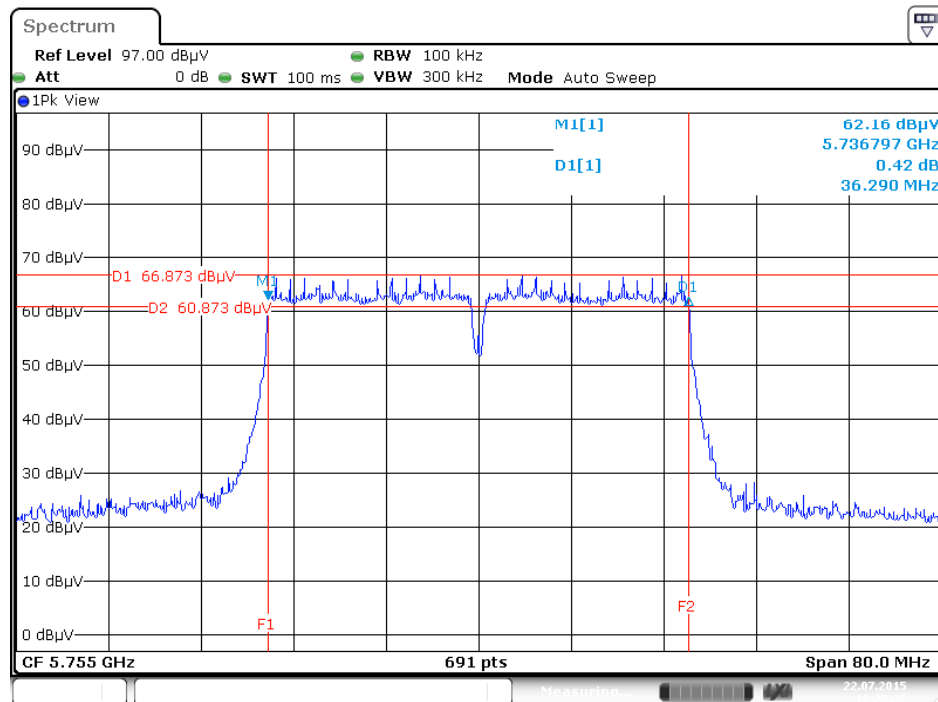


Date: 22.JUL.2015 18:25:32

### 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 5755MHz / Chain 1

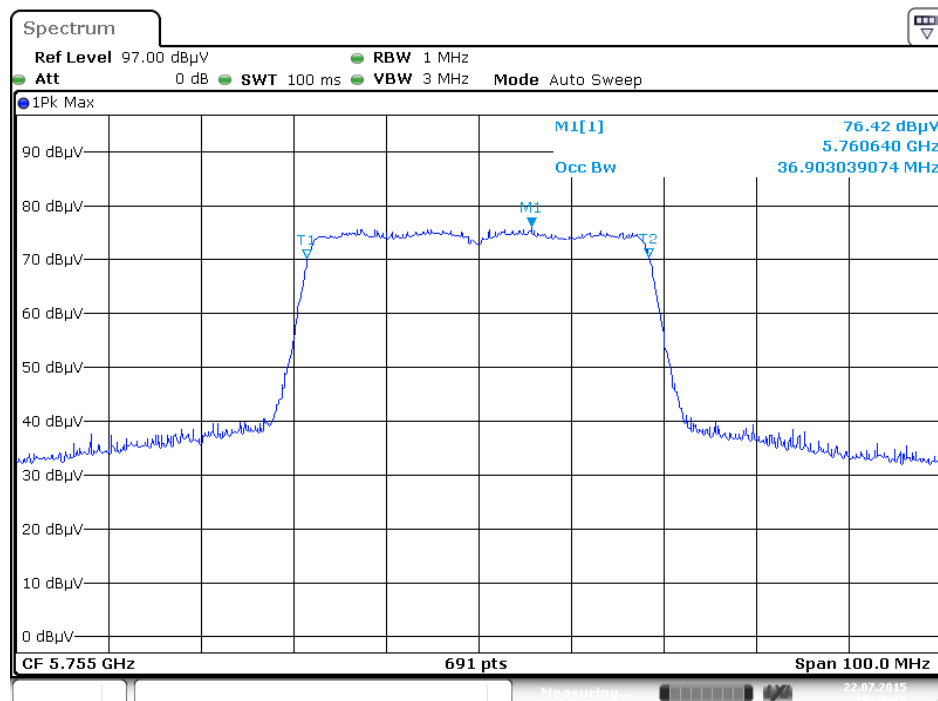


Date: 22.JUL.2015 18:28:15

### 6 dB Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 5755MHz / Chain 2

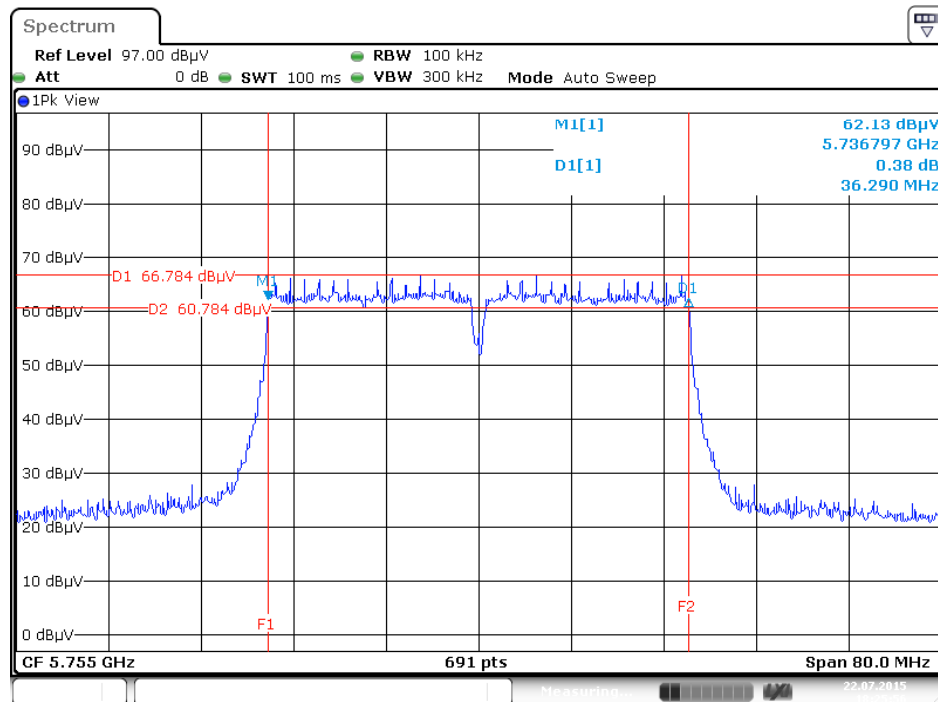

Date: 22.JUL.2015 18:25:56

### 99% Occupied Bandwidth Plot on Configuration IEEE 802.11n MCS0 HT40 / 5755MHz / Chain 2

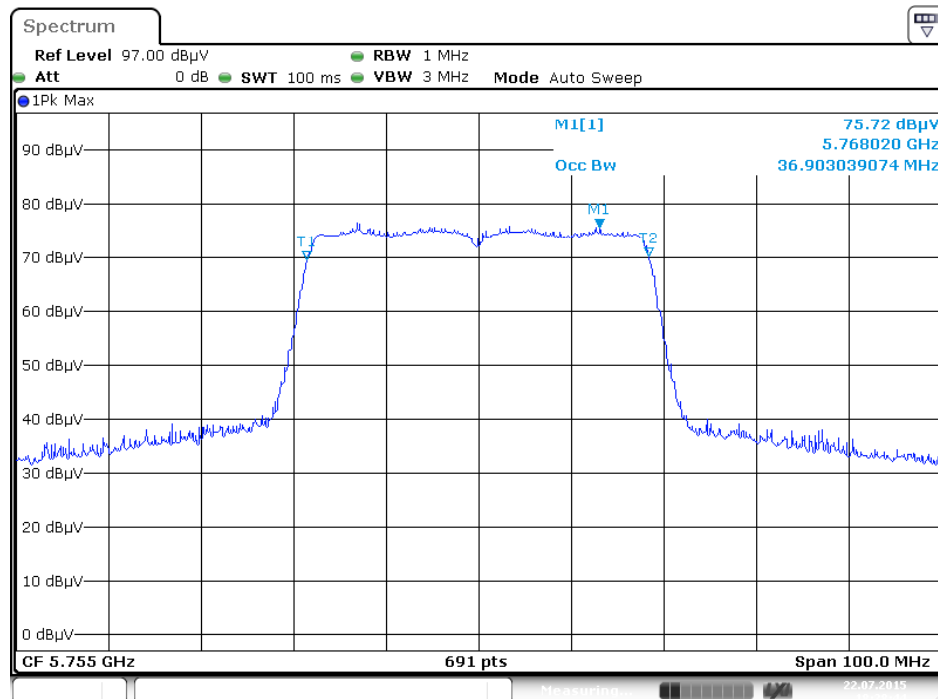

Date: 22.JUL.2015 18:28:45

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(kHz)                          | 300                              |
| 0.490~1.705          | 24000/F(kHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

| Spectrum Parameter                          | Setting                                         |
|---------------------------------------------|-------------------------------------------------|
| Attenuation                                 | Auto                                            |
| Start Frequency                             | 1000 MHz                                        |
| Stop Frequency                              | 10th carrier harmonic                           |
| RBW / VBW (Emission in restricted band)     | 1MHz / 3MHz for Peak,<br>1MHz / 1/T for Average |
| RBW / VBW (Emission in non-restricted band) | 100kHz / 300kHz for peak                        |


| Receiver Parameter     | Setting                           |
|------------------------|-----------------------------------|
| Attenuation            | Auto                              |
| Start ~ Stop Frequency | 9kHz~150kHz / RBW 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RBW 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RBW 120kHz for QP |

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 1m & 3m far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

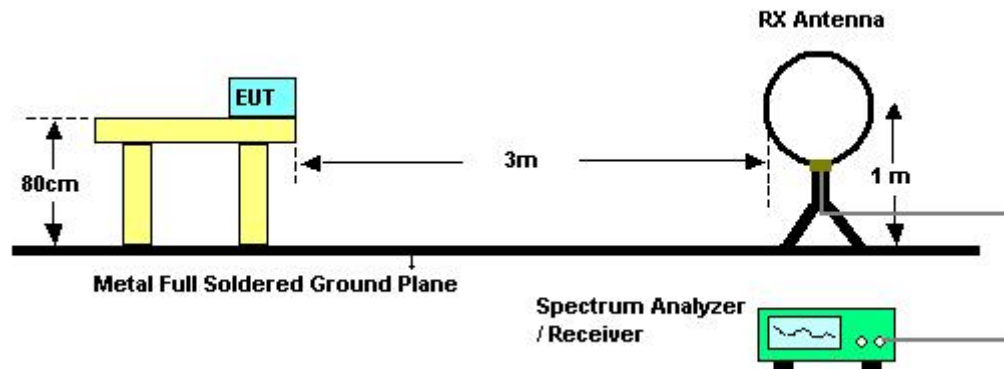

For Radiated Emissions: 30MHz~1GHz

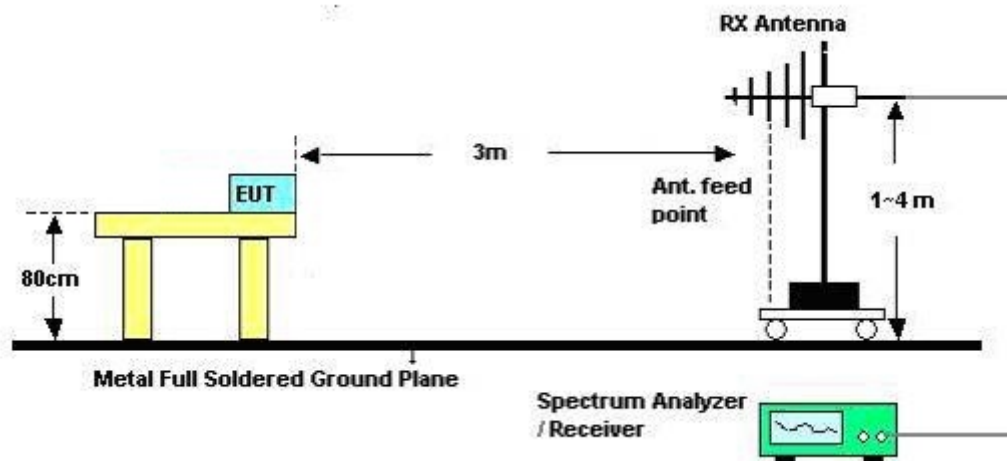

For Radiated Emissions: Above 1GHz

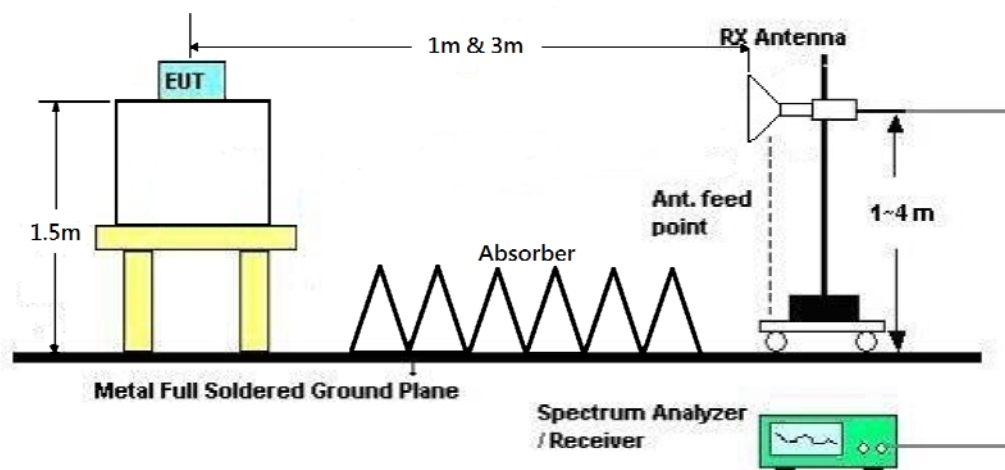

#### **4.5.5. Test Deviation**

There is no deviation with the original standard.

#### **4.5.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

|               |               |                |             |
|---------------|---------------|----------------|-------------|
| Temperature   | 22°C          | Humidity       | 64%         |
| Test Engineer | Magic Lai     | Configurations | Normal Link |
| Test Date     | Jul. 16, 2015 | Test Mode      | Mode 1      |

| Freq.<br>(MHz) | Level<br>(dBuV) | Over Limit<br>(dB) | Limit Line<br>(dBuV) | Remark   |
|----------------|-----------------|--------------------|----------------------|----------|
| -              | -               | -                  | -                    | See Note |

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

#### 4.5.8. Results of Radiated Emissions (30MHz~1GHz)


|               |           |                |             |
|---------------|-----------|----------------|-------------|
| Temperature   | 22°C      | Humidity       | 64%         |
| Test Engineer | Magic Lai | Configurations | Normal Link |
| Test Mode     | Mode 1    |                |             |

##### Horizontal

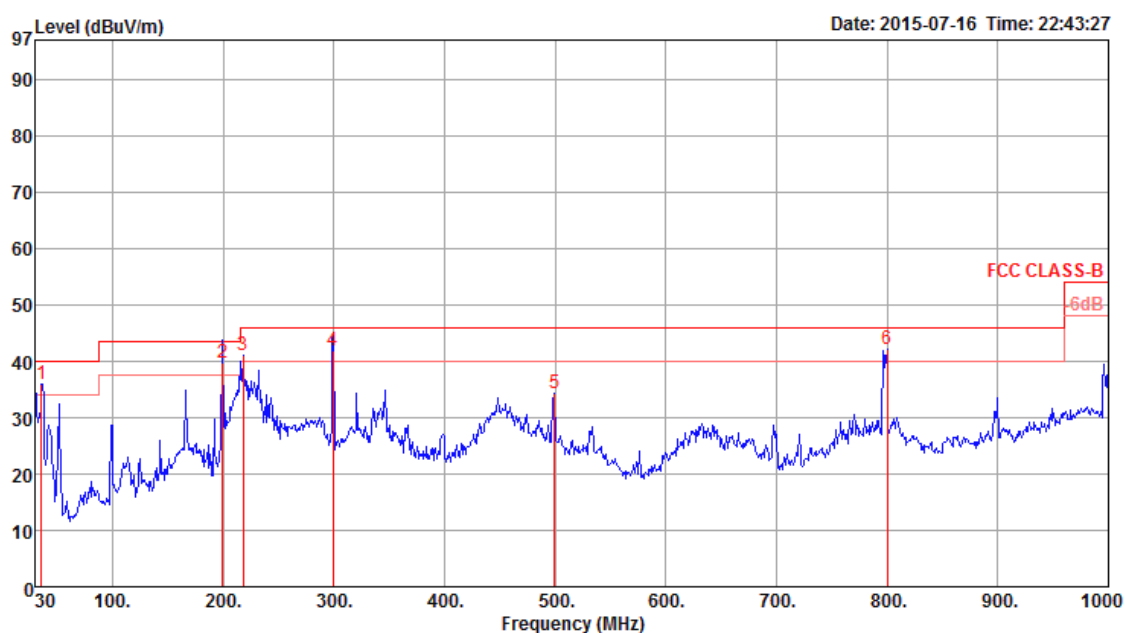

|   | Freq   | Level  | Limit  | Over   | Read  | CableAntenna | Preamp |       | A/Pos | T/Pos | Pol/Phase  |
|---|--------|--------|--------|--------|-------|--------------|--------|-------|-------|-------|------------|
|   | MHz    | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | cm    | deg   |            |
| 1 | 35.82  | 36.01  | 40.00  | -3.99  | 46.13 | 0.69         | 16.62  | 27.43 | 100   | 0     | HORIZONTAL |
| 2 | 199.75 | 39.83  | 43.50  | -3.67  | 55.69 | 1.66         | 10.20  | 27.72 | 121   | 51    | HORIZONTAL |
| 3 | 218.18 | 41.12  | 46.00  | -4.88  | 56.46 | 1.70         | 10.64  | 27.68 | 100   | 0     | HORIZONTAL |
| 4 | 299.66 | 41.85  | 46.00  | -4.15  | 53.40 | 2.03         | 13.90  | 27.48 | 147   | 122   | HORIZONTAL |
| 5 | 499.48 | 34.32  | 46.00  | -11.68 | 42.53 | 2.67         | 17.79  | 28.67 | 100   | 0     | HORIZONTAL |
| 6 | 800.18 | 42.23  | 46.00  | -3.77  | 46.54 | 3.22         | 20.80  | 28.33 | 100   | 0     | HORIZONTAL |

### Vertical

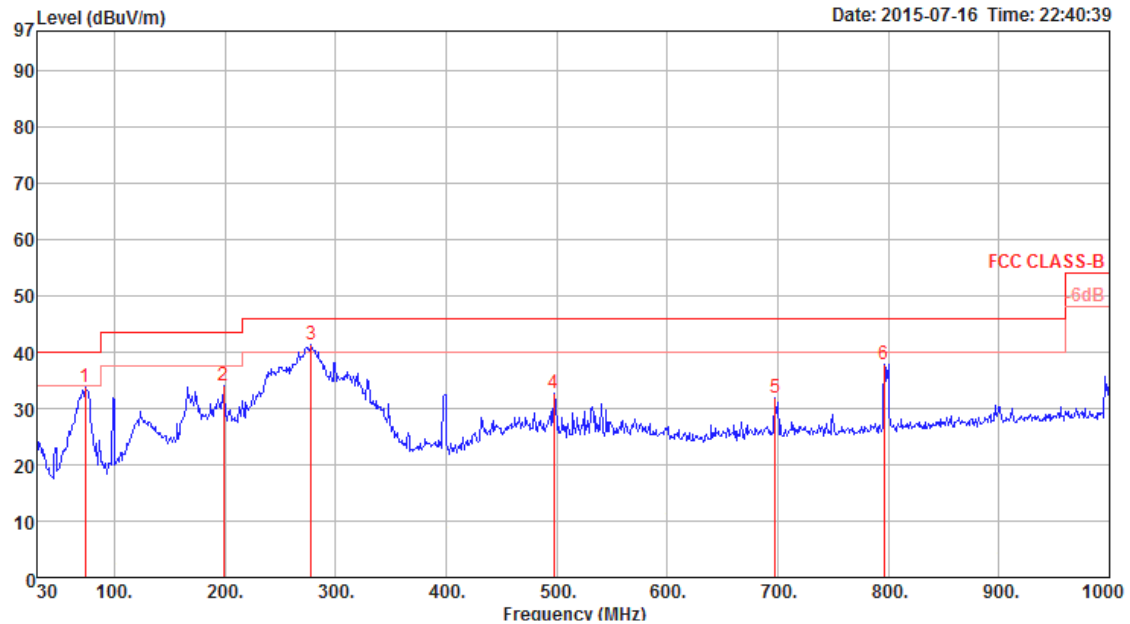

|   | Freq   | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp |        | A/Pos | T/Pos | Pol/Phase |
|---|--------|--------|--------|--------|-------|-------|---------|--------|--------|-------|-------|-----------|
|   | MHz    | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | Remark | cm    | deg   |           |
| 1 | 73.65  | 33.83  | 40.00  | -6.17  | 54.19 | 0.94  | 7.09    | 28.39  | Peak   | 400   | 0     | VERTICAL  |
| 2 | 198.78 | 33.93  | 43.50  | -9.57  | 49.87 | 1.66  | 10.13   | 27.73  | Peak   | 400   | 0     | VERTICAL  |
| 3 | 278.32 | 41.24  | 46.00  | -4.76  | 53.25 | 1.92  | 13.60   | 27.53  | Peak   | 400   | 0     | VERTICAL  |
| 4 | 497.54 | 32.70  | 46.00  | -13.30 | 40.95 | 2.66  | 17.76   | 28.67  | Peak   | 400   | 0     | VERTICAL  |
| 5 | 697.36 | 31.93  | 46.00  | -14.07 | 37.75 | 3.09  | 19.69   | 28.60  | Peak   | 400   | 0     | VERTICAL  |
| 6 | 796.30 | 37.84  | 46.00  | -8.16  | 42.22 | 3.22  | 20.75   | 28.35  | Peak   | 400   | 0     | VERTICAL  |

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

#### 4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

|               |               |                |                             |
|---------------|---------------|----------------|-----------------------------|
| Temperature   | 22°C          | Humidity       | 64%                         |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11b CH 1 / Chain 1 |
| Test Date     | Jul. 16, 2015 |                |                             |

##### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |            |
| 1 | 4823.92 | 55.82  | 74.00  | -18.18 | 53.55 | 4.10         | 32.69  | 34.52 | 312   | 114 Peak    | HORIZONTAL |
| 2 | 4823.95 | 53.52  | 74.00  | -0.48  | 51.25 | 4.10         | 32.69  | 34.52 | 312   | 114 Average | HORIZONTAL |

##### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 4823.92 | 49.72  | 54.00  | -4.28  | 47.45 | 4.10         | 32.69  | 34.52 | 146   | 126 Average | VERTICAL  |
| 2 | 4823.98 | 52.91  | 74.00  | -21.09 | 50.64 | 4.10         | 32.69  | 34.52 | 146   | 126 Peak    | VERTICAL  |

|               |               |                |                             |
|---------------|---------------|----------------|-----------------------------|
| Temperature   | 22°C          | Humidity       | 64%                         |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11b CH 6 / Chain 1 |
| Test Date     | Jul. 16, 2015 |                |                             |

### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |            |
| 1 | 4873.94 | 55.99  | 74.00  | -18.01 | 53.59 | 4.13  | 32.78   | 34.51  | 311   | 125   | Peak    | HORIZONTAL |
| 2 | 4873.95 | 53.96  | 54.00  | -0.04  | 51.56 | 4.13  | 32.78   | 34.51  | 311   | 125   | Average | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |           |
| 1 | 4873.89 | 51.42  | 74.00  | -22.58 | 49.02 | 4.13  | 32.78   | 34.51  | 151   | 154   | Peak    | VERTICAL  |
| 2 | 4873.94 | 47.75  | 54.00  | -6.25  | 45.35 | 4.13  | 32.78   | 34.51  | 151   | 154   | Average | VERTICAL  |

|               |               |                |                              |
|---------------|---------------|----------------|------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                          |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11b CH 11 / Chain 1 |
| Test Date     | Jul. 16, 2015 |                |                              |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 4923.91 | 55.90  | 74.00      | -18.10     | 53.36      | 4.15       | 32.88          | 34.49         | 313   | 137   | Peak    | HORIZONTAL |
| 2 | 4923.96 | 53.56  | 54.00      | -0.44      | 51.02      | 4.15       | 32.88          | 34.49         | 313   | 137   | Average | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 4923.96 | 52.15  | 74.00      | -21.85     | 49.61      | 4.15       | 32.88          | 34.49         | 3     | 136   | Peak    | VERTICAL  |
| 2 | 4923.96 | 48.52  | 54.00      | -5.48      | 45.98      | 4.15       | 32.88          | 34.49         | 3     | 136   | Average | VERTICAL  |

|               |               |                |                              |
|---------------|---------------|----------------|------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                          |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11b CH 12 / Chain 1 |
| Test Date     | Jul. 16, 2015 |                |                              |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 4933.93 | 53.15  | 54.00      | -0.85      | 50.61      | 4.15       | 32.88          | 34.49         | 312   | 141   | Average | HORIZONTAL |
| 2 | 4933.95 | 55.82  | 74.00      | -18.18     | 53.28      | 4.15       | 32.88          | 34.49         | 312   | 141   | Peak    | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 4933.97 | 53.48  | 74.00      | -20.52     | 50.94      | 4.15       | 32.88          | 34.49         | 11    | 187   | Peak    | VERTICAL  |
| 2 | 4933.97 | 50.40  | 54.00      | -3.60      | 47.86      | 4.15       | 32.88          | 34.49         | 11    | 187   | Average | VERTICAL  |

|               |               |                |                              |
|---------------|---------------|----------------|------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                          |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11b CH 13 / Chain 1 |
| Test Date     | Jul. 16, 2015 |                |                              |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 4943.98 | 45.99  | 54.00      | -8.01      | 43.41      | 4.16       | 32.91          | 34.49         | 314   | 124   | Average | HORIZONTAL |
| 2 | 4943.99 | 50.62  | 74.00      | -23.38     | 48.04      | 4.16       | 32.91          | 34.49         | 314   | 124   | Peak    | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 4943.68 | 47.81  | 74.00      | -26.19     | 45.23      | 4.16       | 32.91          | 34.49         | 83    | 162   | Peak    | VERTICAL  |
| 2 | 4943.96 | 41.11  | 54.00      | -12.89     | 38.53      | 4.16       | 32.91          | 34.49         | 83    | 162   | Average | VERTICAL  |

|               |               |                |                                       |
|---------------|---------------|----------------|---------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                   |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11g CH 1 / Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                       |

### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |            |
| 1 | 4823.62 | 58.27  | 74.00  | -15.73 | 56.00 | 4.10  | 32.69   | 34.52  | 313   | 146   | Peak    | HORIZONTAL |
| 2 | 4824.00 | 42.66  | 54.00  | -11.34 | 40.39 | 4.10  | 32.69   | 34.52  | 313   | 146   | Average | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |           |
| 1 | 4823.76 | 41.19  | 54.00  | -12.81 | 38.92 | 4.10  | 32.69   | 34.52  | 212   | 134   | Average | VERTICAL  |
| 2 | 4824.91 | 57.59  | 74.00  | -16.41 | 55.32 | 4.10  | 32.69   | 34.52  | 212   | 134   | Peak    | VERTICAL  |

|               |               |                |                                       |
|---------------|---------------|----------------|---------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                   |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11g CH 6 / Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                       |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 4873.14 | 64.82  | 74.00      | -9.18      | 62.42      | 4.13       | 32.78          | 34.51         | 312   | 139   | Peak    | HORIZONTAL |
| 2 | 4873.23 | 51.28  | 54.00      | -2.72      | 48.88      | 4.13       | 32.78          | 34.51         | 312   | 139   | Average | HORIZONTAL |
| 3 | 7311.05 | 43.02  | 54.00      | -10.98     | 35.46      | 5.09       | 37.23          | 34.76         | 305   | 151   | Average | HORIZONTAL |
| 4 | 7311.82 | 55.51  | 74.00      | -18.49     | 47.95      | 5.09       | 37.23          | 34.76         | 305   | 151   | Peak    | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 4872.99 | 43.98  | 54.00      | -10.02     | 41.58      | 4.13       | 32.78          | 34.51         | 328   | 144   | Average | VERTICAL  |
| 2 | 4873.38 | 56.85  | 74.00      | -17.15     | 54.45      | 4.13       | 32.78          | 34.51         | 328   | 144   | Peak    | VERTICAL  |
| 3 | 7306.48 | 57.35  | 74.00      | -16.65     | 49.79      | 5.09       | 37.23          | 34.76         | 356   | 158   | Peak    | VERTICAL  |
| 4 | 7310.90 | 43.23  | 54.00      | -10.77     | 35.67      | 5.09       | 37.23          | 34.76         | 356   | 158   | Average | VERTICAL  |

|               |               |                |                                        |
|---------------|---------------|----------------|----------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                    |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11g CH 11 / Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                        |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 4924.19 | 46.56  | 54.00      | -7.44      | 44.02      | 4.15       | 32.88          | 34.49         | 314   | 114   | Average | HORIZONTAL |
| 2 | 4924.48 | 61.55  | 74.00      | -12.45     | 59.01      | 4.15       | 32.88          | 34.49         | 314   | 114   | Peak    | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 4924.10 | 57.35  | 74.00      | -16.65     | 54.81      | 4.15       | 32.88          | 34.49         | 341   | 134   | Peak    | VERTICAL  |
| 2 | 4924.19 | 42.54  | 54.00      | -11.46     | 40.00      | 4.15       | 32.88          | 34.49         | 341   | 134   | Average | VERTICAL  |

|               |               |                |                                        |
|---------------|---------------|----------------|----------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                    |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11g CH 12 / Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                        |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 4933.95 | 39.73  | 54.00      | -14.27     | 37.19      | 4.15       | 32.88          | 34.49         | 314   | 144   | Average | HORIZONTAL |
| 2 | 4939.29 | 55.30  | 74.00      | -18.70     | 52.72      | 4.16       | 32.91          | 34.49         | 314   | 144   | Peak    | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 4934.39 | 38.30  | 54.00      | -15.70     | 35.76      | 4.15       | 32.88          | 34.49         | 353   | 148   | Average | VERTICAL  |
| 2 | 4934.48 | 53.67  | 74.00      | -20.33     | 51.13      | 4.15       | 32.88          | 34.49         | 353   | 148   | Peak    | VERTICAL  |

|               |               |                |                                        |
|---------------|---------------|----------------|----------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                    |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11g CH 13 / Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                        |

### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |            |
| 1 | 4948.62 | 51.76  | 74.00  | -22.24 | 49.18 | 4.16  | 32.91   | 34.49  | 315   | 163   | Peak    | HORIZONTAL |
| 2 | 4948.86 | 35.57  | 54.00  | -18.43 | 32.99 | 4.16  | 32.91   | 34.49  | 315   | 163   | Average | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |           |
| 1 | 4943.86 | 35.04  | 54.00  | -18.96 | 32.46 | 4.16  | 32.91   | 34.49  | 354   | 159   | Average | VERTICAL  |
| 2 | 4944.53 | 51.03  | 74.00  | -22.97 | 48.45 | 4.16  | 32.91   | 34.49  | 354   | 159   | Peak    | VERTICAL  |

|               |               |                |                                                    |
|---------------|---------------|----------------|----------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT20 CH 1 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                                    |

### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |            |
| 1 | 4819.00 | 56.54  | 74.00  | -17.46 | 54.27 | 4.10  | 32.69   | 34.52  | 314   | 155   | Peak    | HORIZONTAL |
| 2 | 4823.76 | 41.39  | 54.00  | -12.61 | 39.12 | 4.10  | 32.69   | 34.52  | 314   | 155   | Average | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |           |
| 1 | 4823.62 | 50.79  | 74.00  | -23.21 | 48.52 | 4.10  | 32.69   | 34.52  | 342   | 174   | Peak    | VERTICAL  |
| 2 | 4823.90 | 36.06  | 54.00  | -17.94 | 33.79 | 4.10  | 32.69   | 34.52  | 342   | 174   | Average | VERTICAL  |

|               |               |                |                                                    |
|---------------|---------------|----------------|----------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT20 CH 6 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                                    |

### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |            |
| 1 | 4871.02 | 52.97  | 54.00         | -1.03         | 50.57         | 4.13                        | 32.78            | 34.51 | 313   | 143 Average | HORIZONTAL |
| 2 | 4871.55 | 66.12  | 74.00         | -7.88         | 63.72         | 4.13                        | 32.78            | 34.51 | 313   | 143 Peak    | HORIZONTAL |
| 3 | 7310.81 | 44.13  | 54.00         | -9.87         | 36.57         | 5.09                        | 37.23            | 34.76 | 304   | 137 Average | HORIZONTAL |
| 4 | 7311.00 | 57.04  | 74.00         | -16.96        | 49.48         | 5.09                        | 37.23            | 34.76 | 304   | 137 Peak    | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |           |
| 1 | 4873.18 | 60.05  | 74.00         | -13.95        | 57.65         | 4.13                        | 32.78            | 34.51 | 358   | 133 Peak    | VERTICAL  |
| 2 | 4875.59 | 46.61  | 54.00         | -7.39         | 44.21         | 4.13                        | 32.78            | 34.51 | 358   | 133 Average | VERTICAL  |
| 3 | 7304.03 | 57.66  | 74.00         | -16.34        | 50.10         | 5.09                        | 37.23            | 34.76 | 359   | 136 Peak    | VERTICAL  |
| 4 | 7313.64 | 44.62  | 54.00         | -9.38         | 37.06         | 5.09                        | 37.23            | 34.76 | 359   | 136 Average | VERTICAL  |

|               |               |                |                                                  |
|---------------|---------------|----------------|--------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                              |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT20 CH 11 / Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                                  |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 4924.10 | 55.75  | 74.00      | -18.25     | 53.21      | 4.15       | 32.88          | 34.49         | 313   | 149   | Peak    | HORIZONTAL |
| 2 | 4924.19 | 40.29  | 54.00      | -13.71     | 37.75      | 4.15       | 32.88          | 34.49         | 313   | 149   | Average | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 4924.00 | 52.03  | 74.00      | -21.97     | 49.49      | 4.15       | 32.88          | 34.49         | 359   | 180   | Peak    | VERTICAL  |
| 2 | 4926.07 | 38.24  | 54.00      | -15.76     | 35.70      | 4.15       | 32.88          | 34.49         | 359   | 180   | Average | VERTICAL  |

|               |               |                |                                                     |
|---------------|---------------|----------------|-----------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                 |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT20 CH 12 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                                     |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 4934.29 | 53.11  | 74.00      | -20.89     | 50.57      | 4.15       | 32.88          | 34.49         | 316   | 144   | Peak    | HORIZONTAL |
| 2 | 4934.29 | 37.77  | 54.00      | -16.23     | 35.23      | 4.15       | 32.88          | 34.49         | 316   | 144   | Average | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 4934.10 | 37.43  | 54.00      | -16.57     | 34.89      | 4.15       | 32.88          | 34.49         | 356   | 149   | Average | VERTICAL  |
| 2 | 4934.19 | 50.06  | 74.00      | -23.94     | 47.52      | 4.15       | 32.88          | 34.49         | 356   | 149   | Peak    | VERTICAL  |

|               |               |                |                                                     |
|---------------|---------------|----------------|-----------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                 |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT20 CH 13 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                                     |

### Horizontal

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|------------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |            |
| 1 | 4943.90 | 34.87  | 54.00  | -19.13 | 32.29 | 4.16         | 32.91  | 34.49 | 314   | 155 Average | HORIZONTAL |
| 2 | 4951.07 | 49.10  | 74.00  | -24.90 | 46.52 | 4.16         | 32.91  | 34.49 | 314   | 155 Peak    | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 4944.00 | 33.40  | 54.00  | -20.60 | 30.82 | 4.16         | 32.91  | 34.49 | 260   | 169 Average | VERTICAL  |
| 2 | 4954.77 | 44.51  | 74.00  | -29.49 | 41.89 | 4.17         | 32.94  | 34.49 | 260   | 169 Peak    | VERTICAL  |

|               |               |                |                                                    |
|---------------|---------------|----------------|----------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT40 CH 3 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                                    |

### Horizontal

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 4844.22 | 45.18  | 74.00      | -28.82     | 42.86      | 4.11       | 32.72          | 34.51         | 234   | 153   | Peak    | HORIZONTAL |
| 2 | 4844.26 | 33.17  | 54.00      | -20.83     | 30.85      | 4.11       | 32.72          | 34.51         | 234   | 153   | Average | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 4844.06 | 51.77  | 74.00      | -22.23     | 49.45      | 4.11       | 32.72          | 34.51         | 148   | 118   | Peak    | VERTICAL  |
| 2 | 4844.10 | 36.69  | 54.00      | -17.31     | 34.37      | 4.11       | 32.72          | 34.51         | 148   | 118   | Average | VERTICAL  |

|               |               |                |                                                    |
|---------------|---------------|----------------|----------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT40 CH 6 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                                    |

### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |            |
| 1 | 4873.94 | 48.52  | 74.00         | -25.48        | 46.12         | 4.13                        | 32.78            | 34.51 | 281   | 139 Peak    | HORIZONTAL |
| 2 | 4874.22 | 34.92  | 54.00         | -19.08        | 32.52         | 4.13                        | 32.78            | 34.51 | 281   | 139 Average | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |             |           |
| 1 | 4871.76 | 50.18  | 74.00         | -23.82        | 47.78         | 4.13                        | 32.78            | 34.51 | 300   | 120 Peak    | VERTICAL  |
| 2 | 4874.03 | 36.52  | 54.00         | -17.48        | 34.12         | 4.13                        | 32.78            | 34.51 | 300   | 120 Average | VERTICAL  |

|               |               |                |                                                    |
|---------------|---------------|----------------|----------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT40 CH 9 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                                    |

### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |         |            |
| 1 | 4903.97 | 45.49  | 74.00         | -28.51        | 43.01         | 4.14                        | 32.84            | 231   | 113   | Peak    | HORIZONTAL |
| 2 | 4904.03 | 32.38  | 54.00         | -21.62        | 29.90         | 4.14                        | 32.84            | 231   | 113   | Average | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |         |           |
| 1 | 4901.85 | 36.10  | 54.00         | -17.90        | 33.62         | 4.14                        | 32.84            | 157   | 116   | Average | VERTICAL  |
| 2 | 4906.40 | 49.13  | 74.00         | -24.87        | 46.65         | 4.14                        | 32.84            | 157   | 116   | Peak    | VERTICAL  |

|               |               |                |                                                     |
|---------------|---------------|----------------|-----------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                 |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT40 CH 10 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                                     |

#### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|---------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |         |            |
| 1 | 4906.69 | 31.10  | 54.00         | -22.90        | 28.62         | 4.14                        | 32.84            | 144   | 139   | Average | HORIZONTAL |
| 2 | 4920.41 | 43.73  | 74.00         | -30.27        | 41.19         | 4.15                        | 32.88            | 144   | 139   | Peak    | HORIZONTAL |

#### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|---------|-----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | deg   | cm    |         |           |
| 1 | 4914.13 | 35.98  | 54.00         | -18.02        | 33.50         | 4.14                        | 32.84            | 171   | 119   | Average | VERTICAL  |
| 2 | 4916.47 | 49.84  | 74.00         | -24.16        | 47.35         | 4.14                        | 32.84            | 171   | 119   | Peak    | VERTICAL  |

|               |               |                |                                                  |
|---------------|---------------|----------------|--------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                              |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT40 CH 11 / Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                                  |

### Horizontal

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark | Pol/Phase |            |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|--------|-----------|------------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB    | deg   | cm     |           |            |
| 1 | 4924.16 | 31.63  | 54.00         | -22.37        | 29.09         | 4.15                        | 32.88            | 34.49 | 104   | 274    | Average   | HORIZONTAL |
| 2 | 4931.69 | 44.26  | 74.00         | -29.74        | 41.72         | 4.15                        | 32.88            | 34.49 | 104   | 274    | Peak      | HORIZONTAL |

### Vertical

|   | Freq    | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | CableAntenna<br>Loss Factor | Preamp<br>Factor | T/Pos | A/Pos | Remark | Pol/Phase |          |
|---|---------|--------|---------------|---------------|---------------|-----------------------------|------------------|-------|-------|--------|-----------|----------|
|   | MHz     | dBuV/m | dBuV/m        | dB            | dBuV          | dB                          | dB/m             | dB    | deg   | cm     |           |          |
| 1 | 4923.97 | 33.20  | 54.00         | -20.80        | 30.66         | 4.15                        | 32.88            | 34.49 | 298   | 103    | Average   | VERTICAL |
| 2 | 4924.10 | 45.03  | 74.00         | -28.97        | 42.49         | 4.15                        | 32.88            | 34.49 | 298   | 103    | Peak      | VERTICAL |

|               |               |                |                                         |
|---------------|---------------|----------------|-----------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                     |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11a CH 149 / Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                         |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |            |
| 1 | 11485.21 | 39.94  | 54.00  | -14.06 | 29.33 | 6.53  | 38.70   | 34.62  | 292   | 150   | Average | HORIZONTAL |
| 2 | 11491.28 | 53.58  | 74.00  | -20.42 | 42.97 | 6.53  | 38.70   | 34.62  | 292   | 150   | Peak    | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |           |
| 1 | 11488.89 | 54.43  | 74.00  | -19.57 | 43.82 | 6.53  | 38.70   | 34.62  | 264   | 150   | Peak    | VERTICAL  |
| 2 | 11494.90 | 39.83  | 54.00  | -14.17 | 29.22 | 6.53  | 38.70   | 34.62  | 264   | 150   | Average | VERTICAL  |

|               |               |                |                                         |
|---------------|---------------|----------------|-----------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                     |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11a CH 157 / Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                         |

#### Horizontal

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |            |
| 1 | 11567.36 | 39.57  | 54.00      | -14.43     | 28.95      | 6.55       | 38.71          | 34.64         | 325   | 150   | Average | HORIZONTAL |
| 2 | 11568.43 | 52.71  | 74.00      | -21.29     | 42.09      | 6.55       | 38.71          | 34.64         | 325   | 150   | Peak    | HORIZONTAL |

#### Vertical

|   | Freq     | Level  | Limit Line | Over Limit | Read Level | Cable Loss | Antenna Factor | Preamp Factor | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|------------|------------|------------|------------|----------------|---------------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m     | dB         | dBuV       | dB         | dB/m           | dB            | deg   | cm    |         |           |
| 1 | 11571.73 | 52.38  | 74.00      | -21.62     | 41.77      | 6.55       | 38.71          | 34.65         | 333   | 150   | Peak    | VERTICAL  |
| 2 | 11571.96 | 39.66  | 54.00      | -14.34     | 29.05      | 6.55       | 38.71          | 34.65         | 333   | 150   | Average | VERTICAL  |

|               |               |                |                                         |
|---------------|---------------|----------------|-----------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                     |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11a CH 165 / Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                         |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |            |
| 1 | 11645.66 | 53.26  | 74.00  | -20.74 | 42.64 | 6.56  | 38.73   | 34.67  | 250   | 150   | Peak    | HORIZONTAL |
| 2 | 11647.58 | 39.64  | 54.00  | -14.36 | 29.03 | 6.56  | 38.73   | 34.68  | 250   | 150   | Average | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |           |
| 1 | 11650.82 | 39.80  | 54.00  | -14.20 | 29.19 | 6.56  | 38.73   | 34.68  | 281   | 150   | Average | VERTICAL  |
| 2 | 11652.79 | 53.27  | 74.00  | -20.73 | 42.66 | 6.56  | 38.73   | 34.68  | 281   | 150   | Peak    | VERTICAL  |

|               |               |                |                                                      |
|---------------|---------------|----------------|------------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                  |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT20 CH 149 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 17, 2015 |                |                                                      |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |            |
| 1 | 11485.03 | 40.09  | 54.00  | -13.91 | 29.48 | 6.53         | 38.70  | 34.62 | 170   | 150 Average | HORIZONTAL |
| 2 | 11487.84 | 53.50  | 74.00  | -20.50 | 42.89 | 6.53         | 38.70  | 34.62 | 170   | 150 Peak    | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 11491.59 | 40.05  | 54.00  | -13.95 | 29.44 | 6.53         | 38.70  | 34.62 | 202   | 150 Average | VERTICAL  |
| 2 | 11493.41 | 53.09  | 74.00  | -20.91 | 42.48 | 6.53         | 38.70  | 34.62 | 202   | 150 Peak    | VERTICAL  |

|               |               |                |                                                      |
|---------------|---------------|----------------|------------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                  |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT20 CH 157 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 17, 2015 |                |                                                      |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |            |
| 1 | 11571.96 | 39.84  | 54.00  | -14.16 | 29.23 | 6.55         | 38.71  | 34.65 | 112   | 150 Average | HORIZONTAL |
| 2 | 11574.38 | 52.36  | 74.00  | -21.64 | 41.75 | 6.55         | 38.71  | 34.65 | 112   | 150 Peak    | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 11565.61 | 53.27  | 74.00  | -20.73 | 42.65 | 6.55         | 38.71  | 34.64 | 150   | 150 Peak    | VERTICAL  |
| 2 | 11571.25 | 39.66  | 54.00  | -14.34 | 29.05 | 6.55         | 38.71  | 34.65 | 150   | 150 Average | VERTICAL  |

|               |               |                |                                                      |
|---------------|---------------|----------------|------------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                  |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT20 CH 165 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 17, 2015 |                |                                                      |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |            |
| 1 | 11651.36 | 39.80  | 54.00  | -14.20 | 29.19 | 6.56         | 38.73  | 34.68 | 164   | 150 Average | HORIZONTAL |
| 2 | 11652.88 | 53.41  | 74.00  | -20.59 | 42.80 | 6.56         | 38.73  | 34.68 | 164   | 150 Peak    | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 11647.50 | 39.88  | 54.00  | -14.12 | 29.27 | 6.56         | 38.73  | 34.68 | 146   | 150 Average | VERTICAL  |
| 2 | 11654.78 | 53.27  | 74.00  | -20.73 | 42.66 | 6.56         | 38.73  | 34.68 | 146   | 150 Peak    | VERTICAL  |

|               |               |                |                                                      |
|---------------|---------------|----------------|------------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                  |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT40 CH 151 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 17, 2015 |                |                                                      |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase  |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |            |
| 1 | 11505.50 | 53.06  | 74.00  | -20.94 | 42.44 | 6.54         | 38.70  | 34.62 | 167   | 150 Peak    | HORIZONTAL |
| 2 | 11514.39 | 39.72  | 54.00  | -14.28 | 29.10 | 6.54         | 38.70  | 34.62 | 167   | 150 Average | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|----------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 11508.33 | 39.84  | 54.00  | -14.16 | 29.22 | 6.54         | 38.70  | 34.62 | 217   | 150 Average | VERTICAL  |
| 2 | 11512.12 | 52.60  | 74.00  | -21.40 | 41.98 | 6.54         | 38.70  | 34.62 | 217   | 150 Peak    | VERTICAL  |

|               |               |                |                                                      |
|---------------|---------------|----------------|------------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                  |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT40 CH 159 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 17, 2015 |                |                                                      |

### Horizontal

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase  |
|---|----------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|------------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |            |
| 1 | 11587.18 | 39.54  | 54.00  | -14.46 | 28.92 | 6.55  | 38.72   | 34.65  | 135   | 150   | Average | HORIZONTAL |
| 2 | 11592.16 | 53.29  | 74.00  | -20.71 | 42.67 | 6.55  | 38.72   | 34.65  | 135   | 150   | Peak    | HORIZONTAL |

### Vertical

|   | Freq     | Level  | Limit  | Over   | Read  | Cable | Antenna | Preamp | T/Pos | A/Pos | Remark  | Pol/Phase |
|---|----------|--------|--------|--------|-------|-------|---------|--------|-------|-------|---------|-----------|
|   | MHz      | dBuV/m | dBuV/m | dB     | dBuV  | dB    | dB/m    | dB     | deg   | cm    |         |           |
| 1 | 11591.65 | 52.65  | 74.00  | -21.35 | 42.03 | 6.55  | 38.72   | 34.65  | 209   | 150   | Peak    | VERTICAL  |
| 2 | 11592.07 | 39.56  | 54.00  | -14.44 | 28.94 | 6.55  | 38.72   | 34.65  | 209   | 150   | Average | VERTICAL  |

### Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Emissions Measurement

### 4.6.1. Limit

30dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequencies<br>(MHz) | Field Strength<br>(micorvolts/meter) | Measurement Distance<br>(meters) |
|----------------------|--------------------------------------|----------------------------------|
| 0.009~0.490          | 2400/F(kHz)                          | 300                              |
| 0.490~1.705          | 24000/F(kHz)                         | 30                               |
| 1.705~30.0           | 30                                   | 30                               |
| 30~88                | 100                                  | 3                                |
| 88~216               | 150                                  | 3                                |
| 216~960              | 200                                  | 3                                |
| Above 960            | 500                                  | 3                                |

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

| Spectrum Parameter                                  | Setting                                         |
|-----------------------------------------------------|-------------------------------------------------|
| Attenuation                                         | Auto                                            |
| Span Frequency                                      | 100 MHz                                         |
| RBW / VBW (Emission in restricted band)             | 1MHz / 3MHz for Peak,<br>1MHz / 1/T for Average |
| RBW / VBW (30dBc in any 100 kHz bandwidth emission) | 100 kHz / 300 kHz for Peak                      |

### 4.6.3. Test Procedures

For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3.

For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB558074 D01 v03r03 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure

#### **4.6.4. Test Setup Layout**

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.6.5. Test Deviation**

There is no deviation with the original standard.

#### **4.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

|               |               |                |                                    |
|---------------|---------------|----------------|------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11b CH 1, 6, 11 / Chain 1 |
| Test Date     | Jul. 16, 2015 |                |                                    |

##### Channel 1

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2371.62 | 59.34  | 74.00  | -14.66 | 28.32 | 2.85         | 28.17  | 0.00  | 68    | 182 Peak    | VERTICAL  |
| 2 | 2390.00 | 48.08  | 54.00  | -5.92  | 17.08 | 2.86         | 28.14  | 0.00  | 68    | 182 Average | VERTICAL  |
| 3 | 2412.80 | 102.35 |        |        | 71.36 | 2.87         | 28.12  | 0.00  | 68    | 182 Average | VERTICAL  |
| 4 | 2412.96 | 106.14 |        |        | 75.15 | 2.87         | 28.12  | 0.00  | 68    | 182 Peak    | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2412 MHz.

##### Channel 6

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2356.23 | 58.79  | 74.00  | -15.21 | 27.77 | 2.83         | 28.19  | 0.00  | 355   | 192 Peak    | VERTICAL  |
| 2 | 2357.51 | 46.75  | 54.00  | -7.25  | 15.73 | 2.83         | 28.19  | 0.00  | 355   | 192 Average | VERTICAL  |
| 3 | 2436.04 | 105.86 |        |        | 74.88 | 2.88         | 28.10  | 0.00  | 355   | 192 Peak    | VERTICAL  |
| 4 | 2436.36 | 102.14 |        |        | 71.16 | 2.88         | 28.10  | 0.00  | 355   | 192 Average | VERTICAL  |
| 5 | 2483.50 | 46.05  | 54.00  | -7.95  | 15.12 | 2.91         | 28.02  | 0.00  | 355   | 192 Average | VERTICAL  |
| 6 | 2494.37 | 58.18  | 74.00  | -15.82 | 27.26 | 2.92         | 28.00  | 0.00  | 355   | 192 Peak    | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2437 MHz.

##### Channel 11

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2461.04 | 104.97 |        |        | 74.02 | 2.90         | 28.05  | 0.00  | 56    | 206 Peak    | VERTICAL  |
| 2 | 2461.20 | 101.34 |        |        | 70.39 | 2.90         | 28.05  | 0.00  | 56    | 206 Average | VERTICAL  |
| 3 | 2483.50 | 50.72  | 54.00  | -3.28  | 19.79 | 2.91         | 28.02  | 0.00  | 56    | 206 Average | VERTICAL  |
| 4 | 2483.64 | 59.95  | 74.00  | -14.05 | 29.02 | 2.91         | 28.02  | 0.00  | 56    | 206 Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note: Both antenna polarizations have been tested and only the worst case was recorded in test report.

|               |               |                |                                  |
|---------------|---------------|----------------|----------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                              |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11b CH 12, 13 / Chain 1 |
| Test Date     | Jul. 16, 2015 |                |                                  |

### Channel 12

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2467.80 | 101.27 |        |        | 70.32 | 2.90         | 28.05  | 0.00  | 55    | 200 Average | VERTICAL  |
| 2 | 2467.96 | 105.25 |        |        | 74.30 | 2.90         | 28.05  | 0.00  | 55    | 200 Peak    | VERTICAL  |
| 3 | 2483.50 | 62.32  | 74.00  | -11.68 | 31.39 | 2.91         | 28.02  | 0.00  | 55    | 200 Peak    | VERTICAL  |
| 4 | 2483.50 | 53.88  | 54.00  | -0.12  | 22.95 | 2.91         | 28.02  | 0.00  | 55    | 200 Average | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2467 MHz.

### Channel 13

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2471.20 | 96.74  |        |        | 65.81 | 2.91         | 28.02  | 0.00  | 55    | 201 Average | VERTICAL  |
| 2 | 2472.96 | 100.52 |        |        | 69.59 | 2.91         | 28.02  | 0.00  | 55    | 201 Peak    | VERTICAL  |
| 3 | 2484.18 | 51.28  | 54.00  | -2.72  | 20.35 | 2.91         | 28.02  | 0.00  | 55    | 201 Average | VERTICAL  |
| 4 | 2484.50 | 62.49  | 74.00  | -11.51 | 31.56 | 2.91         | 28.02  | 0.00  | 55    | 201 Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2472 MHz.

Note: Both antenna polarizations have been tested and only the worst case was recorded in test report.

|               |               |                |                                                 |
|---------------|---------------|----------------|-------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                             |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11g CH 1, 6, 11 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                                 |

#### Channel 1

|   | Freq    | Level  | Limit  | Over  | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2389.40 | 68.47  | 74.00  | -5.53 | 37.47 | 2.86         | 28.14  | 0.00  | 29    | 175 Peak    | VERTICAL  |
| 2 | 2390.00 | 50.81  | 54.00  | -3.19 | 19.81 | 2.86         | 28.14  | 0.00  | 29    | 175 Average | VERTICAL  |
| 3 | 2410.24 | 107.17 |        |       | 76.18 | 2.87         | 28.12  | 0.00  | 29    | 175 Peak    | VERTICAL  |
| 4 | 2410.72 | 97.04  |        |       | 66.05 | 2.87         | 28.12  | 0.00  | 29    | 175 Average | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2412 MHz.

#### Channel 6

|   | Freq    | Level  | Limit  | Over  | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2383.80 | 68.62  | 74.00  | -5.38 | 37.60 | 2.85         | 28.17  | 0.00  | 219   | 131 Peak    | VERTICAL  |
| 2 | 2389.56 | 51.92  | 54.00  | -2.08 | 20.92 | 2.86         | 28.14  | 0.00  | 219   | 131 Average | VERTICAL  |
| 3 | 2437.96 | 103.43 |        |       | 72.47 | 2.89         | 28.07  | 0.00  | 219   | 131 Average | VERTICAL  |
| 4 | 2438.28 | 113.41 |        |       | 82.45 | 2.89         | 28.07  | 0.00  | 219   | 131 Peak    | VERTICAL  |
| 5 | 2484.44 | 65.57  | 74.00  | -8.43 | 34.64 | 2.91         | 28.02  | 0.00  | 219   | 131 Peak    | VERTICAL  |
| 6 | 2484.76 | 50.16  | 54.00  | -3.84 | 19.23 | 2.91         | 28.02  | 0.00  | 219   | 131 Average | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2437 MHz.

#### Channel 11

|   | Freq    | Level  | Limit  | Over  | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2462.96 | 108.01 |        |       | 77.06 | 2.90         | 28.05  | 0.00  | 137   | 100 Peak    | VERTICAL  |
| 2 | 2462.96 | 98.28  |        |       | 67.33 | 2.90         | 28.05  | 0.00  | 137   | 100 Average | VERTICAL  |
| 3 | 2488.28 | 51.59  | 54.00  | -2.41 | 20.67 | 2.92         | 28.00  | 0.00  | 137   | 100 Average | VERTICAL  |
| 4 | 2488.60 | 66.58  | 74.00  | -7.42 | 35.66 | 2.92         | 28.00  | 0.00  | 137   | 100 Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note: Both antenna polarizations have been tested and only the worst case was recorded in test report.

|               |               |                |                                               |
|---------------|---------------|----------------|-----------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                           |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11g CH 12, 13 /<br>Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                               |

### Channel 12

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2468.28 | 104.73 |        |        | 73.78 | 2.90         | 28.05  | 0.00  | 227   | 110 Peak    | VERTICAL  |
| 2 | 2468.44 | 94.79  |        |        | 63.84 | 2.90         | 28.05  | 0.00  | 227   | 110 Average | VERTICAL  |
| 3 | 2490.08 | 62.44  | 74.00  | -11.56 | 31.52 | 2.92         | 28.00  | 0.00  | 227   | 110 Peak    | VERTICAL  |
| 4 | 2493.76 | 50.17  | 54.00  | -3.83  | 19.25 | 2.92         | 28.00  | 0.00  | 227   | 110 Average | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2467 MHz.

### Channel 13

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2473.28 | 103.33 |        |        | 72.40 | 2.91         | 28.02  | 0.00  | 121   | 112 Peak    | VERTICAL  |
| 2 | 2473.28 | 93.16  |        |        | 62.23 | 2.91         | 28.02  | 0.00  | 121   | 112 Average | VERTICAL  |
| 3 | 2484.02 | 49.64  | 54.00  | -4.36  | 18.71 | 2.91         | 28.02  | 0.00  | 121   | 112 Average | VERTICAL  |
| 4 | 2495.72 | 60.96  | 74.00  | -13.04 | 30.04 | 2.92         | 28.00  | 0.00  | 121   | 112 Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2472 MHz.

Note: Both antenna polarizations have been tested and only the worst case was recorded in test report.

|               |               |                |                                                        |
|---------------|---------------|----------------|--------------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                    |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT20 CH 1, 6, 11 / Chain 1 + Chain 2 |
| Test date     | Jul. 16, 2015 |                |                                                        |

#### Channel 1

|   | Freq    | Level  | Limit  | Over  | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2382.83 | 66.52  | 74.00  | -7.48 | 35.50 | 2.85         | 28.17  | 0.00  | 213   | 144 Peak    | VERTICAL  |
| 2 | 2390.00 | 51.73  | 54.00  | -2.27 | 20.73 | 2.86         | 28.14  | 0.00  | 213   | 144 Average | VERTICAL  |
| 3 | 2412.80 | 97.59  |        |       | 66.60 | 2.87         | 28.12  | 0.00  | 213   | 144 Average | VERTICAL  |
| 4 | 2413.12 | 107.56 |        |       | 76.57 | 2.87         | 28.12  | 0.00  | 213   | 144 Peak    | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2412 MHz.

#### Channel 6

|   | Freq    | Level  | Limit  | Over  | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2385.72 | 67.73  | 74.00  | -6.27 | 36.73 | 2.86         | 28.14  | 0.00  | 165   | 143 Peak    | VERTICAL  |
| 2 | 2388.28 | 52.59  | 54.00  | -1.41 | 21.59 | 2.86         | 28.14  | 0.00  | 165   | 143 Average | VERTICAL  |
| 3 | 2437.64 | 113.20 |        |       | 82.24 | 2.89         | 28.07  | 0.00  | 165   | 143 Peak    | VERTICAL  |
| 4 | 2437.64 | 103.23 |        |       | 72.27 | 2.89         | 28.07  | 0.00  | 165   | 143 Average | VERTICAL  |
| 5 | 2483.50 | 53.13  | 54.00  | -0.87 | 22.20 | 2.91         | 28.02  | 0.00  | 165   | 143 Average | VERTICAL  |
| 6 | 2485.40 | 65.42  | 74.00  | -8.58 | 34.49 | 2.91         | 28.02  | 0.00  | 165   | 143 Peak    | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2437 MHz.

#### Channel 11

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2461.20 | 105.16 |        |        | 74.21 | 2.90         | 28.05  | 0.00  | 355   | 183 Peak    | VERTICAL  |
| 2 | 2461.20 | 95.46  |        |        | 64.51 | 2.90         | 28.05  | 0.00  | 355   | 183 Average | VERTICAL  |
| 3 | 2483.64 | 50.56  | 54.00  | -3.44  | 19.63 | 2.91         | 28.02  | 0.00  | 355   | 183 Average | VERTICAL  |
| 4 | 2487.80 | 62.78  | 74.00  | -11.22 | 31.86 | 2.92         | 28.00  | 0.00  | 355   | 183 Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note: Both antenna polarizations have been tested and only the worst case was recorded in test report.

|               |               |                |                                                      |
|---------------|---------------|----------------|------------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                  |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT20 CH 12, 13 / Chain 1 + Chain 2 |
| Test Date     | Jul. 16, 2015 |                |                                                      |

### Channel 12

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2466.36 | 103.82 |        |        | 72.87 | 2.90         | 28.05  | 0.00  | 28    | 167 Peak    | VERTICAL  |
| 2 | 2466.36 | 93.92  |        |        | 62.97 | 2.90         | 28.05  | 0.00  | 28    | 167 Average | VERTICAL  |
| 3 | 2483.50 | 50.21  | 54.00  | -3.79  | 19.28 | 2.91         | 28.02  | 0.00  | 28    | 167 Average | VERTICAL  |
| 4 | 2483.67 | 63.24  | 74.00  | -10.76 | 32.31 | 2.91         | 28.02  | 0.00  | 28    | 167 Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2467 MHz.

### Channel 13

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2471.20 | 100.92 |        |        | 69.99 | 2.91         | 28.02  | 0.00  | 355   | 175 Peak    | VERTICAL  |
| 2 | 2471.20 | 90.82  |        |        | 59.89 | 2.91         | 28.02  | 0.00  | 355   | 175 Average | VERTICAL  |
| 3 | 2483.50 | 53.02  | 54.00  | -0.98  | 22.09 | 2.91         | 28.02  | 0.00  | 355   | 175 Average | VERTICAL  |
| 4 | 2483.70 | 62.73  | 74.00  | -11.27 | 31.80 | 2.91         | 28.02  | 0.00  | 355   | 175 Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2472 MHz.

Note: Both antenna polarizations have been tested and only the worst case was recorded in test report.

|               |               |                |                                                          |
|---------------|---------------|----------------|----------------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                      |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT40 CH 3, 6, 9 /<br>Chain 1 + Chain 2 |
| Test date     | Jul. 16, 2015 |                |                                                          |

### Channel 3

|   | Freq    | Level  | Limit  | Over  | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2380.65 | 67.48  | 74.00  | -6.52 | 36.46 | 2.85         | 28.17  | 0.00  | 192   | 132 Peak    | VERTICAL  |
| 2 | 2382.90 | 53.84  | 54.00  | -0.16 | 22.82 | 2.85         | 28.17  | 0.00  | 192   | 132 Average | VERTICAL  |
| 3 | 2422.96 | 93.32  |        |       | 62.34 | 2.88         | 28.10  | 0.00  | 192   | 132 Average | VERTICAL  |
| 4 | 2423.28 | 102.29 |        |       | 71.31 | 2.88         | 28.10  | 0.00  | 192   | 132 Peak    | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2422 MHz.

### Channel 6

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2388.28 | 61.72  | 74.00  | -12.28 | 30.72 | 2.86         | 28.14  | 0.00  | 218   | 130 Peak    | VERTICAL  |
| 2 | 2390.00 | 51.59  | 54.00  | -2.41  | 20.59 | 2.86         | 28.14  | 0.00  | 218   | 130 Average | VERTICAL  |
| 3 | 2435.08 | 102.91 |        |        | 71.93 | 2.88         | 28.10  | 0.00  | 218   | 130 Peak    | VERTICAL  |
| 4 | 2435.08 | 93.46  |        |        | 62.48 | 2.88         | 28.10  | 0.00  | 218   | 130 Average | VERTICAL  |
| 5 | 2483.50 | 49.49  | 54.00  | -4.51  | 18.56 | 2.91         | 28.02  | 0.00  | 218   | 130 Average | VERTICAL  |
| 6 | 2487.64 | 60.21  | 74.00  | -13.79 | 29.29 | 2.92         | 28.00  | 0.00  | 218   | 130 Peak    | VERTICAL  |

Item 3, 4 are the fundamental frequency at 2437 MHz.

### Channel 9

|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2450.40 | 93.37  |        |        | 62.41 | 2.89         | 28.07  | 0.00  | 122   | 128 Average | VERTICAL  |
| 2 | 2453.28 | 103.03 |        |        | 72.07 | 2.89         | 28.07  | 0.00  | 122   | 128 Peak    | VERTICAL  |
| 3 | 2492.39 | 62.75  | 74.00  | -11.25 | 31.83 | 2.92         | 28.00  | 0.00  | 122   | 128 Peak    | VERTICAL  |
| 4 | 2495.27 | 52.13  | 54.00  | -1.87  | 21.21 | 2.92         | 28.00  | 0.00  | 122   | 128 Average | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note: Both antenna polarizations have been tested and only the worst case was recorded in test report.

|               |               |                |                                                         |
|---------------|---------------|----------------|---------------------------------------------------------|
| Temperature   | 22°C          | Humidity       | 64%                                                     |
| Test Engineer | Magic Lai     | Configurations | IEEE 802.11n MCS0 HT40 CH 10, 11 /<br>Chain 1 + Chain 2 |
| Test date     | Jul. 16, 2015 |                |                                                         |

#### Channel 10

|   | Freq    | Level  | Limit  | Over  | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|-------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB    | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2445.14 | 102.12 |        |       | 71.16 | 2.89         | 28.07  | 0.00  | 135   | 102 Peak    | VERTICAL  |
| 2 | 2445.14 | 92.22  |        |       | 61.26 | 2.89         | 28.07  | 0.00  | 135   | 102 Average | VERTICAL  |
| 3 | 2499.31 | 65.21  | 74.00  | -8.79 | 34.29 | 2.92         | 28.00  | 0.00  | 135   | 102 Peak    | VERTICAL  |
| 4 | 2499.63 | 51.91  | 54.00  | -2.09 | 20.99 | 2.92         | 28.00  | 0.00  | 135   | 102 Average | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2457 MHz.

#### Channel 11


|   | Freq    | Level  | Limit  | Over   | Read  | CableAntenna | Preamp | T/Pos | A/Pos | Remark      | Pol/Phase |
|---|---------|--------|--------|--------|-------|--------------|--------|-------|-------|-------------|-----------|
|   | MHz     | dBuV/m | dBuV/m | dB     | dBuV  | dB           | dB/m   | dB    | deg   | cm          |           |
| 1 | 2450.14 | 84.78  |        |        | 53.82 | 2.89         | 28.07  | 0.00  | 137   | 104 Average | VERTICAL  |
| 2 | 2460.40 | 94.02  |        |        | 63.07 | 2.90         | 28.05  | 0.00  | 137   | 104 Peak    | VERTICAL  |
| 3 | 2484.76 | 51.52  | 54.00  | -2.48  | 20.59 | 2.91         | 28.02  | 0.00  | 137   | 104 Average | VERTICAL  |
| 4 | 2485.40 | 61.18  | 74.00  | -12.82 | 30.25 | 2.91         | 28.02  | 0.00  | 137   | 104 Peak    | VERTICAL  |

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note: Both antenna polarizations have been tested and only the worst case was recorded in test report.


For Emission not in Restricted Band

Plot on Configuration IEEE 802.11b / Reference Level (Vertical)

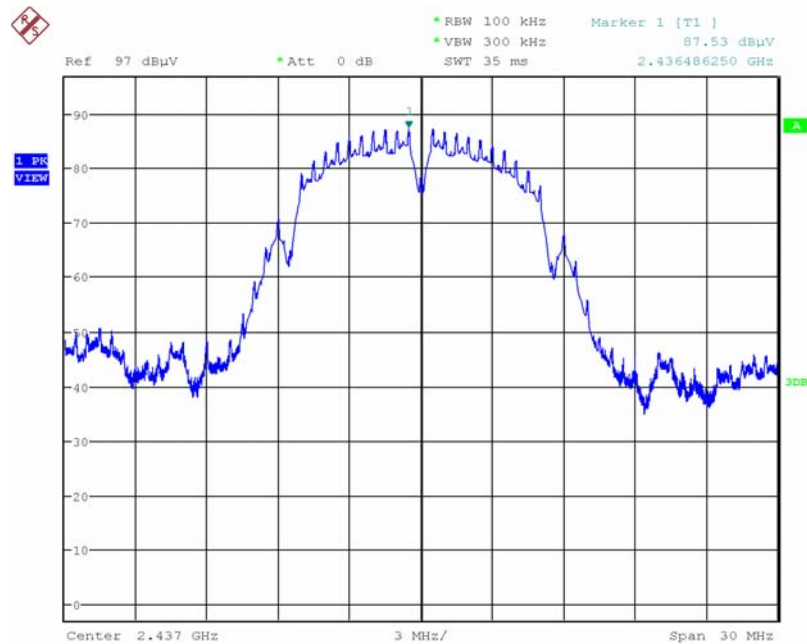

Date: 16.JUL.2015 21:34:03


Plot on Configuration IEEE 802.11b / CH 1 / 30MHz~2400MHz (down 30dBc) (Vertical)

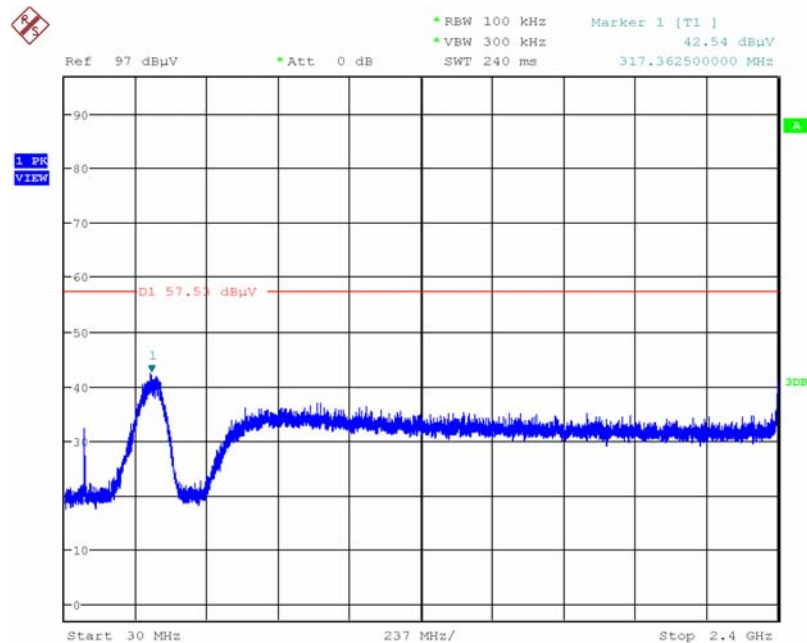

Date: 16.JUL.2015 21:35:32


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11b / CH 1 / 2390MHz~2400MHz (down 30dBc) (Vertical)

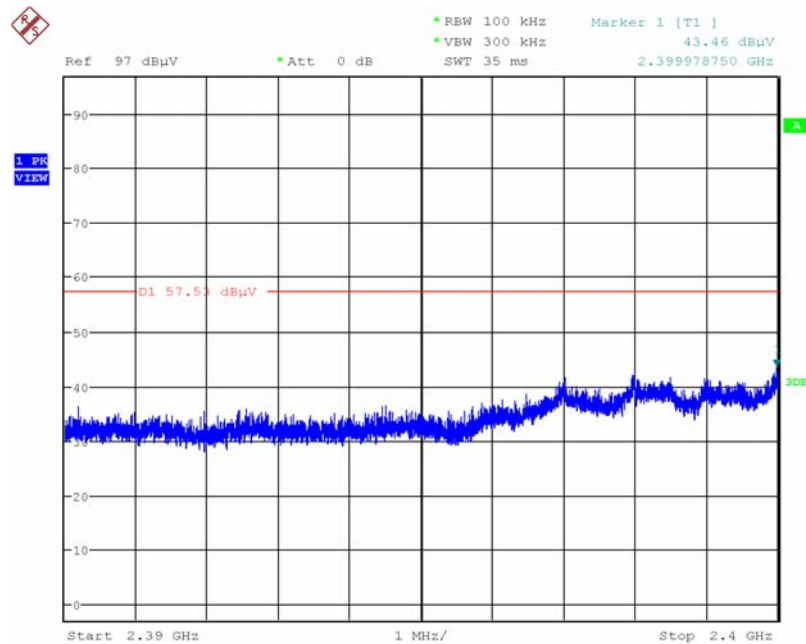

Date: 16.JUL.2015 21:36:43


### Plot on Configuration IEEE 802.11b / CH 1 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

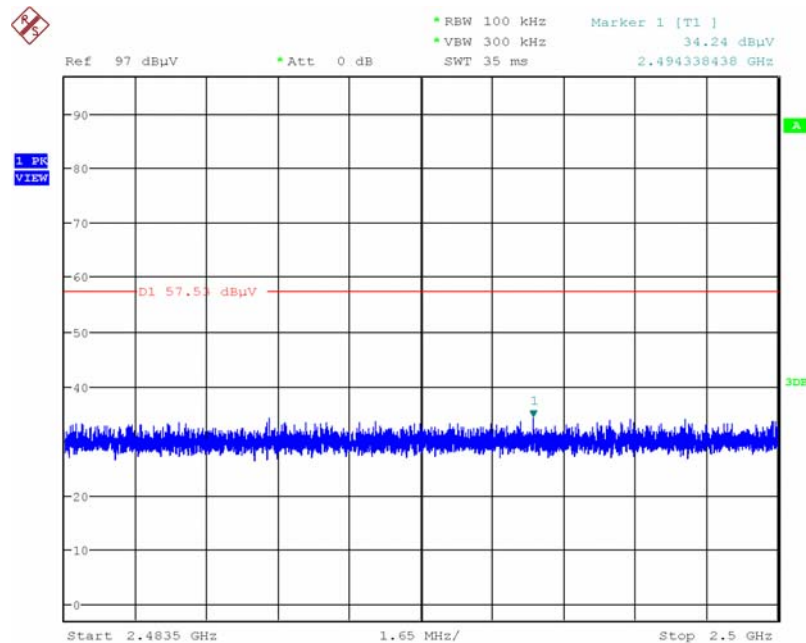

Date: 16.JUL.2015 21:37:24


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11b / CH 1 / 2500MHz~26500MHz (down 30dBc) (Vertical)

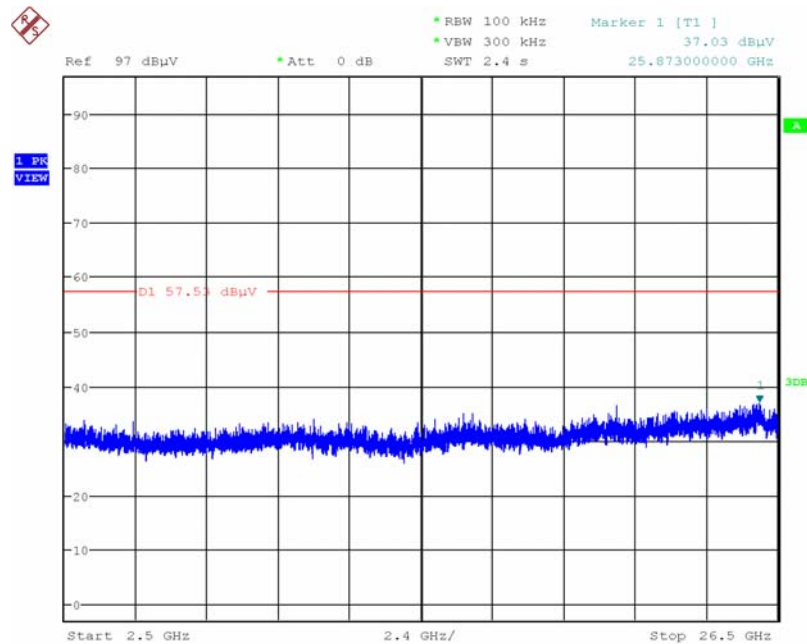

Date: 16.JUL.2015 21:36:01


### Plot on Configuration IEEE 802.11b / CH 11 / 30MHz~2400MHz (down 30dBc) (Vertical)

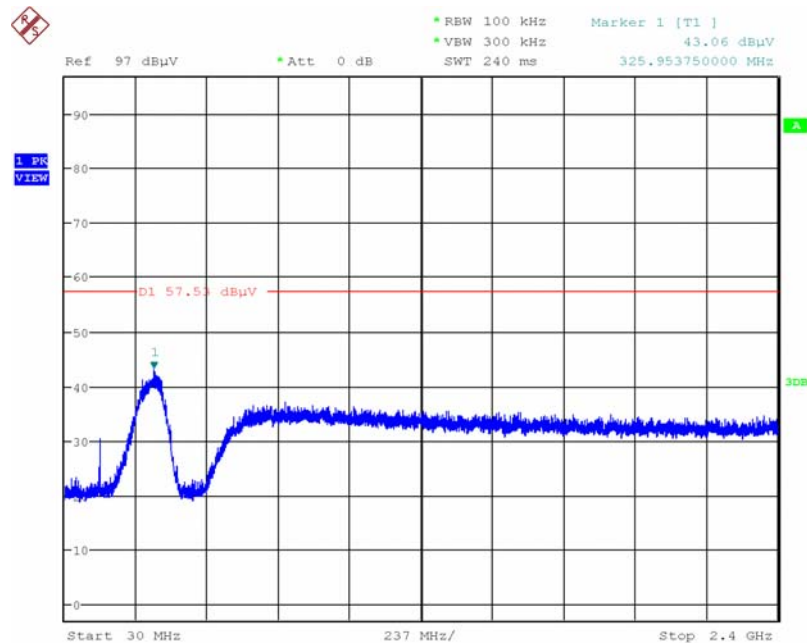

Date: 16.JUL.2015 21:39:33


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11b / CH 11 / 2390MHz~2400MHz (down 30dBc) (Vertical)

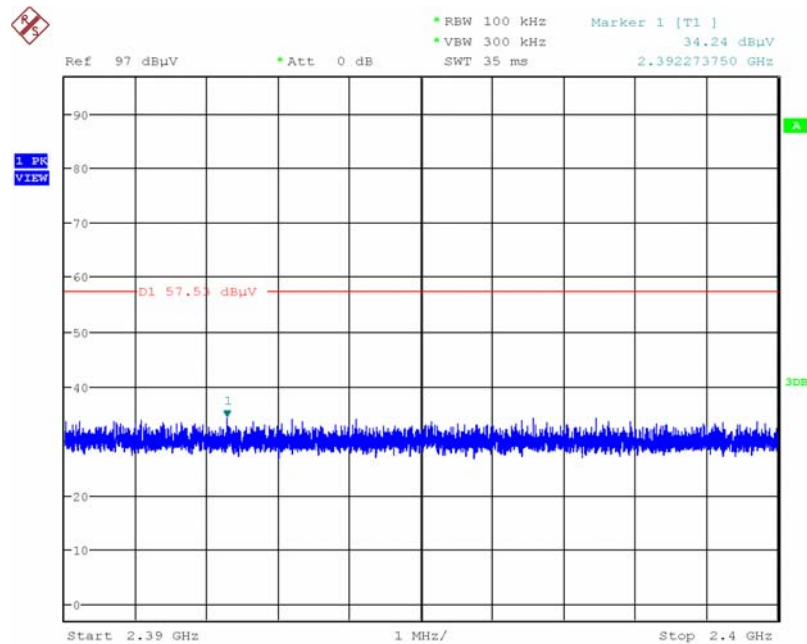

Date: 16.JUL.2015 21:40:33


### Plot on Configuration IEEE 802.11b / CH 11 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

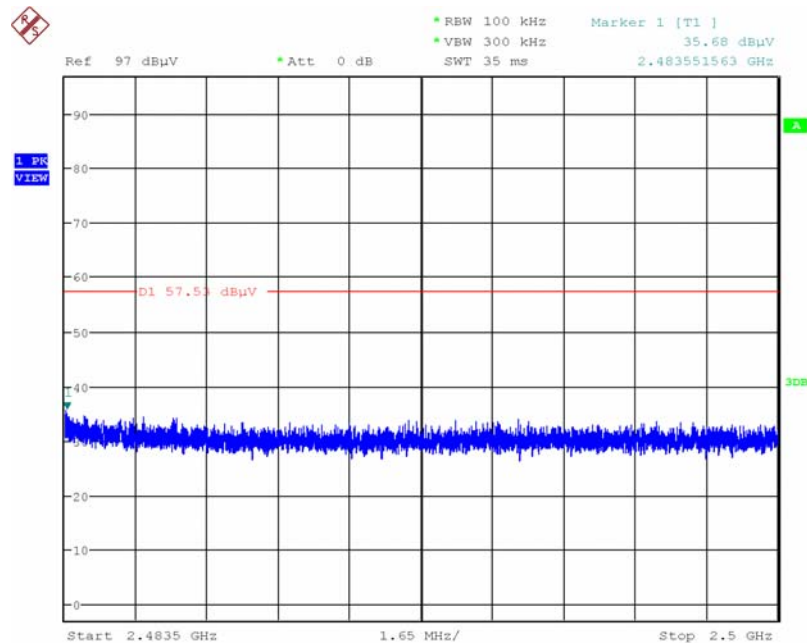

Date: 16.JUL.2015 21:41:03


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11b / CH 11 / 2500MHz~26500MHz (down 30dBc) (Vertical)

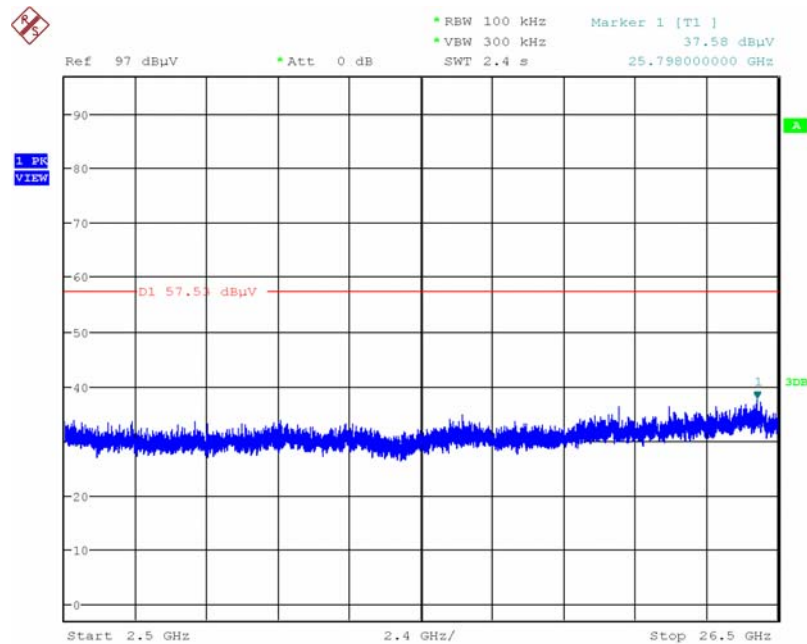

Date: 16.JUL.2015 21:40:04


### Plot on Configuration IEEE 802.11b / CH 12 / 30MHz~2400MHz (down 30dBc) (Vertical)

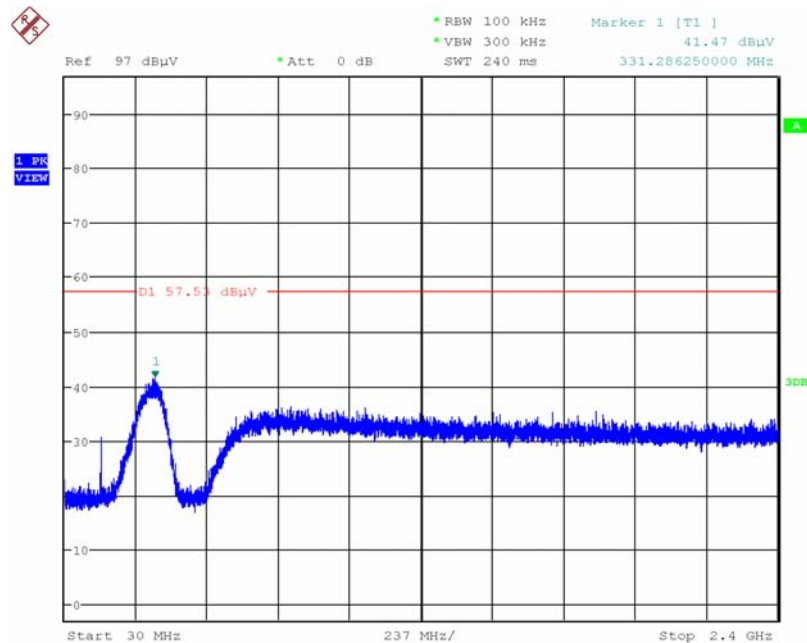

Date: 16.JUL.2015 21:42:08


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11b / CH 12 / 2390MHz~2400MHz (down 30dBc) (Vertical)

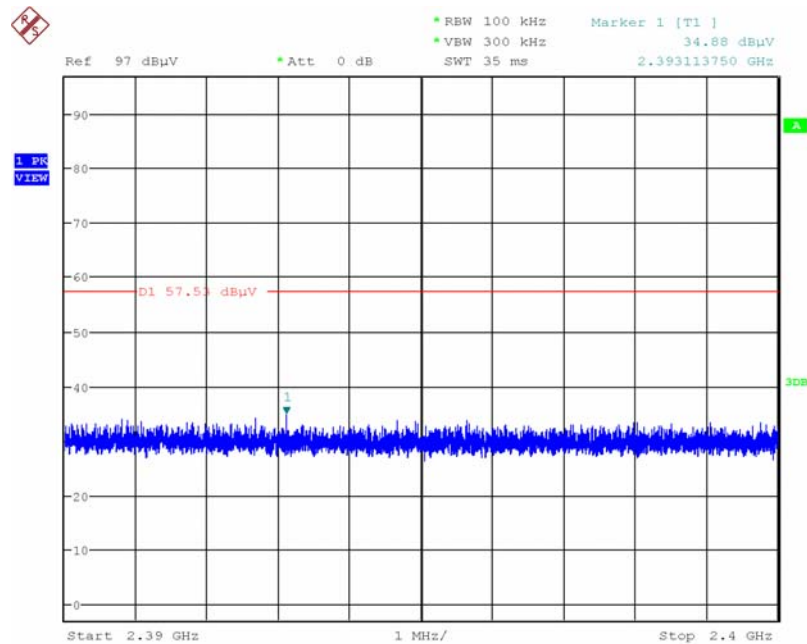

Date: 16.JUL.2015 21:43:10


### Plot on Configuration IEEE 802.11b / CH 12 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

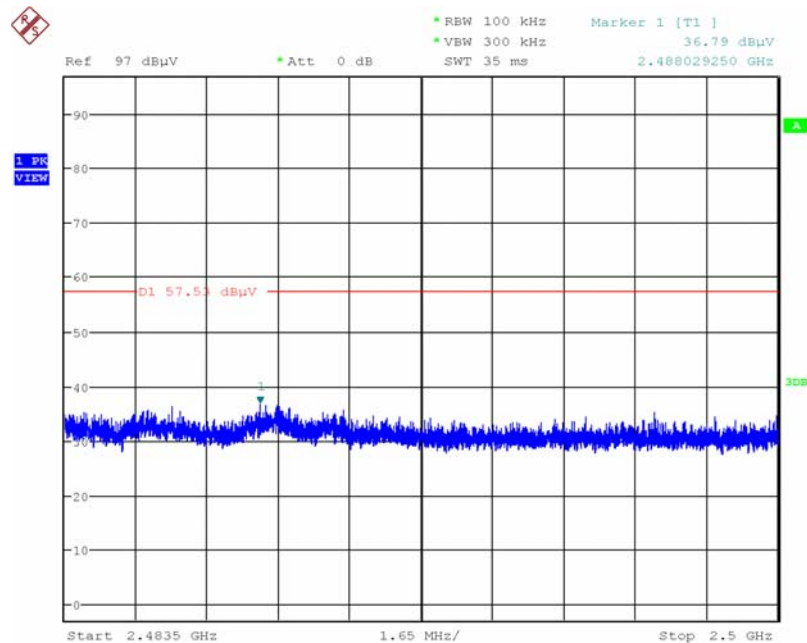

Date: 16.JUL.2015 21:43:42


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11b / CH 12 / 2500MHz~26500MHz (down 30dBc) (Vertical)

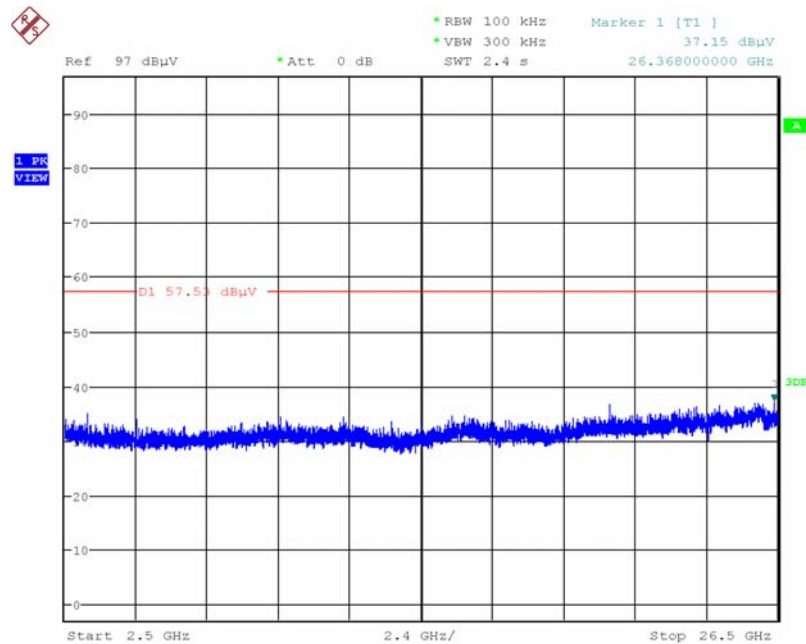

Date: 16.JUL.2015 21:42:43


### Plot on Configuration IEEE 802.11b / CH 13 / 30MHz~2400MHz (down 30dBc) (Vertical)

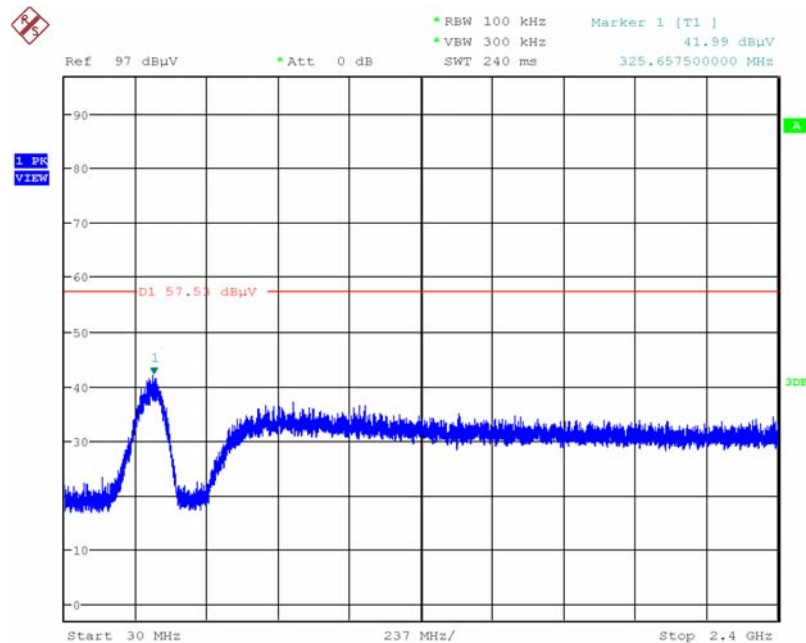

Date: 16.JUL.2015 21:44:34


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11b / CH 13 / 2390MHz~2400MHz (down 30dBc) (Vertical)

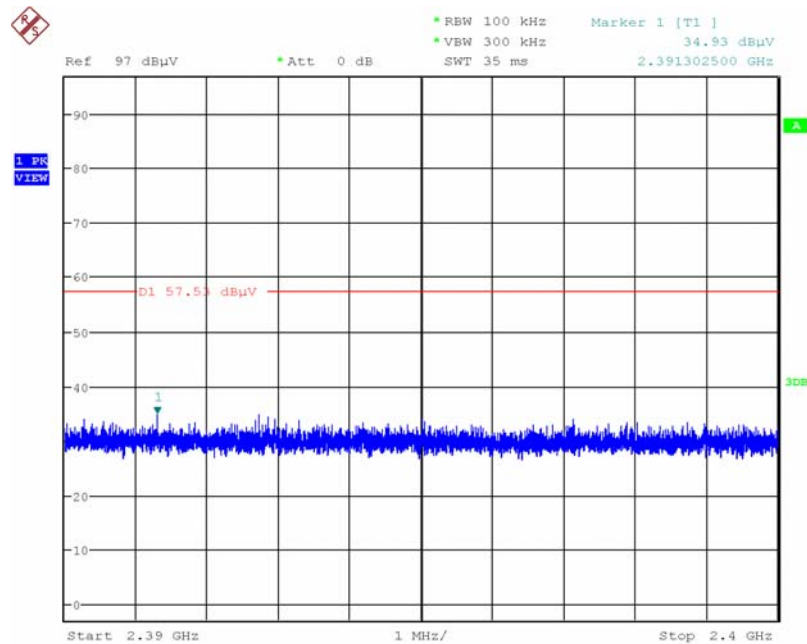

Date: 16.JUL.2015 21:45:32


### Plot on Configuration IEEE 802.11b / CH 13 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

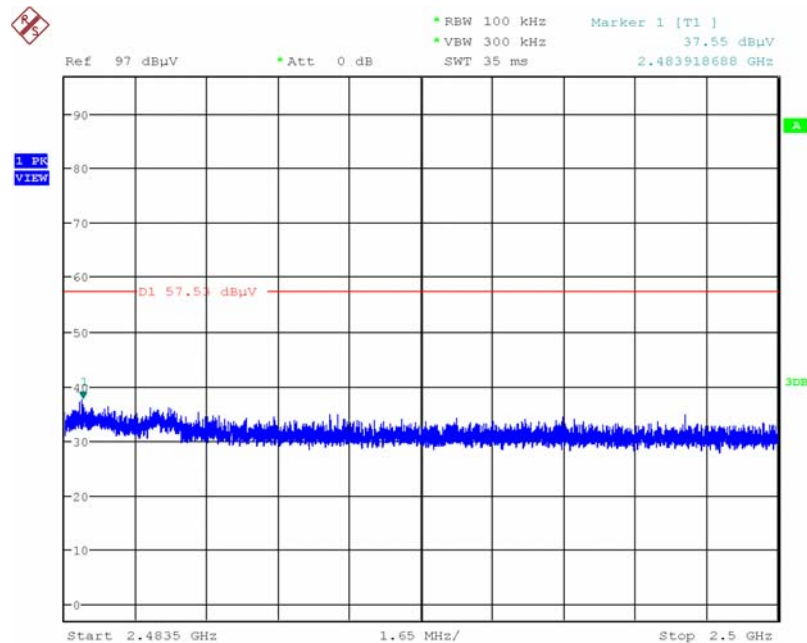

Date: 16.JUL.2015 21:46:04

Note: Only the worse polarization (Vertical) is tested and recorded in test report.


### Plot on Configuration IEEE 802.11b / CH 13 / 2500MHz~26500MHz (down 30dBc) (Vertical)

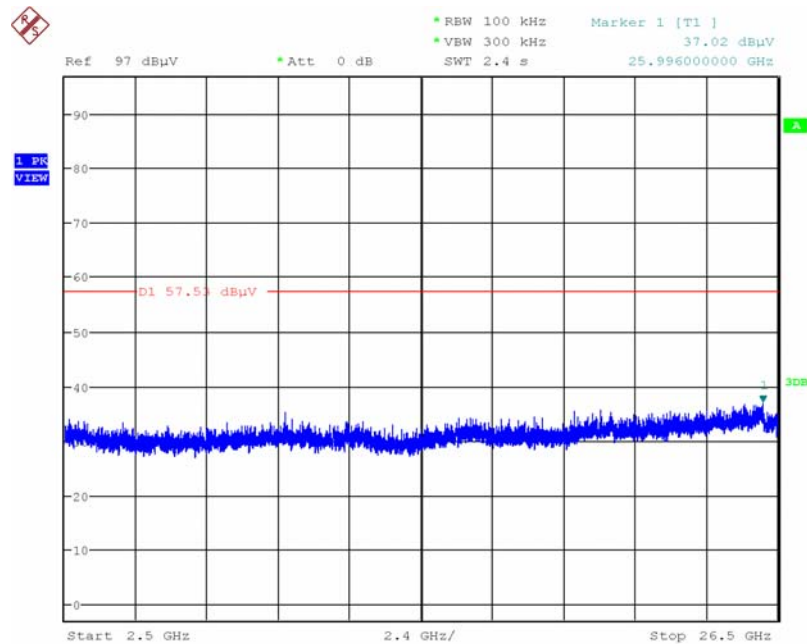

Date: 16.JUL.2015 21:45:05


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11g / Reference Level (Vertical)

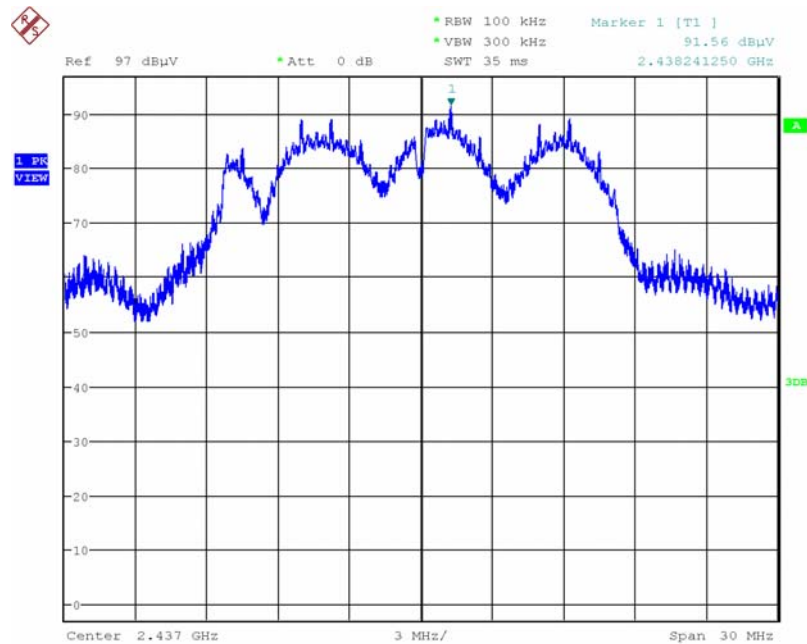

Date: 16.JUL.2015 21:48:13


### Plot on Configuration IEEE 802.11g / CH 1 / 30MHz~2400MHz (down 30dBc) (Vertical)

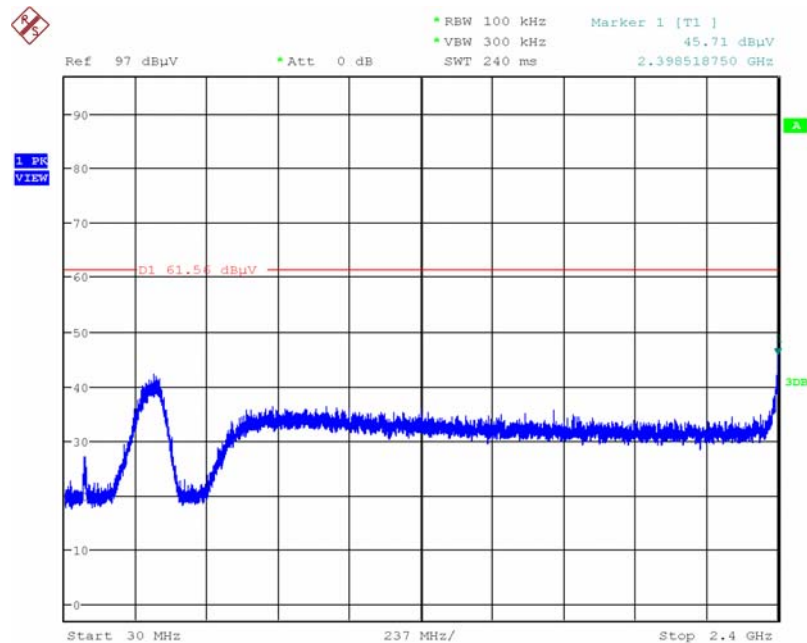

Date: 16.JUL.2015 21:56:36


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11g / CH 1 / 2390MHz~2400MHz (down 30dBc) (Vertical)

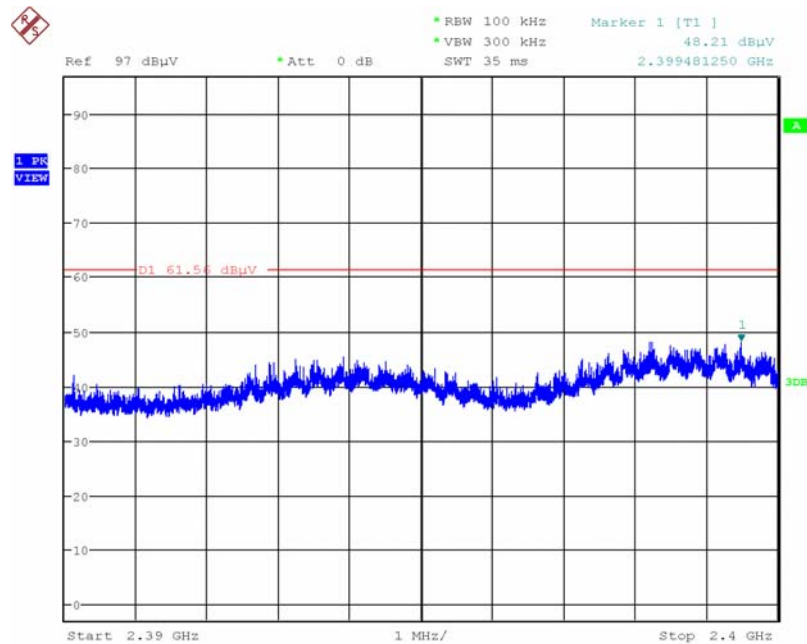

Date: 16.JUL.2015 21:51:26


### Plot on Configuration IEEE 802.11g / CH 1 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

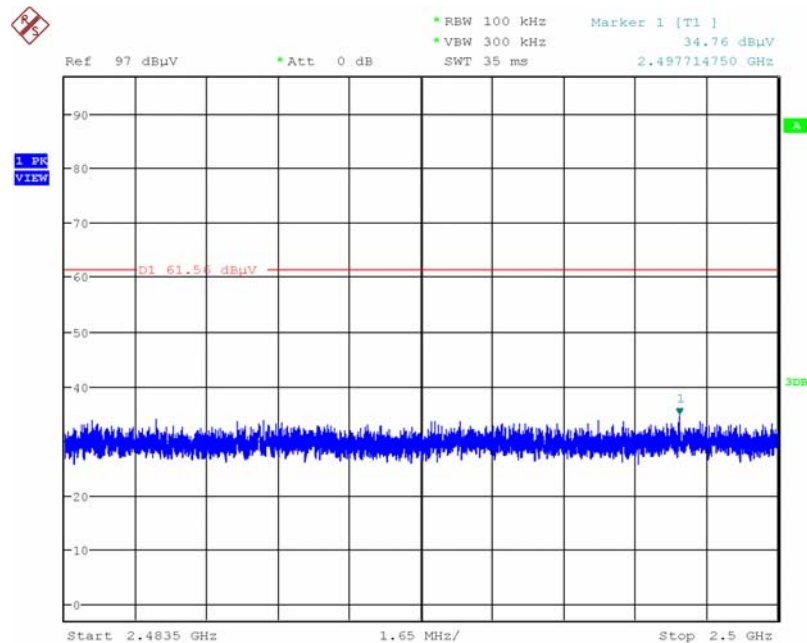

Date: 16.JUL.2015 21:51:53


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11g / CH 1 / 2500MHz~26500MHz (down 30dBc) (Vertical)

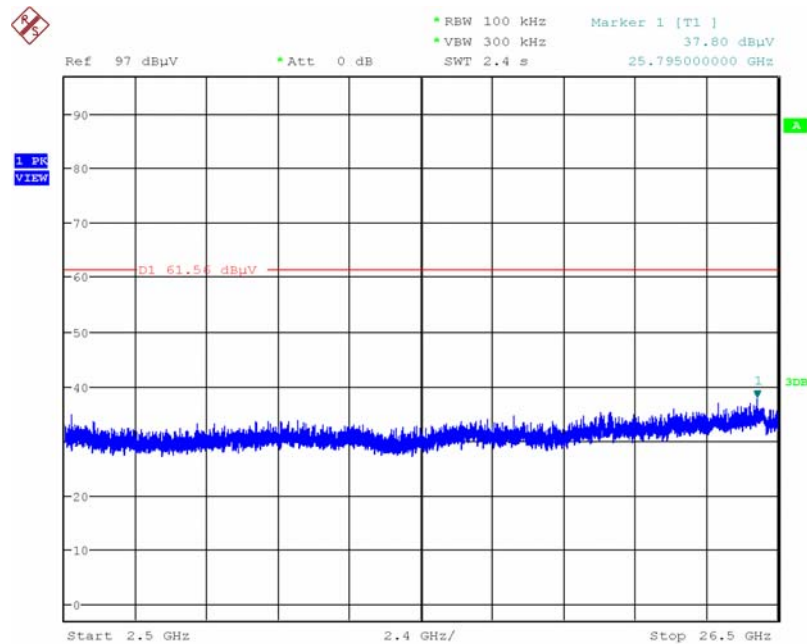

Date: 16.JUL.2015 21:50:40


### Plot on Configuration IEEE 802.11g / CH 11 / 30MHz~2400MHz (down 30dBc) (Vertical)

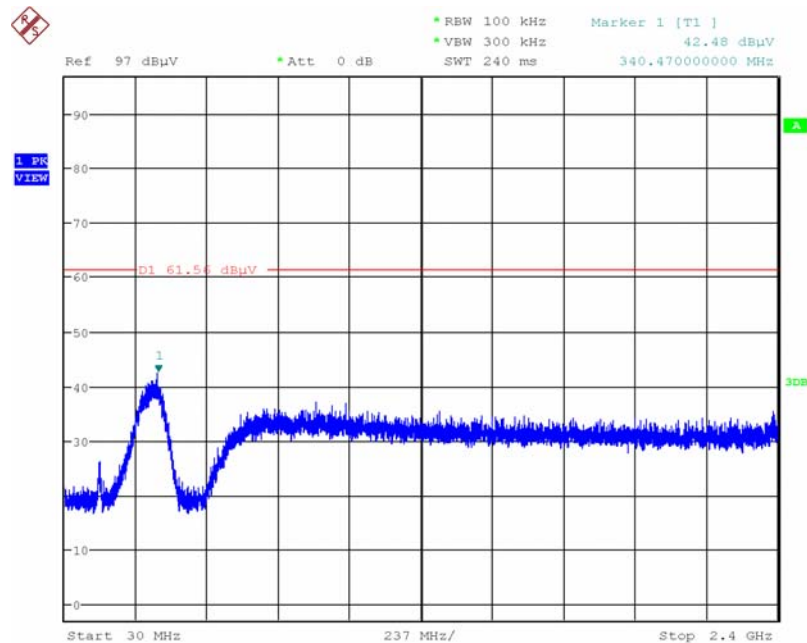

Date: 16.JUL.2015 21:52:36


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11g / CH 11 / 2390MHz~2400MHz (down 30dBc) (Vertical)

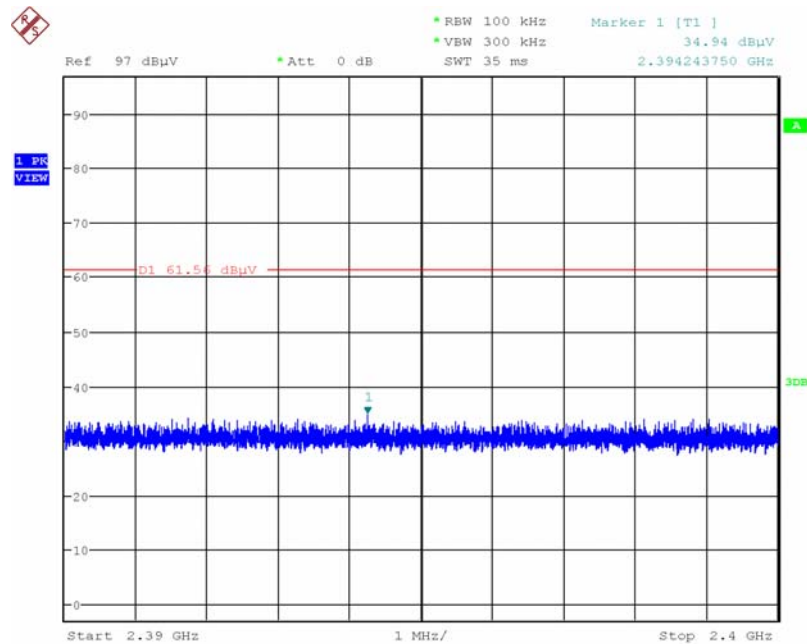

Date: 16.JUL.2015 21:53:33


### Plot on Configuration IEEE 802.11g / CH 11 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

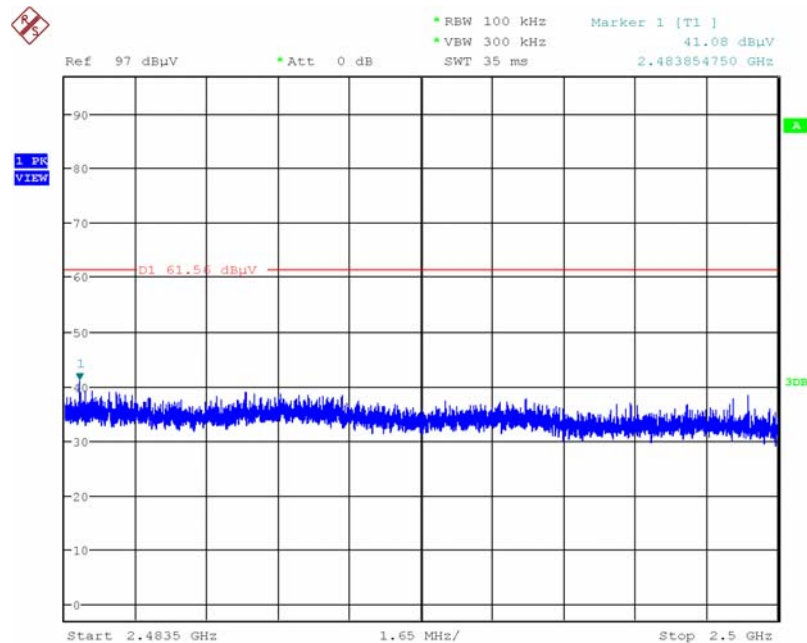

Date: 16.JUL.2015 21:54:18


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11g / CH 11 / 2500MHz~26500MHz (down 30dBc) (Vertical)

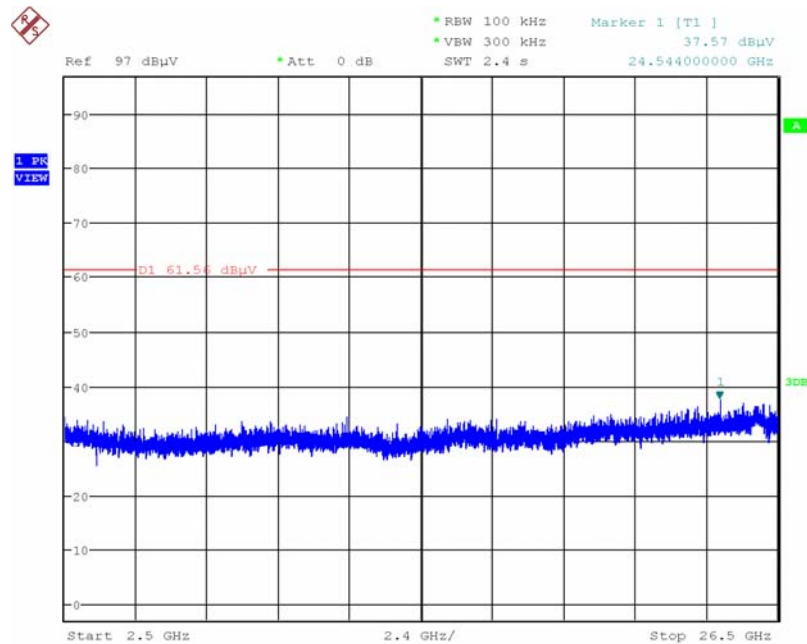

Date: 16.JUL.2015 21:53:06


### Plot on Configuration IEEE 802.11g / CH 12 / 30MHz~2400MHz (down 30dBc) (Vertical)

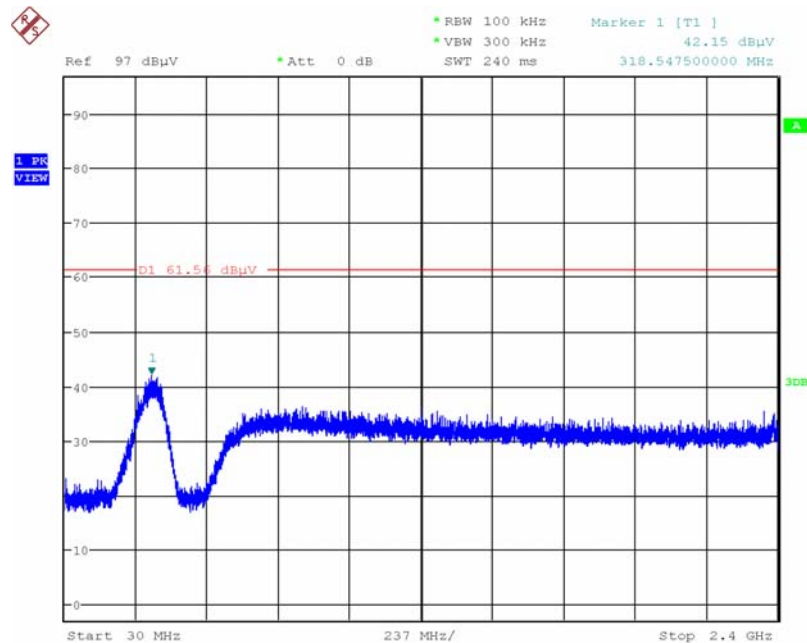

Date: 16.JUL.2015 21:58:57


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11g / CH 12 / 2390MHz~2400MHz (down 30dBc) (Vertical)

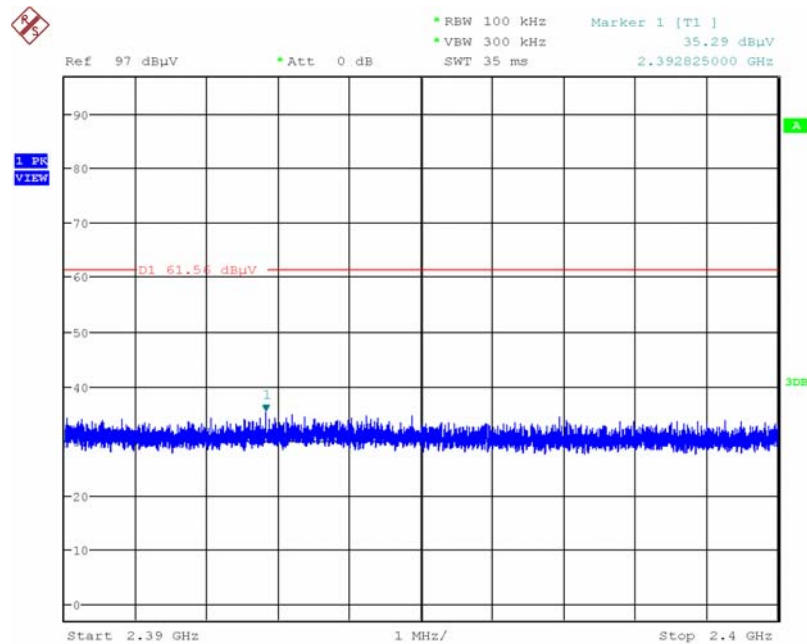

Date: 16.JUL.2015 22:00:00


### Plot on Configuration IEEE 802.11g / CH 12 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

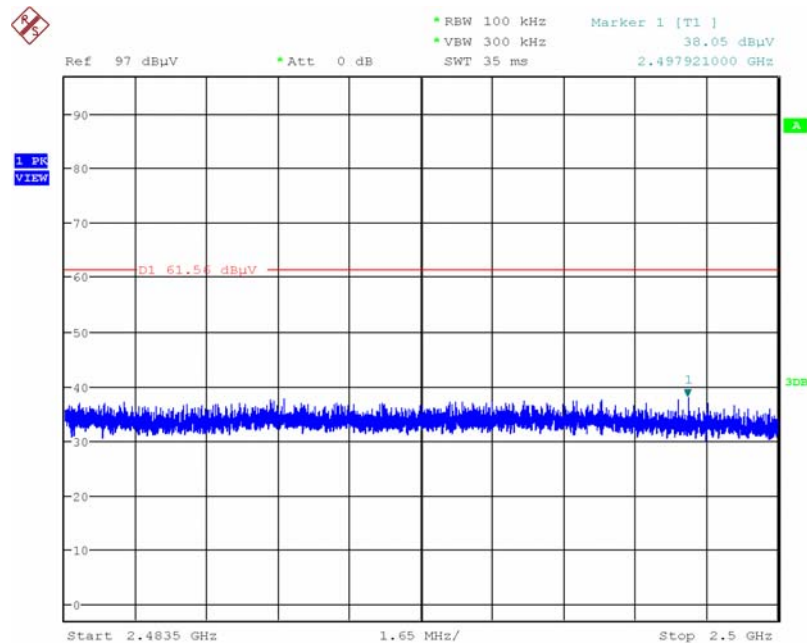

Date: 16.JUL.2015 22:00:30


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11g / CH 12 / 2500MHz~26500MHz (down 30dBc) (Vertical)

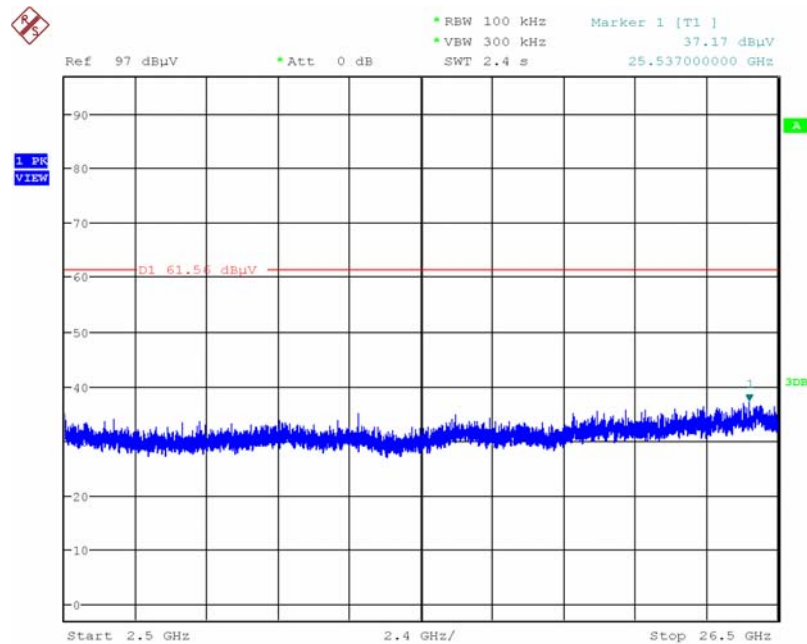

Date: 16.JUL.2015 21:59:26


### Plot on Configuration IEEE 802.11g / CH 13 / 30MHz~2400MHz (down 30dBc) (Vertical)

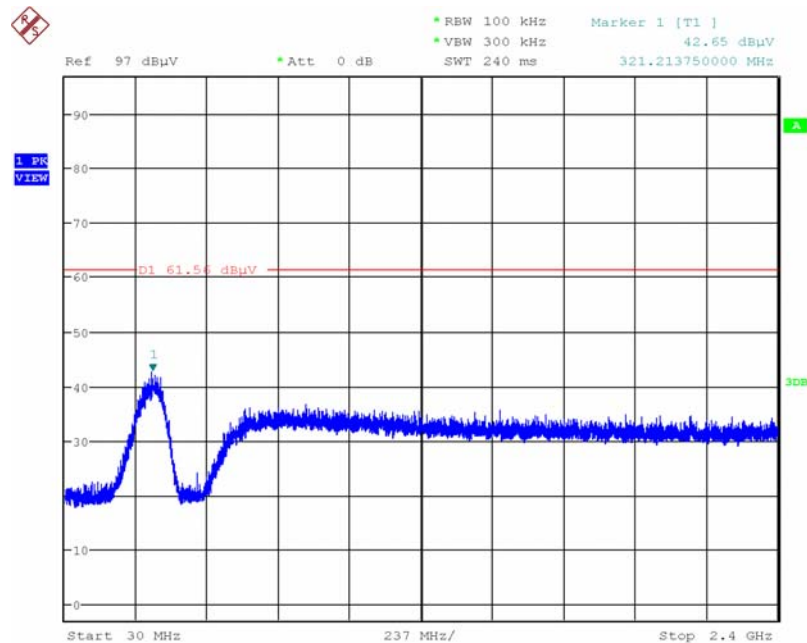

Date: 16.JUL.2015 22:01:27


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11g / CH 13 / 2390MHz~2400MHz (down 30dBc) (Vertical)

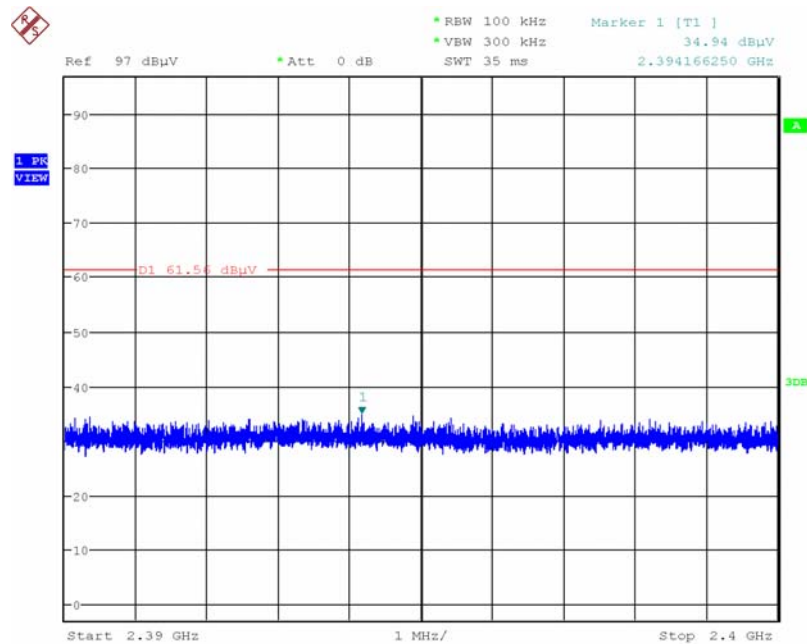

Date: 16.JUL.2015 22:02:35


### Plot on Configuration IEEE 802.11g / CH 13 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

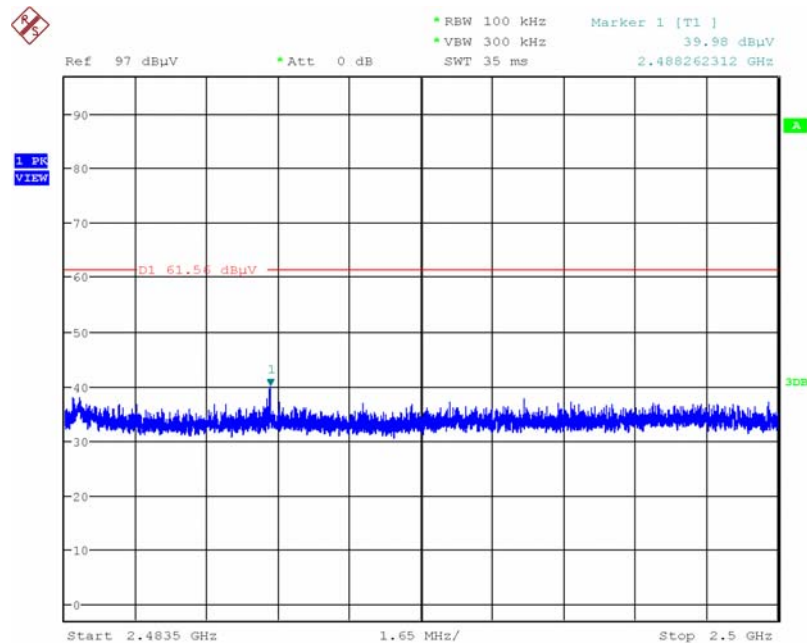

Date: 16.JUL.2015 22:03:14

Note: Only the worse polarization (Vertical) is tested and recorded in test report.


### Plot on Configuration IEEE 802.11g / CH 13 / 2500MHz~26500MHz (down 30dBc) (Vertical)

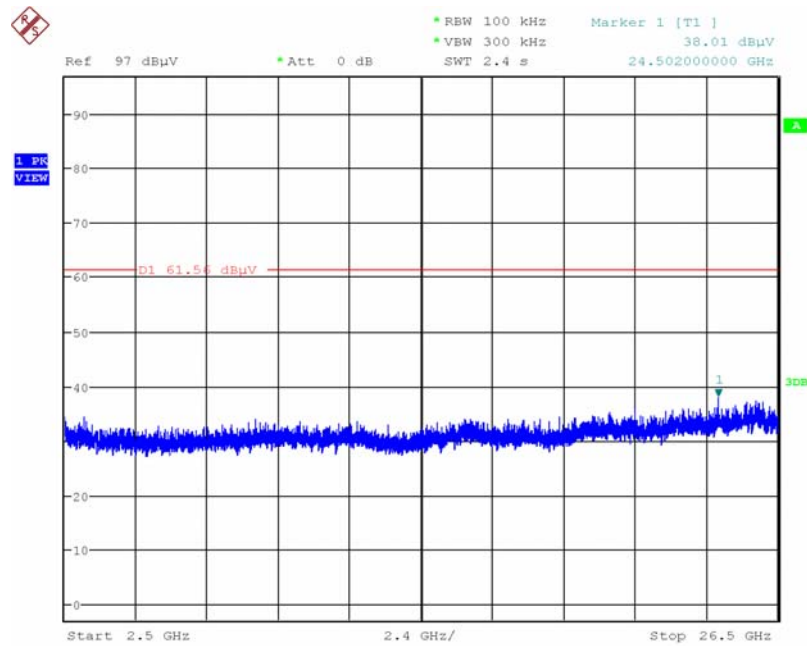

Date: 16.JUL.2015 22:02:00


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level (Vertical)

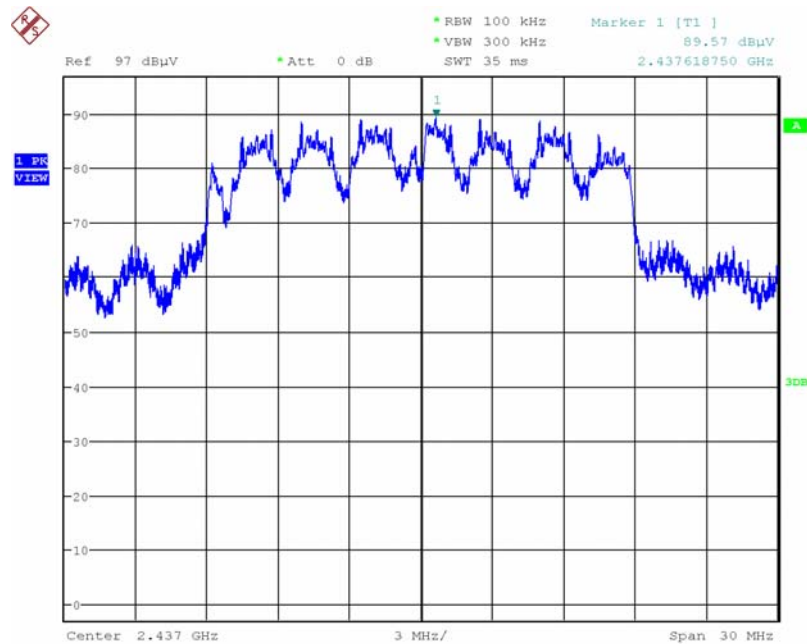

Date: 16.JUL.2015 22:07:58


### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 30MHz~2400MHz (down 30dBc) (Vertical)

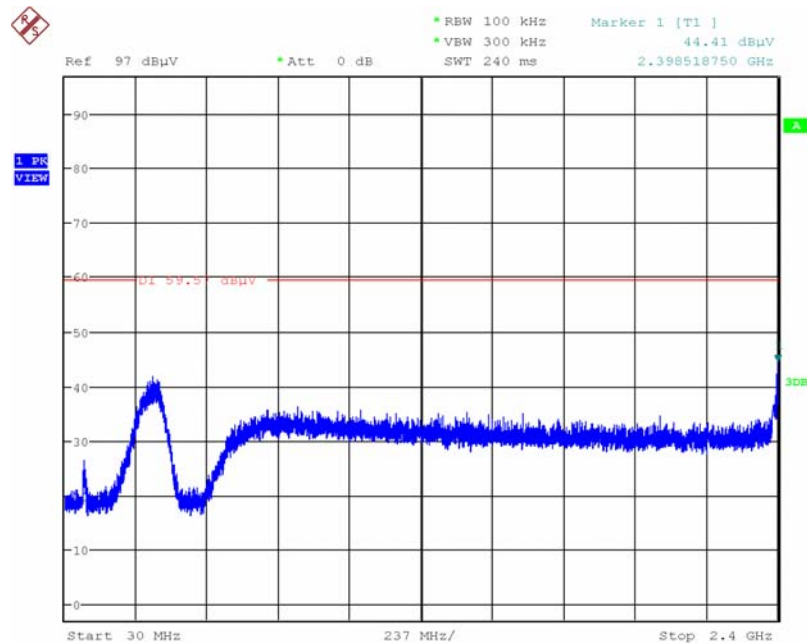

Date: 16.JUL.2015 22:09:01


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2390MHz~2400MHz (down 30dBc) (Vertical)

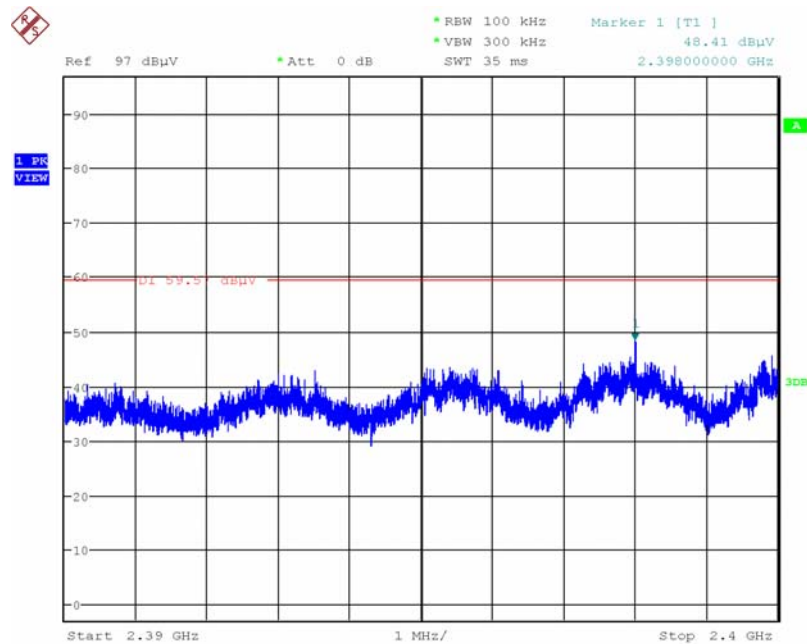

Date: 16.JUL.2015 22:09:53


### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

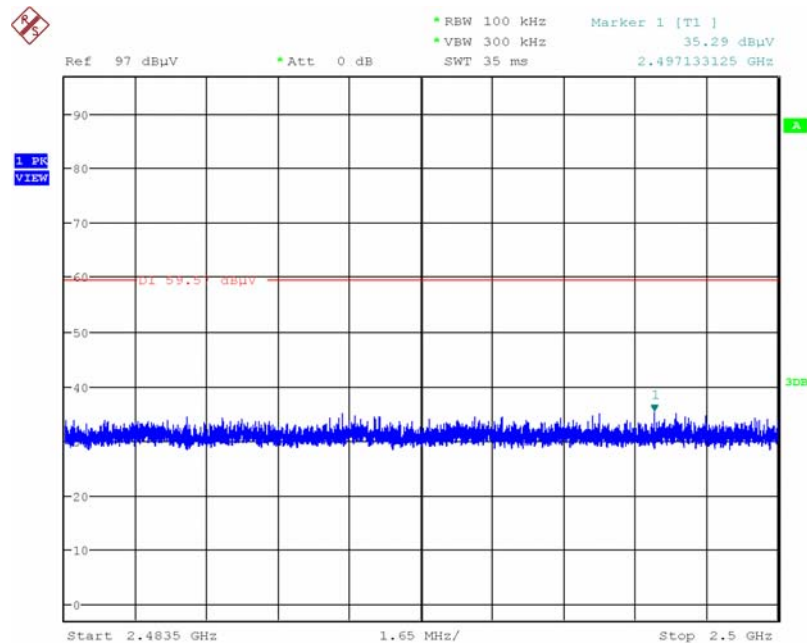

Date: 16.JUL.2015 22:10:56


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 1 / 2500MHz~26500MHz (down 30dBc) (Vertical)

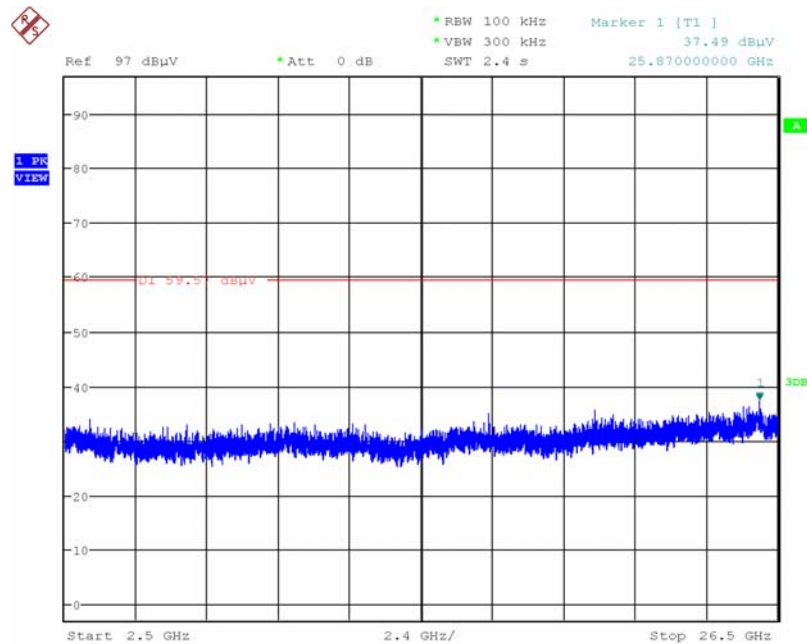

Date: 16.JUL.2015 22:09:28


### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 30MHz~2400MHz (down 30dBc) (Vertical)

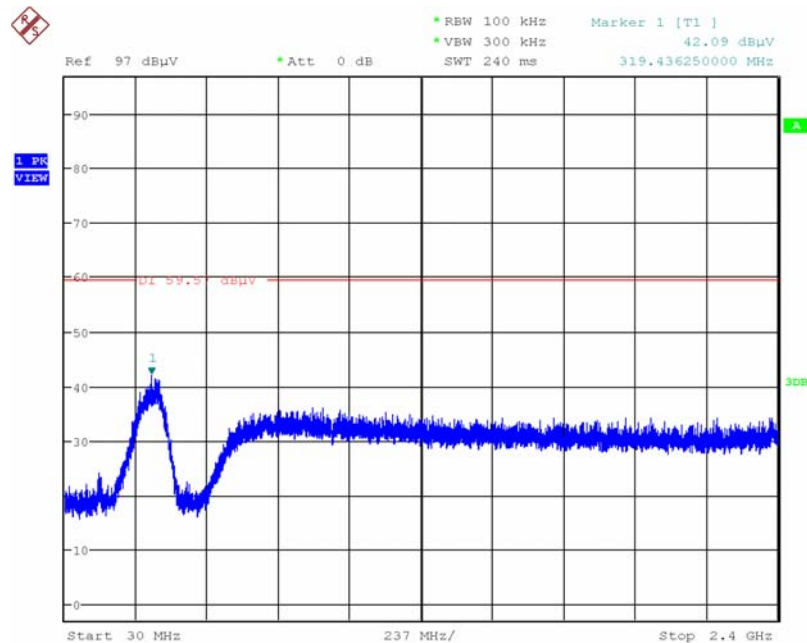

Date: 16.JUL.2015 22:12:17


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2390MHz~2400MHz (down 30dBc) (Vertical)

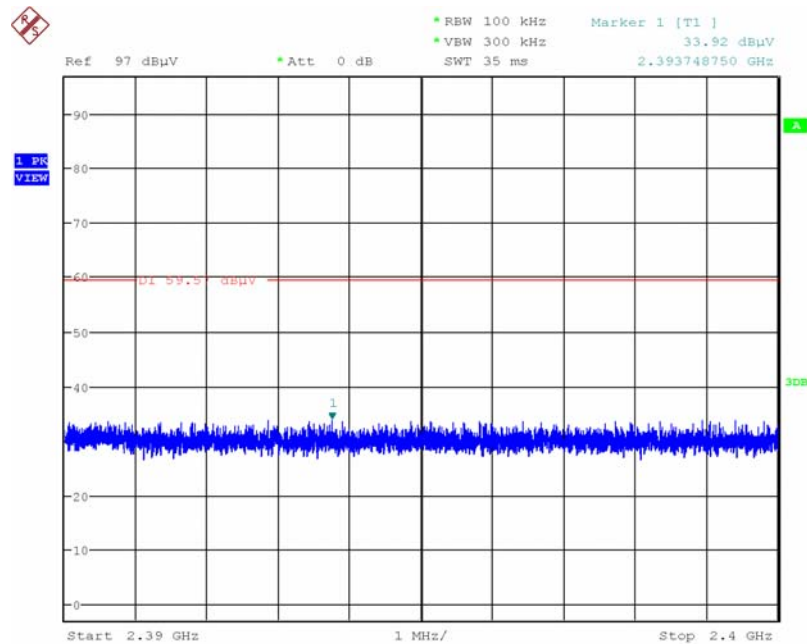

Date: 16.JUL.2015 22:13:07


### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

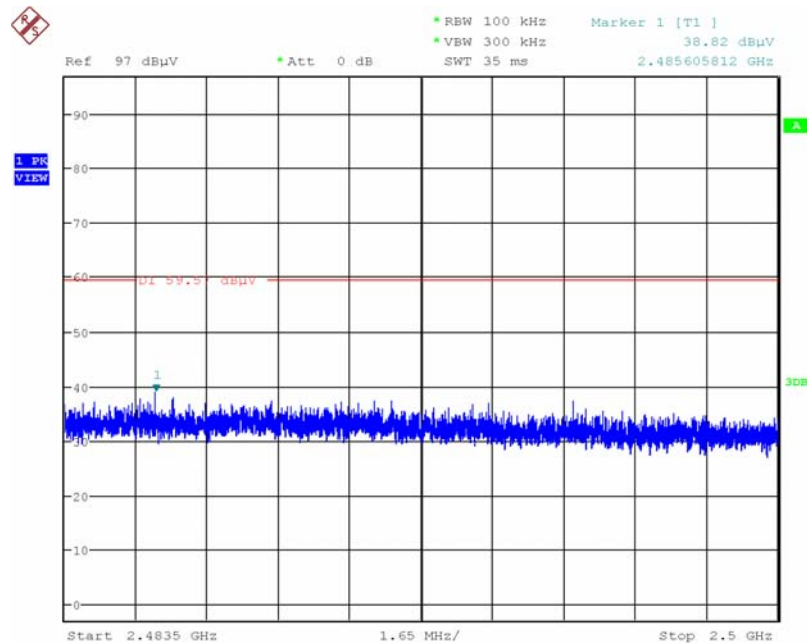

Date: 16.JUL.2015 22:13:28


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 11 / 2500MHz~26500MHz (down 30dBc) (Vertical)

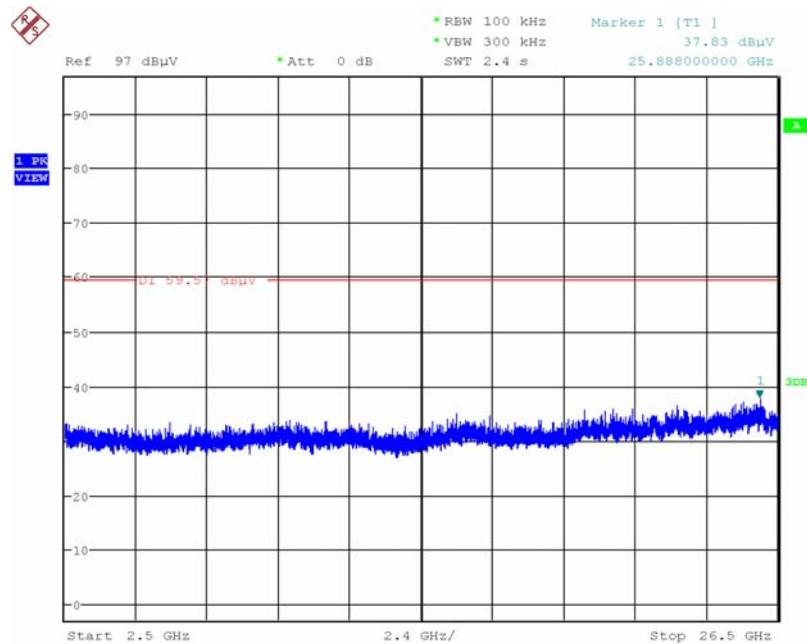

Date: 16.JUL.2015 22:12:46


### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 12 / 30MHz~2400MHz (down 30dBc) (Vertical)

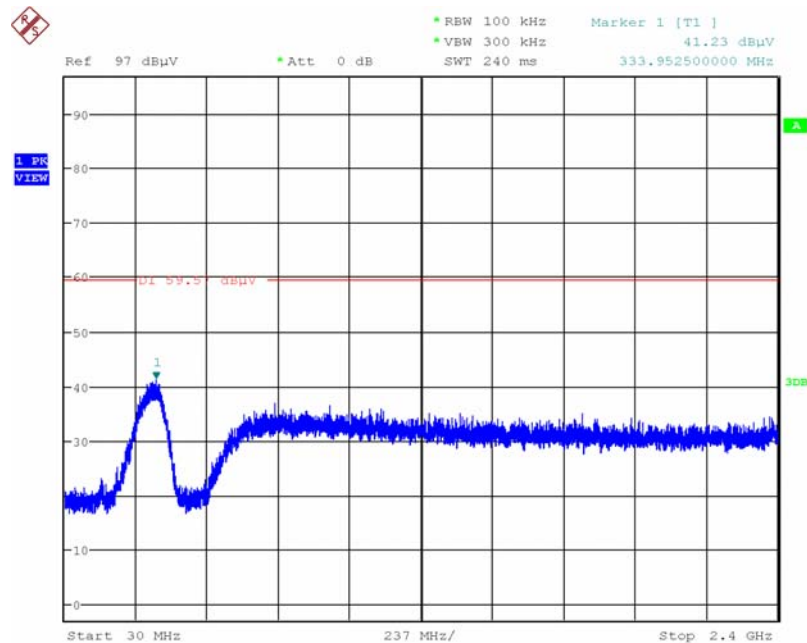

Date: 16.JUL.2015 22:14:09


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 12 / 2390MHz~2400MHz (down 30dBc) (Vertical)

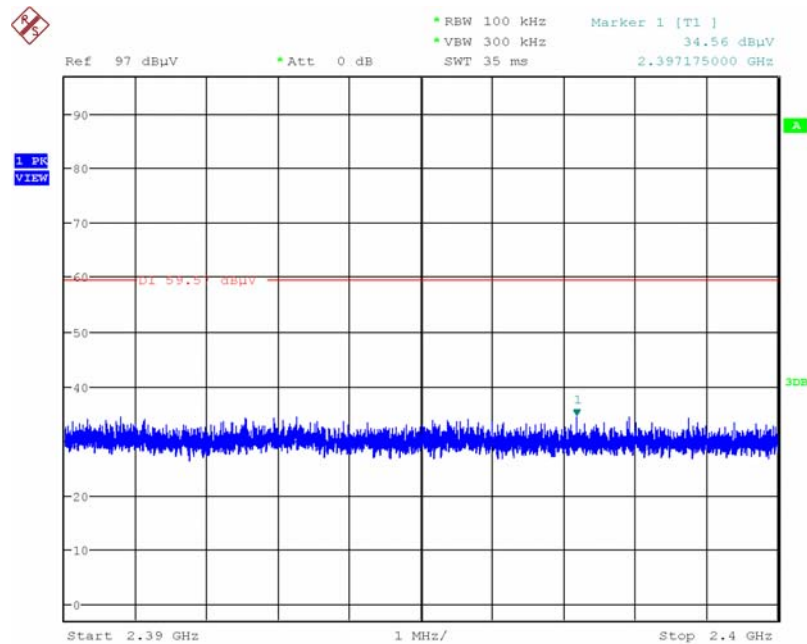

Date: 16.JUL.2015 22:14:51


### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 12 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

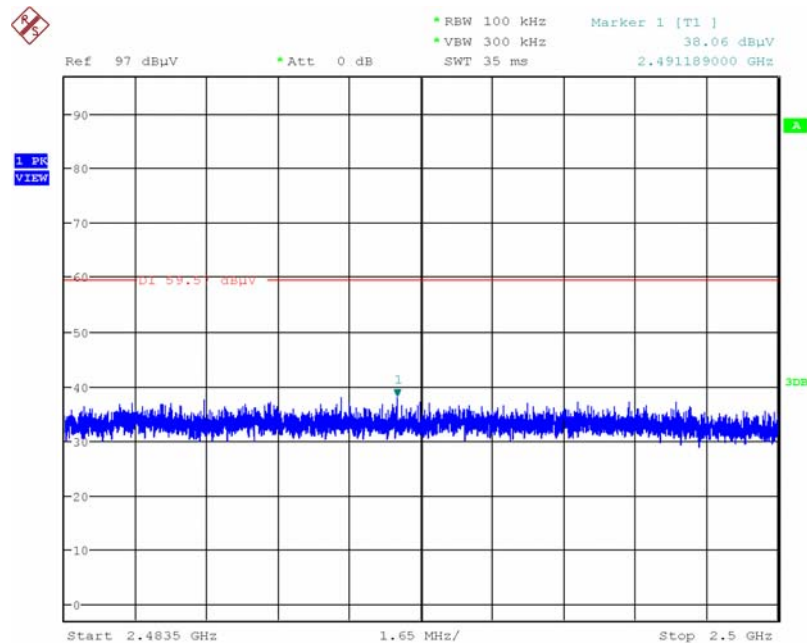

Date: 16.JUL.2015 22:15:11


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 12 / 2500MHz~26500MHz (down 30dBc) (Vertical)

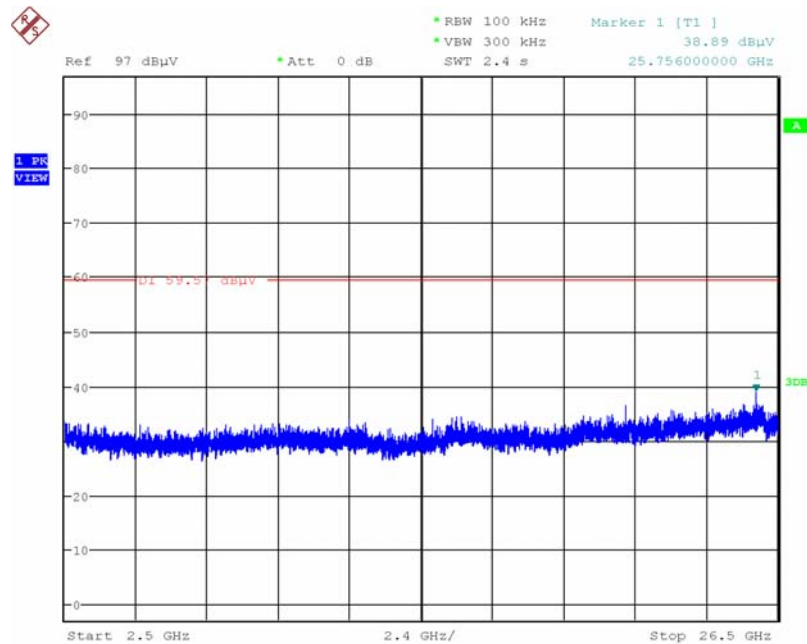

Date: 16.JUL.2015 22:14:31

### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 13 / 30MHz~2400MHz (down 30dBc) (Vertical)

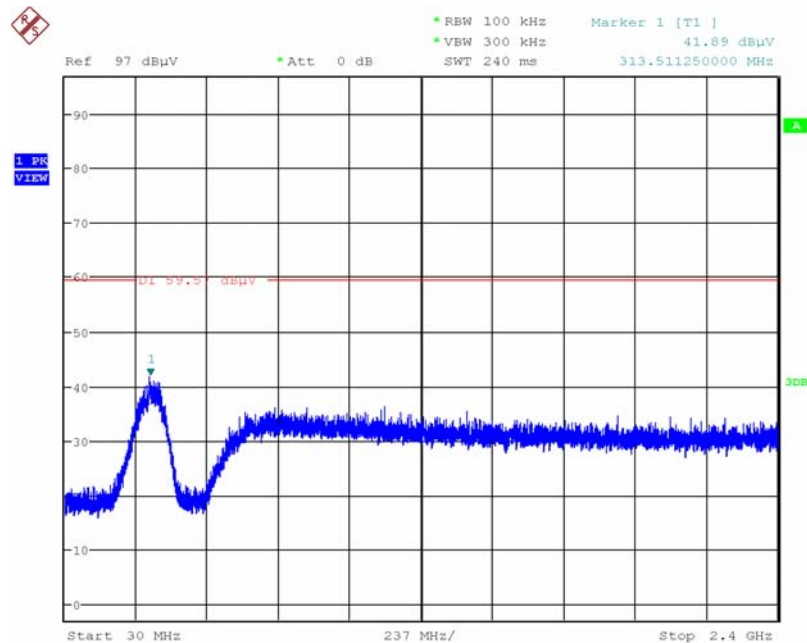

Date: 16.JUL.2015 22:16:00

Note: Only the worse polarization (Vertical) is tested and recorded in test report.



Ref 97 dBuV      \* Att 0 dB      \* RBW 100 kHz      Marker 1 [T1]      35.07 dBuV  
 \* VBW 300 kHz      SWT 35 ms      2.390596250 GHz

1 PK  
VIEW

Start 2.39 GHz      1 MHz/      Stop 2.4 GHz


The screenshot displays a spectrum analyzer window with the following parameters:

- Ref:** 97 dBuV
- \*Att:** 0 dB
- \*RBW:** 100 kHz
- \*VBW:** 300 kHz
- SWT:** 35 ms
- Marker 1 [T1]:** 36.49 dBuV
- Frequency:** 2.496937187 GHz

The plot shows a blue trace representing the signal spectrum, which is highly noisy and centered around -36 dBmV. A red horizontal line indicates a reference level at -60 dBmV. The x-axis ranges from 2.4835 GHz to 2.5 GHz, and the y-axis ranges from 0 to 90 dBmV.

Note: Only the worse polarization (Vertical) is tested and recorded in test report.


# Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 13 / 2500MHz~26500MHz (down 30dBc) (Vertical)

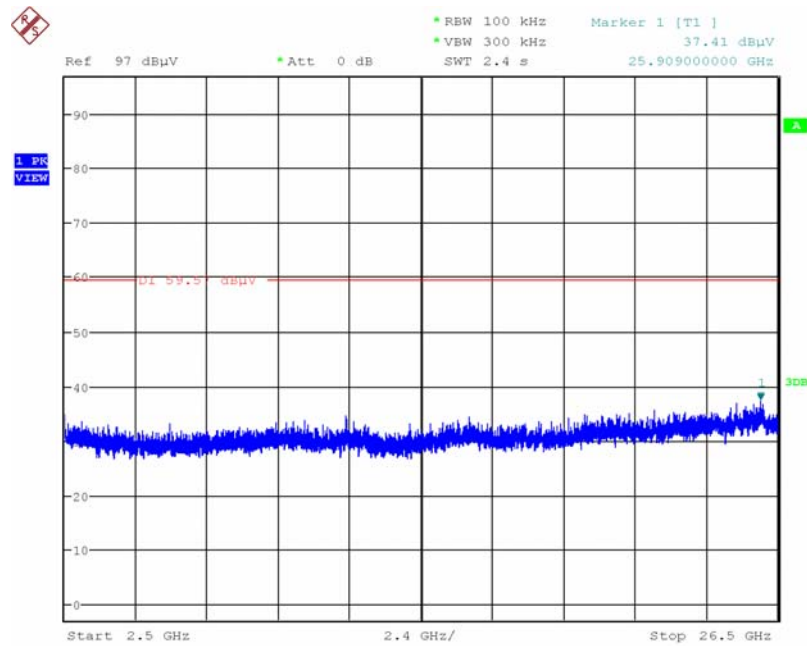

Date: 16.JUL.2015 22:16:24


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level (Vertical)

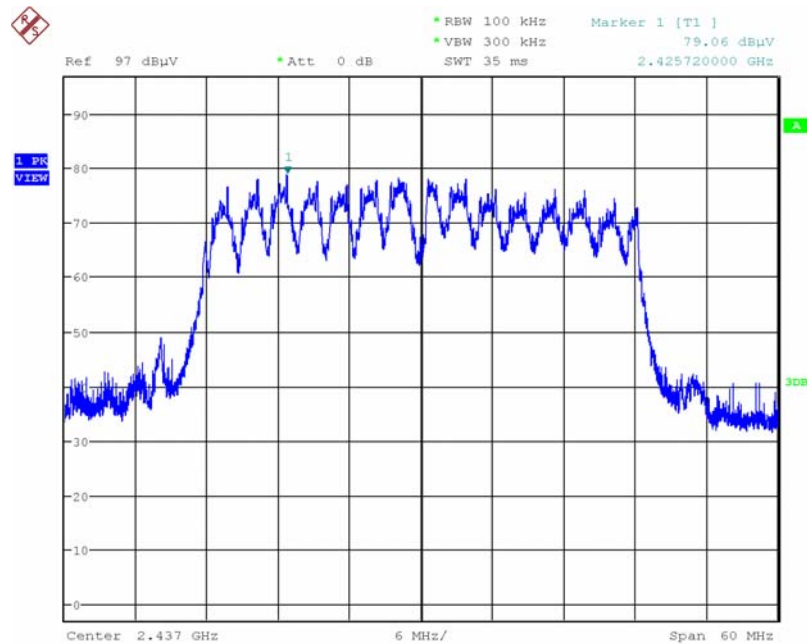

Date: 16.JUL.2015 22:18:54

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 30MHz~2400MHz (down 30dBc) (Vertical)

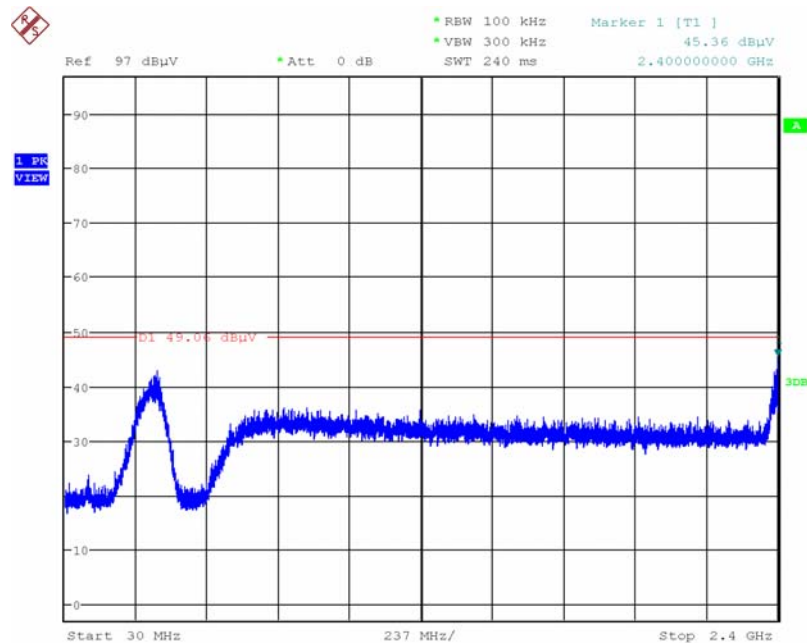

Date: 16.JUL.2015 22:19:59

Note: Only the worse polarization (Vertical) is tested and recorded in test report.



Ref 97 dBuV \* Att 0 dB \* RBW 100 kHz VBW 300 kHz SWT 35 ms Marker 1 [T1] 47.12 dBuV 2.399998750 GHz

1 PK View

49.08 dBmV

Start 2.39 GHz 1 MHz/ Stop 2.4 GHz

Ref 97 dBuV \* Att 0 dB \* RBW 100 kHz VBW 300 kHz SWT 35 ms Marker 1 [T1] 35.33 dBuV 2.496594813 GHz

1 PK View


L1 49.04 dBuV

35.33 dBuV

Start 2.4835 GHz 1.65 MHz/ Stop 2.5 GHz


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 3 / 2500MHz~26500MHz (down 30dBc) (Vertical)

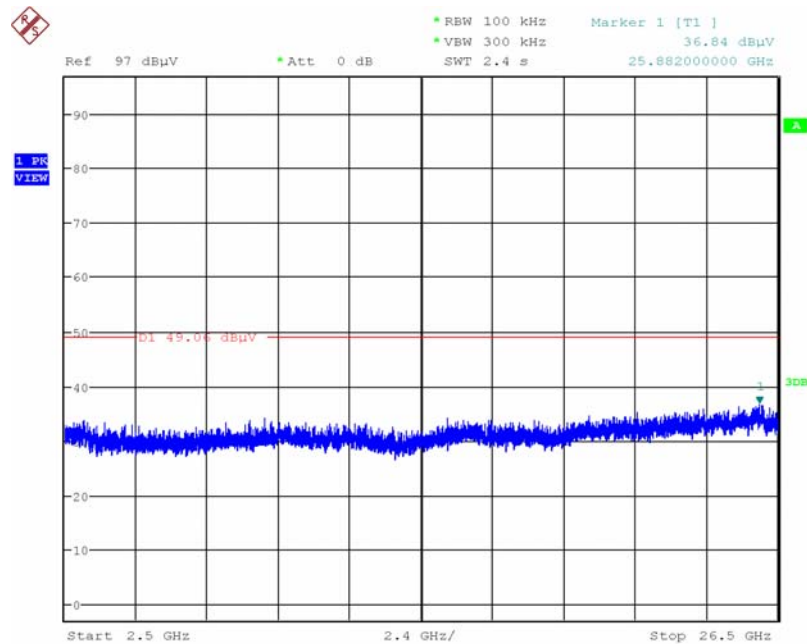

Date: 16.JUL.2015 22:22:09


### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 30MHz~2400MHz (down 30dBc) (Vertical)

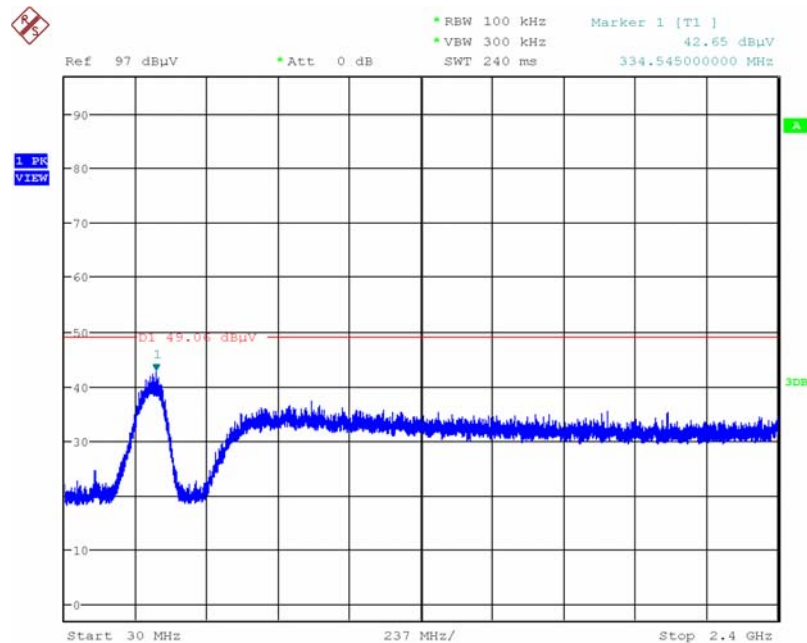

Date: 16.JUL.2015 22:25:53


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2390MHz~2400MHz (down 30dBc) (Vertical)

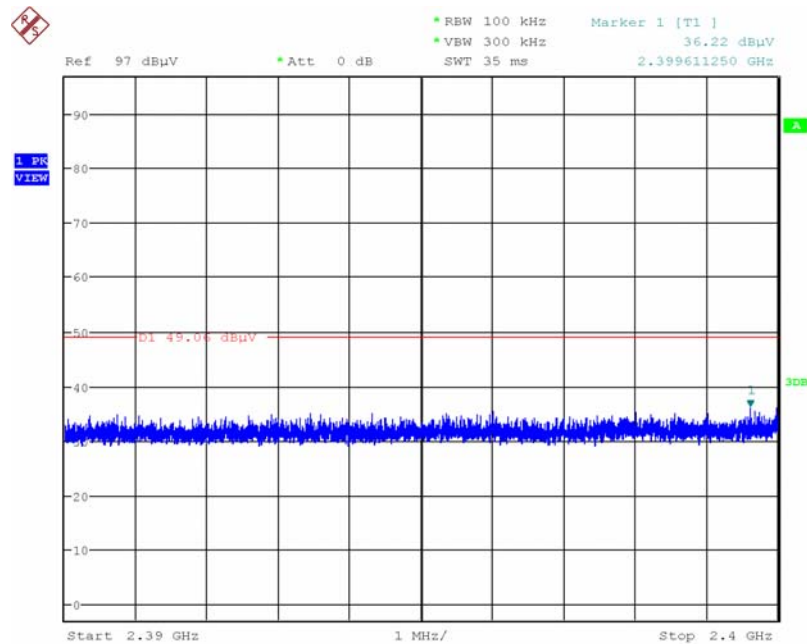

Date: 16.JUL.2015 22:27:03


### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

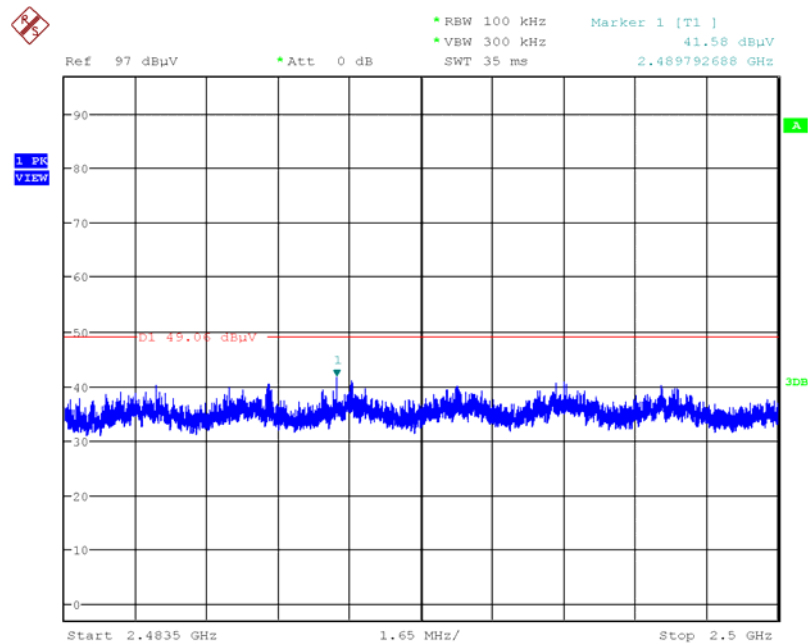

Date: 16.JUL.2015 22:27:27


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 9 / 2500MHz~26500MHz (down 30dBc) (Vertical)

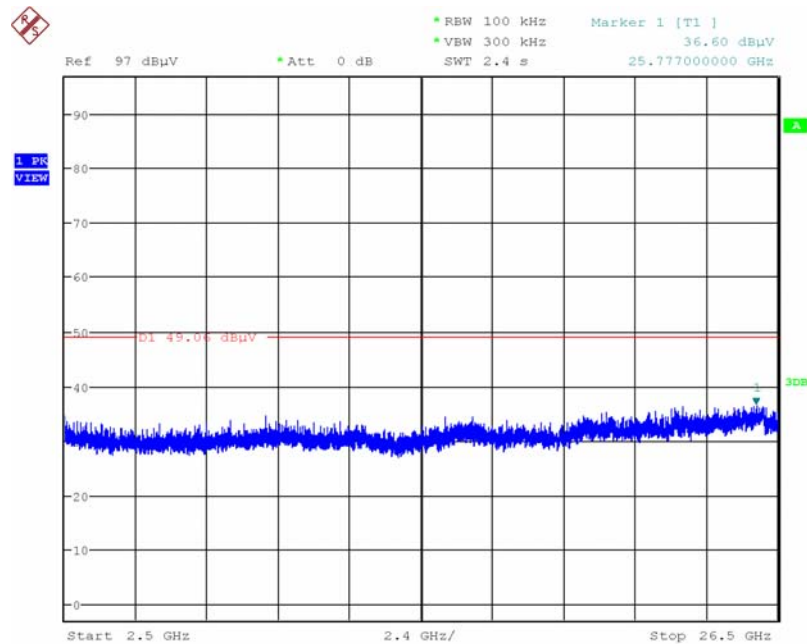

Date: 16.JUL.2015 22:26:28


### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 10 / 30MHz~2400MHz (down 30dBc) (Vertical)

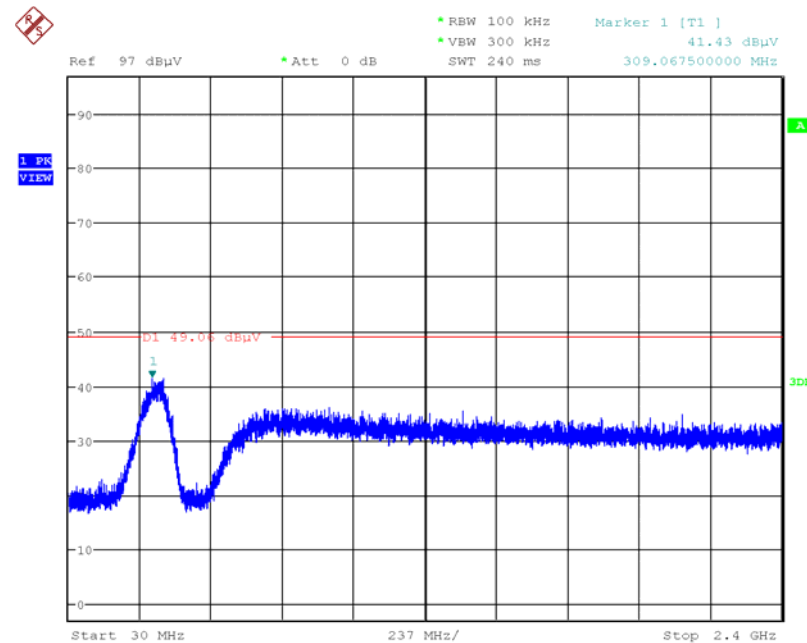

Date: 16.JUL.2015 22:28:21


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 10 / 2390MHz~2400MHz (down 30dBc) (Vertical)

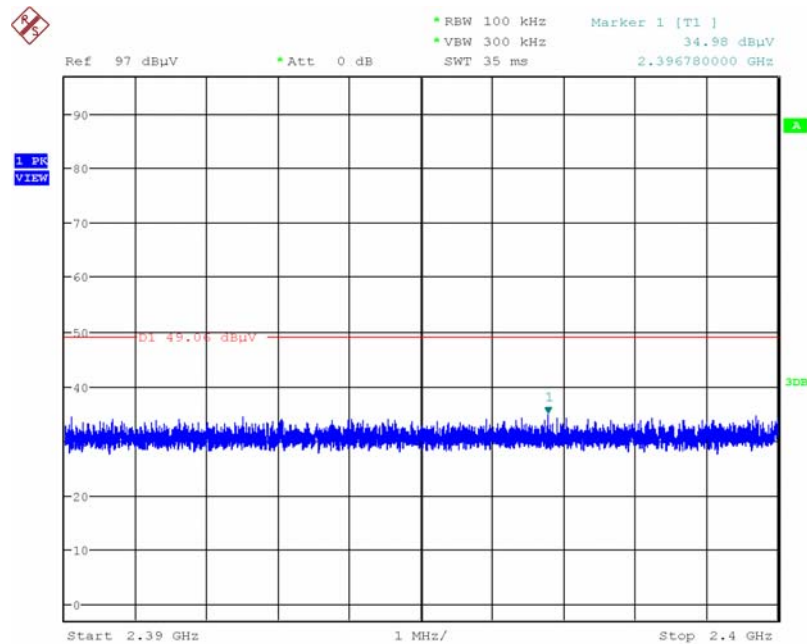

Date: 16.JUL.2015 22:29:05


### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 10 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

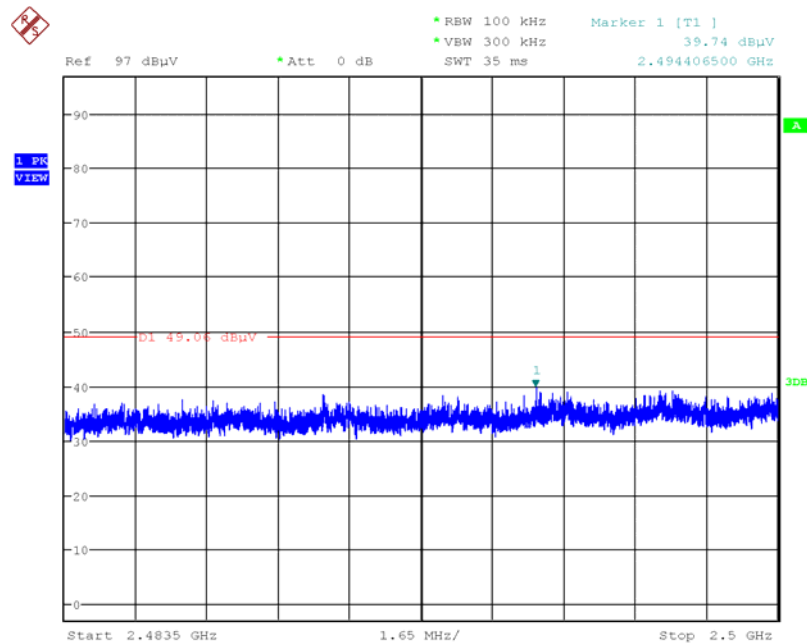

Date: 16.JUL.2015 22:29:28


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 10 / 2500MHz~26500MHz (down 30dBc) (Vertical)

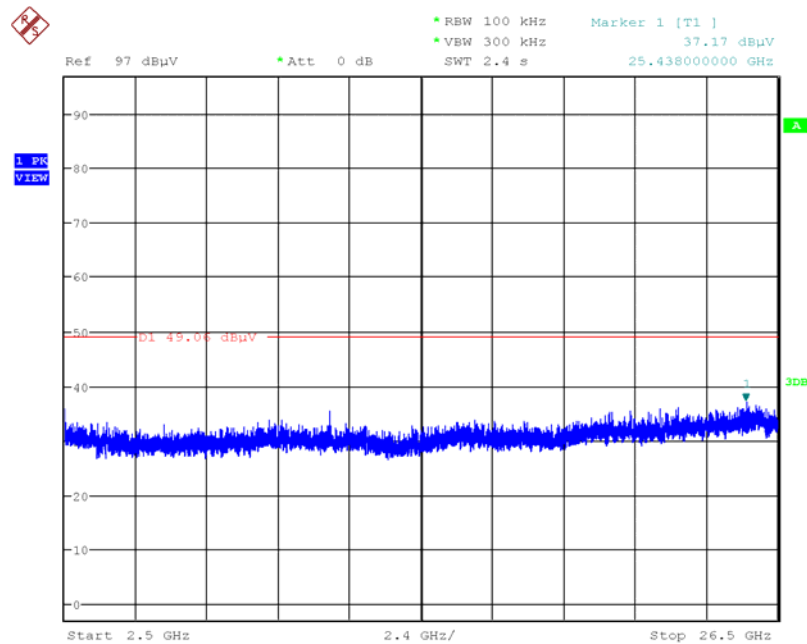

Date: 16.JUL.2015 22:28:40


### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 11 / 30MHz~2400MHz (down 30dBc) (Vertical)

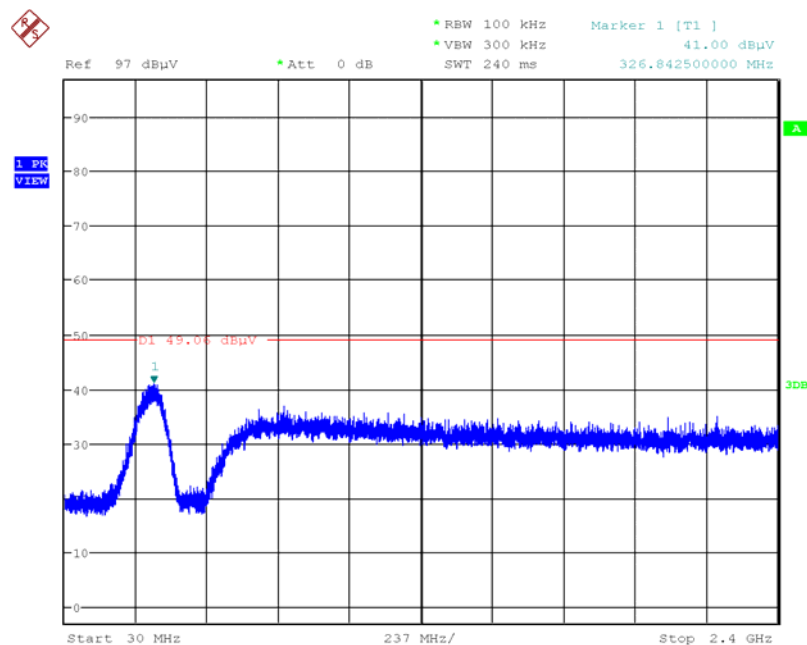

Date: 16.JUL.2015 22:30:07


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 11 / 2390MHz~2400MHz (down 30dBc) (Vertical)

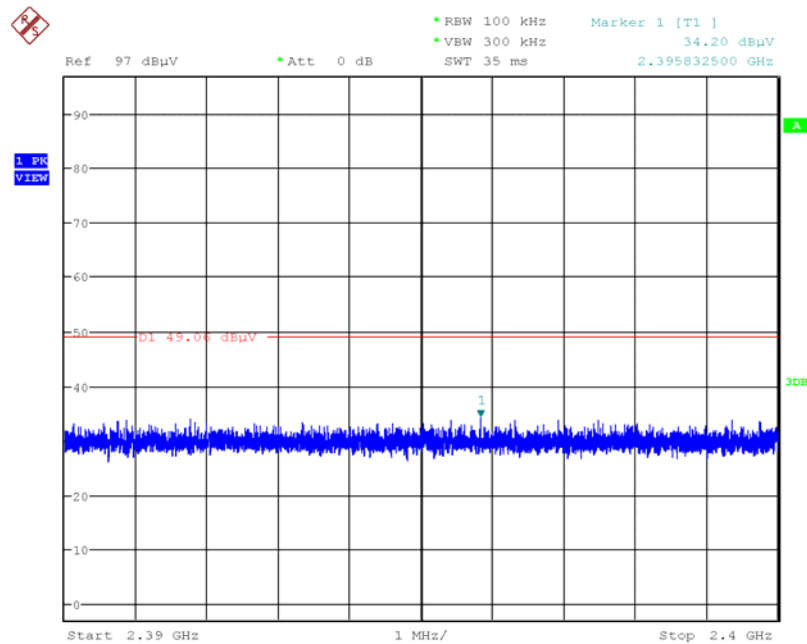

Date: 16.JUL.2015 22:31:13


### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 11 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)

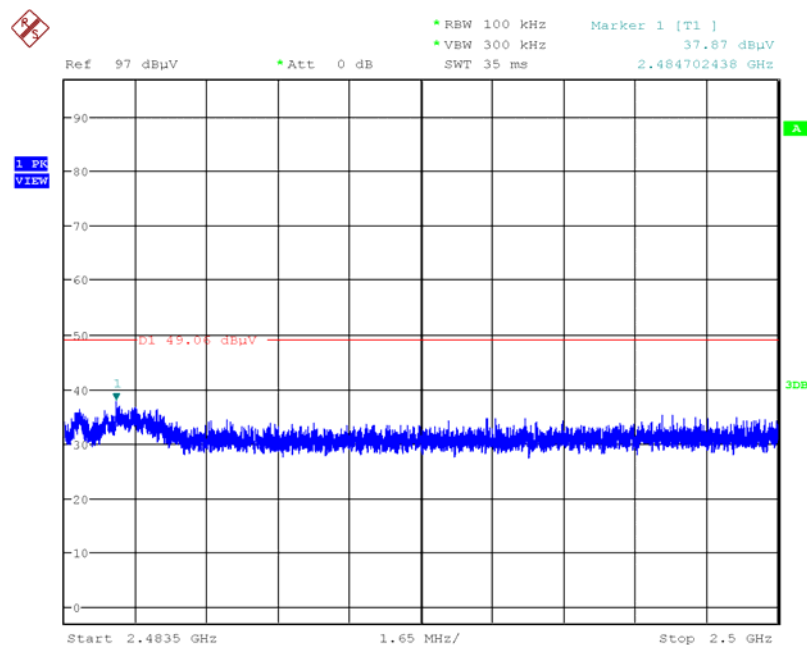

Date: 16.JUL.2015 22:31:35

Note: Only the worse polarization (Vertical) is tested and recorded in test report.


# Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 11 / 2500MHz~26500MHz (down 30dBc) (Vertical)

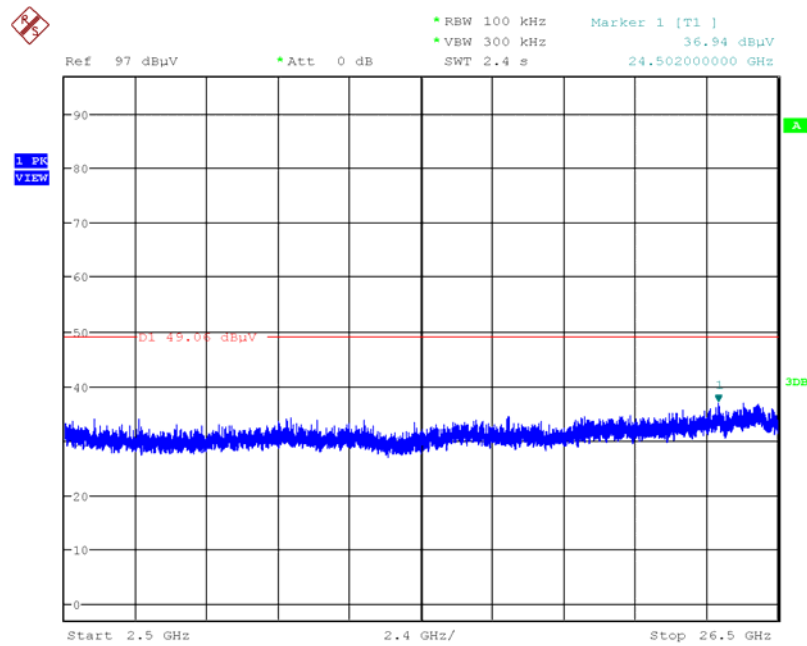

Date: 16.JUL.2015 22:30:48


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11a / Reference Level (Vertical)

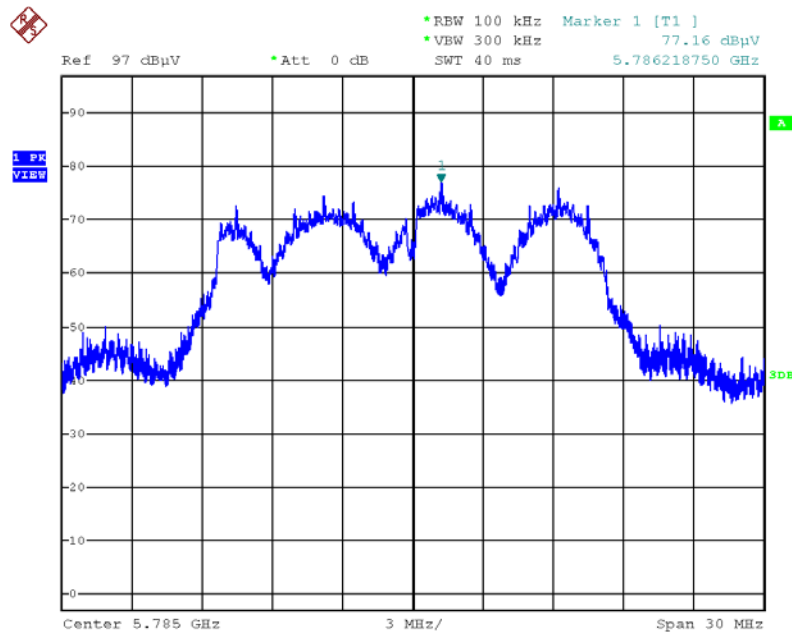

Date: 17.JUL.2015 02:21:11


### Plot on Configuration IEEE 802.11a / CH 149 / 30MHz~5725MHz (down 30dBc) (Vertical)

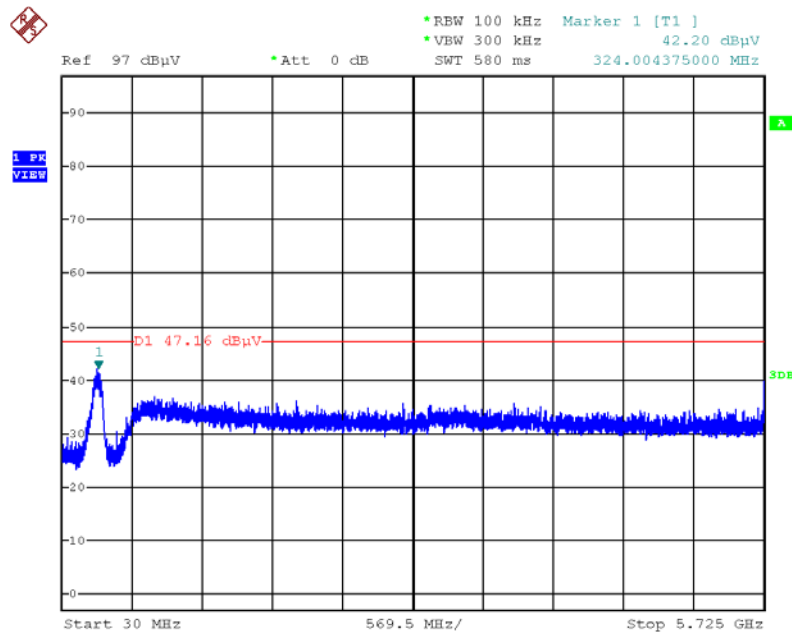

Date: 17.JUL.2015 02:22:46


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11a / CH 149 / 5715MHz~5725MHz (down 30dBc) (Vertical)

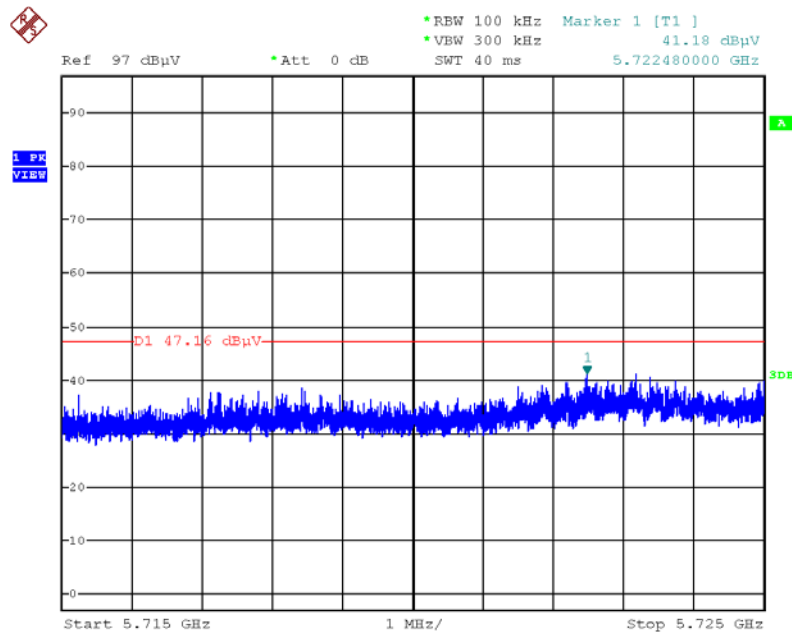

Date: 17.JUL.2015 02:23:43


### Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~5860MHz (down 30dBc) (Vertical)

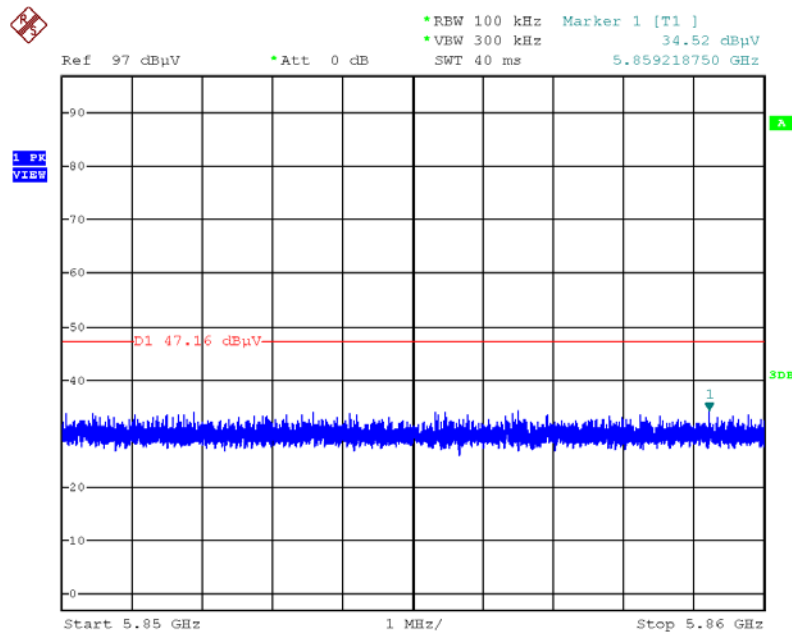

Date: 17.JUL.2015 02:24:32


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11a / CH 149 / 5850MHz~40000MHz (down 30dBc) (Vertical)

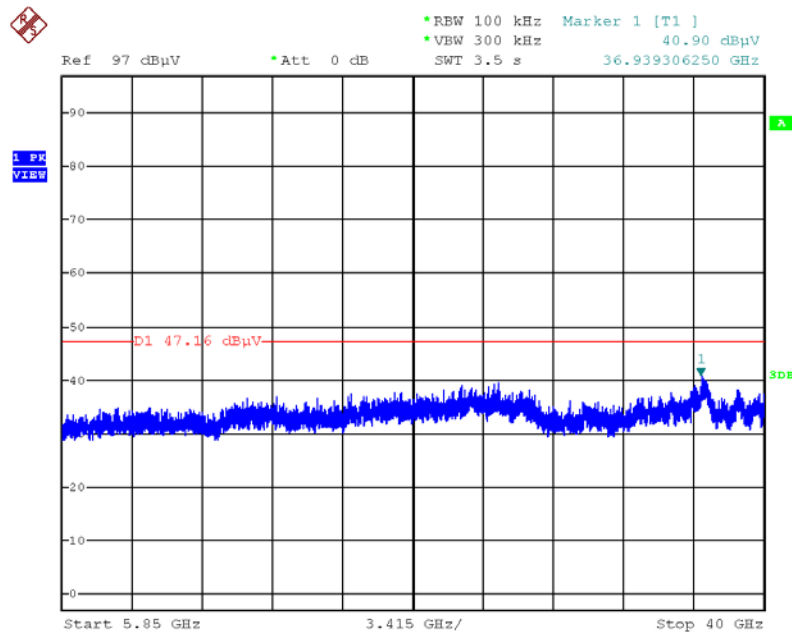

Date: 17.JUL.2015 02:23:18


### Plot on Configuration IEEE 802.11a / CH 165 / 30MHz~5725MHz (down 30dBc) (Vertical)

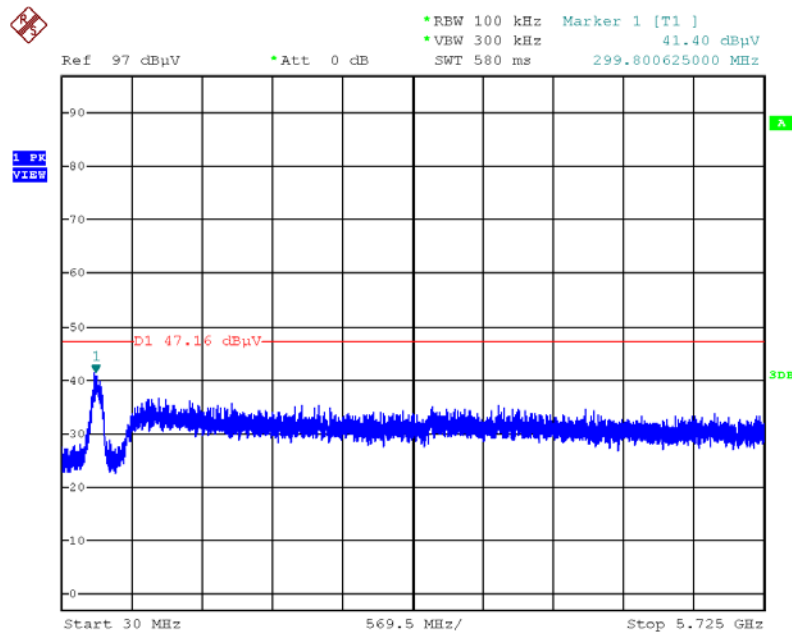

Date: 17.JUL.2015 02:25:19


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11a / CH 165 / 5715MHz~5725MHz (down 30dBc) (Vertical)

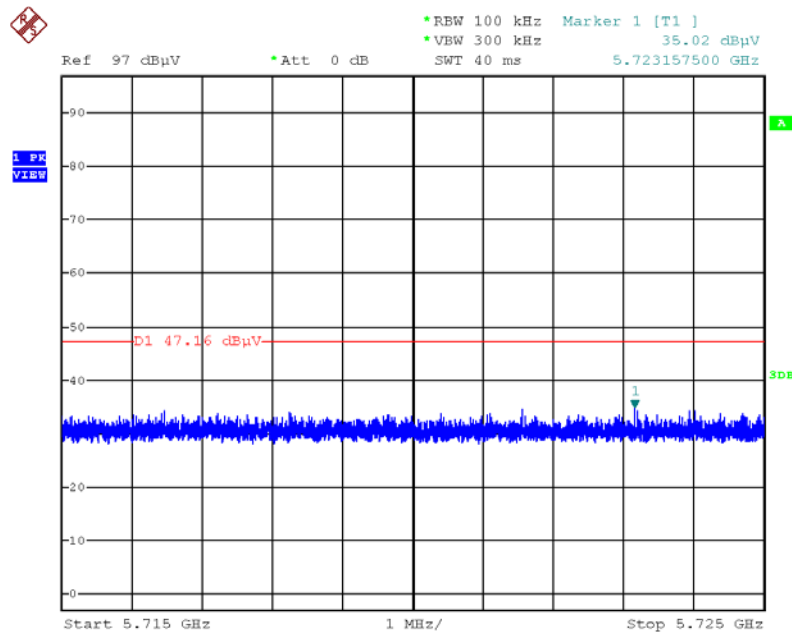

Date: 17.JUL.2015 02:26:34


### Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~5860MHz (down 30dBc) (Vertical)

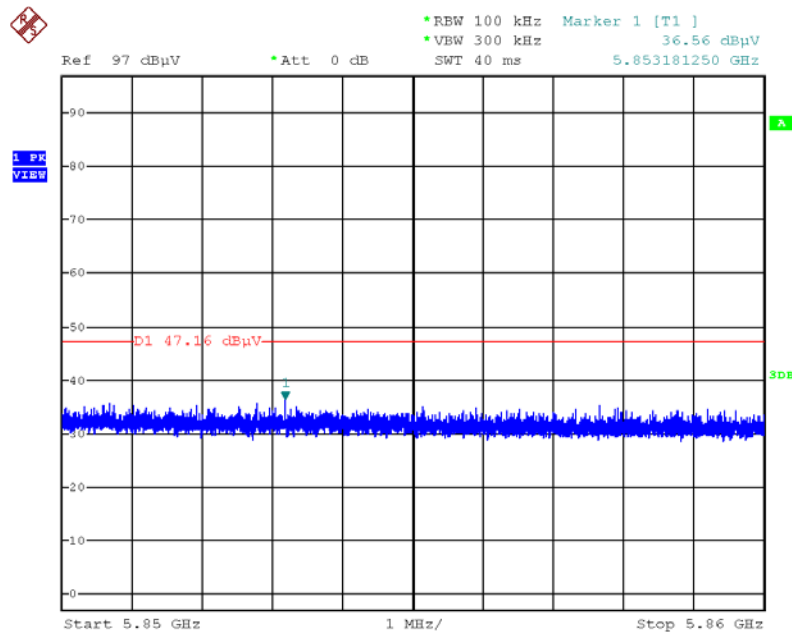

Date: 17.JUL.2015 02:27:07

Note: Only the worse polarization (Vertical) is tested and recorded in test report.


### Plot on Configuration IEEE 802.11a / CH 165 / 5850MHz~40000MHz (down 30dBc) (Vertical)

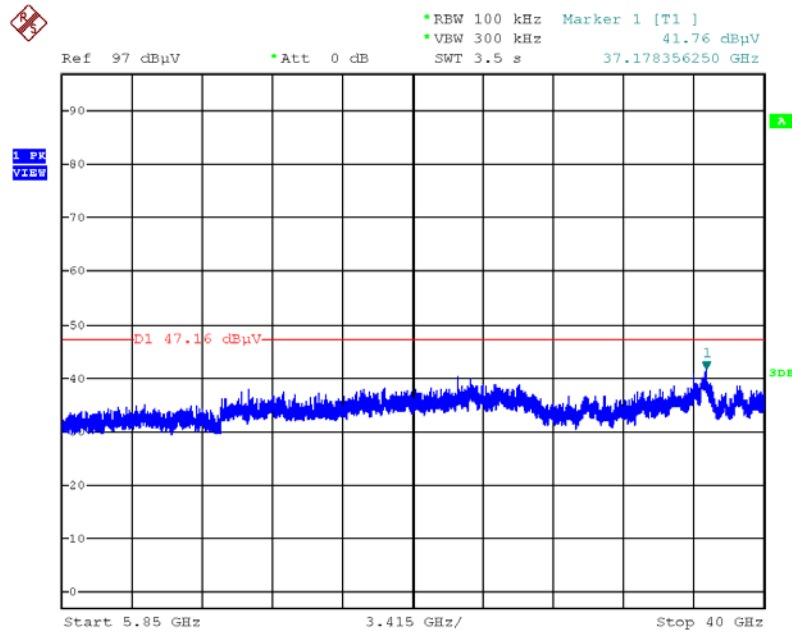

Date: 17.JUL.2015 02:25:59


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT20 / Reference Level (Vertical)

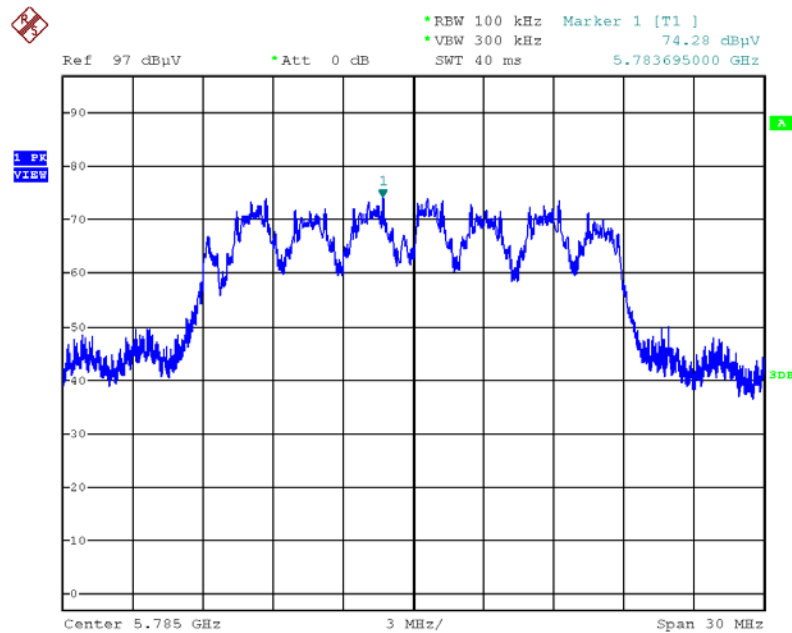

Date: 17.JUL.2015 02:28:55


### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 149 / 30MHz~5725MHz (down 30dBc) (Vertical)

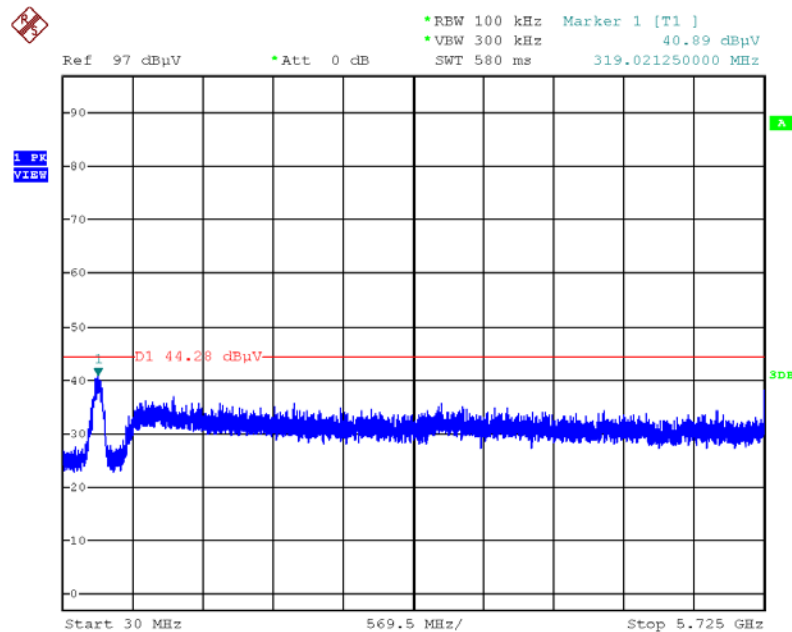

Date: 17.JUL.2015 02:29:58


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 149 / 5715MHz~5725MHz (down 30dBc) (Vertical)

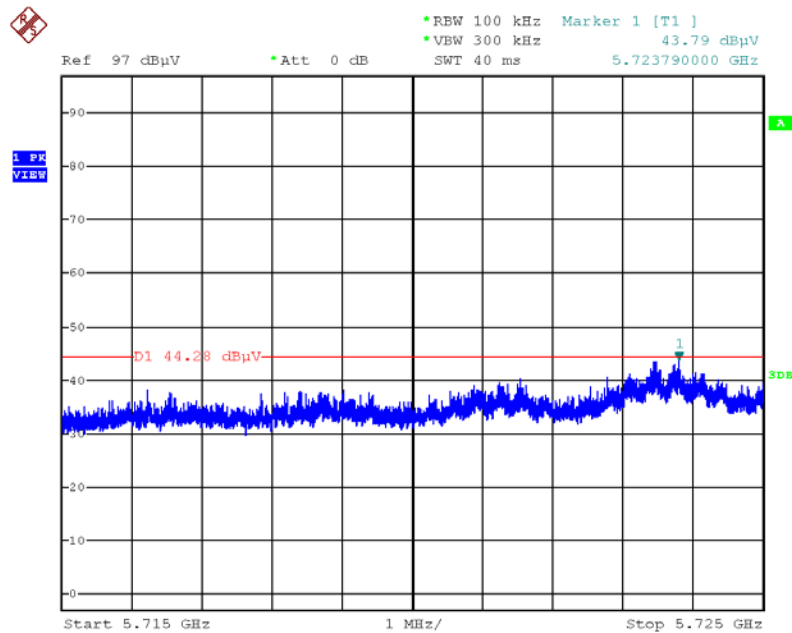

Date: 17.JUL.2015 02:31:28


### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 149 / 5850MHz~5860MHz (down 30dBc) (Vertical)

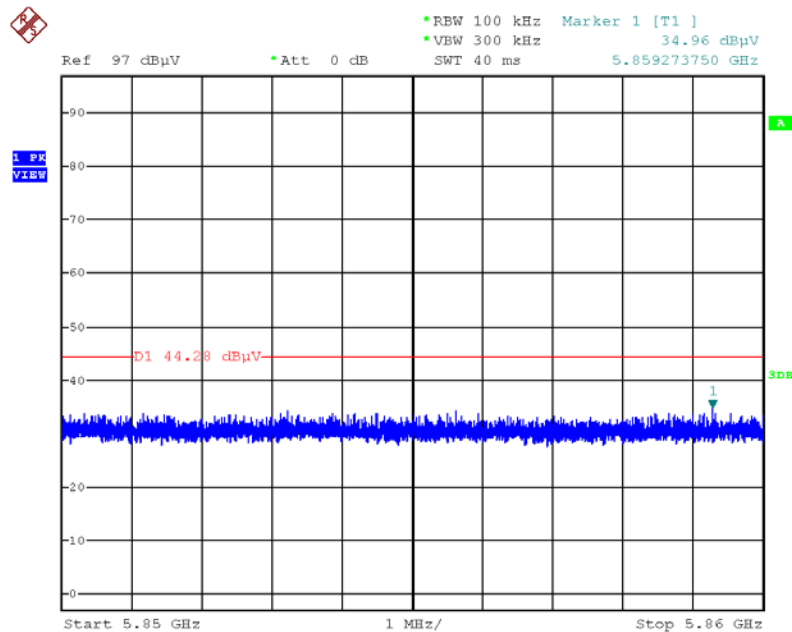

Date: 17.JUL.2015 02:32:12


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 149 / 5850MHz~40000MHz (down 30dBc) (Vertical)

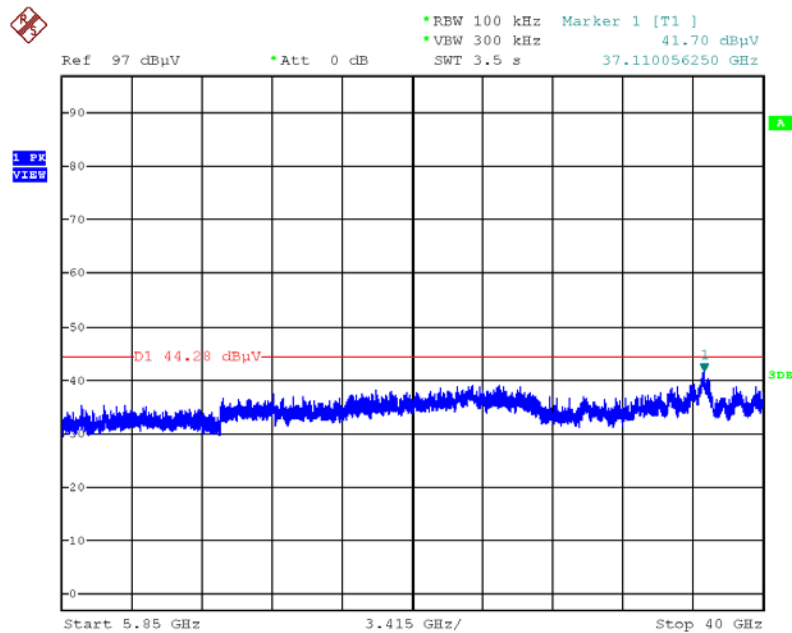

Date: 17.JUL.2015 02:30:45


### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 165 / 30MHz~5725MHz (down 30dBc) (Vertical)

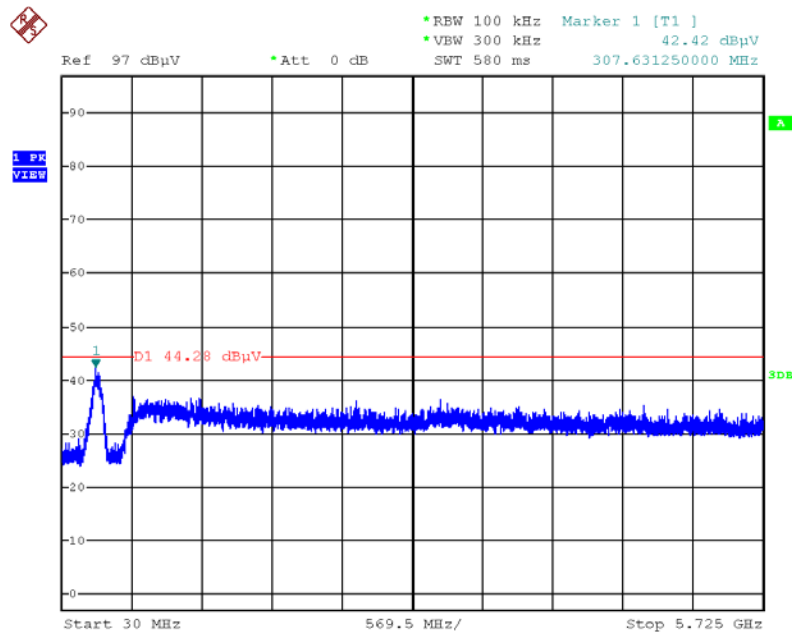

Date: 17.JUL.2015 02:33:25


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 165 / 5715MHz~5725MHz (down 30dBc) (Vertical)

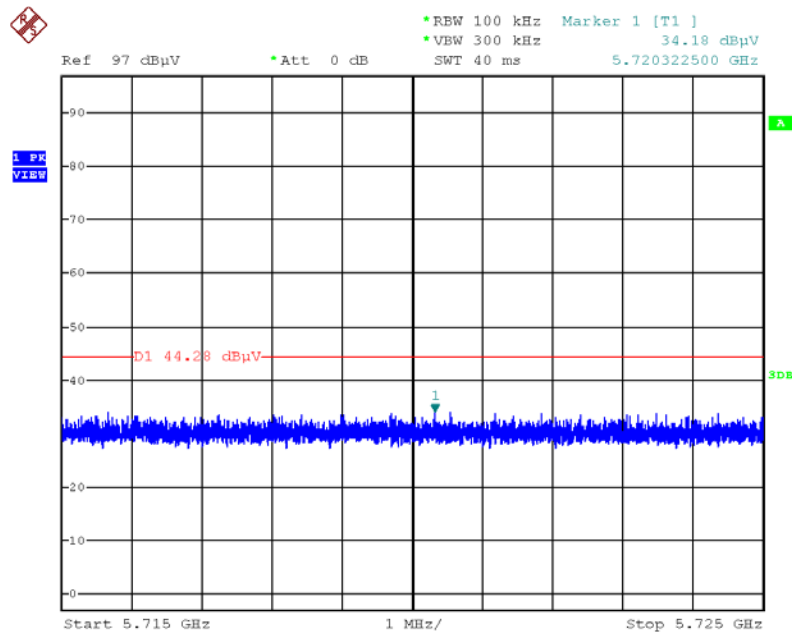

Date: 17.JUL.2015 02:34:56


### Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 165 / 5850MHz~5860MHz (down 30dBc) (Vertical)

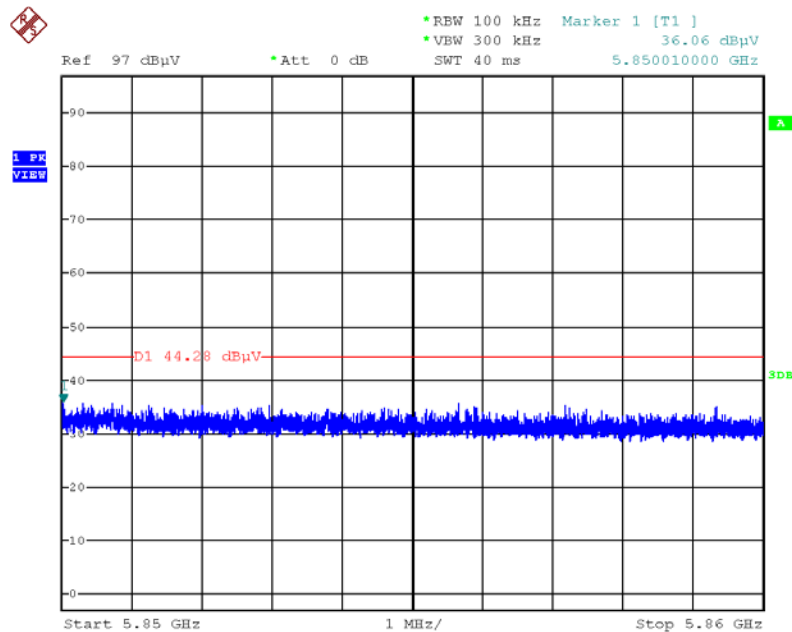

Date: 17.JUL.2015 02:35:32

Note: Only the worse polarization (Vertical) is tested and recorded in test report.


# Plot on Configuration IEEE 802.11n MCS0 HT20 / CH 165 / 5850MHz~40000MHz (down 30dBc) (Vertical)

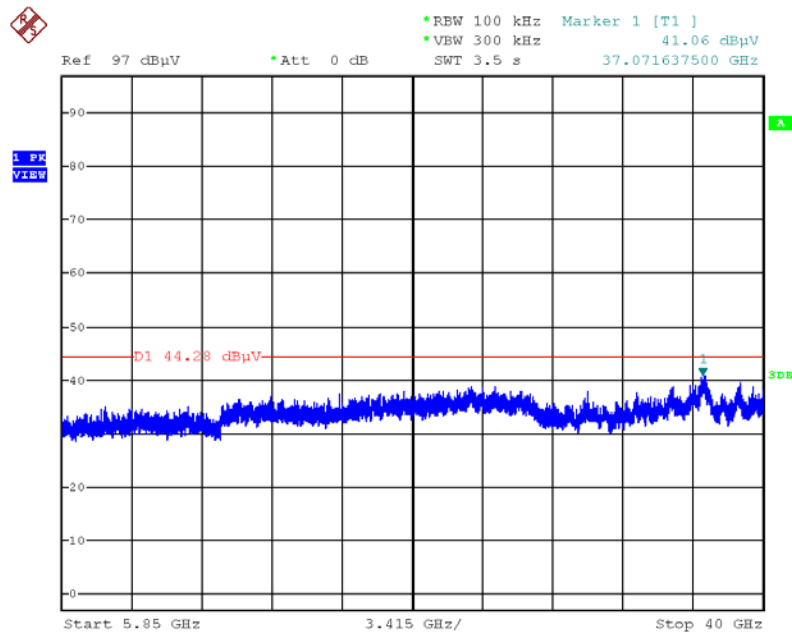

Date: 17.JUL.2015 02:34:19


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT40 / Reference Level (Vertical)

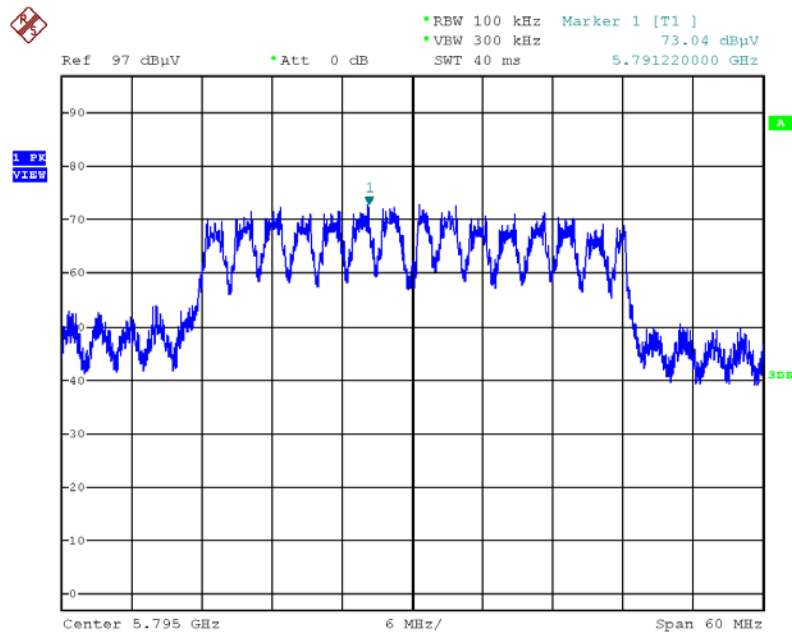

Date: 17.JUL.2015 02:37:06


### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 151 / 30MHz~5725MHz (down 30dBc) (Vertical)

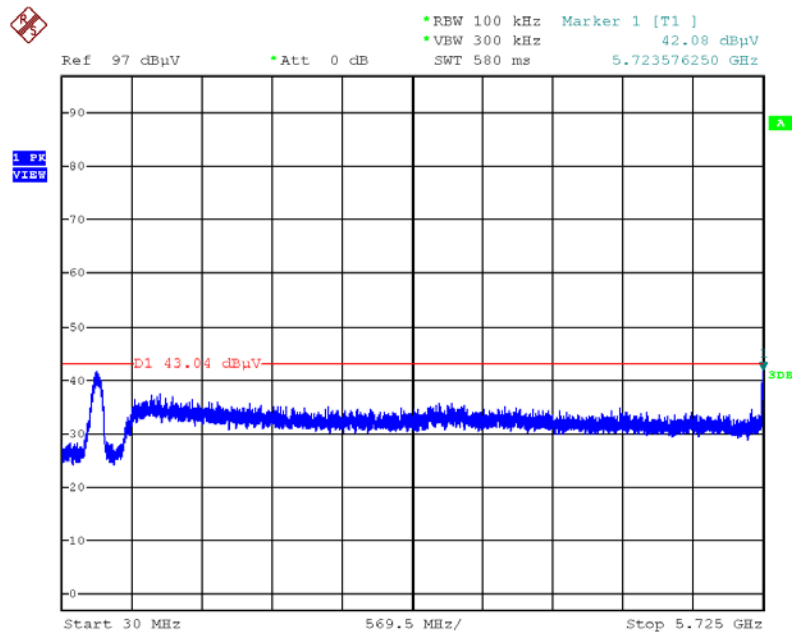

Date: 17.JUL.2015 02:43:17


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 151 / 5715MHz~5725MHz (down 30dBc) (Vertical)

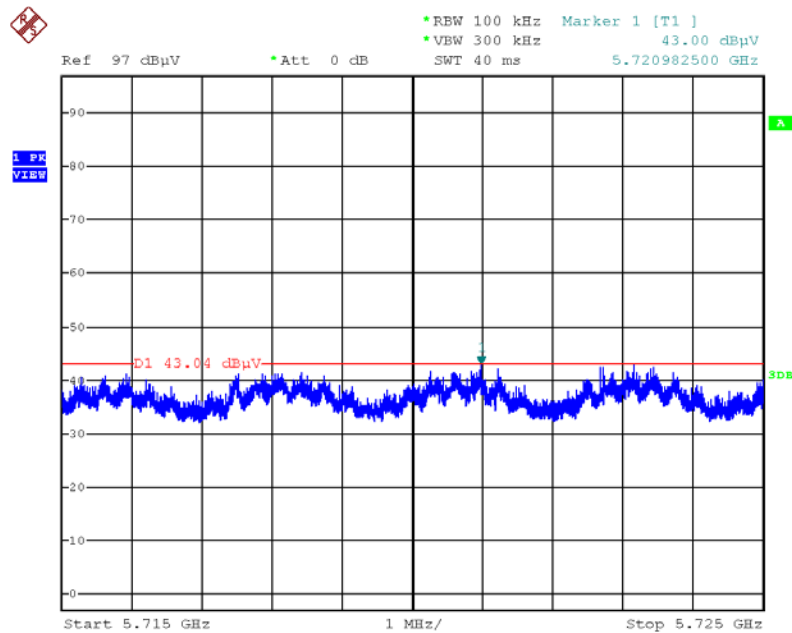

Date: 17.JUL.2015 02:46:52


### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 151 / 5850MHz~5860MHz (down 30dBc) (Vertical)

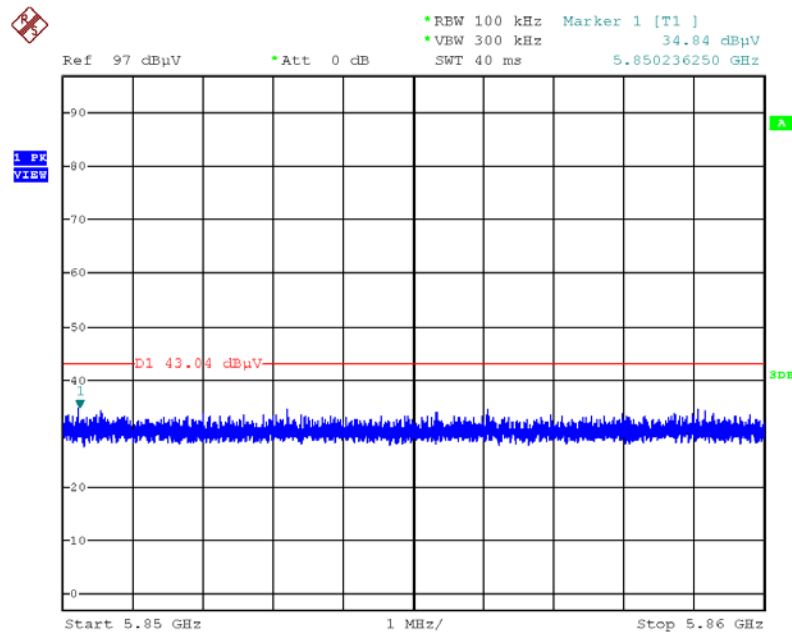

Date: 17.JUL.2015 02:47:27


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 151 / 5850MHz~40000MHz (down 30dBc) (Vertical)

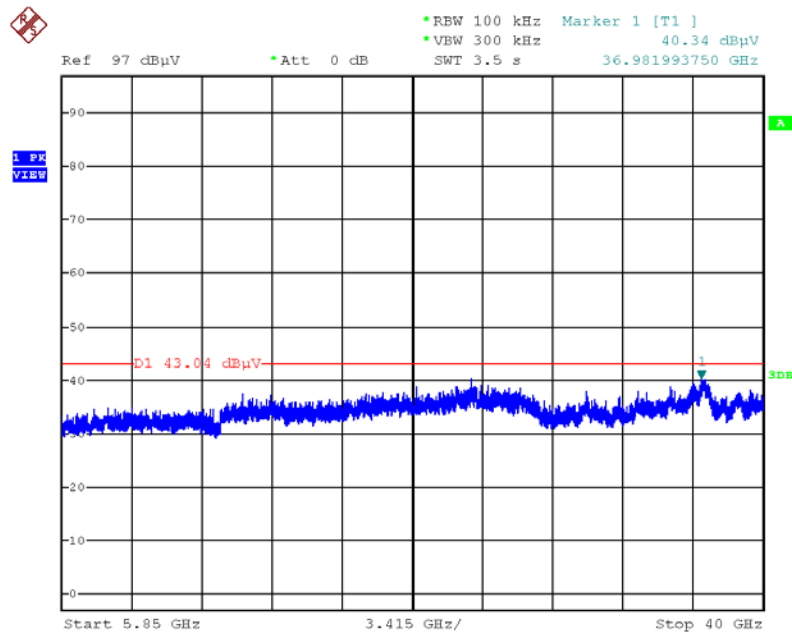

Date: 17.JUL.2015 02:44:02


### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 159 / 30MHz~5725MHz (down 30dBc) (Vertical)

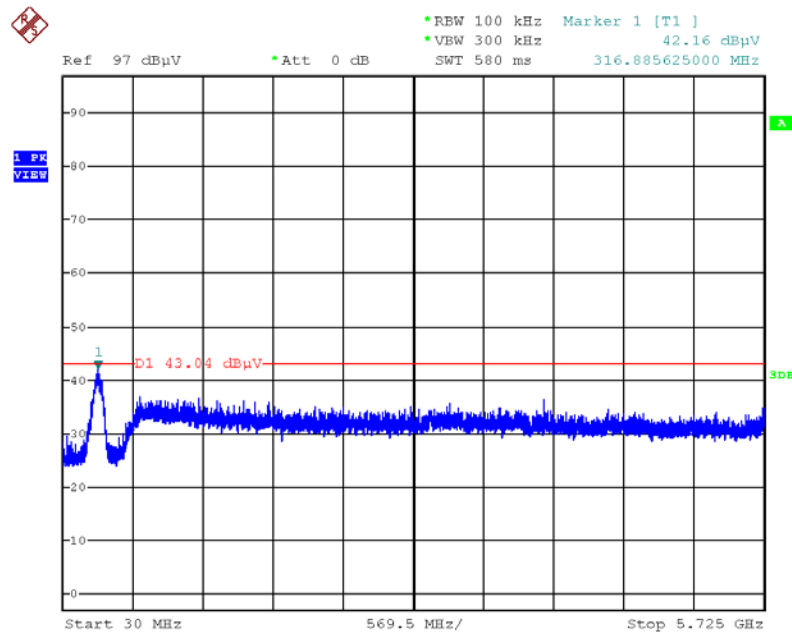

Date: 17.JUL.2015 02:38:56


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 159 / 5715MHz~5725MHz (down 30dBc) (Vertical)

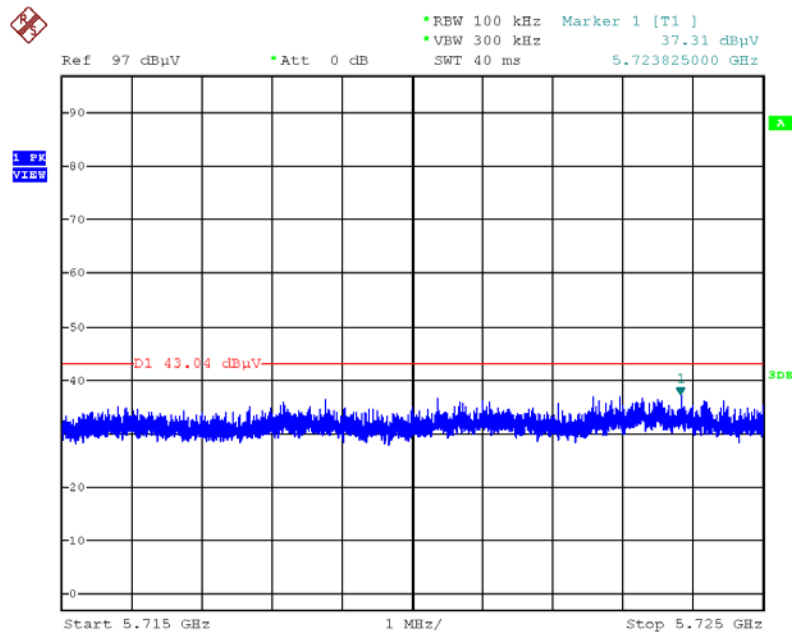

Date: 17.JUL.2015 02:40:37


### Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 159 / 5850MHz~5860MHz (down 30dBc) (Vertical)

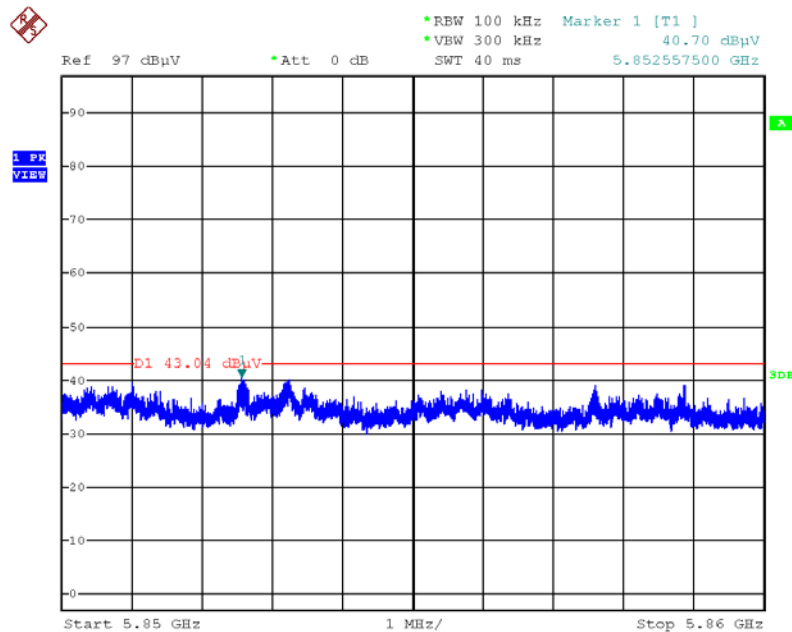

Date: 17.JUL.2015 02:41:15

Note: Only the worse polarization (Vertical) is tested and recorded in test report.

# Plot on Configuration IEEE 802.11n MCS0 HT40 / CH 159 / 5850MHz~40000MHz (down 30dBc) (Vertical)

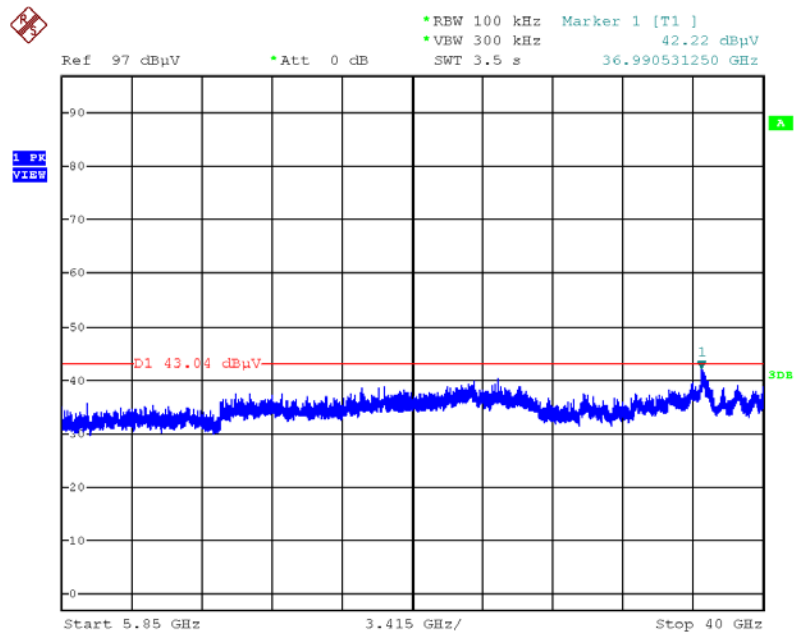

Date: 17.JUL.2015 02:39:56

Note: Only the worse polarization (Vertical) is tested and recorded in test report.

## **4.7. Antenna Requirements**

### **4.7.1. Limit**

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### **4.7.2. Antenna Connector Construction**

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

| Instrument                 | Manufacturer    | Model No.        | Serial No.    | Characteristics  | Calibration Date | Remark                |
|----------------------------|-----------------|------------------|---------------|------------------|------------------|-----------------------|
| EMI Test Receiver          | R&S             | ESCS 30          | 100355        | 9kHz ~ 2.75GHz   | Apr. 22, 2015    | Conduction (CO01-CB)  |
| LISN                       | F.C.C.          | FCC-LISN-50-16-2 | 04083         | 150kHz ~ 100MHz  | Dec. 02, 2014    | Conduction (CO01-CB)  |
| LISN                       | Schwarzbeck     | NSLK 8127        | 8127647       | 9kHz ~ 30MHz     | Dec. 02, 2014    | Conduction (CO01-CB)  |
| COND Cable                 | Woken           | Cable            | 01            | 150kHz ~ 30MHz   | Dec. 03, 2014    | Conduction (CO01-CB)  |
| Software                   | Audix           | E3               | 5.410e        | -                | N.C.R.           | Conduction (CO01-CB)  |
| BILOG ANTENNA              | Schaffner       | CBL6112D         | 22021         | 20MHz ~ 2GHz     | May 06, 2015     | Radiation (03CH01-CB) |
| Loop Antenna               | Rohde & Schwarz | HFH2-Z2          | 100315        | 9 kHz ~ 30 MHz   | Jul. 28, 2014    | Radiation (03CH01-CB) |
| Horn Antenna               | EMCO            | 3115             | 00075790      | 750MHz ~ 18GHz   | Oct. 28, 2014    | Radiation (03CH01-CB) |
| Horn Antenna               | Schwarzbeck     | BBHA 9170        | BBHA9170252   | 15GHz ~ 40GHz    | Aug. 22, 2014    | Radiation (03CH01-CB) |
| Pre-Amplifier              | Agilent         | 8447D            | 2944A10991    | 0.1MHz ~ 1.3GHz  | Feb. 24, 2015    | Radiation (03CH01-CB) |
| Pre-Amplifier              | Agilent         | 8449B            | 3008A02310    | 1GHz ~ 26.5GHz   | Jan. 12, 2015    | Radiation (03CH01-CB) |
| Pre-Amplifier              | WM              | TF-130N-R1       | 923365        | 26GHz ~ 40GHz    | Nov. 25, 2014    | Radiation (03CH01-CB) |
| Spectrum Analyzer          | R&S             | FSP40            | 100056        | 9kHz ~ 40GHz     | Nov. 06, 2014    | Radiation (03CH01-CB) |
| EMI Receiver               | Agilent         | N9038A           | MY52260123    | 9kHz ~ 8.4GHz    | Jan. 21, 2015    | Radiation (03CH01-CB) |
| RF Cable-low               | Woken           | Low Cable-1      | N/A           | 30 MHz ~ 1 GHz   | Nov. 15, 2014    | Radiation (03CH01-CB) |
| RF Cable-high              | Woken           | High Cable-16    | N/A           | 1 GHz ~ 18 GHz   | Nov. 15, 2014    | Radiation (03CH01-CB) |
| RF Cable-high              | Woken           | High Cable-17    | N/A           | 1 GHz ~ 18 GHz   | Nov. 15, 2014    | Radiation (03CH01-CB) |
| RF Cable-high              | Woken           | High Cable-40G-1 | N/A           | 1 GHz ~ 40 GHz   | Nov. 15, 2014    | Radiation (03CH01-CB) |
| RF Cable-high              | Woken           | High Cable-40G-2 | N/A           | 1 GHz ~ 40 GHz   | Nov. 15, 2014    | Radiation (03CH01-CB) |
| Spectrum analyzer          | R&S             | FSV40            | 100979        | 9kHz~40GHz       | Dec. 12, 2014    | Conducted (TH01-CB)   |
| Temp. and Humidity Chamber | Ten Billion     | TTH-D3SP         | TBN-931011    | -30~100 degree   | Jun. 02, 2015    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken           | RG402            | High Cable-7  | 1 GHz ~ 26.5 GHz | Nov. 15, 2014    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken           | RG402            | High Cable-8  | 1 GHz ~ 26.5 GHz | Nov. 15, 2014    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken           | RG402            | High Cable-9  | 1 GHz ~ 26.5 GHz | Nov. 15, 2014    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken           | RG402            | High Cable-10 | 1 GHz ~ 26.5 GHz | Nov. 15, 2014    | Conducted (TH01-CB)   |
| RF Cable-high              | Woken           | RG402            | High Cable-6  | 1 GHz ~ 26.5 GHz | Nov. 15, 2014    | Conducted (TH01-CB)   |

| Instrument   | Manufacturer | Model No. | Serial No. | Characteristics | Calibration Date | Remark                 |
|--------------|--------------|-----------|------------|-----------------|------------------|------------------------|
| Power Sensor | Agilent      | U2021XA   | MY53410001 | 50MHz~18GHz     | Nov. 03, 2014    | Conducted<br>(TH01-CB) |

Note: Calibration Interval of instruments listed above is one year.

Note: N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

| Test Items                           | Uncertainty | Remark                   |
|--------------------------------------|-------------|--------------------------|
| Conducted Emission (150kHz ~ 30MHz)  | 2.4 dB      | Confidence levels of 95% |
| Radiated Emission (30MHz ~ 1,000MHz) | 3.6 dB      | Confidence levels of 95% |
| Radiated Emission (1GHz ~ 18GHz)     | 3.7 dB      | Confidence levels of 95% |
| Radiated Emission (18GHz ~ 40GHz)    | 3.5 dB      | Confidence levels of 95% |
| Conducted Emission                   | 1.7 dB      | Confidence levels of 95% |