



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / [www.sporton.com.tw](http://www.sporton.com.tw)

## FCC RADIO TEST REPORT

Applicant's company	<b>Broadcom Corporation</b>
Applicant Address	190 Mathilda Place Sunnyvale CA 94086 U.S.A.
FCC ID	<b>QDS-BRCM1090</b>
Manufacturer's company	<b>Broadcom Corporation</b>
Manufacturer Address	190 Mathilda Place Sunnyvale CA 94086 U.S.A.

Product Name	Broadcom 802.11a/b/g/n/ac WLAN + Bluetooth PCI-E/SDIO NGFF 2230 Card
Brand Name	Broadcom
Model No.	BCM94371ZAE
Part No.	BCM94371ZAE, BCM94371Z
Test Rule	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2402 ~ 2480MHz
Received Date	Jul. 31, 2014
Final Test Date	Jan. 07, 2016
Submission Type	Original Equipment

### Statement

**Test result included is only for the Bluetooth LE of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013, 47 CFR FCC Part 15 Subpart C** and **KDB558074 D01 v03r04**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Testing Laboratory

1190

## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	4
3.4. Table for Carrier Frequencies .....	4
3.5. Table for Test Modes.....	5
3.6. Table for Testing Locations.....	7
3.7. Table for Multiple Listing.....	7
3.8. Table for Supporting Units .....	8
3.9. Table for Parameters of Test Software Setting .....	9
3.10. EUT Operation during Test .....	9
3.11. Duty Cycle .....	9
3.12. Test Configurations .....	10
<b>4. TEST RESULT .....</b>	<b>13</b>
4.1. AC Power Line Conducted Emissions Measurement.....	13
4.2. Maximum Conducted Output Power Measurement.....	17
4.3. Power Spectral Density Measurement .....	19
4.4. 6dB Spectrum Bandwidth Measurement .....	23
4.5. Radiated Emissions Measurement .....	26
4.6. Emissions Measurement .....	39
4.7. Antenna Requirements .....	49
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>50</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>52</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A8</b>
<b>APPENDIX B. RADIATED EMISSION CO-LOCATION REPORT.....</b>	<b>B1 ~ B5</b>



## History of This Test Report



Report No.: FR473142-07AD

Project No: CB10410058

## 1. VERIFICATION OF COMPLIANCE

Product Name : Broadcom 802.11a/b/g/n/ac WLAN + Bluetooth PCI-E/SDIO NGFF 2230 Card  
Brand Name : Broadcom  
Model No. : BCM94371ZAE  
Part No. : BCM94371ZAE, BCM94371Z  
Applicant : Broadcom Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jul. 31, 2014 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	12.12 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	23.14 dB
4.3	15.247(e)	Power Spectral Density	Complies	17.93 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	3.04 dB
4.6	15.247(d)	Band Edge Emissions	Complies	6.12 dB
4.7	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Power Type	From host system
Modulation	DSSS
Data Rate (Mbps)	GFSK: 1
Frequency Range	2402 ~ 2480MHz
Channel Number	40 (37 hopping + 3 advertising channel)
Channel Band Width (99%)	1.110 MHz
Maximum Conducted Output Power	6.86 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

#### 3.2. Accessories

N/A

### 3.3. Table for Filed Antenna

Set	Ant.	Brand	Part No.	Antenna Type	Connector	Gain (dBi)				
						2.4G/ BT	5G B1	5G B2	5G B3	5G B4
1	1	MAG.LAYERS	PCA-4077-25GC1-A1-RT	WLAN/BT antenna	I-PEX A13	3.33	5.85	5.85	6.21	6.21
	2	MAG.LAYERS	PCA-4077-25GC1-A1-RT	WLAN/BT antenna	I-PEX A13	3.33	5.85	5.85	6.21	6.21

Note: The EUT has one set of antenna, and each set contains two antennas.

Chain 1: Connect to Ant. 1, Chain 2: Connect to Ant. 2.

**For 2.4 GHz WLAN function (2TX/2RX):**


Chain 1 and Chain 2 could transmit/receive simultaneously.

**For Bluetooth function (1TX/1RX):**

Only Chain 1 could transmit/receive simultaneously.

**For 5 GHz WLAN function (2TX/2RX):**

Chain 1 and Chain 2 could transmit/receive simultaneously.

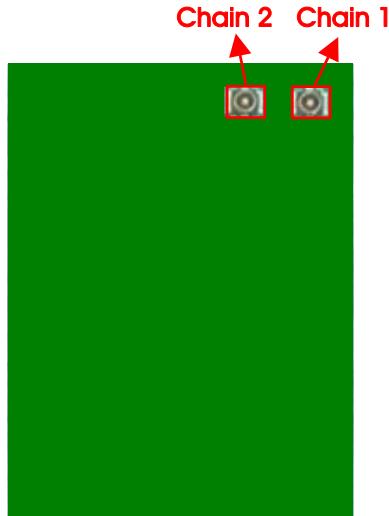

### 3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	0	2402 MHz	20	2442 MHz
	1	2404 MHz	:	:
	2	2406 MHz	37	2476 MHz
	:	:	38	2478 MHz
	18	2438 MHz	39	2480 MHz
	19	2440 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Data Rate	Channel	Chain
AC Power Line Conducted Emissions	Normal Link	-	-	-
Maximum Conducted Output Power Power Spectral Density	GFSK	1 Mbps	0/20/39	1
6dB Spectrum Bandwidth	GFSK	1 Mbps	0/20/39	1
Radiated Emissions 9kHz~1GHz	Normal Link	-	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	GFSK	1 Mbps	0/20/39	1
Band Edge Emissions	GFSK	1 Mbps	0/20/39	1

The following test modes were performed for all tests:

**For AC Power Line Conducted Emissions test:**

Mode 1. EUT 1 + 2.4GHz WLAN function + Bluetooth function

Mode 2. EUT 1 + 5GHz WLAN function + Bluetooth function

Mode 3. EUT 2 + 2.4GHz WLAN function

Mode 4. EUT 2 + 5GHz WLAN function

Mode 5. EUT 2 + Bluetooth function

Mode 5 is the worst case, so it was selected to record in this test report.

**For Radiated Emissions 9kHz~1GHz test:**

Mode 1. Place EUT 1 in X axis + 2.4GHz WLAN function + Bluetooth function

Mode 2. Place EUT 1 in Y axis + 2.4GHz WLAN function + Bluetooth function

Mode 3. Place EUT 1 in Z axis + 2.4GHz WLAN function + Bluetooth function

Mode 4. Place EUT 1 in X axis + 5GHz WLAN function + Bluetooth function

Mode 5. Place EUT 1 in Y axis + 5GHz WLAN function + Bluetooth function

Mode 6. Place EUT 1 in Z axis + 5GHz WLAN function + Bluetooth function

Mode 7. Place EUT 2 in X axis + 2.4GHz WLAN function

Mode 8. Place EUT 2 in Y axis + 2.4GHz WLAN function

Mode 9. Place EUT 2 in Z axis + 2.4GHz WLAN function

Mode 10. Place EUT 2 in X axis + 5GHz WLAN function

Mode 11. Place EUT 2 in Y axis + 5GHz WLAN function

Mode 12. Place EUT 2 in Z axis + 5GHz WLAN function

Mode 9 has been evaluated to be the worst case among Mode 7~9, thus measurement for Mode 13 will follow this same test mode.

Mode 13. Place EUT 2 in Z axis + Bluetooth function

Mode 9 is the worst case, so it was selected to record in this test report.

**For Radiated Emissions above 1GHz test:**

Radiated Emissions above 1GHz test was perform at its 3-axis (X-axis, Y-axis and Z-axis). Z-axis was the worst case, so it's recorded in this test report.

**For Co-location MPE and Radiated Emission Co-location Test:**

The EUT could be applied with 2.4GHz WLAN function and 5GHz WLAN function; therefore Co-location Maximum Permissible Exposure (Please refer to FA473142-07AA) and Radiated Emission Co-location (please refer to Appendix B) tests are added for simultaneously transmit between 2.4GHz WLAN function and 5GHz WLAN function.

Mode 1. EUT 1 + 2.4GHz WLAN function + Bluetooth function

Mode 2. EUT 1 + 5GHz WLAN function + Bluetooth function

### 3.6. Table for Testing Locations

Test Site Location				
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.			
TEL:	886-3-656-9065			
FAX:	886-3-656-9085			
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC).

### 3.7. Table for Multiple Listing

The EUT has three part numbers which are identical to each other in all aspects except for the following table:

EUT	Model No.	Part No.	Description
EUT 1	BCM94371ZAE	BCM94371Z	M.2 E Key connector which support PCIe/USB interface.
EUT 2		BCM94371Z	M.2 E Key connector which support SDIO/UART/PCIe/USB interface.
EUT 3		BCM94371ZAE	M.2 A key + E Key connector which support PCIe/USB interface.

From the above models, part number: EUT 1 and EUT 2 were selected as representative models for AC Power Line Conducted Emissions and Radiated Emissions <below 1GHz> tests and EUT 1 was selected as representative model for other tests.

### 3.8. Table for Supporting Units

#### For Test Site No: CO01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
Fixture*2	Broadcom	BCM9MC2EC_1	N/A
Mouse	Logitech	M-U0026	N/A
Earphone	SHYARO CHI	MIC-04	N/A
NB	DELL	E4300	N/A
Broadcom 802.11a/b/g/n/ac WLAN + Bluetooth PCI-E NGFF 2230 Card (Device)	Broadcom	BCM94371ZAE	QDS-BRCM1090

#### For Test Site No: 03CH01-CB (below 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	DoC
Wireless ac AP	Netgear	R6300V2	PY313200227
Fixture	Broadcom	BCM9MC2EC_1	N/A
Mouse	Logitech	M-U0026	DoC
Earphone	SHYARO CHI	MIC-04	N/A
Adapter	Moso	MSA-C2000IC5	N/A

#### For Test Site No: 03CH01-CB (above 1GHz)

Support Unit	Brand	Model	FCC ID
NB	DELL	E4300	RSE-TG233
Test fixture	Broadcom	BCM9NGFF2EC_1	N/A

#### For Test Site No: TH01-CB

Support Unit	Brand	Model	FCC ID
NB	DELL	E6430	DoC
Test fixture	Broadcom	BCM9NGFF2EC_1	N/A

### 3.9. Table for Parameters of Test Software Setting

During testing, Channel and Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters:

Test Software Version	Broadcom Blue Tool Version: 1.4.8.9		
Frequency	2402 MHz	2442 MHz	2480 MHz
Power Parameters	Default	Default	Default

### 3.10. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

### 3.11. Duty Cycle

Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
GFSK	0.092	0.612	15.03	8.23	10.87

### 3.12. Test Configurations


#### 3.12.1. AC Power Line Conduction Emissions Test Configuration

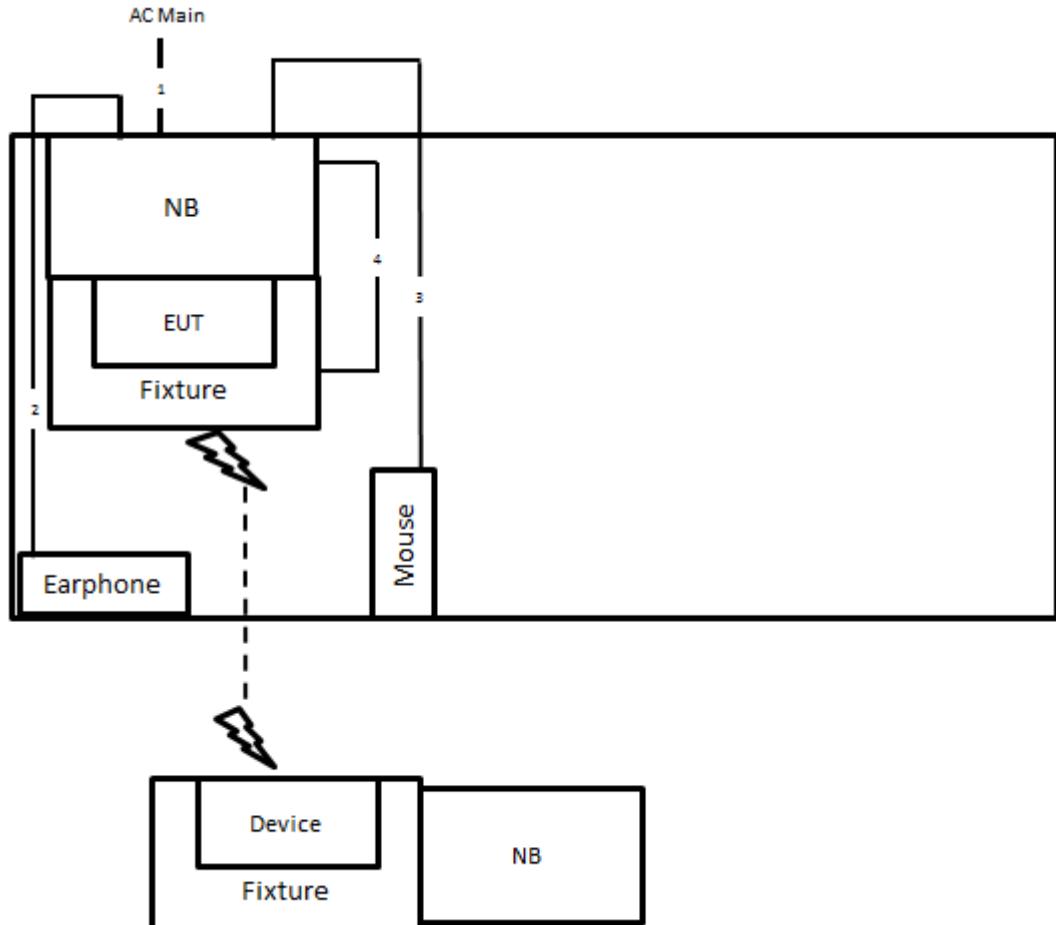

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	Audio cable	No	1.1m
3	USB cable	Yes	1.8m
4	USB cable	Yes	1.2m


### 3.12.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

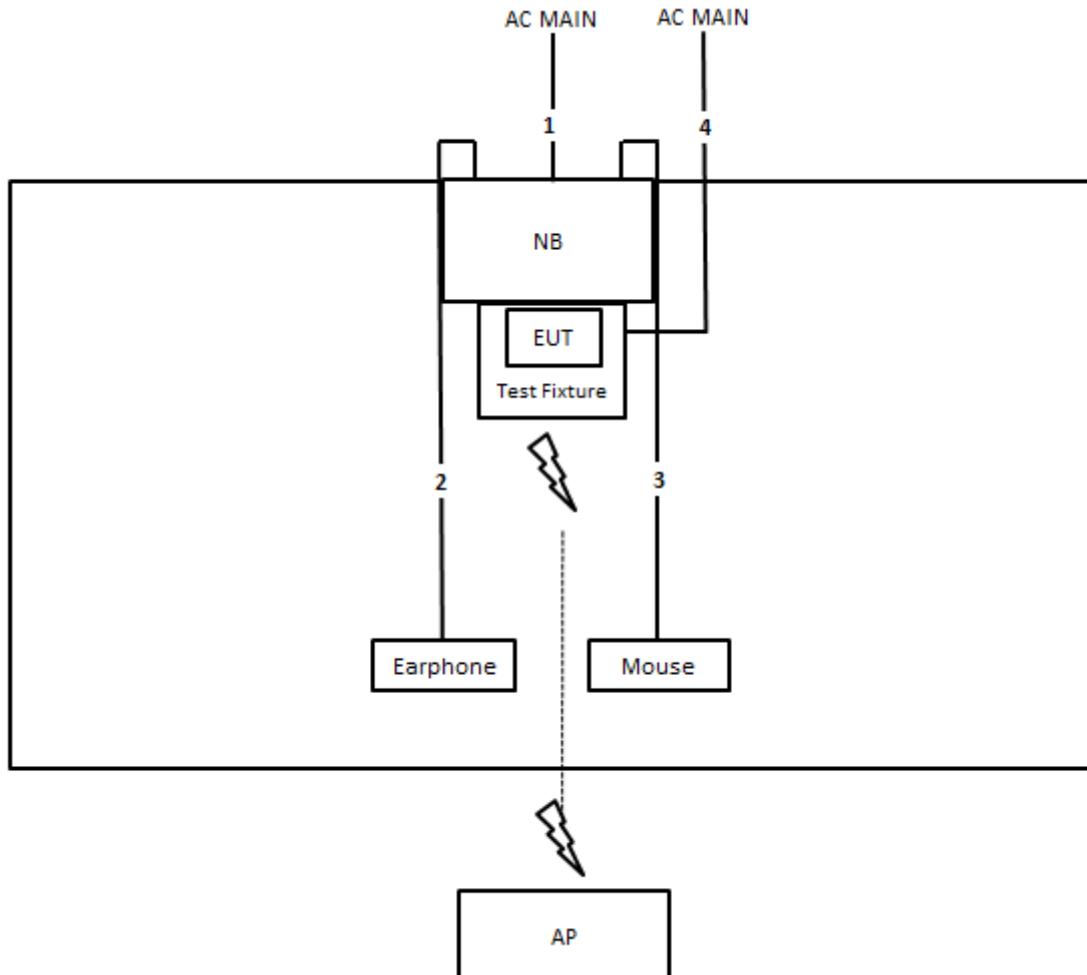

Item	Connection	Shielded	Length
1	Power cable	No	2.6m
2	Audio Cable	No	1.1m
3	USB Cable	Yes	1.8m
4	Power cable	No	1.8m

Test Configuration: above 1GHz

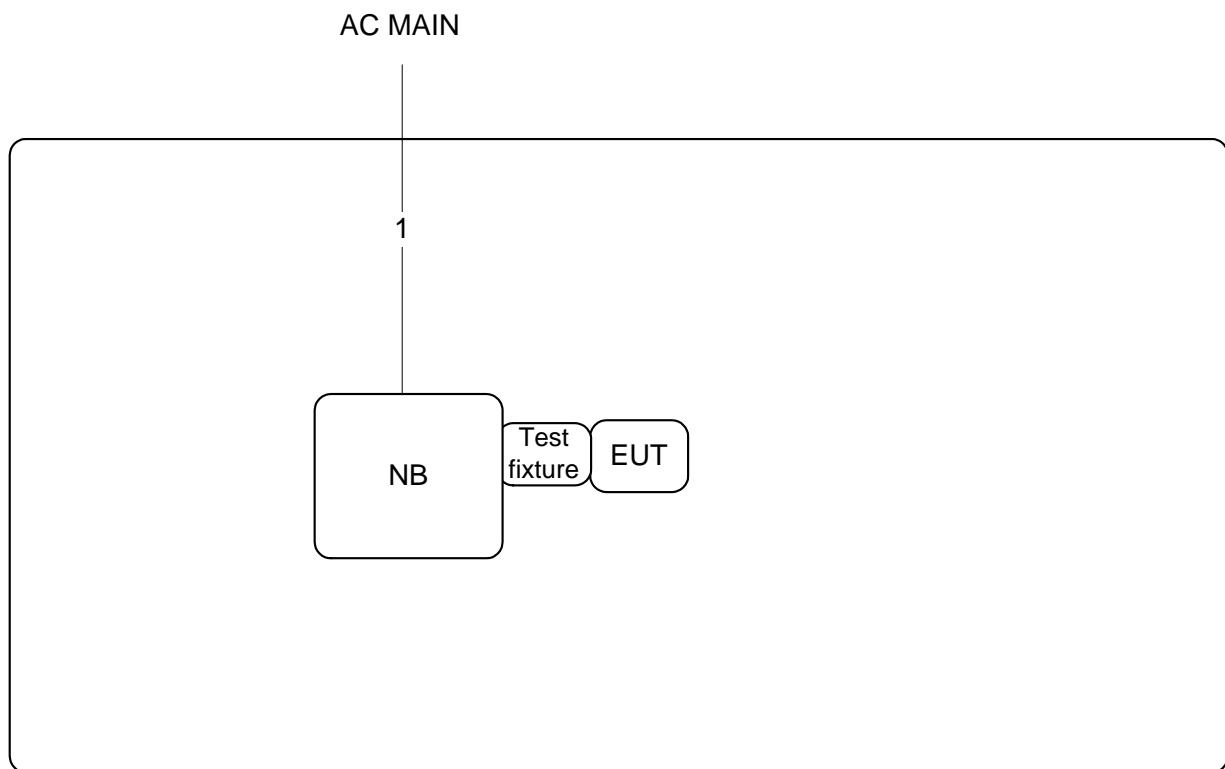

Item	Connection	Shielded	Length
1	Power cable	No	1.8m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 kHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

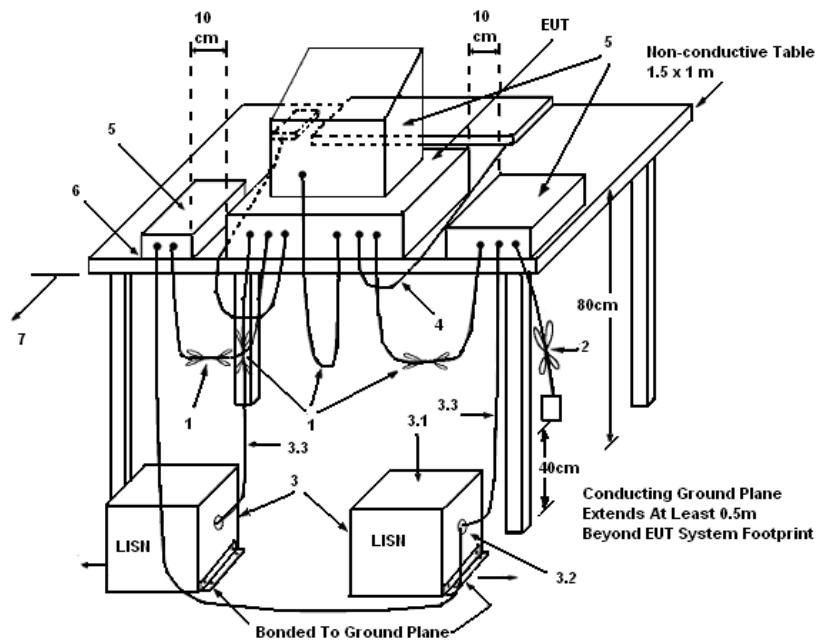

##### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in  $50 \Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


## 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	25°C	Humidity	62%
Test Engineer	Kane Liu	Phase	Line
Configuration	Normal Link	Test Mode	Mode 5

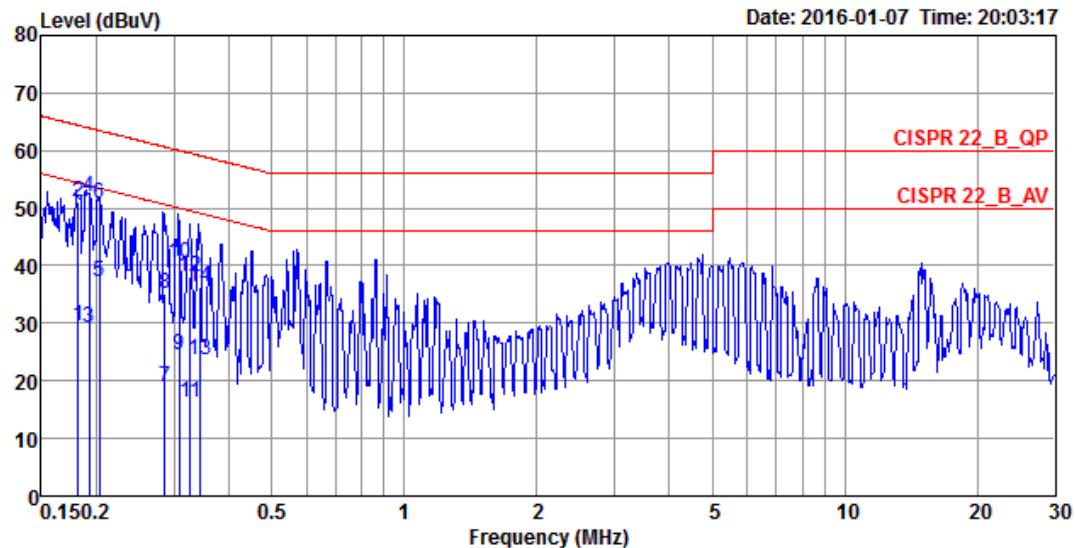

Freq	Level	Over	Limit	Read	LISN	Cable	Pol/Phase	Remark
		Line	dBuV	Level	Factor	Loss		
	MHz	dBuV	dB	dBuV	dB	dB		
1	0.1815	29.48	-24.94	54.42	19.53	9.93	0.02	LINE Average
2	0.1815	50.94	-13.48	64.42	40.99	9.93	0.02	LINE QP
3	0.1924	29.14	-24.79	53.93	19.19	9.93	0.02	LINE Average
4	0.1924	51.81	-12.12	63.93	41.86	9.93	0.02	LINE QP
5	0.2029	37.31	-16.18	53.49	27.36	9.93	0.02	LINE Average
6	0.2029	50.65	-12.84	63.49	40.70	9.93	0.02	LINE QP
7	0.2863	18.97	-31.66	50.63	9.00	9.93	0.04	LINE Average
8	0.2863	35.00	-25.63	60.63	25.03	9.93	0.04	LINE QP
9	0.3083	24.54	-25.48	50.02	14.57	9.93	0.04	LINE Average
10	0.3083	40.39	-19.63	60.02	30.42	9.93	0.04	LINE QP
11	0.3268	16.17	-33.36	49.53	6.20	9.93	0.04	LINE Average
12	0.3268	38.13	-21.40	59.53	28.16	9.93	0.04	LINE QP
13	0.3428	23.59	-25.54	49.13	13.62	9.93	0.04	LINE Average
14	0.3428	36.30	-22.83	59.13	26.33	9.93	0.04	LINE QP

Temperature	25°C	Humidity	62%
Test Engineer	Kane Liu	Phase	Neutral
Configuration	Normal Link	Test Mode	Mode 5

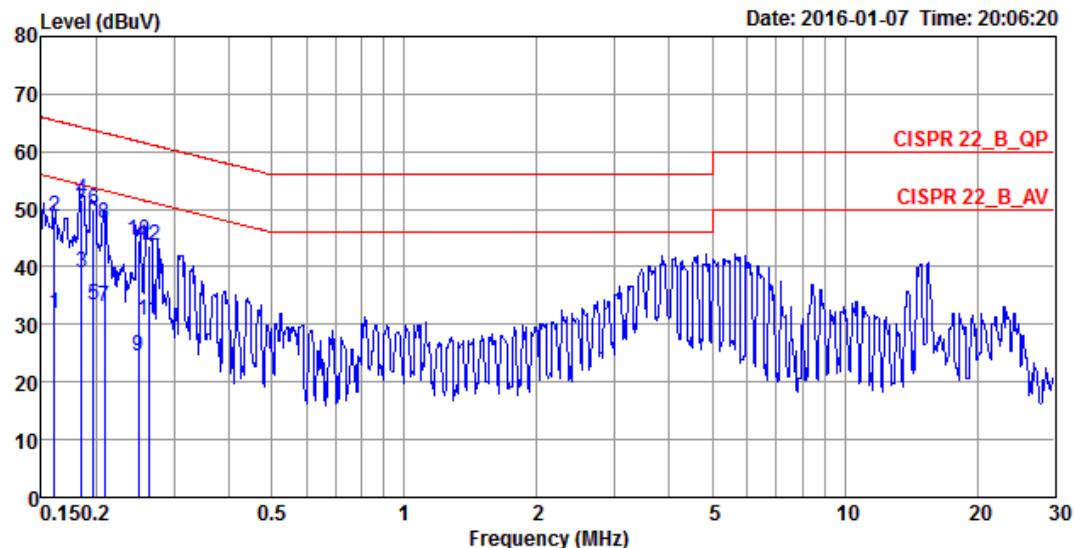

Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable		
						dB	dB	dB
	MHz							
1	0.1607	31.76	-23.67	55.43	21.96	9.78	0.02	NEUTRAL
2	0.1607	48.74	-16.69	65.43	38.94	9.78	0.02	NEUTRAL
3	0.1854	38.93	-15.31	54.24	29.12	9.79	0.02	NEUTRAL
4	0.1854	51.52	-12.72	64.24	41.71	9.79	0.02	NEUTRAL
5	0.1965	33.34	-20.42	53.76	23.53	9.79	0.02	NEUTRAL
6	0.1965	49.79	-13.97	63.76	39.98	9.79	0.02	NEUTRAL
7	0.2083	33.19	-20.08	53.27	23.38	9.79	0.02	NEUTRAL
8	0.2083	47.39	-15.88	63.27	37.58	9.79	0.02	NEUTRAL
9	0.2495	24.40	-27.38	51.78	14.58	9.79	0.03	NEUTRAL
10	0.2495	44.48	-17.30	61.78	34.66	9.79	0.03	NEUTRAL
11	0.2630	30.57	-20.77	51.34	20.75	9.79	0.03	NEUTRAL
12	0.2630	43.56	-17.78	61.34	33.74	9.79	0.03	NEUTRAL

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limit has to be reduced by the amount in dB that the gain of the antenna exceeds 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the power meter.

Power Meter Parameter	Setting
Bandwidth	50MHz bandwidth is greater than the EUT emission bandwidth
Detector	Average

### 4.2.3. Test Procedures

1. Test procedures refer KDB558074 D01 v03r04 section 9.2.3.2.
2. This procedure provides an alternative for determining the RMS output power using a broadband RF average power meter with a thermocouple detector.

### 4.2.4. Test Setup Layout

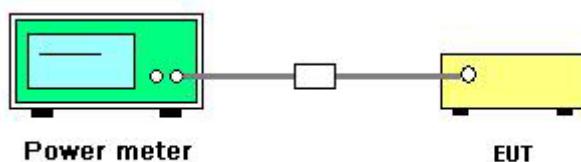

### 4.2.5. Test Deviation

There is no deviation with the original standard.

### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

Temperature	20°C	Humidity	52%
Test Engineer	Kenneth Huang	Configurations	GFSK
Test Date	Oct. 08, 2014		

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
0	2402 MHz	3.63	30.00	Complies
20	2442 MHz	5.64	30.00	Complies
39	2480 MHz	6.86	30.00	Complies

## 4.3. Power Spectral Density Measurement

### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	5-30 % greater than the DTS channel bandwidth.
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100\text{kHz}$
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto couple

### 4.3.3. Test Procedures

1. Test was performed in accordance with KDB558074 D01 v03r04 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 10.2 Method PKPSD (peak PSD).
2. Use this procedure when the maximum conducted output power in the fundamental emission is used to demonstrate compliance. The EUT must be configured to transmit continuously at full power over the measurement duration.
3. Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$  (use of a greater number of measurement points than this minimum requirement is recommended).
4. Use the peak marker function to determine the maximum level in any 3 kHz band segment within the fundamental EBW.
5. The resulting PSD level must be  $\leq 8 \text{ dBm}$ .

### 4.3.4. Test Setup Layout

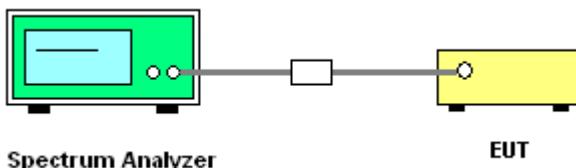

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density


Temperature	20°C	Humidity	52%
Test Engineer	Kenneth Huang	Configurations	GFSK

Channel	Frequency	Power Density (dBm/3kHz)	Power Density Limit (dBm/3kHz)	Result
0	2402 MHz	-13.12	8.00	Complies
20	2442 MHz	-11.07	8.00	Complies
39	2480 MHz	-9.93	8.00	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

### Power Density Plot on Configuration Bluetooth / 2480 MHz

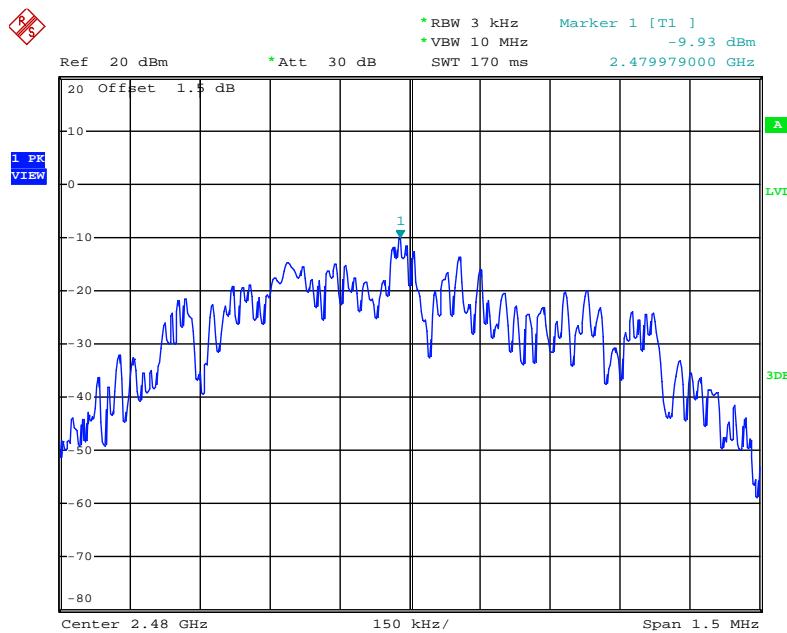

Date: 8.OCT.2014 19:42:58

## 4.4. 6dB Spectrum Bandwidth Measurement

### 4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RBW	100kHz
VBW	$\geq 3 \times$ RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.4.3. Test Procedures

#### For Radiated 6dB Bandwidth Measurement:

1. The transmitter was radiated to the spectrum analyzer in peak hold mode.
2. Test was performed in accordance with KDB558074 D01 v03r04 for Performing Compliance Measurements on Digital Transmission Systems (DTS) - section 8.0 DTS bandwidth=> 8.1 Option 1.
3. Measured the spectrum width with power higher than 6dB below carrier.

### 4.4.4. Test Setup Layout

#### For Radiated 6dB Bandwidth Measurement:

This test setup layout is the same as that shown in section 4.5.4.

### 4.4.5. Test Deviation

There is no deviation with the original standard.

### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of 6dB Spectrum Bandwidth


Temperature	20°C	Humidity	52%
Test Engineer	Kenneth Huang	Configurations	GFSK

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
0	2402 MHz	0.528	1.104	500	Complies
20	2442 MHz	0.522	1.110	500	Complies
39	2480 MHz	0.510	1.110	500	Complies

Note: All the test values were listed in the report.

For plots, only the channel with worse result was shown.

### 6 dB Bandwidth Plot on Configuration Bluetooth / 2480 MHz

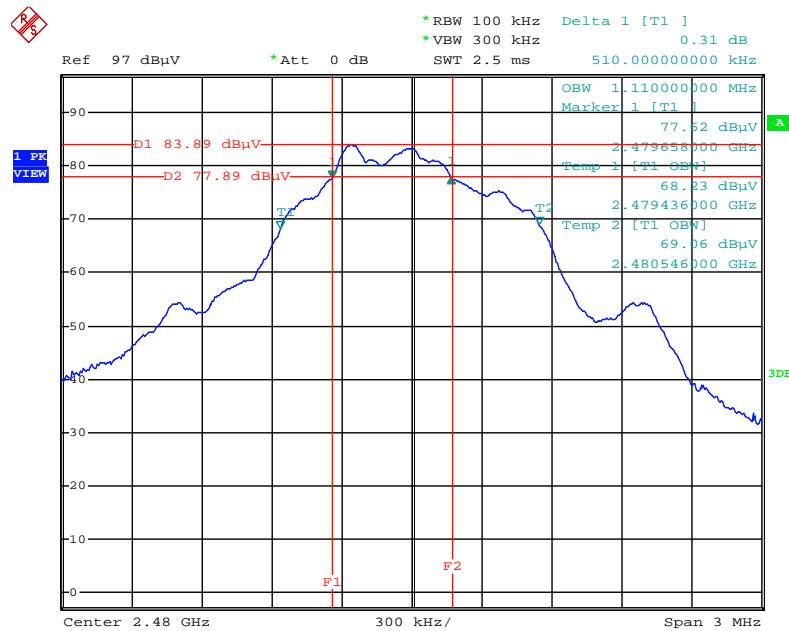

Date: 8.OCT.2014 20:18:32

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz / 300kHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
8. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
9. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

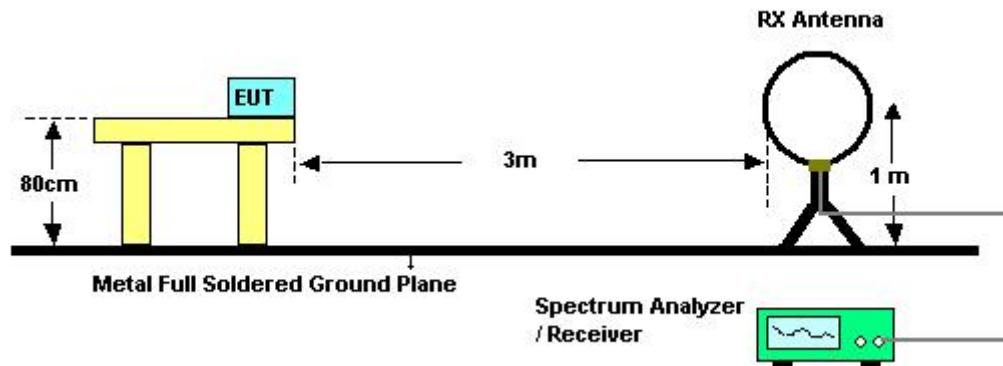

For Radiated Emissions: 30MHz~1GHz

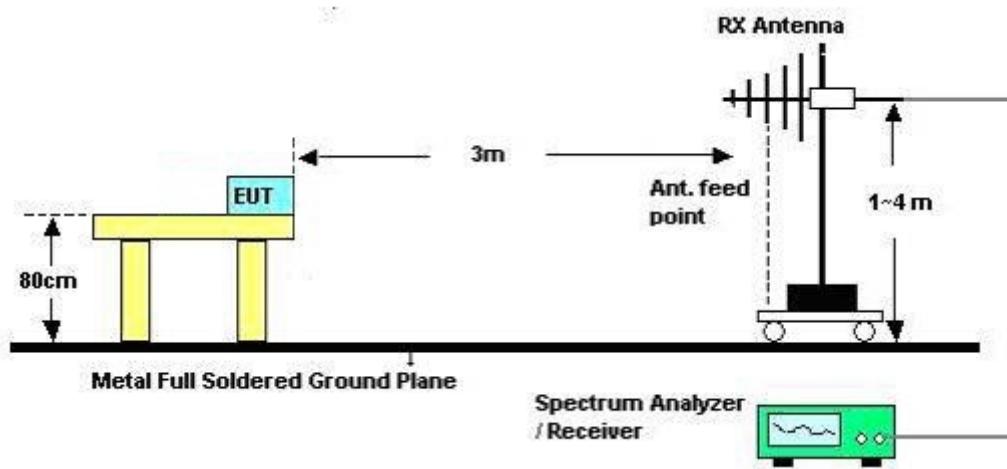

For Radiated Emissions: Above 1GHz

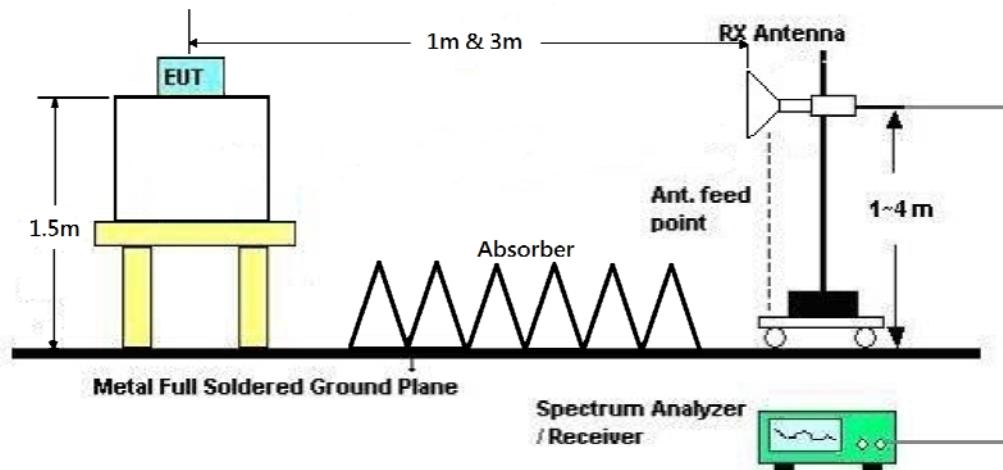

#### **4.5.5. Test Deviation**

There is no deviation with the original standard.

#### **4.5.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24°C	Humidity	52%
Test Engineer	Luke Hsieh / Stim Song	Configurations	Normal Link
Test Date	Jan. 07, 2016	Test Mode	Mode 9

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24°C	Humidity	52%
Test Engineer	Luke Hsieh / Stim Song	Configurations	Normal Link
Test Mode	Mode 9		

##### Horizontal

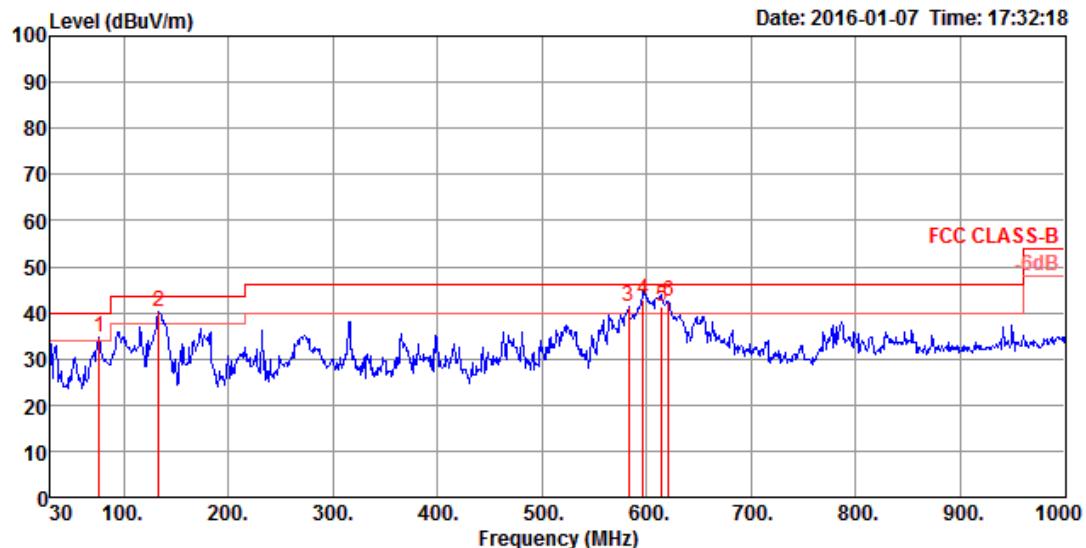

Freq	Level	Limit	Over	Read	Cable			A/Pos	T/Pos	Remark	Pol/Phase
					Line	Limit	Level				
MHz	dBuV/m	dBuV/m		dB	dBuV	dB	dB/m	dB	cm	deg	
1	76.56	34.65	40.00	-5.35	52.93	0.76	13.36	32.40	125	169	Peak HORIZONTAL
2	133.79	40.16	43.50	-3.34	52.96	0.99	18.57	32.36	125	292	Peak HORIZONTAL
3	582.90	41.20	46.00	-4.80	46.31	2.09	25.20	32.40	100	304	Peak HORIZONTAL
4	596.48	42.96	46.00	-3.04	47.87	2.12	25.38	32.41	114	174	QP HORIZONTAL
5	614.91	41.24	46.00	-4.76	45.89	2.14	25.61	32.40	123	166	QP HORIZONTAL
6	620.73	42.39	46.00	-3.61	46.94	2.15	25.70	32.40	100	319	Peak HORIZONTAL

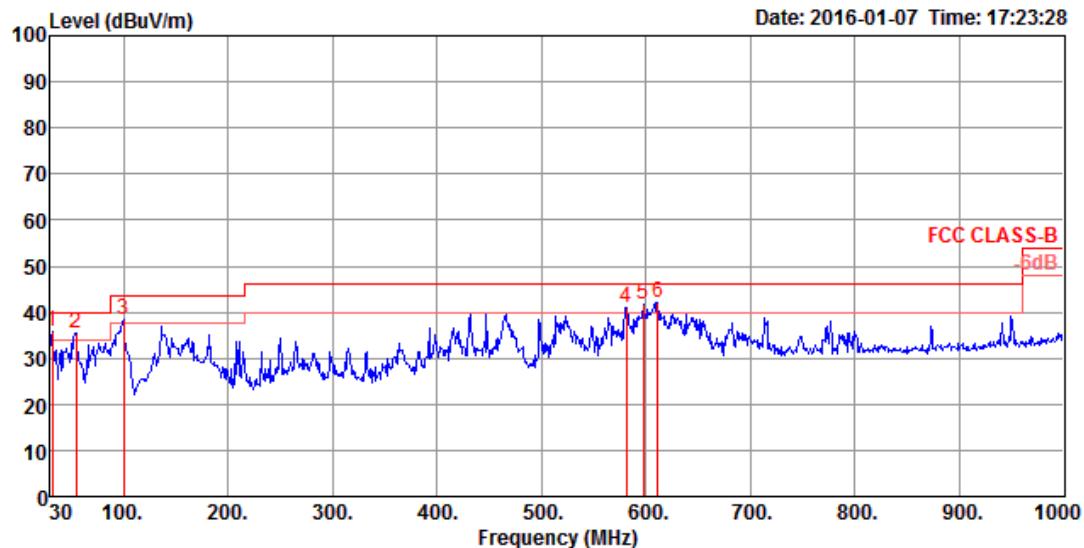**Vertical**


Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	A/Pos	T/Pos	Remark	Pol/Phase
		Line	dB			dBuV	dB						
MHz	dBuV/m	dBuV/m	dB				dB	dB/m		cm	deg		
1	31.94	35.78	40.00	-4.22	43.02	0.50	24.66	32.40	100	266	Peak	VERTICAL	
2	54.25	35.49	40.00	-4.51	52.89	0.64	14.37	32.41	100	234	Peak	VERTICAL	
3	99.84	38.33	43.50	-5.17	52.26	0.86	17.60	32.39	100	3	Peak	VERTICAL	
4	580.96	41.07	46.00	-4.93	46.21	2.09	25.17	32.40	125	291	Peak	VERTICAL	
5	597.45	41.60	46.00	-4.40	46.51	2.12	25.38	32.41	100	164	Peak	VERTICAL	
6	611.03	42.18	46.00	-3.82	46.86	2.14	25.58	32.40	100	164	Peak	VERTICAL	

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


#### 4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	23°C	Humidity	61%
Test Engineer	YC Chen	Configurations	Channel 0

##### Horizontal

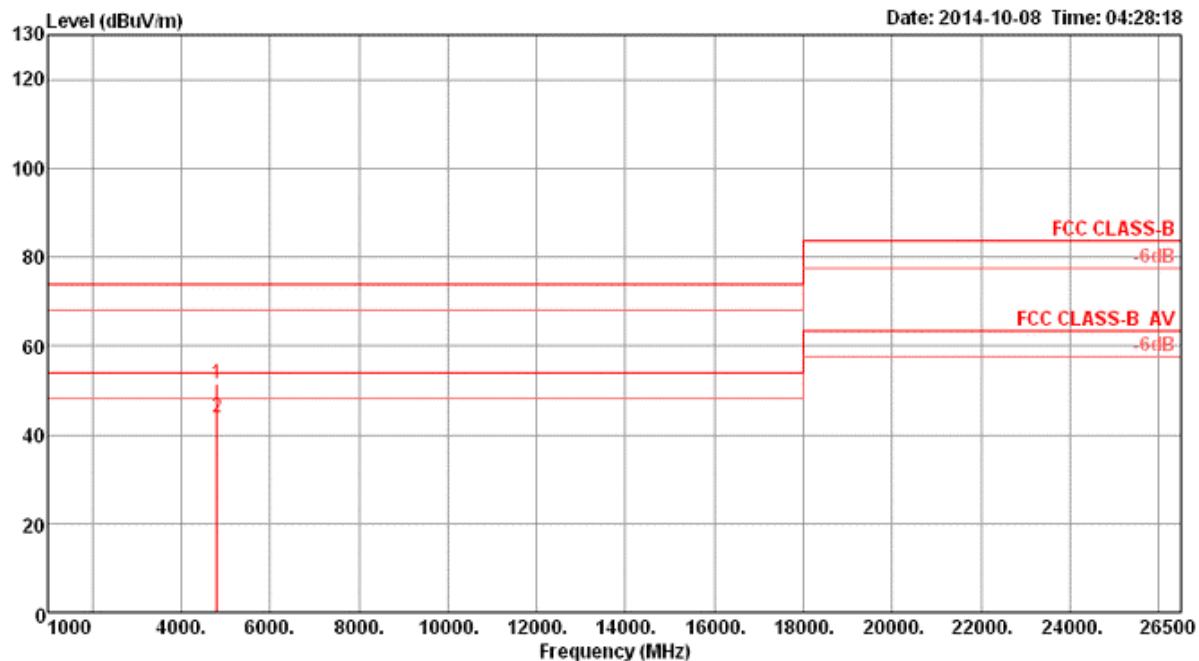


Freq	Level	Limit Line	Over Limit	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
					Cable Loss	Antenna Factor	Preamp Factor				
1	4803.64	51.32	74.00	-22.68	47.31	5.85	33.36	35.20 Peak	123	167	HORIZONTAL
2	4804.47	43.85	54.00	-10.15	39.84	5.85	33.36	35.20 Average	123	167	HORIZONTAL

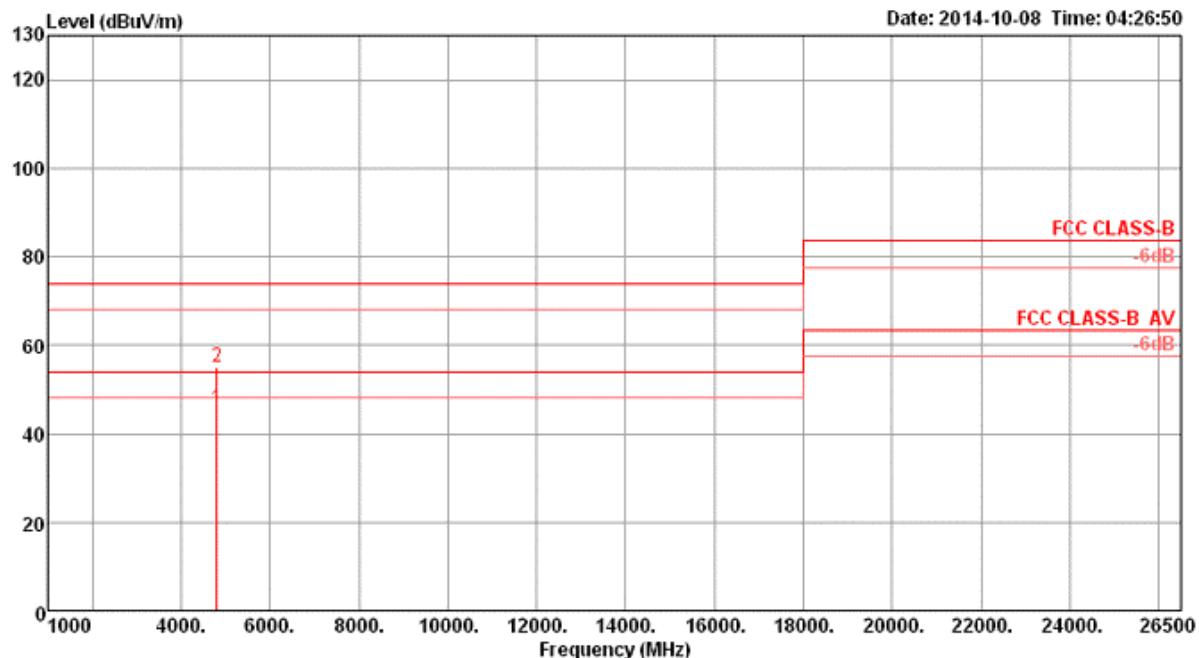
**Vertical**


Freq	Level	Limit	Over	Read	Cable			Preamp	Remark	A/Pos	T/Pos	Pol/Phase
					Line	Limit	Level					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			cm	deg	
1	4803.91	45.80	54.00	-8.20	41.79	5.85	33.36	35.20	Average	147	125	VERTICAL
2	4804.47	55.03	74.00	-18.97	51.02	5.85	33.36	35.20	Peak	147	125	VERTICAL

Temperature	23°C	Humidity	61%
Test Engineer	YC Chen	Configurations	Channel 20

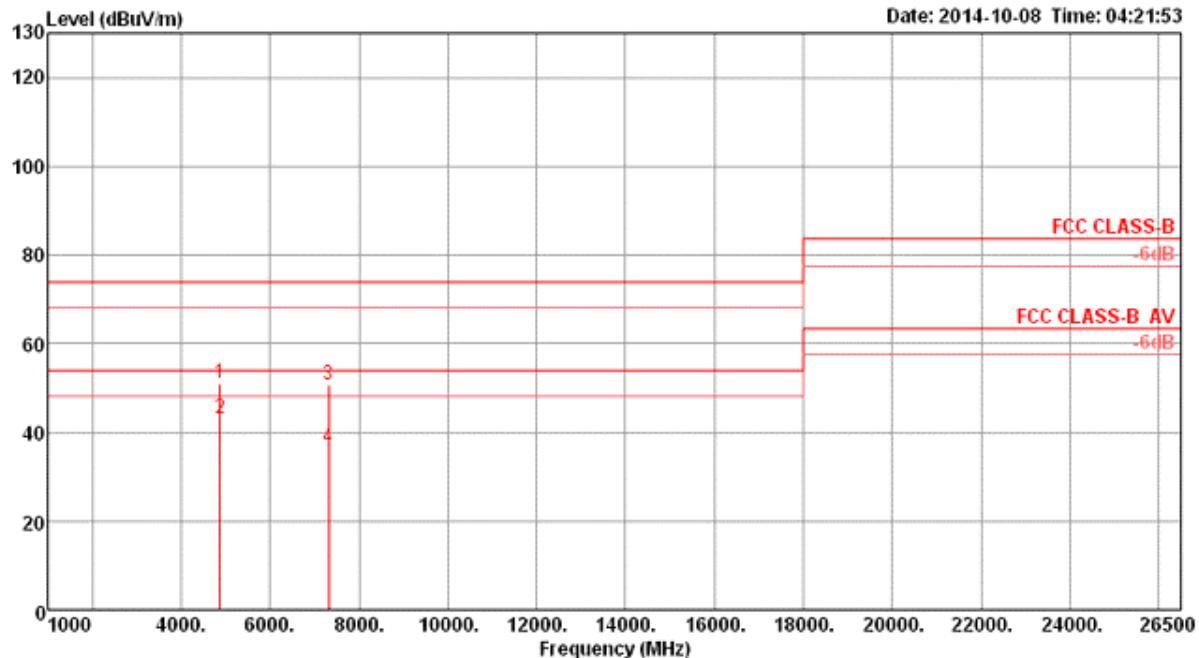
**Horizontal**


Freq	Level	Limit	Over	Read	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase	
					Line	Limit	Level				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4883.62	51.10	74.00	-22.90	46.90	5.92	33.48	35.20	Peak	141	69 HORIZONTAL
2	4883.85	43.18	54.00	-10.82	38.98	5.92	33.48	35.20	Average	141	69 HORIZONTAL
3	7324.33	50.58	74.00	-23.42	42.36	7.14	36.51	35.43	Peak	129	129 HORIZONTAL
4	7326.75	36.63	54.00	-17.37	28.39	7.14	36.53	35.43	Average	129	129 HORIZONTAL

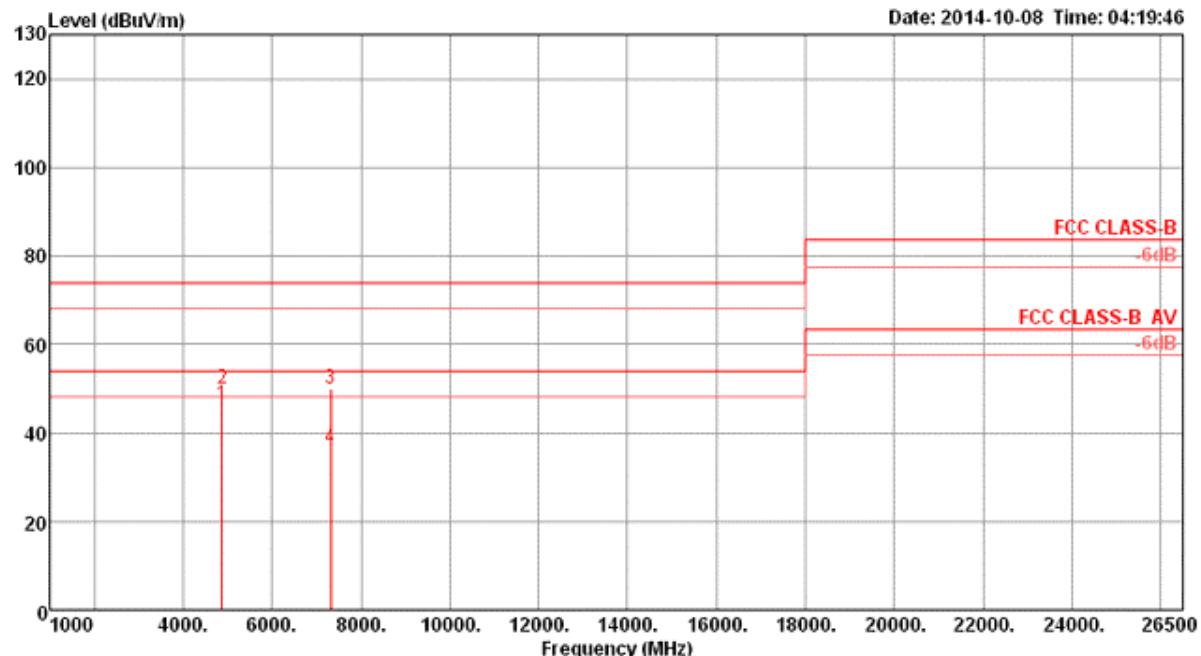
**Vertical**


Freq	Level	Limit	Over	Read	CableAntenna Preamp			A/Pos	T/Pos	Pol/Phase	
					Line	Limit	Level				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	4883.97	46.25	54.00	-7.75	42.05	5.92	33.48	35.20	Average	181	308 VERTICAL
2	4884.43	49.90	74.00	-24.10	45.70	5.92	33.48	35.20	Peak	181	308 VERTICAL
3	7324.80	50.05	74.00	-23.95	41.81	7.14	36.53	35.43	Peak	159	233 VERTICAL
4	7326.53	36.72	54.00	-17.28	28.48	7.14	36.53	35.43	Average	159	233 VERTICAL

Temperature	23°C	Humidity	61%
Test Engineer	YC Chen	Configurations	Channel 39

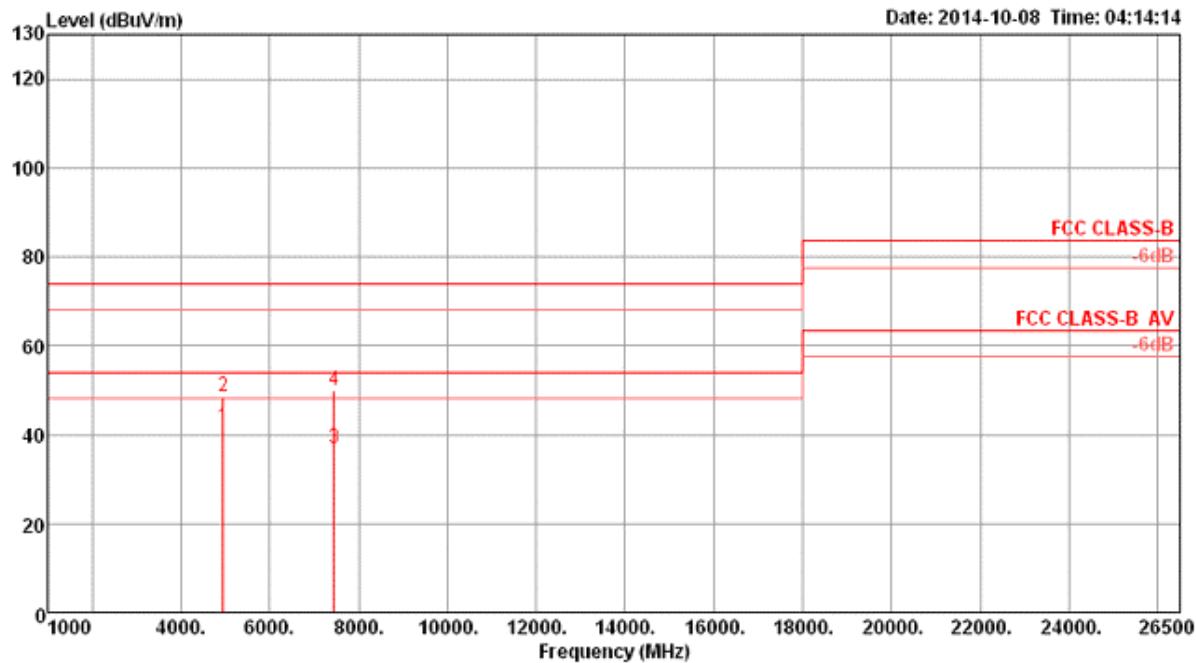**Horizontal**


Freq	Level	Limit		Over Limit	Read Level	Cable Antenna Preamp			A/Pos	T/Pos	Pol/Phase
		Line	dBuV/m			Loss	Factor	Factor			
1	4959.97	41.70	54.00	-12.30	37.26	6.00	33.64	35.20	Average	166	147 HORIZONTAL
2	4960.33	48.49	74.00	-25.51	44.05	6.00	33.64	35.20	Peak	166	147 HORIZONTAL
3	7439.04	37.06	54.00	-16.94	28.65	7.20	36.69	35.48	Average	135	148 HORIZONTAL
4	7440.79	50.00	74.00	-24.00	41.59	7.20	36.69	35.48	Peak	135	148 HORIZONTAL

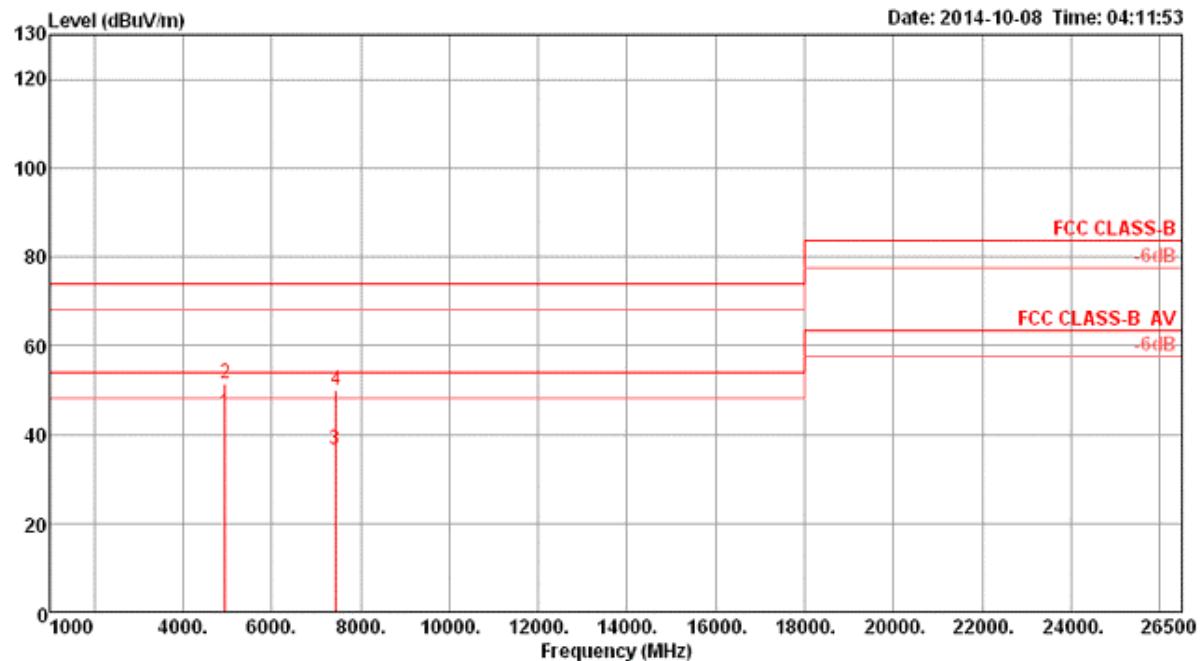**Vertical**


Freq	Level	Limit	Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
					Line	Limit	Level					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			cm	deg	
1	4960.02	44.96	54.00	-9.04	40.52	6.00	33.64	35.20	Average	141	302	VERTICAL
2	4960.31	51.47	74.00	-22.53	47.03	6.00	33.64	35.20	Peak	141	302	VERTICAL
3	7437.50	36.75	54.00	-17.25	28.34	7.20	36.69	35.48	Average	160	165	VERTICAL
4	7438.37	49.98	74.00	-24.02	41.57	7.20	36.69	35.48	Peak	160	165	VERTICAL

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.6. Emissions Measurement

### 4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolt/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average
RBW / VBW (30dBc in any 100 kHz bandwidth emission)	100 kHz / 300 kHz for Peak

### 4.6.3. Test Procedures

#### For Radiated band edges Measurement:

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around band edges.

#### For Radiated Out of Band Emission Measurement:

1. Test was performed in accordance with KDB558074 D01 v03r04 for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 10.1 Unwanted Emissions into Non-Restricted Frequency Bands Measurement Procedure.
2. The radiated emission test is performed on each TX port of operating mode without summing or adding 10log (N) since the limit is relative emission limit.  
Only worst data of each operating mode is presented.

#### **4.6.4. Test Setup Layout**

For Radiated band edges Measurement:

This test setup layout is the same as that shown in section 4.5.4.

For Radiated Out of Band Emission Measurement:

This test setup layout is the same as that shown in section 4.5.4.

#### **4.6.5. Test Deviation**

There is no deviation with the original standard.


#### **4.6.6. EUT Operation during Test**

The EUT was programmed to be in continuously transmitting mode.

#### 4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	23°C	Humidity	61%
Test Engineer	YC Chen	Configurations	Channel 0, 20, 39


##### Channel 0

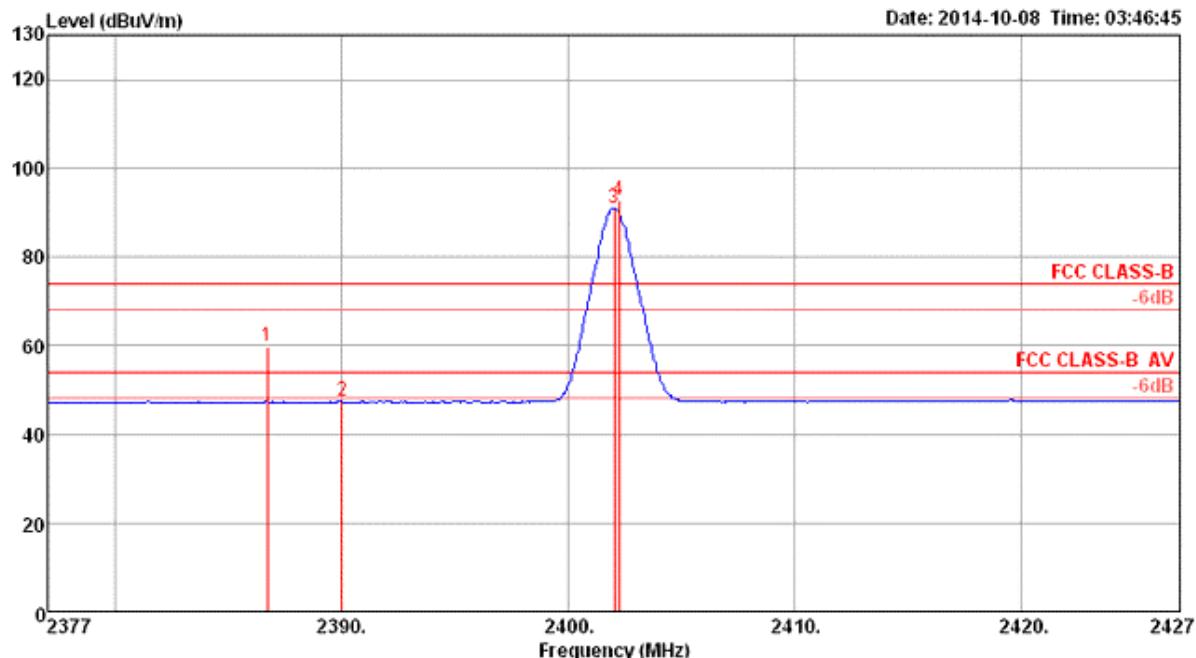

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor		cm	deg	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB				
1 2386.72	59.68	74.00	-14.32	27.54	4.09	28.05	0.00	Peak	184	132	HORIZONTAL
2 2390.00	47.39	54.00	-6.61	15.25	4.09	28.05	0.00	Average	184	132	HORIZONTAL
3 2402.00	90.80			58.62	4.09	28.09	0.00	Average	184	132	HORIZONTAL
4 2402.24	92.56			50.38	4.09	28.09	0.00	Peak	184	132	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2402 MHz.


Note: Both antenna polarizations have been tested and only the worst case was recorded in test report.

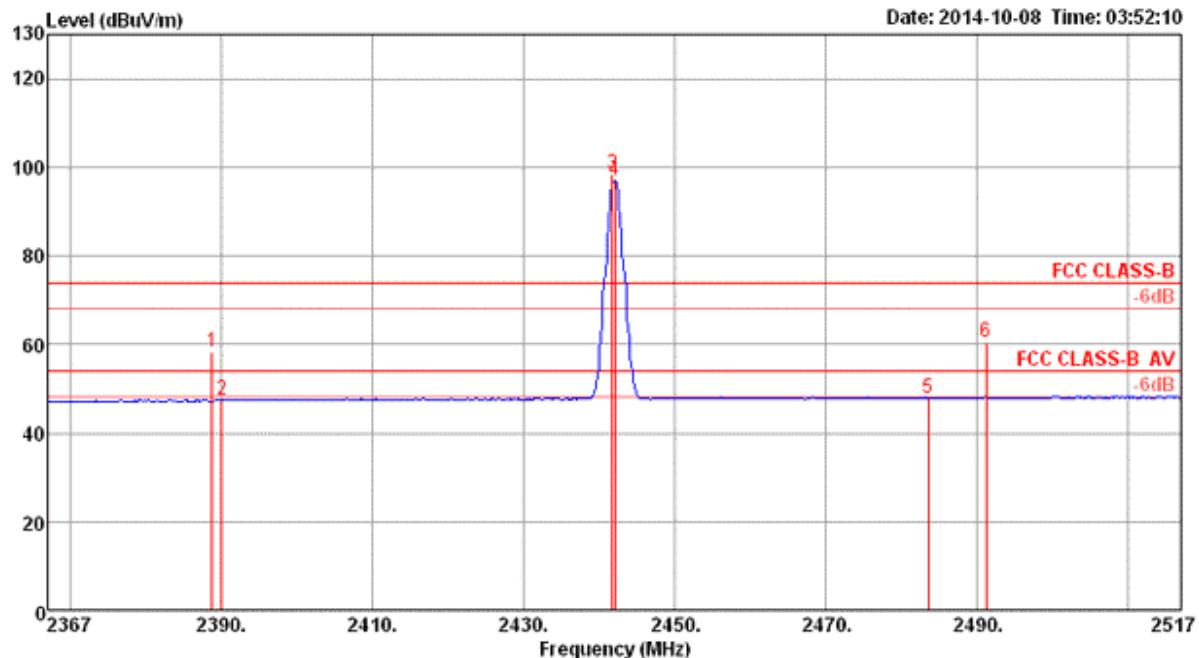**Channel 20**


Freq	Level	Limit	Over	Read	Cable			Antenna	Preamp	A/Pos	T/Pos	Pol/Phase
					Line	Limit	Level					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB			cm	deg	
1 2388.80	58.22	74.00	-15.78	26.08	4.09	28.05	0.00	Peak		199	299	VERTICAL
2 2390.00	47.36	54.00	-6.64	15.22	4.09	28.05	0.00	Average		199	299	VERTICAL
3 2441.76	98.65			16.34	4.13	28.18	0.00	Peak		199	299	VERTICAL
4 2442.00	96.89			14.58	4.13	28.18	0.00	Average		199	299	VERTICAL
5 2483.50	47.77	54.00	-6.23	15.35	4.16	28.26	0.00	Average		199	299	VERTICAL
6 2491.19	60.30	74.00	-13.70	27.83	4.17	28.30	0.00	Peak		199	299	VERTICAL

Item 3, 4 are the fundamental frequency at 2442 MHz.

Note: Both antenna polarizations have been tested and only the worst case was recorded in test report.

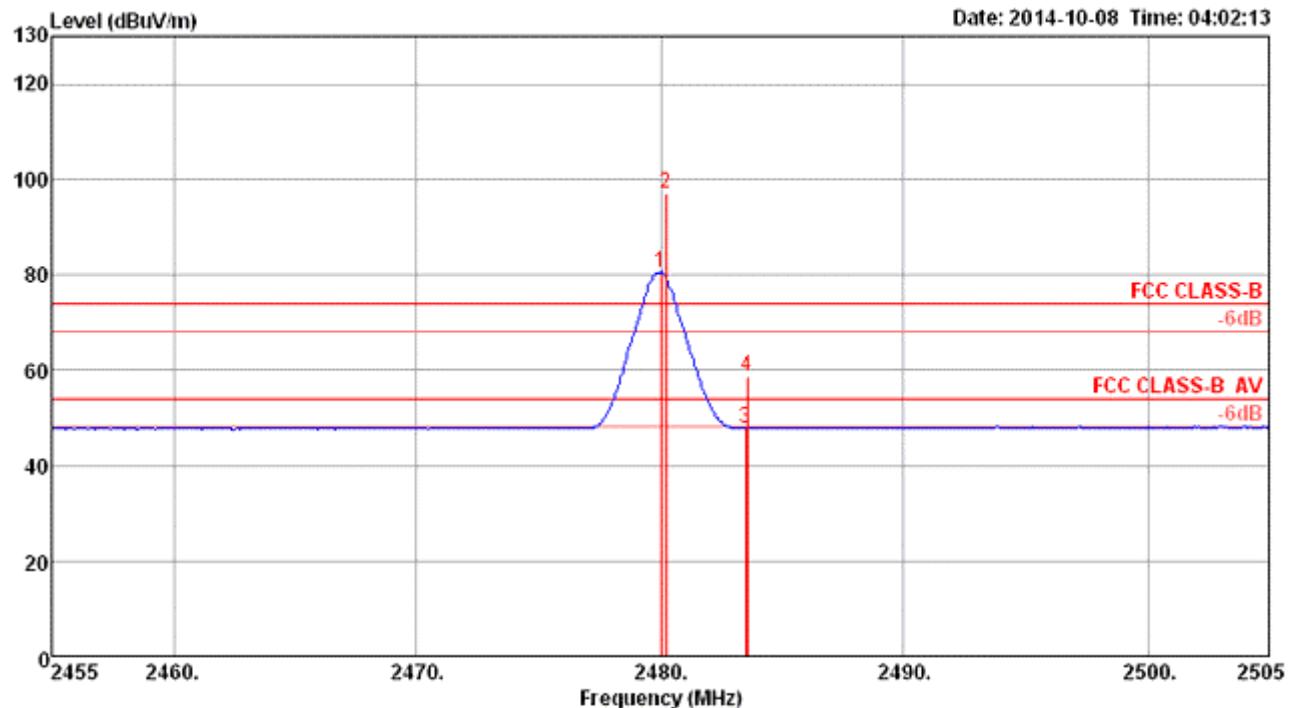**Channel 39**


Freq	Level	Limit Line	Over Limit	Read Level	Cable Antenna Preamp			Remark	A/Pos	T/Pos	Pol/Phase
					Cable Loss	Antenna Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	2480.00	80.54			48.12	4.16	28.26	0.00 Average	183	315	VERTICAL
2	2480.24	97.19			64.77	4.16	28.26	0.00 Peak	183	315	VERTICAL
3	2483.50	47.88	54.00	-6.12	15.46	4.16	28.26	0.00 Average	183	315	VERTICAL
4	2483.58	58.51	74.00	-15.49	26.09	4.16	28.26	0.00 Peak	183	315	VERTICAL


Item 1, 2 are the fundamental frequency at 2480 MHz.

Note: Both antenna polarizations have been tested and only the worst case was recorded in test report.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

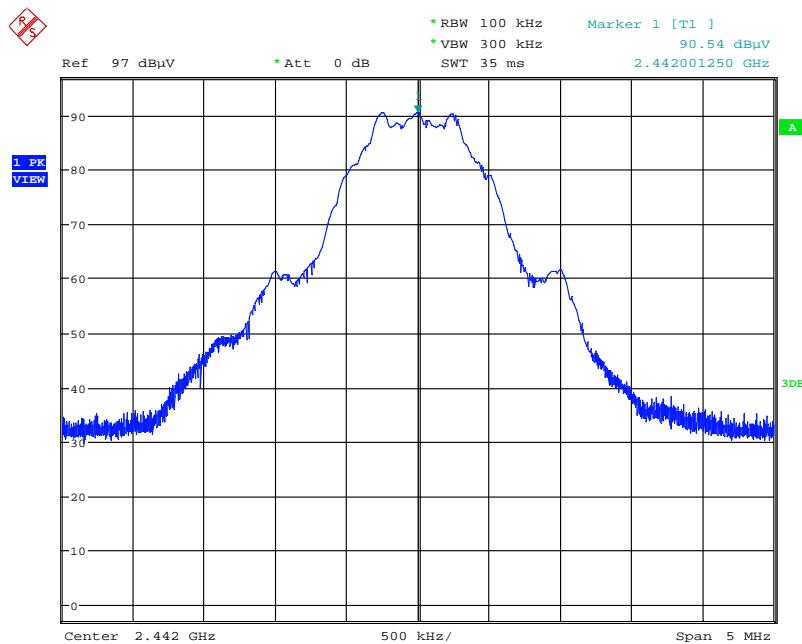
**For Emission not in Restricted Band**
**Plot on Configuration / Reference Level (Vertical)**


Date: 8.OCT.2014 05:27:19

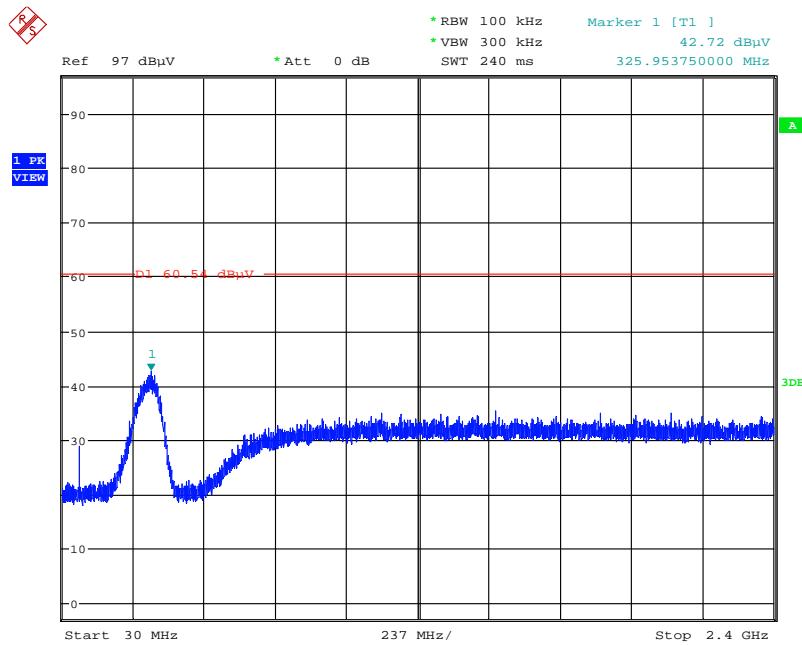
**Plot on Configuration For Bluetooth 4.0 / Channel 0 / 30MHz~2400MHz (down 30dBc) (Vertical)**


Date: 8.OCT.2014 05:28:48

Note: Only the worse polarization (Vertical) is tested and recorded in test report.

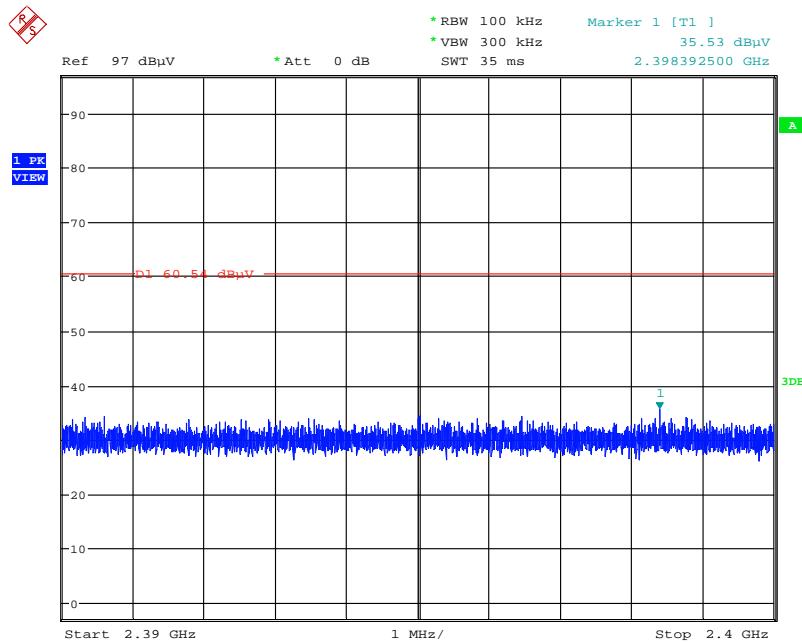**Plot on Configuration For Bluetooth 4.0 / Channel 0 / 2390MHz~2400MHz (down 30dBc) (Vertical)**


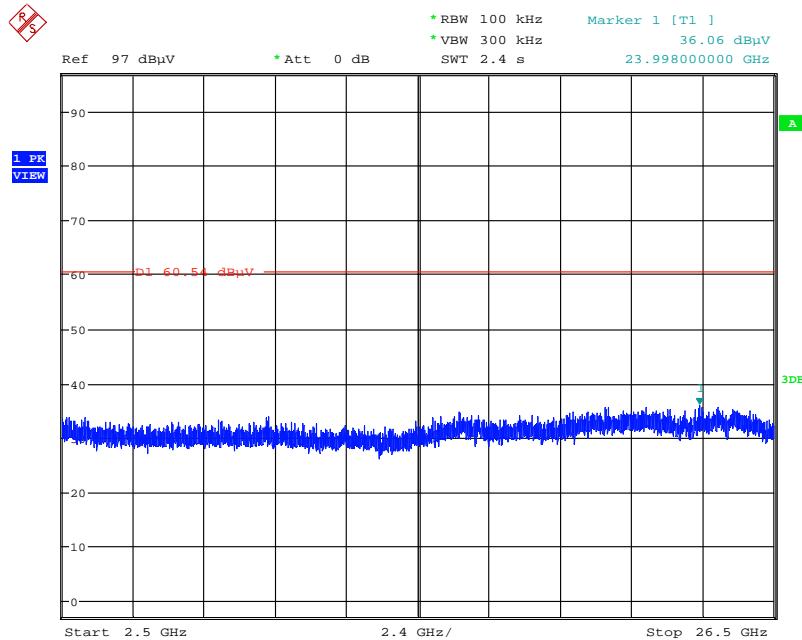
Date: 8.OCT.2014 05:29:14

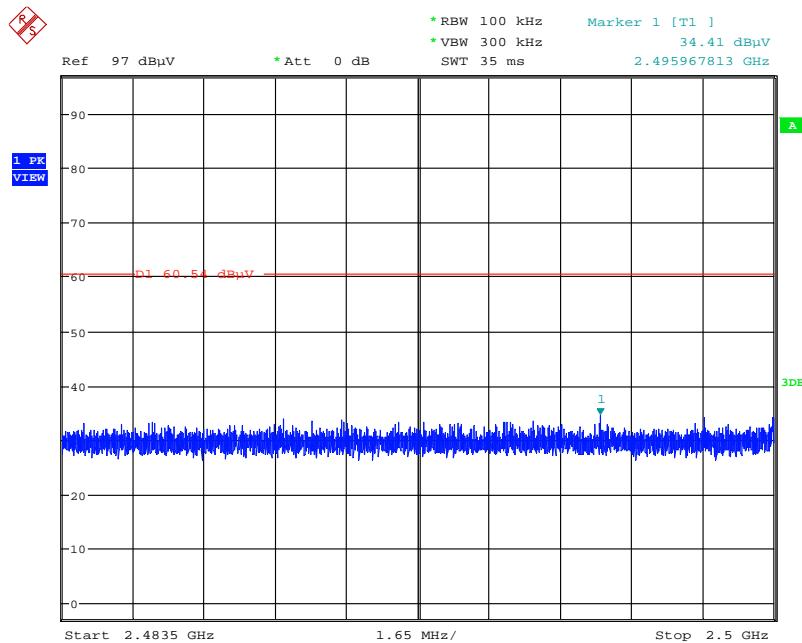**Plot on Configuration For Bluetooth 4.0 / Channel 0 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)**


Date: 8.OCT.2014 05:29:44


Note: Only the worse polarization (Vertical) is tested and recorded in test report.

### Plot on Configuration For Bluetooth 4.0 / Channel 0 / 2500MHz~26500MHz (down 30dBc) (Vertical)




Date: 8.OCT.2014 05:30:32

### Plot on Configuration For Bluetooth 4.0 / Channel 39 / 30MHz~2400MHz (down 30dBc) (Vertical)

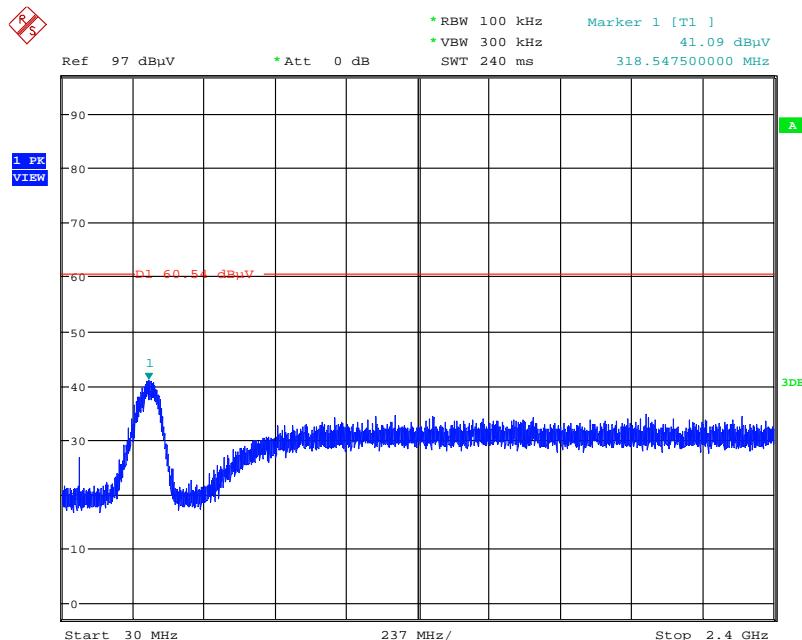


Date: 8.OCT.2014 05:31:06

Note: Only the worse polarization (Vertical) is tested and recorded in test report.

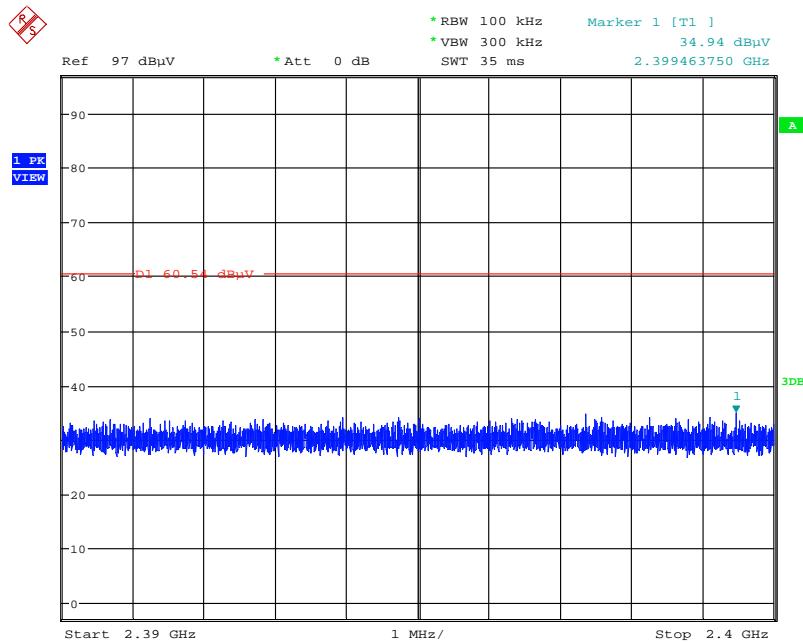**Plot on Configuration For Bluetooth 4.0 / Channel 39 / 2390MHz~2400MHz (down 30dBc) (Vertical)**


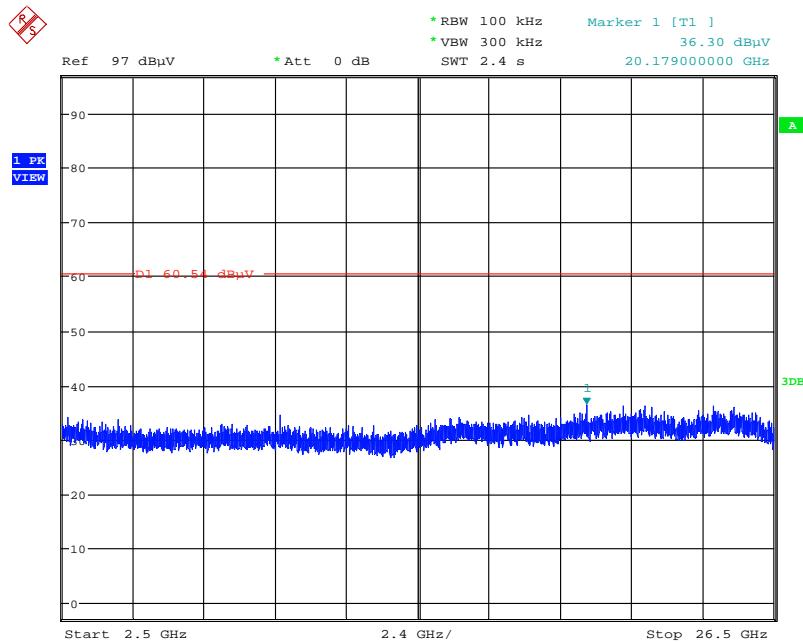
Date: 8.OCT.2014 05:31:38

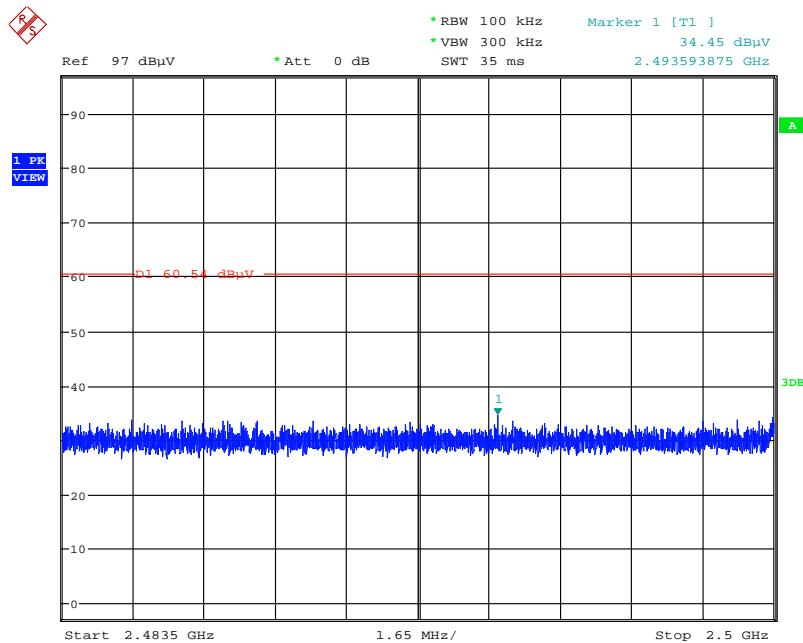**Plot on Configuration For Bluetooth 4.0 / Channel 39 / 2483.5MHz~2500MHz (down 30dBc) (Vertical)**


Date: 8.OCT.2014 05:32:15

Note: Only the worse polarization (Vertical) is tested and recorded in test report.

**Plot on Configuration For Bluetooth 4.0 / Channel 39 / 2500MHz~26500MHz (down 30dBc) (Vertical)**



Date: 8.OCT.2014 05:33:02

**Note:** Only the worse polarization (Vertical) is tested and recorded in test report.

## 4.7. Antenna Requirements

### 4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100355	9 kHz ~ 2.75 GHz	Apr. 23, 2014	Conduction (CO01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9kHz ~ 2.75GHz	Apr. 22, 2015	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150 kHz ~ 100 MHz	Nov. 23, 2013	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Dec. 08, 2015	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127478	9kHz ~ 30MHz	Nov. 11, 2013	Conduction (CO01-CB)
LISN	Schwarzbeck	NSLK 8127	8127647	9kHz ~ 30MHz	Dec. 23, 2015	Conduction (CO01-CB)
Software	Audix	E3	5.410e	-	N.C.R.	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150 kHz ~ 30 MHz	Dec. 04, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	150kHz ~ 30MHz	May 25, 2015	Conduction (CO01-CB)
Software	Audix	E3	6.120210n	-	N.C.R.	Conduction (CO01-CB)
Signal analyzer	R&S	FSV40	100979	9kHz~40GHz	Nov. 29, 2013	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 03, 2014	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 17, 2013	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Sep. 18, 2013	Conducted (TH01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep. 03, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	9170-507	15GHz ~ 40GHz	Feb. 13, 2014	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Dec. 16, 2013	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Oct. 23, 2013	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Receiver	Agilent	N9038A	MY52260123	9kHz ~ 8.4GHz	Jan. 21, 2015	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R.	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R.	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 17, 2013	Radiation (03CH01-CB)

Note: Calibration Interval of instruments listed above is one year.

\*\* Calibration Interval of instruments listed above is two years.

N.C.R. means Non-Calibration required.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Conducted Emission (150kHz ~ 30MHz)	3.2 dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%