

FCC TEST REPORT

FCC ID : QE825011TX27

Applicant : **Interactive Toy Concepts(HK) Ltd.**
7/F., Eu Yan San Tower, 11-15 Chatham Road South, TST, Kowloon,
Hong Kong

Equipment Under Test (EUT) :

Product description : R/C CAR

Model No. : 25011

Standards : FCC 15 Subpart C Paragraph 15.227

Date of Test : Nov. 13, 2007

Test Engineer : Tiger Su

Reviewed By : 

PERPARED BY:
Waltek Services (Shenzhen) Co., Ltd.

8C, West Tower, Aidi Building, No.5003 Binhe Rd, Futian District, Shenzhen 518045,
Guangdong, China.

Tel: 86-755-83551033

Fax: 86-755-83552400

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 TEST SUMMARY.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION	5
4.2 GENERAL DESCRIPTION OF E.U.T.....	5
4.3 DETAILS OF E.U.T.....	5
4.4 DESCRIPTION OF SUPPORT UNITS	5
4.5 STANDARDS APPLICABLE FOR TESTING.....	5
4.6 TEST FACILITY.....	6
4.7 TEST LOCATION.....	6
5 EQUIPMENT USED DURING TEST	7
6 CONDUCTED EMISSION TEST	8
6.1 TEST EQUIPMENT.....	8
6.2 TEST PROCEDURE	8
6.3 CONDUCTED TEST SETUP	9
6.4 EUT OPERATING CONDITION	9
6.5 CONDUCTED EMISSION LIMITS	10
6.6 CONDUCTED EMISSION TEST RESULT.....	10
7 RADIATION EMISSION TEST.....	11
7.1 TEST EQUIPMENT.....	11
7.2 MEASUREMENT UNCERTAINTY.....	11
7.3 TEST PROCEDURE	11
7.4 RADIATED TEST SETUP	12
7.5 SPECTRUM ANALYZER SETUP.....	13
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	13
7.7 SUMMARY OF TEST RESULTS	13
7.8 EUT OPERATING CONDITION	14
7.9 RADIATED EMISSIONS LIMIT.....	14
7.10 RADIATED EMISSIONS TEST RESULT.....	15
7.11 RADIATED EMISSION TEST DATA.....	15
8 OCCUPIED BANDWIDTH	17
8.1 TEST PROCEDURE	17
9 PHOTOGRAPHS OF TESTING.....	19
9.1 RADIATION EMISSION TEST VIEW	19
10 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	20
10.1 EUT - FRONT VIEW	20
10.2 EUT - BACK VIEW	20
10.3 PCB- FRONT VIEW	21

10.4	PCB- BACK VIEW.....	21
11	FCC ID LABEL.....	22

3 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (25MHz to 1GHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2003	ANSI C63.4: 2003	Class B	N/A

4 General Information

4.1 Client Information

Applicant: Interactive Toy Concepts(HK) Ltd.
Address of Applicant: 7/F., Eu Yan San Tower, 11-15 Chatham Road South, TST, Kowloon, Hong Kong
Manufacturer: Interactive Toy Concepts (HK) Ltd.
Address: 7/F., Eu Yan San Tower, 11-15 Chatham Road South, TST, Kowloon, Hong Kong

4.2 General Description of E.U.T.

Product description: R/C CAR
Model No.: 25011

4.3 Details of E.U.T.

Power Supply: TX: DC 9V Battery

4.4 Description of Support Units

The EUT has been tested as an independent device unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for R/C CAR. The standards used were FCC 15 Paragraph 15.227, Paragraph 15.205, Paragraph 15.209, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC – Registration No.: 97379**

Shenzhen Academy Of Metrology and Quality Inspection EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 97379, April 20, 2006.

4.7 Test Location

All Emissions tests were performed at:-

Bldg. of Metrology and Quality Inspection, Longzhu Road, Nanshan District, Shenzhen, Guandong, China

5 Equipment Used during Test

Conducted Emission Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	CE Variac	GZ Debao Factory	TS/DGC ₂ -5	N/A	N/A	N/A
2	LISN	ROHDE & SCHWARZ	ENV216	N/A	18-11-2006	17-11-2007
3	Shielding Room	Frankonia	12 x 4 x 4 m ³	N/A	N/A	N/A
4	EMI Receiver	ROHDE & SCHWARZ	ESCS30	830245/009	18-11-2006	17-11-2007
5	Coaxial Cable	SOLID	2m	N/A	18-11-2006	17-11-2007
Radiated Emission Test						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due date
1	3m Semi- Anechoic Chamber	Albatross Projects	9X6X6	N/A	18-11-2006	17-11-2007
2	EMI Test Receiver	ROHDE & SCHWARZ	ESCS30	830245/009	18-11-2006	17-11-2007
3	EMI Test Software	ROHDE & SCHWARZ	ES-K1	N/A	N/A	N/A
4	Coaxial cable	Solid	N/A	N/A	18-11-2006	17-11-2007
5	Bilog Antenna	Chase	CBL6112B	2591	18-11-2006	17-11-2007
6	Horn Antenna	ROHDE & SCHWARZ	HF906	100014	18-11-2006	17-11-2007
7	Loop Antenna	SCHWARZBECK	FMZB1516	N/A	18-11-2006	17-11-2007
Common Used Equipment						
Item	Test Equipment	Manufacturer	Model No.	Series No.	Cal. Date	Due date
1	Temperature, Humidity & Barometer	OREGON SCIENTIFIC	BA-888	EMC0001 to EMC0004	18-11-2006	17-11-2007
2	DMM	FLUKE	73	70681569 or 70671122	18-11-2006	17-11-2007

6 Conducted Emission Test

Product Name:	R/C CAR
Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 Test Equipment


Please refer to Section 5 this report.

6.2 Test Procedure

1. The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

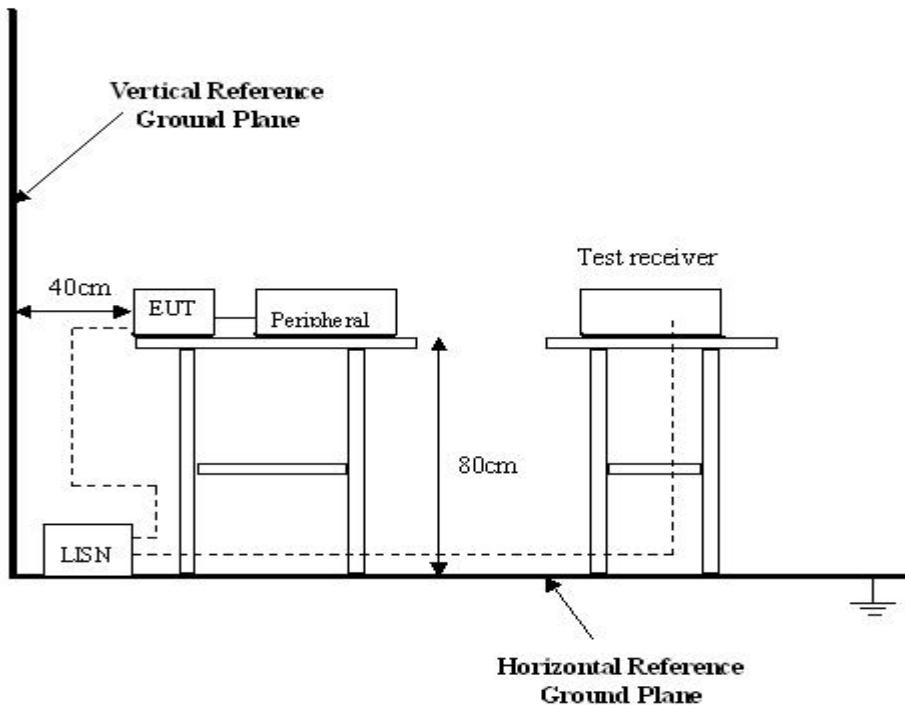

6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4:2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

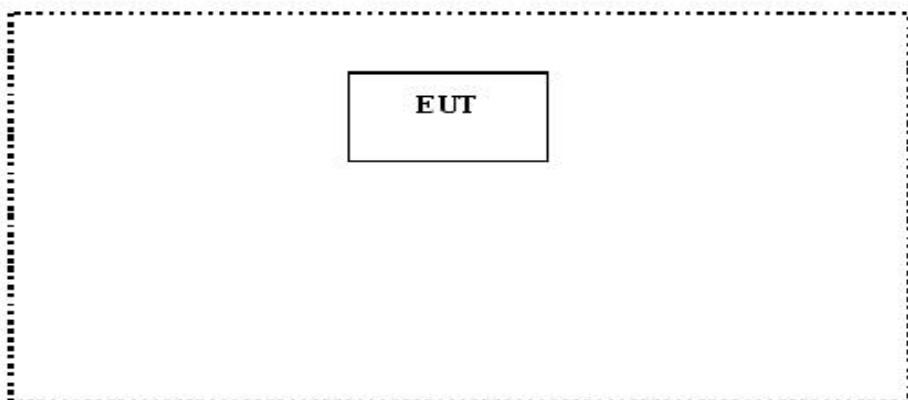

6.5 Conducted Emission Limits

66-56 dB μ V/m between 0.15MHz & 0.5MHz

56 dB μ V/m between 0.5MHz & 5MHz

60 dB μ V/m between 5MHz & 30MHz

Note: In the above limits, the tighter limit applies at the band edges.

6.6 Conducted Emission Test Result

Owing to the DC operation of EUT, this test is not performed.

7 Radiation Emission Test

Product Name:	R/C CAR
Test Requirement:	FCC Part15 Paragraph 15.227
Test Method:	Based on FCC Part15 Paragraph 15.33
Test Date:	Nov.13, 2007
Frequency Range:	25MHz to 1GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

7.1 Test Equipment

Please refer to Section 5 this report.

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on ANSI C63.4:2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at SMQ EMC Lab is +4.0 dB.


7.3 Test Procedure

1. For the radiated emissions test, since the EUT does not have a power source, there was no connection to AC outlets.
2. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
3. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB μ V of specification limits), and are distinguished with a "Qp" in the data table.
4. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.

5. For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
6. The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4:2003, The specification used in this report was the FCC Part15 Paragraph 15.209, Paragraph 15.227 limits.

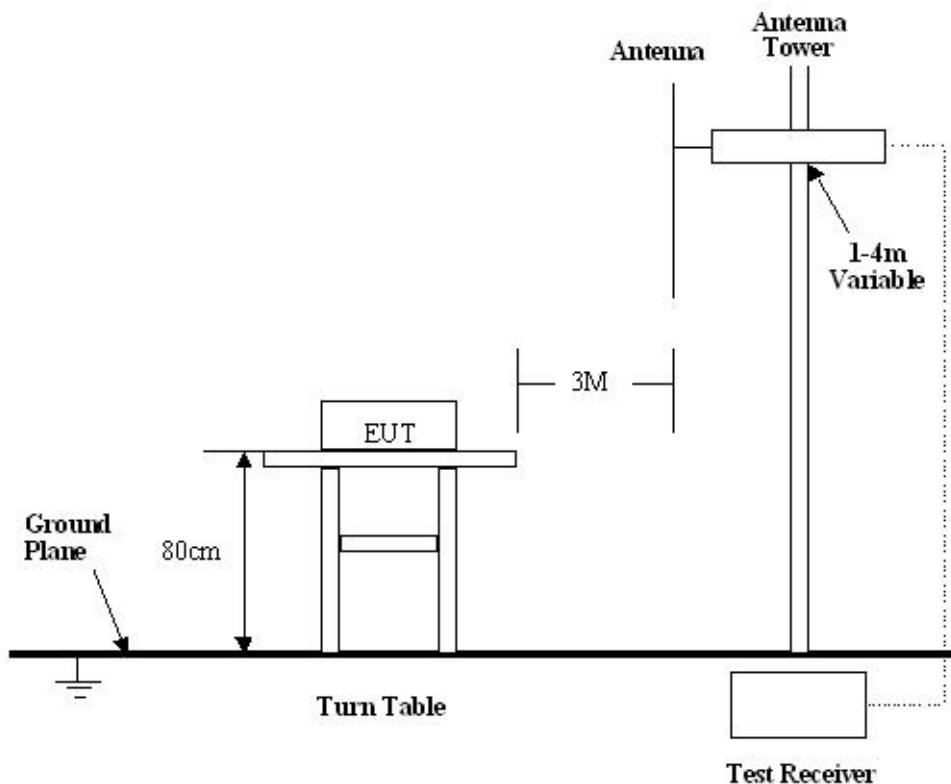

7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.227 Rules, the system was tested to 1000 MHz.

Start Frequency	25 MHz
Stop Frequency	1000 MHz
Sweep Speed Auto	
IF Bandwidth	100 kHz
Video Bandwidth.....	1 MHz
Quasi-Peak Adapter Bandwidth	120 kHz
Quasi-Peak Adapter Mode.....	Normal
Resolution Bandwidth	1MHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Summary of Test Results

According to the data in section 7.10, the EUT complied with [the FCC Part15 Paragraph 15.227](#) standards.

7.8 EUT Operating Condition

Same as section 6.4 of this report.

7.9 Radiated Emissions Limit

A. FCC Part 15 subpart C Paragraph 15.227 Limit

Fundamental Frequency(MHZ)	Field Strength of Fundamental
	dBuV/m
27.145	80

Note:(1) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note: (1) RF Voltage(dBuV)=20 log RF Voltage(uV)
 (2) In the Above Table,the tighter limit applies at the band edges.
 (3) Distance refers to the distance in meters between the measuring instrument antenna.

7.10 Radiated Emissions Test Result

Formula of conversion factors: the field strength at 3m was established by adding The meter reading of the spectrum analyser (which is set to read in units of dBuV) To the antenna correction factor supplied by the antenna manufacturer. The antenna Correction factors are stated in terms of dB. The gain of the pressleter was accounted For in the spectrum analyser meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS
33 20dBuV+10.36dB=30.36dBuV/m @3m

7.11 Radiated Emission Test Data

Test Item:	Radiated Emission Test Data
Test Voltage:	DC 9V
Test Mode:	TX On
Temperature:	24 °C
Humidity:	52%RH
Test Result:	PASS

Frequency (MHz)	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
27.145	Vertical	61.25	80.0	18.75	1.5	45
27.145	Horizontal	59.37	80.0	20.63	1.2	45
54.290	Horizontal	27.17	40.0	12.83	1.0	60
81.435	Horizontal	26.79	40.0	13.21	1.8	120
108.580	Horizontal	28.82	43.5	14.68	2.0	90
135.725	Horizontal	29.93	43.5	13.57	1.5	45
162.870	Horizontal	32.50	43.5	11.00	1.5	60
190.015	Horizontal	32.62	43.5	10.88	1.0	90
217.160	Horizontal	32.75	46.0	13.25	1.0	100
244.305	Horizontal	31.43	46.0	14.57	1.8	120
271.450	Horizontal	31.22	46.0	14.78	2.0	120
54.290	Vertical	28.28	40.0	11.72	1.0	180
81.435	Vertical	28.96	40.0	11.04	1.5	100
108.580	Vertical	30.17	43.5	13.33	1.2	90
135.725	Vertical	31.29	43.5	12.21	1.0	90
162.870	Vertical	33.38	43.5	10.12	2.0	45
190.015	Vertical	34.45	43.5	9.05	1.5	100
217.160	Vertical	35.62	46.0	10.38	1.5	60
244.305	Vertical	35.76	46.0	10.24	2.0	120
271.450	Vertical	35.88	46.0	10.12	1.0	100

8 Occupied Bandwidth



Rules of test : FCC Part15.227
Test Date: Nov. 13, 2007
Test mode: TX On
Temperature: 24 °C
Humidity: 52%RH

8.1 Test Procedure

1. The field strength of any emissions which appear outside of the band shall not exceed the general radiated emission limits in section 15.209.
2. The useful radiated emission form the EUT was detected by the spectrum analyser with peak detector.
3. The result has been complied with the 15.227 (b), see the following plot:



Frequency MHz	Emission dBuV/m	Limit dBuV/m
26.96	35.15	40
27.28	36.35	40

The graph as below.

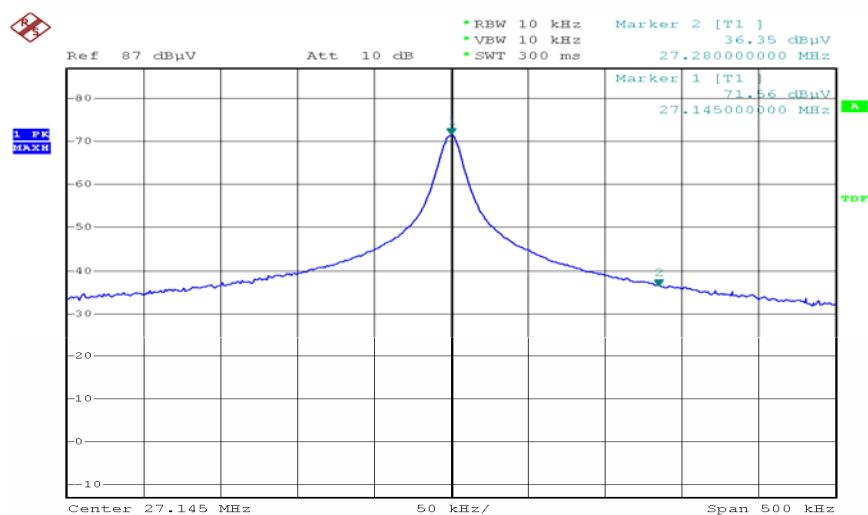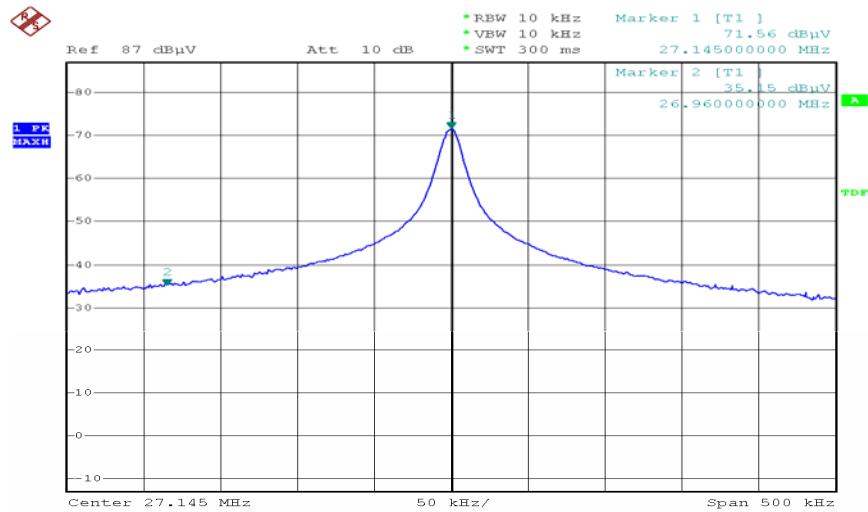

9 Photographs of Testing

9.1 Radiation Emission Test View

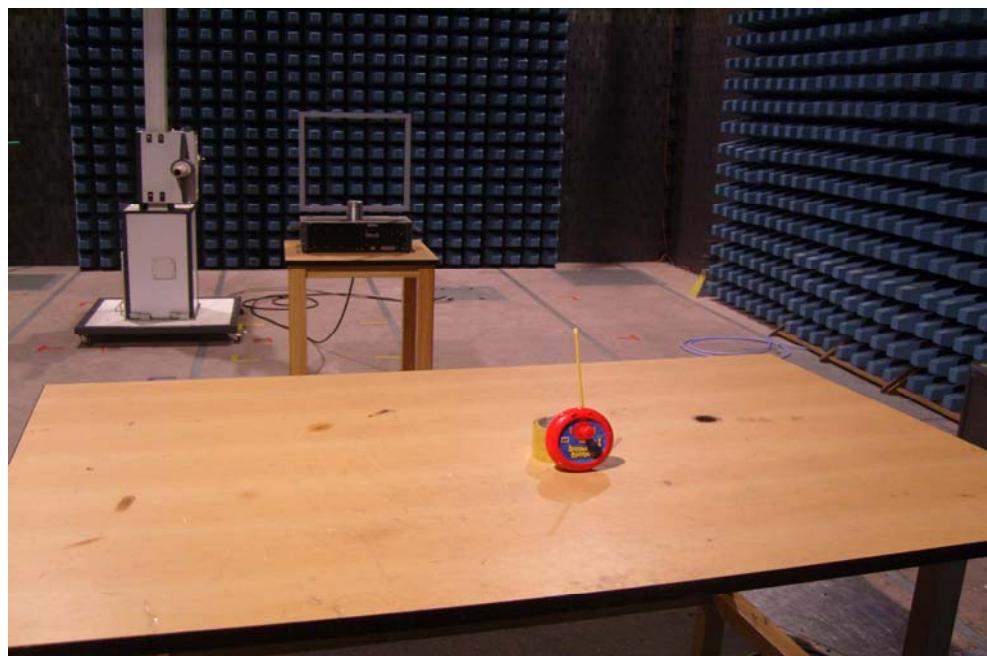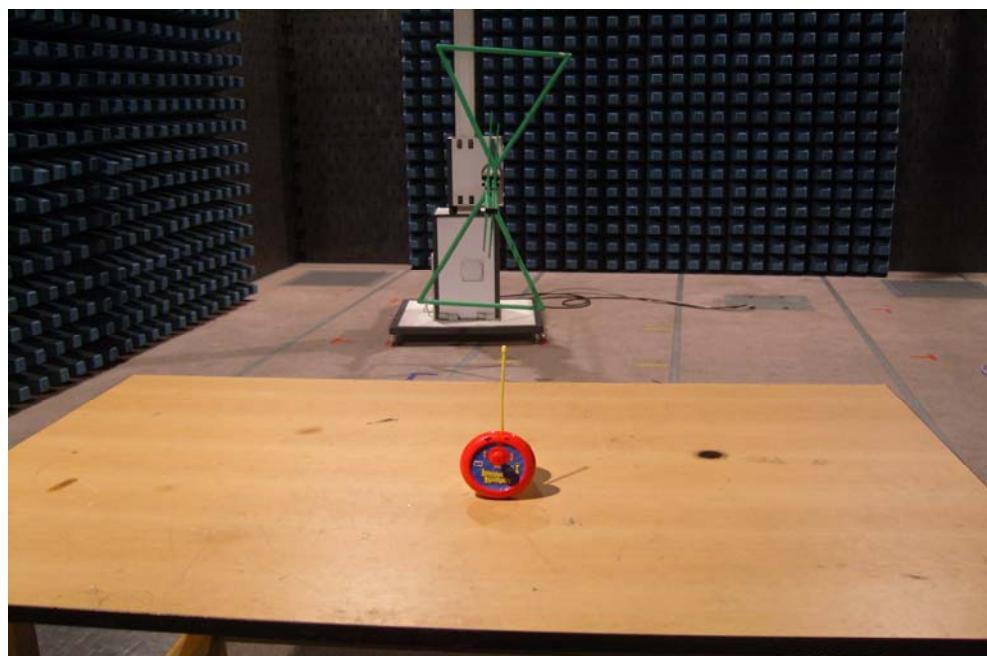

10 Photographs - Constructional Details


10.1 EUT - Front View




10.2 EUT - Back View



10.3 PCB- Front View

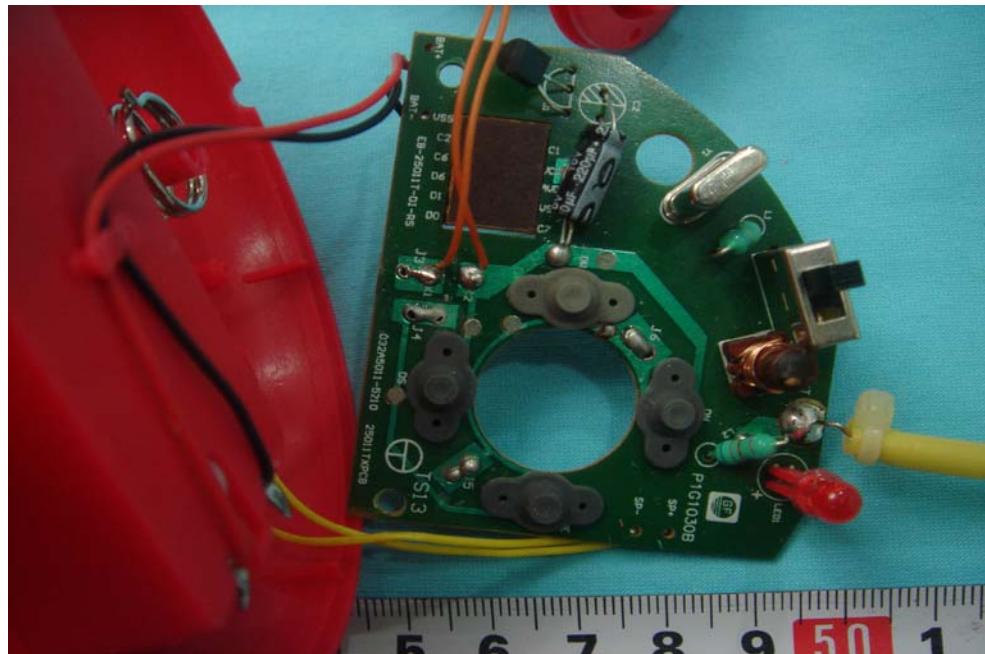

10.4 PCB- Back View

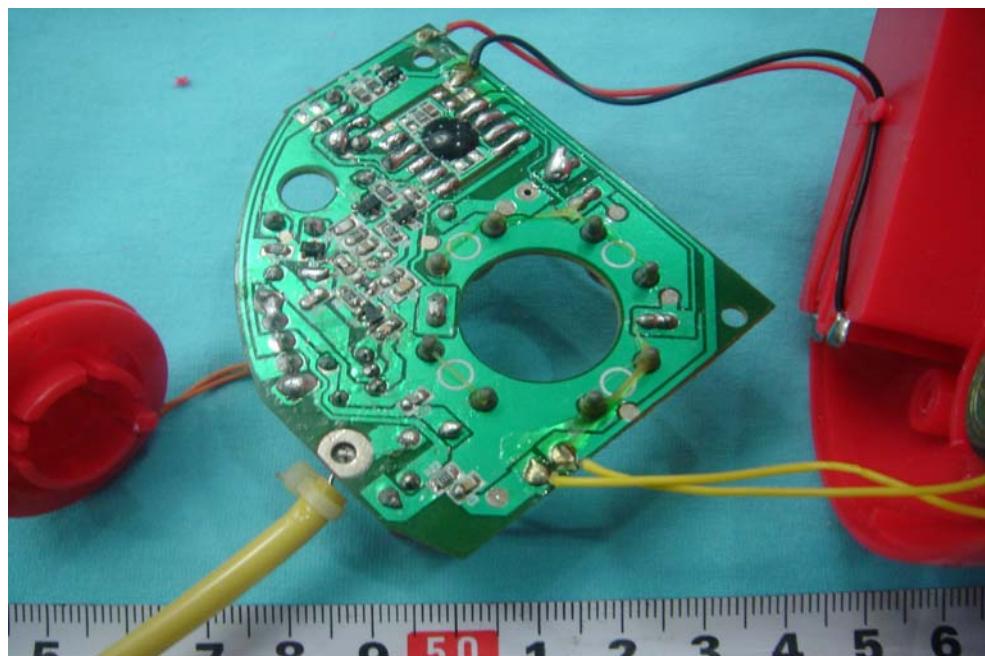

11 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Mark Location

