

FCC TEST REPORT

FCC ID : QE844070TX49

Applicant : Interactive Toy Concepts (HK) Ltd.

Address of Applicant: Unit 709, 7/F., Tower 2, Cheung Sha Wan Plaza, No. 833
Cheung Sha Wan Road, Kowloon, Hong Kong

Equipment Under Test (EUT) :

Product description : RC Plane

Model No. : RC Plane

Standards : FCC 15 Subpart C Paragraph 15.235

Date of Test : Jan.13, 2011

Test Engineer : (Olic huang/Engineer)



Reviewed By : (Philo zhong/Maganger)



PREPARED BY:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen
518105, China

Tel: +86-755-27553488

Fax: +86-755-27553686

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS.....	2
3 TEST SUMMARY.....	4
4 GENERAL INFORMATION.....	5
4.1 CLIENT INFORMATION.....	5
4.2 GENERAL DESCRIPTION OF E.U.T.....	5
4.3 DETAILS OF E.U.T.....	5
4.4 DESCRIPTION OF SUPPORT UNITS.....	5
4.5 STANDARDS APPLICABLE FOR TESTING.....	5
4.6 TEST FACILITY.....	6
4.7 TEST LOCATION.....	6
5 EQUIPMENT USED DURING TEST	7
6 CONDUCTED EMISSION TEST	10
6.1 TEST EQUIPMENT.....	10
6.2 TEST PROCEDURE	10
6.3 CONDUCTED TEST SETUP	11
6.4 EUT OPERATING CONDITION	11
6.5 CONDUCTED EMISSION LIMITS	12
6.6 CONDUCTED EMISSION TEST RESULT	12
7 RADIATION EMISSION TEST.....	13
7.1 TEST EQUIPMENT.....	13
7.2 MEASUREMENT UNCERTAINTY.....	13
7.3 TEST PROCEDURE	14
7.4 RADIATED TEST SETUP	14
7.5 SPECTRUM ANALYZER SETUP.....	15
7.6 CORRECTED AMPLITUDE & MARGIN CALCULATION	16
7.7 SUMMARY OF TEST RESULTS.....	16
7.8 EUT OPERATING CONDITION	17
7.9 RADIATED EMISSIONS LIMIT.....	17
7.10 RADIATED EMISSIONS TEST RESULT	18
7.11 RADIATED EMISSION TEST DATA.....	19
8 ANTENNA REQUIREMENT.....	20
9 OCCUPIED BANDWIDTH	20
10 PHOTOGRAPHS OF TESTING.....	22
11 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	23
11.1 EUT – FRONT VIEW	23
11.2 EUT – BACK VIEW	23
11.3 PCB – FRONT VIEW	24
11.4 PCB – BACK VIEW	24

12 **FCC ID LABEL**25

3 Test Summary

Test	Test Requirement	Test Method	Class / Severity	Result
Radiated Emission (30MHz to 1GHz)	FCC PART 15: 2008	ANSI C63.4: 2003	N/A	PASS
Conducted Emission (150KHz to 30MHz)	FCC PART 15: 2008	ANSI C63.4: 2003	N/A	N/A

4 General Information

4.1 Client Information

Applicant: Interactive Toy Concepts (HK) Ltd.
Address of Applicant: Unit 709, 7/F., Tower 2, Cheung Sha Wan Plaza, No. 833
Cheung Sha Wan Road, Kowloon, Hong Kong

Manufacturer: Interactive Toy Concepts (HK) Ltd.
Address: Unit 709, 7/F., Tower 2, Cheung Sha Wan Plaza, No. 833
Cheung Sha Wan Road, Kowloon, Hong Kong

4.2 General Description of E.U.T.

Product description: RC Plane
Model No.: RC Plane
Working Frequency: 49.86MHz

4.3 Details of E.U.T.

Power Supply: TX: DC 9.0V , Battery

4.4 Description of Support Units

The EUT has been tested as an independent device unit.

4.5 Standards Applicable for Testing

The customer requested FCC tests for a RC Plane. The standards used were FCC 15 Paragraph 15.235, Paragraph 15.205, Paragraph 15.209, Paragraph 15.31, Paragraph 15.33, Paragraph 15.35.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration 7760A, Aug.03,2010

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, June 24, 2008. compliance

4.7 Test Location

All Emissions tests were performed at:-

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District, Shenzhen 518105, China.

5 Equipment Used during Test

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
EMC Analyzer	Agilent/ E7405A	MY45114943	W2008001	9k-26.5GHz	Aug-03-10	Aug-02-11	Wws20081596	±1dB
Trilog Broadband Antenne 30-3000 MHz	SCHWARZB ECK MESS-ELEKTROM / VULB9163	336	W2008002	30-3000 MHz	Aug-03-10	Aug-02-11		±1dB
Broad-band Horn Antenna	SCHWARZB ECK MESS-ELEKTROM / BBHA 9120D(1201)	667	W2008003	1-18GHz	Aug-03-10	Aug-02-11		f<10 GHz: ±1dB 10GHz<f<18 GHz: ±1.5dB
Broadband Preamplifier	SCHWARZB ECK MESS-ELEKTROM / BBV 9718	9718-148	W2008004	0.5-18GHz	Aug-03-10	Aug-02-11		±1.2dB
10m Coaxial Cable with N-male Connectors usable up to 25GHz,	SCHWARZB ECK MESS-ELEKTROM / AK 9515 H	-	-	-	Aug-03-10	Aug-02-11		-
10m 50 Ohm Coaxial Cable with N-plug, individual length, usable up to 3(5)GHz, Connector	SCHWARZB ECK MESS-ELEKTROM / AK 9513				Aug-03-10	Aug-02-11		
Positioning Controller	C&C LAB/ CC-C-IF				N/A	N/A		
Color Monitor	SUNSPO/ SP-14C				N/A	N/A		
Test Receiver	ROHDE&SCHWARZ/ ESPI	101155	W2005001	9k-3GHz	Aug-03-10	Aug-02-11	Wws20080942	±1dB
EMI Receiver	Beijingkehua n	KH3931		9k-1GHz	Aug-03-10	Aug-02-11		
Two-Line V-Network	ROHDE&SCHWARZ/ ENV216	100115	W2005002	50Ω/50μH	Aug-	Aug-02-11	Wws20080941	±10%

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
					03-10			
Absorbing Clamp	ROHDE&SC HWARZ/ MDS-21	100205	W2005003	impedance 50 Ω loss : 17 dB	Aug-03-10	Aug-02-11	Wws20080943	± 1 dB
10m 50 Ohm Coaxial Cable with N-plug, individual length, usable up to 3(5)GHz, Connectors	SCHWARZB ECK MESS- ELEKTROM / AK 9514				Aug-03-10	Aug-02-11		
Digital Power Analyzer	Em Test AG/Switzerland/ DPA 500	V0745103095	W2008012	Power: 2000VA Vol-range: 0-300V Freq_range: 10-80Hz	Aug-03-10	Aug-02-11	Wwd20081185	Voltage distinguish: 0.025% Power_freq distinguish: 0.02Hz
Power Source	Em Test AG/Switzerland/ ACS 500	V0745103096	W2008013	Vol-range: 0-300V Power_freq: 10-80Hz				
Electrostatic Discharge Simulator	Em Test AG/Switzerland/DITO	V0745103094	W2008005	Contact discharge: 500V-10KV Air discharge: 500V-16.5KV	Aug-03-10	Aug-02-11	Wwc20082400	7.5A current will be changed in $V_m=1.5V$
RF Generator	TESEQ GmbH/ NSG4070	25781	W2008008	Freq-range: 9K-1GHz RF voltage: -60 dBm-+10dBm	Aug-03-10	Aug-02-11	Wws20081890	Power_freq distinguish: 0.1Hz RF electricity distinguish 0.1 B
CDN M-Type	TESEQ GmbH/ CDN M016	25112	W2008009	Voltage correct factor 9.5 dB	Aug-03-10	Aug-02-11	Wwc20082396	150K-80MHz: ± 1 dB 80-230MHz: -2-+3dB
EM-Clamp	TESEQ GmbH/ KEMZ 801	25453	W2008010	Freq_range: 0.15-1000 MHz	Aug-03-10	Aug-02-11	Wwc20082397	0.3-400 MHz: ± 4 dB Other freq: ± 5 dB

Equipment Name	Manufacturer Model	Equipment No	Internal No	Specification	Cal. Date	Due Date	Cert. No	Uncertainty
Attenuator 6dB	TESEQ GmbH/ ATN6050	25365			Aug-03-10	Aug-02-11	Wws200 81597	
All Modules Generator	SCHAFFNER/6150	34579	W2008006	voltage:200V-4.4KV Pulse current: 100A-2.2KA	Aug-03-10	Aug-02-11	Wwc200 82401	voltage: $\pm 10\%$ Pulse current: $\pm 10\%$
Capacitive Coupling Clamp	SCHAFFNER/ CDN 8014	25311			Aug-03-10	Aug-02-11	Wwc200 82398	-
Signal and Data Line Coupling Network	SCHAFFNER/ CDN 117	25627	W2008011	1.2/50 μ S	Aug-03-10	Aug-02-11	Wwc200 82399	-
AC Power Supply	TONGYUN/ DTDGC-4				Aug-03-10	Aug-02-11	Wws200 80944	-
Exposure Level Tester ELT-400	Narda Safety TEST Solutions/230 4/03	M-0155	w2008022	Test freq range: 1—400kHz	Aug-03-10	Aug-02-11	Wwd200 81191	Test uncertainty : 1—120kHz: $\pm 1.83\%$, 120 kHz-400 kHz: $\pm 4.06\%$
Magnetic Field Probe 100cm ²	Narda Safety TEST Solutions/230 0/90.10	M-1070	w2008021	Test freq range: 1—400kHz				Test uncertainty : 1Hz-10Hz: $\pm 16.2\%$, 10Hz - 120kHz: $\pm 2.2\%$, 120 kHz-400 kHz: $\pm 4.7\%$
Active Loop Antenna 10kHz-30MHz	Beijing Dazhi / ZN30900A	-	-	10kHz-30MHz	Aug-03-10	Aug-02-11		$\pm 1\text{dB}$

6 **Conducted Emission Test**

Test Requirement:	FCC Part15 Paragraph 15.207
Test Method:	Based on FCC Part15 Paragraph 15.207
Test Date:	
Frequency Range:	150kHz to 30MHz
Class:	Class B
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 **Test Equipment**


Please refer to Section 5 this report.

6.2 **Test Procedure**

1. The EUT was tested according to ANSI C63.4: 2003. The frequency spectrum from 150kHz to 30MHz was investigated.
2. The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.3 Conducted Test Setup


The conducted emission tests were performed using the setup accordance with the ANSI C63.4: 2003, The specification used in this report was the FCC Part15 Paragraph 15.207 limits.

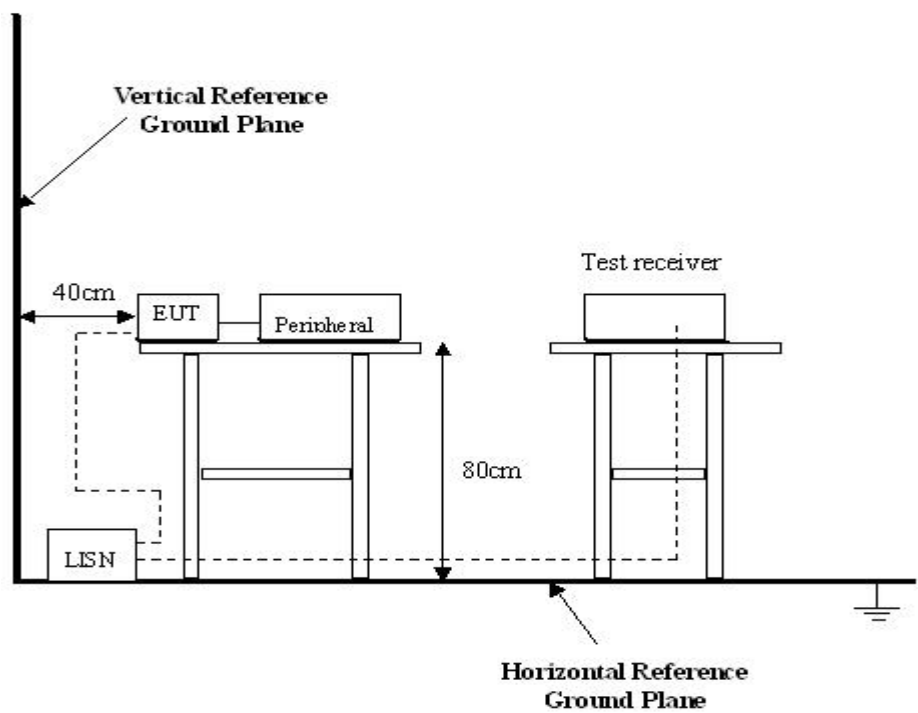

6.4 EUT Operating Condition

Operating condition is according to ANSI C63.4: 2003.

- A. Setup the EUT and simulators as shown on follow.
- B. Enable RF signal and confirm EUT active.
- C. Modulate output capacity of EUT up to specification.

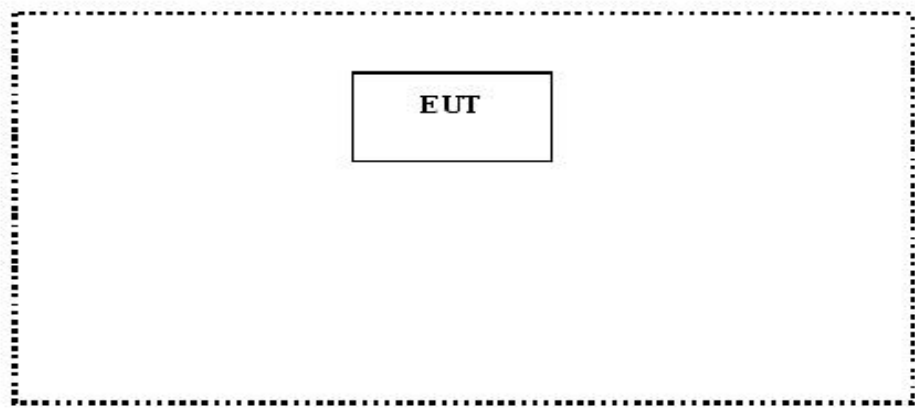

6.5 Conducted Emission Limits

66-56 dB μ V between 0.15MHz & 0.5MHz

56 dB μ V between 0.5MHz & 5MHz

60 dB μ V between 5MHz & 30MHz

Note: In the above limits, the tighter limit applies at the band edges.

6.6 Conducted Emission Test Result

Owing to the DC operation of EUT, this test is not performed.

7 Radiation Emission Test

Test Requirement:	FCC Part15 Paragraph 15.235
Test Method:	Based on FCC Part15 Paragraph 15.33
Test Date:	Jan.13,2011
Frequency Range:	30MHz to 1GHz
Measurement Distance:	3m
Detector:	Peak for pre-scan (120kHz resolution bandwidth) Quasi-Peak if maximised peak within 6dB of limit

7.1 Test Equipment

Please refer to Section 5 this report.

7.2 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.


Based on ANSI C63.4: 2003, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement at Waltek EMC Lab is ± 5.03 dB.

7.3 Test Procedure

1. New batteries were installed in the equipment under test for radiated emissions test.
2. This is a handheld device, The radiation emission should be tested under 3-axes position (lying, side and stand). After pre-test, It was found that the worst radiation emission was get at the lying position.
3. Maximizing procedure was performed on the six (6) highest emissions to ensure EUT is compliant with all installation combinations.
4. All data was recorded in the peak and average detection mode.
5. The EUT was under normal mode during the final qualification test and the configuration was used to represent the worst case results.
6. For below 30MHz, a loop antenna with its vertical plane is placed 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
7. The device was rotated through three orthogonal axes to determine which attitude and configuration produce the highest emission during measurement.

7.4 Radiated Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003, The specification used in this report was the FCC Part 15 Paragraph 15.209, Paragraph 15.235 limits.

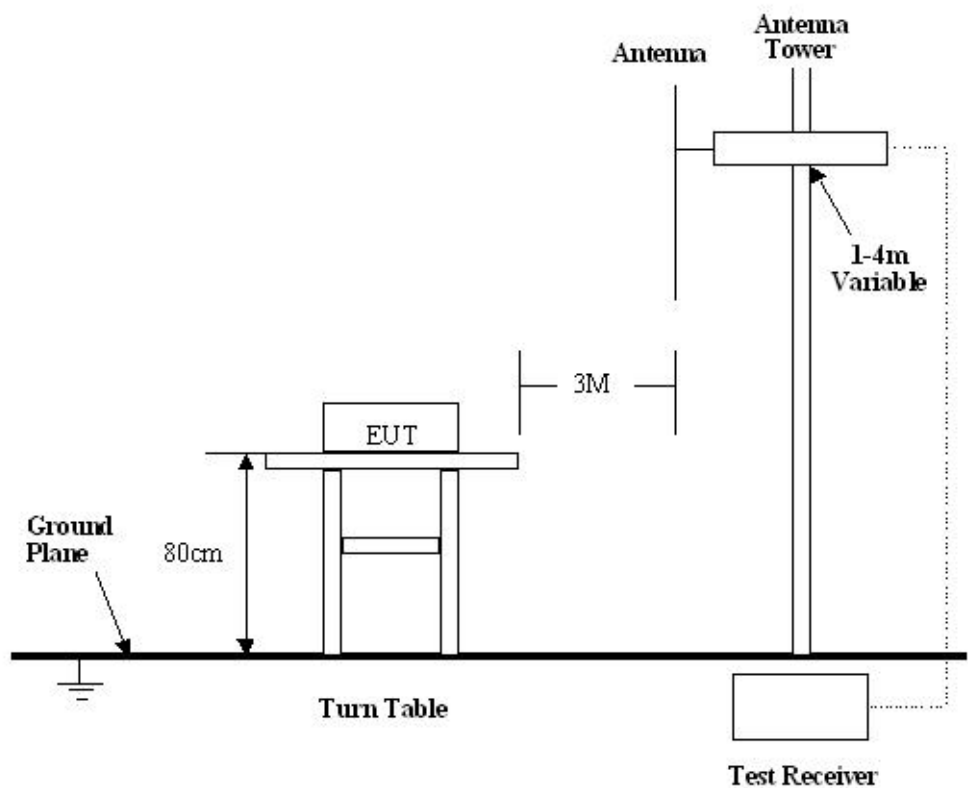

7.5 Spectrum Analyzer Setup

According to FCC Part15 Paragraph 15.235 Rules, the system was tested to 1000 MHz.

Start Frequency	30 MHz
Stop Frequency	1000 MHz
Sweep Speed	Auto
IF Bandwidth	100 kHz
Video Bandwidth	100KHz
Quasi-Peak Adapter Bandwidth	120 kHz
Quasi-Peak Adapter Mode.....	Normal
Resolution Bandwidth	100KHz

7.6 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB μ V means the emission is 7dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Class B Limit}$$

7.7 Summary of Test Results

According to the data in section 7.11, the EUT complied with the FCC Part15 Paragraph 15.235 standards.

7.8 EUT Operating Condition

Same as section 6.4 of this report.

7.9 Radiated Emissions Limit

A. FCC Part 15 subpart C Paragraph 15.235 Limit

Fundamental Frequency(MHz)	Field Strength of Fundamental
	dBuV/m
49.86	80

Note:(1) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency(MHZ)	Distance(m)	Field strength(dBuV/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note: (1) $\text{RF Voltage(dBuV)} = 20 \log \text{RF Voltage(uV)}$

(2) In the Above Table,the tighter limit applies at the band edges.

(3) Distance refers to the distance in meters between the measuring instrument antenna.

7.10 Radiated Emissions Test Result

Formula of conversion factors: the field strength at 3m was established by adding
The meter reading of the spectrum analyzer (which is set to read in units of dBuV)
To the antenna correction factor supplied by the antenna manufacturer. The antenna
Correction factors are stated in terms of dB. The gain of the preselector was accounted
For in the spectrum analyzer meter reading.

Example:

Freq(MHz) Meter Reading +ACF=FS

33 20dBuV+10.36dB=30.36dBuV/m @3m

7.11 Radiated Emission Test Data

Test Item: Radiated Emission Test Data
 Test Voltage: 9.0 VDC Battery
 Test Mode: TX On
 Temperature: 25.5 °C
 Humidity: 51%RH
 Test Result: PASS

Remark: the reading level below 30MHz was lower than the noise level of equipment,so the data was not show in the report.

Frequency (MHz)	Detector	Antenna Polarization	Emission Level (dBuV/m)	FCC 15 Subpart C Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Turntable Angle (°)
49.86	AV	Vertical	48.25	80.00	-31.75	1.0	10
49.86	AV	Horizontal	41.01	80.00	-38.99	1.0	110
99.73	AV	Horizontal	26.36	40.00	-13.64	1.1	150
149.54	AV	Horizontal	26.35	40.00	-13.65	1.0	100
199.41	AV	Horizontal	27.89	43.50	-15.61	1.1	100
249.31	AV	Horizontal	31.25	43.50	-12.25	1.1	110
299.12	AV	Horizontal	33.36	43.50	-10.14	1.0	20
349.14	AV	Horizontal	32.36	43.50	-11.14	1.1	45
398.82	AV	Horizontal	30.14	46.00	-15.86	1.1	110
448.71	AV	Horizontal	29.36	46.00	-16.64	1.0	110
498.61	AV	Horizontal	35.69	46.00	-10.31	1.1	10
99.72	AV	Vertical	30.36	43.50	-13.14	1.1	50
149.58	AV	Vertical	31.02	43.50	-12.48	1.0	120
199.44	AV	Vertical	32.69	43.50	-10.81	1.1	10
249.31	AV	Vertical	33.65	43.50	-9.85	1.0	110
299.16	AV	Vertical	35.65	46.00	-10.35	1.1	50
349.02	AV	Vertical	32.01	46.00	-13.99	1.0	120
398.88	AV	Vertical	31.02	46.00	-14.98	1.1	90
448.74	AV	Vertical	30.55	46.00	-15.45	1.0	20
498.62	AV	Vertical	30.66	46.00	-15.34	1.1	110

8 Antenna Requirement.

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product has a permanent antenna, fulfill the requirement of this section

9 Occupied Bandwidth


Rules of test : FCC Part15.235
Test Date: Jan.13,2011
Test mode: TX On
Temperature: 25.5 °C
Humidity: 51%RH

Test Procedure

1. The field strength of any emissions which appear outside of the band shall not exceed the general radiated emission limits in section 15.209.
2. The useful radiated emission from the EUT was detected by the spectrum analyser with peak detector.
3. The result has been complied with the 15.235, see the following plot:


Frequency MHz	Emission dBuV/m	Limit dBuV/m
49.81	35.53	40
49.91	35.76	40

The graph as below.

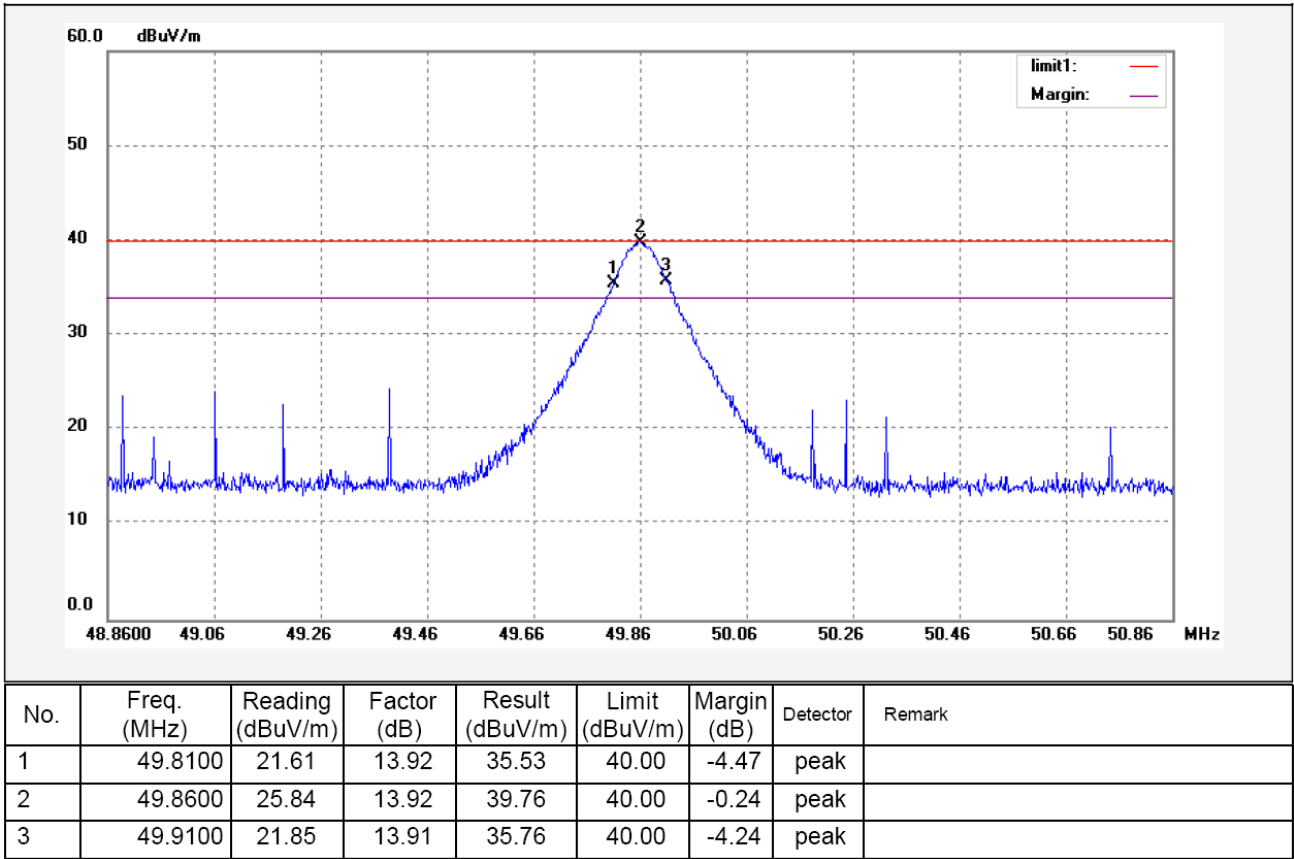

10 Photographs of Testing

Radiation Emission Test Setup View

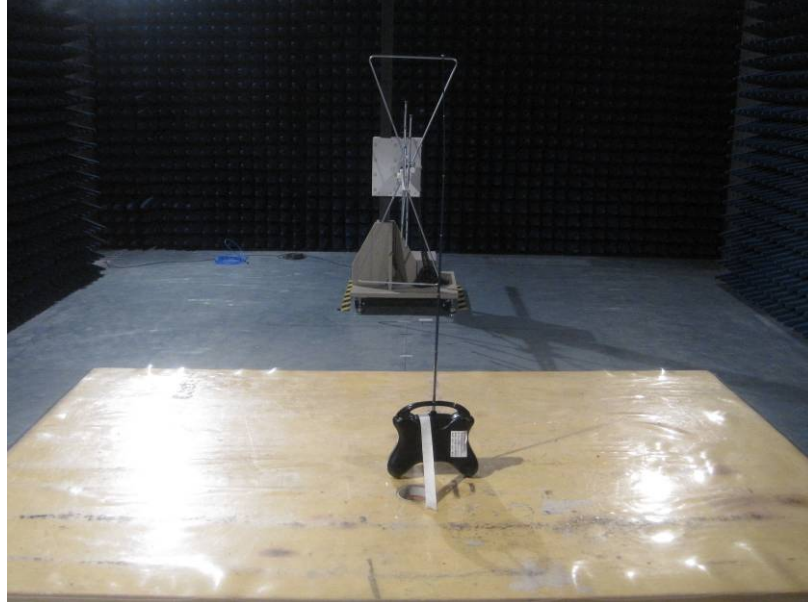

11 Photographs - Constructional Details

11.1 EUT – Front View




11.2 EUT – Back View



11.3 PCB – Front View



11.4 PCB – Back View

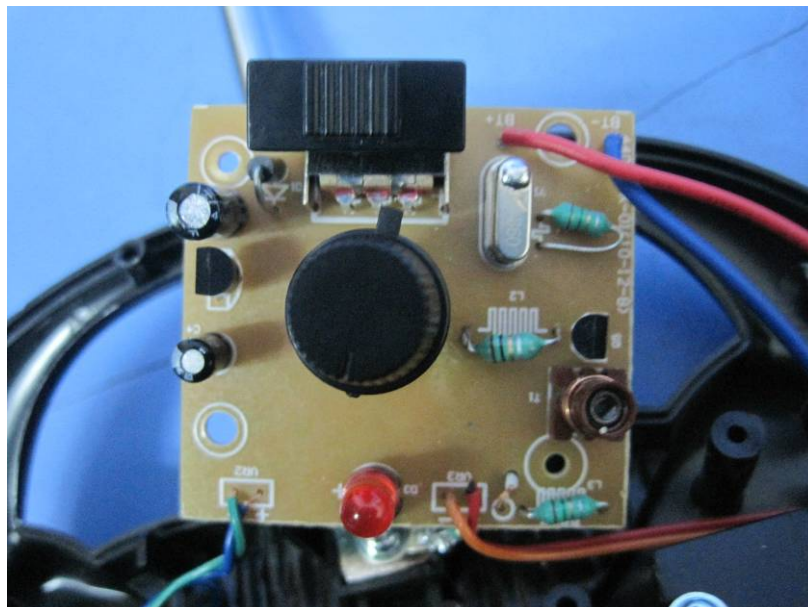

12 FCC ID Label

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:(1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The Label must not be a stick-on paper. The Label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Proposed Label Location on EUT
EUT Bottom View/proposed FCC Label Location

