



# ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CERTIFICATION

Test report file number : **E025R-045**

**Applicant** : **DIGITAL ECHO CO., LTD.**  
**Address** : **730-1, Gyoerang-Ri, Yungnam-Myeon, Whasung-Si, Gyunggi-Do, 445-963, Korea**  
**Manufacturer** : **DIGITAL ECHO CO., LTD.**  
**Address** : **730-1, Gyoerang-Ri, Yungnam-Myeon, Whasung-Si, Gyunggi-Do, 445-963, Korea**  
**Type of Equipment** : **ULTRASOUND SKIN STIMULATOR**  
**FCC ID** : **QEJDEGP01DB02**  
**Model Name** : **DE-1**  
**Multiple Model Name** : **N/A**  
**Serial number** : **N/A**  
**Total page of Report** : **12 pages (including this page)**  
**Date of Incoming** : **January 23, 2002**  
**Date of issuing** : **July 22, 2002**

## SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 18 CONSUMER DEVICES**.

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by:

  
G. W. Lee/ Assistant Chief Engineer

Reviewed by:

  
Y. K. Kwon/ Chief Engineer

This report shall not be reproduced except in full without our written approval.

FCC-003 (Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea  
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

**EMC Testing Dept** : 426-1 Dassangyung-Ri Chowl Myun, Kwangju City, Kyunggi-Do 464-860 Korea (TEL: +82-31-765-8289, FAX: +82-31-766-2904)



# ONETECH

document property name: *Testing & Evaluation Lab.*

Page 2 of 12

FCC ID. : **Error!** Unknown

File No. : **Error!** Unknown

document property name.

---

EMC Div.  
ONETECH Corp.

EMC Div.  
ONETECH Corp.

**CONTENTS**

	Page
<b>1. VERIFICATION OF COMPLIANCE.....</b>	<b>4</b>
<b>2. GENERAL INFORMATION.....</b>	<b>5</b>
<b>2.1 PRODUCT DESCRIPTION .....</b>	<b>5</b>
<b>2.2 RELATED SUBMITTAL(S) / GRANT(S) .....</b>	<b>5</b>
<b>2.3 TEST SYSTEM DETAILS.....</b>	<b>5</b>
<b>2.4 TEST METHODOLOGY .....</b>	<b>5</b>
<b>2.5 TEST FACILITY .....</b>	<b>5</b>
<b>3. SYSTEM TEST CONFIGURATION.....</b>	<b>6</b>
<b>3.1 JUSTIFICATION.....</b>	<b>6</b>
<b>3.2 CABLE DESCRIPTION.....</b>	<b>6</b>
<b>3.3 EQUIPMENT MODIFICATIONS.....</b>	<b>6</b>
<b>3.4 CONFIGURATION OF TEST SYSTEM .....</b>	<b>6</b>
<b>4. EQUIPMENT LIMITATIONS.....</b>	<b>7</b>
<b>4.1 CONDUCTED EMISSION LIMITS .....</b>	<b>7</b>
<b>4.2 RADIATED EMISSION LIMITS .....</b>	<b>7</b>
<b>5. FINAL RESULT OF MEASURMENT.....</b>	<b>9</b>
<b>5.1 CONDUCTED EMISSION TEST .....</b>	<b>9</b>
<b>5.2 RADIATED EMISSION TEST .....</b>	<b>11</b>
<b>6. FIELD STRENGTH CALCULATION .....</b>	<b>12</b>
<b>7. LIST OF TEST EQUIPMENT .....</b>	<b>13</b>



## 1. VERIFICATION OF COMPLIANCE

- . APPLICANT : DIGITAL ECHO CO., LTD.  
- . ADDRESS : 730-1, Gyoerang-Ri, Yungnam-Myeon, Whasung-Si, Gyunggi-Do, 445-963, Korea  
- . CONTACT PERSON : Mr. Jae-Yk, Kim / Researcher  
- . TELEPHONE NO : +82-31-352-6540  
- . FCC ID : QEJDEGP01DB02  
- . MODEL NO/NAME : DE-1  
- . SERIAL NUMBER : N/A  
- . DATE : May 27, 2002

DEVICE TYPE	ULTRASOUND DEVICE – CONSUMER DEVICE
E.U.T. DESCRIPTION	ULTRASOUND SKIN STIMULATOR
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	MP-5: 1986, ANSI C63.4
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 18
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.



## 2. GENERAL INFORMATION

### 2.1 Product Description

The DIGITAL ECHO CO., LTD., Model DE-1 (referred to as the EUT in this report) is an ULTRASOUND SKIN STIMULATOR. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
LIST OF EACH OSC. OR CRY. FREQ.(FREQ.>=1MHz)	4MHz
OPERATIONG FREQUENCY	1MHz
OUTPUT POWER	Low mode: 0.2W/cm <sup>2</sup> , High mode: 0.3W/cm <sup>2</sup>
NUMBER OF LAYERS	1 Layer
POWER REQUIREMENT	DC12V, 500mA
COMSUMPTION POWER	9W
EXTERNAL CONNECTOR	DC IN

Model Differences:

- The difference(s) compared to the EUT is as follows: none

### 2.2 Related Submittal(s) / Grant(s)

Original submittal only

### 2.3 Test System Details

The model numbers for all the equipments which were used in the tested system is: none

### 2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in MP-5/1986. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

### 2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on January 18, 2002. (Registration Number: 92819)



### 3. SYSTEM TEST CONFIGURATION

#### 3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN B'D	DIGITAL ECHO CO., LTD.	N/A	N/A

#### 3.2 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
ULTRASOUND SKIN STIMULATOR (EUT)	N	N/A	1.2(P)

\* The marked "(P)" means the Power Cable.

#### 3.3 Equipment Modifications

To achieve compliance to consumer equipment levels, the following change(s) was made by ONETECH Corp. during compliance testing:

“There were no Modified items during EMI test”

#### 3.4 Configuration of Test System

##### Line Conducted Test:

The EUT was connected to the power mains through a Line Impedance Stabilization Network (LISN). This provided 50-ohm coupling impedance for the measuring equipment. The length of the power cord in excess of 80cm, separating the EUT from the LISN, is folded back and forth forming a bundle, hanging approximately in the middle between ground plane and table. The EUT is placed 80cm from a floor earth-grounded conducting surface and is kept 40cm from vertical conducting plane that is bonded to the floor ground plane.

Both side of AC line were checked for maximum conducted interference. During this test, EUT was operating to simulating actual use. Emission levels are checked to see if equipment/cable placements are maximized according to MP-5/1986.

The bandwidth of test Receiver ESHS10 was set at 200Hz less than 150 kHz and 9kHz from 150 kHz to 30MHz.

Emissions that have peak value close to the specification limit are also measured in the quasi-peak detection mode to determine compliance.

The frequency range from 0.01 MHz to 30 MHz was checked. The test mode (ON) was done on conducted emission test and the results of the highest emissions are listed in Sec. 6.1.

**Radiated Emission Test:**

The EUT was placed on a wooden turn table which is 0.8 meter above a ground. The turn table is placed three meters away from the receiving antenna.

All equipment/cable are placed in a manner which tend maximize its emission characteristics in a typical application. This is accomplished by watching the analyzer while moving equipment/cables according to MP-5/1986.

The turn table was rotated 360 degrees to determine the position of the maximum emission level.

The receiving antenna was 1 meter above ground screen to find out the maximum emission level. Both vertical and horizontal polarizations of the antenna were set on measurement.

The bandwidth of test Receiver ESVS10 was set at 9 kHz.

The frequency range from 1 MHz (Lowest frequency generated in the EUT) to 30 MHz was checked. The test mode (ON) was done on radiated emission test and the results of the highest emissions are listed in Sec. 6.2.

## 4. Equipment Limitations

### 4.1 Conducted Emission Limits

Conduction limits for Ultrasonic equipment: Maximum RF line voltage measured with a 5uH/50 ohm LISN. (§ 18.307 (a))

Frequency (MHz)	Emissions (uV)	Emissions (dBuV)
0.010 – 0.49	1000	60
0.49 - 30	200	46

NOTE - RF Line Voltage dB (uV) = 20log RF Line Voltage (uV)

### 4.2 Radiated Emission Limits

Radiated field strength limits for Ultrasonic equipment. (§ 18.305 (b))

Frequency (kHz)	Distance (Meters)	Field strength limits (uV/m)	Converted Field Strengths Limits at 1MHz By 3 meter Measuring Distance	
			uV/m	dB (uV/m)
490– 1,600	30	24,000/F (kHz)	240	47.6

NOTE 1 – Emission Level dB(uV/m) = 20log Emission Level (uV/m)

NOTE 2 – The measurements are made at 3 meters distance, then the permissible field strength limits be adjusted using 1/d as an attenuation factor.



## 5. PRELIMINARY TEST

### 5.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Low	
High	X

### 5.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
Low	
High	X



## 6. FINAL RESULT OF MEASURMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level.

### 6.1 Conducted Emission Test

Humidity Level : 54 % Temperature: 18 °C  
 Limits apply to : FCC CFR 47, PART 18, SUBPART C, SECTION 18.307 (a)  
 Type of Test : CONSUMER EQUIPMENT  
 Result : PASSED BY -5.76 dB at 0.02 MHz

EUT : ULTRASOUND SKIN STIMULATOR Date: April 08, 2002  
 Operating Condition : Power ON (High mode)  
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 200 Hz) from 0.01 MHz to 0.15 MHz.  
 CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz) from 0.15 MHz to 30 MHz

Power Line Conducted Emission			FCC PART 18	
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)
0.02	54.24	NEUTRAL	60.00	-5.76
0.15	49.37	HOT	60.00	-10.63
0.16	49.22	NEUTRAL	60.00	-10.78
1.06	34.75	NEUTRAL	60.00	-11.25
11.61	33.11	HOT	46.00	-12.89
14.78	36.26	HOT	46.00	-9.74

Line Conducted Emission Tabulated Data

Tested by: Young-Min Choi / Project Engineer



# ONETECH


document property name: Testing & Evaluation Lab.

Page 10 of 12


FCC ID. : Error! Unknown

File No. : Error! Unknown

document property name.

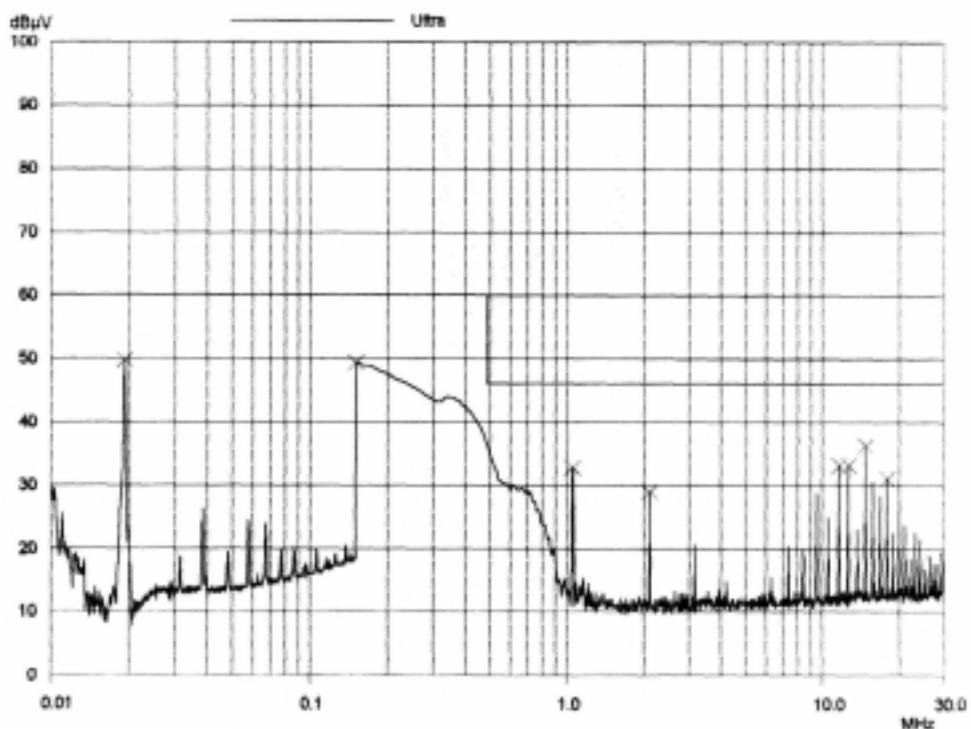

### HOT LINE

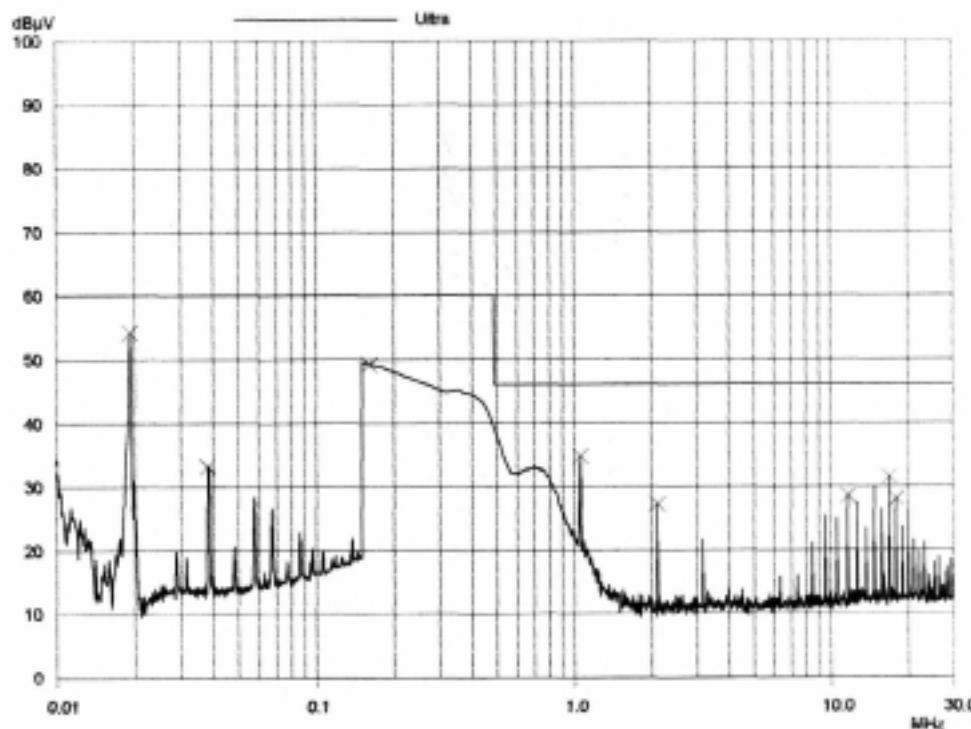

### NEUTRAL LINE

This report shall not be reproduced except in full without our written approval.

FCC-003 (Rev.0)

**HEAD OFFICE** : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea  
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

**EMC Testing Dept** : 426-1 Dassangyung-Ri Chowl Myun, Kwangju-City, Kyunggi-Do 464-860 Korea (TEL: +82-31-765-8289, FAX: +82-31-766-2904)

**6.2 Radiated Emission Test**

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level	: <u>55 %</u>	Temperature : <u>20 °C</u>
Limits apply to	: <u>FCC CFR 47, PART 18, SUBPART C, SECTION 18.305(b)</u>	
Type of Test	: <u>CONSUMER EQUIPMENT</u>	
Result	: <u>PASSED BY -2.22 dB at 1.05 MHz</u>	

EUT	: ULTRASOUND SKIN STIMULATOR	Date: June 29, 2001
Operating Condition	: Power ON (High mode)	
Detector	: CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)	
Distance	: 3 Meter	

Radiated Emissions		Ant	Correction Factors		Total	FCC PART 18	
Freq. (MHz)	Amp. (dBuV)		Ant. (dBuV/m)	Cable (dB)		Amp. (dBuV/m)	Limit (dBuV/m)
1.05	38.20	H	7.08	0.10	45.38	47.60	-2.22
2.02	29.50	H	7.06	0.13	36.69	47.60	-10.91
3.03	26.10	H	7.04	0.15	33.29	47.60	-14.31
5.79	19.50	H	6.87	0.18	26.55	47.60	-21.05
9.54	16.10	H	6.51	0.11	22.72	47.60	-24.88
11.30	15.50	H	6.30	0.07	21.87	47.60	-25.73

## Radiated Emissions Tabulated Data

Note: For the EUT operating frequency below 1.705MHz, the frequency range of measurement which is according to the Communication rule 18.309(a) is from 1MHz (Lowest frequency generated in the EUT) to 30MHz.

Tested by: Young-Min Choi / Project Engineer



## 6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

---

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)

document property name.

## 7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUe CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	OCT/01	12MONTH	
2.	Test receiver	R/S	ESHS 10	834467/007	APR/02	12MONTH	■
3.	Spectrum analyzer	HP	8568B	3109A05456	APR/02	12MONTH	■
4.	RF preselector	HP	85685A	3107A01264	APR/02	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01542	APR/02	12MONTH	■
6.	Loop Antenna	EMCO	6502	9108-2668	DEC/01	12MONTH	■
8.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	APR/02	12MONTH	
9.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	APR/02	12MONTH	
10.	LISN	EMCO	3825/2	9109-1867 9109-1869	JUL/01	12MONTH	■
11.	Computer System Hard disk drive	HP	98581C 9153C	98543A CMC762Z9153	N/A N/A	N/A N/A	■ ■
12.	Plotter	HP	7475A	30052 22986	N/A	N/A	
13.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
14.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
15.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■