



**FCC Part 1 Subpart I
FCC Part 2 Subpart J**

RF EXPOSURE REPORT

FOR

GROUND RADAR

**MODEL NUMBER: GroundAware 360
PART NUMBER: 10037200**

FCC ID: QFS001-10037200

REPORT NUMBER: R11522801-E3

ISSUE DATE: 2017-01-23

**Prepared for
Dynetics, Inc.
1002 Explorer Boulevard
Huntsville, AL 35806**

**Prepared by
UL LLC
12 LABORATORY DR.
RESEARCH TRIANGLE PARK, NC 27709 USA
TEL: (549) 549-1400**



NVLAP LAB CODE 200246-0

Revision History

Rev.	Issue Date	Revisions	Revised By
1	2017-01-13	Initial Issue	Mark Nolting
2	2017-01-23	Revised antenna gain.	Mark Nolting

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	4
2. TEST METHODOLOGY	5
3. REFERENCES	5
4. FACILITIES AND ACCREDITATION.....	5
5. EUT DESCRIPTION	5
6. MAXIMUM PERMISSIBLE RF EXPOSURE	6
6.1. FCC RULES	6
6.2. EQUATIONS	7
7. RF EXPOSURE RESULTS	9

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: Dynetics, Inc.
1002 Explorer Boulevard
Huntsville, AL 35806-2806

EUT DESCRIPTION: Ground Radar

MODEL: GroundAware 360, P/N: 10037200

SERIAL NUMBER: Non-serialized


DATE TESTED: 12/01-12/02/2016 and 12/28/2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC PART 1 SUBPART I & PART 2 SUBPART J	Pass

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Approved & Released
For UL LLC By:

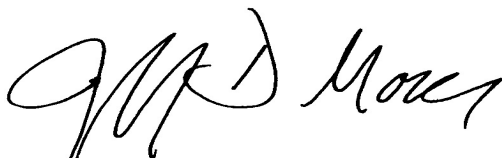

Jeff Moser
EMC Program Manager
UL – Consumer Technology Division

Prepared By:



Mark Nolting
EMC Engineer
UL – Consumer Technology Division

2. TEST METHODOLOGY

All calculations were made in accordance with FCC OET Bulletin 65 Edition 97-01 a.

3. REFERENCES

All measurements were made as documented in test report UL LLC R11522801-E1.

Output power, Duty cycle and Antenna gain data is excerpted from the applicable test reports.

4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 12 Laboratory Dr., Research Triangle Park, NC 27709, USA and 2800 Suite B, Perimeter Park Drive, Morrisville, NC 27560.

12 Laboratory Dr., RTP, NC 27709	
☐	Chamber A
☐	Chamber C

2800 Suite B Perimeter Park Dr., Morrisville, NC 27560	
☐	Chamber NORTH
☒	Chamber SOUTH

The onsite chambers are covered under Industry Canada company address code 2180C with site numbers 2180C -1 through 2180C-4, respectively.

UL LLC (RTP) is accredited by NVLAP, Laboratory Code 200246-0. The full scope of accreditation can be viewed at <http://www.nist.gov/nvlap/>.

5. EUT DESCRIPTION

The EUT is a wide-band ground radar used to monitor a specific area.

Other details regarding the EUT are documented in the applicable test reports and product documentation.

6. MAXIMUM PERMISSIBLE RF EXPOSURE

6.1. FCC RULES

§1.1310 The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3–3.0	614	1.63	*(100)	6
3.0–30	1842/f	4.89/f	*(900/f ²)	6
30–300	61.4	0.163	1.0	6
300–1500			f/300	6
1500–100,000			5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30

TABLE 1—LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)—Continued

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
30–300	27.5	0.073	0.2	30
300–1500			f/1500	30
1500–100,000			1.0	30

f = frequency in MHz

* = Plane-wave equivalent power density

NOTE 1 TO TABLE 1: Occupational/controlled limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.

NOTE 2 TO TABLE 1: General population/uncontrolled exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or can not exercise control over their exposure.

6.2. EQUATIONS

DISTANCE

Distance is given by:

$$D = \text{SQRT} (\text{EIRP} / (4 * \text{Pi} * S))$$

Where

D = Separation distance in cm

EIRP = Equivalent Isotropic Radiated Power in mW

S = Power density in mW/cm²

SOURCE-BASED DUTY CYCLE

Where applicable (for example, multi-slot cell phone applications) a duty cycle factor may be applied.

$$\text{Source-based time-averaged EIRP} = (\text{DC} / 100) * \text{EIRP}$$

Where

DC = Duty Cycle in %, as applicable

EIRP = Equivalent Isotropic Radiated Power in W

MIMO AND COLOCATED TRANSMITTERS (IDENTICAL LIMIT FOR ALL TRANSMITTERS)

For multiple chain devices, and colocated transmitters operating simultaneously in frequency bands where the limit is identical, the total power density is calculated using the total EIRP obtained by summing the EIRP (in linear units) of each transmitter.

$$\text{Total EIRP} = (\text{EIRP1}) + (\text{EIRP2}) + \dots + (\text{EIRPn})$$

where

EIRPx = Source-based time-averaged EIRP of chain x or transmitter x

The total EIRP is then used to calculate the Power Density or the Distance as applicable.

7. RF EXPOSURE RESULTS

In the table(s) below, Power and Gain are entered in units of dBm and dBi respectively and conversions to linear forms are used for the calculations.

(Single chain transmitters, no colocation, 20 cm MPE distance)

Single Chain and non-colocated transmitters							
Band MHz	Mode	Separatio Distance (cm)	Output AVG Power (dBm)	Antenna Gain (dBi)	Duty Cycle (%)	EIRP (mW)	FCC Power Density (mW/cm^2)
3100-3300	Radar	20	26.00	7.07	100.0	2027.7	0.404

(Single chain transmitters, no colocation, MPE distance > 20 cm)

Single Chain and non-colocated transmitters								
Band MHz	Mode	FCC Limit (mW/cm^2)	Output AVG Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Duty Cycle (%)	EIRP (mW)	Separatio Distance (cm)
3100-3300	Radar	1.00	26.00	7.07	33.07	100.0	2027.7	12.71

Notes:

- 1) For MPE the new KDB 447498 requires the calculations to use the maximum rated power; that power should be declared by the manufacturer, and should not be lower than the measured power. If the power has a tolerance then we also need to check that the measured power is within the tolerance.
- 2) A tolerance value of +1 dB was included in the output power values above to cover the output power tolerance of +/-1 dB under extreme conditions in the real filed as declared by the client.
- 3) The manufacturer configures output power so that the maximum power, after accounting for manufacturing tolerances, will never exceed the maximum power level measured.
- 4) The output power in the tables above is the maximum power per chain among various channels and various modes within the specific band.
- 5) The antenna gain in the tables above is the maximum antenna gain among various channels within the specified band.

END OF REPORT