

FCC Part 15C Compliance Test Report

Test Report no.:	FCC15C_RM-744_09.docx	Date of Report:	18-Feb-2011
Number of pages:	15	Customer's Contact person:	Lenaghan Alison
Testing laboratory:	TCC Nokia Tampere Laboratory P.O. Box 68 Sinitaival 5 FIN-33720 TAMPERE, FINLAND Tel. +358 (0) 7180 46800 Fax. +358 (0) 7180 46880	Customer:	Nokia Corporation Nokia House Summit Avenue, Southwood FARNBOROUGH HAMPSHIRE GU14 0NG UK Tel. +44 1252 866000 Fax. +44 1252 866001
FCC listing no.:	94436		
IC recognition no.:	661AK-1		
Tested devices/ accessories:	Phone RM-744 / Battery BL-5CT / Charger AC-8E / Headset WH-102		
FCC ID:	QFXRM-744	IC:	661Z-RM744
Supplement reports:	-		
Testing has been carried out in accordance with:	CFR 47, FCC rules Part 15 Subpart C, ANSI C63.4 (2003), Public Notice DA 00-705, DTS procedures KDB 558074, IC standards. Deviations, modifications or clarifications (if any) to above mentioned documents are written in each section under "Test method and limit".		
Documentation:	The test report must always be reproduced in full; reproduction of an excerpt only is subject to written approval of the testing laboratory. The documentation of the testing performed on the tested devices is archived for 15 years at TCC Nokia.		
Test Results:	The EUT complies with the requirements in respect of all parameters subject to the test. The test results relate only to devices specified in this document		
Date and signature for the contents:			

Jari Jantunen, System Manager, EMC

1. Summary for FCC Part 15C Compliance Test Report

Date of receipt	25-Jan-2011
Testing completed	11-Feb-2011
The customer's contact person	Lenaghan Alison
Test Plan referred to	T:\Projects\RM-744\TestPlan\RS_testplan_RM-744.xls
Notes	-
Document name	FCC15C_RM-744_09.docx

1.1. EUT and Accessory Information

The EUT is a 7-band (GSM850/900/1800/1900) and WCDMA Band (I/V(850)/V(850)) mobile phone with GPRS, EGPRS, HSDPA, HSUPA and Bluetooth. Bluetooth and WLAN are tested with maximum rated TX power.

Product	Type	SN	HW	MV	SW	DUT
Phone	RM-744	004402133710883	9204	-	070.020	42469
Battery	BL-5CT	3635639511910602892;0670555	-	-	-	42470
Charger	AC-8E	4868679361310602230;0675387	-	-	-	42444
Headset	WH-102	0694323939454107471	-	-	-	42460

1.2. Summary of Test Results

Bluetooth:

Section in CFR 47	Section in RSS-GEN or RSS-210	Name of the test	Result
15.247(b)(1)	A8.4 (2)	Conducted peak output power	NP
15.247(d)	A8.5	Band edge compliance of RF emissions	PASSED
15.247(d)	A8.5	Spurious RF conducted emissions	NP
15.247(d), 15.209	A8.5	Spurious radiated emissions	PASSED
15.207	7.2.2	AC powerline conducted emissions	NP
15.247(a)(1)	A8.1 (a)	20 dB bandwidth	NP
15.247(a)(1)	A8.1 (b)	Carrier frequency separation	NP
15.247(a)(1)(iii)	A8.1 (d)	Number of hopping frequencies	NP
15.247(a)(1)(iii)	A8.1 (d)	Time of occupancy	NP

PASSED
FAILED
NP

The EUT complies with the essential requirements in the standard.
The EUT does not comply with the essential requirements in the standard.
The test was not performed by the TCC Nokia Laboratory.


CONTENTS

1. Summary for FCC Part 15C Compliance Test Report	2
1.1. EUT and Accessory Information	2
1.2. Summary of Test Results	2
2. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)	4
2.2. Test method and limit	4
2.3. Bluetooth Test results	5
3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5).....	9
3.2. Test method and limit	9
3.3. Bluetooth Test results	11
4. Test Equipment	14
4.1. Conducted measurements	14
4.2. Radiated measurements	14

2. Band edge compliance of RF emissions (FCC §15.247(d), RSS-210 A8.5)

EUT with DUT number	RM-744, DUT 42469
Accessories with DUT numbers	BL-5CT, DUT 42470 ; AC-8E, DUT 42444 ; WH-102, DUT 42460
Operation Voltage [V] / [Hz]	115 / 60
Results	PASSED
Remarks	-
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	23 / 50 / 99.8
Date of measurements	11-Feb-2011
Measured by	Jari Jantunen

2.1.1 Test Setup

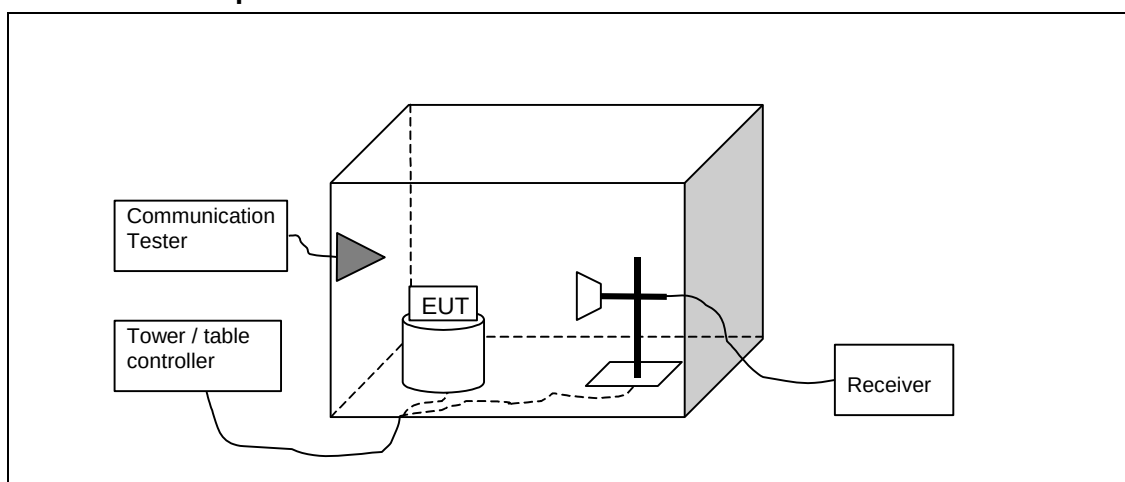

2.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for band edge compliance of RF emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit Average [dBμV/m]	Limit Peak [dBμV/m]
Below 2390 and above 2483.5	<=54	<=74

2.3. Bluetooth Test results

2.3.1 GFSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	33.53	47.466	42.45	-8.92	PASSED
Hopping on, low end	35.33	58.441	44.25	-8.92	PASSED
78 / 2480	44.72	172.171	53.43	-8.71	PASSED
Hopping on, high end	44.72	172.171	53.43	-8.71	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	45.32	184.454	54.24	-8.92	PASSED
Hopping on, low end	44.97	177.26	53.89	-8.92	PASSED
78 / 2480	56.68	682.634	65.39	-8.71	PASSED
Hopping on, high end	49.96	314.623	58.67	-8.71	PASSED


GFSK mode. Channel 0 / 2402 MHz

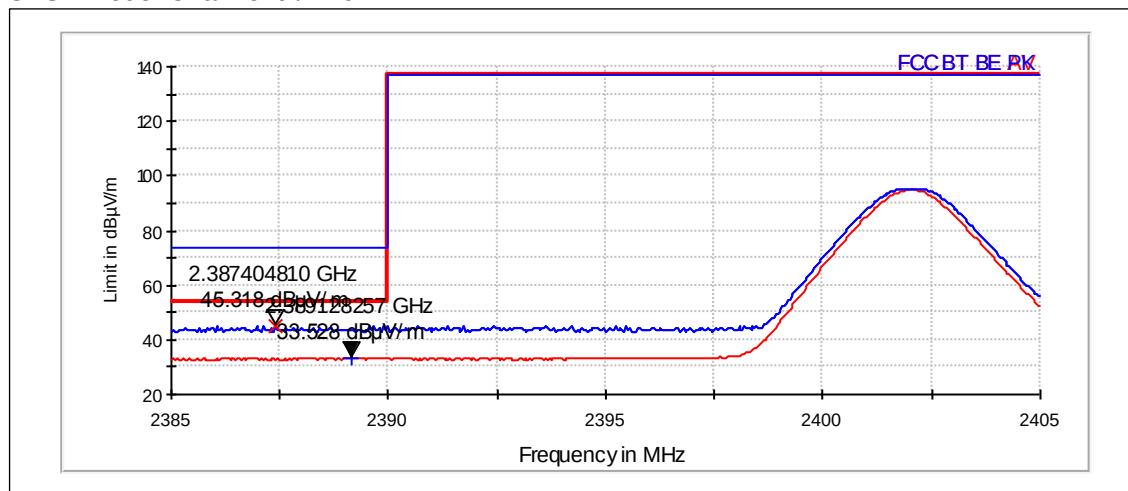


GFSK mode. Hopping on, low end

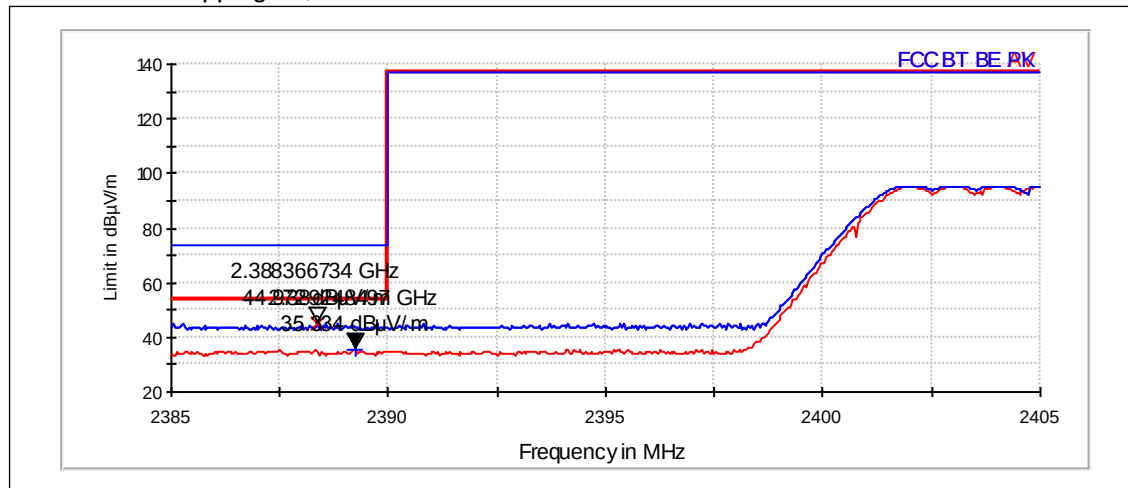

GFSK mode. Channel 78 / 2480 MHz

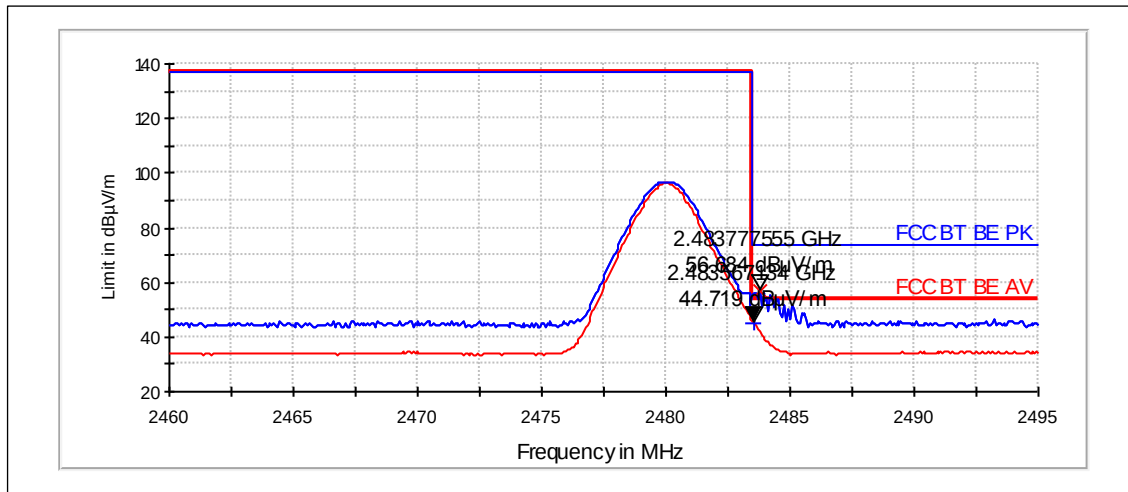

GFSK mode. Hopping on, high end

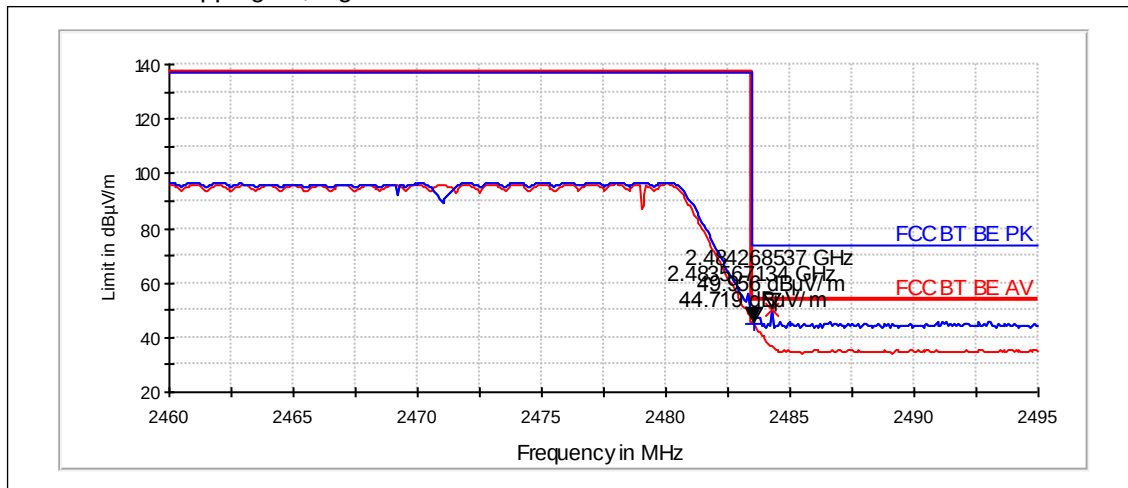

2.3.2 8DPSK modulation, PRBS packet type


Average (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	33.55	47.579	42.47	-8.92	PASSED
Hopping on, low end	35.03	56.441	43.95	-8.92	PASSED
78 / 2480	46.66	215.214	55.37	-8.71	PASSED
Hopping on, high end	47.19	228.91	55.9	-8.71	PASSED


Peak (RBW: 1 MHz, VBW: 1 MHz)

Channel / f_c [MHz]	E [dB μ V/m]	E [μ V/m]	U_{RX} [dB μ V]	A_{TOT} [dB]	Result
0 / 2402	45.31	184.215	54.23	-8.92	PASSED
Hopping on, low end	45.61	190.698	54.53	-8.92	PASSED
78 / 2480	56.24	648.475	64.95	-8.71	PASSED
Hopping on, high end	54.25	516.102	62.96	-8.71	PASSED


8DPSK mode. Channel 0 / 2402 MHz

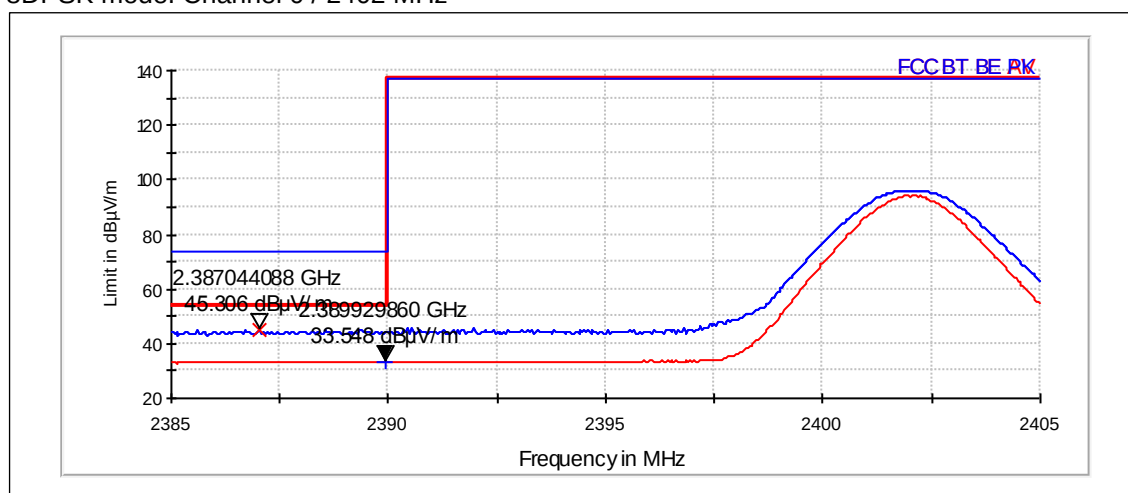


8DPSK mode. Hopping on, low end

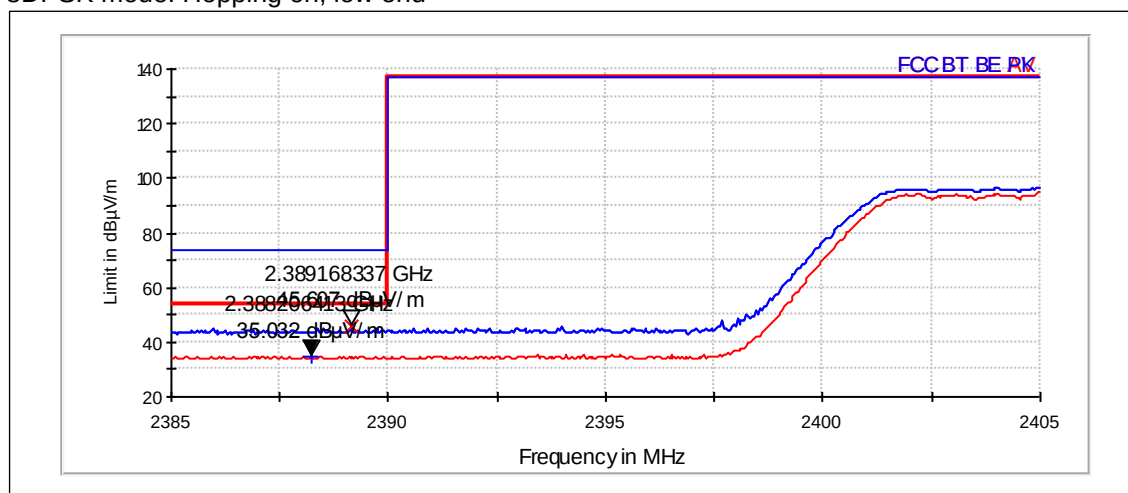

8DPSK mode. Channel 78 / 2480 MHz

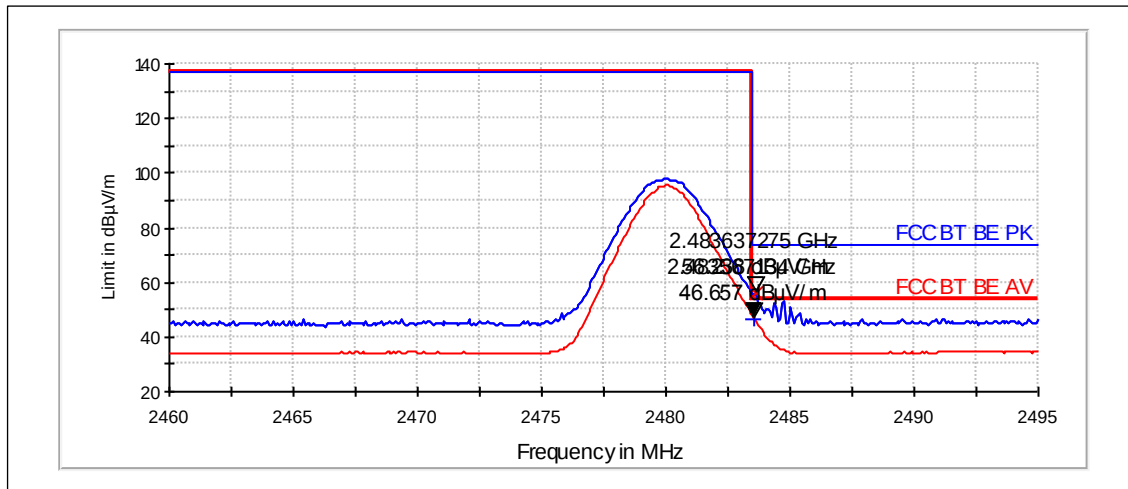


8DPSK mode. Hopping on, high end

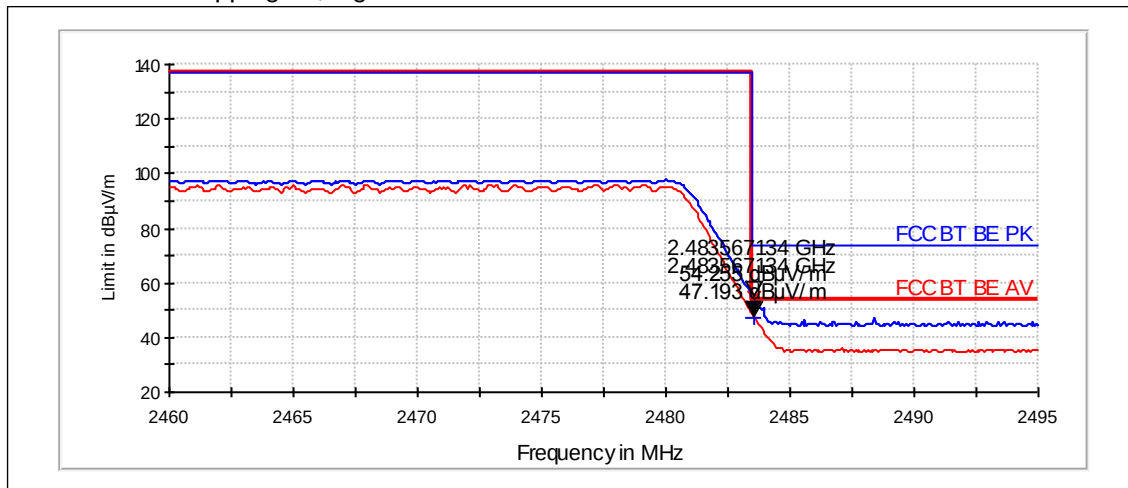

3. Spurious radiated emissions (FCC §15.247(d), §15.209, RSS-210 A8.5)

EUT with DUT number	RM-744, DUT 42469
Accessories with DUT numbers	BL-5CT, DUT 42470 ; AC-8E, DUT 42444 ; WH-102, DUT 42460
Operation Voltage [V] / [Hz]	
Results	
Remarks	
Temp [°C] / Humidity [%RH] / Air Pressure [kPa]	
Date of measurements	11-Feb-2011
Measured by	Jari Jantunen

3.1.1 Test Setup

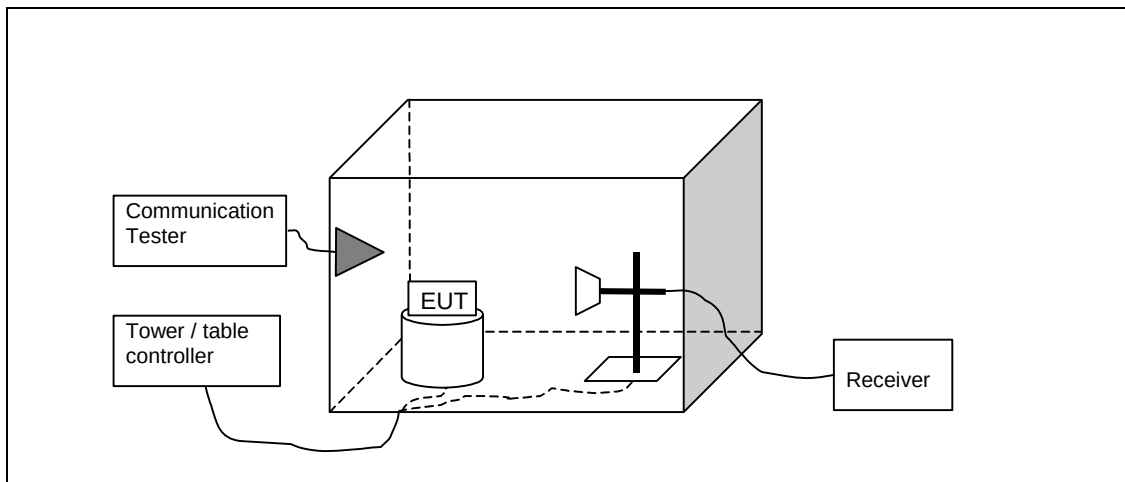

3.2. Test method and limit

The measurement is made according to Public notice DA 00-705 and IC standard RSS-210 as follows:

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with absorbers on the floor and measuring antenna at fixed height using 2-axis EUT position system.

The Final Measurement is performed in the Semi-Anechoic Chamber with conducting metal floor, if the Preliminary Measurement results are closer than 20 dB to the permissible value.

The EUT is placed at nonconductive plate at the turntable center.

For each suspected frequency, the turntable is rotated 360 degrees and antenna is scanned from 1 to 4 m. This is repeated for both horizontal and vertical receive antenna polarizations.

The emissions less than 20 dB below the permissible value are reported.

The measurement results are obtained as described below:

$$E [\mu V/m] = U_{RX} + A_{TOT}$$

Where U_{RX} is receiver reading and A_{TOT} is total correction factor including cable loss, antenna factor and preamplifier gain ($A_{TOT} = L_{CABLES} + A_F - G_{PREAMP}$).

Limits for spurious radiated emissions measurements (3 m measurement distance)

Frequency range [MHz]	Limit [$\mu V/m$]	Limit [dB $\mu V/m$]	Detector
30 - 88	100	40	Quasi peak
88 - 216	150	43.5	Quasi peak
216 - 960	200	46	Quasi peak
960 - 1000	500	54	Quasi peak
Above 1000	500	54	Average
Above 1000	5000	74	Peak

3.3. Bluetooth Test results

3.3.1 GFSK modulation, PRBS packet type

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.1	46	199.411	47.73	-1.73	VERTICAL	PASSED
7439.4	43.43	148.388	41.97	1.46	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4960.1	29.28	29.094	31.01	-1.73	VERTICAL	PASSED
7439.4	30.47	33.385	29.01	1.46	VERTICAL	PASSED

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4806	43.37	147.384	46.11	-2.74	VERTICAL	PASSED
7206.8	44.6	169.824	43.78	0.82	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
4806	27.33	23.249	30.07	-2.74	VERTICAL	PASSED
7206.8	30.5	33.485	29.68	0.82	VERTICAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dBμV/m]	E [μV/m]	U _{RX} [dBμV]	A _{TOT} [dB]	Polarisation	Result
64.83	28.77	27.441	62.06	-33.29	HORIZONTAL	PASSED
65.032	29.49	29.823	62.78	-33.29	HORIZONTAL	PASSED
65.174	29.25	29.007	62.52	-33.27	HORIZONTAL	PASSED
74.189	30.96	35.318	62.95	-31.99	VERTICAL	PASSED
74.198	30.93	35.176	62.92	-31.99	VERTICAL	PASSED
74.811	31.23	36.412	63.03	-31.8	VERTICAL	PASSED
74.899	30.95	35.294	63.15	-32.2	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3914.627	40.72	108.618	43.39	-2.67	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3914.627	27.66	24.146	30.33	-2.67	HORIZONTAL	PASSED

3.3.2 8DPSK modulation, PRBS packet type

Channel 78 / 2480 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4959.6	45.47	187.737	47.23	-1.76	HORIZONTAL	PASSED
7439.7	43.31	146.302	41.85	1.46	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4959.6	29.2	28.834	30.96	-1.76	HORIZONTAL	PASSED
7439.7	30.46	33.331	29	1.46	VERTICAL	PASSED

Channel 0 / 2402 MHz

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4803.9	44.36	165.158	47.11	-2.75	HORIZONTAL	PASSED
7206.5	43.42	148.286	42.61	0.81	HORIZONTAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
4803.9	27.39	23.423	30.14	-2.75	HORIZONTAL	PASSED
7206.5	30.5	33.508	29.69	0.81	HORIZONTAL	PASSED

Channel 40 / 2442 MHz

Quasi peak (RBW: 100 kHz, VBW: 100 kHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
74.198	30.79	34.614	62.78	-31.99	VERTICAL	PASSED
74.702	31.16	36.124	63	-31.84	VERTICAL	PASSED
74.769	21.97	12.539	54.18	-32.21	HORIZONTAL	PASSED
75.257	30.55	33.705	62.26	-31.71	VERTICAL	PASSED
75.58	20.81	10.976	52.48	-31.67	VERTICAL	PASSED
85.87	22.4	13.183	52.87	-30.47	HORIZONTAL	PASSED
945.932	36.8	69.207	51.27	-14.47	HORIZONTAL	PASSED

Peak (RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3922.441	40.2	102.294	42.86	-2.66	VERTICAL	PASSED

Average(RBW: 1 MHz, VBW: 1 MHz)

Frequency [MHz]	E [dB μ V/m]	E [μ V/m]	U _{RX} [dB μ V]	A _{TOT} [dB]	Polarisation	Result
3922.441	27.65	24.135	30.31	-2.66	VERTICAL	PASSED

4. Test Equipment

4.1. Conducted measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38112	Power supply	6632A	Agilent	22/24/27, 15C
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
OM06312	Signal Generator	E4422B	Agilent	22/24
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM30600	Impulse limiter	ESH3-Z2	R&S	15C, 15B
TM26490	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM26491	LISN 50 µH	ESH3-Z5	R&S	15C, 15B
TM37610	Spectrum Analyzer	FSU26	R&S	22/24/27, 15C
TM22806	Battery	BAT 20/E	Fiskars	15C, 15B
TM22805	UPS	PS 20/1.2	Fiskars	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B
-	Temperature test chamber	VT 4002	Vötsch	22/24
2058	Receiver	ESPC	R&S	15C, 15B
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
2002	Communication Tester	CMU200	R&S	22/24/27
2009	LISN 50 µH	ENV216	R&S	15C, 15B
2010	LISN 50 µH	ENV216	R&S	15C, 15B
2012	Power splitter	11667B	Agilent	22/24/27, 15C
2013	Attenuator	8493C	Agilent	22/24/27, 15C
2014	Attenuator	8493C	Agilent	22/24/27, 15C

4.2. Radiated measurements

Eq. No	Equipment	Type	Manufacturer	Used in
TM38114	Power supply	6632A	Agilent	22/24/27, 15C, 15B
TM38631	Signal Generator	83640L	Agilent	22/24/27, 15C, 15B
TM38323	Preamplifier	PA-02 18-26 GHz	EMC Automation	22/24/27, 15C, 15B
-	Antenna	BBHA 9120 D	Schwarzbeck	22/24/27, 15C
TM26497	Antenna	3115	Emco	22/24/27, 15C, 15B
TM37678	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM37773	Communication Tester	CMU200	R&S	22/24/27, 15C, 15B
TM38845	Receiver	ESIB 26	R&S	22/24/27, 15C, 15B
-	Antenna	HL562	R&S	22/24/27, 15C, 15B
-	Turntable	2188	EMCO	22/24/27, 15C, 15B
-	Turntable controller	2090	EMCO	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	RF system panel	TS-RSP	R&S	22/24/27, 15C, 15B
-	Mini mast	2075-2	ETS Lindgren	22/24/27, 15C, 15B
TM38843	Mini mast	2075	Emco	22/24/27, 15C, 15B
TM38842	Antenna mast controller	2090	Emco	22/24/27, 15C, 15B
TM30643	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
TM30644	LISN 50 µH	LISN-5-20-2	FCC	22/24/27, 15C, 15B
-	Temperature and humidity logger	175-H2	Testo	22/24/27, 15C, 15B
-	Air pressure and temperature logger	635-2	Testo	22/24/27, 15C, 15B
-	Air pressure sensor	0638-1835	Testo	22/24/27, 15C, 15B

Eq. No	Equipment	Type	Manufacturer	Used in
TM39180	Laser distance meter	Disto Pro	Leica	22/24/27, 15C, 15B
TM37523	Preamplifier	AMF-4D-10M-3G-25-20P	Miteq	22/24/27, 15C, 15B
TM37498	Preamplifier	AMF-5D-020180-26-10P	Miteq	22/24/27, 15C, 15B
TM30599	Semi anechoic chambre	UNKNOWN	TDK	22/24/27, 15C, 15B
TM22638	Power supply	OL63743-901	-	22/24/27, 15C, 15B
TM38066	High pass filter	4HC3000/18000-3-KK	Trilithic	22/24/27, 15C, 15B
-	High pass filter	F-90-1500-6-R	RLC Electronics	22/24/27, 15C, 15B
TM37545	Tunable notch filter	800.0/960.0-0.2/40-8SSK	Wainwright	22
TM26512	Tunable notch filter	WRCD1850/1910-0.2/40-10SSK	Wainwright	24
-	Band reject filter	WRCG1877/1883-1870/1890-40/6EE	Wainwright	24
-	Band reject filter	WRCG1729.4/1735.4-1722.4/1742.4-40/6SS	Wainwright	27
-	Band reject filter	WRCG832/838-825/848-40/5SS	Wainwright	22
TM23892	Controller	G-1000SDX	Yaesu	22/24/27
2001	Bluetooth tester	CBT	R&S	22/24/27, 15C, 15B
6023	Antenna	VUBA 9117	Schwarzbeck	22/24/27, 15C