


Report on the FCC and IC Testing of the
Agrident GmbH
Mobile RFID Reader for electronic animal
identification
Model: BPR-3001
In accordance with FCC 47 CFR Part 15 C
and ISED RSS-210 and ISED RSS-Gen

Prepared for: Agrident GmbH
Dahlkampsanger 2
30890 Barsinghausen, Germany

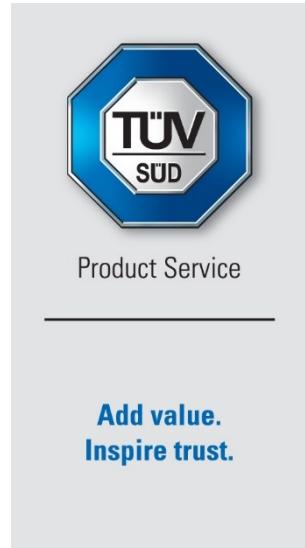

COMMERCIAL-IN-CONFIDENCE

FCC ID: QG2BMR1
IC: 6252A-BMR1

Date: 2025-06-03
Document Number: TR-713337986-05 | Revision 1

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Project Management	Martin Steindl	2025-06-03	 SIGN-ID 1049674
Authorised Signatory	Alexander Grill	2025-06-04	 SIGN-ID 1049999

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Product Service document control rules.

Engineering Statement:

This measurement shown in this report were made in accordance with the procedures described on test pages.

All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC 47 CFR Part 15 C and ISED RSS-210 and RSS-GEN.

The sample tested was found to comply with the requirements defined in the applied rules.

RESPONSIBLE FOR	NAME	DATE	SIGNATURE
Testing	Martin Steindl	2025-06-03	 SIGN-ID 1049674

Laboratory Accreditation
Dakks Reg. No. D-PL-11321-11-02
Dakks Reg. No. D-PL-11321-11-03

Laboratory recognition
Registration No. BNetzA-CAB-16/21-15

Industry Canada test site registration
3050A-2

Executive Statement:

A sample of this product was tested and found to be compliant with FCC 47 CFR Part 15 C:2023 and ISED RSS-210:2024 and ISED RSSGen:2019



DISCLAIMER AND COPYRIGHT

This non-binding report has been prepared by TÜV SÜD Product Service with all reasonable skill and care. The document is confidential to the potential Client and TÜV SÜD Product Service. No part of this document may be reproduced without the prior written approval of TÜV SÜD Product Service. © 2025 TÜV SÜD Product Service.

Trade Register Munich
HRB 85742
VAT ID No. DE129484267
Information pursuant to Section 2(1)
DL-InfoV (Germany) at
www.tuvsgd.com/imprint

Managing Directors:
Walter Reithmaier (Sprecher / CEO)
Patrick van Welij

Phone: +49 (0) 9421 56 82-0
Fax: +49 (0) 9421 56 82-199
www.tuvsgd.com

TÜV SÜD Product Service GmbH
Äußere Frühlingstraße 45
94315 Straubing
Germany



Content

1	Report Summary	2
1.1	Modification Report	2
1.2	Introduction	2
1.3	Brief Summary of Results	3
1.4	Product Information	4
1.5	Test Configuration	5
1.6	Modes of Operation	5
1.7	EUT Modifications Record	5
1.8	Test Location	5
2	Test Details	6
2.1	Antenna requirement	6
2.2	Bandwidth of Signal	7
2.3	Radiated Emissions	9
2.4	Temperature Stability	20
2.5	Conducted Emissions on Mains Terminals	23
3	Measurement Uncertainty	27
Annex:		
A	Photographs of Test Setup	4 pages



1 Report Summary

1.1 Modification Report

Alternations and additions of this report will be issued to the holders of each copy in the form of a complete document.

Revision	Description of changes	Date of Issue
0	First Issue	2025-03-21
1	Correction of IC ID on title page Reworked final calculation table to 300 m on page 17.	2025-06-03

Table 1: Report of Modifications

1.2 Introduction

Applicant	Agrent GmbH Dahlkampsanger 2 30890 Barsinghausen, Germany
Manufacturer	Agrent GmbH
Model Number(s)	BPR-3001
Serial Number(s)	1701000501
Hardware Version(s)	2
Test Specification(s) / Issue / Date	FCC 47 CFR Part 15 C : 2023 and ISED RSS-210, Issue 12 : 2023 ISED RSS-Gen, Issue 5 + Amd. 2 : 2021
Test Plan/Issue/Date	N/A
Order Number	2024-05-16
Date	
Date of Receipt of EUT	2024-06-21, 2025-01-22
Start of Test	2024-06-26, 2025-01-29
Finish of Test	2025-01-29
Name of Engineer(s)	M. Steindl
Related Document(s)	ANSI C63.10:2013



1.3 Brief Summary of Results

A brief summary of the tests carried out in accordance with FCC 47 CFR Part 15 C and ISED RSS-210 and RSS-Gen is shown below.

Section	Specification Clause	Test Description	Result
2.1	15.203	Antenna requirement	Pass
2.2	15.215(c)	Bandwidth of Signal	Pass
2.3	15.207	Conducted Disturbance at Mains Terminal	Pass
2.5	15.209	Radiated Disturbance	Pass

Table 2: Results according to FCC 47 CFR Part 15 C

Section	Specification Clause	Test Description	Result
2.3	7.3	Radiated Emissions	Pass
2.5	7.3	AC Power Line Conducted Emissions	Pass

Table 3: Results according to ISED RSS-210

Section	Specification Clause	Test Description	Result
2.2	6.7	Bandwidth of Signal	Pass
2.4	8.11	Temperature Stability	Pass
2.5	8.8	AC Power Line Conducted Emissions	Pass
2.3	8.9, 8.10	Radiated Emissions	Pass

Table 4: Results according to ISED RSS-Gen



1.4 Product Information

1.4.1 Technical Description


Frequency Bands: 134.2 kHz

Supply Voltage: 14.4 V

Supply Frequency: Internal battery supply

External Supply Voltage: 120 V

External Supply Frequency: 60 Hz

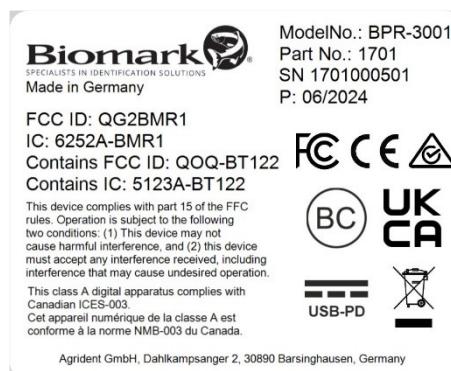

1.4.2 List of Antennas

Manufacturer	Model	Antenna impedance	Antenna Type	Antenna gain
Agrient	BPR-3001 Racket antenna	N/A	Loop antenna	N/A

Table 5: List of antennas

1.4.3 EUT Ports / Cables identification

Port	Max Cable Length specified	Usage	Screened
USB	2 m	Signal/Control port with DC power	y
Antenna cable	2 m	Signal/Control port	n

Table 6



1.5 Test Configuration

The EUT was configured in stand alone mode.

The EUT was provided with a Globtek GTM96605-G2A1-R3A external power supply.

1.6 Modes of Operation

Reading tag continuously.

1.7 EUT Modifications Record

The table below details modifications made to the EUT during the test programme.

The modifications incorporated during each test are recorded on the appropriate test pages.

Modification State	Description of Modification still fitted to EUT	Modification Fitted By	Date Modification Fitted
0	As supplied by the customer	Not Applicable	Not Applicable

Table 7

1.8 Test Location

TÜV SÜD Product Service conducted the following tests at our Straubing test laboratory:

Test Name	Name of Engineer(s)
Conducted Disturbance at Mains Terminal	M. Steindl
Antenna requirement	M. Steindl
Bandwidth of Signal	M. Steindl
Conducted Disturbance at Mains Terminal	M. Steindl
Radiated Disturbance	M. Steindl
Temperature Stability	M. Steindl

Office Address:

Äußere Frühlingstraße 45
94315 Straubing
Germany



2 Test Details

2.1 Antenna requirement

2.1.1 Specification Reference

FCC 47 CFR Part 15 C, Clauses 15.203

2.1.2 Equipment under Test and Modification State

BPR-3001; S/N: 1701000501; Modification State 0

2.1.3 Specification Limits

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some fields disturbance sensors, or to other intentional radiators which must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits are not exceeded.

2.1.4 Test Results

The EUT uses a dedicated hand held RFID antenna and an internal antenna for Bluetooth.



2.2 Bandwidth of Signal

2.2.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.215(c)
ISED RSS-Gen, Clause 6.7

2.2.2 Equipment under Test and Modification State

BPR-3001; S/N: 1701000501; Modification State 0

2.2.3 Date of Test

2025-01-29

2.2.4 Environmental Conditions

Ambient Temperature	23 °C
Relative Humidity	32 %

2.2.5 Specification Limits


No limitation – Bandwidth noted

2.2.6 Test Method

The test was performed according to ANSI C63.10, clauses 6.9
See section 2.3 of this test report for details.



2.2.7 Test Results

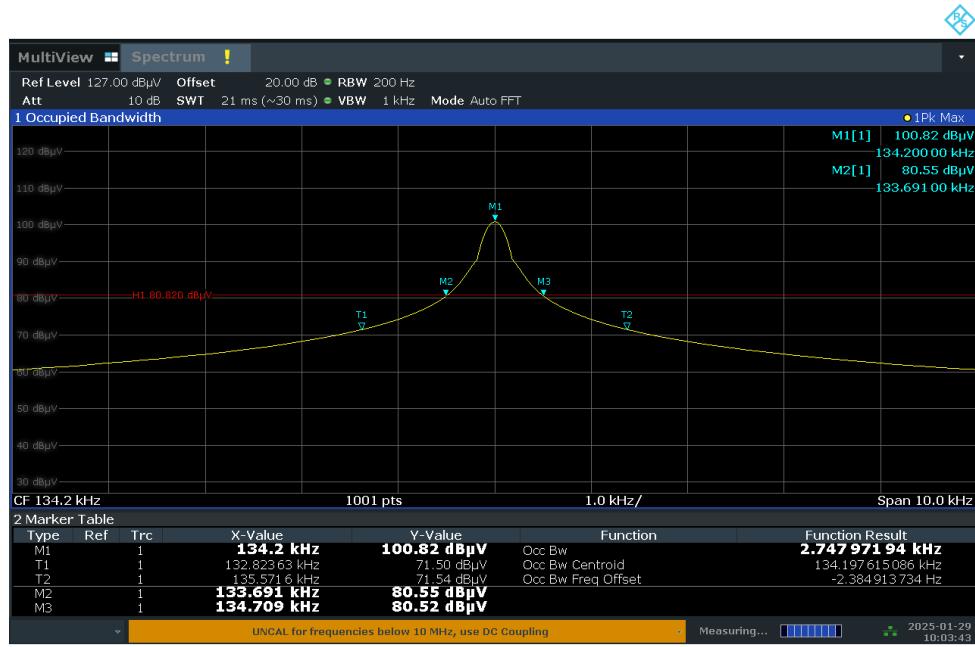

Center frequency	20 dB Bandwidth	99% Bandwidth
134.2 kHz	1.018 kHz	2.747972 kHz

Table 8: 20 dB bandwidth and 99% bandwidth

2.2.8 Test Location and Test Equipment

The test was carried out in fully anechoic room, Cabin No. 2.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Loop antenna	Schwarzbeck	FMZB 1519 B	44334	36	2026-05-30
Signal and spectrum analyser	Rohde & Schwarz	FSW43	53497	12	2025-04-30
Fully anechoic room	Albatross Projects	Cabin No. 2	19312		

Table 9



2.3 Radiated Emissions

2.3.1 Specification Reference

FCC 47 CFR Part 15 C, Clauses 15.205, and 15.209
ISED RSS-210, Clause 7.7
ISED RSS-Gen, Clauses 8.9 and 8.10

2.3.2 Equipment under Test and Modification State

BPR-3001; S/N: 1701000501; Modification State 0

2.3.3 Date of Test

2025-01-29

2.3.4 Environmental Conditions

Ambient Temperature	23 °C
Relative Humidity	32 %



2.3.5 Specification Limits

General radiated emission limits:					
Frequency Range (MHz)	Test distance (m)	Field strength		Field strength	
		(μ A/m)	(dB μ A/m)	(μ V/m)	(dB μ V/m)
0.009 – 0.49	300	6.37 / f	20*lg(6.37 / f)	2400 / f	20*lg(2400 / f)
0.49 – 1.705	30	63.7 / f	20*lg(63.7 / f)	24000 / f	20*lg(24000 / f)
1.705 – 30	30	0.08	20*lg(0.08 / f)	30	20*lg(30 / f)
30 – 88	3	---	---	100	40
88 – 216	3	--	---	150	43.5
126 – 960	3	--	---	200	46
above 960	3	--	---	500	54

Note 1: f in kHz

Table 10 General radiated emission limits

At frequencies at or above 30 MHz, measurements may be performed at distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempts should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

2.3.6 Test Method

The test was performed according to ANSI C63.10, sections 11.11 and 11.12


Prescans are performed in six positions of the EUT to get the full spectrum of emission caused by the EUT with the measuring antenna raised and lowered from 1 m to 4 m with vertical and horizontal polarisation to find the combination of table position, antenna height and antenna polarisation for the maximum emission levels.

Data reduction is applied to these results to select those levels having less margin than 10 dB or exceeding the limit using subranges and limited number of maximums.

Further maximisation for adjusting the maximum position is following.

Equipment and cables are placed and moved within the range of position likely to find their maximum emissions.

2.3.6.1 Frequency range 9 kHz – 30 MHz

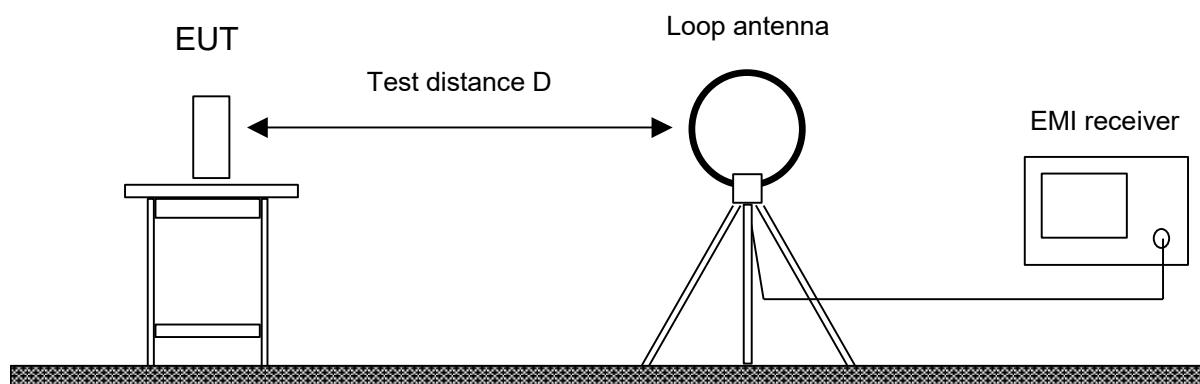


The EUT was placed on a non-conductive table, 0.8 m above the ground.

Radiated emissions in the frequency 9 kHz – 30 MHz is measured within a semi-anechoic room with an active loop antenna with the measurement detector set to peak. In addition in the frequency range 9 kHz to 490 kHz also an average detector was used. The measurement bandwidth of the receiver was set to 300 Hz in the frequency range 9 kHz to 150 kHz and 10 kHz in the frequency range 150 kHz to 30 MHz. Prescans were performed in six positions of the EUT.

For final measurements the detector was set to CISPR quasi-peak and in addition to CISPR average in the frequency range 9 kHz to 490 kHz with a resolution bandwidth 200 Hz in the frequency range 9 kHz to 150 kHz and 9 kHz in the frequency range 150 kHz to 30 MHz. Final tests were performed immediately after a final frequency and zoom (for drifting disturbances) and maximum adjustment.

2.3.6.2 Frequency range 30 MHz – 1 GHz

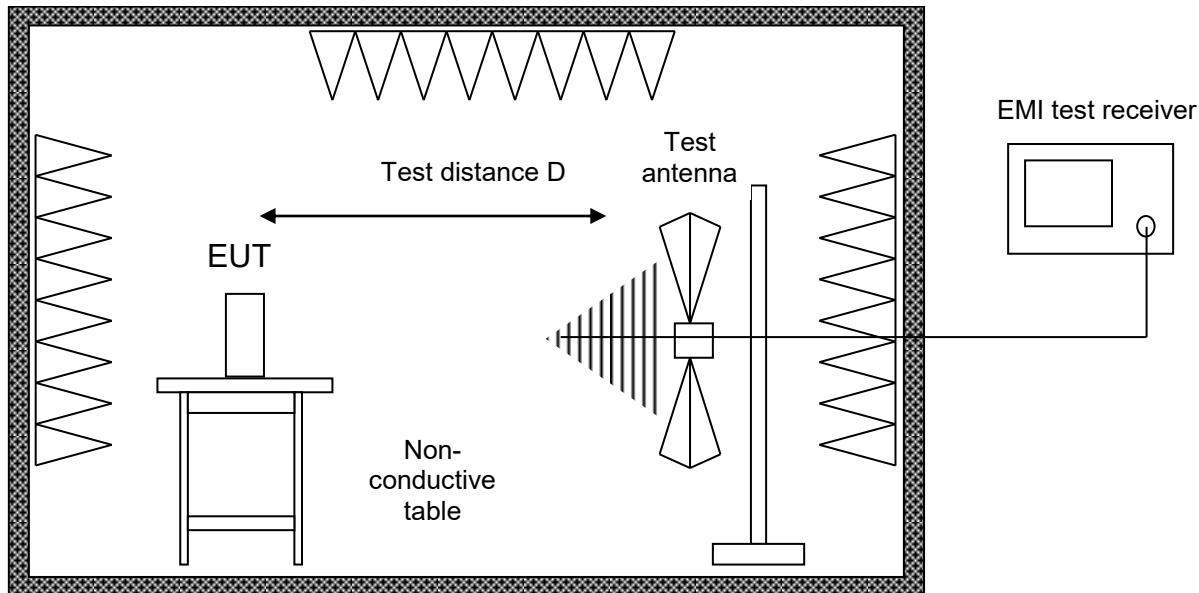

Alternate test site (semi anechoic room)

The EUT was placed on a non-conductive table, 0.8 m above the ground plane. Radiated emissions in the frequency range 30 MHz – 1 GHz is measured within a semi-anechoic room with groundplane complying with the NSA requirements of ANSI C63.4. for alternative test sites. A linear polarised logarithmic periodic antenna combined with a 4:1 broadband dipole ("Trilog broadband antenna") is used.

For prescan tests the test receiver is set to peak-detector with a bandwidth of 120 kHz. With the measurement bandwidth of the test receiver set to 120 kHz CISPR quasi-peak detector is selected for final measurements following immediately after a final frequency zoom (for drifting disturbances) and maximum adjustment.



2.3.7 Test Results

Frequency range	Limit applied	Test distance
9 kHz – 30 MHz	§ 15.209	3 m and 10 m
30 MHz – 1 GHz	§ 15.209	3 m

Table 11

Sample calculation:

$$\text{Final Value (dB}\mu\text{V/m)} = \text{Reading Value (dB}\mu\text{V)} + (\text{Cable attenuation (dB)} + \text{Antenna Transducer (dB(1/m)))}$$

Additional measurement correction in the frequency range 9 – 490 kHz (3 m to 300 m): -80.0 dB


Additional measurement correction in the frequency range 490 kHz – 30 MHz (3 m to 30 m): -40.0 dB

Additional measurement correction in the frequency range 9 – 490 kHz (10 m to 300 m): -59.1 dB

Additional measurement correction in the frequency range 490 kHz – 30 MHz (10 m to 30 m): -19.1 dB

Additional measurement correction in the frequency ranges above 1 GHz (1 m to 3 m): -9.54 dB


Test distance 3 m, Antenna flat on table

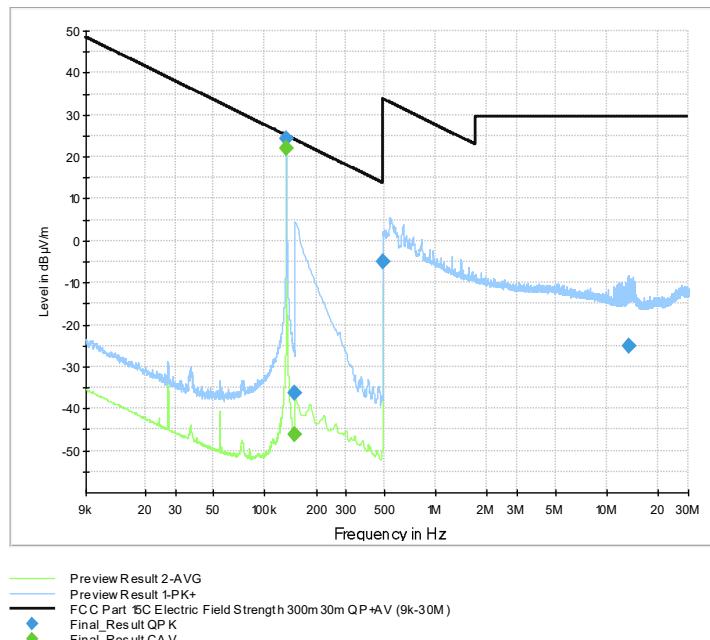

Frequency MHz	Qua- siPeak dB μ V/m	CAver- age dB μ V/m	Limit dB μ V/m	Mar- gin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB
0.134160	---	22.05	25.05	---*	1000	0.2	100.0	H	174.0	-60.6
0.134160	24.44	---	45.05	---*	1000	0.2	100.0	H	174.0	-60.6
0.150000	---	-46.21	24.08	70.29	1000	0.2	100.0	H	198.0	-60.6
0.150000	-36.21	---	44.08	80.29	1000	0.2	100.0	H	198.0	-60.6
0.492250	-4.86	---	33.76	38.62	1000	9	100.0	V	-163.0	-20.6
13.420000	-24.93	---	29.54	54.47	1000	9	100.0	V	30.0	-20.8

---*: See final evaluation for 300 m distance.


Test distance 3 m, Antenna on long side

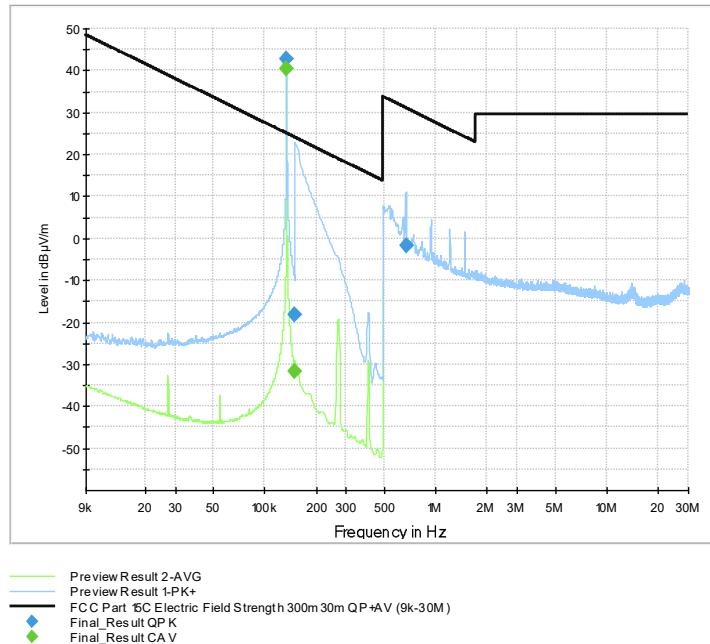

Fre-quency MHz	Qua-siPeak dBµV/m	CAver-age dBµV/m	Limit dBµV/m	Mar-gin dB	Meas. Time ms	Band-width kHz	Height cm	Pol	Azi-muth deg	Corr. dB
0.134160	---	40.29	25.05	---	1000	0.2	100.0	H	147.0	-60.6
0.134160	42.68	---	45.05	---	1000	0.2	100.0	H	147.0	-60.6
0.150000	---	-31.64	44.08	75.72	1000	0.2	100.0	H	151.0	-60.6
0.150000	-18.03	---	24.08	42.11	1000	0.2	100.0	H	151.0	-60.6
0.669000	-1.77	---	31.10	32.87	1000	9	100.0	H	159.0	-20.6

---*: See final evaluation for 300 m distance.


Test distance 3 m, Antenna in upright position

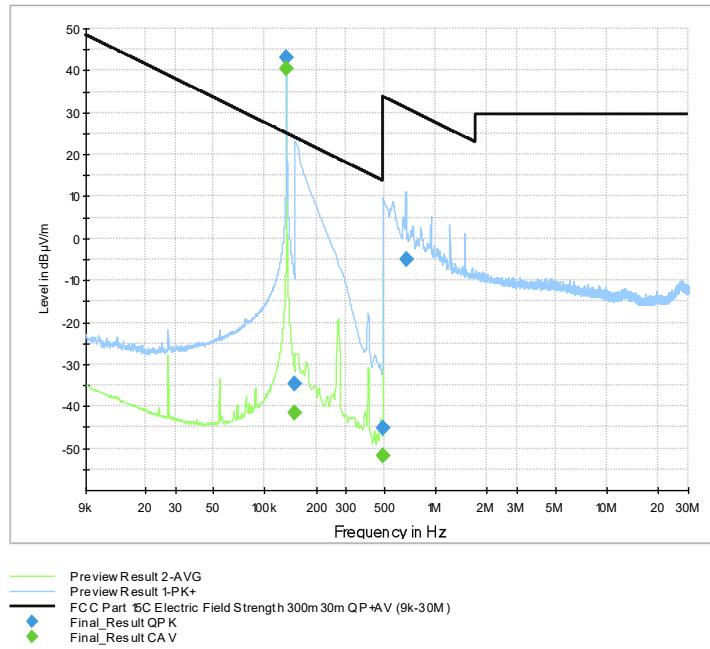

Fre-quency MHz	Qua-siPeak dBµV/m	CAver-age dBµV/m	Limit dBµV/m	Mar-gin dB	Meas. Time ms	Band-width kHz	Height cm	Pol	Azi-muth deg	Corr. dB/m
0.134160	---	40.57	25.05	---*	1000	0.2	100.0	V	168.0	-60.6
0.134160	42.99	---	45.05	---*	1000	0.2	100.0	V	168.0	-60.6
0.150000	---	-41.59	24.08	65.67	1000	9	100.0	V	165.0	-60.6
0.150000	-34.80	---	44.08	78.88	1000	9	100.0	V	165.0	-60.6
0.490000	---	-51.85	13.80	65.65	1000	9	100.0	V	190.0	-60.6
0.490000	-45.26	---	33.80	79.06	1000	9	100.0	V	190.0	-60.6
0.669000	-5.11	---	31.10	36.21	1000	9	100.0	V	194.0	-20.6

---*: See final evaluation for 300 m distance.

Test distance 10 m, Antenna in upright position

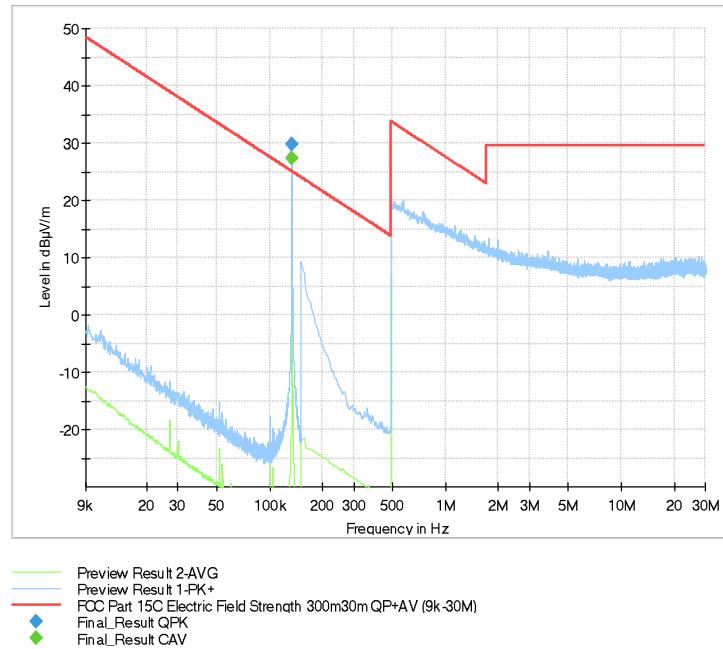

Frequency MHz	Qua- siPeak dB μ V/m	CAverage dB μ V/m	Limit dB μ V/m	Mar- gin dB	Meas. Time ms	Band- width kHz	Pol	Azi- muth deg	Corr. dB
0.134160	---	27.36	25.05	---	1000	0.2	H	-165.0	-39.1
0.134160	29.77	---	45.05	---	1000	0.2	H	-165.0	-39.1

---*: See final evaluation for 300 m distance.



Final evaluation for 300 m distance:

Frequency (MHz)	Detector	Distance			Field Strength		Correction Factor (dB/m)	Extrapolation Factor		Final Value (dBµV/m)	Limit (dBµV/m)	Margin (dB)
		d1 (m)	d2 (m)	d (m)	d1 (dBµV/m)	d2 (dBµV/m)		(dB/dec)	(dB)			
0.13416	PK	3	10	300	43.0	30.2	19.9	-66.4	-98.1	-9.0	45.1	54.0
0.13416	CAV	3	10	300	40.6	27.6	19.9	-66.4	-98.1	-11.7	25.1	36.8


Sample calculation of final values:

$$\text{Extrapolation Factor (dB/decade)} = \begin{cases} -40 \text{ (dB/decade)} & \text{if } d_1 = d_2 \\ \frac{\text{Reading Value } d_2 \text{ (dBµV)} - \text{Reading Value } d_1 \text{ (dBµV)}}{\text{Log}(d_2) - \text{Log}(d_1)} & \text{if } d_1 \neq d_2 \end{cases}$$

$$\begin{aligned} \text{Extrapolation Factor (dB)} &= (\text{Log}(d) - \text{Log}(d_2)) \cdot \text{Extrapolation Factor (dB/decade)} \\ \text{Final Value (dBµV/m)} &= \text{Reading Value } d_2 \text{ (dBµV)} + \text{Correction Factor (dB/m)} \\ &\quad + \text{Extrapolation Factor (dB)} \end{aligned}$$

Note: Extrapolation factor (dB) and final value (dBµV/m) are relating to distance d.

Test distance 3 m, Antenna in upright position

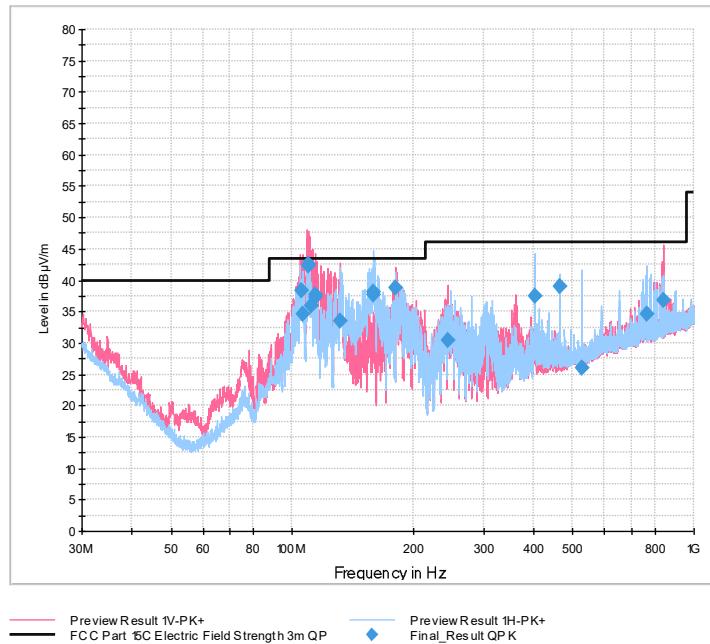

Frequency MHz	Qua- siPeak dB μ V/m	Limit dB μ V/m	Margin dB	Meas. Time ms	Band- width kHz	Height cm	Pol	Azi- muth deg	Corr. dB/m
105.990000	38.24	43.50	5.26	1000	120	125.0	V	151.0	17.3
106.110000	34.68	43.50	8.82	1000	120	107.0	V	-165.0	17.3
109.980000	42.43	43.50	1.07	1000	120	106.0	V	152.0	17.4
110.010000	42.42	43.50	1.08	1000	120	103.0	V	130.0	17.4
112.050000	35.84	43.50	7.66	1000	120	100.0	V	144.0	17.4
114.030000	37.76	43.50	5.74	1000	120	100.0	V	103.0	17.4
114.030000	37.15	43.50	6.35	1000	120	100.0	V	103.0	17.4
132.030000	33.46	43.50	10.04	1000	120	109.0	V	82.0	16.6
159.000000	38.21	43.50	5.29	1000	120	186.0	H	-73.0	14.9
159.030000	37.61	43.50	5.89	1000	120	177.0	H	-77.0	14.9
181.350000	38.83	43.50	4.67	1000	120	103.0	V	-109.0	15.7
244.470000	30.46	46.02	15.56	1000	120	103.0	V	82.0	17.2
403.170000	37.50	46.02	8.52	1000	120	181.0	H	-107.0	22.3
464.760000	39.10	46.02	6.91	1000	120	183.0	H	-113.0	24.0
525.570000	26.00	46.02	20.02	1000	120	192.0	H	-100.0	25.0
765.000000	34.54	46.02	11.48	1000	120	103.0	H	-127.0	28.6
836.970000	36.89	46.02	9.13	1000	120	119.0	V	-147.0	29.6



2.3.8 Test Location and Test Equipment

The test was carried out in semi anechoic room, Cabin No. 8

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Loop antenna	Schwarzbeck	FMZB 1519 B	44334	36	2026-06-30
EMI test receiver	Rohde & Schwarz	ESW26	28268	12	2025-04-30
EMC measurement software	Rohde & Schwarz	EMC32 Emission K8 – V10.60.20	19927		
Semi anechoic room	Albatross Projects	Cabin No. 8	19917		

Table 12

The test was carried out in semi anechoic room, Cabin No. 11

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Loop antenna	Schwarzbeck	FMZB 1519 B	44334	36	2026-06-30
ULTRALOG antenna	Rohde & Schwarz	HL562E	61486	36	2026-04-30
Fixed attenuator	Rohde & Schwarz	HL562E-ATT 6dB	61491	36	2026-04-30
EMI test receiver	Rohde & Schwarz	ESW44	39897	12	2025-04-30
EMC measurement software	Rohde & Schwarz	EMC32 Emission K11 – V10.50	42986		
Semi anechoic room	Frankonia	Cabin No. 11	42961		

Table 13



2.4 Temperature Stability

2.4.1 Specification Reference

ISED RSS-Gen, Clause 6.11, 8.11

2.4.2 Equipment under Test and Modification State

BPR-3001; S/N: 1701000501; Modification State 0

2.4.3 Date of Test

2025-01-28

2.4.4 Environmental Conditions


Ambient Temperature	°C
Relative Humidity	%

2.4.5 Specification Limits

If the stability of the license-exempt radio apparatus is not specified in the applicable RSS, the fundamental emissions of the radio apparatus should be kept within at least the central 80 % of its permitted operating frequency band in order to minimize the possibility of out-of-band operation. In addition, its occupied bandwidth shall be entirely outside the restricted bands and the prohibited TV bands of 85 MHz – 72 MHz, 76 MHz – 88 MHz, 174 MHz – 216 MHz, and 470 MHz – 602 MHz, unless otherwise indicated.

2.4.6 Test Method

The test was performed according to ANSI C63.10, section 6.8.

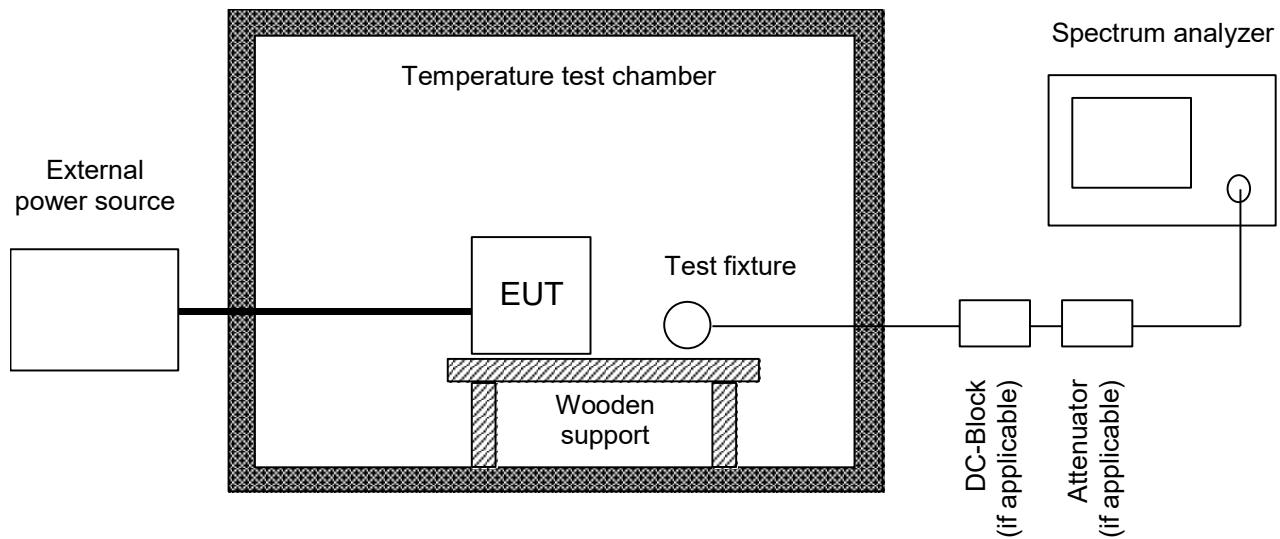

The frequency tolerance of the carrier signal is measured over a temperature variation of -20 °C to +50 °C at normal supply voltage, and for a variation in the primary supply voltage from 85 % to 115 % of the rated supply voltage at a temperature of 20 °C. Temperature and voltage range may vary if the manufacturer states another temperature or voltage range.

If the EUT provides an antenna connector the spectrum analyzer is connected to this port. If required, a resistive matching network equal to the impedance specified or employed for the antenna is used as well as a DC block and appropriate (50 Ω) attenuators. In case where the EUT does not provide an antenna connector or a test fixture is used.

For battery operated equipment, the test is performed using a new battery. Alternatively, an external supply voltage can be used and is at least set to:

- The maximum battery voltage as delivered by a new battery or 115 % of the battery nominal voltage;
- The battery nominal voltage
- 85 % of the battery nominal voltage
- The battery operating end point voltage which shall be specified by the equipment manufacturer.

The EUT is operating providing an unmodulated carrier for frequency error tests. The peak detector of the spectrum analyzer is selected and resolution as well as video bandwidth are set to values appropriate to shape of the spectrum of the EUT. The frequency counter mode of the spectrum analyzer is used to maximize the accuracy of the measured frequency tolerance.

If an unmodulated carrier is not available a significant and stable point of the spectrum is selected and the span is reduced to a value that delivers an accuracy which shall be better than 1 % of the maximum frequency tolerance allowed for the carrier signal. This method may be performed as long as the margin to the frequency tolerance is larger than the uncertainty of the measured frequency tolerance.



2.4.7 Test Results

Temperature	f_L	f_H	f_C	Frequency drift
-20 °C	133.4909 kHz	134.9381 kHz	134.2145 kHz	0.0 Hz
-10 °C	133.4909 kHz	134.9525 kHz	134.2217 kHz	7.2 Hz
0 °C	133.4909 kHz	134.9525 kHz	134.2217 kHz	7.2 Hz
10 °C	133.4909 kHz	134.9381 kHz	134.2145 kHz	0.0 Hz
20 °C	133.4909 kHz	134.9381 kHz	134.2145 kHz	0.0 Hz
30 °C	133.4909 kHz	134.9381 kHz	134.2145 kHz	0.0 Hz
40 °C	133.4909 kHz	134.9525 kHz	134.2217 kHz	7.2 Hz
50 °C	133.4909 kHz	134.9525 kHz	134.2217 kHz	7.2 Hz
60 °C	133.4909 kHz	134.9525 kHz	134.2217 kHz	7.2 Hz

Table 14

2.4.8 Test Location and Test Equipment

The test was carried out in radio test laboratory.

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
Signal and spectrum analyzer	Rohde & Schwarz	FSV40	20219	24	2026-03-31
Climatic test chamber	ESPEC	PL-4J	38958	24	2026-01-31

Table 15



2.5 Conducted Emissions on Mains Terminals

2.5.1 Specification Reference

FCC 47 CFR Part 15 C, Clause 15.207
ISED RSS-Gen, Clause 8.8

2.5.2 Equipment under Test and Modification State

BPR-3001; S/N: 1701000501; Modification State 0

2.5.3 Date of Test

2024-06-26

2.5.4 Environmental Conditions

Ambient Temperature 25 °C
Relative Humidity 54 %

2.5.5 Specification Limits


Required Specification Limits			
Line Under Test	Frequency Range (MHz)	Quasi-peak (dB μ V)	Average (dB μ V)
AC Power Port	0.15 to 0.5	66 to 56*	56 to 46*
	0.5 to 5	56	46
	5 to 30	60	50

Supplementary information: *Decreases with the logarithm of the frequency.

Table 16 Emission limits

2.5.6 Test Method

The test was performed according to ANSI C63.10, section 6.2.

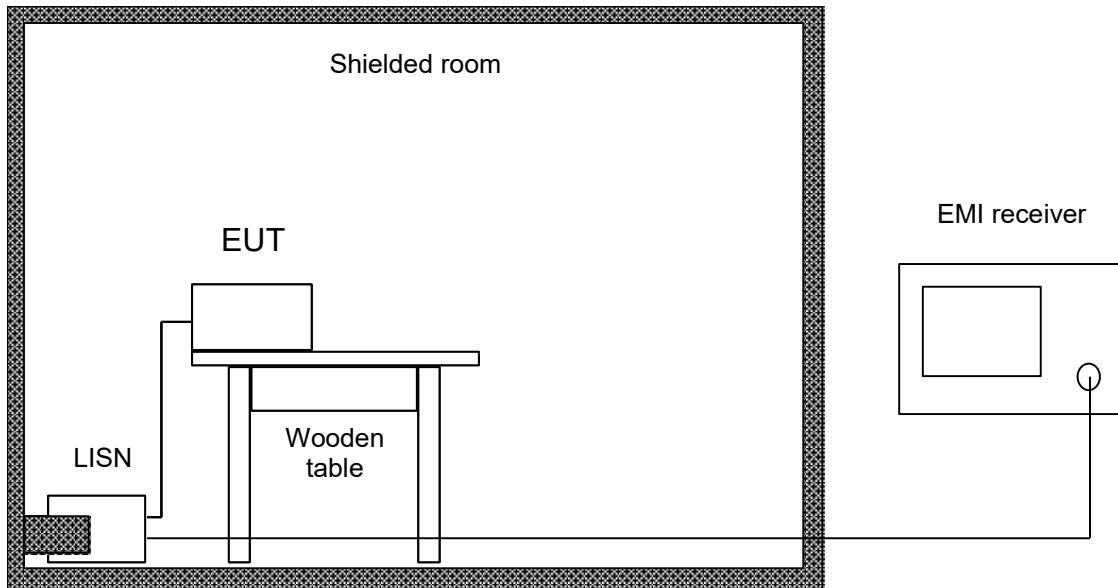

The EUT was placed on a non-conductive table 0.8 m above a reference ground plane and 0.4 m away from a vertical coupling plane

All power was connected to the EUT through an Line Impedance Stabilization Network (LISN). Conducted disturbance voltage measurements on mains lines were made at the output of the LISN. The LISN was placed 0.8 m from the boundary of the EUT and bounded to the reference ground plane. To simplify testing with quasi-peak and linear average (cisia-average) detector the following procedure is used:


First the whole spectrum of emission caused by the equipment under test (EUT) is recorded with the detectors set to peak and average using CISPR bandwidth of 10 kHz. After that all emission levels having less margin than 10 dB to or exceeding the average limit are retested with the detectors set to quasi-peak and average. If the average limit is kept with quasi-peak levels measurement with average detector is optional. In cases of emission levels between quasi-peak and average limit an additional measurement with average detector has to be performed.

2.5.7 Test Results

Sample calculation:


$$\text{Final Value (dB}\mu\text{V)} = \text{Reading Value (dB}\mu\text{V)} + (\text{Cable attenuation (dB)} + \text{LISN Transducer (dB)})$$

Line L1:

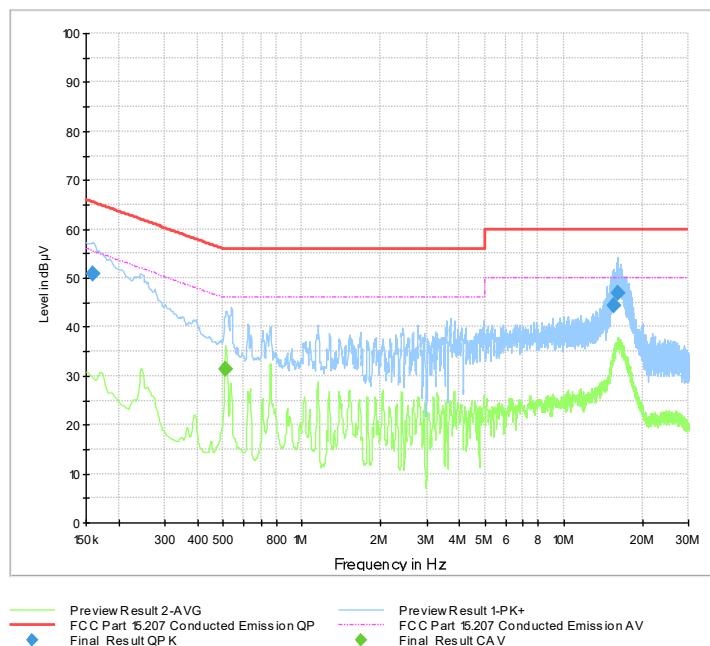

Frequency MHz	QuasiPeak dB μ V	CAverage dB μ V	Limit dB μ V	Margin dB	Meas. Time ms	Bandwidth kHz	Corr. dB
0.159000	50.84	---	65.52	14.67	1000	9	10.1
0.512250	---	31.25	46.00	14.75	1000	9	10.1
15.573750	44.36	---	60.00	15.64	1000	9	10.3
16.138500	46.91	---	60.00	13.09	1000	9	10.3

Line N:

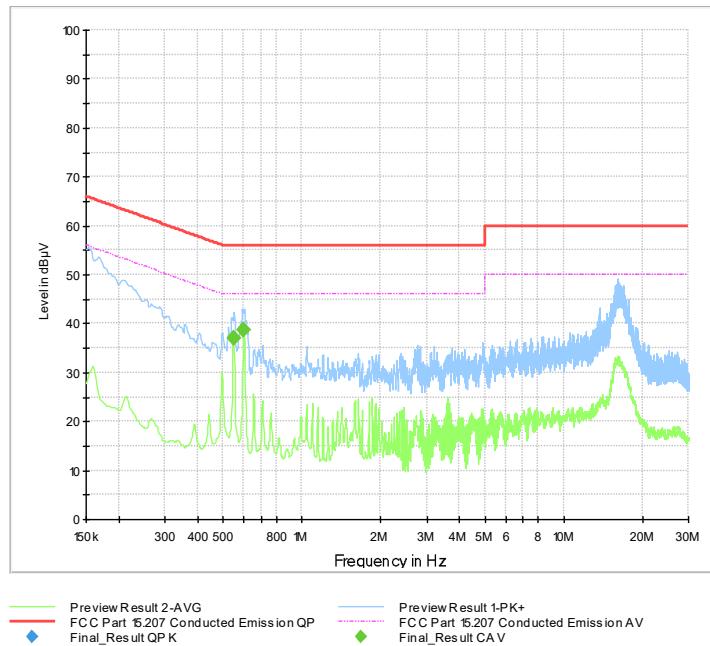

Frequency MHz	QuasiPeak dB μ V	CAverage dB μ V	Limit dB μ V	Margin dB	Meas. Time ms	Bandwidth kHz	Corr. dB
0.550500	---	36.93	46.00	9.07	1000.0	9.000	10.1
0.602250	---	38.68	46.00	7.32	1000.0	9.000	10.1

2.5.8 Test Location and Test Equipment

The test was carried out in shielded room, cabin No. 9

Instrument	Manufacturer	Type No	TE No	Calibration Period (months)	Calibration Due
EMI test receiver	Rohde & Schwarz	ESU8	19904	12	2025-05-31
V-network	Rohde & Schwarz	ENV216	39910	12	2025-09-30
EMC measurement software	Rohde & Schwarz	EMC32 Emission – V10.60.20	19927		
Shielded room	Albatross Projects	Cabin No. 9	21083		

Table 17



3 Measurement Uncertainty

For a 95% confidence level, the measurement uncertainties for defined systems are:

Radio Interference Emission Testing		
Test Name	<i>kp</i>	Expanded Uncertainty
Conducted Voltage Emission		
9 kHz to 150 kHz (50Ω/50µH AMN)	2	± 3.8 dB
150 kHz to 30 MHz (50Ω/50µH AMN)	2	± 3.4 dB
100 kHz to 200 MHz (50Ω/5µH AMN)	2	± 3.6 dB
Discontinuous Conducted Emission		
9 kHz to 150 kHz (50Ω/50µH AMN)	2	± 3.8 dB
150 kHz to 30 MHz (50Ω/50µH AMN)	2	± 3.4 dB
Conducted Current Emission		
9 kHz to 200 MHz	2	± 3.5 dB
Magnetic Fieldstrength		
9 kHz to 30 MHz (with loop antenna)	2	± 3.9 dB
9 kHz to 30 MHz (large-loop antenna 2 m)	2	± 3.5 dB
Radiated Emission		
30 MHz to 300 MHz	2	± 4.9 dB
300 MHz to 1 GHz	2	± 5.0 dB
1 GHz to 6 GHz	2	± 4.6 dB
Test distance 10 m		
30 MHz to 300 MHz	2	± 4.9 dB
300 MHz to 1 GHz	2	± 4.9 dB
The expanded uncertainty reported according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 is based on a standard uncertainty multiplied by a coverage factor of <i>kp</i> = 2, providing a level of confidence of <i>p</i> = 95.45%		

Table 18 Measurement uncertainty based on CISPR 16-4-2



<i>Radio Interference Emission Testing</i>		
<i>Test Name</i>	<i>kp</i>	<i>Expanded Uncertainty</i>
Occupied Bandwidth	2	± 5 %
Conducted Power		
9 kHz ≤ f < 30 MHz	2	± 1.0 dB
30 MHz ≤ f < 1 GHz	2	± 1.5 dB
1 GHz ≤ f ≤ 40 GHz	2	± 2.5 dB
1 MS/s power sensor (TS8997)	2	± 1.5 dB
Occupied Bandwidth	2	± 5 %
Power Spectral Density	2	± 3.0 dB
Radiated Power		
25 MHz – 6 GHz	1.96	±4.4 dB
1 GHz – 18 GHz	1.96	±4.7 dB
18 GHz – 40 GHz	1.96	±4.9 dB
40 GHz – 325 GHz	1.96	±6.1 dB
Conducted Spurious Emissions	2	± 3.0 dB
Radiated Spurious Emissions	2	± 6.0 dB
Voltage		
DC	2	± 1.0 %
AC	2	± 2.0 %
Time (automatic)	2	± 5 %
Frequency	2	± 10 ⁻⁷

The expanded uncertainty reported according to ETSI TR 100 028:2001 is based on a standard uncertainty multiplied by a coverage factor of $kp = 2$, providing a level of confidence of $p = 95.45\%$

Table 19 Measurement uncertainty based on ETSI TR 100 028

The measurement uncertainty in the laboratory is less than or equal to the maximum measurement uncertainty according to CISPR16-4-2: 2011 + A1 + A2 + Cor1 (U_{CISPR}) and as specified in the test report below. This normative regulation means that the measured value is also the value to be assessed in relation to the limit value.



<i>Test Name</i>	<i>Expanded Uncertainty</i>
Occupied Bandwidth	±5 %
Conducted Power	
9 kHz ≤ f < 30 MHz	±1.0 dB
30 MHz ≤ f < 1 GHz	±1.5 dB
1 GHz ≤ f ≤ 40 GHz	±2.5 dB
1 MS/s power sensor (2.4 / 5 GHz band)	±1.5 dB
Power Spectral Density	±3.0 dB
Radiated Power	
25 MHz – 26.5 GHz	±6.0 dB
26.5 GHz – 66 GHz	±8.0 dB
40 GHz – 325 GHz	±10.0 dB
Conducted Spurious Emissions	±3.0 dB
Radiated Field Strength 9 kHz – 40 GHz	±6.0 dB
Voltage	
DC	± 1.0 %
AC	± 2.0 %
Time (automatic)	± 5 %
Frequency	± 10 ⁻⁷

Table 20 Decision Rule: Maximum allowed measurement uncertainty

End of Test Report