


## Operational Description

1. Power : Power is supplied to the device through AC DC Adapter.
2. Tuner : distributes the broadcasting signals to the channel bandwidth to supply consistent signal
3. Processor : converts IF(Tuner)/Video signal into R.G.B. SYNC and sound signal.
4. MICOM : parts controller
5. FM - TX : transmits the sound to FM
6. CHROMA : receives R.G.B. SYNC and adjusts colors for the consistent output level.
7. Panel : displays image

## Operating Concept

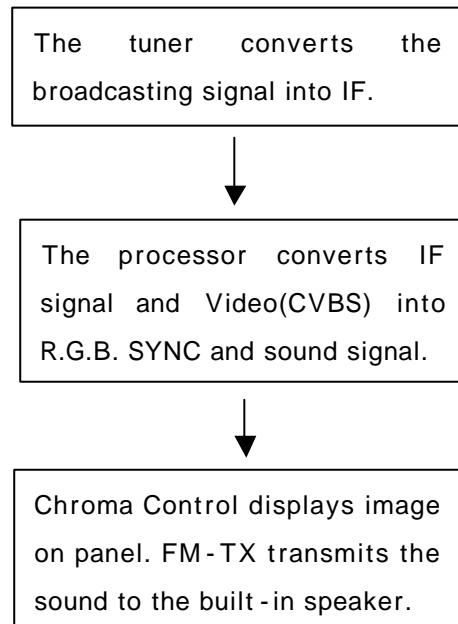

\* Power and MICOM supply power to the circuit and control parts.