

## FCC EVALUATION REPORT FOR CERTIFICATION

*Korea Standard Technology*

*Test report No.: KST-FCC0418*

**Manufacturer's Name** : JOOHONG Information & Communications Ltd.

**Manufacturer's Address** : 14F, IT Venture Tower East Wing, 78 Karak-Dong,  
Songpa-Gu, Seoul, Korea

**EUT's** :

**FCC ID** : QG7SL-4560

**Product Name** : ADSL Modem

**Model Number(s)** : SL-4560

**Product Options** : None

**Category** : FCC Part 15 sub. part B Class B Digital Device

### **Supplementary Information**

The device bearing the brand name and FCC ID specified above has been shown to comply with the applicable technical standards as indicated in the measurement report and was tested in accordance with measurement procedures specified in ANSI C63.4-2000.

I attest to the accuracy of data and all measurements reported herein were performed by or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.


**Issue Date :** June 3, 2004

**Tested by:**



Chung, Suck-Jin

**Approved by:**



Lee, Woen-woo

# EMC TEST REPORT

Report reference No: KST-FCC0418



## Contents

1. Description of Device
2. Test Facility
3. MAP
4. Facility Environment
5. Description of E.U.T.
6. Summary of test results.
7. Test results.
8. Photographs.

Appendix. Sample Label

# EMC TEST REPORT



Report reference No: KST-FCC0418

## 1. Description of Device

1) Kind of equipment:	ADSL MODEM
2) FCC ID:	QG7SL-4560
3) Model Name:	SL-4560
4) Serial No.:	None
5) Type of Sample Tested:	Pre-production
6) High Frequency Used:	28.000 MHz 64.000 MHz
7) Adapter	Model name: DSA-0101F-05A Manufacturer: DVE. Serial no: None
8) Power Rating:	1phase AC100-240V, 0.3A, 50/60Hz Output: DC 5V, 2.0A
9) Tested Power supply:	1phase AC110V, 60Hz
10) Date of Manufacture:	May 2004
11) Manufacture:	JOOHONG Information & Communications Ltd.
12) Description of Operating:	Use to direct spread spectrum transmitters & hyper-terminal for data transmission
13) Dates of Test:	May 28 , 2004
14) Place of Tests:	Korea Standard Technology EMC site
15) Test Report No:	KST-FCC0418

# EMC TEST REPORT



Report reference No: KST-FCC0418

## 2. Test Facility

The open field test site and conducted measurement facility are used for these testing, where are located following address and drawing. This site was fully described in a report dated November 14, 2002, that was submitted to the FCC.

Korea Standard Technology ( KOSTEC Co., Ltd)

Head office:

4F, 1503-2, Kwanyang-dong, Dongan-gu, Anyang-shi, Kyunggi-do, Korea  
Telephone No : 82-31-388-2051

Facsimile No: 82-31-388-2052

Test Lab

:180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Telephone No : 82-31-222-4251

Facsimile No: 82-31-222-4252

MIC(Ministry of Information and Communication) No: **KR0042**

FCC Filing No. : **525762**

VCCI Membership Number : **2005**

VCCI Registration Number : **R-1657 / C-1763**

KOSTEC Co.,Ltd.

180-254,Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Tel : +82-31-222-4251 Fax: +82-31-222-4252  
<http://www.kosteclab.com>

Page : 4 of 17  
June 3, 2004


# EMC TEST REPORT




Report reference No: KST-FCC0418

## 3. MAP

Korea

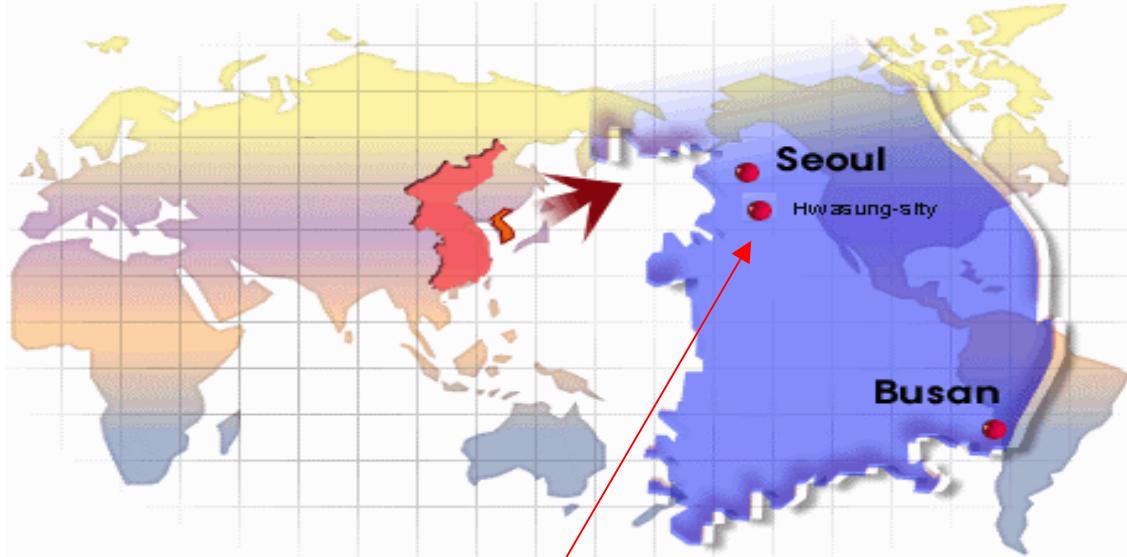

Hwasung-shi (open area test site)

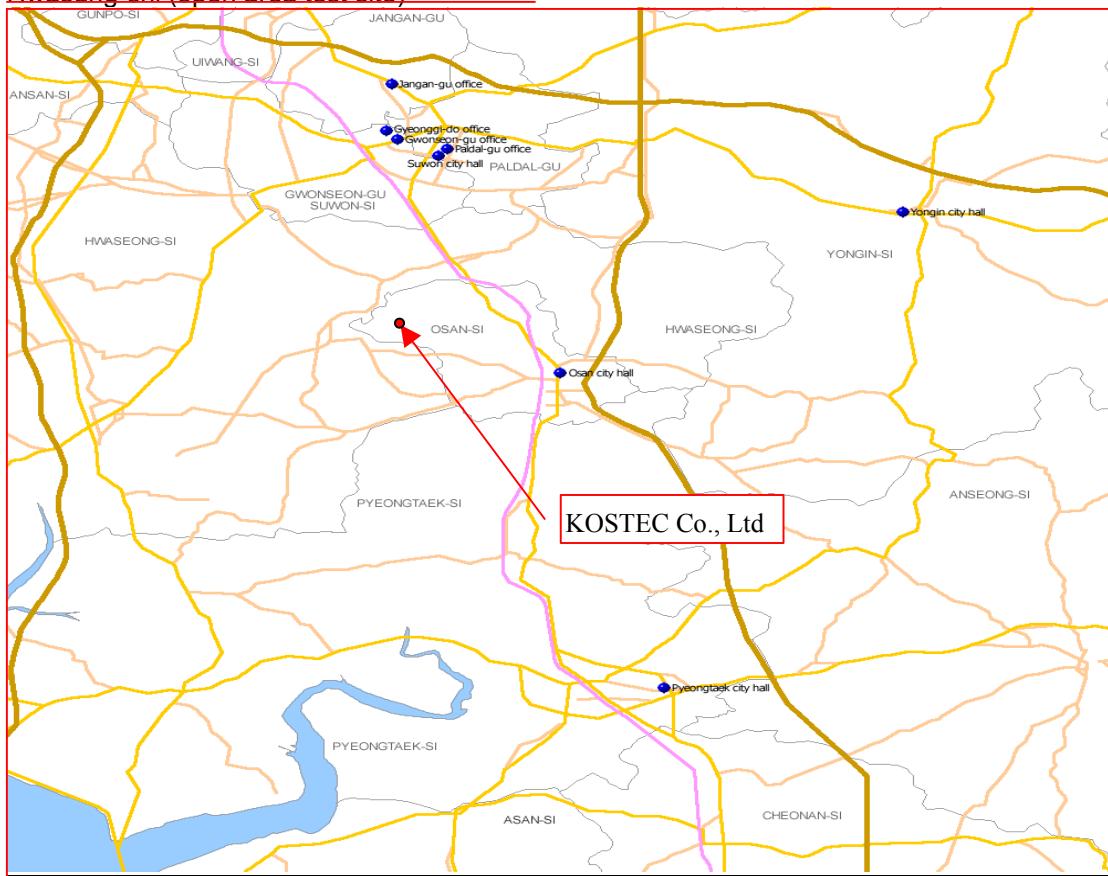

KOSTEC Co.,Ltd.

180-254, Annyung-Ri, Taean-Yup, Hwasung-shi, Kyunggi-do, Korea  
Tel : +82-31-222-4251 Fax: +82-31-222-4252  
<http://www.kosteclab.com>

Page : 5 of 17  
June 3, 2004

# EMC TEST REPORT



Report reference No: KST-FCC0418

## 4. . Facility Environment

### Operation Environment

Ambient	<u>Temperature</u> ( ° C )	<u>Humidity</u> ( % )	<u>Pressure</u> ( hPa )
10m Open Area site	24.1	38	1011
Shielded room:	19.8	34	1010

### Test site

These testing were performed following locations ;

Shielded room : Conducted Emission,

10m Open Area Site: Radiated Emission

### Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC.

The factors contributing to uncertainties are test receiver, Cable loss, antenna factor calibration, Antenna directivity, antenna factor variation with height, antenna phase center variation, antenna frequency interpolation, measurement distance variation, ite imperfection, mismatch, and system repeatability.

Based on NIS 80,81, The measurement uncertainty level with a 95% confidence level were applied.

### sample calculation

#### Conducted emission

The field strength is calculated by adding the LISN factor, cable loss from the measured reading.

The sample calculation is as follows:

$$FS = MR + LF + CL$$

MR = Meter Reading

LF = LISN Factor

CL = Cable Loss

If MR is 30dB, LISN Factor 1dB, CL 1dB

The result (MR) is

$$30 + 1 + 1 = 32\text{dBuV}$$

# EMC TEST REPORT



Report reference No: KST-FCC0418

## 5. Description of E.U.T.

### Product Description

Manufactured By:	<b>JOOHONG Information &amp; Communications Ltd.</b>
Address:	<b>14F, IT Venture Tower East Wing, 78 Karak-Dong, Songpa-Gu, Seoul, Korea</b>
Model:	<b>SL-4560</b>
Serial Number:	<b>None</b>

### Used Peripherals

Description	Manufacturer	Model / Part #	Serial Number
Personal computer	HP	Pabilion T212k	KRJ32101BH
Monitor	Samsung	PN17LT	P225HVBT600256
Keyboard	HP	5219	BN31719954
Mouse	HP	M042K0	30205141
Printer	HP	C2605A	SG42R1CO5B
Ac/dc adapter	HP	Deskwriter	None
<b>ADSL Modem</b>	<b>JOOHONG Information &amp; Communications Ltd.</b>	<b>SL-4560</b>	<b>None</b>
Ac/dc adapter	DVE	DSA-0101F-05A	None
Telephone	BBK Electronics Corp.,Ltd.	TA318	None

### Used cables

Cable Type	Shield	Length (m)	Ferrite	Connector	Connection Point 1	Connection Point 2
POWER	Yes	2.4	-	DC INLET	Ac/dc adapter	EUT
UTP	-	3.0	-	RJ-45	EUT	PC
UTP	-	0.8	-	RJ-11	EUT	Telephone
UTP	-	1.8	-	RJ-11	EUT	Tel line of Wall

# EMC TEST REPORT



Report reference No: KST-FCC0418

## 7. TEST RESULTS

### 7.1 Conducted emission

Measurement procedure

#### Mains

The measurements were performed in a shielded room. EUT was placed on a non-metallic table height of 0.4m above the reference ground plane. They were folded back and forth forming a bundle 30cm to 40Cm long and were hanged at a 40cm height to the ground plane.

Each EUT power lead, except ground (safety) lead, were individually connected through a LISN to input power source.

Both lines of power cord, hot and neutral, were measured.

Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date	Used
Test receiver	ESPI3	100109	R&S	2005.3.15	●
L.I.S.N.	ESH2-Z5	100044	R&S	2005.4.23	●
	ESH2-Z5	100147	R&S	2005.4.23	●

measurement uncertainty

Conducted Emission measurement :  $\pm 2.4$  (K=2)

#### Test Data

FREQ. (MHz)	LEVEL(dB $\mu$ V)		LINE Pol	Loss (dB)	LIMIT(dB $\mu$ V)		MARGIN(dB $\mu$ V)	
	QP	AV			QP	AV	QP	AV
0.218	40.99	30.66	L	0.29	65.57	55.57	24.87	25.20
0.234	36.85	24.46	N	0.29	61.89	51.89	25.33	27.72
0.566	23.41	18.50	N	0.90	56.00	46.00	33.49	28.40
3.298	24.54	15.85	N	0.62	56.00	46.00	32.08	30.77
23.130	35.34	30.64	L	2.08	60.00	50.00	26.74	21.44
26.486	34.56	31.45	L	2.31	60.00	50.00	27.75	20.86
27.158	35.54	32.40	N	2.29	60.00	50.00	26.75	19.89

\* Level = test receiver reading value

\* Loss = LISN insertion Loss + Cable Loss


# EMC TEST REPORT



Report reference No: KST-FCC0418


## Conducted emission test graph

Line. Live

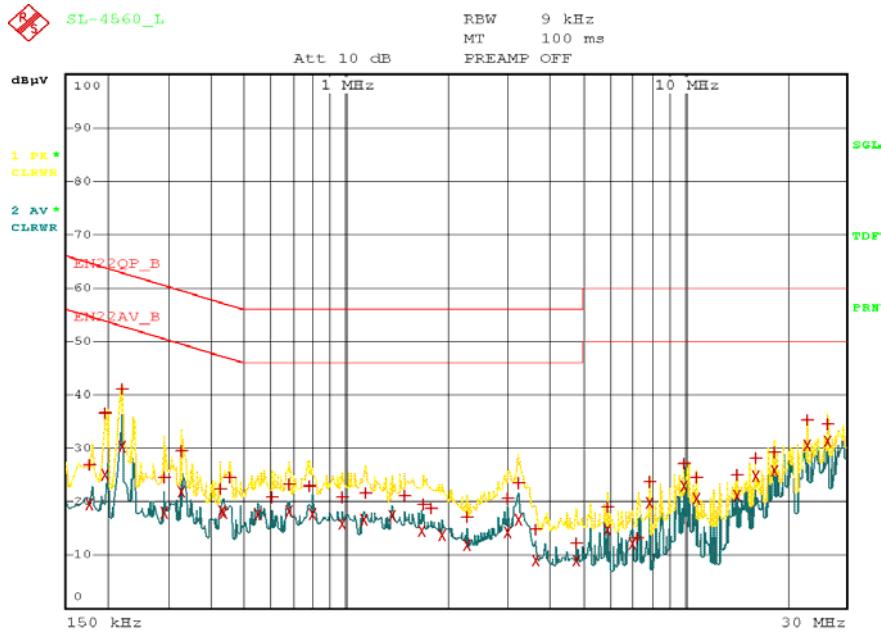

Date: 28.MAY.2004 15:59:05

Line. Neutral

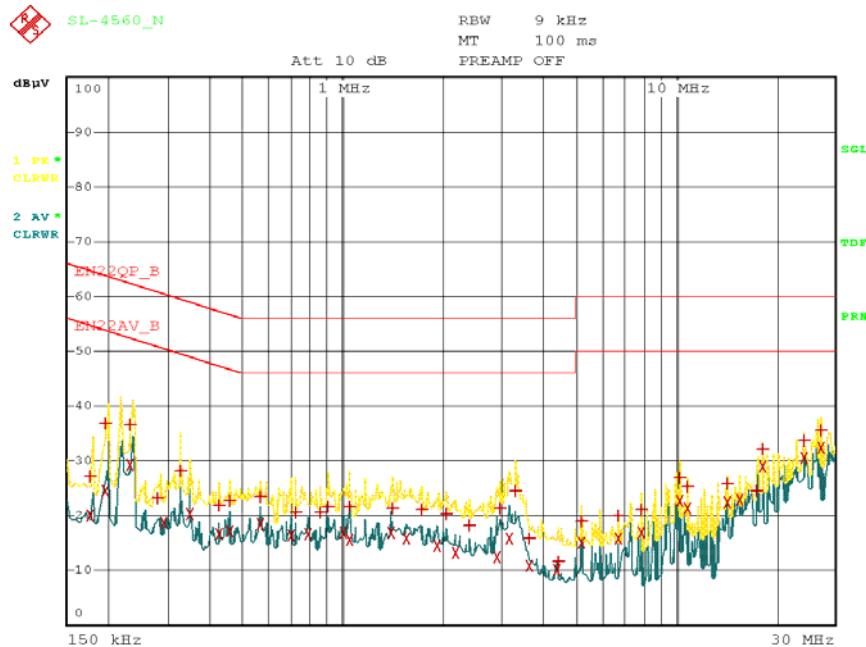

Date: 28.MAY.2004 15:51:31

# EMC TEST REPORT



Report reference No: KST-FCC0418

## 7.2 Radiated Emission

### Measurement procedure

A pretest was performed at 3m distances in a semi-anechoic chamber for searching correct frequency. The final test was done at a 10m open area test site with a quasi-peak detector. EUT was placed on a non-metallic table height of 0.8m above the reference ground plane. Cables connected to EUT were fixed to cause maximum emission. Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

### Used equipment

Equipment	Model no.	Serial no.	Makers	Next cal date
Test receiver	ESCS30	100111	R&S	2005.03.17
Ultra broadband antenna	HL562	100075	R&S	2005.03.16
Antenna Mast	AT14	none	Daeil EMC	-
Turn Table	TT15	none	Daeil EMC	-
10m Open area site	none	none	KOSTEC Lab	-
chamber(3m)	none	none	FRANCONIA	-

### measurement uncertainty

#### Radiated Emission measurement

: 30-300MHz +3.96dB / -4.04dB  
300-1000MHz +3.04dB / -3.00dB

### Test Data

Freq (MHz)	Reading (dBuV/m)	P (H/V)	H (m)	A (.)	Antenna (dB)	Cable Loss (dB)	Result (dBuV/m)	Limit (dB)	Margin (dB)
75.00	15.20	V	1.50	90	7.70	3.00	25.90	40.0	14.10
125.00	13.80	H	3.40	180	9.20	3.90	26.90	43.5	16.60
200.00	16.50	H	3.40	360	7.30	5.10	28.90	43.5	14.60
375.00	12.84	H	3.00	120	12.85	7.21	32.90	46.0	13.10
600.00	13.60	H	2.00	180	17.00	9.30	39.90	46.0	6.10
625.00	14.06	H	1.80	180	17.35	9.39	40.80	46.0	5.20
800.00	10.70	H	1.60	170	19.60	10.80	41.10	46.0	4.90
900.00	7.10	H	1.50	120	20.70	11.90	39.70	46.0	6.30

Reading = Test receiver reading / P= antenna Polarization / H=antenna Height

A=turn table Angle / Antenna = antenna factor / Cable loss = used cable loss

Result = reading + antenna + loss / Margin = Limit - result

\* Receiving Antenna Mode: Horizontal, Vertical / Test site: 10m Open area site