



Product Service

**Choose certainty.
Add value.**

Report On

FCC Testing of the
ip.access Ltd 243B S16 3G AP (Bands 2 & 5)
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24

COMMERCIAL-IN-CONFIDENCE

FCC ID: QGGIPA243B

Document 75918692 Report 03 Issue 1

September 2012



Product Service

TÜV SÜD Product Service Ltd, Octagon House, Concorde Way, Segensworth North,
Fareham, Hampshire, United Kingdom, PO15 5RL
Tel: +44 (0) 1489 558100. Website: www.tuvps.co.uk

COMMERCIAL-IN-CONFIDENCE

REPORT ON

FCC Testing of the
ip.access Ltd 243B S16 3G AP (Bands 2 & 5)
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24

Document 75918692 Report 03 Issue 1

September 2012

PREPARED FOR

ip.access Ltd
Building 2020
Cambourne Business Park
Cambourne
Cambridge
CB23 6DW

PREPARED BY

Natalie Bennett
Senior Administrator (Technical)

APPROVED BY

Mark Jenkins
Authorised Signatory

DATED

25 September 2012

ENGINEERING STATEMENT

The measurements shown in this report were made in accordance with the procedures described on test pages. All reported testing was carried out on a sample equipment to demonstrate limited compliance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24. The sample tested was found to comply with the requirements defined in the applied rules.

Test Engineer(s);

M Russell

G Lawler





CONTENTS

Section	Page No
1	REPORT SUMMARY 3
1.1	Introduction 4
1.2	Brief Summary of Results 5
1.3	Application Form 6
1.4	Product Information 8
1.5	Test Conditions 8
1.6	Deviations from the Standard 8
1.7	Modification Record 8
2	TEST DETAILS 9
2.1	Frequency Stability 10
2.2	Spurious Emissions at Band Edge 12
2.3	Effective Isotropic Radiated Power 15
2.4	Maximum Peak Output Power - Conducted 22
2.5	Modulation Characteristics 24
2.6	Emission for Broadband PCS Equipment 25
2.7	Conducted Spurious Emissions 42
2.8	Occupied Bandwidth 48
3	TEST EQUIPMENT USED 52
3.1	Test Equipment Used 53
3.2	Measurement Uncertainty 56
4	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 57
4.1	Accreditation, Disclaimers and Copyright 58



Product Service

SECTION 1

REPORT SUMMARY

FCC Testing of the
ip.access Ltd 243B S16 3G AP (Bands 2 & 5)
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24



Product Service

1.1 INTRODUCTION

The information contained in this report is intended to show verification of the FCC Testing of the ip.access Ltd 243B S16 3G AP (Bands 2 & 5) to the requirements of FCC CFR 47 Part 2 and FCC CFR 47 Part 24.

Objective	To perform FCC Testing to determine the Equipment Under Test's (EUT's) compliance with the Test Specification, for the series of tests carried out.
Manufacturer	ip.access Ltd
Model Number(s)	243B
Serial Number(s)	000295-0000106246
Number of Samples Tested	1
Test Specification/Issue/Date	FCC CFR 47 Part 2 (2011) FCC CFR 47 Part 24 (2011)
Incoming Release Date	Application Form 23 August 2012
Disposal Reference Number Date	Held Pending Disposal Not Applicable Not Applicable
Order Number Date	PO30806 06 July 2012
Start of Test	22 August 2012
Finish of Test	29 August 2012
Name of Engineer(s)	M Russell G Lawler
Related Document(s)	ANSI C63.4: 2003



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24 is shown below.

Section	Spec Clause		Test Description	Result	Comments/Base Standard
	Pt 2	Pt 24			
Transmit with 9V AC/DC Adapter					
2.1	2.1055	24.135(a)	Frequency Stability	Pass	
2.2	2.1051	24.229	Spurious Emissions at Band Edge	Pass	
2.3	-	24.232(c)	Effective Isotropic Radiated Power	Pass	
2.4	2.1046	24.232	Maximum Peak Output Power - Conducted	Pass	
2.5	2.1047(d)	-	Modulation Characteristics	-	Customer Declaration
2.6	2.1051	24.238	Emission for Broadband PCS Equipment	Pass	
2.7	2.1051	24.238(a)	Conducted Spurious Emissions	Pass	
2.8	2.1049(h)	24.238(b)	Occupied Bandwidth	Pass	
Transmit with POE					
2.3	-	24.232(c)	Effective Isotropic Radiated Power	Pass	
2.6	2.1051	24.238	Emission for Broadband PCS Equipment	Pass	



Product Service

1.3 APPLICATION FORM

APPLICANT'S DETAILS			
COMPANY NAME :	IP Access Ltd		
ADDRESS :	Building 2020 Cambourne Business Park Cambourne Cambridge CB23 6DW		
NAME FOR CONTACT PURPOSES :	Costa Panayi		
TELEPHONE NO: 01954 713721	FAX NO: 01954 713799	E-MAIL: costa.panayi@ipaccess.com	

EQUIPMENT INFORMATION			
Model name/number	nano3G S16 Access Point	Identification/Part number	243B (Bands 2 & 5)
Hardware Version	XA	Software Version	SR2.7.573.0.7749_PL1
Manufacturer	IP Access Ltd	Country of Origin	UK
FCC ID	QGGIPA243B	Industry Canada ID	N/A
Technical description (a brief description of the intended use and operation):			
The S16 Access Point is a 16 user 3G Basestation operating in Bands 2 & 5 for the US market.			
<u>Supply Voltage:</u>			
☒ [X]]	AC mains	State AC voltage	110 V and AC frequency 60 Hz
☒ [X]]	POE DC (external)	State DC voltage	48 V and DC current 0.25 A
☐ []]	DC (internal)	State DC voltage	 V and Battery type
<u>Frequency characteristics:</u>			
Transmitter Frequency range	869 MHz to 894 MHz	Channel spacing	5 MHz (if channelized)
Receiver Frequency range (if different)	824 MHz to 849 MHz	Channel spacing	5 MHz (if channelized)
Designated test frequencies:	1850 MHz to 1910 MHz		
Bottom: 871.4 MHz	Middle: 881.6 MHz	Top: 891.6 MHz	
Bottom: 1932.4 MHz	Middle: 1960.0 MHz	Top: 1987.6 MHz	
Intermediate Frequencies:	N/A		
Highest Internally Generated Frequency:	1987.6 MHz		
<u>Power characteristics:</u>			
Maximum transmitter power	0.1 W (Band 2)	Minimum transmitter power (if variable)	N/A
	0.1 W (Band 5)		
☒ [X]]	Continuous transmission	State duty cycle	
☐ []]	Intermittent transmission	If intermittent, can transmitter be set to continuous transmit test mode?	Y/N
<u>Antenna characteristics:</u>			
☐ []]	Antenna connector	State impedance	 ohm
☐ []]	Temporary antenna connector	State impedance	 ohm
☒ [X]]	Integral antenna	State gain	0 dBi
<u>Modulation characteristics:</u>			
☒ [X]]	Amplitude	[]]	Other
☐ []]	Frequency	Details:	
☒ [X]]	Phase		
Can the transmitter operate un-modulated?	No		
ITU Class of emission:	5M00D1W		
<u>Battery/Power Supply</u>			
Model name/number	POE Single Port Midspan	Identification/Part number	PD-3501G
Manufacturer	PowerDsine	Country of Origin	Taiwan
Model name/number	POE Active Splitter	Identification/Part number	MIT-06I-1209-IP
Manufacturer	MSTronic	Country of Origin	China
Model name/number	Switching Adapter	Identification/Part number	PSA15R-090PV
Manufacturer	Phihong	Country of Origin	Taiwan
<u>Extreme conditions:</u>			
Maximum temperature	40 °C	Minimum temperature	0 °C
Maximum supply voltage	 V	Minimum supply voltage	 V



Product Service

I hereby declare that I am entitled to sign on behalf of the applicant and that the information supplied is correct and complete.

Signature : Held on file at TÜV SÜD Product Service Ltd

Name : Costa Panayi

Position held : Product Design and Development Engineer

Date : 23rd August 2012

TÜV Product Service Ltd formally certifies that the manufacturer's declaration as typed out in this report, is a true and accurate record of the original received from the applicant.



Product Service

1.4 PRODUCT INFORMATION

1.4.1 Technical Description

The Equipment Under Test (EUT) was a ip.access Ltd 243B S16 3G AP (Bands 2 & 5). A full technical description can be found in the manufacturer's documentation.

1.5 TEST CONDITIONS

For all tests the EUT was set up in accordance with the relevant test standard and to represent typical operating conditions. Tests were applied with the EUT situated in a shielded enclosure.

The EUT was powered from a 9 V DC and POE supply.

FCC Accreditation
90987 Octagon House, Fareham Test Laboratory

1.6 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standard or test plan were made during testing

1.7 MODIFICATION RECORD

Modification 0 - No modifications were made to the test sample during testing.



Product Service

SECTION 2

TEST DETAILS

FCC Testing of the
ip.access Ltd 243B S16 3G AP (Bands 2 & 5)
In accordance with FCC CFR 47 Part 2 and FCC CFR 47 Part 24



Product Service

2.1 FREQUENCY STABILITY

2.1.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1055
FCC CFR 47 Part 24, Clause 24.135(a)

2.1.2 Equipment Under Test and Modification State

243B S/N: 000295-0000106246 - Modification State 0

2.1.3 Date of Test

23 August 2012

2.1.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.1.5 Test Procedure

The EUT was set to transmit on maximum power with WCMDA modulation. An FSQ Signal Analyser, was used to measure the frequency error. The maximum result was taken over 200 bursts. The temperature was adjusted between -30°C and +50°C in 10° steps as per 2.1055.

2.1.6 Environmental Conditions

Ambient Temperature	19.1°C
Relative Humidity	51.9%



2.1.7 Test Results

Transmit with 9V AC/DC Adapter

9 V DC via 110 V AC Supply

Under Temperature Variations

1960.00 MHz

Temperature Interval (°C)	Mode	Deviation (ppm)
-30	WCDMA	1.7194
-20	WCDMA	0.6531
-10	WCDMA	0.4224
0	WCDMA	0.0781
+10	WCDMA	0.0561
+20	WCDMA	-0.0056
+30	WCDMA	-0.0133
+40	WCDMA	0.0168
+50	WCDMA	0.0107

Limit Clause

The frequency stability of the transmitter shall be maintained within $\pm 0.0001\%$ (± 1 ppm).

Under Voltage Variations

1960.00 MHz

DC Voltage (V)	Mode	Deviation (ppm)
110VAC 60Hz - 9VDC Adaptor	WCDMA	-0.0056
93.5VAC 60Hz - 9VDC Adaptor	WCDMA	0.0056
126.5VAC 60Hz - 9VDC Adaptor	WCDMA	0.0107

Limit Clause

The frequency stability of the transmitter shall be maintained within $\pm 0.0001\%$ (± 1 ppm).

The manufacturer has declared that the transmitter will cease function via an on-board temperature sensor outside of the declared operating range of 0 - +45 °C to comply with clause 24.135(c).



Product Service

2.2 SPURIOUS EMISSIONS AT BAND EDGE

2.2.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051
FCC CFR 47 Part 24, Clause 24.229

2.2.2 Equipment Under Test and Modification State

243B S/N: 000295-0000106246 - Modification State 0

2.2.3 Date of Test

22 August 2012

2.2.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.2.5 Test Procedure

In accordance with 24.238, any emissions outside of the block edges shall be attenuated by at least $43 + 10 \log (P)$. The measurements are shown to ± 1 MHz from the block edges. The plots shown under the Spurious Emissions sections covers the required range of 9 kHz to 20 GHz.

The reference power and path losses of all channels used for testing in each frequency block were measured. Having entered the reference level offset, a limit line was displayed, showing the $-13 \text{ dBm } (43 + 10 \log (P))$, limit.

2.2.6 Environmental Conditions

Ambient Temperature	20.2°C
Relative Humidity	55.1%



Product Service


2.2.7 Test Results

Transmit with 9V AC/DC Adapter

9 V DC via 110 V AC Supply


Frequency Block (MHz)	Mode	Lower Block Edge Test Channels/Frequencies	Upper Block Edge Test Channels/Frequencies
A : (1930.0 – 1945.0)	WCDMA	Channel : 9662 Frequency : 1932.4 MHz	N/A
B : (1975.0 – 1990.0)	WCDMA	N/A	Channel : 9938 Frequency : 1987.6 MHz

Frequency Block A

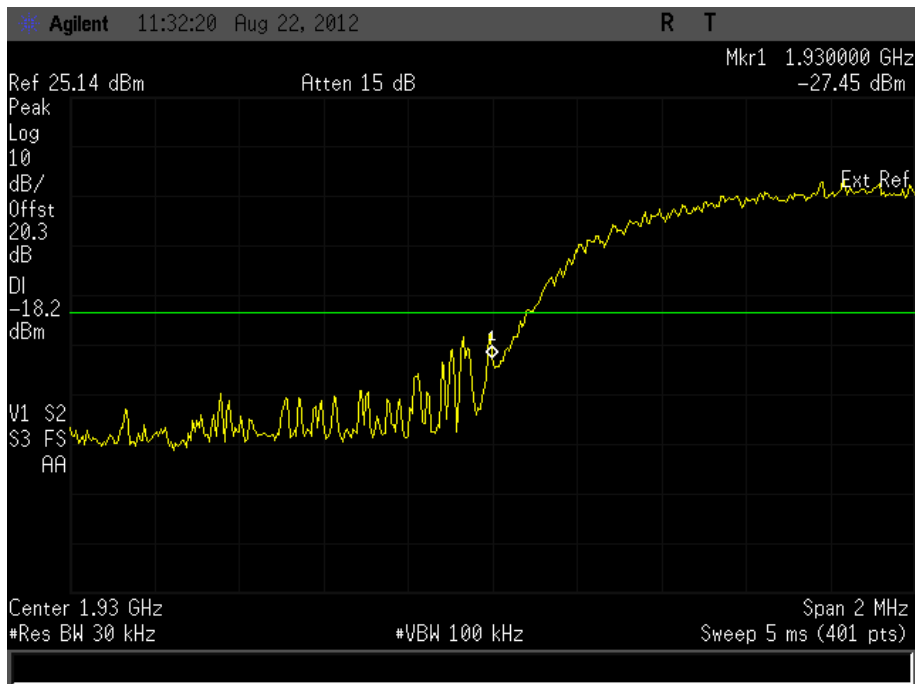



Product Service

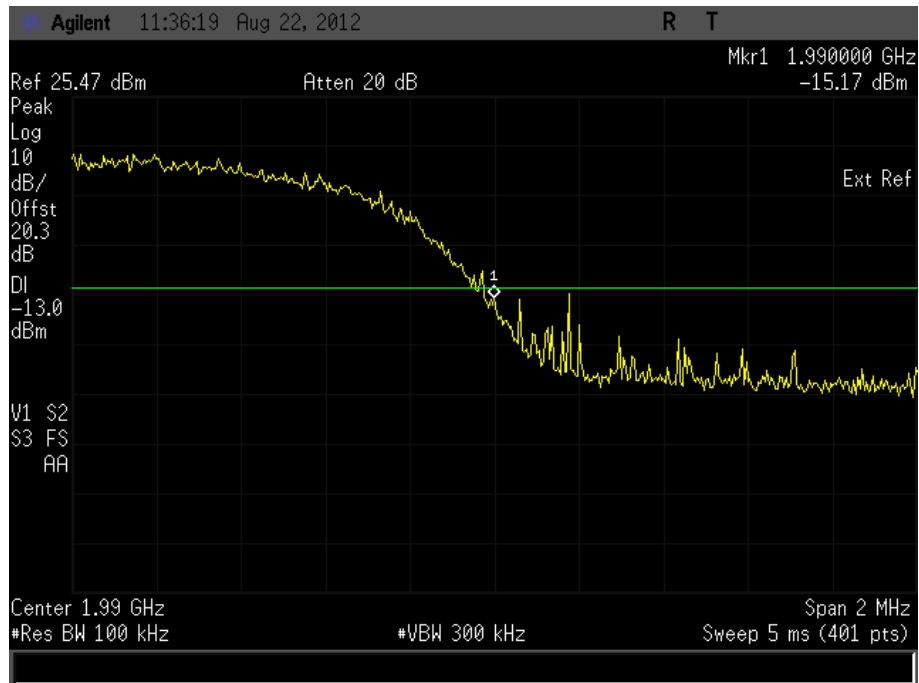Frequency Block BLimit Clause

-13 dBm at block edge.



Product Service

2.3 EFFECTIVE ISOTROPIC RADIATED POWER

2.3.1 Specification Reference

FCC CFR 47 Part 24, Clause 24.232(c)

2.3.2 Equipment Under Test and Modification State

243B S/N: 000295-0000106246 - Modification State 0

2.3.3 Date of Test

28 August 2012

2.3.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.3.5 Test Procedure

Measurements of the fundamental from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The fundamental frequency was maximised by adjusting the antenna height, antenna polarisation and turntable azimuth. A peak detector was used with the trace set to max hold. The maximum result was recorded.

The EUT was then removed from the chamber and replaced with a substitution antenna. Using a signal generator the level was adjusted to achieve the same value on the measuring instrument as previously recorded with the EUT. The final result (ERP) was determined by a calculation using the signal generator level, antenna gain and cable loss.

The measurements were performed at a 3m distance unless otherwise stated.

2.3.6 Environmental Conditions

Ambient Temperature	21.8°C
Relative Humidity	57.0%




Product Service

2.3.7 Test Results

Transmit with 9V AC/DC Adapter

1932.40 MHz

Result (dBm)	Result (W)
32.47	1.766

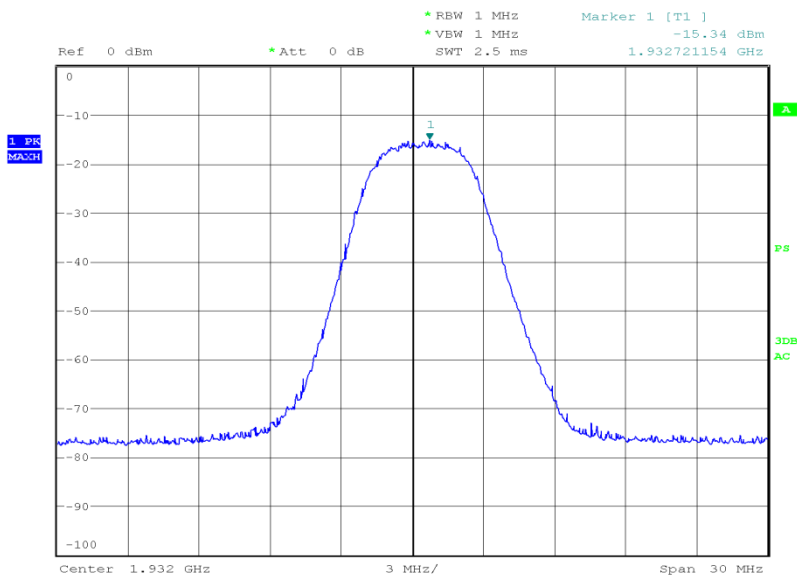


Date: 28.AUG.2012 22:34:14



Product Service

1960.00 MHz

Result (dBm)	Result (W)
31.25	1.333

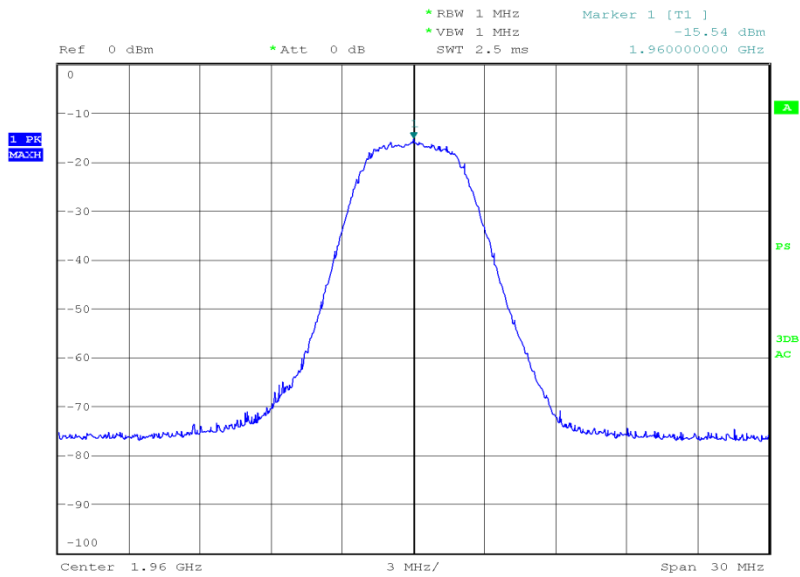


Date: 28.AUG.2012 22:38:44



Product Service

1987.60 MHz

Result (dBm)	Result (W)
30.66	1.164

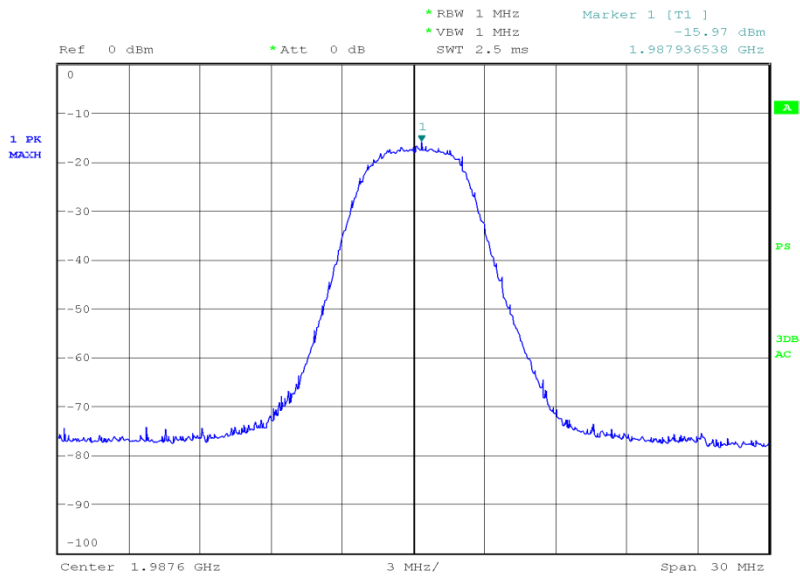

Date: 28.AUG.2012 22:43:38

Limit Clause

Mobile – 7 W or 38.45 dBm
Base Stations – 500 W or 57 dBm




Product Service

Transmit with POE

1932.40 MHz

Result (dBm)	Result (W)
31.91	1.552

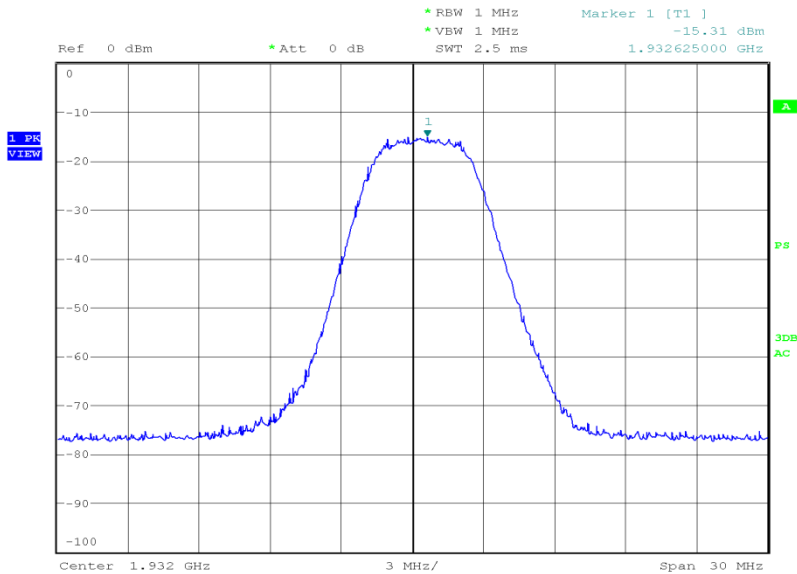


Date: 28.AUG.2012 20:46:27



Product Service

1960.00 MHz

Result (dBm)	Result (W)
30.37	1.089

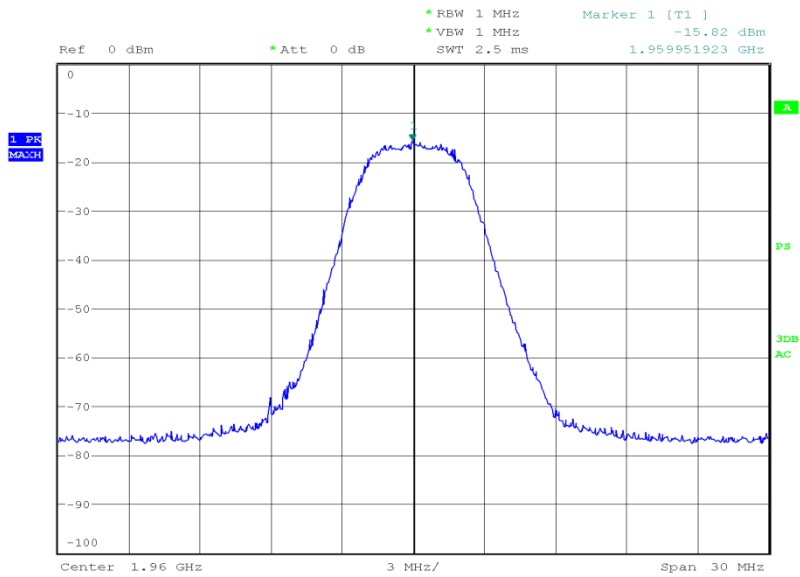


Date: 28.AUG.2012 20:38:25



Product Service

1987.60 MHz

Result (dBm)	Result (W)
30.64	1.159

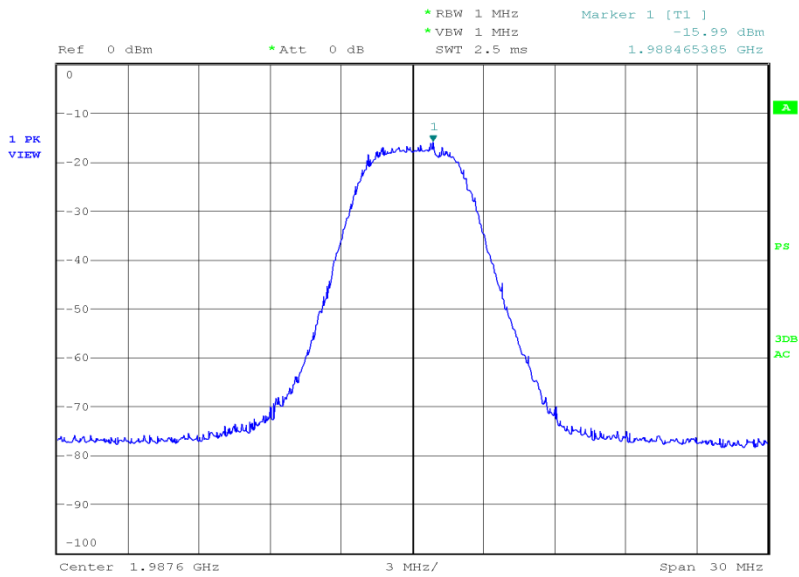

Date: 28.AUG.2012 20:41:28

Limit Clause

Mobile – 7 W or 38.45 dBm
Base Stations – 500 W or 57 dBm



Product Service

2.4 MAXIMUM PEAK OUTPUT POWER - CONDUCTED

2.4.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1046
FCC CFR 47 Part 24, Clause 24.232

2.4.2 Equipment Under Test and Modification State

243B S/N: 000295-0000106246 - Modification State 0

2.4.3 Date of Test

22 August 2012

2.4.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.4.5 Test Procedure

Using a spectrum analyser and attenuator(s), the output power of the EUT was measured at the antenna terminals.

The EUT supports WCDMA and was tested in this mode of operation.

The spectrum analyser RBW and VBW were set to 1 MHz and the path loss measured and entered as a reference offset level.

2.4.6 Environmental Conditions

Ambient Temperature	20.2°C
Relative Humidity	55.1%



Product Service

2.4.7 Test ResultsTransmit with 9V AC/DC Adapter

9 V DC via 110 V AC Supply

1932.40 MHz

Mode	Result (dBm)	Result (W)
WCDMA	30.32	1.075

1960.00 MHz

Mode	Result (dBm)	Result (W)
WCDMA	31.04	1.271

1987.60 MHz

Mode	Result (dBm)	Result (W)
WCDMA	29.95	0.987

Carrier Power measured in 1MHz Bandwidth: 1932.4MHz - 25.78dBm / 0.378W 1960.0MHz - 24.98dBm / 0.314W 1987.6MHz - 24.99dBm / 0.315W

Limit Clause

Mobile – 7 W or 38.45 dBm

Base Stations – 500 W or 57 dBm



Product Service

2.5 MODULATION CHARACTERISTICS

2.5.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1047(d)

2.5.2 Equipment Under Test

243B

2.5.3 Test Results

Transmit with 9V AC/DC Adapter

Customer Description

As shown in the Application Form in Section 1.3, the modulation type used is Spread Spectrum WCDMA.

Limit Clause

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.



Product Service

2.6 EMISSION FOR BROADBAND PCS EQUIPMENT

2.6.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051
FCC CFR 47 Part 24, Clause 24.238

2.6.2 Equipment Under Test and Modification State

243B S/N: 000295-0000106246 - Modification State 0

2.6.3 Date of Test

28 August 2012 & 29 August 2012

2.6.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.6.5 Test Procedure

A preliminary profile of the Spurious Radiated Emissions was obtained up to the 10th harmonic by operating the EUT on a remotely controlled turntable within a semi-anechoic chamber. Measurements of emissions from the EUT were obtained with the Measurement Antenna in both Horizontal and Vertical Polarisations. The profiling produced a list of the worst-case emissions together with the EUT azimuth and antenna polarisation.

Using the information from the preliminary profiling of the EUT, the list of emissions was then confirmed or updated under Alternative Open Site conditions. Emission levels were maximised by adjusting the antenna height, antenna polarisation and turntable azimuth.

The EUT was set to transmit on full power on WCDMA modulation. The EUT was tested on bottom, middle and top channels at maximum power.

For any emissions found the EUT was then removed from the chamber and replaced with a substitution antenna. Using a signal generator the level was adjusted to achieve the same value on the measuring instrument as previously recorded with the EUT. The final result was determined by a calculation using the signal generator level, antenna gain and cable loss. The measurements were performed at a 3m distance unless otherwise stated.

2.6.6 Environmental Conditions

Ambient Temperature	19.9 - 21.8°C
Relative Humidity	57.0 - 60.0%




Product Service

2.6.7 Test Results

Transmit with 9V AC/DC Adapter


1932.40 MHz

30 MHz to 1 GHz

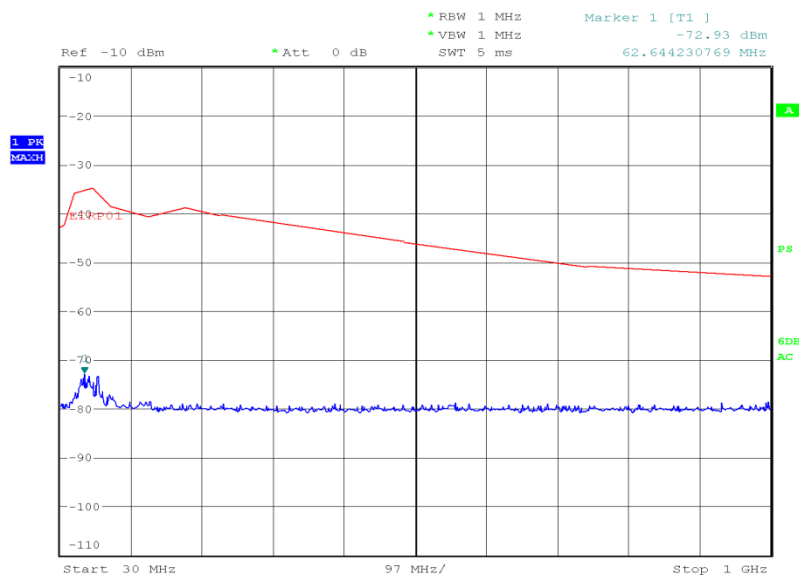

Date: 29.AUG.2012 16:34:18

1 GHz to 3 GHz

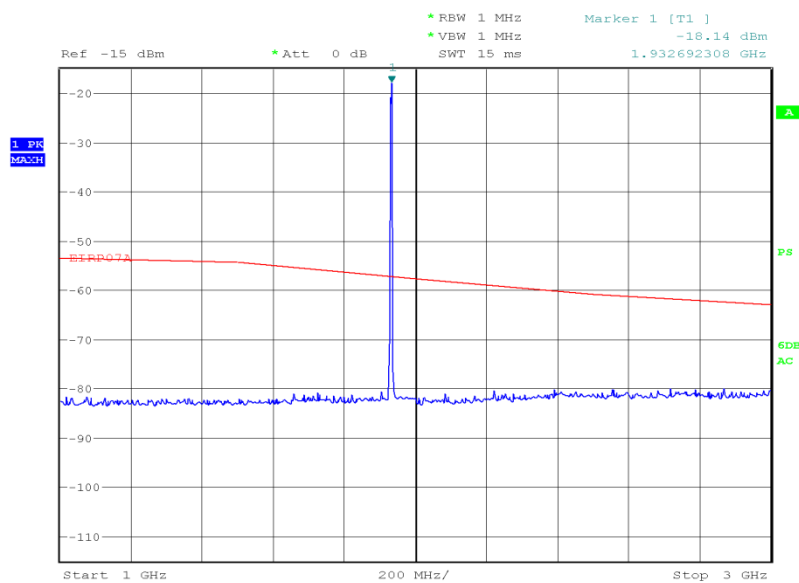


Date: 29.AUG.2012 17:38:32




Product Service

3GHz to 8 GHz

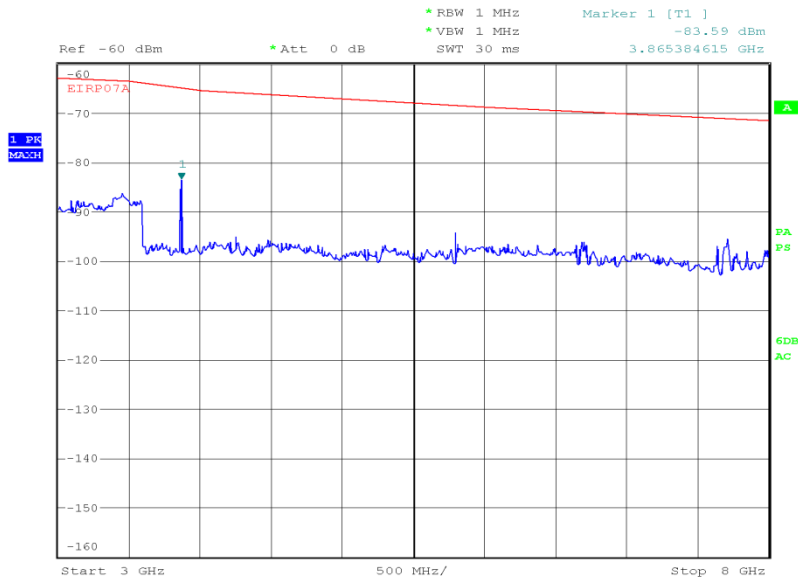

Date: 29.AUG.2012 17:50:23

8 GHz to 18 GHz

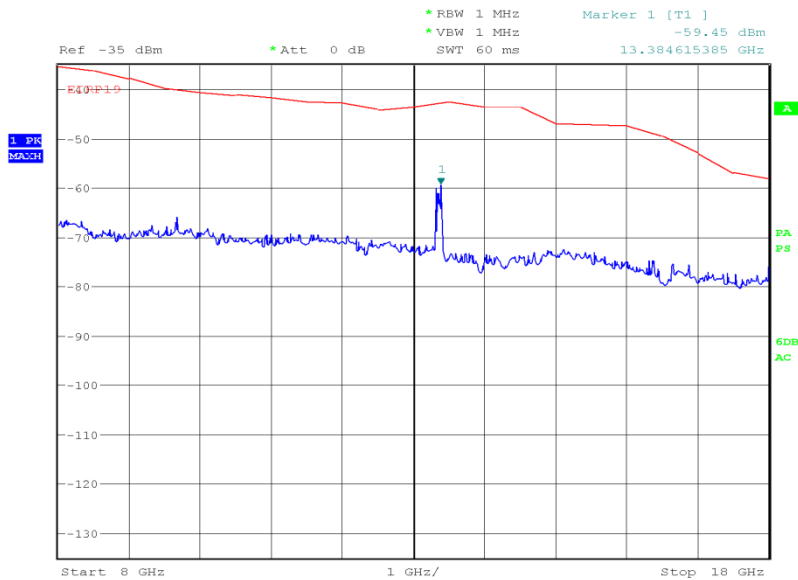


Date: 29.AUG.2012 18:11:20



Product Service


18 GHz to 20 GHz

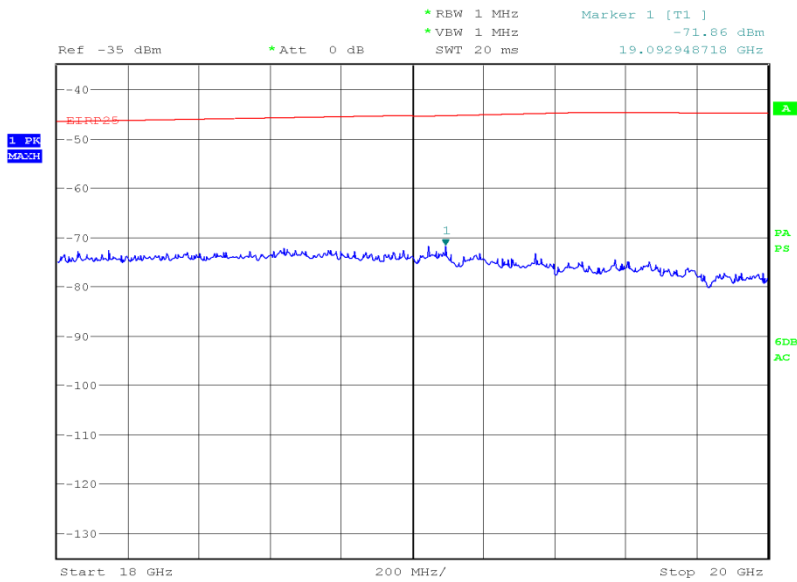

Date: 29.AUG.2012 18:52:42


1960.00 MHz

30 MHz to 1 GHz

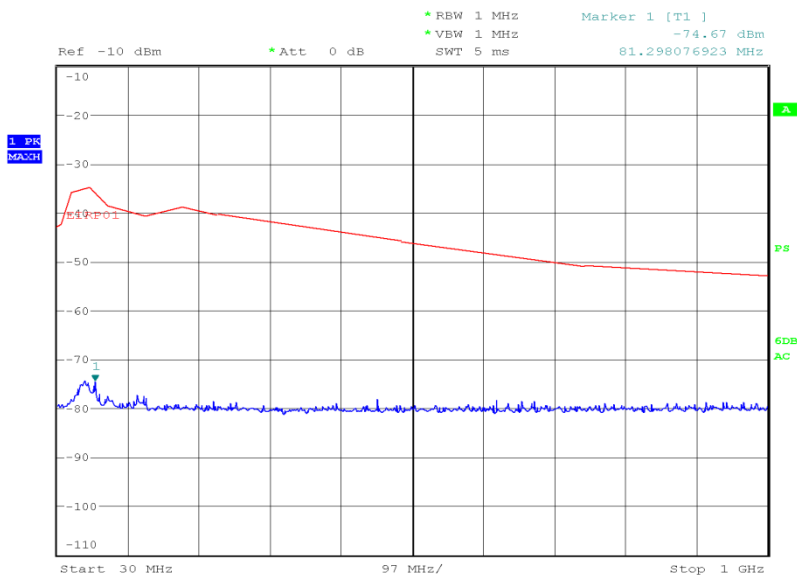


Date: 29.AUG.2012 16:36:03

1 GHz to 3 GHz

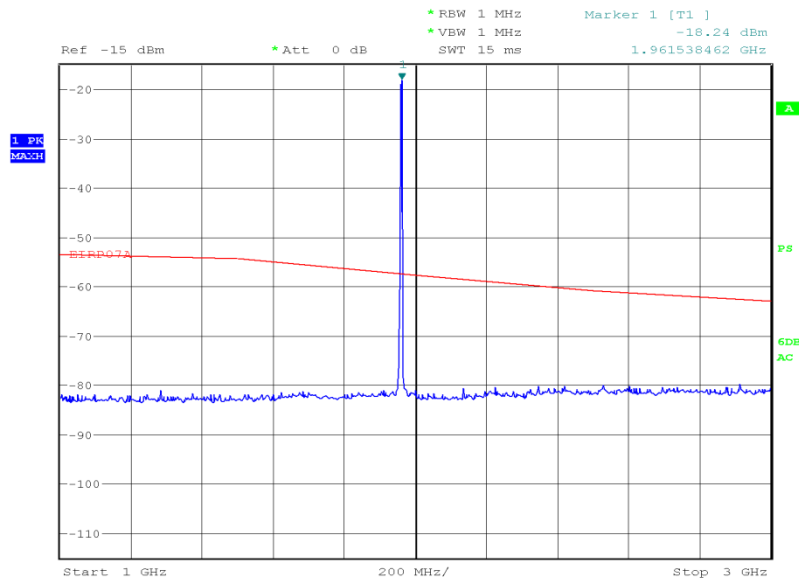

Date: 29.AUG.2012 17:40:09

3GHz to 8 GHz

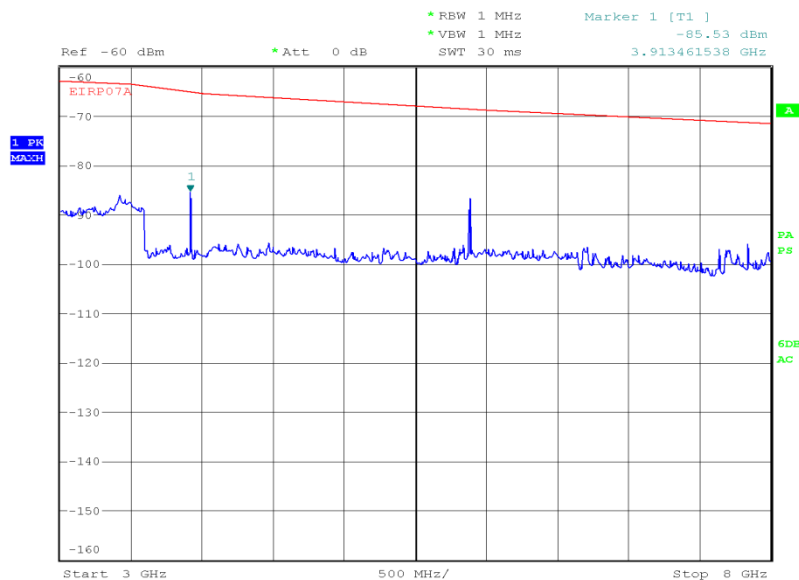


Date: 29.AUG.2012 17:47:50




Product Service

8 GHz to 18 GHz

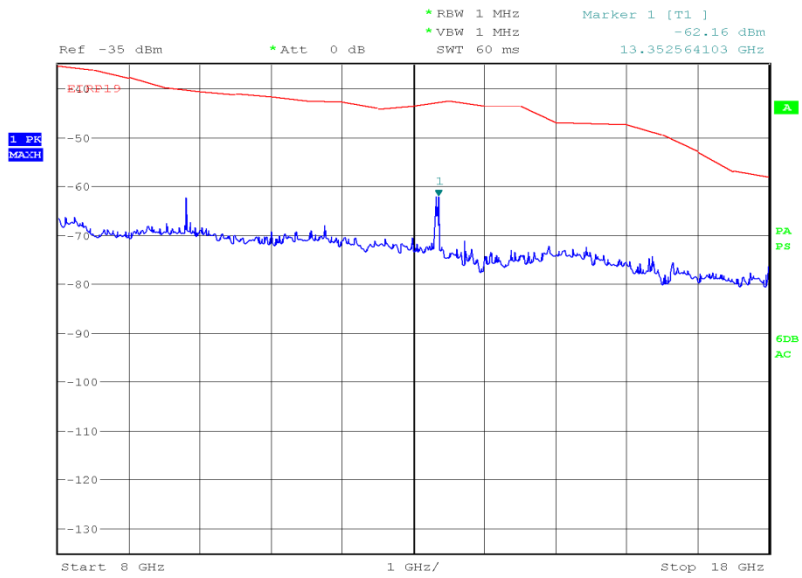

Date: 29.AUG.2012 18:17:22


18 GHz to 20 GHz

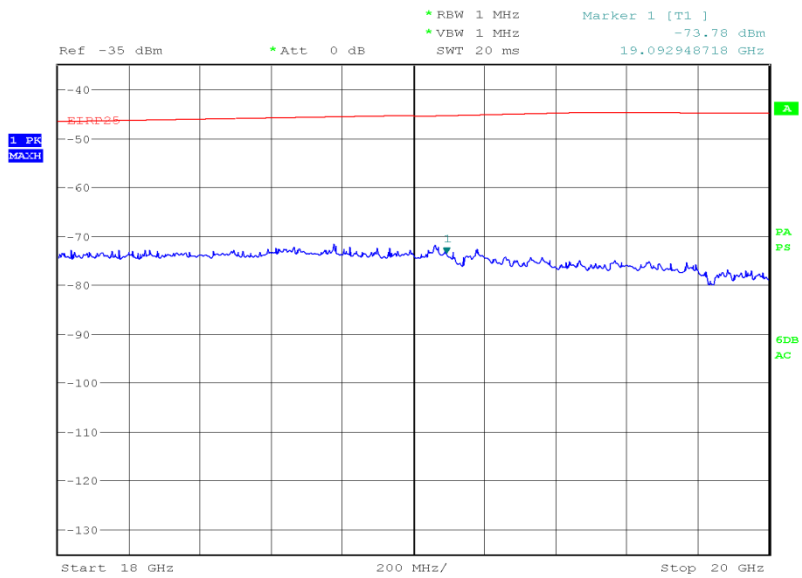


Date: 29.AUG.2012 19:00:01



Product Service

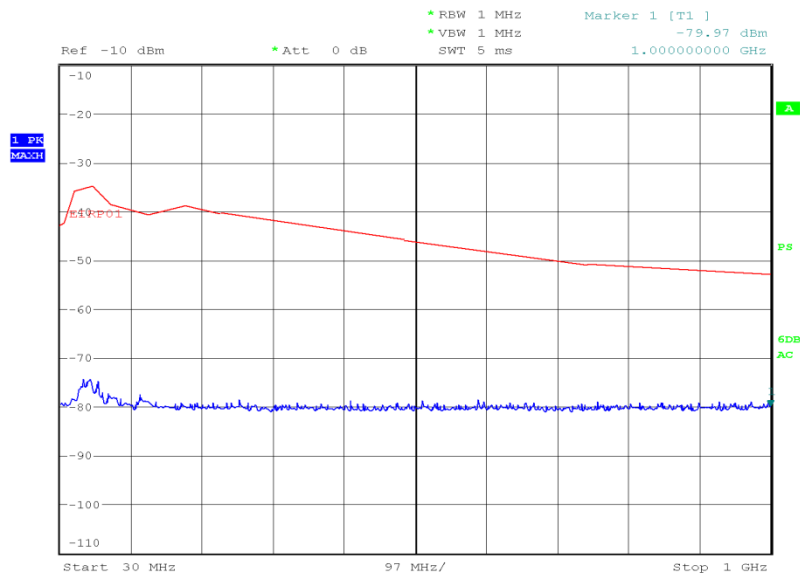1987.60 MHz30 MHz to 1 GHz


Date: 29.AUG.2012 16:37:45

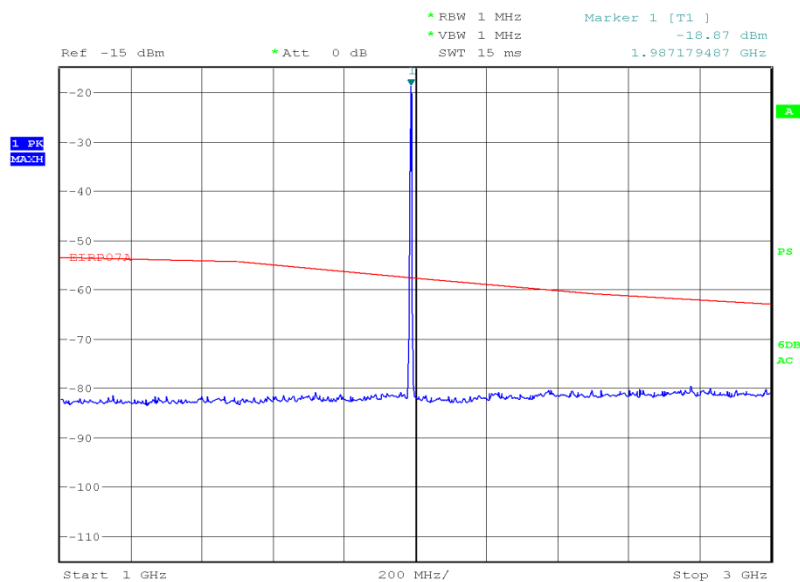1 GHz to 3 GHz


Date: 29.AUG.2012 17:42:29



Product Service

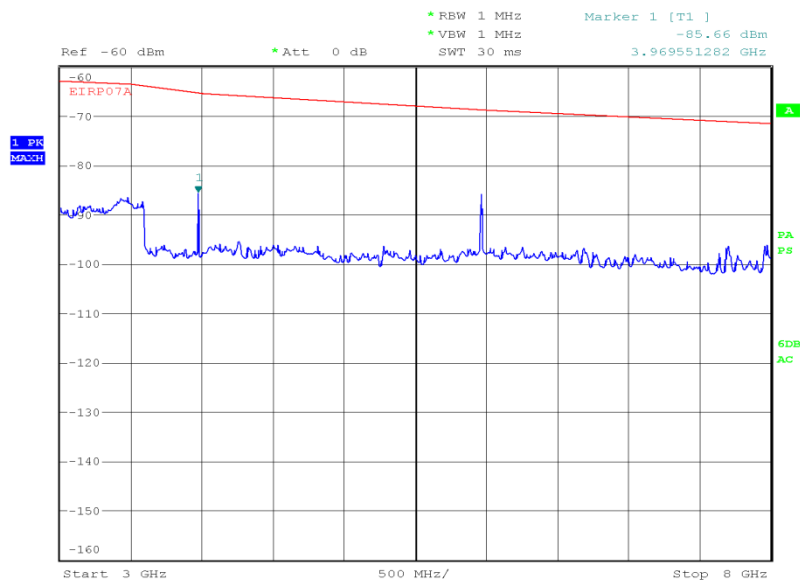3GHz to 8 GHz


Date: 29.AUG.2012 17:45:52

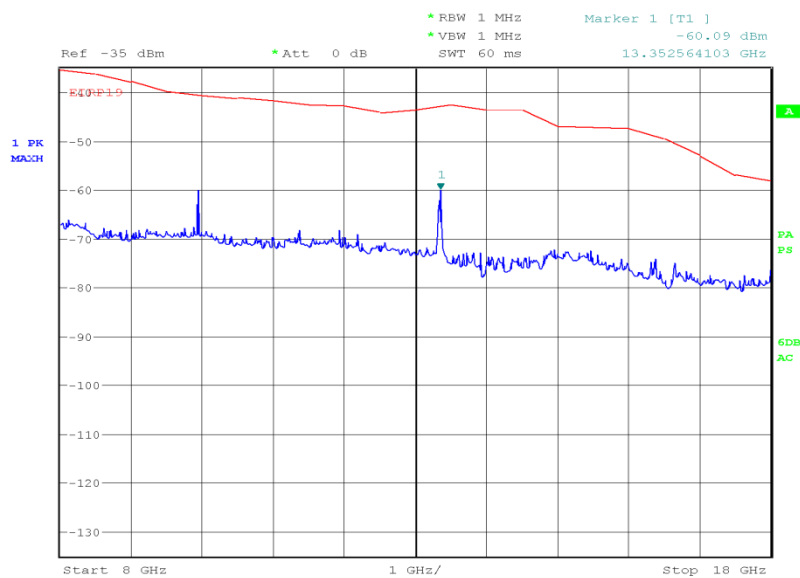8 GHz to 18 GHz

Date: 29.AUG.2012 18:30:33



Product Service

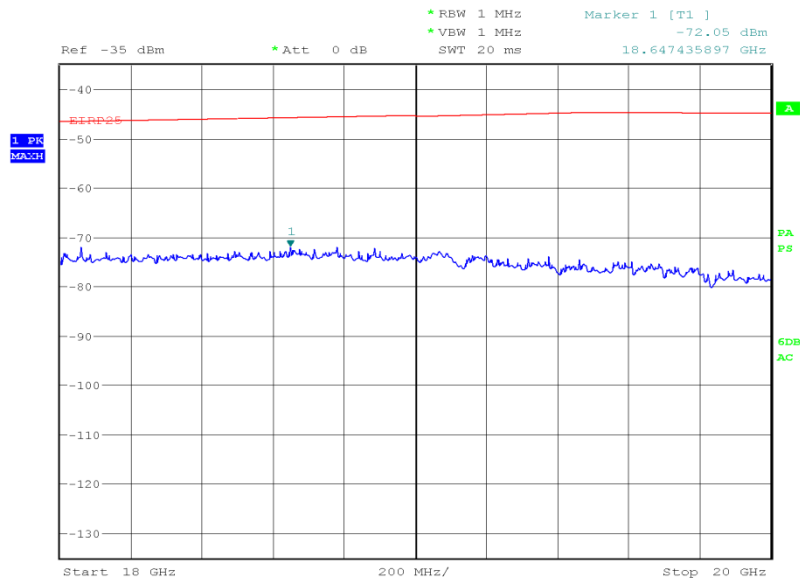18 GHz to 20 GHz


Date: 29.AUG.2012 19:05:04

Limit Clause


43+10log(P) or -13 dBm



Product Service

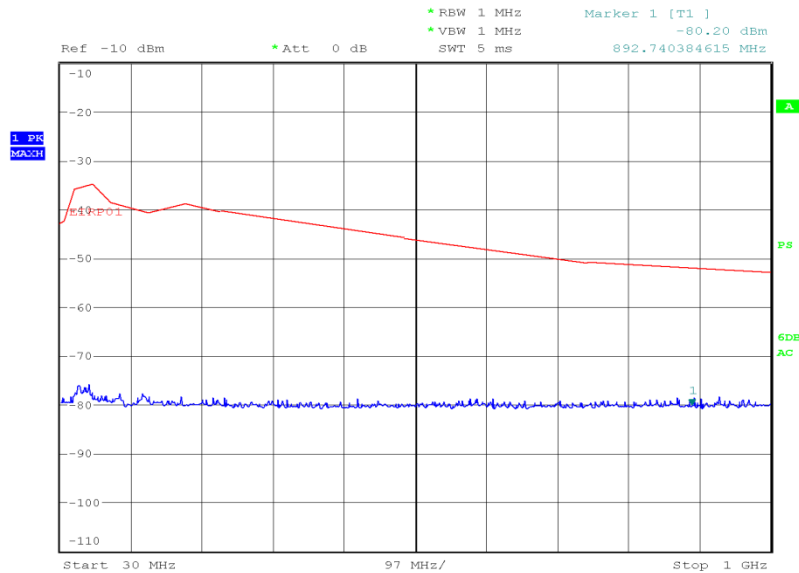Transmit with POE1932.40 MHz30 MHz to 1 GHz

Date: 28.AUG.2012 18:14:12

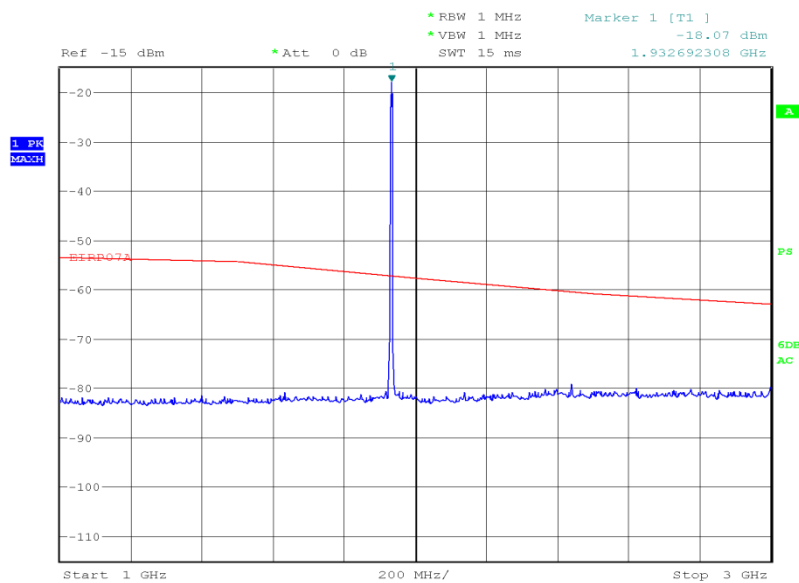
1 GHz to 3 GHz

Date: 28.AUG.2012 18:38:43




Product Service

3 GHz to 8 GHz

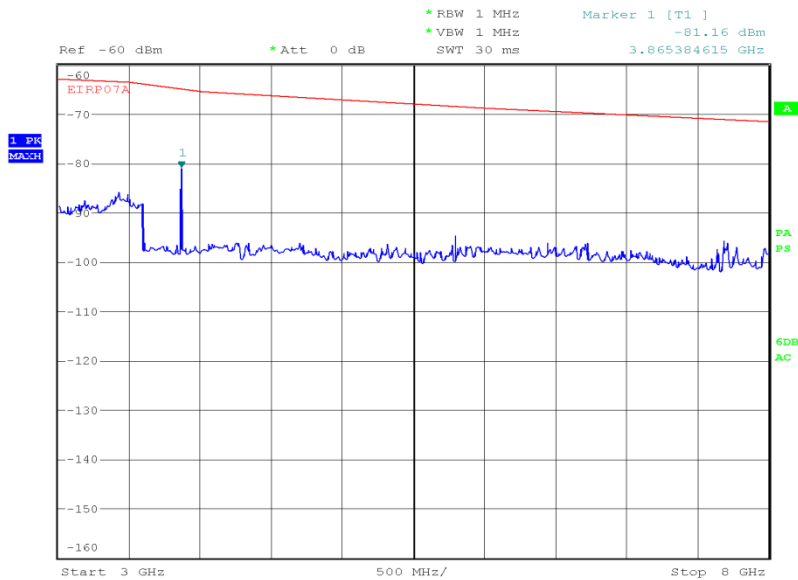

Date: 28.AUG.2012 19:09:43

8 GHz to 18 GHz

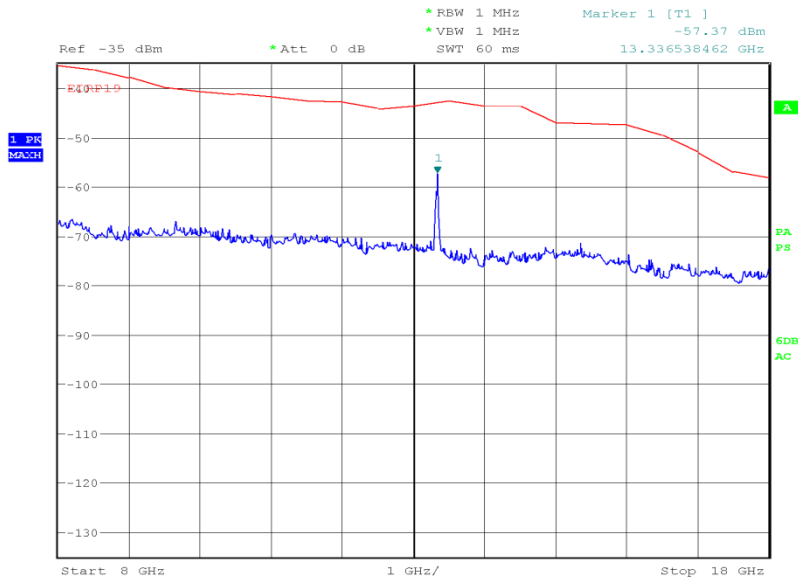


Date: 28.AUG.2012 21:46:56



Product Service


18 GHz to 20 GHz

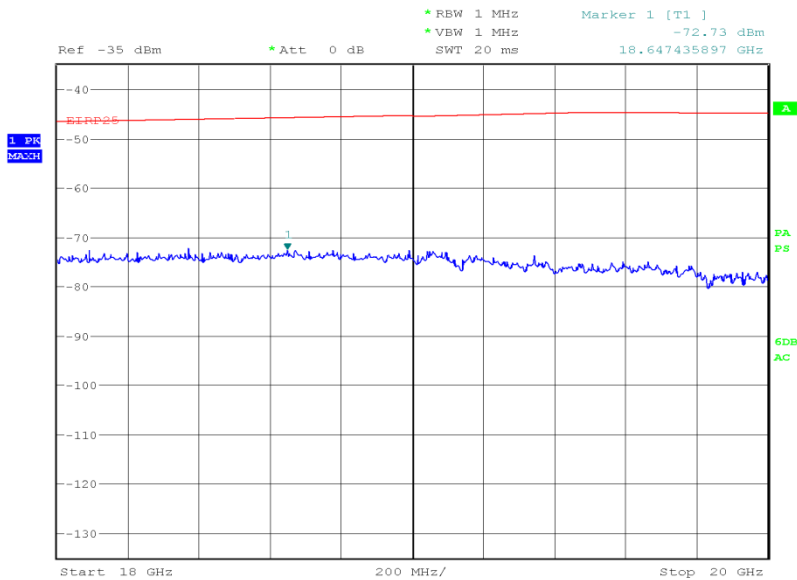

Date: 29.AUG.2012 19:14:16

1960.00 MHz


30 MHz to 1 GHz

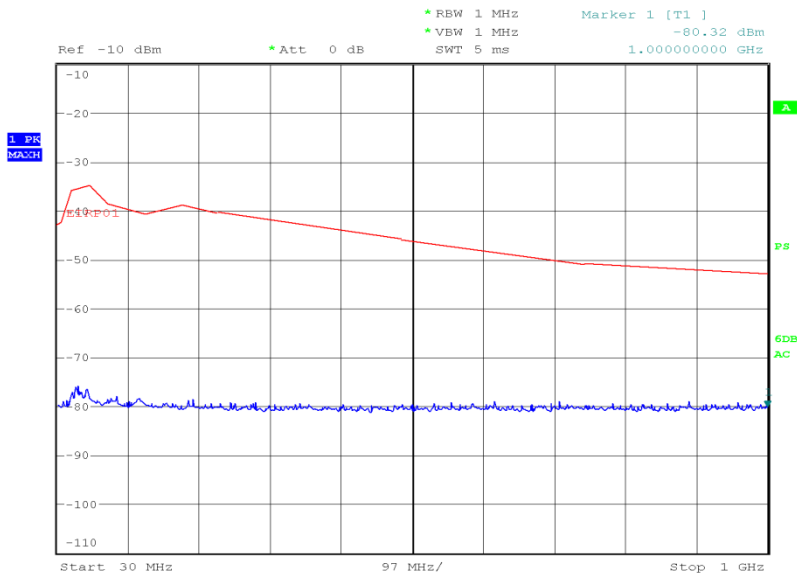

Date: 28.AUG.2012 18:16:13




1 GHz to 3 GHz

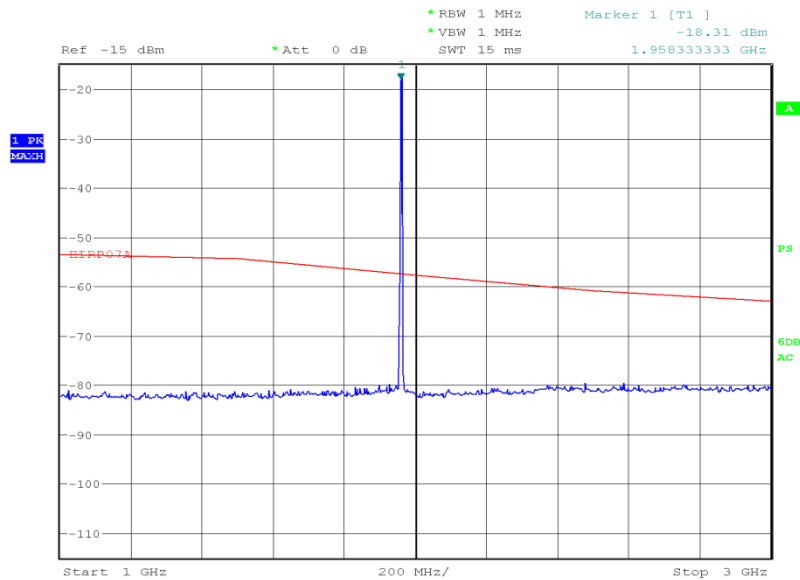

Date: 28.AUG.2012 18:37:07

3 GHz to 8 GHz

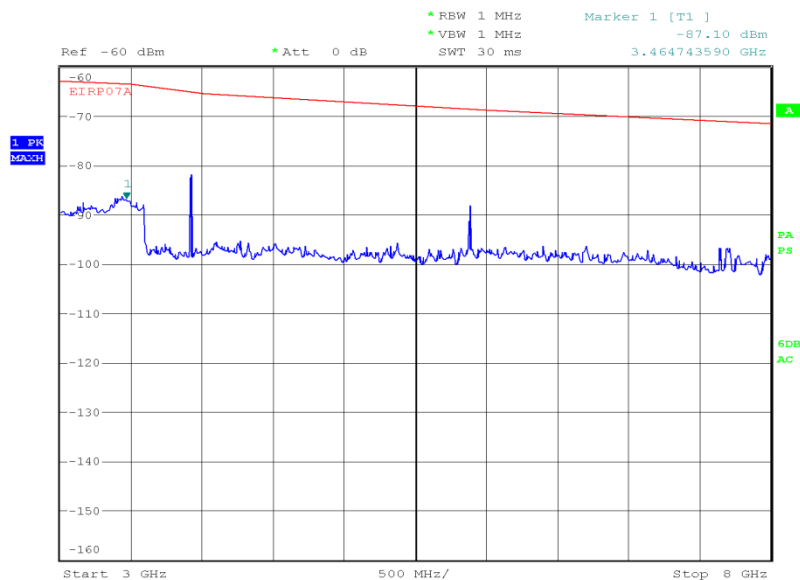


Date: 28.AUG.2012 19:16:37




Product Service

8 GHz to 18 GHz

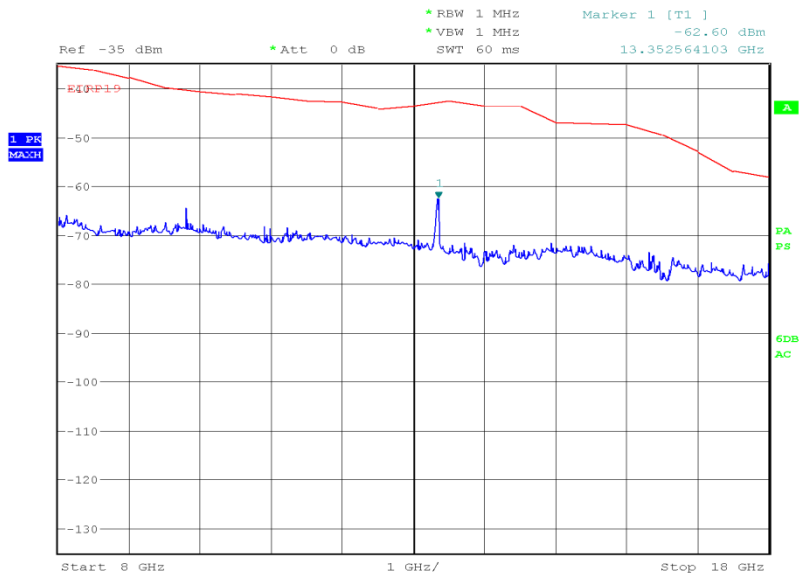

Date: 28.AUG.2012 21:44:40


18 GHz to 20 GHz

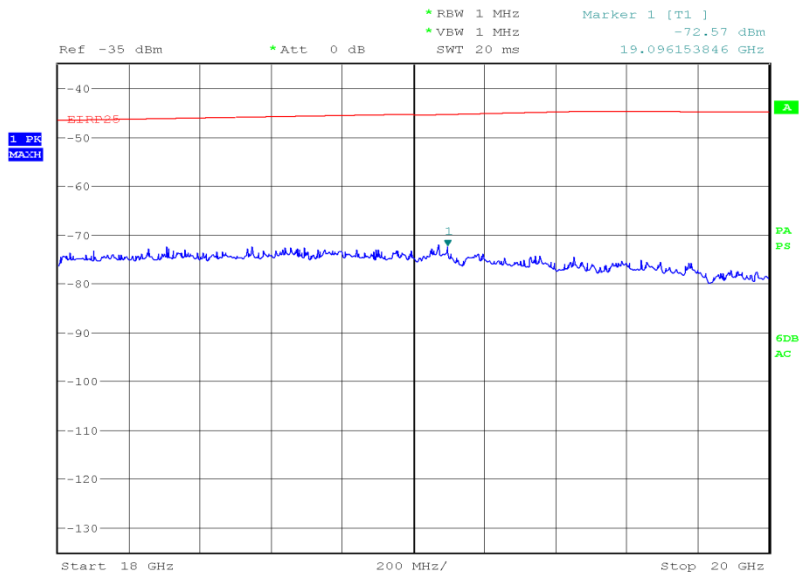


Date: 29.AUG.2012 19:16:07




Product Service

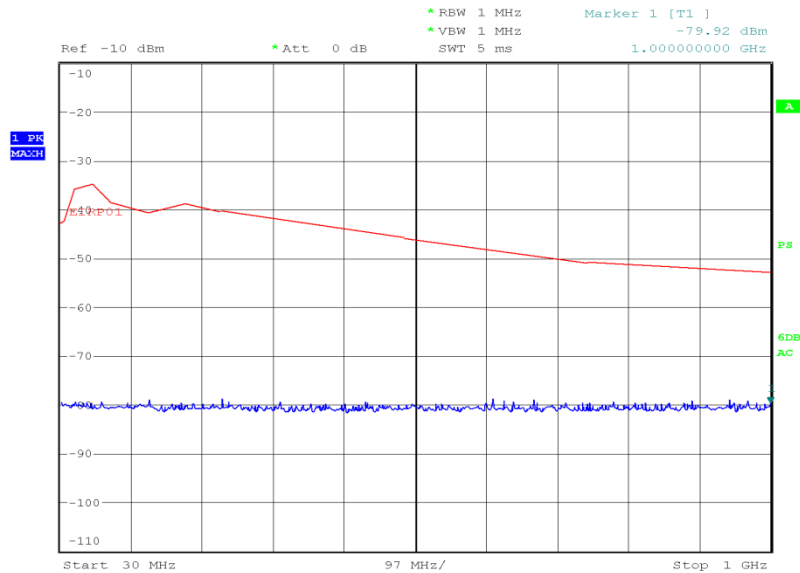1987.60 MHz30 MHz to 1 GHz


Date: 28.AUG.2012 18:30:14

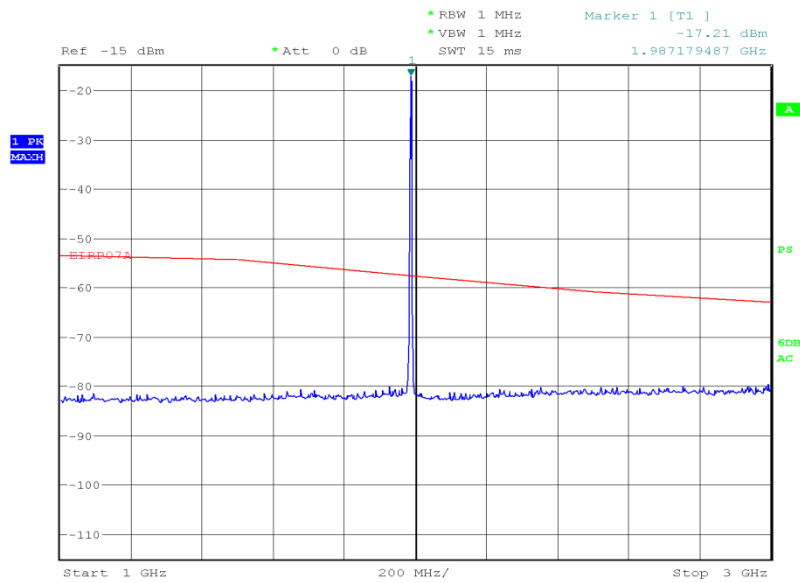1 GHz to 3 GHz

Date: 28.AUG.2012 18:29:00

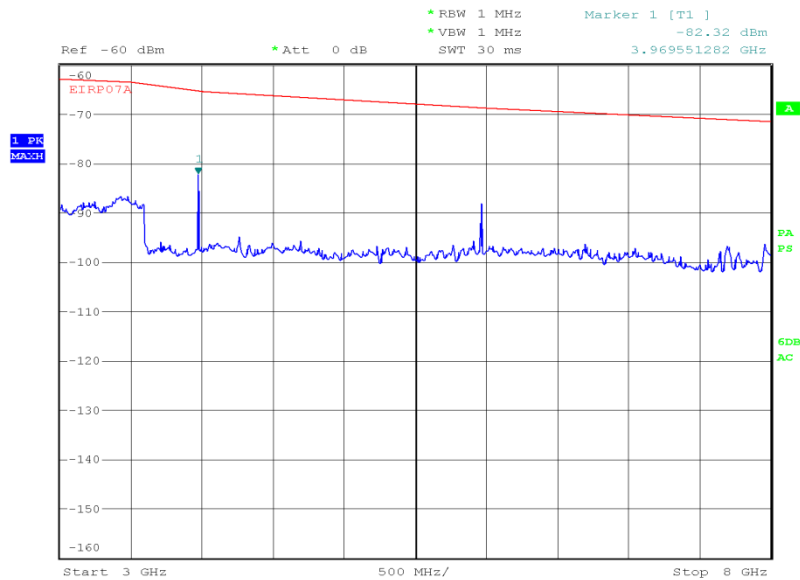3 GHz to 8 GHz


Date: 28.AUG.2012 19:23:53

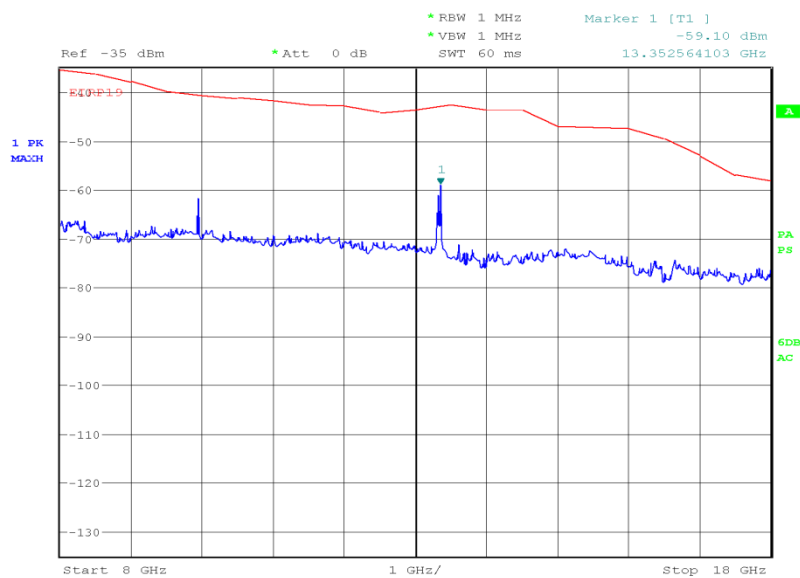8 GHz to 18 GHz

Date: 28.AUG.2012 21:52:12



Product Service

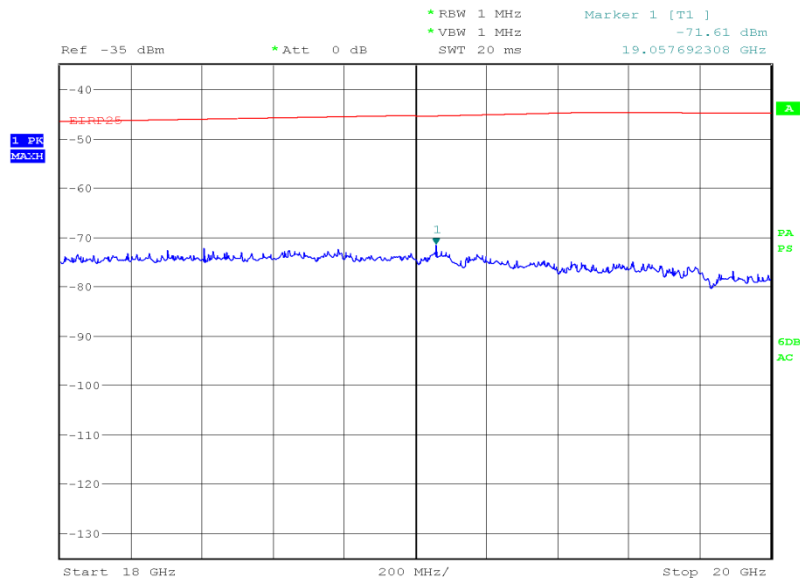18 GHz to 20 GHz

Date: 29.AUG.2012 19:19:13

Limit Clause

43+10log(P) or -13 dBm



Product Service

2.7 CONDUCTED SPURIOUS EMISSIONS

2.7.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1051
FCC CFR 47 Part 24, Clause 24.238(a)

2.7.2 Equipment Under Test and Modification State

243B S/N: 000295-0000106246 - Modification State 0

2.7.3 Date of Test

23 August 2012

2.7.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.7.5 Test Procedure

In accordance with Part 2.1051, the spurious emissions from the antenna terminal were measured. The transmitter output power was attenuated using a combination of filters and attenuators and the frequency spectrum investigated from 9 kHz to 20 GHz. The EUT was set to transmit on full power with WCDMA modulation. The EUT was tested on Bottom, Middle and Top channels for maximum power. The resolution and video bandwidths were set to 1 MHz and 3 MHz thus meeting the requirements of Part 24.238(a). The spectrum analyser detector was set to max hold.

From 9 kHz to 4 GHz, an attenuator was used. For measuring the range 4 GHz to 20 GHz an attenuator and high pass filter were used. This was to reduce saturation effects in the spectrum analyser.

The maximum path loss across the measurement bands were used as reference level offsets to ensure worst case.

2.7.6 Environmental Conditions

Ambient Temperature	20.2°C
Relative Humidity	55.1%



Product Service


2.7.7 Test Results

Transmit with 9V AC/DC Adapter

9 V DC via 110 V AC Supply



1932.40 MHz

9kHz to 4 GHz

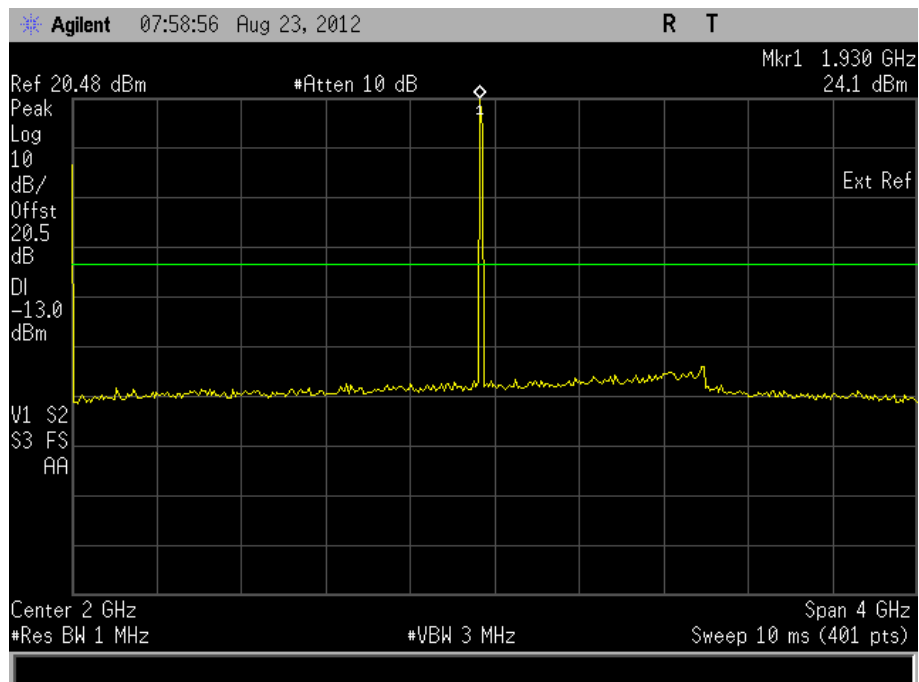





Product Service

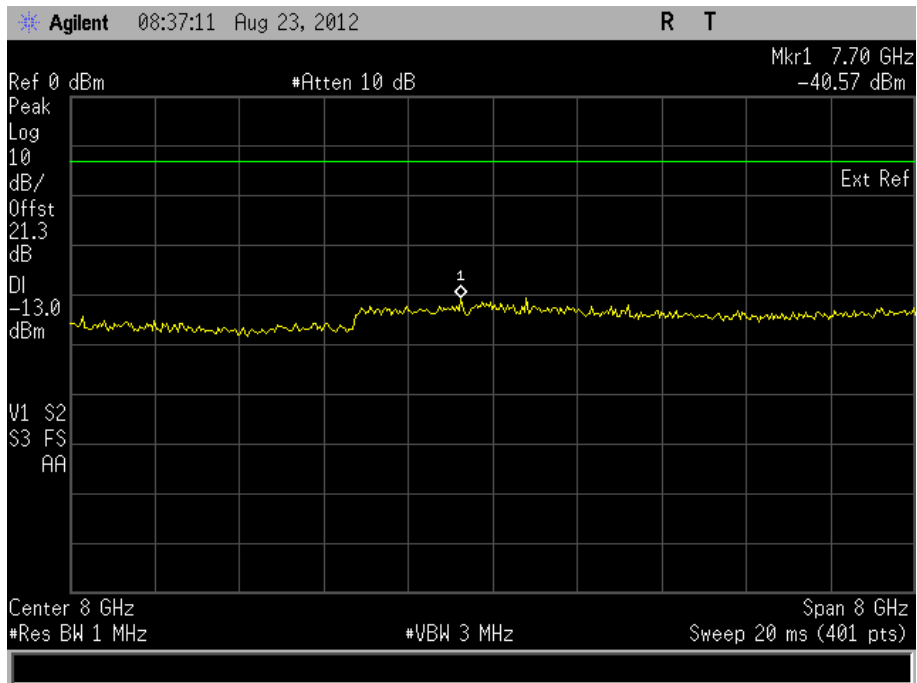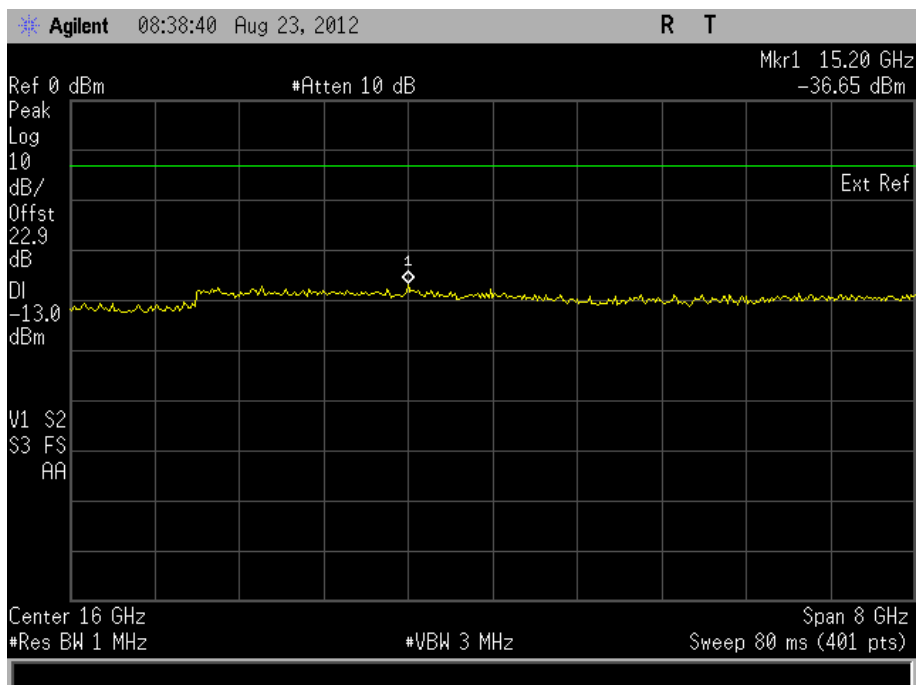4 GHz to 12 GHz12 GHz to 20 GHz





Product Service

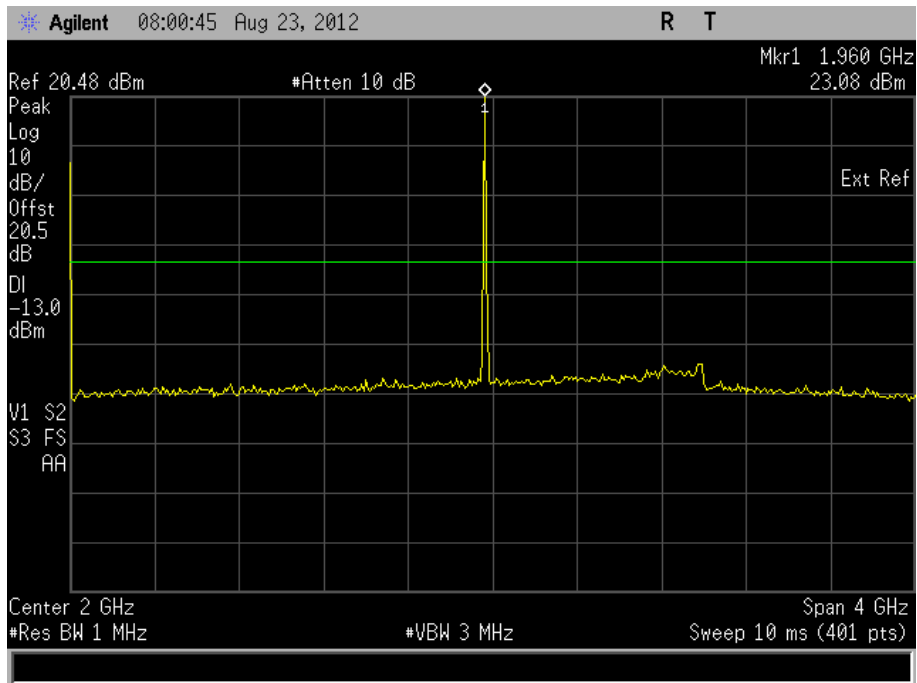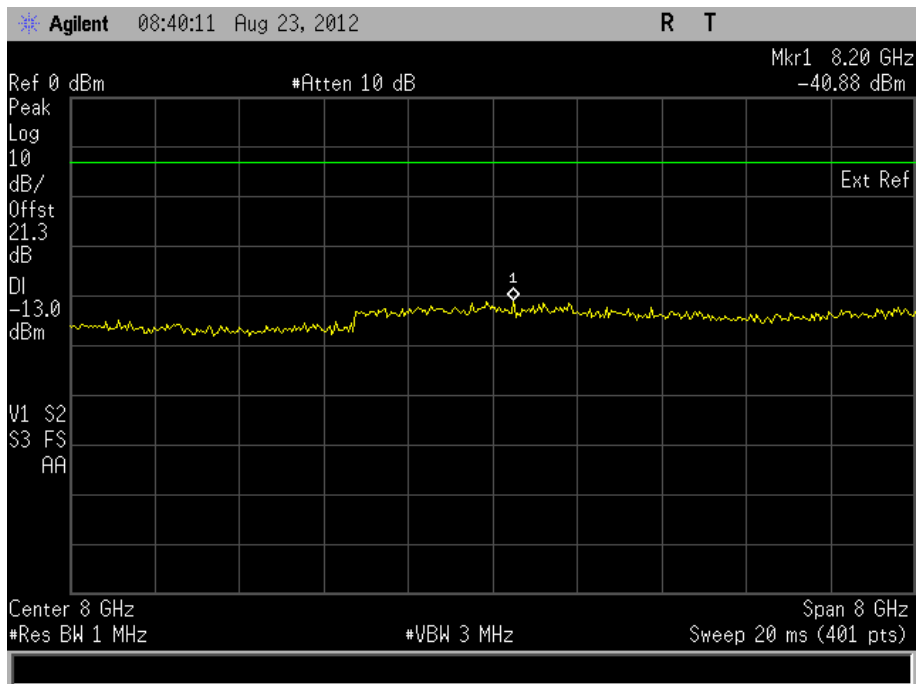1960.00 MHz9kHz to 4 GHz4 GHz to 12 GHz





Product Service

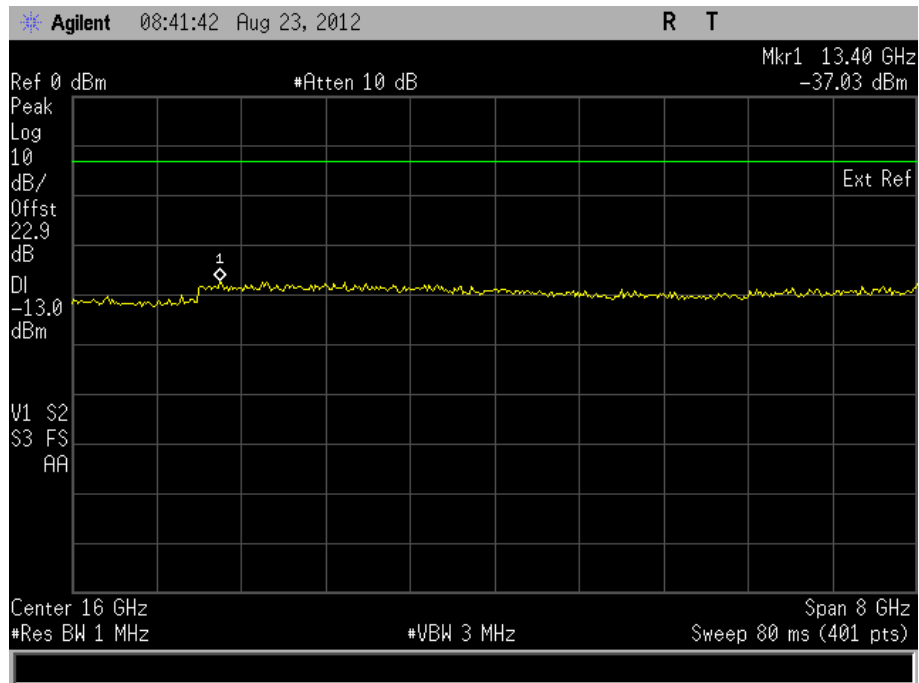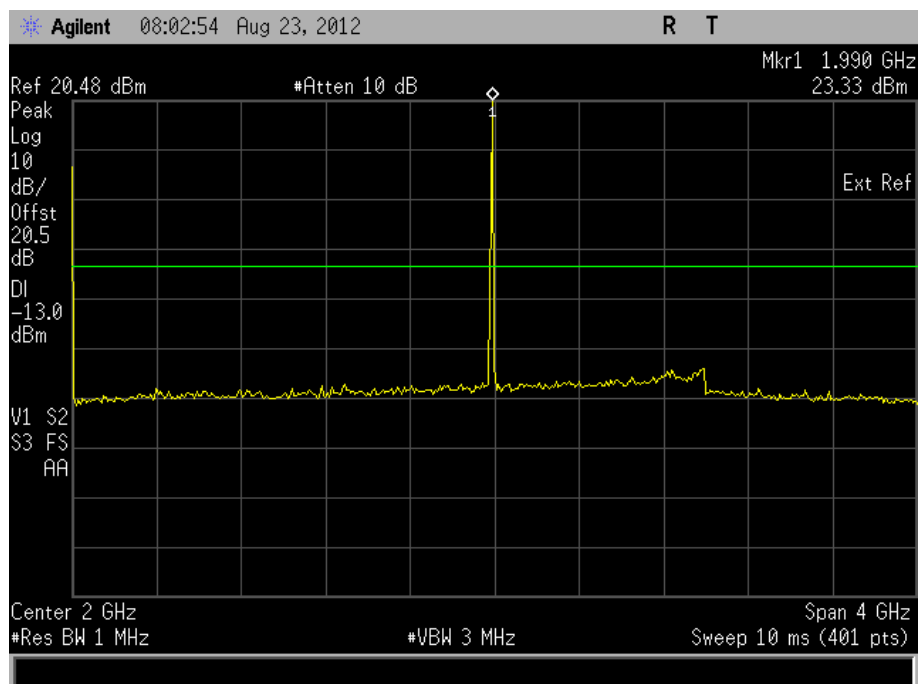12 GHz to 20 GHz1987.60 MHz9kHz to 4 GHz



Product Service

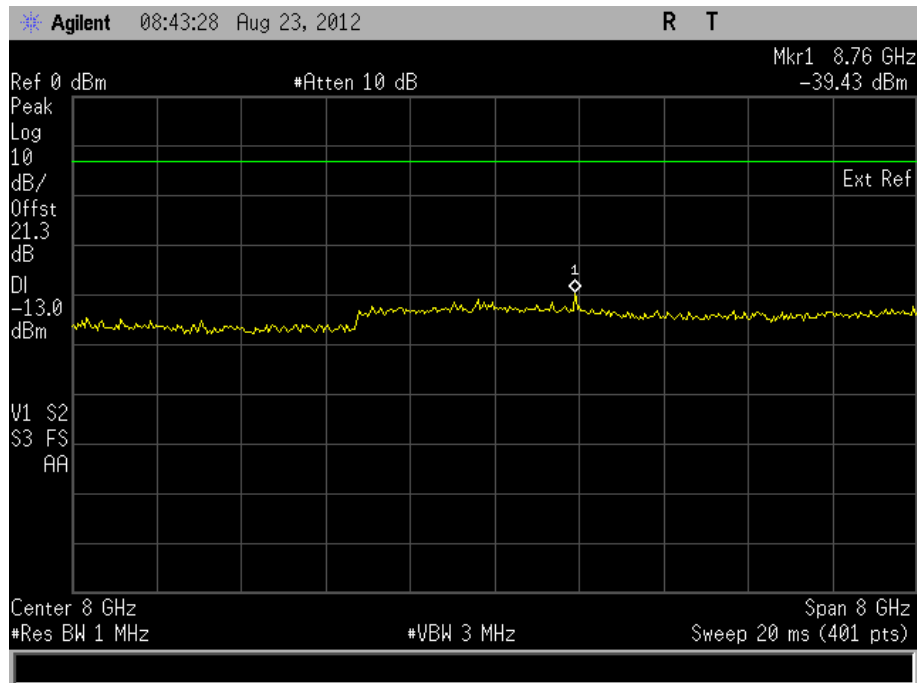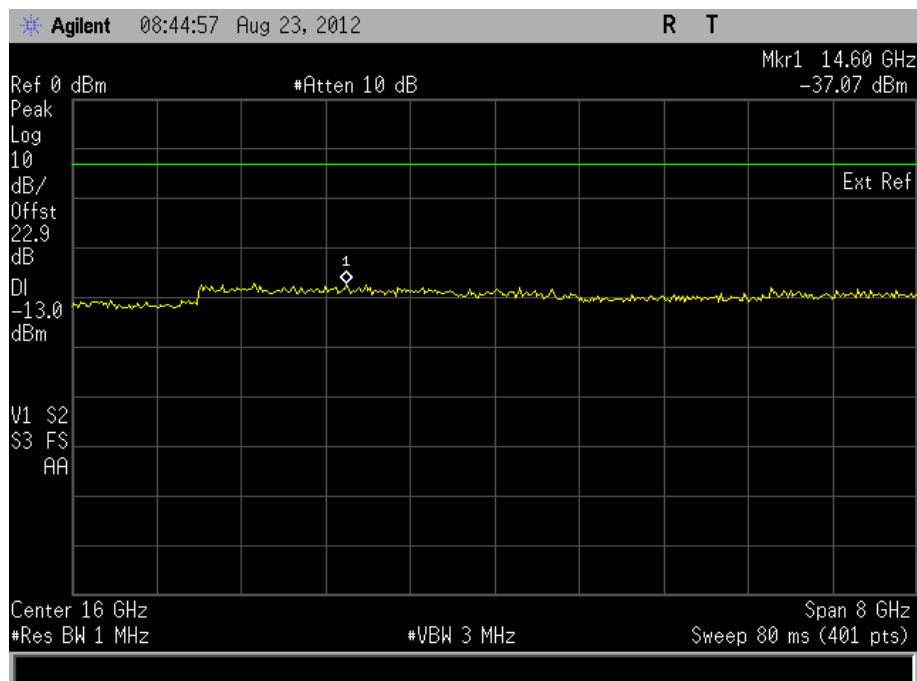4 GHz to 12 GHz12 GHz to 20 GHzLimit Clause

43+10log(P) or -13 dBm



Product Service

2.8 OCCUPIED BANDWIDTH

2.8.1 Specification Reference

FCC CFR 47 Part 2, Clause 2.1049(h)
FCC CFR 47 Part 24, Clause 24.238(b)

2.8.2 Equipment Under Test and Modification State

243B S/N: 000295-0000106246 - Modification State 0

2.8.3 Date of Test

22 August 2012

2.8.4 Test Equipment Used

The major items of test equipment used for the above tests are identified in Section 3.1.

2.8.5 Test Procedure

The EUT was transmitting at maximum power, with WCDMA modulation. Using a resolution bandwidth of 10 kHz and a video bandwidth of 30 kHz, the -26 dBc points were established and the emission bandwidth determined.

The plot of the following pages shows the resultant display from the Spectrum Analyser.

2.8.6 Environmental Conditions

Ambient Temperature	20.2°C
Relative Humidity	55.1%



Product Service


2.8.7 Test Results

Transmit with 9V AC/DC Adapter

9 V DC via 110 V AC Supply

1932.40 MHz

Mode	Occupied Bandwidth (kHz)
WCDMA	4650

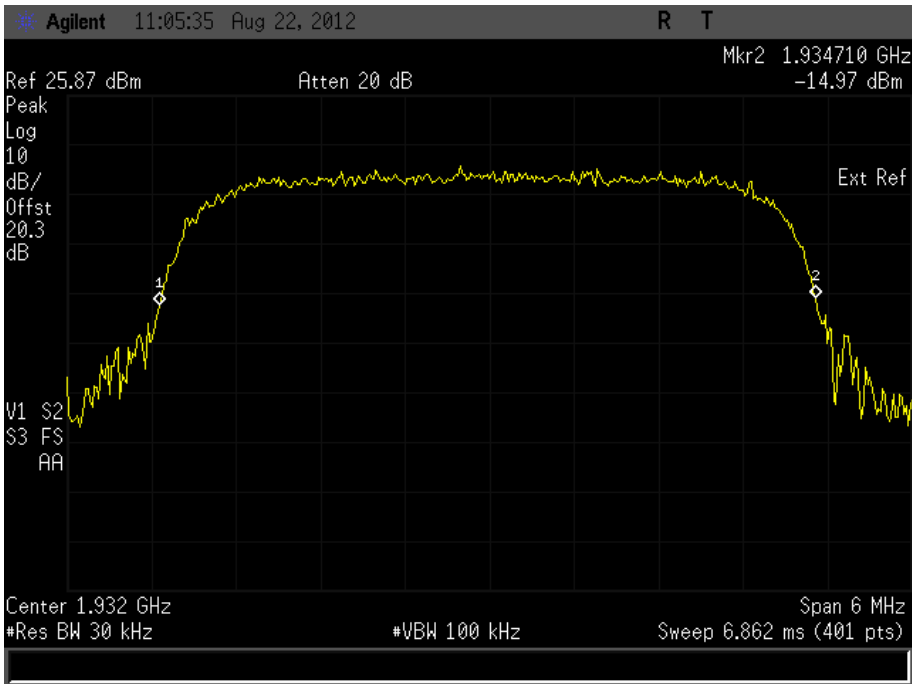




Product Service

1960.00 MHz

Mode	Occupied Bandwidth (kHz)
WCDMA	4635

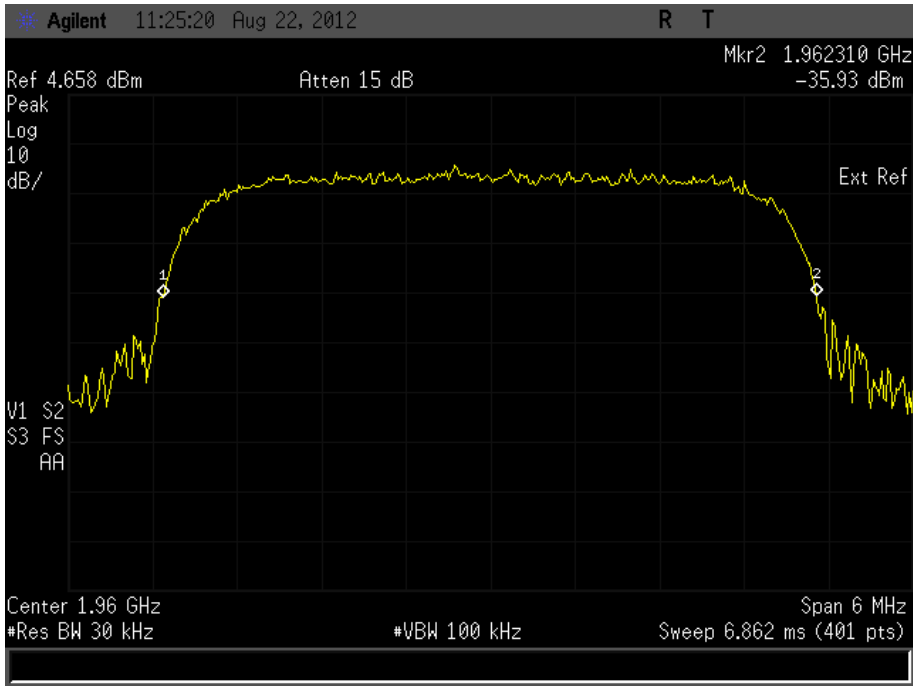




Product Service

1987.60 MHz

Mode	Occupied Bandwidth (kHz)
WCDMA	4650

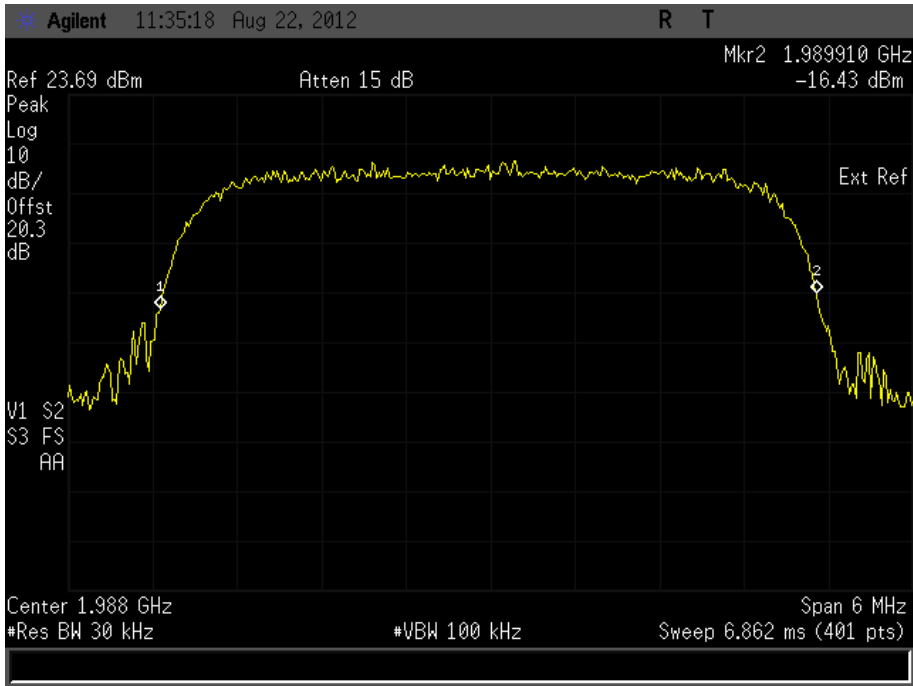

Limit Clause

The occupied bandwidth, that is the frequency bandwidth such that, below is lower and above is upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.



Product Service

SECTION 3

TEST EQUIPMENT USED



3.1 TEST EQUIPMENT USED

List of absolute measuring and other principal items of test equipment.

Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.1 - Frequency Stability					
Digital Temperature Indicator + T/C	Fluke	51	412	12	6-Jan-2013
RF Coupler	TUV SUD Product Service	TÜV	415	-	TU
Temperature Chamber	Montford	2F3	467	-	O/P Mon
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	19-Jan-2013
Hygrometer	Rotronic	I-1000	3220	12	13-Jun-2013
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	14-Jun-2013
Section 2.2 – Spurious Emissions at Band Edge					
Multimeter	Fluke	75 Mk3	455	12	16-Jan-2013
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	27-Jun-2013
Power Splitter	Weinschel	1506A	606	12	19-Dec-2012
Power Supply Unit	Farnell	H60-25	1092	-	O/P Mon
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	19-Jan-2013
Hygrometer	Rotronic	I-1000	2891	12	21-May-2013
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	14-Jun-2013
Signal Generator, 9kHz - 3GHz	Rohde & Schwarz	SMA 100A	3504	12	19-Aug-2012
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	27-Jan-2013
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3700	12	12-Jan-2013
P-Series Power Meter	Agilent	N1911A	3981	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3983	12	12-Sep-2012
Section 2.3 - Effective Isotropic Radiated Power					
Peak Power Analyser	Hewlett Packard	8990A	107	12	10-Feb-2013
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	234	12	8-Dec-2012
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	14-Nov-2012
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
Mast Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Power Sensor	Hewlett Packard	84812A	2743	-	TU
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	18-Nov-2012
Attenuator (20dB, 10W)	Aeroflex / Weinschel	23-20-34	3159	12	13-Jun-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2012
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	29-Sep-2012
7m Armoured RF Cable	SSI Cable Corp.	1501-13-13-7m WA(-)	3600	-	TU
'3.5mm' - '3.5mm' RF Cable (2m)	Rhophase	3PS-1803-2000-3PS	3702	12	27-Jan-2013
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	12	26-Aug-2012
Tilt Antenna Mast	mature GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	mature GmbH	NCD	3917	-	TU



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.4 - Maximum Peak Output Power - Conducted					
Signal Generator	Marconi	2031	762	12	01-Nov-2012
True RMS Multimeter	Fluke	79 Series III	411	12	25-Jul-2013
Multimeter	Fluke	75 Mk3	455	12	16-Jan-2013
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	27-Jun-2013
Attenuator (20dB/ 2W)	Pasternack	PE7004-20	489	12	21-Sep-2012
Power Splitter	Weinschel	1506A	606	12	19-Dec-2012
Power Supply Unit	Farnell	H60-25	1092	-	O/P Mon
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	19-Jan-2013
Programmable Power Supply	Iso-tech	IPS 2010	2438	-	O/P Mon
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	18-Nov-2012
Hygrometer	Rotronic	I-1000	2891	12	21-May-2013
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	14-Jun-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2012
Signal Generator, 9kHz - 3GHz	Rohde & Schwarz	SMA 100A	3504	12	19-Aug-2012
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	27-Jan-2013
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3700	12	12-Jan-2013
Combiner/Splitter	Weinschel	1506A	3879	12	19-Mar-2013
DC - 12.4 GHz 10 dB Attenuator	Suhner	6810.17.A	3965	12	27-Jun-2013
P-Series Power Meter	Agilent	N1911A	3980	12	12-Sep-2012
P-Series Power Meter	Agilent	N1911A	3981	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3982	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3983	12	12-Sep-2012
Section 2.6 - Emission for Broadband PCS Equipment					
Antenna (Double Ridge Guide, 1GHz-18GHz)	EMCO	3115	235	12	14-Nov-2012
Pre-Amplifier	Phase One	PS04-0086	1533	12	20-Sep-2012
Screened Room (5)	Rainford	Rainford	1545	36	25-Dec-2013
Mast Controller	Inn-Co GmbH	CO 1000	1606	-	TU
Antenna (Bilog)	Chase	CBL6143	2904	24	12-May-2013
High Pass Filter (3GHz)	RLC Electronics	F-100-3000-5-R	3349	12	29-May-2013
EMI Test Receiver	Rohde & Schwarz	ESU40	3506	12	29-Sep-2012
9m RF Cable (N Type)	Rhophase	NPS-2303-9000-NPS	3791	-	TU
Tilt Antenna Mast	maturo GmbH	TAM 4.0-P	3916	-	TU
Mast Controller	maturo GmbH	NCD	3917	-	TU
Low Noise Amplifier	Wright Technologies	APS04-0085	3969	-	TU



Instrument	Manufacturer	Type No.	TE No.	Calibration Period (months)	Calibration Due
Section 2.7 - Conducted Spurious Emissions					
True RMS Multimeter	Fluke	79 Series III	411	12	25-Jul-2013
Multimeter	Fluke	75 Mk3	455	12	16-Jan-2013
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	27-Jun-2013
Power Splitter	Weinschel	1506A	606	12	19-Dec-2012
Power Supply Unit	Farnell	H60-25	1092	-	O/P Mon
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	19-Jan-2013
Programmable Power Supply	Iso-tech	IPS 2010	2438	-	O/P Mon
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	18-Nov-2012
High Pass Filter (4GHz)	RLC Electronics	F-100-4000-5-R	2773	12	20-Sep-2012
Filter	Daden Anthony Ass	MH-1500-7SS	2778	12	21-Dec-2012
Hygrometer	Rotronic	I-1000	2891	12	21-May-2013
Attenuator (10dB, 50W)	Aeroflex / Weinschel	47-10-34	3166	12	27-Jun-2013
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	14-Jun-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2012
Signal Generator, 9kHz - 3GHz	Rohde & Schwarz	SMA 100A	3504	12	19-Aug-2012
3 GHz High Pass Filter	K&L Microwave	11SH10-3000/X18000-O/O	3552	12	16-Apr-2013
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	27-Jan-2013
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3700	12	12-Jan-2013
Combiner/Splitter	Weinschel	1506A	3879	12	19-Mar-2013
P-Series Power Meter	Agilent	N1911A	3980	12	12-Sep-2012
P-Series Power Meter	Agilent	N1911A	3981	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3982	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3983	12	12-Sep-2012
Section 2.8 - Occupied Bandwidth					
Multimeter	Fluke	75 Mk3	455	12	16-Jan-2013
Attenuator (10dB, 10W)	Weinschel	23-10-34	470	12	27-Jun-2013
Broadband Resistive Power Divider	Weinschel	1506A	605	12	6-Sep-2012
Power Splitter	Weinschel	1506A	606	12	19-Dec-2012
Power Supply Unit	Farnell	H60-25	1092	-	O/P Mon
GPS Frequency Standard	Rapco	GPS-804/3	1312	6	19-Jan-2013
Spectrum Analyser	Rohde & Schwarz	FSU26	2747	12	18-Nov-2012
Hygrometer	Rotronic	I-1000	2891	12	21-May-2013
Attenuator (10dB, 2W)	Weinschel	1	3030	-	TU
ESA-E Series Spectrum Analyser	Agilent	E4402B	3348	12	14-Jun-2013
Signal Generator: 10MHz to 20GHz	Rohde & Schwarz	SMR20	3475	12	20-Dec-2012
Signal Generator, 9kHz - 3GHz	Rohde & Schwarz	SMA 100A	3504	12	19-Aug-2012
'3.5mm' - '3.5mm' RF Cable (1m)	Rhophase	3PS-1803-1000-3PS	3697	12	27-Jan-2013
'N' - 'N' RF Cable (1m)	Rhophase	NPS-1803-1000-NPS	3700	12	12-Jan-2013
'3.5mm' - '3.5mm' RF Cable (2m)	Rhophase	3PS-1803-2000-3PS	3702	12	27-Jan-2013
P-Series Power Meter	Agilent	N1911A	3980	12	12-Sep-2012
P-Series Power Meter	Agilent	N1911A	3981	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3982	12	12-Sep-2012
50 MHz-18 GHz Wideband Power Sensor	Agilent	N1921A	3983	12	12-Sep-2012

TU – Traceability Unscheduled

O/P MON – Output Monitored with Calibrated Equipment



3.2 MEASUREMENT UNCERTAINTY

For a 95% confidence level, the measurement uncertainties for defined systems are:-

Test Discipline	MU
Maximum Peak Output Power - Conducted	± 0.70 dB
Emission for Broadband PCS Equipment	± 3.08 dB
Conducted Spurious Emissions	± 3.454 dB
Effective Isotropic Radiated Power	± 3.08 dB
Spurious Emissions at Band Edge	± 2.20 dB
Occupied Bandwidth	± 10.14 kHz
Modulation Characteristics	-
Frequency Stability	± 99.54 Hz



Product Service

SECTION 4

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



Product Service

4.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT



This report relates only to the actual item/items tested.

Our UKAS Accreditation does not cover opinions and interpretations and any expressed are outside the scope of our UKAS Accreditation.

Results of tests not covered by our UKAS Accreditation Schedule are marked NUA
(Not UKAS Accredited).

This report must not be reproduced, except in its entirety, without the written permission of
TÜV SÜD Product Service Limited

© 2012 TÜV SÜD Product Service Limited