



**FCC 47 CFR PART 15 SUBPART C  
INDUSTRY CANADA RSS-210 ISSUE 9 ANNEX B.10**

**BLUETOOTH LOW ENERGY  
C2PC CERTIFICATION TEST REPORT**

**FOR**

**FLUORESCENT DIGITAL DIMMER SWITCH WITH BLE**

**MODEL NUMBER: DD710**

**FCC ID: QGH-DDMX1  
IC: 2473A-DDMX1**

**REPORT NUMBER: R11412386-E2**

**ISSUE DATE: 2016-11-23**

*Prepared for*  
**LEVITON MFG CO INC  
201 N SERVICE RD  
MELVILLE, NY, 11747-3138, USA**

*Prepared by*  
**UL LLC  
12 LABORATORY DR.  
RESEARCH TRIANGLE PARK, NC 27709 USA  
TEL: (919) 549-1400**

**NVLAP®**

NVLAP Lab code: 200246-0

Revision History

Ver.	Issue Date	Revisions	Revised By
1	2016-11-23	Initial Issue	Richard Jankovics

## TABLE OF CONTENTS

<b>1. DATA REUSE .....</b>	<b>4</b>
1.1. <i>INTRODUCTION .....</i>	4
1.2. <i>DIFFERENCES.....</i>	4
1.3. <i>TESTING PERFORMED.....</i>	4
1.4. <i>REFERENCE DETAIL SECTION.....</i>	4
<b>2. ATTESTATION OF TEST RESULTS .....</b>	<b>5</b>
<b>3. TEST METHODOLOGY .....</b>	<b>6</b>
<b>4. FACILITIES AND ACCREDITATION .....</b>	<b>6</b>
<b>5. CALIBRATION AND UNCERTAINTY .....</b>	<b>6</b>
5.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	6
5.2. <i>SAMPLE CALCULATION .....</i>	6
5.3. <i>MEASUREMENT UNCERTAINTY.....</i>	7
<b>6. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
6.1. <i>DESCRIPTION OF EUT .....</i>	8
6.2. <i>MAXIMUM OUTPUT E-FIELD STRENGTH.....</i>	8
6.3. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	8
6.4. <i>SOFTWARE AND FIRMWARE.....</i>	8
6.5. <i>WORST-CASE CONFIGURATION AND MODE .....</i>	8
6.6. <i>DESCRIPTION OF TEST SETUP.....</i>	9
<b>7. TEST AND MEASUREMENT EQUIPMENT .....</b>	<b>11</b>
7.1. <i>MEASUREMENT METHODS .....</i>	12
<b>8. RADIATED EMISSIONS.....</b>	<b>13</b>
8.1. <i>FUNDAMENTAL FREQUENCY RADIATED EMISSION.....</i>	15
8.2. <i>TRANSMITTER ABOVE 1 GHz .....</i>	16
8.2.1. <i>TX ABOVE 1 GHz FOR BLUETOOTH LOW ENERGY MODE IN THE 2.4 GHz BAND .....</i>	16
8.3. <i>WORST-CASE BELOW 1 GHz.....</i>	21
8.4. <i>WORST-CASE ABOVE 18GHz .....</i>	22
<b>9. SETUP PHOTOS.....</b>	<b>23</b>

## 1. DATA REUSE

### 1.1. INTRODUCTION

The 15.249 antenna port conducted and high/low channel radiated spurious results for DD710 are represented by Leviton device DDMX1 test report R11081167A (FCC ID: QGH-DDMX1, IC: 2473A-DDMX1). This report for DD710 contains radiated field strength, duty cycle, high/low channel bandedge, and middle channel spurious measurements.

Leviton takes full responsibility that the data as referenced in report R11081167A (FCC ID: QGH-DDMX1, IC: 2473A-DDMX1) represent compliance for this model.

### 1.2. DIFFERENCES

Leviton devices DDMX1 and DD710 have similar logic/RF circuit boards, with the same BLE IC and antenna (PCB trace); with the mains board and function being unique to the application (standard light dimmer vs fluorescent digital dimmer). Therefore, DDMX1 antenna port test results are used to represent how DD710 operates from a conducted perspective. Fundamental radiated field strength measurements were made on DD710 to ensure that the fundamental and radiated emissions are aligned between the DD710 and DDMX1 EUT's.

### 1.3. TESTING PERFORMED

Testing performed under this Report (R11412386-E2) are radiated field strength, duty cycle, high/low channel bandedge, and middle channel spurious measurements. All other data is referenced to R11081167A (FCC ID: QGH-DDMX1, IC: 2473A-DDMX1).

### 1.4. REFERENCE DETAIL SECTION

Equipment Class	Reference FCC ID	Type Grant	Grant Date	Report Title
DTS	FCC ID: QGH-DDMX1, IC: 2473A-DDMX1	New	2016-02-24	R11081167A

## 2. ATTESTATION OF TEST RESULTS

**COMPANY NAME:** LEVITON MFG CO INC  
201 N SERVICE RD  
MELVILLE, NY, 11747-3138, USA

**EUT DESCRIPTION:** Fluorescent Digital Dimmer Switch with BLE

**MODEL:** DD710

**SERIAL NUMBER:** 1G56O6

**DATE TESTED:** 2016-09-20 – 2016-09-26

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY (ISED) CANADA RSS-210 Issue 9 Annex B.10	Pass
INDUSTRY (ISED) CANADA RSS-GEN Issue 4	Pass

UL LLC tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL LLC based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

**Note:** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL LLC and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL LLC will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released  
For UL LLC By:

  
Jeffrey Moser  
EMC Program Manager  
UL – Consumer Technology Division

Prepared By:

  
Richard Jankovics  
WiSE Engineer  
UL – Consumer Technology Division

### 3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 4, and RSS-210 Issue 9.

### 4. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 12 Laboratory Dr., Research Triangle Park, NC 27709, USA and 2800 Suite B, Perimeter Park Drive, Morrisville, NC 27560.

12 Laboratory Dr., RTP, NC 27709
<input type="checkbox"/> Chamber A
<input type="checkbox"/> Chamber C
2800 Suite B Perimeter Park Dr., Morrisville, NC 27560
<input type="checkbox"/> Chamber NORTH
<input checked="" type="checkbox"/> Chamber SOUTH

The onsite chambers are covered under ISED Canada company address code 2180C with site numbers 2180C -1 through 2180C-4, respectively.

UL LLC (RTP) is accredited by NVLAP, Laboratory Code 200246-0. The full scope of accreditation can be viewed at <https://www-s.nist.gov/niws/index.cfm?event=directory.search>.

### 5. CALIBRATION AND UNCERTAINTY

#### 5.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

#### 5.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamp Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

### 5.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Total RF power, conducted	$\pm 0.45$ dB
RF power density, conducted	$\pm 1.5$ dB
Spurious emissions, conducted	$\pm 2.94$ dB
All emissions, radiated up to 40 GHz	$\pm 5.36$ dB
Temperature	$\pm 0.07^\circ\text{C}$
Humidity	$\pm 2.26\%$ RH
DC and low frequency voltages	$\pm 1.27\%$
Conducted Emissions (0.150-30MHz)	$\pm 3.65$ dB

Uncertainty figures are valid to a confidence level of 95%.

## 6. EQUIPMENT UNDER TEST

### 6.1. DESCRIPTION OF EUT

The EUT is a Fluorescent Digital Dimmer Switch with BLE.

The radio module is manufactured by TI.

### 6.2. MAXIMUM OUTPUT E-FIELD STRENGTH

The transmitter has a maximum output average E-field as follows:

Frequency Range (MHz)	Mode	Output Avg E-field Strength (dBuV/m)
2402 - 2480	Tx	79.73

### 6.3. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes an integrated trace antenna, with a maximum gain of 5.3 dBi.

### 6.4. SOFTWARE AND FIRMWARE

The firmware installed in the EUT during testing was TI HostTestRelease v31449.

The test utility software used during testing was Realterm 2.0.0.70.

### 6.5. WORST-CASE CONFIGURATION AND MODE

The EUT only operates with in single mode and single orientation (as wall mounted) and it was tested as such.

## 6.6. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacturer	Model	Serial Number	FCC ID
Laptop	Lenovo	T450	PC-0A2UQS	PD97265NGU
Serial to USB converter	FTDI	TTL-232R-3V3	NA	NA
Laptop and Serial to USB converter only used for programming EUT in test mode. Not connected during measurements.				


### I/O CABLES

I/O Cable List						
Cable No	Port	# of identical ports	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	Wired to EUT leads	3 wire AC	1.8	None
2	I/O	1	pin connected to EUT I/O port on PCB	Serial to USB	1.8	Only used for Programming. Not on final product.

### TEST SETUP

The EUT is a dimmer switch with a Bluetooth radio. The laptop was connected to the EUT with a Serial to USB converter cable, a script was sent to the EUT to place into a constant transmit test mode, and the cable and laptop was removed for testing.

**SETUP DIAGRAM FOR TESTS**

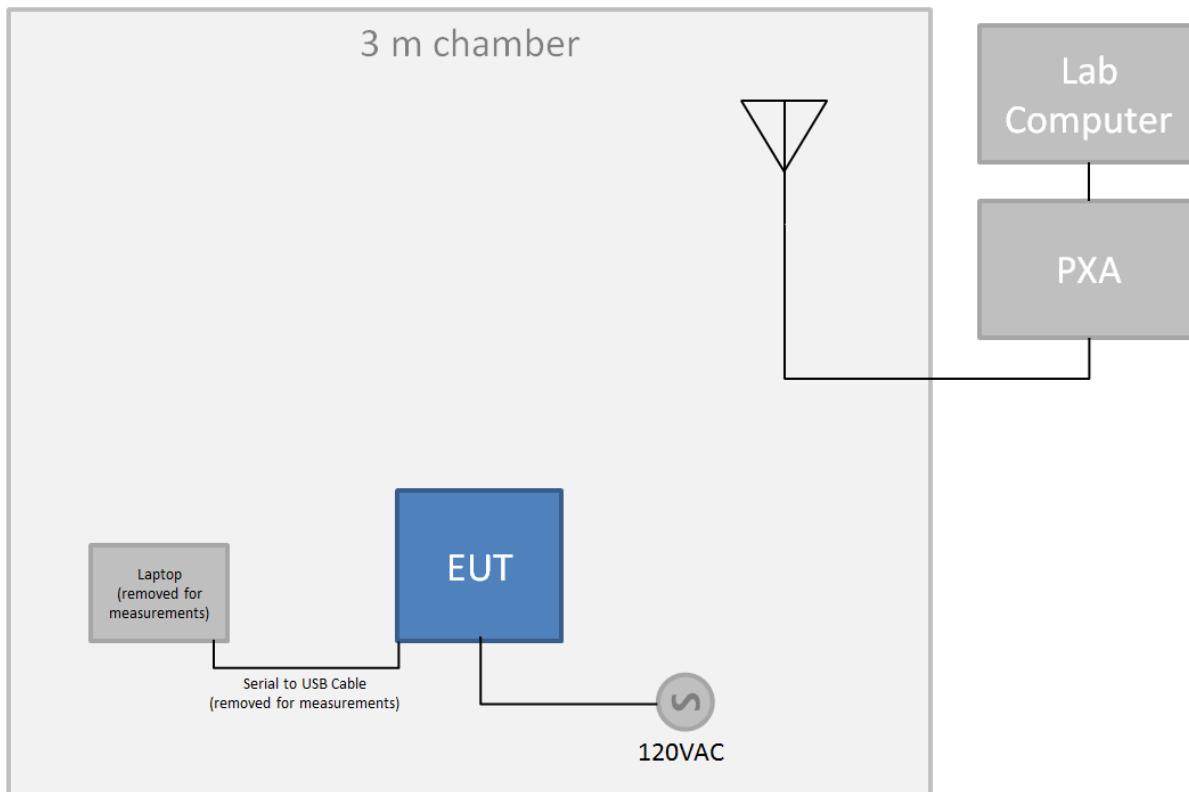

## 7. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Test Equipment Used - Radiated Disturbance Emissions Test Equipment (Morrisville - South Chamber)

Equip. ID	Description	Manufacturer	Model Number	Last Cal.	Next Cal.
	<b>30-1000 MHz</b>				
AT0074	Hybrid Broadband Antenna	Sunol Sciences Corp.	JB3	2016-06-07	2017-06-30
	<b>1-18 GHz</b>				
AT0069	Double-Ridged Waveguide Horn Antenna, 1 to 18 GHz	ETS Lindgren	3117	2016-03-07	2017-03-31
	<b>18-26 GHz</b>				
AT0076	Horn Antenna, 18-26.5GHz	ARA	MWH-1826/B	2016-09-06	2017-09-06
	<b>Gain-Loss Chains</b>				
S-SAC02	Gain-loss string: 30-1000MHz	Various	Various	2016-06-26	2017-06-30
S-SAC03	Gain-loss string: 1-18GHz	Various	Various	2016-08-28	2017-08-28
S-SAC04	Gain-loss string: 18-40GHz	Various	Various	2016-02-29	2017-02-28
	<b>Receiver &amp; Software</b>				
SA0025	Spectrum Analyzer	Agilent	N9030A	2016-03-17	2017-03-31
SA0026 (18-40GHz RSE)	Spectrum Analyzer	Agilent	N9030A	2016-02-24	2017-02-28
SOFTEMI	EMI Software	UL	Version 9.5	NA	NA
	<b>Additional Equipment used</b>				
139843	Temp/Humid/Pressure Meter	Control Co./Fisher	14-650-118	2016-02-19	2017-02-19
PS215	AC Power Source	Elgar	CW2501M (s/n 1523A02397)	NA	NA

## 7.1. MEASUREMENT METHODS

General Radiated Emissions: ANSI C63.10:2013 Sections 6.3-6.6

Radiated Bandedge: ANSI C63.10:2013 Sections 6.10.5

## 8. RADIATED EMISSIONS

### LIMIT

IC RSS-210, B.10, RSS-GEN Clause 8.9  
FCC 15.249, 15.205, 15.209

Operation within the bands 902–928 MHz, 2400–2483.5 MHz, 5725–5875 MHz, and 24.0–24.25 GHz.

(a) Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902–928 MHz .....	50	500
2400–2483.5 MHz .....	50	500
5725–5875 MHz .....	50	500
24.0–24.25 GHz .....	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in § 15.209, whichever is the lesser attenuation.

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009–0.490 .....	2400/F(kHz)	300
0.490–1.705 .....	24000/F(kHz)	30
1.705–30.0 .....	30	30
30–88 .....	100 **	3
88–216 .....	150 **	3
216–960 .....	200 **	3
Above 960 .....	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54–72 MHz, 76–88 MHz, 174–216 MHz or 470–806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.

## **TEST PROCEDURE**

The EUT is placed on a non-conducting table 80 cm above the ground plane for below 1GHz measurements and 1.5 m above the ground plane for above 1GHz measurements. The antenna to EUT distance is 3 meters.

For measurements below 1 GHz the resolution bandwidth is set to 120 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements for the 30-1000 MHz range, 9 kHz for peak detection measurements or 9 kHz for quasi-peak detection measurements for the 0.15-30 MHz range and 200 Hz for peak detection measurements or 200 Hz for quasi-peak detection measurements for the 9 to 150 kHz range. Peak detection is used unless otherwise noted as quasi-peak.

For peak measurements above 1 GHz, the resolution bandwidth is set to 1 MHz and the video bandwidth is set to 3 MHz. For average measurements above 1GHz, the resolution bandwidth and video bandwidth are set as described in ANSI C63.10:2013 for the applicable measurement. For this evaluation, Voltage Averaging was used for the fundamental and restricted band edge, RMS Power Averaging was used for spurious emissions and the resolution/video bandwidth settings were 1MHz/3MHz.

The spectrum from 9 kHz to 26 GHz is investigated with the transmitter set to the middle channel in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

### 8.1. FUNDAMENTAL FREQUENCY RADIATED EMISSION

Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2.402	67.34	Pk	32.3	-24.1	75.54	-	-	114	-38.46	113	113	H
2.402	66.12	Av	32.3	-24.1	74.32	94	-19.68	-	-	113	113	H
2.402	72.69	Pk	32.3	-24.1	80.89	-	-	114	-33.11	346	111	V
2.402	71.53	Av	32.3	-24.1	79.73	94	-14.27	-	-	346	111	V
2.442	66.45	Pk	32.3	-24.3	74.45	-	-	114	-39.55	113	109	H
2.442	65.23	Av	32.3	-24.3	73.23	94	-20.77	-	-	113	109	H
2.442	70.18	Pk	32.3	-24.3	78.18	-	-	114	-35.82	344	111	V
2.442	68.95	Av	32.3	-24.3	76.95	94	-17.05	-	-	344	111	V
2.48	65.96	Pk	32.4	-24.6	73.76	-	-	114	-40.24	66	167	H
2.48	64.67	Av	32.4	-24.6	72.47	94	-21.53	-	-	66	167	H
2.48	67.96	Pk	32.4	-24.6	75.76	-	-	114	-38.24	158	130	V
2.48	66.77	Av	32.4	-24.6	74.57	94	-19.43	-	-	158	130	V


Pk - Peak detector

Av - Average detection

## 8.2. TRANSMITTER ABOVE 1 GHz

### 8.2.1. TX ABOVE 1 GHz FOR BLUETOOTH LOW ENERGY MODE IN THE 2.4 GHz BAND

#### RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

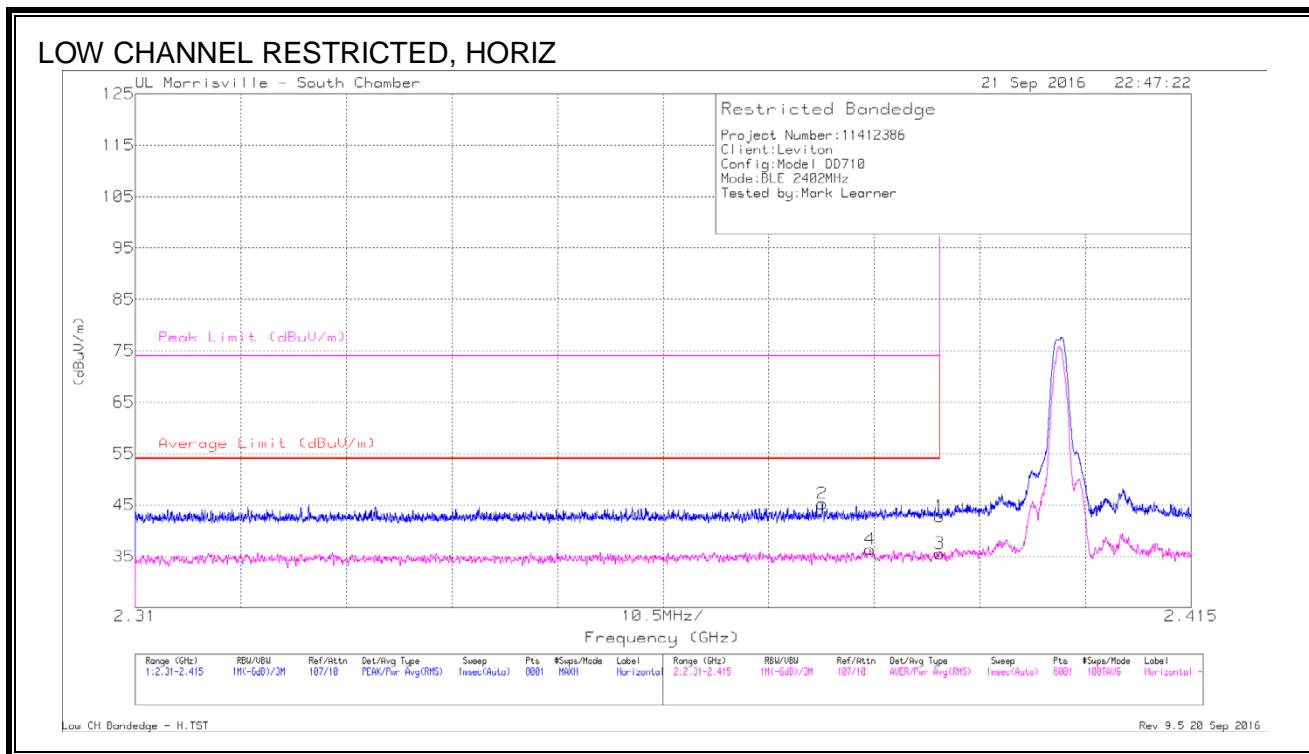

#### Trace Markers


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	34.73	Pk	32.2	-24.1	42.83	-	-	74	-31.17	278	103	H
2	* 2.378	37.17	Pk	32.1	-24	45.27	-	-	74	-28.73	278	103	H
3	* 2.39	25.46	RMS	32.2	-24.1	33.56	54	-20.44	-	-	278	103	H
4	* 2.383	26.27	RMS	32.1	-24	34.37	54	-19.63	-	-	278	103	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)**

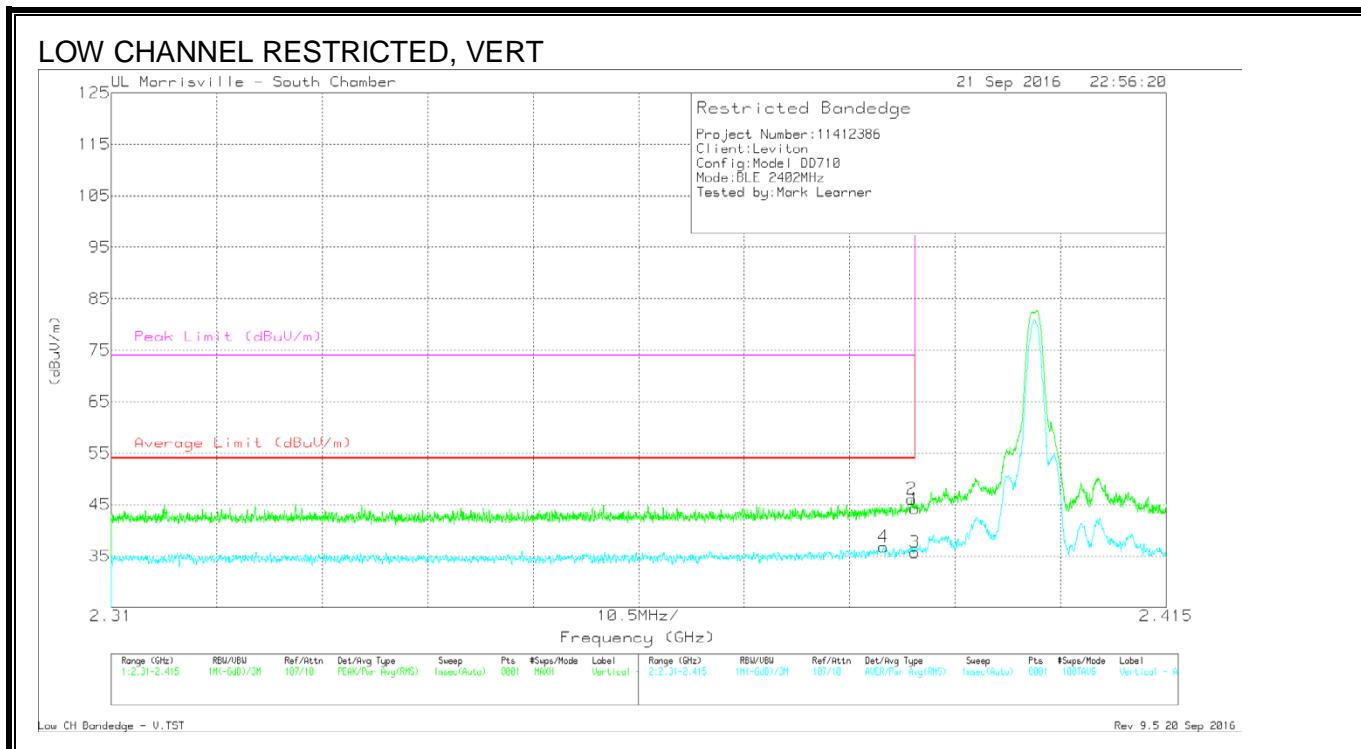

**Trace Markers**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.39	36.11	Pk	32.2	-24.1	44.21	-	-	74	-29.79	121	105	V
2	* 2.39	37.99	Pk	32.2	-24.1	46.09	-	-	74	-27.91	121	105	V
3	* 2.39	25.63	RMS	32.2	-24.1	33.73	54	-20.27	-	-	121	105	V
4	* 2.387	26.68	RMS	32.2	-24.1	34.78	54	-19.22	-	-	121	105	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)**

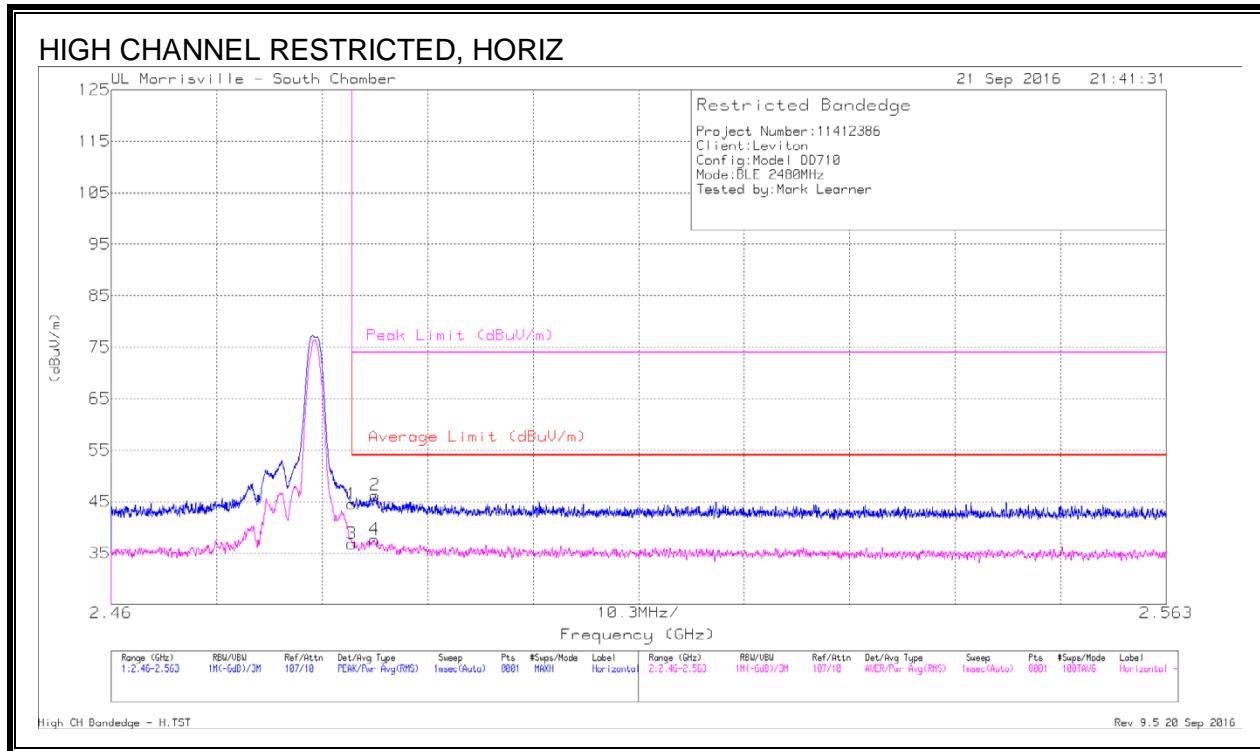

**Trace Markers**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	36.76	Pk	32.4	-24.6	44.56	-	-	74	-29.44	355	141	H
2	* 2.486	38.43	Pk	32.4	-24.6	46.23	-	-	74	-27.77	355	141	H
3	* 2.484	27.02	RMS	32.4	-24.6	34.82	54	-19.18	-	-	355	141	H
4	* 2.486	27.84	RMS	32.4	-24.6	35.64	54	-18.36	-	-	355	141	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)**

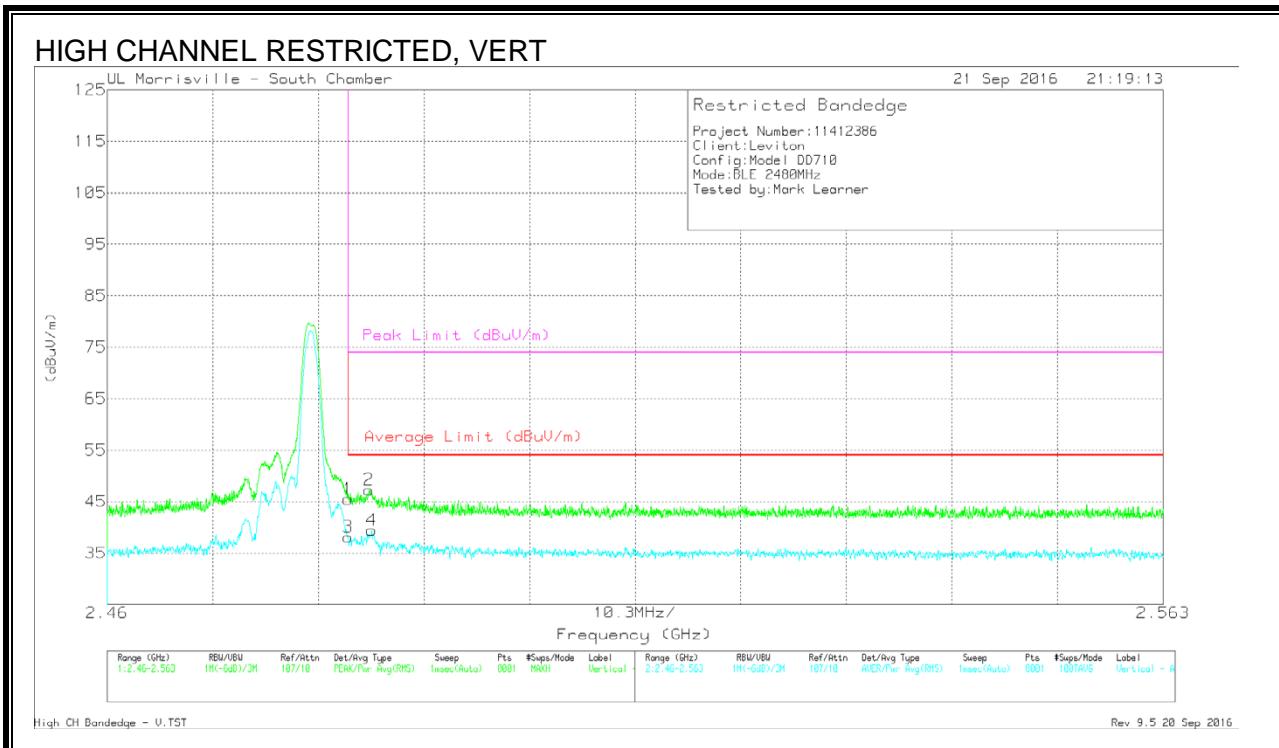

**Trace Markers**


Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 2.484	37.71	Pk	32.4	-24.6	45.51	-	-	74	-28.49	48	114	V
2	* 2.486	39.49	Pk	32.4	-24.6	47.29	-	-	74	-26.71	48	114	V
3	* 2.484	28.33	RMS	32.4	-24.6	36.13	54	-17.87	-	-	48	114	V
4	* 2.486	29.6	RMS	32.4	-24.6	37.4	54	-16.6	-	-	48	114	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

RMS - RMS detection

## HARMONICS AND SPURIOUS EMISSIONS

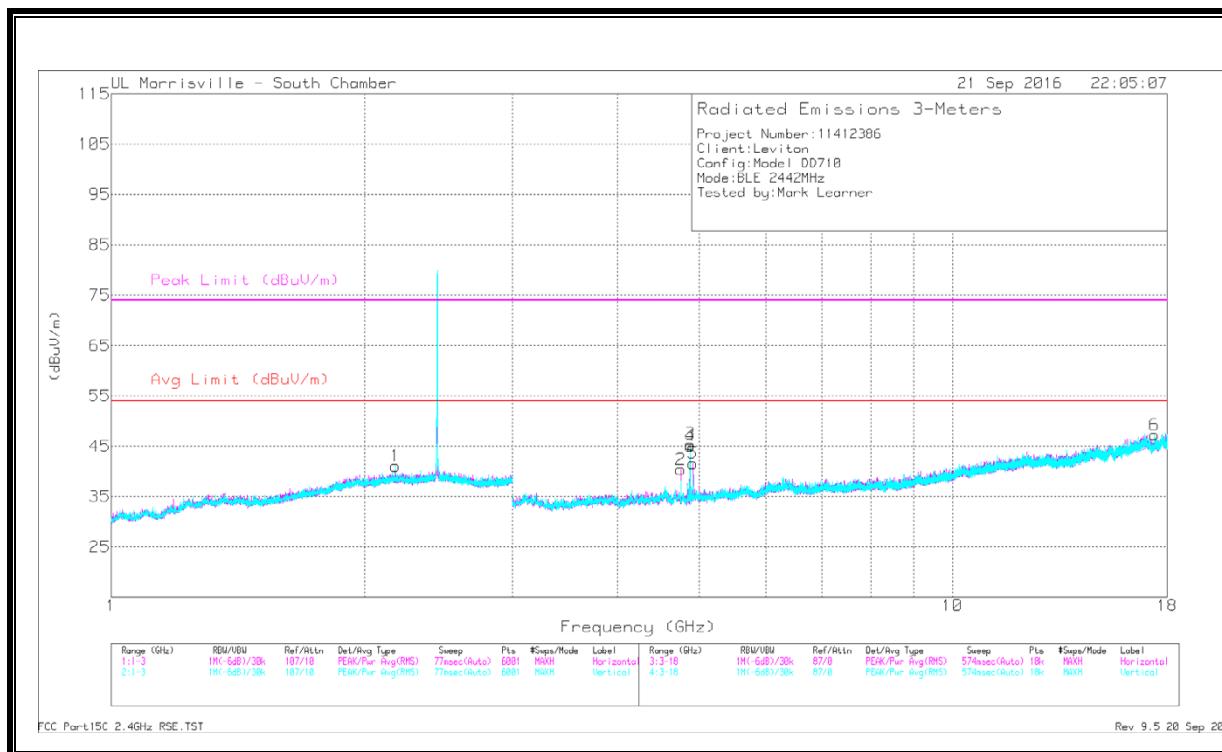

### Trace Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0069 (dB/m)	Amp/Cbl/Fltr/Pad (dB)	Corrected Reading (dBuV/m)	Avg Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	PK Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
2	* 4.754	45.46	PK2	34	-31.7	47.76	-	-	74	-26.24	21	201	H
	* 4.754	28.99	MAv1	34	-31.7	31.29	54	-22.71	-	-	21	201	H
3	* 4.882	45.62	PK2	34.1	-31	48.72	-	-	74	-25.28	30	174	H
	* 4.882	40.99	MAv1	34.1	-31	44.09	54	-9.91	-	-	30	174	H
5	* 4.915	44.77	PK2	34.1	-31	47.87	-	-	74	-26.13	31	178	H
	* 4.915	30.31	MAv1	34.1	-31	33.41	54	-20.59	-	-	31	178	H
4	* 4.883	45.7	PK2	34.1	-31	48.8	-	-	74	-25.2	13	112	V
	* 4.883	37.48	MAv1	34.1	-31	40.58	54	-13.42	-	-	13	112	V
1	2.177	32.41	Pk	31.8	-23.1	41.11	-	-	-	-	0-360	101	V
6	17.385	29.65	Pk	41.2	-23.6	47.25	-	-	-	-	0-360	101	V

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band


Pk - Peak detector

PK2 - Maximum Peak

MAv1 - Maximum RMS Average

### 8.3. WORST-CASE BELOW 1 GHz

#### SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION)

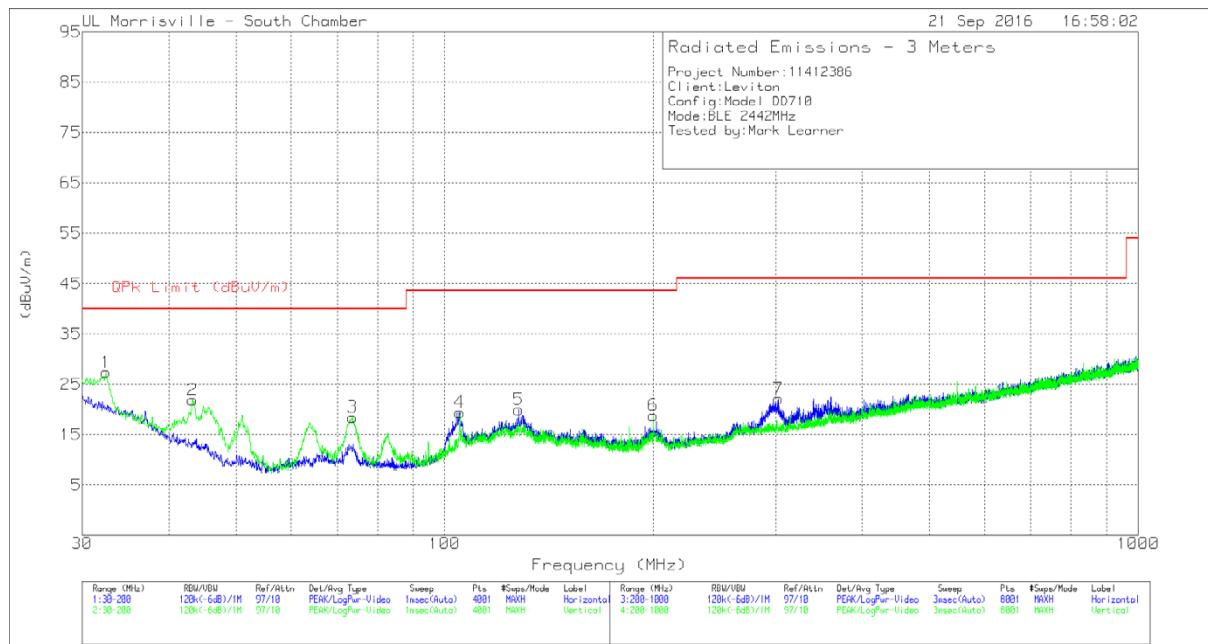

FCC Part 15C 30-1000MHz\_TST

Rev 9.5 20 Sep 2016

#### Trace Markers


Marker	Frequency (MHz)	Meter Reading (dBuV)	Det	AT0074 AF (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	QPK Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
5	* 127.75	32.69	Pk	18.1	-30.8	19.99	43.52	-23.53	0-360	198	H
3	* 73.605	37.36	Pk	12.4	-31.3	18.46	40	-21.54	0-360	101	V
1	32.465	34.99	Pk	24.2	-31.8	27.39	40	-12.61	0-360	101	V
2	43.3025	37.51	Pk	16	-31.6	21.91	40	-18.09	0-360	101	V
4	105.14	34.52	Pk	15.9	-31	19.42	43.52	-24.1	0-360	101	V
6	199.9575	31.54	Pk	17.5	-30.2	18.84	43.52	-24.68	0-360	101	V
7	302.6	33.65	Pk	18.1	-29.6	22.15	46.02	-23.87	0-360	101	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

## 8.4. WORST-CASE ABOVE 18GHz

### SPURIOUS EMISSIONS 18 to 26GHz (WORST-CASE CONFIGURATION)

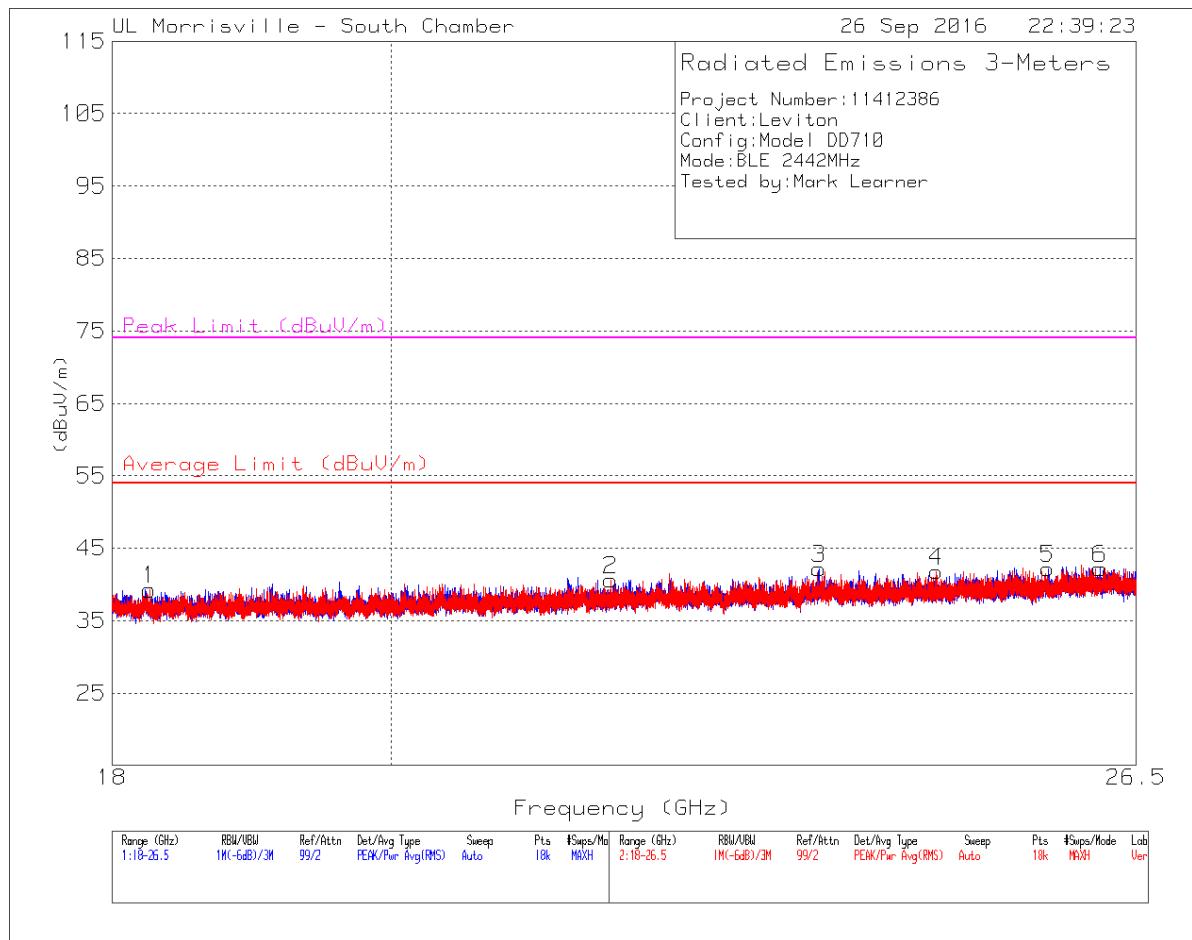

ce Markers

Marker	Frequency (GHz)	Meter Reading (dBuV)	Det	AF AT0076 (dB/m)	Amp/Cbl (dB)	Corrected Reading (dBuV/m)	Average Limit (dBuV/m)	Margin (dB)	Peak Limit (dBuV/m)	Margin (dB)	Azimuth (Degs)	Height (cm)	Polarity
1	* 18.257	47.27	PK2	32.6	-41.1	38.77	54	-15.23	74	-35.23	0	300	V
2	21.731	47.14	Pk	33.4	-39.9	40.64	54	-13.36	74	-33.36	0-360	149	V
3	23.509	47.28	Pk	34	-39.1	42.18	54	-11.82	74	-31.82	0-360	299	H
4	24.577	46.11	Pk	34.3	-38.6	41.81	54	-12.19	74	-32.19	0-360	249	V
5	25.633	45.69	Pk	34.3	-37.8	42.19	54	-11.81	74	-31.81	0-360	201	H
6	26.143	45.12	Pk	34.6	-37.5	42.22	54	-11.78	74	-31.78	0-360	151	H

\* - indicates frequency in CFR47 Pt 15 / IC RSS-Restricted Band

Pk - Peak detector

PK2 - Maximum Peak