



ELECTROMAGNETIC EMISSION COMPLIANCE REPORT FOR FCC CLASS B CERTIFICATION

Test report file number : E027R-054

Applicant : CORE VALLEY CO., LTD.

Address : 8F, 185-5, Dong A Green Plaza B/D. Kumi-Dong, Pundang-Gu, Seongnam-City,
KyungKi-Do, 463-810, Korea

Manufacturer : CORE VALLEY CO., LTD.

Address : 8F, 185-5, Dong A Green Plaza B/D. Kumi-Dong, Pundang-Gu, Seongnam-City,
KyungKi-Do, 463-810, Korea

Type of Equipment : MOBILE STORAGE
(Class B Computing Device Peripheral)

FCC ID : QGVCV-C101

Model Name : CV-C101

Multiple Model Name : N/A

Serial number : N/A

Total page of Report : 13 pages (including this page)

Date of Incoming : April 23, 2002

Date of Issuing : July 25, 2002

SUMMARY

The equipment complies with the requirements of **FCC CFR 47 PART 15 SUBPART B, Class B.**

This test report contains only the results of a single test of the sample supplied for the examination. It is not a general valid assessment of the features of the respective products of the mass-production.

Prepared by: G. W. Lee
G. W. Lee/ Assistant Chief Engineer

Reviewed by: Y. K. Kwon
Y. K. Kwon/ Chief Engineer

This report shall not be reproduced except in full without our written approval.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daeangryong-Ri Chong-Myun Kwangju-City, Kyunggi-Do 464-860 Korea (TEL: +82-31-765-8288, FAX: +82-31-766-2904)



ONETECH

Testing & Evaluation Lab.

Unknown document property name.

Page 2 of 13

FCC ID. : **Error!**

File No. : **Error!**

Unknown document property name.

EMC Div.
ONETECH Corp.

EMC Div.
ONETECH Corp.



CONTENTS

	Page
1. VERIFICATION OF COMPLIANCE	4
2. GENERAL INFORMATION	5
2.1 PRODUCT DESCRIPTION	5
2.2 RELATED SUBMITTAL(S) / GRANT(S)	5
2.3 TEST SYSTEM DETAILS	5
2.4 TEST METHODOLOGY	5
2.5 TEST FACILITY	5
3. SYSTEM TEST CONFIGURATION.....	7
3.1 JUSTIFICATION	7
3.2 EUT EXERCISE SOFTWARE	7
3.3 CABLE DESCRIPTION	7
3.4 NOISE SUPPRESSION PARTS ON CABLE	7
3.5 EQUIPMENT MODIFICATIONS	7
3.6 CONFIGURATION OF TEST SYSTEM	9
4. PRELIMINARY TEST.....	9
4.1 AC POWER LINE CONDUCTED EMISSION TEST	9
4.2 RADIATED EMISSION TEST	9
5. FINAL RESULT OF MEASUREMENT	10
5.1 CONDUCTED EMISSION TEST.....	10
5.2 RADIATED EMISSION TEST	14
6. FIELD STRENGTH CALCULATION.....	17
7. LIST OF TEST EQUIPMENT	18

Unknown document property name.

1. VERIFICATION OF COMPLIANCE

-. APPLICANT : CORE VALLEY CO., LTD.
 -. ADDRESS : 8F, 185-5, Dong A Green Plaza B/D. Kumi-Dong, Pundang-Gu, Seongnam-City, KyungKi-Do, 463-810, Korea
 -. CONTACT PERSON : Mr. D. H. Lee/Chief Research Engineer
 -. TELEPHONE NO : +82-31-728-6900
 -. FCC ID : QGVCV-C101
 -. MODEL NO/NAME : CV-C101
 -. SERIAL NUMBER : N/A
 -. DATE : July 25, 2002

DEVICE TYPE	Peripheral Device for Class B Computing Device - Unintentional Radiator
E.U.T. DESCRIPTION	MOBILE STORAGE
THIS REPORT CONCERNS	ORIGINAL GRANT
MEASUREMENT PROCEDURES	ANSI C63.4/1992
TYPE OF EQUIPMENT TESTED	PRE-PRODUCTION
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	CERTIFICATION
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15, SECTION 15.101
MODIFICATIONS ON THE EQUIPMENT TO ACHIEVE COMPLIANCE	No
FINAL TEST WAS CONDUCTED ON	3 METER OPEN AREA TEST SITE

The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

Unknown document property name.

2. GENERAL INFORMATION

2.1 Product Description

The CORE VALLEY CO., LTD., Model CV-C101 (referred to as the EUT in this report) is a MOBILE STORAGE that is interfaced to personal computer via USB or 1394 port. Product specification described herein was obtained from product data sheet or user's manual.

CHASSIS TYPE	Plastic
LIST OF EACH OSC. or CRY. FREQ.(FREQ.>=1MHz)	30 MHz, 24.576 MHz
NUMBER OF LAYERS	4 Layers
EXTERNAL CONNECTOR	USB Plug (A type), IEEE1394

Model Differences:

The difference(s) compared to the EUT is as follows: none

2.2 Related Submittal(s) / Grant(s)

Original submittal only

2.3 Test System Details

The model numbers for all the equipments that were used in the tested system is:

Model	Manufacturer	FCC ID	Description	Connected to
CV-C101	CORE VALLEY CO., LTD.	QGVCV-C101	MOBILE STORAGE (EUT)	PC
DCM	DELL COMPUTER CORP.	DOC	PC	-
CPD-G220	SONY	DOC	MONITOR	PC
KB-9963	COMPAQ	DOC	KEYBOARD	PC
M-S48a	LOGITECH	JNZ201213	MOUSE	PC
020-0470	CARDINAL	GDE0196	MODEM	PC
2225C	HP	DSI6XU2225	PRINTER	PC

2.4 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.4/1992. Radiated testing was performed at a distance of 3 meters from EUT to the antenna.

2.5 Test Facility

The open area test site and conducted measurement facilities are located on at 426-1 Daessangryung-Ri, Chowol-Myun, Kwangju-Kun, Kyunggi-Do 464-080 Korea. Description details of test facilities were submitted to the Commission on



ONETECH

Testing & Evaluation Lab.

Unknown document property name.

Page 6 of 13

FCC ID. : **Error!**

File No. : **Error!**

Unknown document property name.

January 18, 2002. (Registration Number: 92819)

Unknown document property name.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
MAIN B'D	CORE VALLEY CO., LTD.	USB 2.0/IEEE1394	N/A
HDD	IBM	IC25N020ATCS04-0	N/A

3.2 EUT exercise Software

After connecting the EUT to a personal computer, data were continuously read and written from the HDD of the personal computer to HDD in the EUT.

3.3 Cable Description

	Power Cord Shielded (Y/N)	I/O cable Shielded (Y/N)	Length (M)
MOBILE STORAGE (EUT)	N	Y	1.0 (P), 1.0 (D)
PC	N	-	1.5 (P), -
MONITOR	N	Y	1.5 (P), 1.3 (D)
KEYBOARD	N/A	N	1.3 (D)
MOUSE	N/A	N	1.3 (D)
MODEM	N	Y	1.5(P), 1.5(D)
PRINTER	N	Y	1.5(P), 1.5(D)

* The marked "(P)" means the Power Cable and "D" means the I/O Cable.

3.4 Noise Suppression Parts on Cable

	Ferrite Bead (Y/N)	Location	Metal Hood (Y/N)	Location
MOBILE STORAGE (EUT)	N	N/A	Y	BOTH END
PC	N	N/A	-	-
MONITOR	N	N/A	Y	PC END
KEYBOARD	N	N/A	Y	PC END
MOUSE	N	N/A	Y	PC END



Unknown document property name.

FCC ID. : **Error!**

File No. : **Error!**

Unknown document property name.

MODEM	N	N/A	Y	BOTH END
PRINTER	N	N/A	Y	BOTH END

Unknown document property name.

3.5 Equipment Modifications

To achieve compliance to CLASS B levels, the following change(s) was made by ONETECH Corp. during compliance testing:

“There were no Modified items during EMI test”

3.6 Configuration of Test System

Line Conducted Test : The EUT was connected to PC and the power line of PC was connected to LISN. All supporting equipments were connected to another LISN. Preliminary Power line Conducted Emission test was performed by using the procedure in ANSI C63.4/1992 7.2.3 to determine the worse operating conditions.

Radiated Emission Test : Preliminary radiated emission test was conducted using the procedure in ANSI C63.4/1992 8.3.1.1 to determine the worse operating conditions. Final radiated emission test was conducted at 3 meters open area test site.

4. PRELIMINARY TEST

4.1 AC Power line Conducted Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
via USB	
via IEEE1394	X

4.2 Radiated Emission Test

During Preliminary Test, the following operating mode was investigated

Operation Mode	The Worse operating condition (Please check one only)
via USB	X
via IEEE1394	



Unknown document property name.

5. FINAL RESULT OF MEASUREMENT

Preliminary test was done in normal operation mode. And the final measurement was selected for the maximized emission level

5.1 Conducted Emission Test (USB mode)

Humidity Level : 49 % Temperature : 19 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107
 Type of Test : CLASS B
 Result : PASSED BY -10.27 dB at 5.78 MHz

EUT : MOBILE STORAGE Date: May 20, 2002
 Operating Condition : Data were continuously read and written.
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Power Line Conducted Emission			FCC CLASS B	
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)
0.95	37.69	NEUTRAL	48.00	-10.31
1.41	36.34	HOT	48.00	-11.66
1.56	37.25	NEUTRAL	48.00	-10.75
2.74	36.42	NEUTRAL	48.00	-11.58
4.26	37.52	NEUTRAL	48.00	-10.48
5.78	37.73	HOT	48.00	-10.27

Line Conducted Emission Tabulated Data



Unknown document property name.

5.2 Conducted Emission Test (1394 mode)

Humidity Level : 49 % Temperature : 19 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.107
Type of Test : CLASS B
Result : PASSED BY -9.93 dB at 5.78 MHz

EUT : MOBILE STORAGE Date: May 20, 2002
Operating Condition : Data were continuously read and written.
Detector : CISPR Quasi-Peak (6 dB Bandwidth: 9 kHz)

Power Line Conducted Emission			FCC CLASS B	
Frequency (MHz)	Amplitude (dBuV)	Conductor	Limit (dBuV)	Margin (dB)
0.80	37.28	HOT	48.00	-10.72
0.95	37.41	HOT	48.00	-10.59
1.56	37.37	NEUTRAL	48.00	-10.63
4.16	37.47	HOT	48.00	-10.53
4.26	37.58	NEUTRAL	48.00	-10.42
5.78	38.07	HOT	48.00	-9.93


Line Conducted Emission Tabulated Data

Tested by: Sue-Yong, Lee / Test Engineer




Unknown document property name.

(1394 mode)

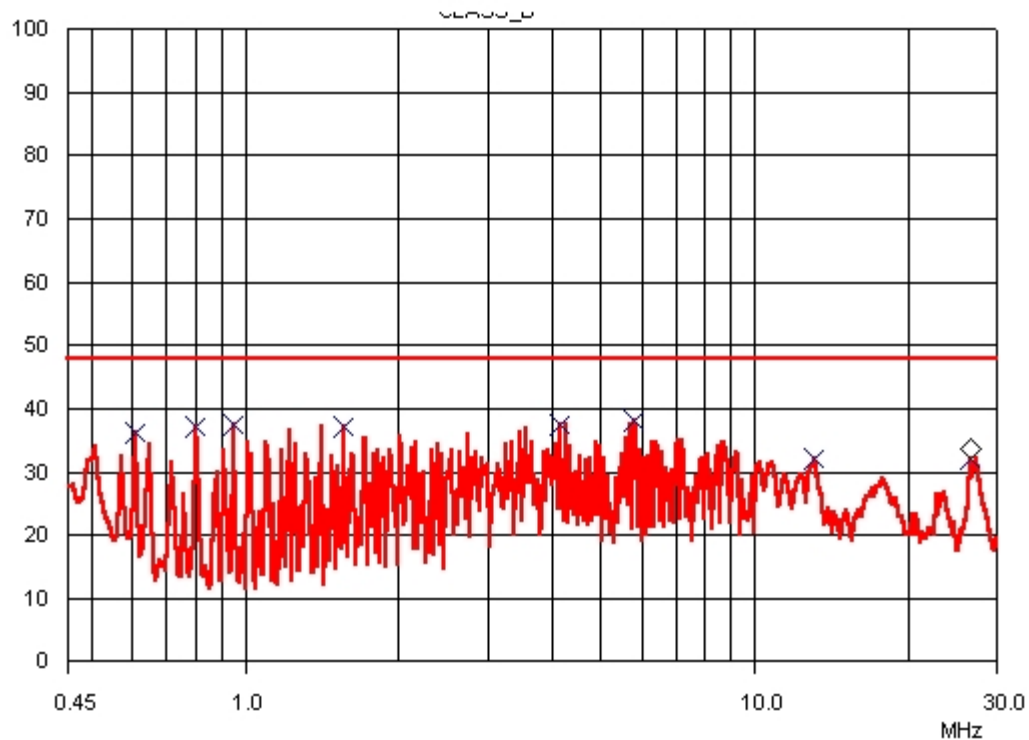

HOT LINE

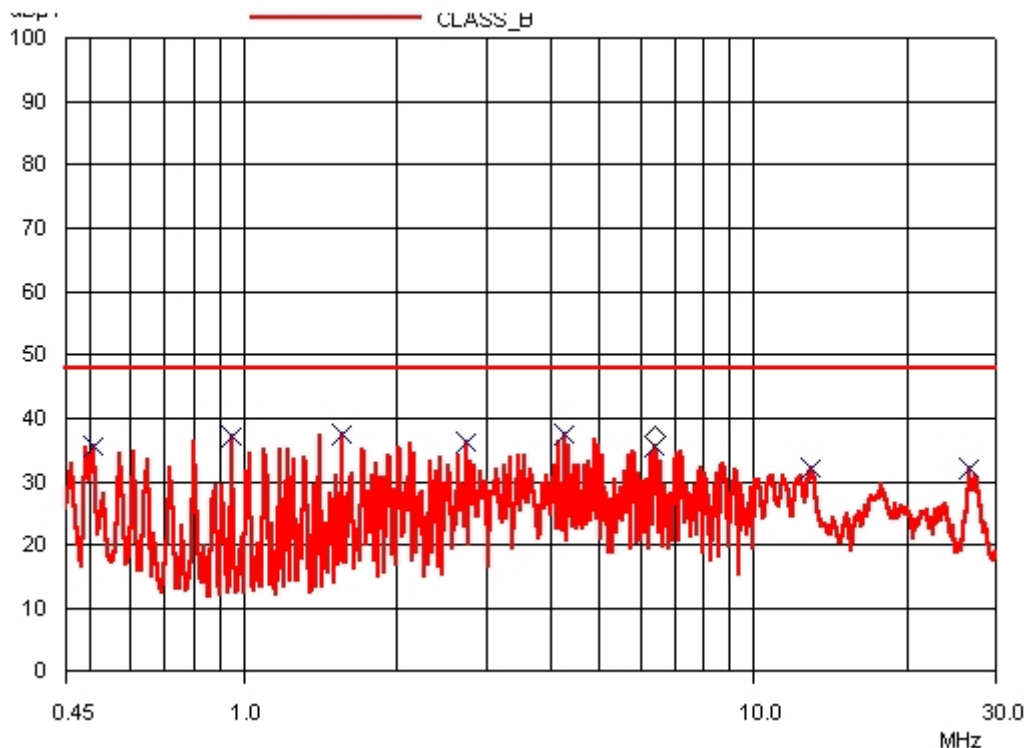

NEUTRAL LINE

This report shall not be reproduced except in full without our written approval.

FCC-003 (Rev.0)

HEAD OFFICE : #505 SK APT. Factory 223-28, Sangdaewon 1 Dong, Jungwon-Gu, Seongnam-City, Kyunggi-Do, 462-121, Korea
(TEL: +82-31-746-8500, FAX: +82-31-746-8700)

EMC Testing Dept : 426-1 Daeangyong-Ri ChongMyun-Kwangju-City, Kyunggi-Do 464-860 Korea (TEL: +82-31-765-8288, FAX: +82-31-766-2904)

Unknown document property name.



Unknown document property name.

5.3 Radiated Emission Test (USB mode)

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 49 % Temperature : 17 °C
Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.109
Type of Test : CLASS B
Result : PASSED BY -2.20 dB at 786.80 MHz

EUT : MOBILE STORAGE Date: April 30, 2002
Operating Condition : Data were continuously read and written.
Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
Distance : 3 Meter

Radiated Emissions		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
60.01	21.80	H	9.95	0.98	32.73	40.00	-7.27
113.24	17.00	V	13.73	1.21	31.94	43.50	-11.56
120.01	16.00	V	13.19	1.23	30.42	43.50	-13.08
136.37	19.40	V	12.98	1.30	33.68	43.50	-9.82
149.96	10.70	V	13.92	1.35	25.97	43.50	-17.53
168.86	15.20	V	15.59	1.43	32.22	43.50	-11.28
180.00	17.00	V	16.33	1.45	34.78	43.50	-8.72
196.85	10.30	V	16.92	1.55	28.77	43.50	-14.73
330.60	18.50	H	15.18	2.18	35.86	46.00	-10.14
342.60	13.10	H	15.82	2.24	31.16	46.00	-14.84
360.40	13.40	H	15.76	2.33	31.49	46.00	-14.51
456.60	15.10	H	16.79	2.56	34.45	46.00	-11.55
704.80	13.40	H	20.99	3.34	37.73	46.00	-8.27
786.80	19.20	H	20.94	3.66	43.80	46.00	-2.20
885.20	12.30	H	22.52	3.90	38.72	46.00	-7.28
960.80	12.10	V	23.26	4.12	39.48	54.00	-14.52

Radiated Emissions Tabulated Data



Unknown document property name.

5.4 Radiated Emission Test (1394 mode)

The following table shows the highest levels of radiated emission on both polarizations of horizontal and vertical.

Humidity Level : 51 % Temperature : 19 °C
 Limits apply to : FCC CFR 47, PART 15, SUBPART B, SECTION 15.109
 Type of Test : CLASS B
 Result : PASSED BY -4.28 dB at 442.4 MHz

EUT : MOBILE STORAGE Date: May 11, 2002
 Operating Condition : Data were continuously read and written.
 Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)
 Distance : 3 Meter

Radiated Emissions		Ant	Correction Factors		Total	FCC CLASS B	
Freq. (MHz)	Amp. (dBuV)	Pol.	Ant. (dBuV/m)	Cable (dB)	Amp. (dBuV/m)	Limit (dBuV/m)	Margin (dB)
49.16	22.60	V	11.05	0.92	34.57	40.00	-5.43
73.70	11.60	V	7.19	1.00	19.79	40.00	-20.21
98.29	15.80	V	11.14	1.14	28.08	43.50	-15.42
122.89	13.80	V	13.29	1.24	28.33	43.50	-15.17
147.46	16.10	V	13.65	1.34	31.09	43.50	-12.41
172.01	10.20	V	15.79	1.43	27.42	43.50	-16.08
196.67	16.97	V	16.92	1.55	35.44	43.50	-8.06
245.00	16.80	H	11.65	1.80	30.25	46.00	-15.75
258.00	17.90	H	12.34	1.85	32.09	46.00	-13.91
270.20	13.70	V	13.06	1.88	28.64	46.00	-17.36
344.60	14.00	H	15.92	2.25	32.17	46.00	-13.83
393.80	19.90	H	15.58	2.42	37.90	46.00	-8.10
442.40	22.20	H	16.99	2.53	41.72	46.00	-4.28
492.00	15.50	V	17.50	2.65	35.65	46.00	-10.35
786.80	14.90	H	20.94	3.66	39.50	46.00	-6.50
984.00	13.40	V	23.99	4.18	41.57	54.00	-12.43

Radiated Emissions Tabulated Data



ONETECH

ONETECH Testing & Evaluation Lab.
Unknown document property name.

Page 16 of 13

FCC ID. : Error!

File No. : Error!

Unknown document property name.

1/1/0

Tested by: Sue-Yong, Lee / Test Engineer

Unknown document property name.

6. FIELD STRENGTH CALCULATION

Meter readings are compared to the specification limit correcting for antenna and cable losses

+ Meter reading (dBuV)

+ Cable Loss (dB)

+ Antenna Factor (Loss) (dB/meter)

= Corrected Reading (dBuV/meter)

- Specification Limit (dBuV/meter)

= dB Relative to Spec (+/- dB)



Unknown document property name.

7. LIST OF TEST EQUIPMENT

No.	EQUIPMENTS	MFR.	MODEL	SER. NO.	LAST CAL	DUE CAL	USE
1.	Test receiver	R/S	ESVS 10	827864/005	OCT/01	12MONTH	■
2.	Test receiver	R/S	ESHS 10	834467/007	APR/02	12MONTH	■
3.	Spectrum analyzer	HP	8568B	3109A05456	APR/02	12MONTH	■
4.	RF preselector	HP	85685A	3107A01264	APR/02	12MONTH	■
5.	Quasi-Peak Adapter	HP	85650A	3107A01542	APR/02	12MONTH	■
6.	Biconical antenna	EMCO	3104C	9109-4441 9109-4443 9109-4444	APR/02	12MONTH	■
7.	Log Periodic antenna	EMCO	3146	9109-3213 9109-3214 9109-3217	APR/02	12MONTH	■
8.	LISN	EMCO	3825/2	9109-1867 9109-1869	JUL/01	12MONTH	■
9.	Computer System	HP	98581C	98543A	N/A	N/A	■
	Hard disk drive		9153C	CMC762Z9153	N/A	N/A	■
10.	Position Controller	EMCO	1090	9107-1038	N/A	N/A	■
11.	Turn Table	EMCO	1080-1.21	9109-1576	N/A	N/A	■
12.	Antenna Master	EMCO	1070-1	9109-1624	N/A	N/A	■