



# FCC PART 15, SUBPART C IC RSS-247, ISSUE 1, MAY 2015

## TEST AND MEASUREMENT REPORT


For

### Vocera Communication, Inc.

525 Race Street,

San Jose, CA 95126, USA

**FCC ID: QGZB3000N  
IC: 4362A-B3000N**

<b>Report Type:</b> CIIPC Report	<b>Product Type:</b> Communication Badge
<b>Prepared By:</b> Jin Yang 	
<b>Report Number:</b> R1506221-247BT	
<b>Report Date:</b> 2015-07-30	
Simon Ma 	
<b>Reviewed By:</b> RF Lead	
Bay Area Compliance Laboratories Corp. 1274 Anvilwood Avenue, Sunnyvale, CA 94089, USA Tel: (408) 732-9162 Fax: (408) 732-9164	

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA\*, NIST, or any agency of the Federal Government.

\* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*” (b)(2)

## TABLE OF CONTENTS

<b>1 General Description.....</b>	<b>4</b>
1.1 Product Description for Equipment Under Test (EUT) .....	4
1.2 Mechanical Description of EUT .....	4
1.3 Objective.....	4
1.4 Related Submittal(s)/Grant(s) .....	4
1.5 Test Methodology .....	4
1.6 Measurement Uncertainty.....	4
1.7 Test Facility .....	5
<b>2 System Test Configuration.....</b>	<b>6</b>
2.1 Justification.....	6
2.2 EUT Exercise Software.....	6
2.3 Special Equipment .....	6
2.4 Equipment Modifications.....	6
2.5 Local Support Equipment .....	6
2.6 EUT Internal Configuration Details.....	6
<b>3 Summary of Test Results .....</b>	<b>7</b>
<b>4 FCC §15.247(i), §2.1093 &amp; IC RSS 102 - RF Exposure.....</b>	<b>8</b>
4.1 Applicable Standards .....	8
4.2 Test Result .....	8
<b>5 FCC §15.205, §15.209 &amp; §15.247(d) &amp; IC RSS-247 §5.5 – Spurious Radiated Emissions .....</b>	<b>9</b>
5.1 Applicable Standard.....	9
5.2 Test Setup .....	10
5.3 Test Procedure .....	10
5.4 Corrected Amplitude & Margin Calculation.....	11
5.5 Test Equipment List and Details .....	11
5.6 Test Environmental Conditions .....	12
5.7 Summary of Test Results.....	12
5.8 Radiated Emissions Test Results .....	13
<b>6 Exhibit A – FCC &amp; IC Equipment Labeling Requirements.....</b>	<b>18</b>
6.1 FCC ID Label Requirements .....	18
6.2 IC Label Requirements .....	18
6.3 FCC & IC Label Contents and Location.....	19
<b>7 Exhibit B – Test Setup Photographs .....</b>	<b>20</b>
7.1 Radiated Emission below 1 GHz Front View .....	20
7.2 Radiated Emission below 1 GHz Rear View .....	20
7.3 Radiated Emission above 1 GHz Front View .....	21
7.4 Radiated Emission above 1 GHz Rear View .....	21
<b>8 Exhibit C – EUT Photographs.....</b>	<b>22</b>
8.1 EUT - Front View .....	22
8.2 EUT - Rear View .....	22
8.3 EUT - Left View .....	23
8.4 EUT - Right View .....	23
8.5 EUT - Top View .....	24
8.6 EUT - Bottom View.....	24
8.7 EUT - Open Case View 1 .....	25
8.8 EUT - Open Case View 2 .....	25
8.9 EUT - Main Board Top View with shielding.....	26
8.10 EUT - Main Board Top View without shielding .....	26
8.11 EUT - Main Board Bottom View.....	27

## DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	R1506221-247BT	Initial	2015-07-30

## 1 General Description

---

### 1.1 Product Description for Equipment Under Test (EUT)

This test and measurement report was prepared on behalf of *Vocera Communication, Inc.*, and their product model: *B3000N*, FCC ID: *QGZB3000N*, IC: *4362A-B3000N* or the “EUT” as referred to in this report. The EUT is an 802.11 a/b/g/n + BT 2.0/3.0 communication badge.

### 1.2 Mechanical Description of EUT

The EUT measures approximately 9.8 cm (L) x 3.6 cm (W) x 1.8 cm (H) and weighs 54 g.

*The test data gathered are from typical production sample, serial number: 36 assigned by Client.*

### 1.3 Objective

This report is prepared on behalf of *Vocera Communication, Inc.* in accordance with Part 15, Subparts C of the Federal Communication Commission’s rules.

The objective is to determine compliance with FCC Part 15.247 rules and IC RSS-247 rules for Radiated Spurious Emissions.

### 1.4 Related Submittal(s)/Grant(s)

DTS and NII submissions with FCC ID: QGZB3000N and IC: 4362A-B3000N.

### 1.5 Test Methodology

All measurements contained in this report were conducted in accordance with ANSI C63.10-2013, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz and FCC KDB 558074 D01 DTS Meas Guidance v03r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

### 1.6 Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in the field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

The following calculation follows the procedures as set forth in clause 7.2.3, ETSI TR 100 028-1 V1.4.1 (2001-12), the expression of Uncertainty in Radiated RF Testing is in accordance to ISO/IEC 17025 and TR 100 028-1 V1.4.1 (2001-12).

The expanded Measurement Uncertainty value having a confidence factor of 95%, is within a range of 5.48 dB. This means that the value of conducted RF carrier power test will be within +/- 2.74 dB of the measuring radiated emissions power versus the expected value.

The expected value is defined as the power at the antenna of the Transmitter under Test.

## 1.7 Test Facility

Bay area compliance Laboratories Corp. (BACL) is:

1- An independent Commercial Test Laboratory accredited to **ISO 17025: 2005** by **A2LA**, in the fields of: Electromagnetic Compatibility & Telecommunications covering Emissions, Immunity, Radio, RF Exposure, Safety and Telecom. This includes NEBS (Network Equipment Building System), Wireless RF, Telecommunications Terminal Equipment (TTE); Network Equipment; Information Technology Equipment (ITE); Medical Electrical Equipment; Industrial, Commercial, and Medical Test Equipment; Professional Audio and Video Equipment; Electronic (Digital) Products; Industrial and Scientific Instruments; Cabled Distribution Systems and Energy Efficiency Lighting.

2- An ENERGY STAR Recognized Laboratory, for the LM80 Testing, a wide variety of Luminaires and Computers.

3- A NIST Designated Phase-I and Phase-II CAB including: ACMA (Australian Communication and Media Authority), BSMI (Bureau of Standards, Metrology and Inspection of Taiwan), IDA (Infocomm Development Authority of Singapore), IC(Industry Canada), Korea ( Ministry of Communications Radio Research Laboratory), NCC (Formerly DGT; Directorate General of Telecommunication of Chinese Taipei) OFTA (Office of the Telecommunications Authority of Hong Kong), Vietnam, VCCI - Voluntary Control Council for Interference of Japan and a designated EU CAB (Conformity Assessment Body) (Notified Body) for the EMC and R&TTE Directives.

4- A Product Certification Body accredited to **ISO Guide 65: 1996** by **A2LA** to certify:

1- Unlicensed, Licensed radio frequency devices and Telephone Terminal Equipment for the FCC. Scope A1, A2, A3, A4, B1, B2, B3, B4 & C.

2. Radio Standards Specifications (RSS) in the Category I Equipment Standards List and All Broadcasting Technical Standards (BETS) in Category I Equipment Standards List for Industry Canada.

3. Radio Communication Equipment for Singapore.

4. Radio Equipment Specifications, GMDSS Marine Radio Equipment Specifications, and Fixed Network Equipment Specifications for Hong Kong.

5. Japan MIC Telecommunication Business Law (A1, A2) and Radio Law (B1, B2 and B3).

6. Audio/Video, Battery Charging Systems, Computers, Displays, Enterprise Servers, Imaging Equipment, Set-Top Boxes, Telephony, Televisions, Ceiling Fans, CFLs (Including GU24s),Decorative Light Strings, Integral LED Lamps, Luminaires, Residential Ventilating Fans.

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2009, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: A-0027. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is an American Association for Laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

<http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionid=8430d44f1f47cf2996124343c704b367816b>

## **2 System Test Configuration**

---

### **2.1 Justification**

The EUT was configured for testing according to ANSI C63.10-2013 and FCC KDB 558074 D01 DTS Meas Guidance v03r02.

The EUT was tested in a testing mode to represent worst-case results during the final qualification test.

The worst-case data rates are determined to be as follows for each mode based upon investigation by measuring the average power, peak power and PSD across all data rates bandwidths, and modulations.

### **2.2 EUT Exercise Software**

Testing firmware version: 4.0.1.35, provided by *Vocera Communication, Inc.*, and was verified by Jin Yang to comply with the standard requirements being tested against.

### **2.3 Special Equipment**

There were no special accessories were required, included, or intended for use with EUT during these tests.

### **2.4 Equipment Modifications**

No modifications were made to the EUT.

### **2.5 Local Support Equipment**

N/A

### **2.6 EUT Internal Configuration Details**

Manufacturer	Description	Model	Serial Number
Vocera	PCB Board	211-01770E	-

### 3 Summary of Test Results

Results reported relate only to the product tested.

FCC § IC	Description of Test	Results
FCC §2.1093, §15.247(i) IC RSS-102	RF Exposure	Compliant
FCC §15.205, §15.209, §15.247(d) IC RSS-247 §5.5	Radiated Spurious Emissions	Compliant

---

## **4 FCC §15.247(i), §2.1093 & IC RSS 102 - RF Exposure**

---

### **4.1 Applicable Standards**

FCC §2.1093, §15.247(i)  
IC RSS-102

### **4.2 Test Result**

Compliance, please refer to the SAR report.

## 5 FCC §15.205, §15.209 & §15.247(d) & IC RSS-247 §5.5 – Spurious Radiated Emissions

### 5.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz.

As per FCC §15.209(a) and RSS-Gen: Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

\*\* Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As Per FCC §15.205(a) and RSS-Gen, except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	960 – 1240	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	1300 – 1427	5.35 – 5.46
2.1735 – 2.2105	25.5 – 25.67	1435 – 1626.5	7.25 – 7.75
4.125 – 4.128	37.5 – 38.25	1645.5 – 1646.5	8.025 – 8.5
4.17725 – 4.17775	73 – 74.6	1660 – 1710	9.0 – 9.2
4.20725 – 4.20775	74.8 – 75.2	1718.8 – 1722.2	9.3 – 9.5
6.215 – 6.218	108 – 121.94	2200 – 2300	10.6 – 12.7
6.26775 – 6.26825	123 – 138	2310 – 2390	13.25 – 13.4
6.31175 – 6.31225	149.9 – 150.05	2483.5 – 2500	14.47 – 14.5
8.291 – 8.294	156.52475 – 156.52525	2690 – 2900	15.35 – 16.2
8.362 – 8.366	156.7 – 156.9	3260 – 3267	17.7 – 21.4
8.37625 – 8.38675	162.0125 – 167.17	3.332 – 3.339	22.01 – 23.12
8.41425 – 8.41475	167.72 – 173.2	3.3458 – 3.358	23.6 – 24.0
12.29 – 12.293	240 – 285	3.600 – 4.400	31.2 – 31.8
12.51975 – 12.52025	322 – 335.4		36.43 – 36.5
12.57675 – 12.57725	399.9 – 410		Above 38.6
13.36 – 13.41	608 – 614		

As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

As per IC RSS-247 §5.5 Unwanted Emissions, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of root-mean-square averaging over a time interval, as permitted under Section 5.4(4), the attenuation required shall be 30 dB instead of 20 dB. Attenuation below the general field strength limits specified in RSS-Gen is not required.

## 5.2 Test Setup

The radiated emissions tests were performed in the 5-meter Chamber, using the setup in accordance with ANSI C63.10-2013. The specification used was the FCC 15 Subpart C and IC RSS-247 limits.

The spacing between the peripherals was 10 centimeters.

External I/O cables were draped along the edge of the test table and bundle when necessary.

## 5.3 Test Procedure

The measurements are base on FCC KDB 558074 D01 DTS Meas Guidance v03r02: Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 section 11: Emissions in non-restricted frequency bands and section 12: Emissions in restricted frequency bands.

For the radiated emissions test, the EUT host, and all support equipment power cords was connected to the AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

For below 1GHz, the EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 0.8 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical. For above 1GHz, the EUT is set 3 meter away from the testing antenna, which is varied from 1-4 meter, and the EUT is placed on a turntable, which is 1.5 meter above ground plane, the table shall be rotated for 360 degrees to find out the highest emission. The receiving antenna should be changed the polarization both of horizontal and vertical. The spectrum analyzer or receiver is set as:

Below 1000 MHz:

RBW = 100 kHz / VBW = 300 kHz / Sweep = Auto

Above 1000 MHz:

- (1) Peak: RBW = 1MHz / VBW = 3MHz / Sweep = Auto
- (2) Average: RBW = 1MHz / VBW = 10Hz / Sweep = Auto

## 5.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude (CA) is calculated by adding the Antenna Factor (AF), the Cable Loss (CL), the Attenuator Factor (Atten) and subtracting the Amplifier Gain (Ga) to indicated Amplitude (Ai) reading. The basic equation is as follows:

$$CA = Ai + AF + CL + Atten - Ga$$

For example, a corrected amplitude of 40.3 dBuV/m = Indicated Reading (32.5 dBuV) + Antenna Factor (+23.5dB) + Cable Loss (3.7 dB) + Attenuator (10 dB) - Amplifier Gain (29.4 dB)

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corrected Amplitude} - \text{Limit}$$

## 5.5 Test Equipment List and Details

Manufacturer	Description	Model No.	Serial No.	Calibration Date	Calibration Interval
Sunol Science Corp	System Controller	SC99V	122303-1	N/R	N/R
Sunol Science Corp	Combination Antenna	JB3	A020106-3	2014-09-17	1 year
HP/Agilent	Pre-amplifier	8449B	3008A0113	2015-05-19	1 year
Hewlett Packard	Pre-amplifier	8447D	2944A06639	2015-03-20	1 year
Agilent	Spectrum Analyzer	E4446A	US44300386	2014-09-03	1 year
EMCO	Horn Antenna	3115	9511-4627	2015-01-15	1 year
Rohde & Schwarz	EMI Test Receiver	ESCI 1166.5950K03	100337	2015-03-28	1 year
IW Microwave	High Frequency Cable	DC-1438	SPS-2303-3840-SPS	2014-09-23	1 year
Hewlett-Packard	5 ft N-type cable	-	1268	2014-07-24	1 year
-	SMA cable	-	C0002	Each time <sup>1</sup>	N/A

Note<sup>1</sup>: cable and attenuator included in the test set-up will be checked each time before testing.

**Statement of Traceability:** *BACL attests that all calibrations have been performed per the A2LA requirements, traceable to NIST.*

## 5.6 Test Environmental Conditions

Temperature:	22 ° C
Relative Humidity:	52 %
ATM Pressure:	101.9 kPa

The testing was performed by Jin Yang on 2015-06-25 in 5 m chamber 3.

## 5.7 Summary of Test Results

According to the data hereinafter, the EUT complied with FCC Title 47, Part 15C and IC RSS-247 standard's radiated emissions limits, and had the worst margin of:


### 30 MHz – 25 GHz:

Mode: Transmitting			
Margin (dB)	Frequency (MHz)	Polarization (Horizontal/Vertical)	Channel
-0.63	7206	Horizontal	Low CH

Please refer to the following table and plots for specific test result details

## 5.8 Radiated Emissions Test Results

### 1) 30 MHz – 1 GHz 2.4GHz BT, Measured at 3 meters

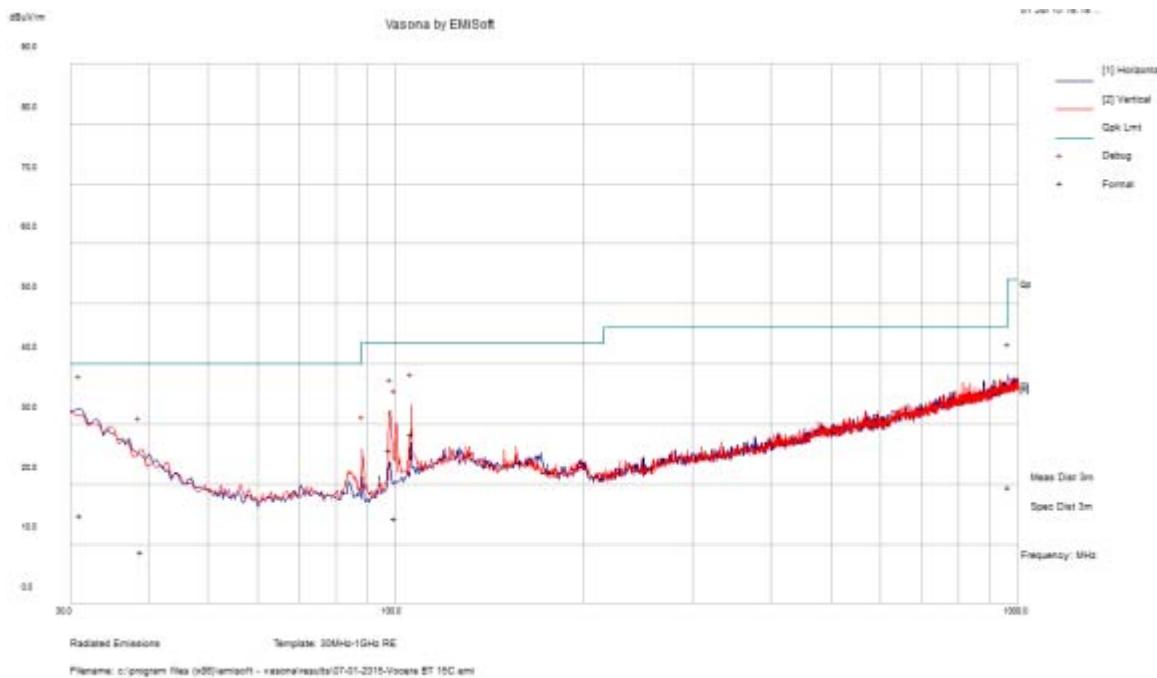

2.4 GHz Band, Quasi-Peak Measurements @ 3m, worst case

Frequency (MHz)	Corrected Amplitude (dB $\mu$ V/m)	Antenna Height (cm)	Antenna Polarity (H/V)	Turntable Azimuth (degrees)	Limit (dB $\mu$ V/m)	Margin (dB)
105.6948	28.32	104	V	52	43.5	-15.18
97.747	25.73	221	V	3	43.5	-17.77
31.115	14.82	240	H	17	40	-25.18
99.64875	14.23	236	V	230	43.5	-29.27
38.945	8.72	101	V	277	40	-31.28
963.3233	19.46	235	H	170	54	-34.54

Note: The worst case result was reported.

## 2) 1-25 GHz for 2.4 GHz BT, Measured at 3 meters

## Basic Mode

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB $\mu$ V/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB $\mu$ V/m)	Margin (dB)	
Low Channel 2402 MHz, measured at 3 meters											
2402	58.96	5	177	V	28.38	3.23	-	90.57	-	-	Peak
2402	71.2	201	187	H	28.388	3.23	-	102.818	-	-	Peak
2402	48.99	5	177	V	28.38	3.23	-	80.6	-	-	Ave
2402	58.16	201	187	H	28.388	3.23	-	89.778	-	-	Ave
2390	28.74	5	177	V	28.38	3.23	-	60.35	74	-13.65	Peak
2390	29.04	201	187	H	28.388	3.23	-	60.658	74	-13.342	Peak
2390	14.39	5	177	V	28.38	3.23	-	46	54	-8	Ave
2390	14.42	201	187	H	28.388	3.23	-	46.038	54	-7.962	Ave
4804	51.64	252	156	V	32.808	5.41	33.08	56.778	74	-17.222	Peak
4804	51.3	236	197	H	32.846	5.41	33.08	56.476	74	-17.524	Peak
4804	42.833	252	156	V	32.808	5.41	33.08	47.971	54	-6.029	Ave
4804	41.67	236	197	H	32.846	5.41	33.08	46.846	54	-7.154	Ave
7206	49.47	260	100	V	35.836	6.92	32.83	59.396	74	-14.604	Peak
7206	49.28	48	227	H	35.808	6.92	32.83	59.178	74	-14.822	Peak
7206	39.53	260	100	V	35.836	6.92	32.83	49.456	54	-4.544	Ave
7206	39.16	48	227	H	35.808	6.92	32.83	49.058	54	-4.942	Ave
9608	48.15	0	100	V	37.854	9.84	32.01	63.834	70.57	-6.736	Peak
9608	48.48	0	100	H	37.858	9.84	32.01	64.168	82.818	-18.65	Peak
9608	32.72	0	100	V	37.854	9.84	32.01	48.404	50.6	-2.196	Ave
9608	33.14	0	100	H	37.858	9.84	32.01	48.828	59.778	-10.95	Ave
Middle Channel 2441 MHz, measured at 3 meters											
2441	64.49	115	122	V	28.38	3.23	-	96.1	-	-	Peak
2441	71.63	17	162	H	28.388	3.23	-	103.248	-	-	Peak
2441	53.14	115	122	V	28.38	3.23	-	84.75	-	-	Ave
2441	59.19	17	162	H	28.388	3.23	-	90.808	-	-	Ave
4882	50.68	289	100	V	33.132	5.24	33.17	55.88	74	-18.12	Peak
4882	51.67	40	103	H	33.107	5.24	33.17	56.85	74	-17.15	Peak
4882	41.41	289	100	V	33.132	5.24	33.17	46.61	54	-7.39	Ave
4882	43.16	40	103	H	33.107	5.24	33.17	48.34	54	-5.66	Ave
7323	46.99	270	221	V	36.222	7.39	32.83	57.77	74	-16.23	Peak
7323	48.19	344	106	H	36.246	7.39	32.83	59.00	74	-15.00	Peak
7323	33.06	270	221	V	36.222	7.39	32.83	43.84	54	-10.16	Ave
7323	37.08	344	106	H	36.246	7.39	32.83	47.89	54	-6.11	Ave
9764	47.50	0	100	V	37.852	9.31	31.88	62.78	76.1	-13.32	Peak
9764	47.36	0	100	H	37.843	9.31	31.88	62.63	83.248	-20.62	Peak
9764	32.78	0	100	V	37.852	9.31	31.88	48.06	54.75	-6.69	Ave
9764	33.15	0	100	H	37.843	9.31	31.88	48.42	60.808	-12.39	Ave

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB $\mu$ V/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB $\mu$ V/m)	Margin (dB)	
High Channel 2480 MHz, measured at 3 meters											
2480	62.13	349	231	V	28.55	3.26	-	93.94	-	-	Peak
2480	71.75	206	141	H	28.595	3.26	-	103.605	-	-	Peak
2480	50.93	349	231	V	28.55	3.26	-	82.74	-	-	Ave
2480	59.04	206	141	H	28.595	3.26	-	90.895	-	-	Ave
2483.5	28.06	349	231	V	28.55	3.26	-	59.87	74	-14.13	Peak
2483.5	28.57	206	141	H	28.595	3.26	-	60.425	74	-13.575	Peak
2483.5	14.04	349	231	V	28.55	3.26	-	45.85	54	-8.15	Ave
2483.5	14.17	206	141	H	28.595	3.26	-	46.025	54	-7.975	Ave
4960	49.73	270	209	V	33.132	5.24	33.1	55.00	74	-19.00	Peak
4960	50.68	8	121	H	33.107	5.24	33.1	55.93	74	-18.07	Peak
4960	39.52	270	209	V	33.132	5.24	33.1	44.79	54	-9.21	Ave
4960	41.37	8	121	H	33.107	5.24	33.1	46.62	54	-7.38	Ave
7440	47.33	266	100	V	36.449	7.46	32.8	58.44	74	-15.56	Peak
7440	47.57	42	224	H	36.447	7.46	32.8	58.68	74	-15.32	Peak
7440	35.03	266	100	V	36.449	7.46	32.8	46.14	54	-7.86	Ave
7440	35.43	42	224	H	36.447	7.46	32.8	46.54	54	-7.46	Ave
9920	46.80	0	100	V	38.34	9.11	31.88	62.37	73.94	-11.57	Peak
9920	47.00	0	100	H	38.333	9.11	31.88	62.56	83.605	-21.04	Peak
9920	32.03	0	100	V	38.34	9.11	31.88	47.60	52.74	-5.14	Ave
9920	32.28	0	100	H	38.333	9.11	31.88	47.84	60.895	-13.05	Ave

## EDR Mode

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB $\mu$ V/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB $\mu$ V/m)	Margin (dB)	
Low Channel 2402 MHz, measured at 3 meters											
2402	67.01	76	100	V	28.38	3.23	-	98.62	-	-	Peak
2402	73.39	152	152	H	28.388	3.23	-	105.008	-	-	Peak
2402	56.71	76	100	V	28.38	3.23	-	88.32	-	-	Ave
2402	61.83	152	152	H	28.388	3.23	-	93.448	-	-	Ave
2390	27.34	76	100	V	28.38	3.23	-	58.95	74	-15.05	Peak
2390	28.98	152	152	H	28.388	3.23	-	60.598	74	-13.402	Peak
2390	14.98	76	100	V	28.38	3.23	-	46.59	54	-7.41	Ave
2390	14.98	152	152	H	28.388	3.23	-	46.598	54	-7.402	Ave
4804	54.06	111	131	V	32.808	5.41	33.08	59.20	74	-14.80	Peak
4804	55.01	39	100	H	32.846	5.41	33.08	60.19	74	-13.81	Peak
4804	45.98	111	131	V	32.808	5.41	33.08	51.12	54	-2.88	Ave
4804	47.04	39	100	H	32.846	5.41	33.08	52.22	54	-1.78	Ave
7206	49.90	283	155	V	35.836	6.92	32.83	59.83	74	-14.17	Peak
7206	51.79	330	100	H	35.808	6.92	32.83	61.69	74	-12.31	Peak
7206	40.31	283	155	V	35.836	6.92	32.83	50.24	54	-3.76	Ave
7206	43.47	330	100	H	35.808	6.92	32.83	53.37	54	-0.63	Ave
9608	47.99	0	100	V	37.854	9.84	32.01	63.67	78.62	-14.95	Peak
9608	48.28	0	100	H	37.858	9.84	32.01	63.97	85.008	-21.04	Peak
9608	33.20	0	100	V	37.854	9.84	32.01	48.88	58.32	-9.44	Ave
9608	33.44	0	100	H	37.858	9.84	32.01	49.13	63.448	-14.32	Ave
Middle Channel 2441 MHz, measured at 3 meters											
2441	66.08	107	100	V	28.38	3.23	-	97.69	-	-	Peak
2441	73.65	17	133	H	28.388	3.23	-	105.268	-	-	Peak
2441	56.29	107	100	V	28.38	3.23	-	87.9	-	-	Ave
2441	62.14	17	133	H	28.388	3.23	-	93.758	-	-	Ave
4882	52.95	282	100	V	33.132	5.24	33.17	58.15	74	-15.85	Peak
4882	53.39	347	132	H	33.107	5.24	33.17	58.57	74	-15.43	Peak
4882	44.74	282	100	V	33.132	5.24	33.17	49.94	54	-4.06	Ave
4882	45.73	347	132	H	33.107	5.24	33.17	50.91	54	-3.09	Ave
7323	48.89	94	164	V	36.222	7.39	32.83	59.67	74	-14.33	Peak
7323	49.03	332	100	H	36.246	7.39	32.83	59.84	74	-14.16	Peak
7323	37.77	94	164	V	36.222	7.39	32.83	48.55	54	-5.45	Ave
7323	39.39	332	100	H	36.246	7.39	32.83	50.20	54	-3.80	Ave
9764	47.85	0	100	V	37.852	9.31	31.88	63.13	77.69	-14.56	Peak
9764	47.12	0	100	H	37.843	9.31	31.88	62.39	85.268	-22.88	Peak
9764	32.20	0	100	V	37.852	9.31	31.88	47.48	57.9	-10.42	Ave
9764	32.97	0	100	H	37.843	9.31	31.88	48.24	63.758	-15.52	Ave

Frequency (MHz)	S.A. Reading (dB $\mu$ V)	Turntable Azimuth (degrees)	Test Antenna			Cable Loss (dB)	Pre-Amp. (dB)	Cord. Reading (dB $\mu$ V/m)	FCC/IC		Comments
			Height (cm)	Polarity (H/V)	Factor (dB/m)				Limit (dB $\mu$ V/m)	Margin (dB)	
High Channel 2480 MHz, measured at 3 meters											
2480	65.6	61	103	V	28.55	3.26	-	97.41	-	-	Peak
2480	73.27	30	116	H	28.595	3.26	-	105.125	-	-	Peak
2480	55.26	61	103	V	28.55	3.26	-	87.07	-	-	Ave
2480	61.799	30	116	H	28.595	3.26	-	93.654	-	-	Ave
2483.5	28.71	61	103	V	28.55	3.26	-	60.52	74	-13.48	Peak
2483.5	28.88	30	116	H	28.595	3.26	-	60.735	74	-13.265	Peak
2483.5	14.58	61	103	V	28.55	3.26	-	46.39	54	-7.61	Ave
2483.5	15.271	30	116	H	28.595	3.26	-	47.126	54	-6.874	Ave
4960	51.42	116	135	V	33.132	5.24	33.1	56.69	74	-17.31	Peak
4960	52.80	42	123	H	33.107	5.24	33.1	58.05	74	-15.95	Peak
4960	42.81	116	135	V	33.132	5.24	33.1	48.08	54	-5.92	Ave
4960	44.26	42	123	H	33.107	5.24	33.1	49.51	54	-4.49	Ave
7440	48.57	67	212	V	36.449	7.46	32.8	59.68	74	-14.32	Peak
7440	49.11	343	100	H	36.447	7.46	32.8	60.22	74	-13.78	Peak
7440	37.62	67	212	V	36.449	7.46	32.8	48.73	54	-5.27	Ave
7440	38.96	343	100	H	36.447	7.46	32.8	50.07	54	-3.93	Ave
9920	47.17	0	100	V	38.34	9.11	31.88	62.74	77.41	-14.67	Peak
9920	46.79	0	100	H	38.333	9.11	31.88	62.35	85.125	-22.77	Peak
9920	32.06	0	100	V	38.34	9.11	31.88	47.63	57.07	-9.44	Ave
9920	33.12	0	100	H	38.333	9.11	31.88	48.68	63.654	-14.97	Ave