

Shezhen YouJin Electronic Co., Ltd

2.4G Wireless Video Intercom Doorbell

Model Number: 823B/C

Prepared for : Shezhen YouJin Electronic Co., Ltd
6F ZhenXing Industrial Building Mei Hua Road No 159, Fu
Tian District

Prepared By : Audix Technology (Shenzhen) Co., Ltd.
No. 6, Ke Feng Rd., 52 Block,
Shenzhen Science & Industrial Park,
Nantou, Shenzhen, Guangdong, China

Tel: (0755) 26639496

Report Number : ACS-F05274
Date of Test : Aug.20~30, 2005
Date of Report : Sep.05, 2005

TABLE OF CONTENTS

Description	Page
Test Report Declaration	
1. GENERAL INFORMATION	1-1
1.1. Description of Device (EUT)	1-1
1.2. Test Facility	1-2
1.3. Measurement Uncertainty	1-2
2. POWER LINE CONDUCTED EMISSION TEST	2-1
3. RADIATED EMISSION TEST	3-1
3.1. Test Equipment.....	3-1
3.2. Block Diagram of Test Setup	3-1
3.3. Radiated Emission Limit 30~1000MHz Standard: FCC 15.249	3-2
3.4. EUT Configuration on Test	3-3
3.5. Operating Condition of EUT	3-3
3.6. Test Procedure	3-3
3.7. Radiated Emission Test Results	3-4
4. BANDWIDTH TEST	4-20
4.1. Test Equipment.....	4-20
4.2. Test Standard	4-20
4.3. Bandwidth Limit.....	4-20
4.4. Test Procedure	4-20
5. DEVIATION TO TEST SPECIFICATIONS	5-1
6. PHOTOGRAPH.....	6-1
6.1. Photos of Radiated Emission Test (In Anechoic Chamber).....	6-1
6.2. Photos of Bandwidth Test	6-2

APPENDIX I	(7 pages)
APPENDIX II	(13 pages)

TEST REPORT DECLARATION

Applicant : Shezhen YouJin Electronic Co., Ltd
 Manufacturer : Shezhen YouJin Electronic Co., Ltd
 EUT Description : 2.4G Wireless Video Intercom Doorbell
 (A) MODEL NO. : 823B/C
 (B) SERIAL NO. : F2005090501
 (C) POWER SUPPLY : Battery DC 9V

Test Procedure Used:

FCC Rules and Regulations Part 15 Subpart C June.2005

The device described above is tested by Audix Technology (Shenzhen) Co., Ltd. to determine the maximum emission levels emanating from the device. The maximum emission levels are compared to the FCC Part 15 Subpart C limits for radiated and conducted emissions. The test results are contained in this test report and Audix Technology (Shenzhen) Co., Ltd. is assumed full responsibility for the accuracy and completeness of tests. Also, this report shows that EUT is technically compliant with FCC requirements.

This report applies to above tested sample only. This report shall not be reproduced in part without written approval of Audix Technology (Shenzhen) Co., Ltd.
 This report must not be used by the applicant to claim product endorsement by NVLAP or any agency of the U.S. Government.

Date of Test : Aug.20~30, 2005

Prepared by :

Annie Wu

Annie Wu / Assistant

Reviewer :

Lake Wang

Lake Wang / Supervisor



Approved & Authorized Signer :

Name of the Representative of the Responsible Party : _____

Signature : _____

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

Description : 2.4G Wireless Video Intercom Doorbell

Model Number : 823B/C

Applicant : Shenzhen YouJin Electronic Co., Ltd
6F ZhenXing Industrial Building Mei Hua Road No 159, Fu
Tian District

Manufacturer : Shenzhen YouJin Electronic Co., Ltd
6F ZhenXing Industrial Building Mei Hua Road No 159, Fu
Tian District

Date of Test : Aug.20~30, 2005

1.2. Test Facility

Site Description

3m Anechoic Chamber	: Certificated by FCC, USA Registration Number: 90454 Aug. 15, 2003
3m & 10m Anechoic Chamber	: Certificated by FCC, USA Registration Number: 794232 Mar. 15, 2004
EMC Lab.	: Certificated by DATech, German Registration Number: DAT-P-091/99-01 Feb. 02, 2004
	Certificated by NVLAP, USA NVLAP Code: 200372-0 Mar. 31, 2004
	Certificated by Nemko, Norway Aut. No.: ELA135 April. 22, 2004
	Certificated by Industry Canada Registration Number: IC 5183 Jul. 28, 2004
Name of Firm	: Audix Technology (Shenzhen) Co., Ltd.
Site Location	: No. 6, Ke Feng Rd., 52 Block, Shenzhen Science & Industrial Park, Nantou, Shenzhen, Guangdong, China

1.3. Measurement Uncertainty

No.	Item	Uncertainty	Remark
1.	Uncertainty for Conducted Emission Test	1.22dB	
2.	Uncertainty for Radiated Emission Test	3.14dB	3m Chamber
3.	Uncertainty for Radiated Emission Test	3.18dB	10m Chamber
4.	Uncertainty for Power Clamp Test	1.38dB	

2. POWER LINE CONDUCTED EMISSION TEST

According to Paragraph (f) of FCC Part 15 section 15.249, Tests to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

3. RADIATED EMISSION TEST

3.1. Test Equipment

The following test equipments are used during the radiated emission Test :

3.1.1. For Anechoic Chamber

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	EMI Spectrum	HP	85422E	3625A00181	May 16, 05	1 Year
2.	Test Receiver	Rohde & Schwarz	ESVS20	830350/005	May 16, 05	1 Year
3.	Amplifier	HP	8447D	2944A07794	Mar.15, 05	1/2 Year
4.	Bilog Antenna	Schaffner	CBL6111C	2598	Jan. 12, 05	1 Year
5.	PC	N/A	586ATX3	N/A	N/A	N/A
6.	Printer	HP	Laserjet6P	SGCF019673	N/A	N/A
7.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.1	Jul. 29, 05	1/2 Year
8.	RF Cable	MIYAZAKI	5D-2W	3# Chamber No.2	Jul. 29, 05	1/2 Year
9.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.3	Jul. 29, 05	1/2 Year
10.	RF Cable	FUJIKURA	RG-55/U	3# Chamber No.4	Jul. 29, 05	1/2 Year
11.	Coaxial Switch	Anritsu	MP59B	M73989	Jul. 29, 05	1/2 Year

3.2. Block Diagram of Test Setup


3.2.1. Block Diagram of connection between EUT and simulators



(EUT: 2.4G Wireless Video Intercom Doorbell)

3.2.2. Anechoic Chamber Setup Diagram

ANTENNA TOWER

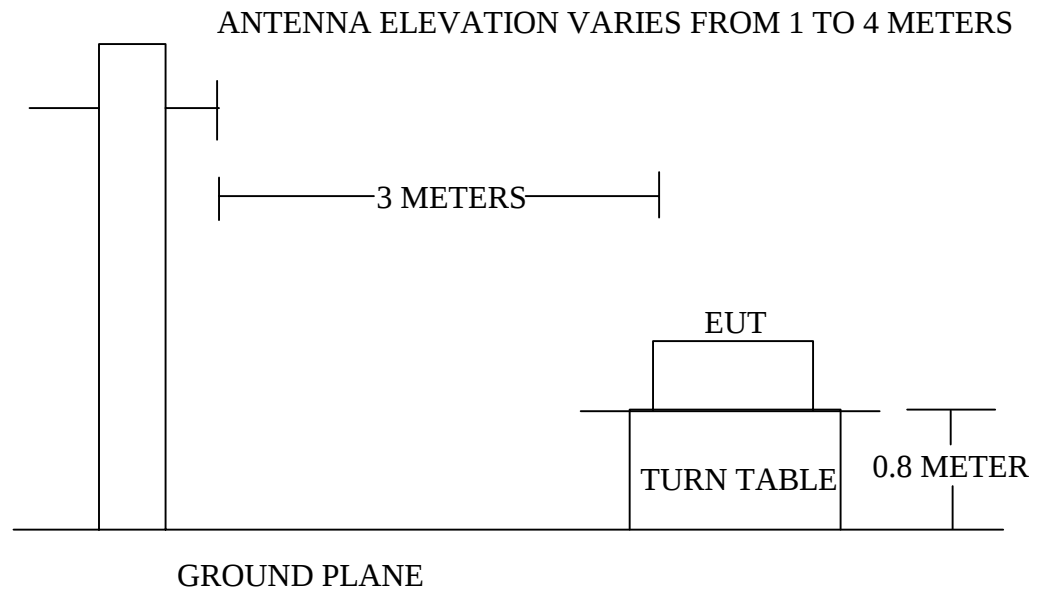

3.3. Radiated Emission Limit 30~1000MHz Standard: FCC 15.249

FREQUENCY MHz	DISTANCE Meters	FIELD STRENGTHS LIMIT	
		$\mu\text{V}/\text{m}$	$\text{dB}(\mu\text{V})/\text{m}$
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Local Oscillator:	3	94.0 $\text{dB}(\mu\text{V})/\text{m}$	
Above 1000	3	Other: 74.0 $\text{dB}(\mu\text{V})/\text{m}$ (Peak) 54.0 $\text{dB}(\mu\text{V})/\text{m}$ (Average)	

- Remark :
- (1) Emission level $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V}/\text{m}$
 - (2) The smaller limit shall apply at the cross point between two frequency bands.
 - (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

3.4. EUT Configuration on Test

The following equipment are installed on Radiated Emission Test to meet the commission requirements and operating regulations in a manner which tends to maximize its emission characteristics in normal application.

3.4.1. 2.4G Wireless Video Intercom Doorbell (EUT)

Model Number	:	823B/C
Serial Number	:	F2005090501
Manufacturer	:	Shezhen YouJin Electronic Co., Ltd

3.5. Operating Condition of EUT

3.5.1. Setup the EUT as shown in Section 3.2..

3.5.2. Let the EUT work in test modes (TX) and test it.

3.6. Test Procedure

The EUT and its simulators are placed on a turn table, which is 0.8 meter high above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna, which is mounted on a antenna tower. The antenna can be moved up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated bilog antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on Test. In order to find the maximum emission levels, all of the interface cables must be manipulated according to ANSI C63.4-2001 on radiated emission Test.

The bandwidth of the EMI test receiver (R&S ESVS20) is set at 120KHz for frequency range from 30MHz to 1000 MHz.

The bandwidth of the VBW is set at 300KHz and RBW is set at 120KHz for measurement below 1GHz.

The frequency range from 30MHz to 1000MHz and above 1000MHz are checked.

The test modes (TX(Lowest Frequency)/TX(Middle Frequency)/TX(Highest Frequency)) is tested in Anechoic Chamber and all the scanning waveforms are attached in Appendix II.

3.7. Radiated Emission Test Results

PASS.

The frequency range from 30MHz to 1000MHz is investigated.
Please see the following pages.

Date of Test :	Aug.30, 2005	Temperature :	23.8°C
EUT :	2.4G Wireless Video Intercom Doorbell	Humidity :	56%
Model No. :	823B/C	Test Mode :	TX
Test Engineer:	Victor		

Frequency	Antenna Factor	Cable Loss	Meter Reading	Emission Level	Over Limits	Limits
MHz	dB/m	dB	Horizontal dBμV	Horizontal dBμV/m	dB	dBμV/m
516.940	18.18	5.42	2.31	25.91	-20.09	46.00

Remark: 1. All readings are Quasi-Peak values.

2. Emission Level = Antenna Factor + Cable Loss + Meter Reading

3. The worst emission was detected at 516.940MHz with corrected signal level of 25.91dBμV/m (Limit is 46.00dBμV/m) when the antenna was at horizontal polarization and at 1.5m high and the turn table was at 0° .

4. 0° was the table front facing the antenna. Degree is calculated from 0° clockwise facing the antenna.

Reviewer :

Lake Wang

Date of Test :	Aug.23, 2005	Temperature :	23°C
EUT :	2.4G Wireless Video Intercom Doorbell	Humidity :	54%
Model No. :	823B/C	Test Mode :	TX
Test Engineer:	Victor		


Frequency	Probe Factor	Cable Loss	Meter Reading Vertical	Emission Level Vertical	Over Limits	Limits	Remark
MHz	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
12282.000	39.44	11.66	49.97	64.77	-9.23	74.00	Peak

Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading +Cable Loss
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Frequency	Probe Factor	Cable Loss	Meter Reading Vertical	Emission Level Vertical	Over Limits	Limits	Remark
MHz	dB/m	dB	dBμV	dBμV/m	dBμV/m	dBμV/m	
12282.000	39.44	11.66	0.67	46.77	-7.23	54.00	Average

Remark: 1. All readings are Average and Peak values.
 2. Emission Level = Antenna Factor + Meter Reading +Cable Loss
 3. The bandwidth of the VBW is set at 1MHz and RBW is set at 1MHz for measurement above 1GHz.

Reviewer :

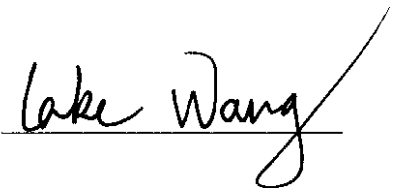




AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park
Tel: 0755-26639495~7
Fax: 0755-26632877

Data#: 4

File#: YOU JIN.EMI

Date: 2005-08-30 Time: 21:14:43

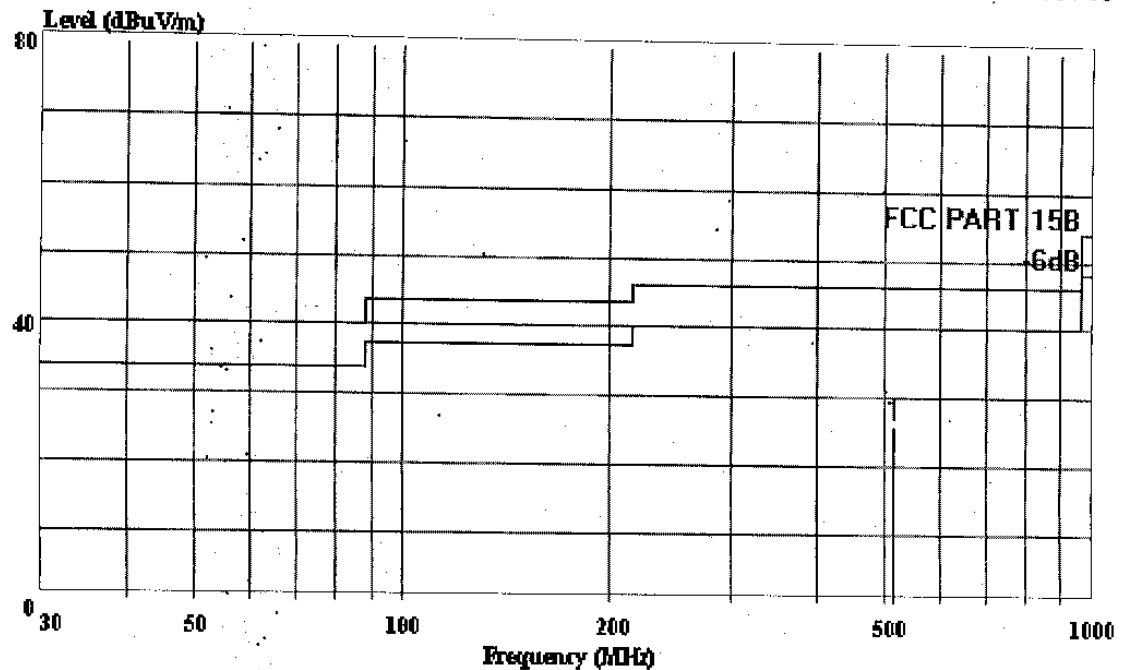

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
OP Condition : TX
Test Spec : Battery DC 9V
Test Engineer: VICTOR
Comment : Temp:23.8'C Humi:57%
Memo : AntPos:1.5m TablePos:0'

Page: 1

	Freq	Level	Over	Limit	Read	Probe	Cable
	MHz	dBuV/m	Limit	Line	Level	Factor	Loss
			dB	dBuV/m	dBuV	dB	dB
1	516.940	25.91	-20.09	46.00	2.31	18.18	5.42



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.


Shenzhen Science & Ind. Park

Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 3 File#: YOU JIN.EMI

Date: 2005-08-30 Time: 21:14:16

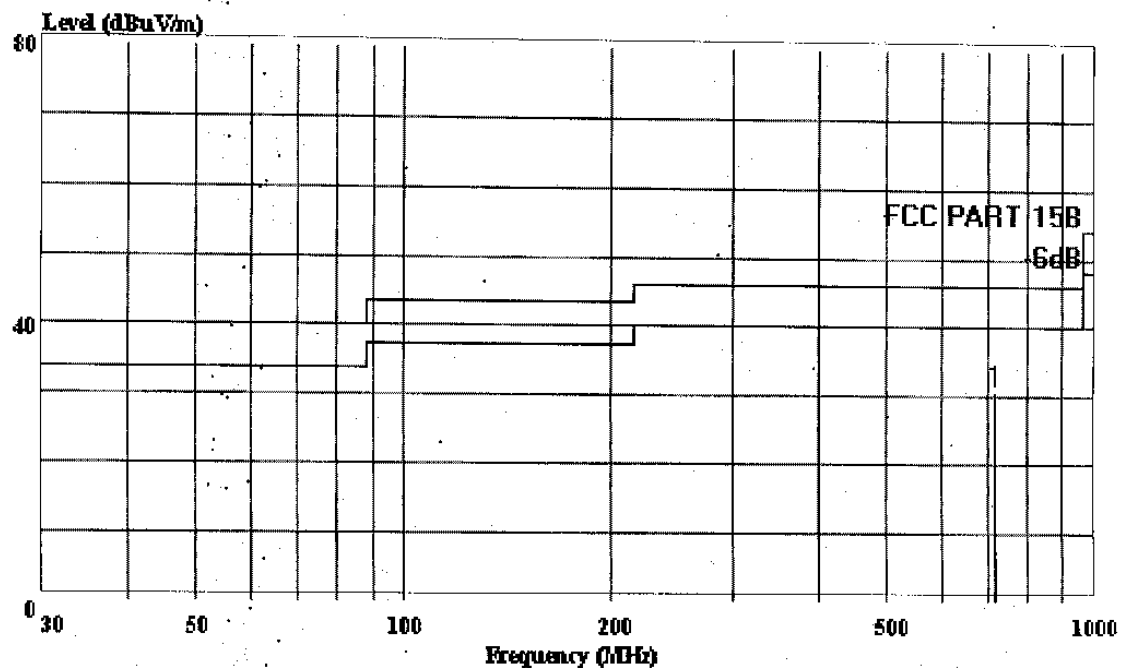

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4G Wireless Video Intercom Doorbell
 M/N : 823B/C
 OP Condition : TX
 Test Spec : Battery DC 9V
 Test Engineer: VICTOR
 Comment : Temp:23.8'C Humi:57%
 Memo : AntPos:1.1m TablePos:0'

Page: 1

Freq	Level	Over	Limit	Read	Probe	Cable	
MHz	dBuV/m	Limit	Line	Level	Factor	Loss	
		dB	dBuV/m	dBuV	dB	dB	
1	715.790	30.91	-15.09	46.00	3.41	21.16	6.34




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 9 File#: C:\EMI TEST DATA\Y\youjin.EMI

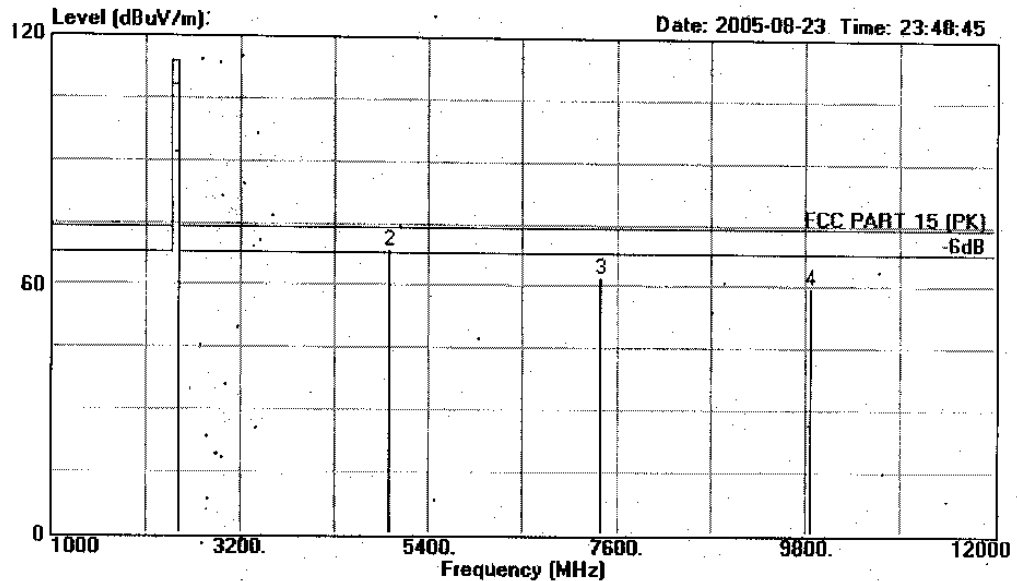

Site : 1# Chamber
Condition : FCC PART 15 (PK) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
Power : Battery DC9V
Test Engineer : SAM
Memo : Temp:23°C Humi:54%
TX

		Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2467.800	87.74	-26.26	114.00	52.30	6.29	29.15 Peak
2	4935.600	68.94	-5.06	74.00	24.87	9.82	34.25 Peak
3	7403.400	62.18	-11.82	74.00	13.64	10.88	37.66 Peak
4	9871.200	59.64	-14.36	74.00	10.16	11.55	37.93 Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel:+86-755-26639496 Fax:+86-755-26632877

Data#: 13 File#: C:\EMI TEST DATA\Y\youjin.EMI

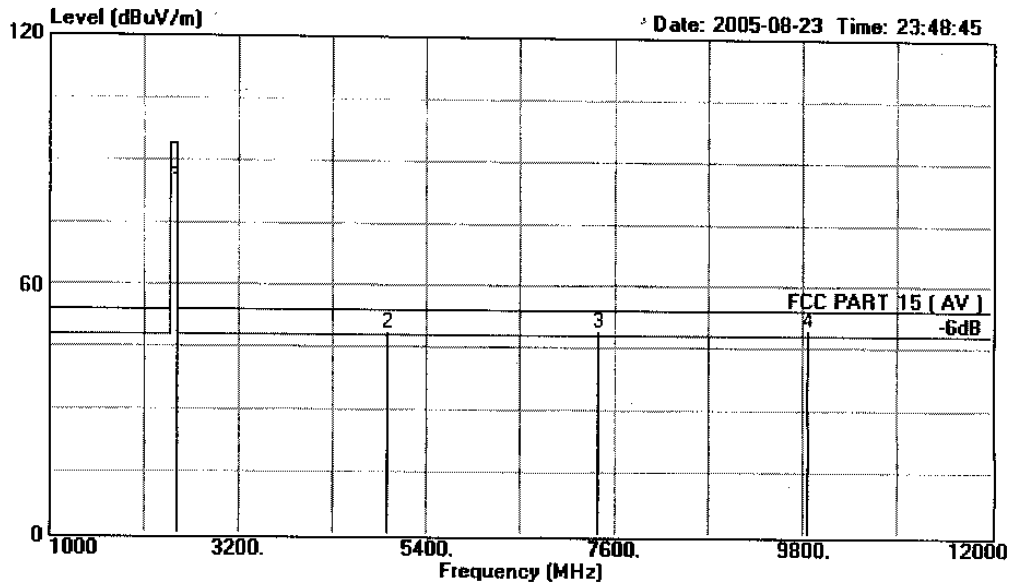

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
Power : Battery DC9V
Test Engineer : SAM
Memo : Temp:23'C Humi:54%
: TX

			Over	Limit	Read	Cable	Probe	
	Freq	Level	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2467.800	82.74	-11.26	94.00	47.30	6.29	29.15	Average
2	4935.600	48.94	-5.06	54.00	4.87	9.82	34.25	Average
3	7403.400	49.18	-4.82	54.00	0.64	10.88	37.66	Average
4	9871.200	49.64	-4.36	54.00	0.16	11.55	37.93	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 7 File#: C:\EMI TEST DATA\Y\youjin.EMI

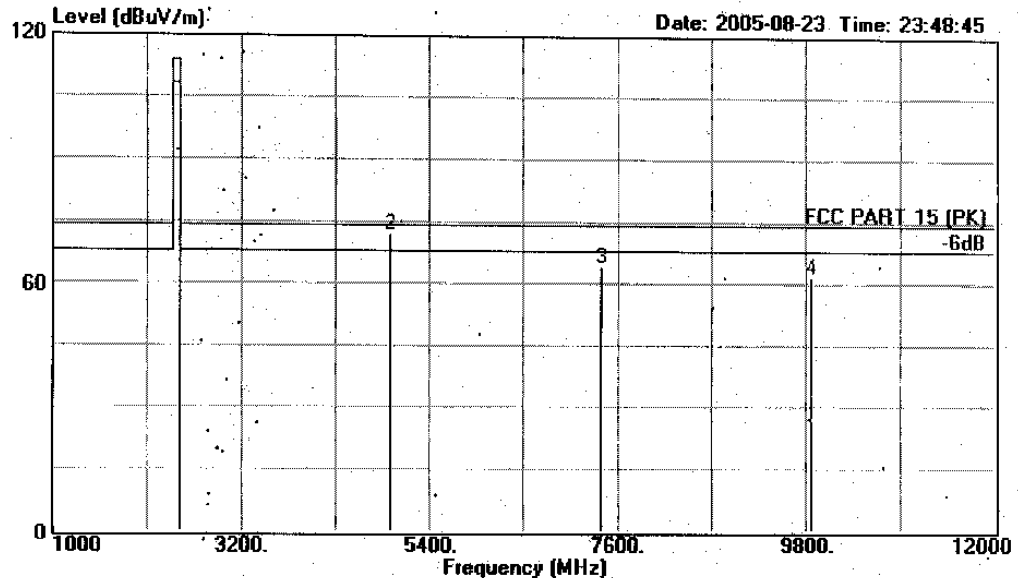

Site : 1# Chamber
Condition : FCC PART 15 (PK) 3m 3115 FACTOR VERTICAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
Power : Battery DC9V
Test Engineer : SAM
Memo : Temp:23°C Humi:54%
TX

			Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor	Remark	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB		
1	2467.800	87.74	-26.26	114.00	52.30	6.29	29.15	Peak
2	4935.600	71.94	-2.06	74.00	27.87	9.82	34.25	Peak
3	7403.400	64.18	-9.82	74.00	15.64	10.88	37.66	Peak
4	9871.200	61.64	-12.36	74.00	12.16	11.55	37.93	Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 11 File#: C:\EMI TEST DATA\Y\youjin.EMI

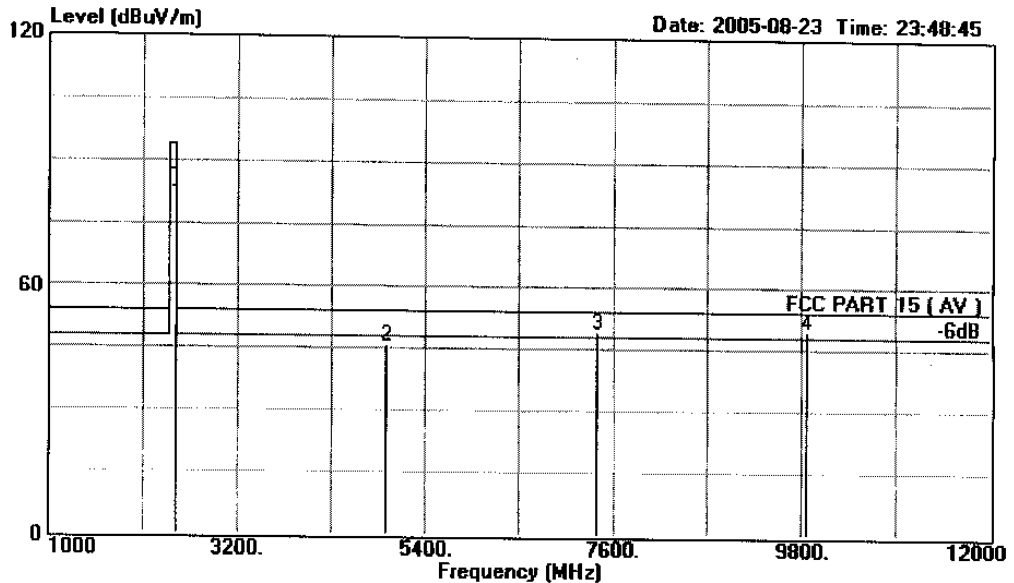

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 3115 FACTOR VERTICAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
Power : Battery DC9V
Test Engineer : SAM
Memo : Temp:23'C Humi:54%
.: TX

	Freq	Level	Over	Limit	Read	Cable	Probe	
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Remark
			dB	dBuV/m	dBuV	dB	dB	
1	2467.800	79.74	-14.26	94.00	44.30	6.29	29.15	Average
2	4935.600	45.94	-8.06	54.00	1.87	9.82	34.25	Average
3	7403.400	49.18	-4.82	54.00	0.64	10.88	37.66	Average
4	9871.200	49.64	-4.36	54.00	0.16	11.55	37.93	Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 10 File#: C:\EMI TEST DATA\Y\youjin.EMI

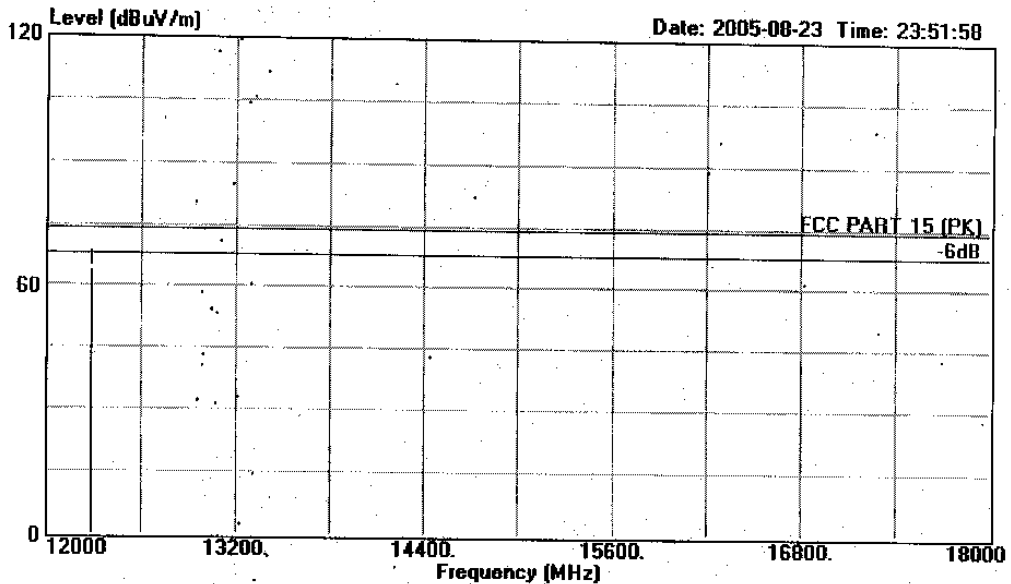

Site : 1# Chamber
Condition : FCC PART 15 (PK) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
Power : Battery DC9V
Test Engineer : S&M
Memo : Temp:23°C Humi:54%
: TX

	Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB
1 12282.000	63.77	-10.23	74.00	48.97	11.66	39.44 Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 14 File#: C:\EMI TEST DATA\Y\youjin.EMI

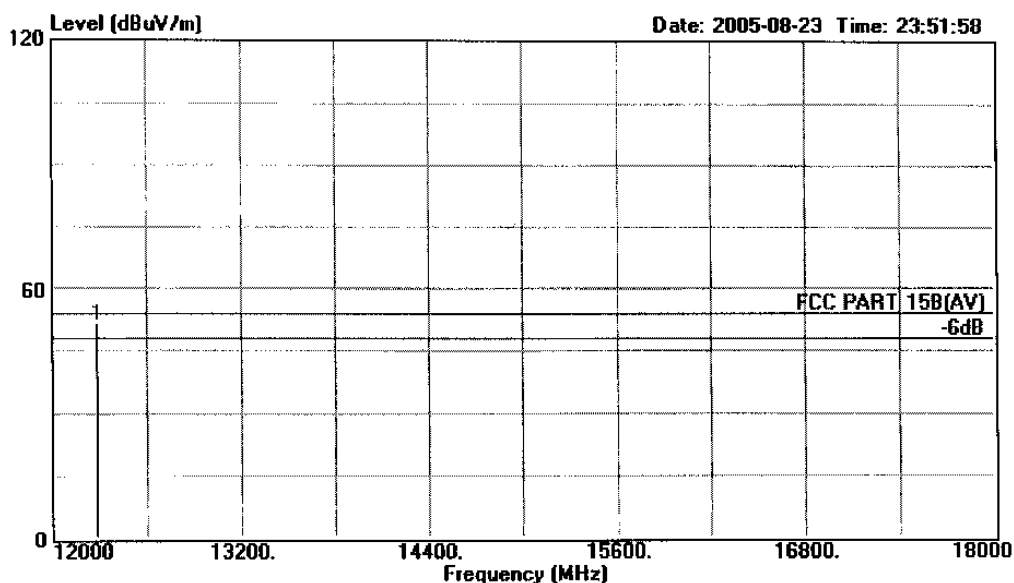

Site : 1# Chamber
Condition : FCC PART 15B(AV) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : B23B/C
Power : Battery DC9V
Test Engineer : SAM
Memo : Temp:23'C Humi:54%
 : TX

	Over	Limit	Read	Cable	Probe	
Freq	Level	Limit	Line	Level	Loss	Factor Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB
1 12282.000	51.77	-2.23	54.00	0.67	11.66	39.44 Average




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 8 File#: C:\EMI TEST DATA\Y\youjin.EMI

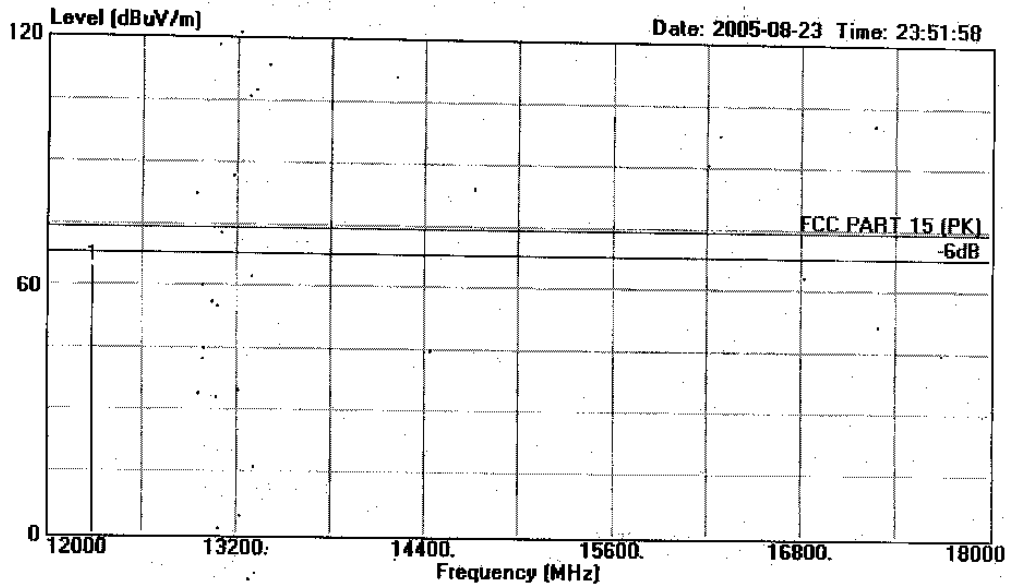

Site : 1# Chamber
Condition : FCC PART 15 (PK) 3m 3115 FACTOR VERTICAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
Power : Battery DC9V
Test Engineer : SAM
Memo : Temp:23°C Humi:54%
: TX

	Over	Limit	Read	Cable	Probe	
Freq. Level	Limit	Line	Level	Loss	Factor	Remark
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB
1 12282.000	64.77	-9.23	74.00	49.97	11.66	39.44 Peak




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 12 File#: C:\EMI TEST DATA\Y\youjin.EMI

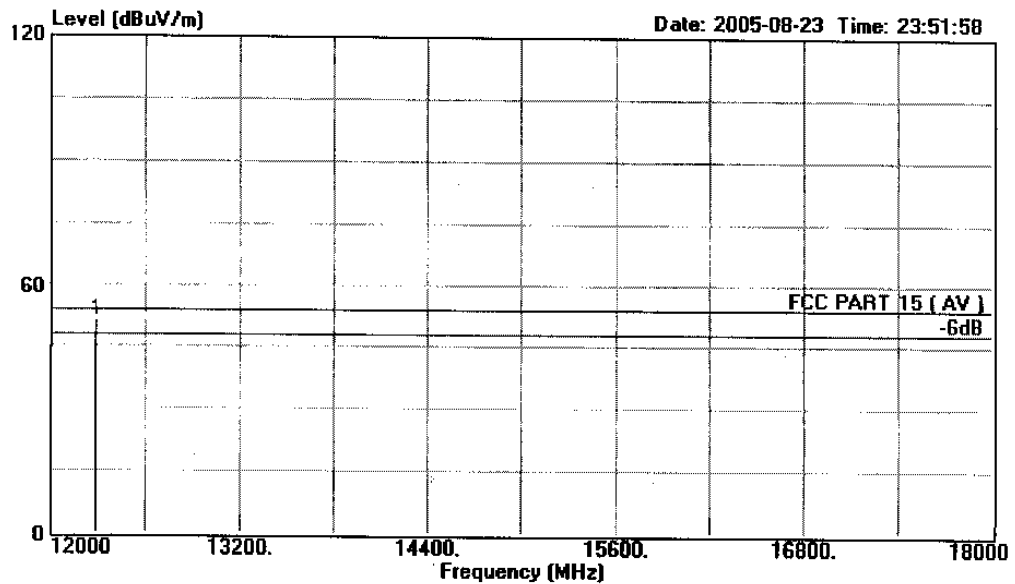

Site : 1# Chamber
Condition : FCC PART 15 (AV) 3m 311S FACTOR VERTICAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
Power : Battery DC9V
Test Engineer : SAM
Memo : Temp:23'C Humi:54%
TX

Freq	Level	Over	Limit	Read	Cable	Probe	Remark
		Limit	Line	Level	Loss	Factor	
MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1 12282.000	51.77	-2.23	54.00	0.67	11.66	39.44	Average

4. BANDWIDTH TEST

4.1. Test Equipment

The following test equipments are used during the bandwidth test:

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum	Agilent	E4407B	MY41440292	May 16, 05	1 Y
2.	Antenna	EMCO	3115	9607-4877	Jun 15, 04	1.5 Y

4.2. Test Standard

The test completeness FCC 15C (249).

4.3. Bandwidth Limit

The minimum 26dB bandwidth shall be at least 10KHz.


4.4. Test Procedure

AUDIX**信華科技(深圳)有限公司**

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 5 File#: C:\EMI TEST DATA\Y\youjin.EMI

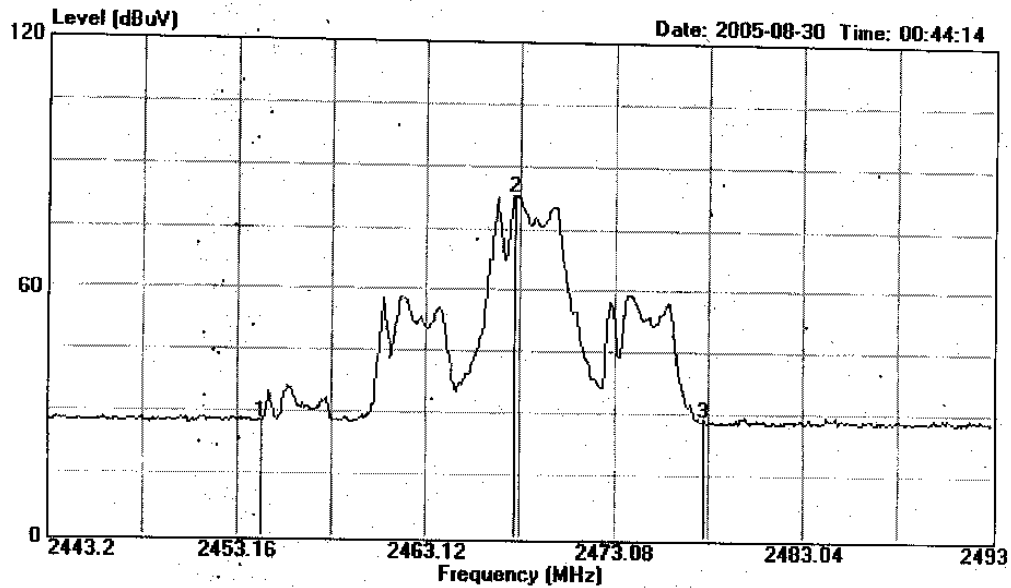

Site : 1# Chamber
Condition : 3115 FACTOR
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
Power : Battery DC 9V
Test Engineer : SAM
Memo : Temp:23°C Humi:54%
TX

			Over	Limit	Read	Cable	Probe	
	Freq	Level	Limit	Line	Level	Loss	Factor	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	
1	2454.400	27.77	-----	-----	27.77	0.00	0.00	Peak
2	2467.800	82.79	-----	-----	82.79	0.00	0.00	Peak
3	2477.800	28.61	-----	-----	28.61	0.00	0.00	Peak

5. DEVIATION TO TEST SPECIFICATIONS

[NONE]

APPENDIX I

AUDIX[®]

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park


Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 2

File#: YOU JIN.EMI

Date: 2005-08-20 Time: 00:08:19

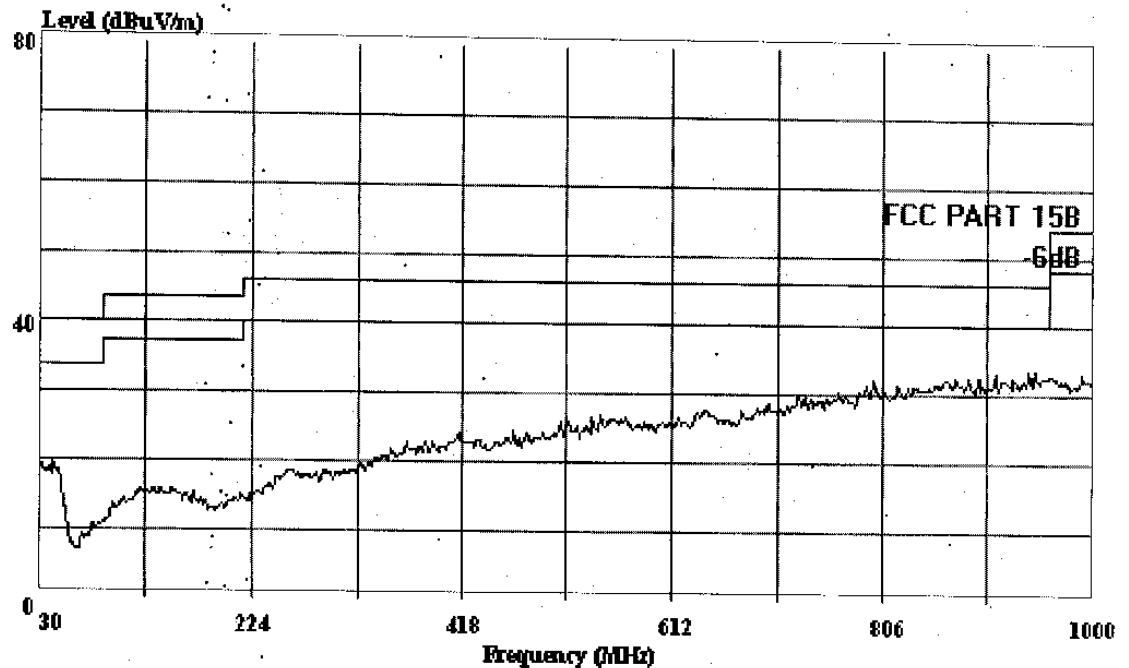

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR HORIZONTAL
 EUT : 2.4G Wireless Video Intercom Doorbell
 M/N : 823B/C
 OP Condition : TX
 Test Spec : Battery DC 9V
 Test Engineer: VICTOR
 Comment : Temp:23.8'C Humi:57%
 Memo :



AUDIX TECHNOLOGY (SHENZHEN) CO., LTD.

Shenzhen Science & Ind. Park


Tel: 0755-26639495~7

Fax: 0755-26632877

Data#: 1

File#: YOU JIN.EMI

Date: 2005-08-20 Time: 00:02:17

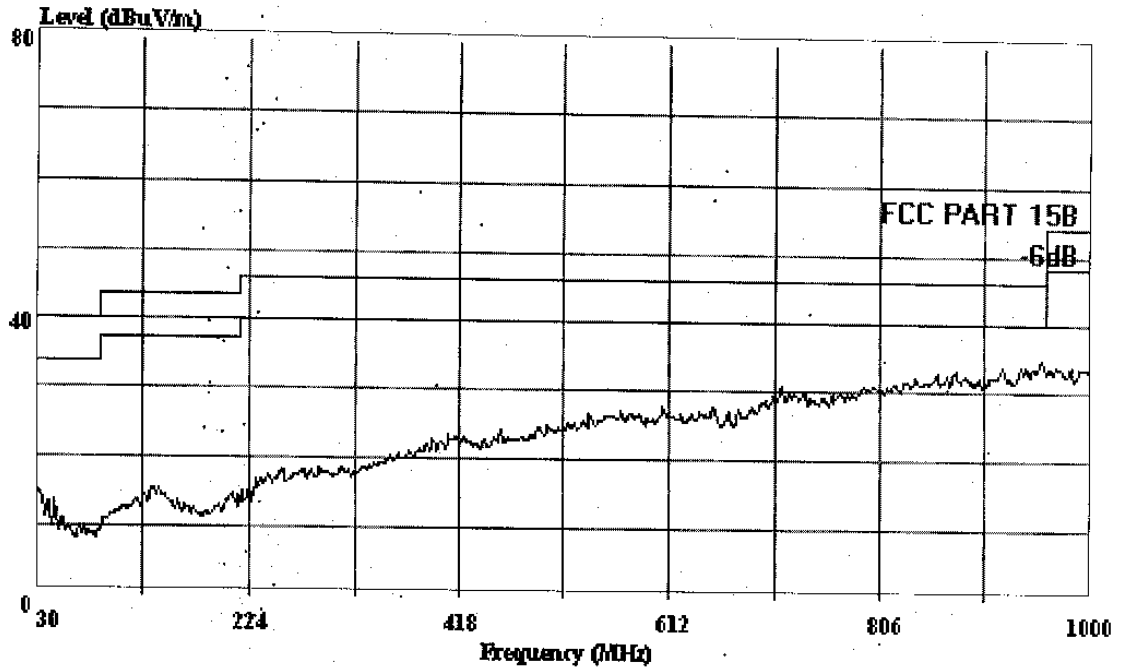

AUDIX TECHNOLOGY (SHENZHEN) CO., LTD. (3# Chamber)

Trace:

Ref Trace:

Condition: FCC PART 15B 3m 2598FACTOR VERTICAL
 EUT : 2.4G Wireless Video Intercom Doorbell
 M/N : 823B/C
 OP Condition : TX
 Test Spec : Battery DC 9V
 Test Engineer: VICTOR
 Comment : Temp:23.8'C Humi:57%
 Memo :




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 3 File#: C:\EMI TEST DATA\Y\youjin.EMI

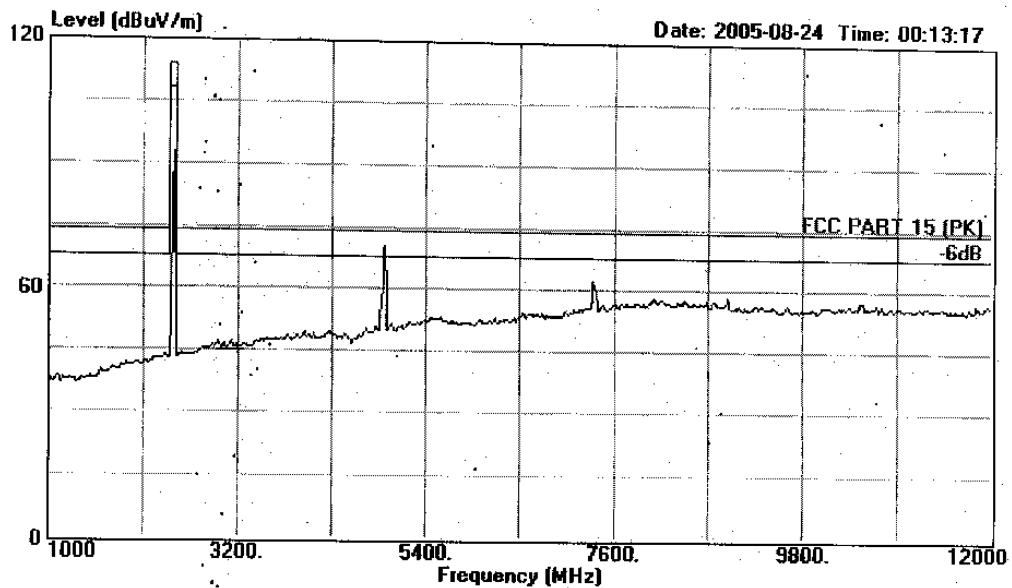

Site : 1# Chamber
Condition : FCC PART 15 (PK) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
Power : Battery DC9V
Test Engineer : SAM
Memo : Temp:23°C Humi:54%
: TX




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 1 File#: C:\EMI TEST DATA\Y\youjin.EMI

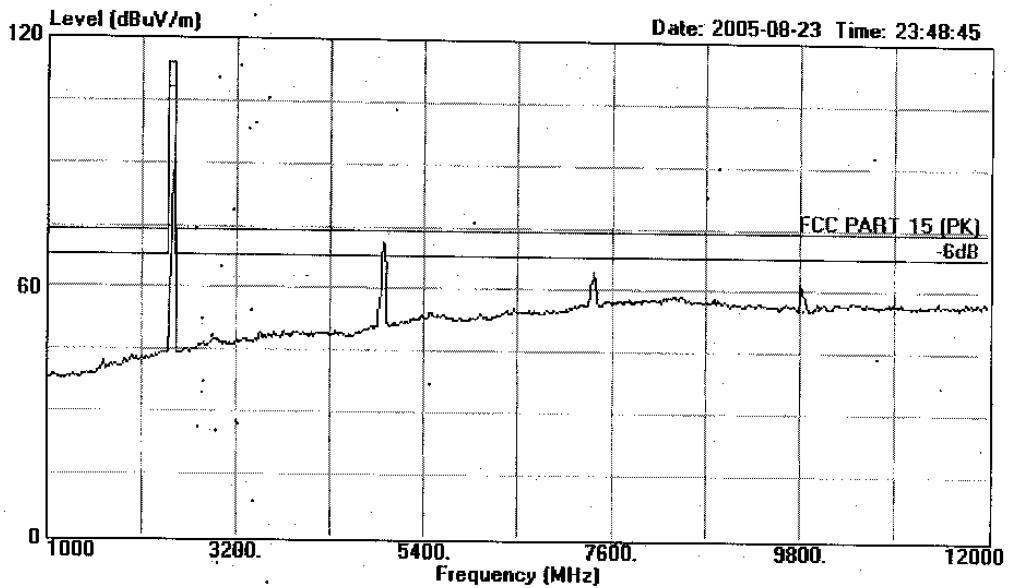

Site : 1# Chamber
Condition : FCC PART 15 (PK) 3m 3115 FACTOR VERTICAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
Power : Battery DC9V
Test Engineer : SAM
Memo : Temp:23'C Humi:54%
TX




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 4 File#: C:\EMI TEST DATA\Y\youjin.EMI

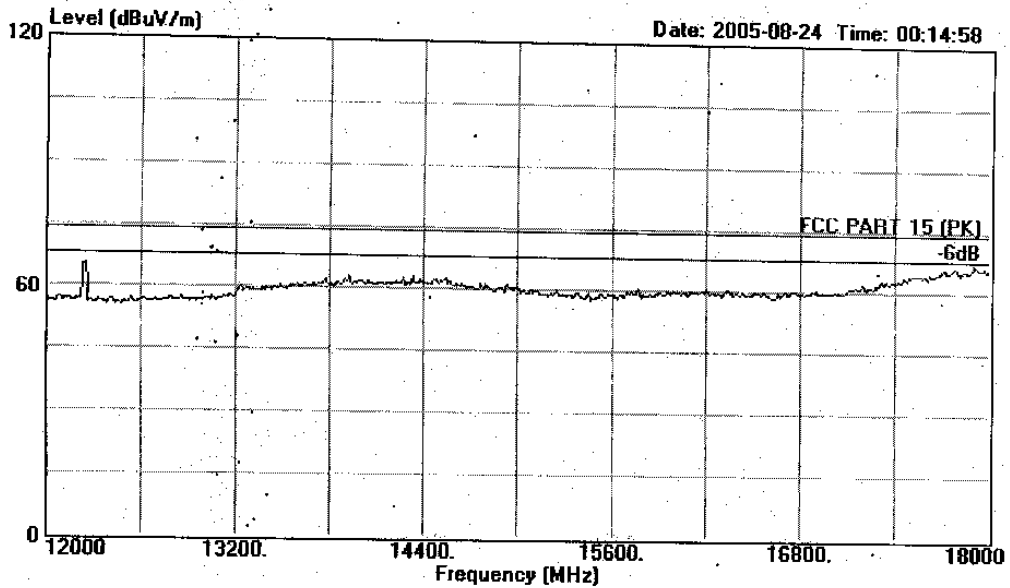

Site : 1# Chamber
Condition : FCC PART 15 (PK) 3m 3115 FACTOR HORIZONTAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
Power : Battery DC9V
Test Engineer : SAM
Memo : Temp:23'C Humi:54%
TX




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 2 File#: C:\EMI TEST DATA\Y\youjin.EMI

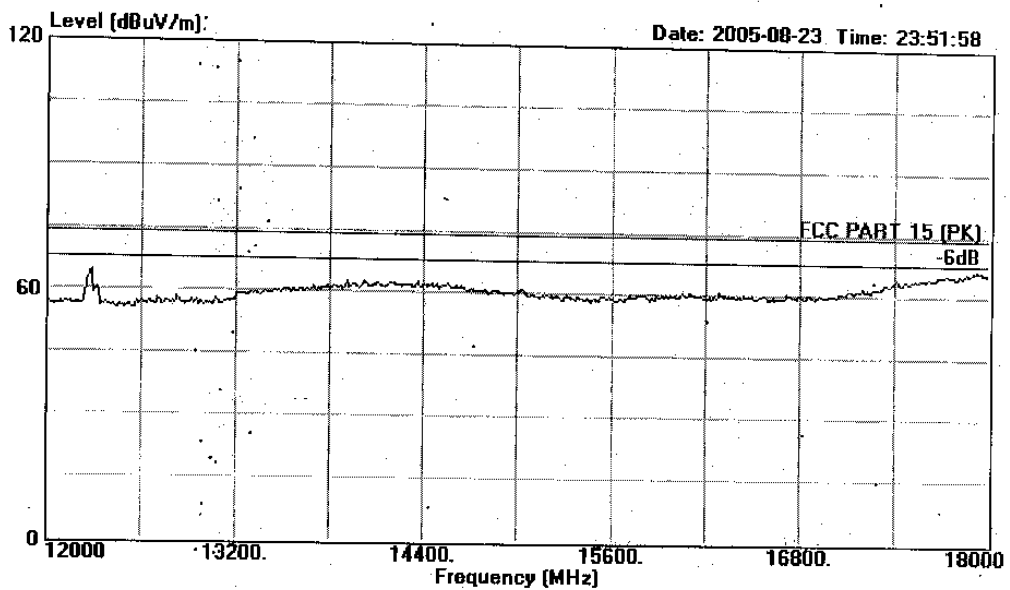

Site : 1# Chamber
Condition : FCC PART 15 (PK) 3m 3115 FACTOR VERTICAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
Power : Battery DC9V
Test Engineer : SAM
Memo : Temp:23°C Humi:54%
TX




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 15 File#: C:\EMI TEST DATA\Y\youjin.EMI

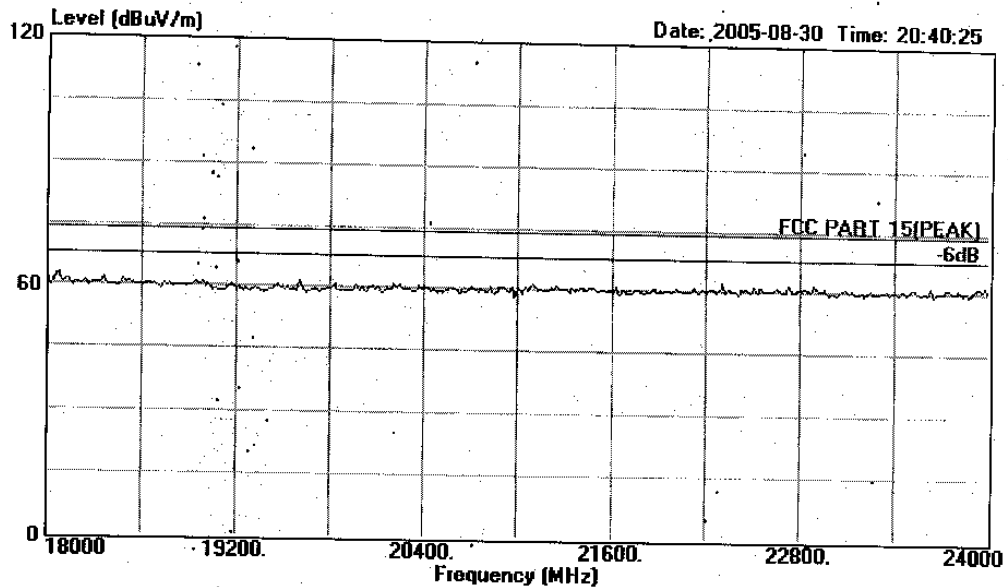

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR HORIZONTAL
EUT : 2.4G Wireless Video Intercom Doorbell
N/N : 823B/C
Power : Battery DC 9V
Test Engineer : SAM
Memo : Temp:23 Humi:54%
: TX




信華科技(深圳)有限公司

AUDIX Technology (Shenzhen) Co., Ltd.

No. 6, Ke Feng Road, Block 52,
Shenzhen Science & Industry Park
Nantou, Shenzhen, Guangdong, China
Tel: +86-755-26639496 Fax: +86-755-26632877

Data#: 16

File#: C:\EMI TEST DATA\Y\youjin.EMI

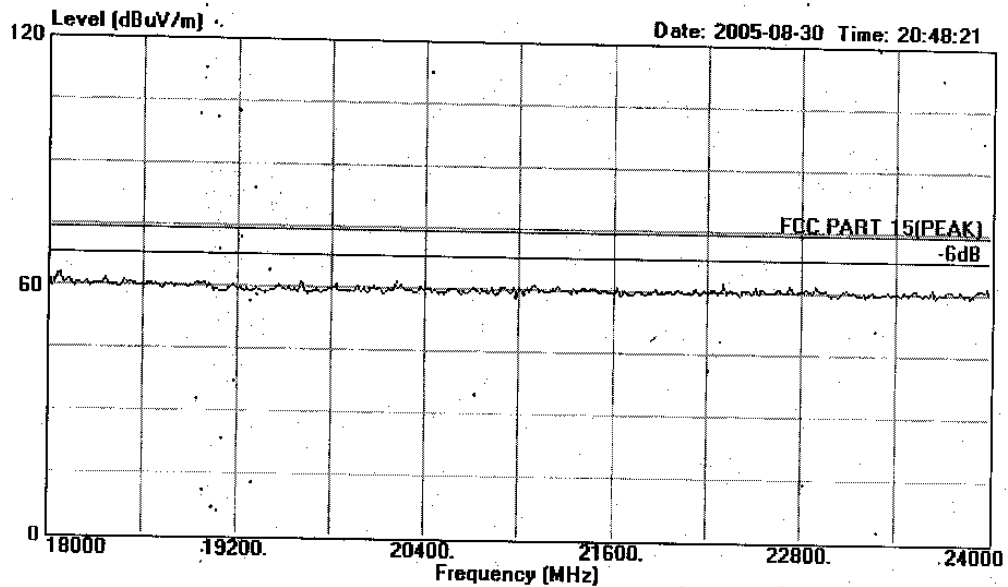

Site : 1# Chamber
Condition : FCC PART 15(PEAK) 3m 3115FACTOR VERTICAL
EUT : 2.4G Wireless Video Intercom Doorbell
M/N : 823B/C
Power : Battery DC 9V
Test Engineer : SAM
Memo : Temp:23 Humi:54%
: TX