



## **Advanced Control Technologies Inc.**

Application  
For Certification  
ZTH 100 Remote Control

**(FCC ID: QIE0608-0X)**

July 21, 2002



All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. No quotations from reports or use of Intertek Testing Services name is permitted except as expressly authorized by Intertek Testing Services in writing. The report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government. The NVLAP logo is applicable for testing to IEC/CISPR 22:1993 and FCC-47 CFR part 15 only.

# ITS Intertek Testing Services

## TABLE OF CONTENTS

<b>1.0</b>	<b>General Description</b> .....	1
1.1	Related Submittal(s) Grants .....	1
1.2	Product Description .....	1
1.3	Test Methodology .....	1
1.4	Test Facility .....	1
<b>2.0</b>	<b>System Test Configuration</b> .....	2
2.1	Justification.....	2
2.2	EUT Exercising Software .....	2
2.3	Special Accessories.....	2
2.4	Equipment Modification .....	2
2.5	Support Equipment List and Description.....	2
2.6	Test Configuration Block Diagram.....	3
<b>3.0</b>	<b>Test Results</b> .....	4
3.1	Field Strength of Fundamental and Harmonics Emissions, FCC 15.249(a)(b), 15.205 .....	5
3.2	Out of Band Spurious Emissions, FCC 15.249(c), 15.209 .....	6
3.3	Test Procedure .....	9
3.4	Field Strength Calculation .....	10
<b>4.0</b>	<b>Test Equipment</b> .....	11
<b>EXHIBIT I</b>		
	Test Set Up Photographs.....	12
<b>EXHIBIT II</b>		
	FCC ID Label Location.....	15
<b>EXHIBIT III</b>		
	External Photographs .....	16
<b>EXHIBIT IV</b>		
	Internal Photographs .....	19
<b>EXHIBIT V</b>		
	Electrical Schematics and Block Diagram .....	22
<b>EXHIBIT VI</b>		
	User Manual and Operational Description.....	23

## 1.0 GENERAL DESCRIPTION

### 1.1 Related Submittals Grants

This is single application of the *ZTH 100 Remote Control* for Certification under Part 15 Subpart C. There are no other simultaneous applications.

### 1.2 Product Description

The *ZTH 100 Remote Control* is a RF remote control operating in 908.44MHz. The intended use of the *ZTH 100 Remote Control* is to generate and transmit a RF signal to control remote devices. The *ZTH 100 Remote Control* powered at 3VDC from two AA-size internal batteries.

The *ZTH 100 Remote Control* antenna is an integrated antenna.

### 1.3 Test Methodology

Emission measurements were performed according to the procedures in ANSI C63.4-1992. All field strength radiated emissions measurements were performed in the semi-anechoic chamber, and for each scan, the procedure for maximizing emissions in Appendices D and E were followed. All field strength radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the **"Justification Section"** of this Application.

### 1.4 Test Facility

The test site facility used to collect the radiated and conducted measurement data is located at 7250 Hudson Blvd., Suite 100, Oakdale, Minnesota. This test facility has been fully described in a report dated on January 2000 submitted to your office. Please reference the site registration number: 90706, dated May 19, 2000.

## **2.0 SYSTEM TEST CONFIGURATION**

### **2.1 Justification**

N/A

### **2.2 EUT Exercising Software**

N/A

### **2.3 Special Accessories**

There are no special accessories necessary for compliance of these products.

### **2.4 Equipment Modification**

No modifications were installed during the testing.

### **2.5 Support Equipment List and Description**


N/A

## 2.6 Test Setup and Test Configuration Block Diagrams

The EUT was setup as tabletop equipment.

The EUT was powered at 3VDC from two AA-size fresh batteries.

### Field Strength Measurements

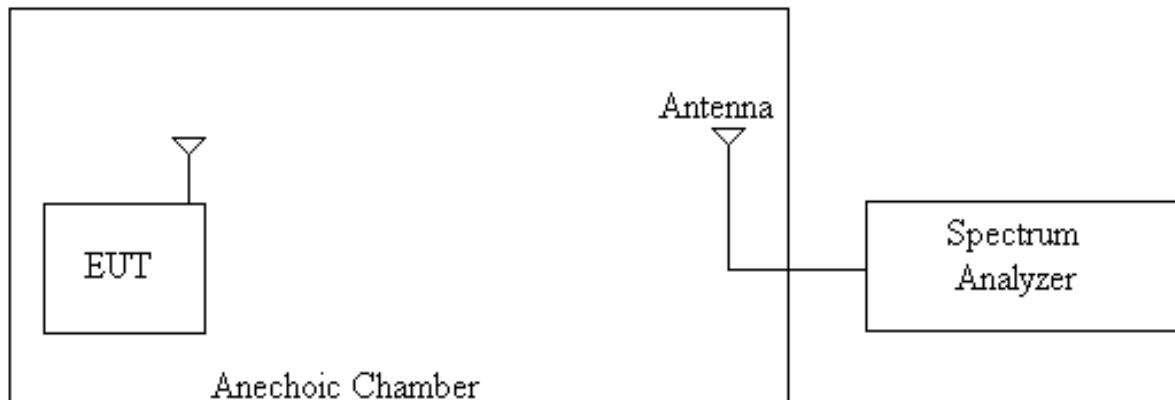

## 3.0 TEST RESULTS

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs, data tables and graphical representations of the emissions are included.

The EUT is intended for operation under the requirements of Part 15 Subpart C. Specific test requirements include the following:

47 CFR 15.249(a)(b)	Field Strength of Fundamental
47 CFR 15.249(a)(b), 15.205	Field Strength of Harmonics
47 CFR 15.249(c), 15.209	Out of Band Spurious Emissions

# ITS Intertek Testing Services

## 3.1 Field Strength of Fundamental and Harmonics Emissions, FCC 15.249(a)(b), 15.205

Field Strength of Fundamental and Harmonics Emissions measurements were made with Fundamental frequency at 908.44MHz. The Harmonics emissions were tested up to 10<sup>th</sup> harmonic.

The Table below shows the Field Strength of Fundamental Radiation and Harmonics Emissions in the Restricted Bands of Operation according to FCC 15.205.

No emissions above ambient was found at 4<sup>th</sup> and higher harmonics.

**Radiated Emissions**      **Date:** 7/2/02  
**Company:** Advanced Control Technologies Inc.  
**Model:** ZTH 100  
**Test Engineer:** Uri Spector  
**Special Config. Info:** Transiting mode of operation  
**Standard:** FCC Part 15.249, 15.205  
**Test Site:** 3 m Anechoic Chamber  
**Note:** Measurements were taking using a CISPR Quasi-Peak Detector for frequencies below 1GHz with 100kHz Resolution Bandwidth  
For frequencies above 1GHz measurements were taking using a Peak Detector with 1MHz Resolution Bandwidth  
No emissions were found above ambient at 4th and higher harmonics.

**Table # 3-1-1**

Frequency MHz	Antenna			Total Factor(dB/m)	Reading dB <sub>1</sub> V	Net at 3m dB <sub>1</sub> V/m	Limit dB <sub>1</sub> V/m	Margin dB	Comments
	Polarity	Hts(m)	Dir (°)						
908.42	V	177	56	25.08	57.60	82.68	93.98	-11.30	Fund.
908.42	H	176	186	25.08	67.80	92.88	93.98	-1.10	Fund.
1816.87	V	187	123	-2.90	43.50	40.60	N/A	N/A	2nd harm.
1816.87	H	136	164	-2.90	41.60	38.70	N/A	N/A	2nd harm.
2725.35	V	155	156	0.78	46.80	47.58	53.98	-6.40	3rd harm.
2725.35	H	132	215	0.78	44.20	44.98	53.98	-9.00	3rd harm.

## 3.2 Out of Band Spurious Emissions, FCC 15.249(c), 15.209

Out-of-band measurements were made for frequencies:

- 902MHz
- 928MHz.

Output frequencies of the EUT was 908.44MHz

The Table # 3-2-1 and Graphs ## 3-2-1 and 3-2-2 show the Out of Band Spurious Emissions.

**Note:** Emission level shown in the Graphs does not include the Antenna, Cable and Pre-amplifier correction factors.

### Radiated Emissions: Out of Band Emissions

Date: 6/21/02

**Company:** Advanced Control Technologies Inc.  
**Model:** ZTH-100  
**Test Engineer:** Uri Spector  
**Special Config. Info:** Frequency range 902 to 928MHz  
**Standard:** FCC Part 15.249, 15.209  
**Test Site:** 3 m Anechoic Chamber  
**Note:** Measurements were taken using a Peak detector


**Table # 3-2-1**

Frequency MHz	Reading dB <sub>1</sub> V	Total Factor dB/m	Net at 3m dB <sub>1</sub> V/m	15.249 Attenuation dB	15.249 Limit dB <sub>1</sub> V/m	15.249 Margin dB	15.209 Limit dB <sub>1</sub> V/m	15.209 Margin dB
908.40								
902.00	0.3	25.0	25.3	63.3	50.0	-13.3	46	-20.7
908.40								
928.00	0.5	25.3	25.8	61.5	50.0	-11.5	46	-20.2

### Comments


# ITS Intertek Testing Services

Graph # 3-2-1

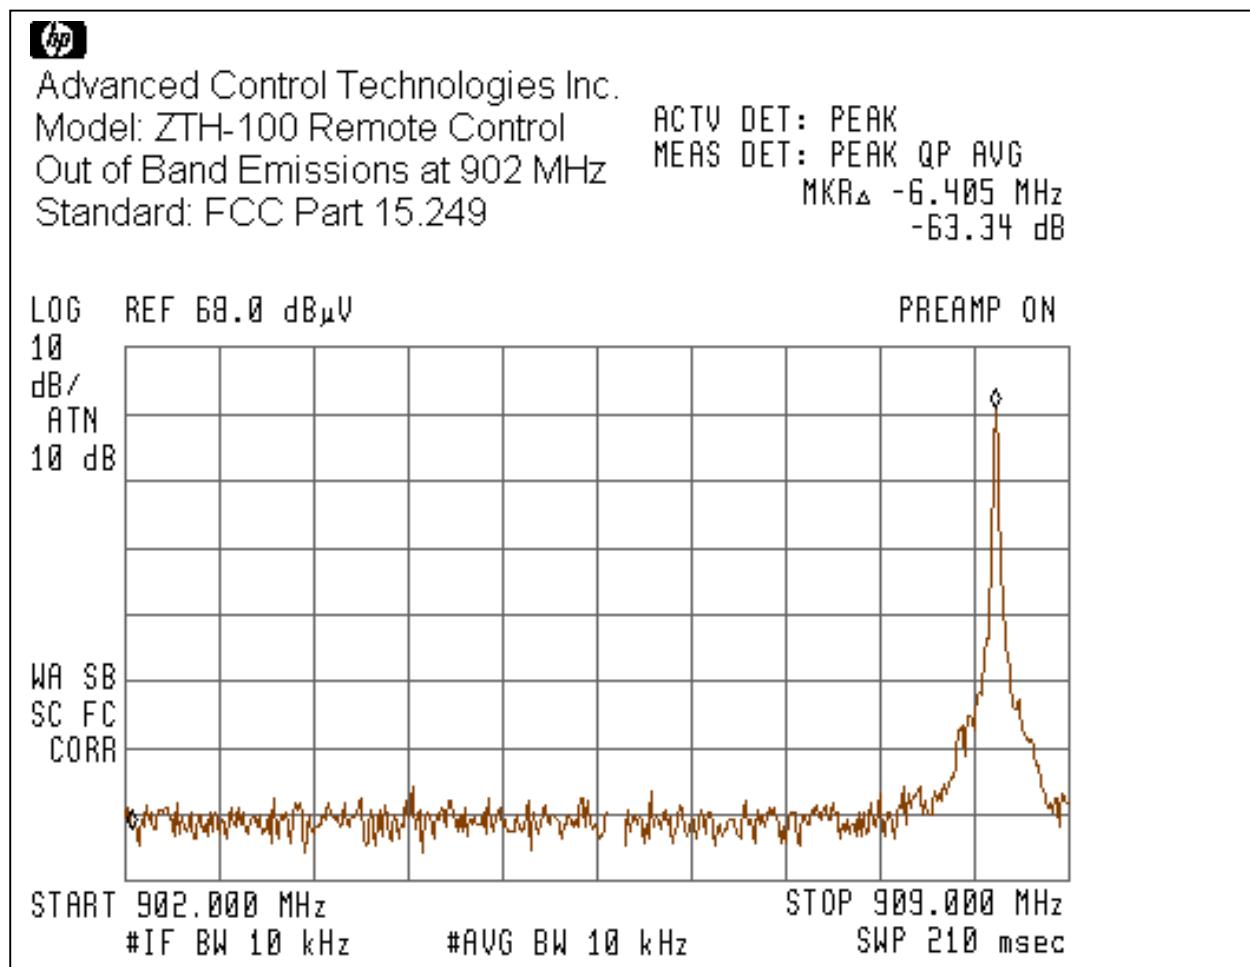

# ITS Intertek Testing Services

Graph # 3-2-2

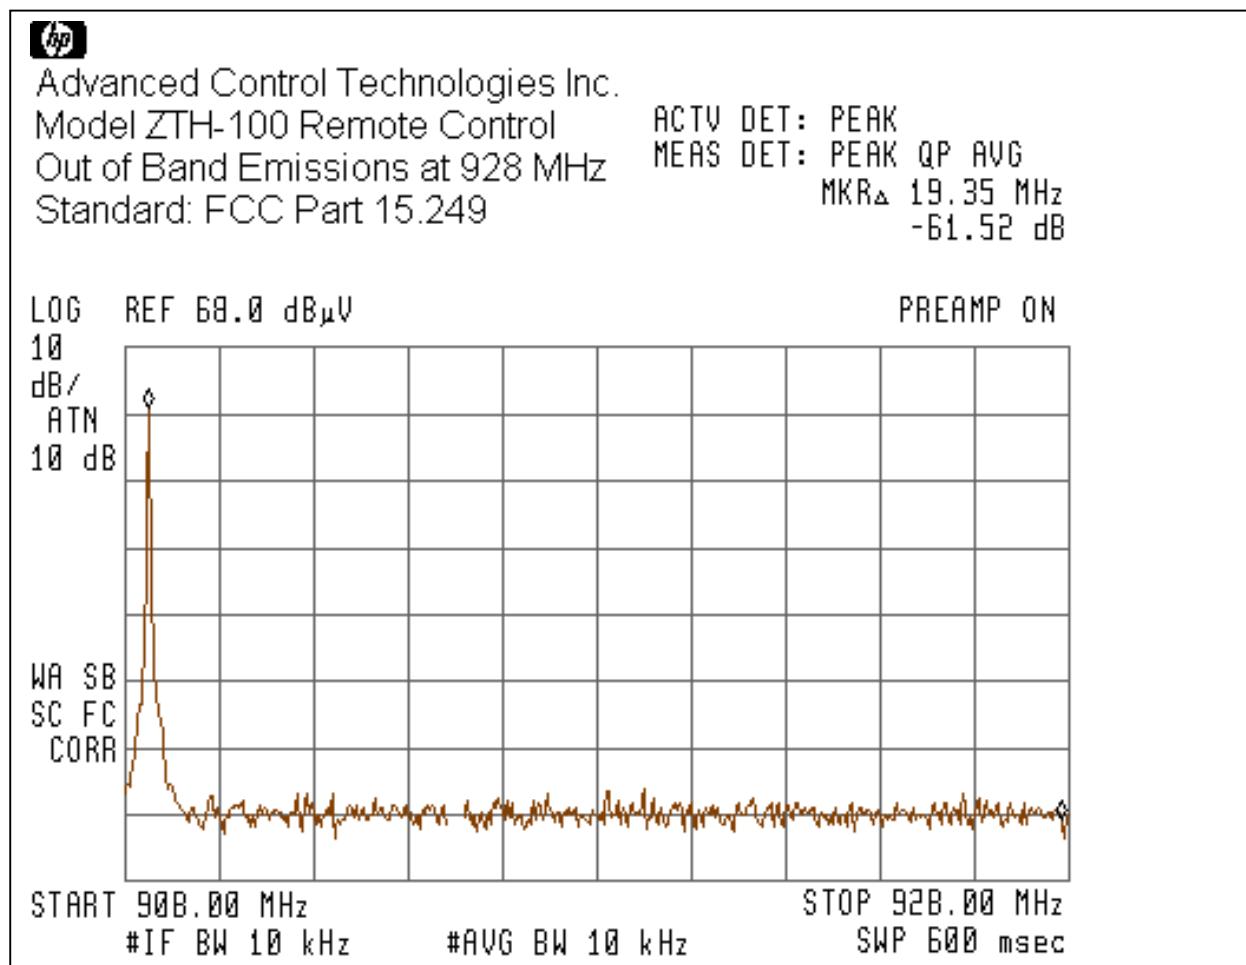

### 3.3 Test Procedure

#### Field Strength Measurements

The EUT was placed on a non-conductive table 0.8m above the ground plane inside the Anechoic Chamber. The table was centered on a motorized turntable, which allows 360-degree rotation. The measurement antenna was positioned at 3m distance. The Bicono-Log antenna was used in frequency range from 30MHz to 1GHz. The Horn antenna with the pre-amplifier was used in frequency range above 1GHz. The radiated emissions were maximized by configuring the EUT, by rotating the EUT, by changing antenna polarization, and by changing antenna height from 1 to 4m. Method of the direct Field Strength Calculation is shown in Section 3.4.

### 3.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured emissions reading on the EMI Receiver.

The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where: FS = Field Strength in dB( $\mu$ V/m)

RA = Receiver Amplitude in dB( $\mu$ V)

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB( $m^{-1}$ )

AG = Amplifier Gain in dB

Assume a receiver reading of 48.1 dB( $\mu$ V) is obtained. The antenna factor of 7.4 dB( $m^{-1}$ ) and cable factor of 1.6 dB is added and amplifier gain of 16.0 dB is subtracted giving field strength of 41.1 dB( $\mu$ V/m).

$$RA = 48.1 \text{ dB}(\mu\text{V})$$

$$AF = 7.4 \text{ dB}(m^{-1})$$

$$CF = 1.6 \text{ dB}$$

$$AG = 16.0 \text{ dB}$$

$$FS = RF + AF + CF - AG$$

$$FS = 48.1 + 7.4 + 1.6 - 16.0$$

$$FS = 41.1 \text{ dB}(\mu\text{V}/\text{m})$$

In the tables the Cable correction factors are included to the Antenna Factors.

Tested by:

Norman Shpilsher  
EMC Project Engineer  
Intertek Testing Services NA, Inc.

Signature

Norman Shpilsher

Signature

Date: July 21, 2002

# ITS Intertek Testing Services

## 4.0 TEST EQUIPMENT

### Receivers/Spectrum Analyzers

DESCRIPTION	SERIAL NO.	LAST CAL DATE	CAL DUE	TICK IF USED
HP85462A Receiver RF Section	3325A00106	07/01	07/02	X
HP85460A RF Filter Section	3330A00109	07/01	07/02	X
Advantest Spectrum Analyzer R3271A	55050084	06/02	06/03	X
HP 83017A Microwave Amplifier	3123A00475	09/01	09/02	X

### Antennas

DESCRIPTION	SERIAL NO.	LAST CAL DATE	CAL DUE	TICK IF USED
Schaffner-Chase Bicono-Log Antenna	2468	11/01	11/02	X
A.H. Systems SAS-200/562B Loop antenna	215	11/01	11/02	
EMCO Horn antenna 3115	9507-4513	09/01	09/02	X
EMCO Horn antenna 3115	6579	12/01	12/02	
EMCO Horn antenna 3116	9904-2423	10/01	10/02	

### Artificial Mains Networks/Absorbing Clamps

DESCRIPTION	SERIAL NO.	LAST CAL DATE	CAL DUE	TICK IF USED
FCC LISN-2	316	01/02	01/03	
FCC-LISN-50-25-2	2014	04/02	04/03	

**EXHIBIT I**

**TEST SET UP PHOTOS**

**EXHIBIT II**

**FCC ID LABEL LOCATION**

**(See ID Label/Location Info. Attachments)**

**EXHIBIT III**

**EXTERNAL PHOTOS**

**EXHIBIT IV**

**INTERNAL PHOTOS**

**EXHIBIT V**

**ELECTRICAL SCHEMATICS AND BLOCK DIAGRAM**

**(See Block Diagram and Schematic Attachments)**

**EXHIBIT VI**

**USER MANUAL AND OPERATIONAL DESCRIPTION**

**(See User Manual and Operational Description Attachments)**