

ANNEX 1 - TEST DATA PLOTS

Plot # 1:
99% Emission Bandwidth
Carrier Frequency: 2458 MHz
Antenna Polarization: Vertical
Modulation: FM, NTSC video with 6MHz aural sub-carrier



ANNEX 1 - TEST DATA PLOTS

Plot # 2:
99% Emission Bandwidth
Carrier Frequency: 2458 MHz
Antenna Polarization: Horizontal
Modulation: FM, NTSC video with 6MHz aural sub-carrier



ANNEX 1 - TEST DATA PLOTS

Plot # 3:
99% Emission Bandwidth
Carrier Frequency: 2474 MHz
Antenna Polarization: Vertical
Modulation: FM, NTSC video with 6MHz aural sub-carrier




ANNEX 1 - TEST DATA PLOTS

Plot # 4:
99% Emission Bandwidth
Carrier Frequency: 2474 MHz
Antenna Polarization: Horizontal
Modulation: FM, NTSC video with 6MHz aural sub-carrier




ANNEX 1 - TEST DATA PLOTS

Plot # 5:
Emission Mask
Carrier Frequency: 2458 MHz (Channel 1)
Antenna Polarization: Vertical
Modulation: FM, NTSC video with 6MHz aural sub-carrier

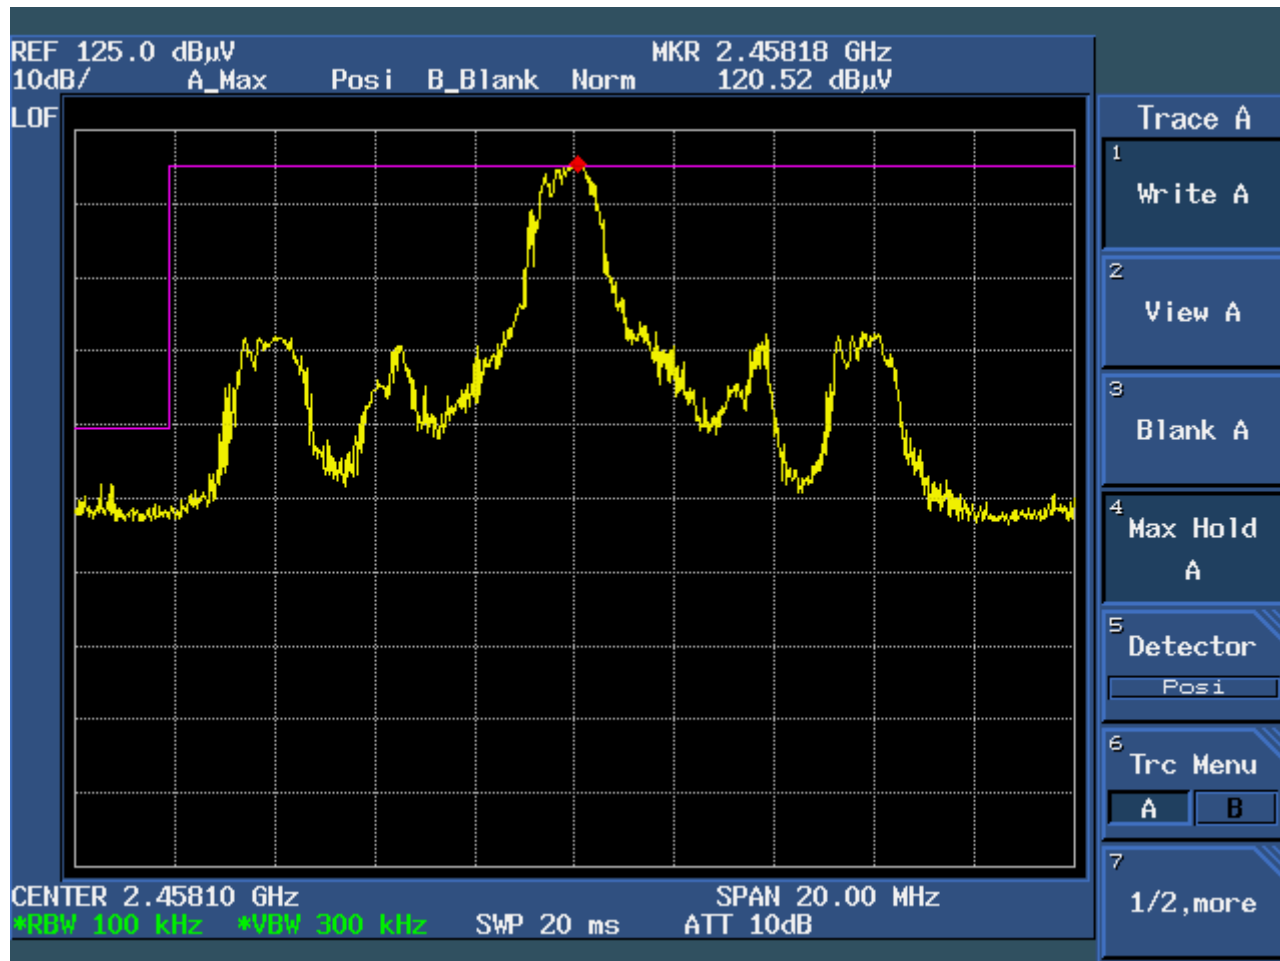


ANNEX 1 - TEST DATA PLOTS

Plot # 6:
Emission Mask
Carrier Frequency: 2458 MHz (Channel 1)
Antenna Polarization: Horizontal
Modulation: FM, NTSC video with 6MHz aural sub-carrier

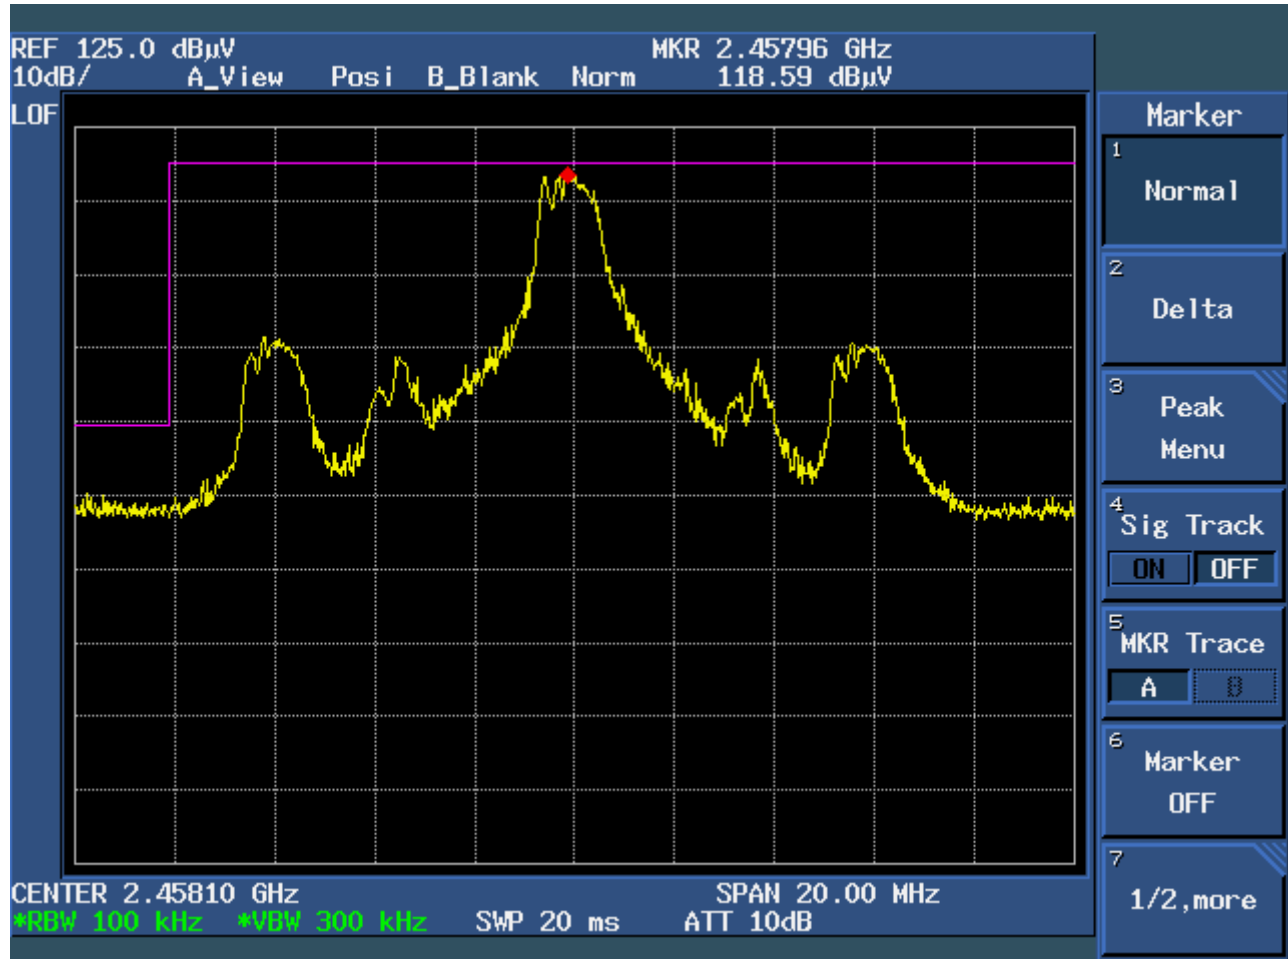


ANNEX 1 - TEST DATA PLOTS

Plot # 7:
Emission Mask
Carrier Frequency: 2474 MHz (Channel 2)
Antenna Polarization: Vertical
Modulation: FM, NTSC video with 6MHz aural sub-carrier

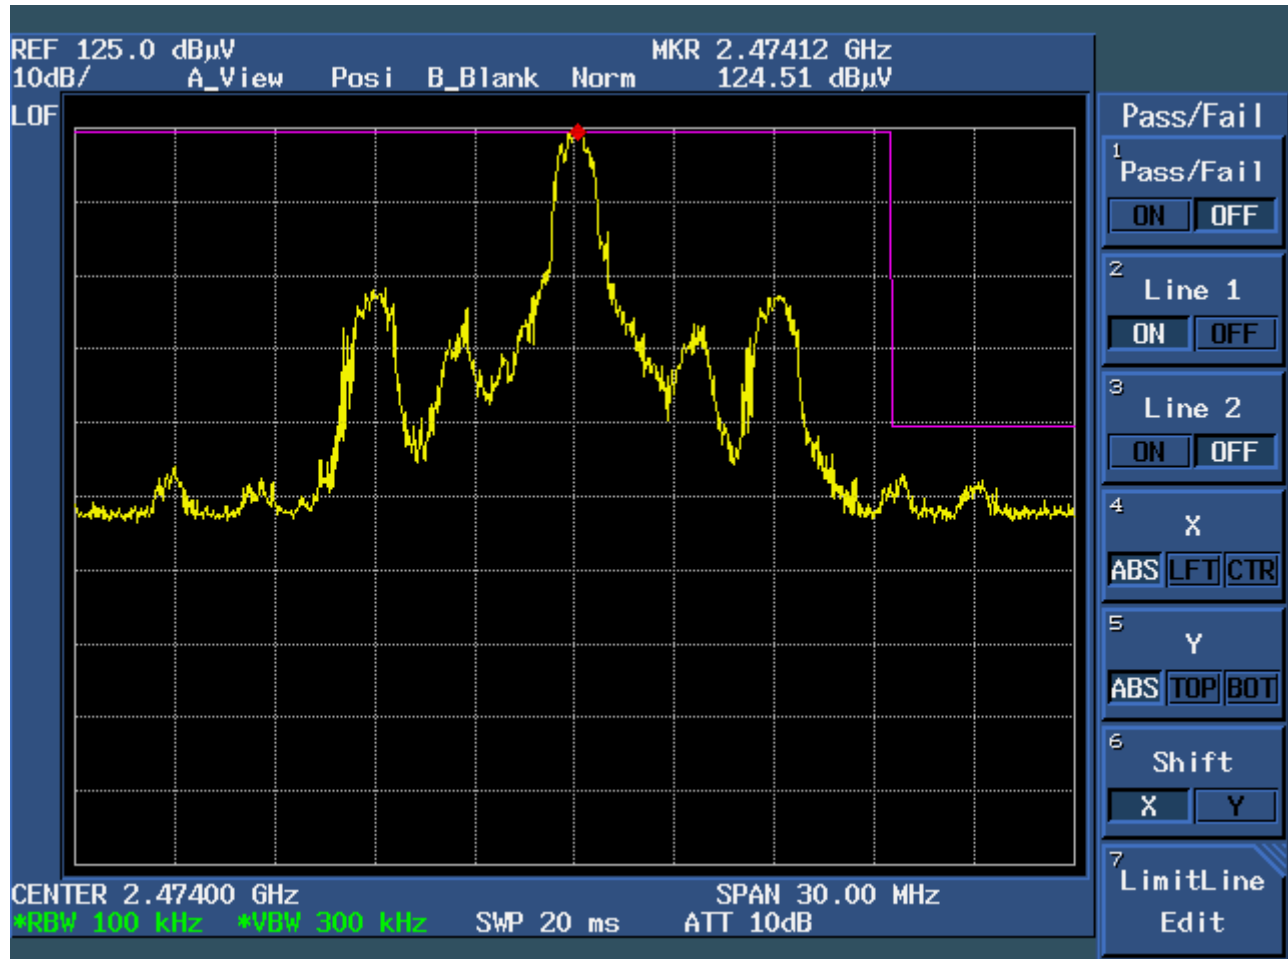

ANNEX 1 - TEST DATA PLOTS


Plot # 8:
Emission Mask
Carrier Frequency: 2474 MHz (Channel 2)
Antenna Polarization: Horizontal
Modulation: FM, NTSC video with 6MHz aural sub-carrier

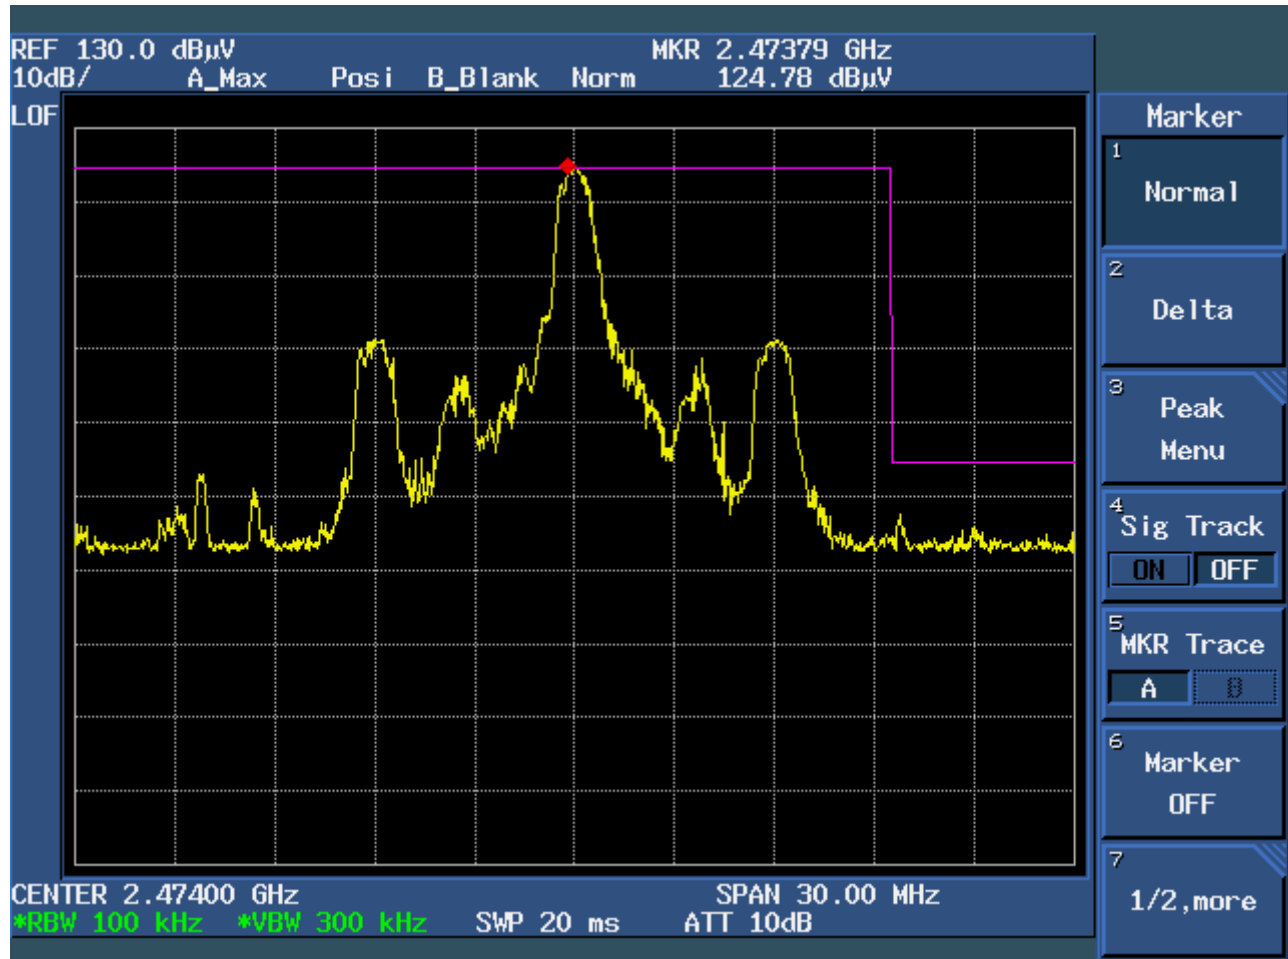

ANNEX 1 - TEST DATA PLOTS

Plot # 9:
Frequency Stability
Carrier Frequency: 2458 MHz (channel 1)
Modulation: FM, NTSC video with 6MHz aural sub-carrier
Temperature: 20 °C


hp

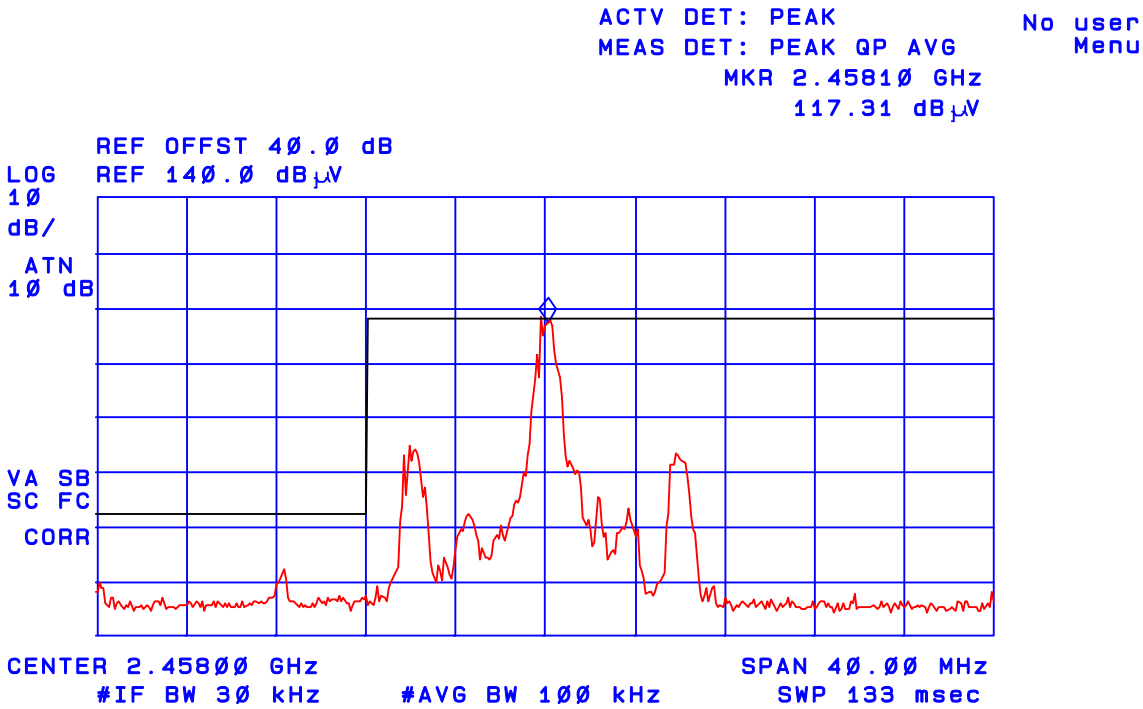

ANNEX 1 - TEST DATA PLOTS


Plot # 10:
Frequency Stability
Carrier Frequency: 2458 MHz (channel 1)
Modulation: FM, NTSC video with 6MHz aural sub-carrier
Temperature: -30 °C

hp

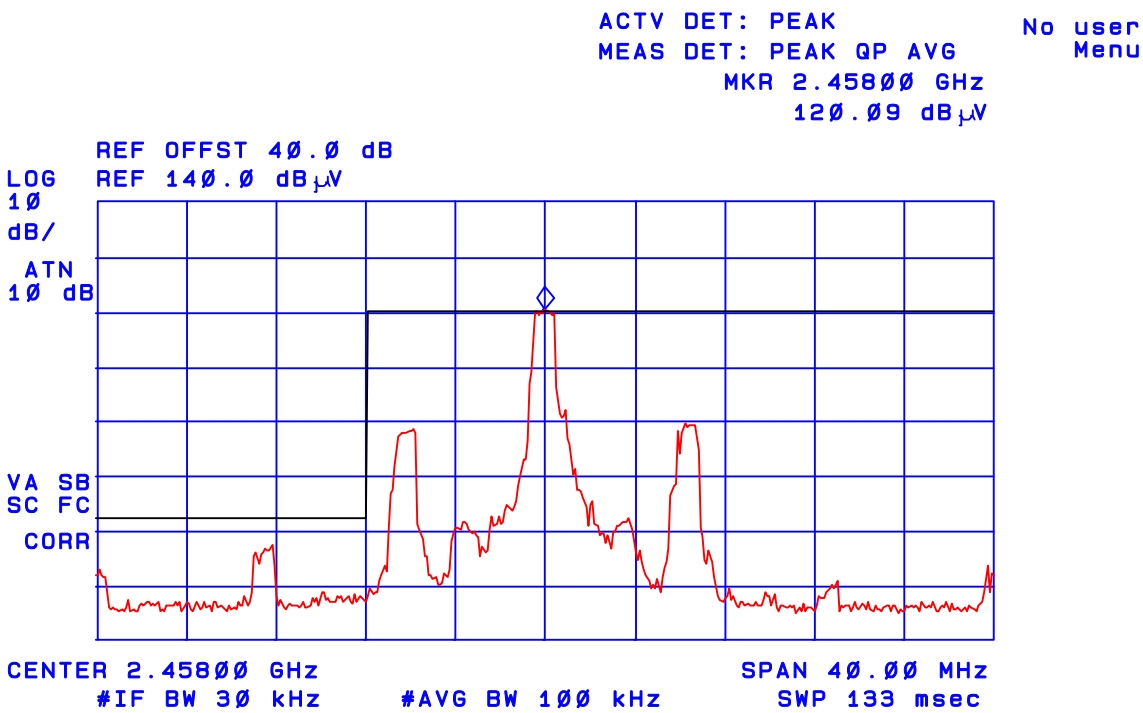


ANNEX 1 - TEST DATA PLOTS

Plot # 11:
Frequency Stability
Carrier Frequency: 2458 MHz (channel 1)
Modulation: FM, NTSC video with 6MHz aural sub-carrier
Temperature: +50 °C

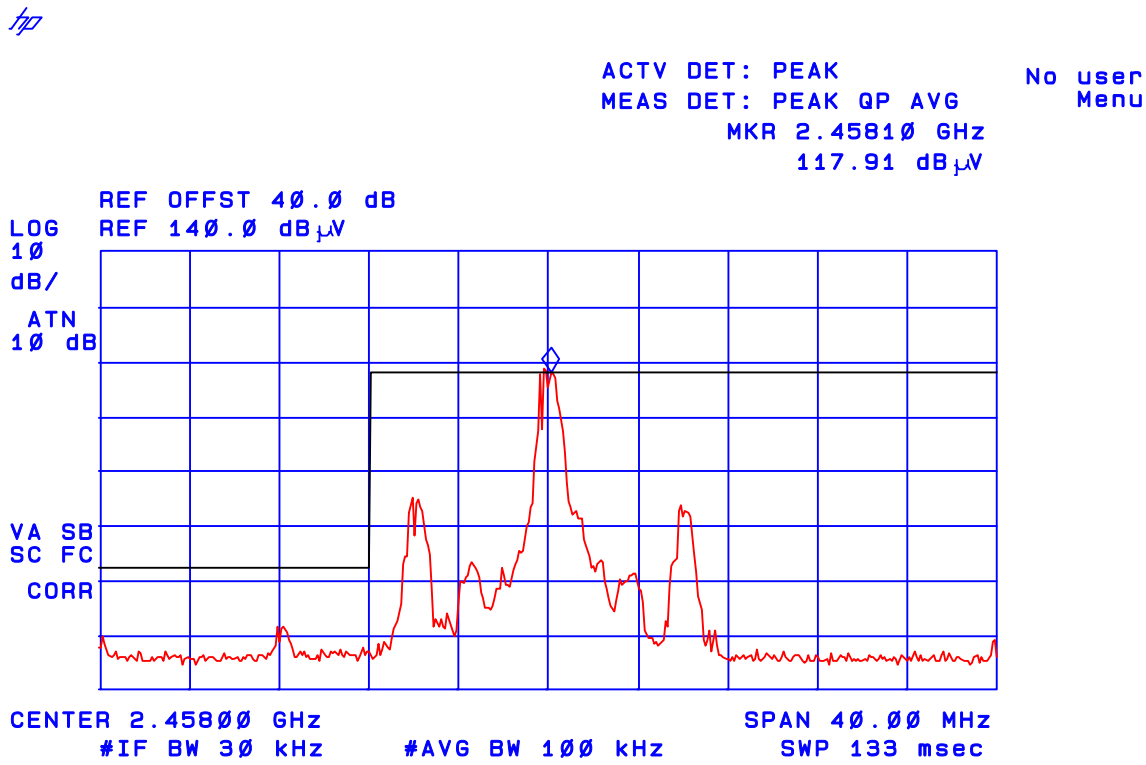


ANNEX 1 - TEST DATA PLOTS

Plot # 12:
Frequency Stability
Carrier Frequency: 2474 MHz (channel 2)
Modulation: FM, NTSC video with 6MHz aural sub-carrier
Temperature: +20 °C

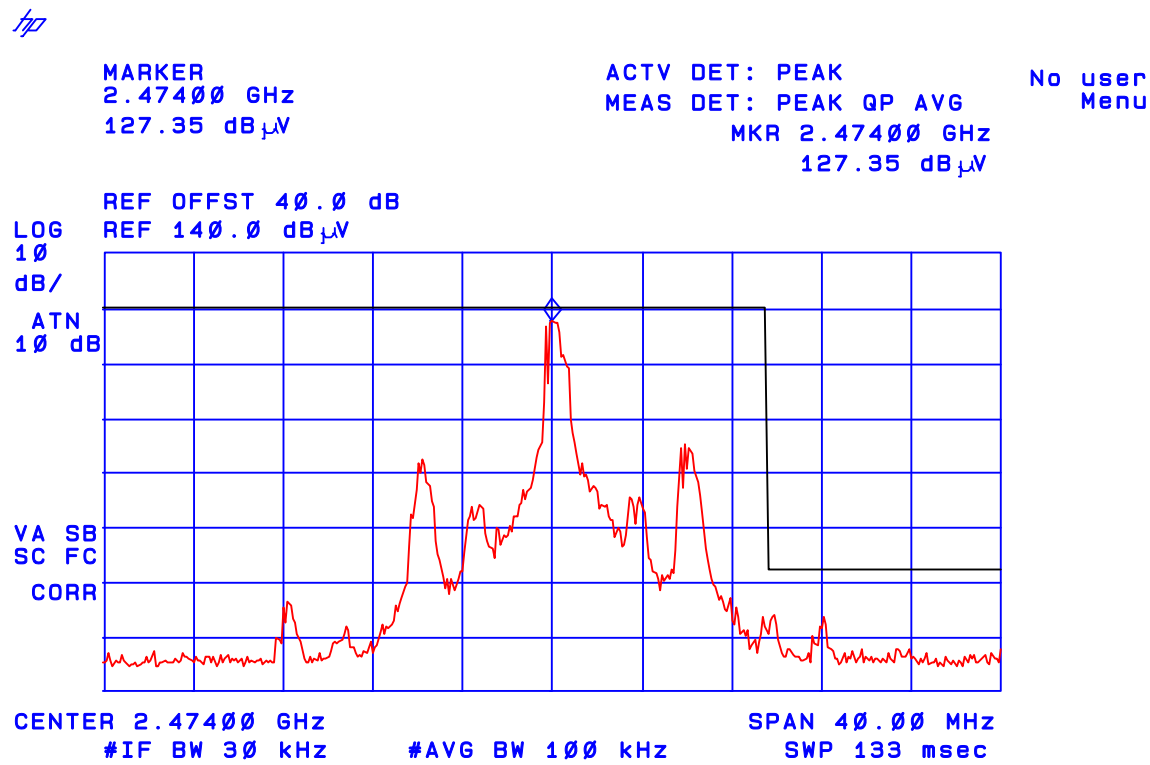

ANNEX 1 - TEST DATA PLOTS

Plot # 13:
Frequency Stability
Carrier Frequency: 2474 MHz (channel 2)
Modulation: FM, NTSC video with 6MHz aural sub-carrier
Temperature: -30 °C

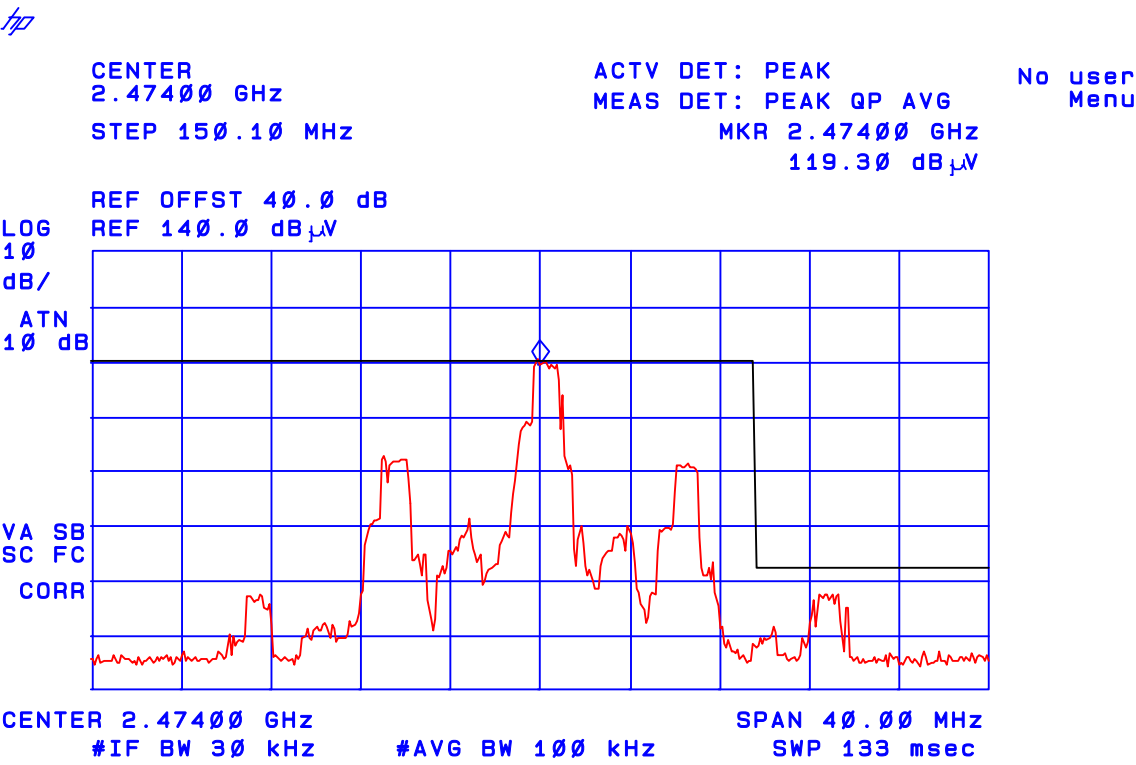

ANNEX 1 - TEST DATA PLOTS

Plot # 14:
Frequency Stability
Carrier Frequency: 2474 MHz (channel 2)
Modulation: FM, NTSC video with 6MHz aural sub-carrier
Temperature: +50 °C

