



Report on the Radio Testing

For

Gas Control Limited

on

Zeno Lite with Clarity

Report no. TRA-041253-47-04A

27 August 2019



Report Number: TRA-041253-47-04A
Issue: A

REPORT ON THE TESTING OF A
GAS CONTROL LIMITED
ZENO LITE WITH CLARITY
WITH RESPECT TO SPECIFICATIONS
47CFR PARTS 22, 27, 24

TEST DATE: 2019/03/11 to 2019/03/15

Written by:

D Winstanley
Radio Test Engineer

Approved by:

John Charters
Department Manager- Radio

Date: 27 August 2019

Disclaimers:

- [1] THIS DOCUMENT MAY BE REPRODUCED ONLY IN ITS ENTIRETY AND WITHOUT CHANGE
- [2] THE RESULTS CONTAINED IN THIS DOCUMENT RELATE ONLY TO THE ITEM(S) TESTED

1 Revision Record

<i>Issue Number</i>	<i>Issue Date</i>	<i>Revision History</i>
A	27 August 2019	Original

2 Summary

TEST REPORT NUMBER: TRA-041253-47-04A

WORKS ORDER NUMBER: TRA-041253-03

PURPOSE OF TEST: Class II Permissive Change

TEST SPECIFICATION(S): 47CFR Parts 22, 27, 24

EQUIPMENT UNDER TEST (EUT): Zeno Lite with Clarity containing
FCCID: QIPPLS62-W

EUT SERIAL NUMBER: ZL101416

MANUFACTURER/AGENT: Gas Control Limited

ADDRESS: 100 Empress Park
Penny Lane
Haydock
St Helens
WA11 9DB
United Kingdom

CLIENT CONTACT: Will Turner
☎ 01942 292962
✉ will.turner@gcegroup.com

ORDER NUMBER: 45-027-022

TEST DATE: 2019/03/11 to 2019/03/15

TESTED BY: D Winstanley / M Else
Element

2.1 Test Summary

Test Method and Description	Requirement Clause	Applicable to this equipment	Result / Note
	47CFR		
Spurious emissions	24.238, 24.232, 22.917, 22.913, 27.53, 2.1051	<input checked="" type="checkbox"/>	Pass
Output power	22.913, 24.232, 27.50	<input checked="" type="checkbox"/>	Pass

Notes:

The results contained in this report relate only to the items tested, in the condition at time of test, and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only. Any modifications made are identified in Section 8 of this report.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 5.2 of this test report (Deviations from Test Standards).

3 Contents

1	Revision Record	3
2	Summary	4
2.1	Test Summary	5
3	Contents	6
4	Introduction	7
5	Glossary of Terms	8
6	Equipment Under Test.....	9
6.1	EUT Identification	9
6.2	System Equipment.....	9
6.3	EUT Mode of Operation.....	9
6.3.1	Transmission	9
6.4	EUT Description	9
6.4.1	Antennas	10
7	Modifications.....	11
8	EUT Test Setup	12
8.1	Block Diagram	12
8.2	General Set-up Photograph.....	13
9	General Technical Parameters	14
9.1	Normal Conditions	14
10	Radiated emissions	15
10.1	Definitions.....	15
10.2	Test Parameters	15
10.3	Test Limits	16
10.4	Test Method.....	17
10.5	Test Equipment	18
10.6	Test Results.....	19
11	RF power output (mean output power)	36
11.1	Definition.....	36
11.2	Test Parameters	36
11.3	Test Limits	36
11.4	Test Method.....	38
11.5	Test Equipment	39
11.6	Test Results.....	39
12	Measurement Uncertainty.....	40

4 Introduction

This report TRA-041253-47-04A presents the results of the Radio testing on a Gas Control Limited, Zeno Lite with Clarity.

The Zeno Lite with Clarity contains a cellular module FCCID QIPPLS62-W.

The testing was carried out for Gas Control Limited by Element, at the address detailed below.

<input type="checkbox"/>	Element Hull Unit E South Orbital Trading Park Hedon Road Hull HU9 1NJ UK	<input checked="" type="checkbox"/>	Element Skelmersdale Unit 1 Pendle Place Skelmersdale West Lancashire WN8 9PN UK
--------------------------	---	-------------------------------------	--

This report details the configuration of the equipment, the test methods used and any relevant modifications where appropriate.

All test and measurement equipment under the control of the laboratory and requiring calibration is subject to an established programme and procedures to control and maintain measurement standards. The quality management system meets the principles of ISO 9001, and has quality control procedures for monitoring the validity of tests undertaken. Records and sufficient detail are retained to establish an audit trail of calibration records relating to its test results for a defined period. Under control of the established calibration programme, key quantities or values of the test & measurement instrumentation are within specification and comply with the relevant traceable internationally recognised and appropriate standard specifications, which are UKAS calibrated as such where these properties have a significant effect on results. Participation in inter-laboratory comparisons and proficiency testing ensures satisfactory correlation of results conform to Elements own procedures, as well as statistical techniques for analysis of test data providing the appropriate confidence in measurements.

Throughout this report EUT denotes equipment under test.

FCC Site Listing:

Element is accredited for the above sites under the US-EU MRA, Designation number UK0009.

The test site requirements of ANSI C63.4-2014 are met up to 1GHz.

The test site SVSWR requirements of CISPR 16-1-4:2010 are met over the frequency range 1 GHz to 18 GHz.

5 Glossary of Terms

§	denotes a section reference from the standard, not this document
AC	Alternating Current
ANSI	American National Standards Institute
BW	bandwidth
C	Celsius
CFR	Code of Federal Regulations
CW	Continuous Wave
dB	decibel
dBm	dB relative to 1 milliwatt
DC	Direct Current
DSSS	Direct Sequence Spread Spectrum
EIRP	Equivalent Isotropically Radiated Power
ERP	Effective Radiated Power
EUT	Equipment Under Test
FCC	Federal Communications Commission
FHSS	Frequency Hopping Spread Spectrum
Hz	hertz
IC	Industry Canada
ITU	International Telecommunication Union
LBT	Listen Before Talk
m	metre
max	maximum
MIMO	Multiple Input and Multiple Output
min	minimum
MRA	Mutual Recognition Agreement
N/A	Not Applicable
PCB	Printed Circuit Board
PDF	Portable Document Format
Pt-mpt	Point-to-multipoint
Pt-pt	Point-to-point
RF	Radio Frequency
RH	Relative Humidity
RMS	Root Mean Square
Rx	receiver
s	second
SVSWR	Site Voltage Standing Wave Ratio
Tx	transmitter
UKAS	United Kingdom Accreditation Service
V	volt
W	watt
Ω	ohm

6 Equipment Under Test

6.1 EUT Identification

- Name: Zeno Lite with Clarity contains FCC QIPPLS62-W
- Serial Number: ZL101416
- Model Number: RS-00600C
- Software Revision: V 1.360
- Build Level / Revision Number: Pre-Production

6.2 System Equipment

Equipment listed below forms part of the overall test setup and is required for equipment functionality and/or monitoring during testing. The compliance levels achieved in this report relate only to the EUT and not items given in the following list.

- 1: CMW 500 Wideband Communications Tester – Serial Number: 112969
- 2: Laptop

6.3 EUT Mode of Operation

6.3.1 Transmission

The mode of operation for transmitter tests was as follows:

EUT was operated with worst case modes of operation for each cellular band as derived from original filing reports.

6.4 EUT Description

The EUT is a portable oxygen concentrator for patients requiring supplementary oxygen. The device has multiple wireless connections. This report covers intermodulations produced by the simultaneous transitions between the LTE module and the Bluetooth Low

- Cellular Radio Module: FCC ID: QIPPLS62-W

For Spurious emission data on LTE Bands 2, 4 & 5 please refer to Report Number TRA-041253-47-02A.

6.4.1 Antennas

Manufacturer:	Antenova
Type:	Moseni Antenna for LTE applications
Model number:	SRFL029
Frequency ranges:	698 MHz – 798 MHz 824 MHz – 960 MHz 1710 MHz – 2170 MHz 2300 MHz – 2400 MHz 2500 MHz – 2690 MHz
Impedance:	50 Ω
Polarisation:	Linear
Connector type:	IPEX
Length:	110.0 x 20.0 x 0.15 (mm)
Dimensions (Antenna):	< 0.5 g
Environmental limits:	-40°C to +85°C
Mounting:	FPC Self-adhesive 3M 468P

Frequency range:	698 MHz – 960 MHz	1710 MHz – 1990 MHz	2110 MHz – 2170 MHz	2500 MHz – 2690 MHz
Return Loss:	< -1.6 dB	< -2.2 dB	< -7.7 dB	< -8.7 dB
Efficiency (Min):	1.21 %	3.72 %	12.82 %	34.43 %
Efficiency (Avg):	2.42 %	6.33 %	19.99 %	43.52 %
Peak gain:	-8.6 dBi	-0.4 dBi	3.54 dBi	6.45 dBi
Average gain:	-16.16 dBi	-11.99 dBi	-6.99 dBi	-3.61 dBi

7 Modifications

The following modifications were incorporated in the equipment during testing.

Power limitation was employed to reduce the GSM 850 from 33dBm limit to 27dBm limit using the following commands.

This command sets the power limitation profile up in NVRAM and only needs to be run once on a device and is stored in NVRAM after that i.e. persists regardless of power loss:

```
AT^SCFG="Radio/Mtpl/2G",3,2,"0x00000040",,27,27
```

To activate it on boot we applied this command to apply that power limitation profile to the modem. This will need to be applied on every power restart of the PLS62W modem. We will have that loaded into the device firmware to run on every restart.


```
AT^SCFG="Radio/Mtpl/2G",1,2
```

These commands and their definition and detailed function can be found in the PLS62-W AT Command guide.

8 EUT Test Setup



8.1 *Block Diagram*

The following diagram shows basic EUT interconnections:

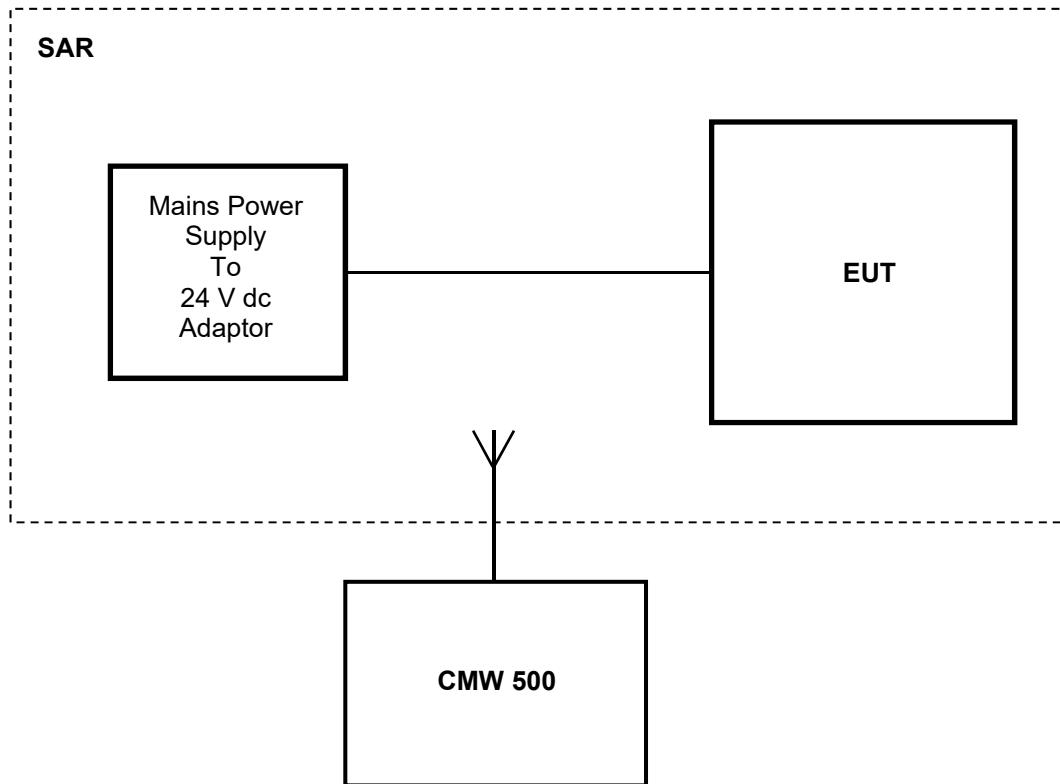

8.2 General Set-up Photograph

The following photographs shows basic EUT set-up:

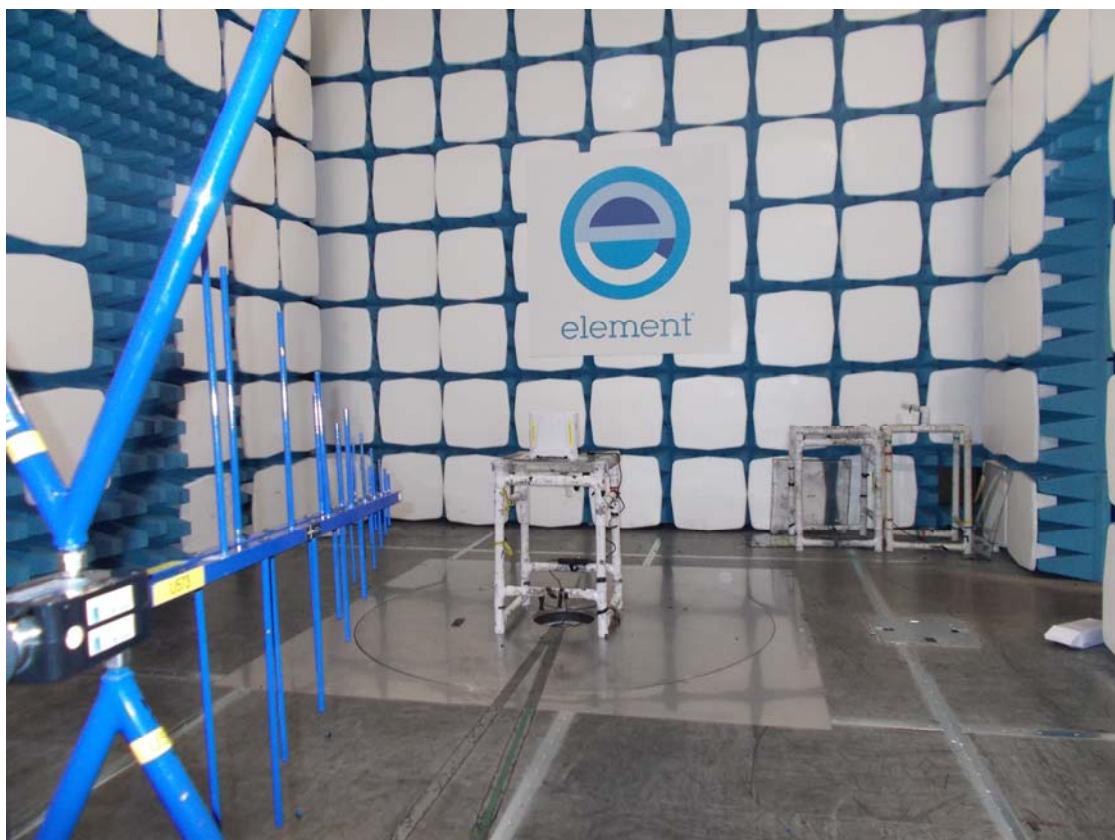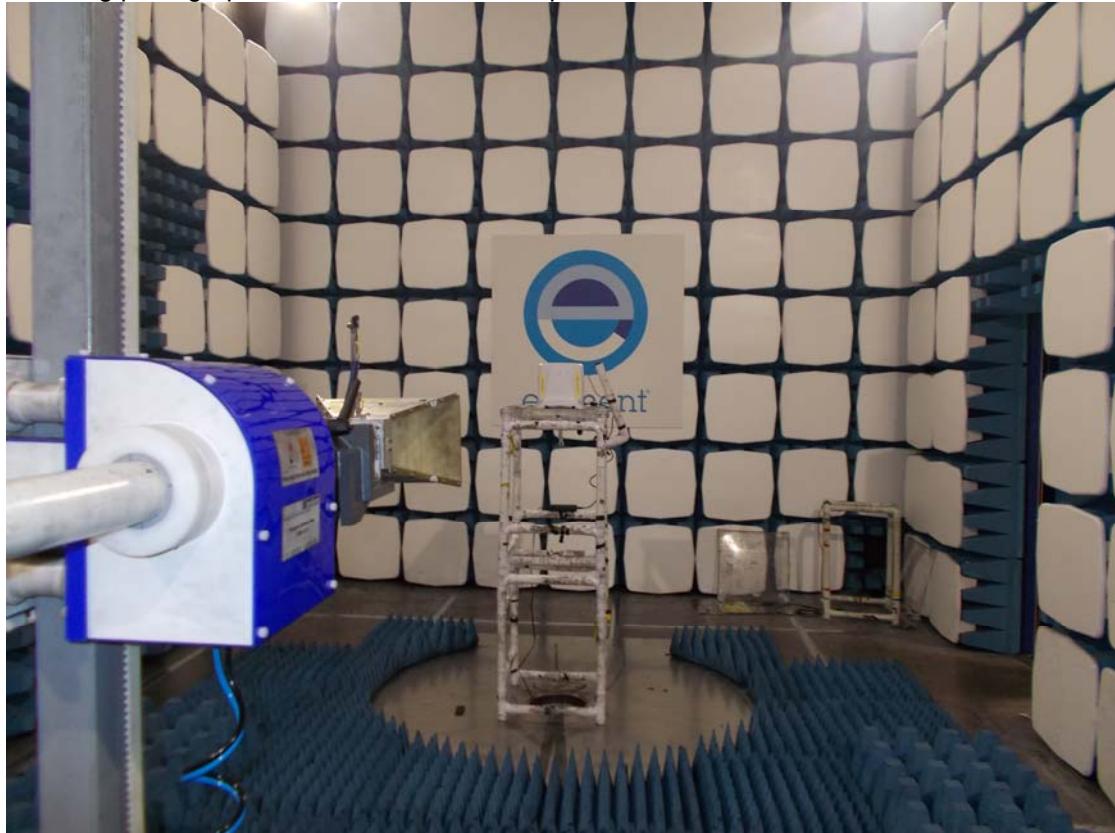

9 General Technical Parameters

9.1 *Normal Conditions*

The Zeno Lite with Clarity was tested under the normal environmental conditions of the test laboratory, except where otherwise stated. The normal power source applied was mains via a 24 V dc adaptor.

10 Radiated emissions

10.1 Definitions

Spurious emissions

Emissions on a frequency or frequencies, which are outside the necessary bandwidth and the level of which may be reduced without affecting the corresponding transmission of information. Spurious emissions include harmonic emissions, parasitic emissions, intermodulation products and frequency conversion products, but exclude out-of-band emissions.

Intermodulation products

Emissions of two or more electromagnetic waves transmitted simultaneously through a nonlinear electronic system.

10.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	SK03
Test Standard and Clause:	TIA 603-D, clause 2.2.12
EUT Operating Frequencies Tested:	Low / Mid / High MHz
Deviations From Standard:	GSM 850 GPRS Tested with 27dBm power limit applied
Measurement BW:	30 MHz to 1 GHz: 120 kHz Above 1 GHz: 1 MHz
Measurement Detector:	Up to 1 GHz: quasi-peak Above 1 GHz: Peak

Environmental Conditions (Normal Environment)

Temperature: 24.6 °C	+15 °C to +35 °C (as declared)
Humidity: 50.7 %RH	20%RH to 75%RH (as declared)
Supply: xx Vac/dc	230Vac +/-10% (as declared)

10.3 Test Limits

FCC 47CFR22

22.917(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FCC 47CFR24

24.238(a) *Out of band emissions.* The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FCC 47CFR27

27.53(c) For operations in the 746–758 MHz band and the 776–788 MHz band, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On any frequency outside the 746– 758 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (2) On any frequency outside the 776– 788 MHz band, the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log (P)$ dB;
- (3) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations;
- (4) On all frequencies between 763–775 MHz and 793–805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations;
- (5) Compliance with the provisions of paragraphs (c)(1) and (c)(2) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 30 kHz may be employed;
- (6) Compliance with the provisions of paragraphs (c)(3) and (c)(4) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.

27.53(f) For operations in the 746–758 MHz, 775–788 MHz, and 805–806 MHz bands, emissions in the band 1559–1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

27.53(g) For operations in the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB.

Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

27.53(h) *AWS emission limits*—(1) *General protection levels.* Except as otherwise specified below, for operations in the 1695–1710 MHz, 1710–1755 MHz, 1755–1780 MHz, 1915–1920 MHz, 1995–2000 MHz, 2000–2020 MHz, 2110–2155 MHz, 2155–2180 MHz, and 2180–2200 bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log_{10} (P)$ dB.

10.4 Test Method

With the EUT setup as per section 9 of this report and connected as per Figure viii and with the EUT's antenna replaced by a non-radiating load, the emissions from the EUT were measured on a spectrum analyzer / EMI receiver. The EUT was rotated in three orthogonal planes and the measurement antenna height scanned (below 1GHz, from 1 to 4 m; above 1GHz as necessary) in order to maximise emissions.

The measurements were performed with EUT set at its maximum gain. All modulation schemes, data rates and power settings were used to observe the worst-case configuration at each frequency.

The EUT was substituted with a known generator and antenna and for the same level achieved at the analyser, the effective radiated power was recorded.


Pre-scan plots are shown with a peak detector and 100kHz RBW.

The following formula may be used to convert field strength (FS) in volts/metre to transmitter output power (TP) in watts:

$$TP = (FS \times D)^2 / (30 \times G)$$

where D is the distance in metres between the two antennas and G is the antenna numerical gain referenced to isotropic gain.

Figure viii Test Setup

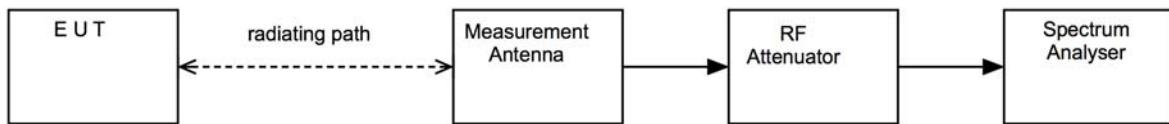


Test Setup Photograph(s)




10.5 Test Equipment

Equipment Description	Manufacturer	Equipment Type	Element No	Last Cal Calibration	Calibration Period	Due For Calibration
Spectrum Analyser	R&S	FSU46	U281	2018-11-20	12	2019-11-20
Pre Amp	Agilent	8449B	L572	2018-10-12	12	2019-10-12
1-18GHz Horn	EMCO	3115	U223	2017-10-25	24	2019-10-25
Bilog	Chase	CBL611/A	L290	2018-04-24	24	2020-04-24
Horn 18-26GHz (&U330)	Flann	20240-20	L300	2018-04-24	24	2020-04-24
High Pass Filter	Atlantic Microwave	AFH-07000	U558	2019-03-20	24	2021-03-20


10.6 Test Results

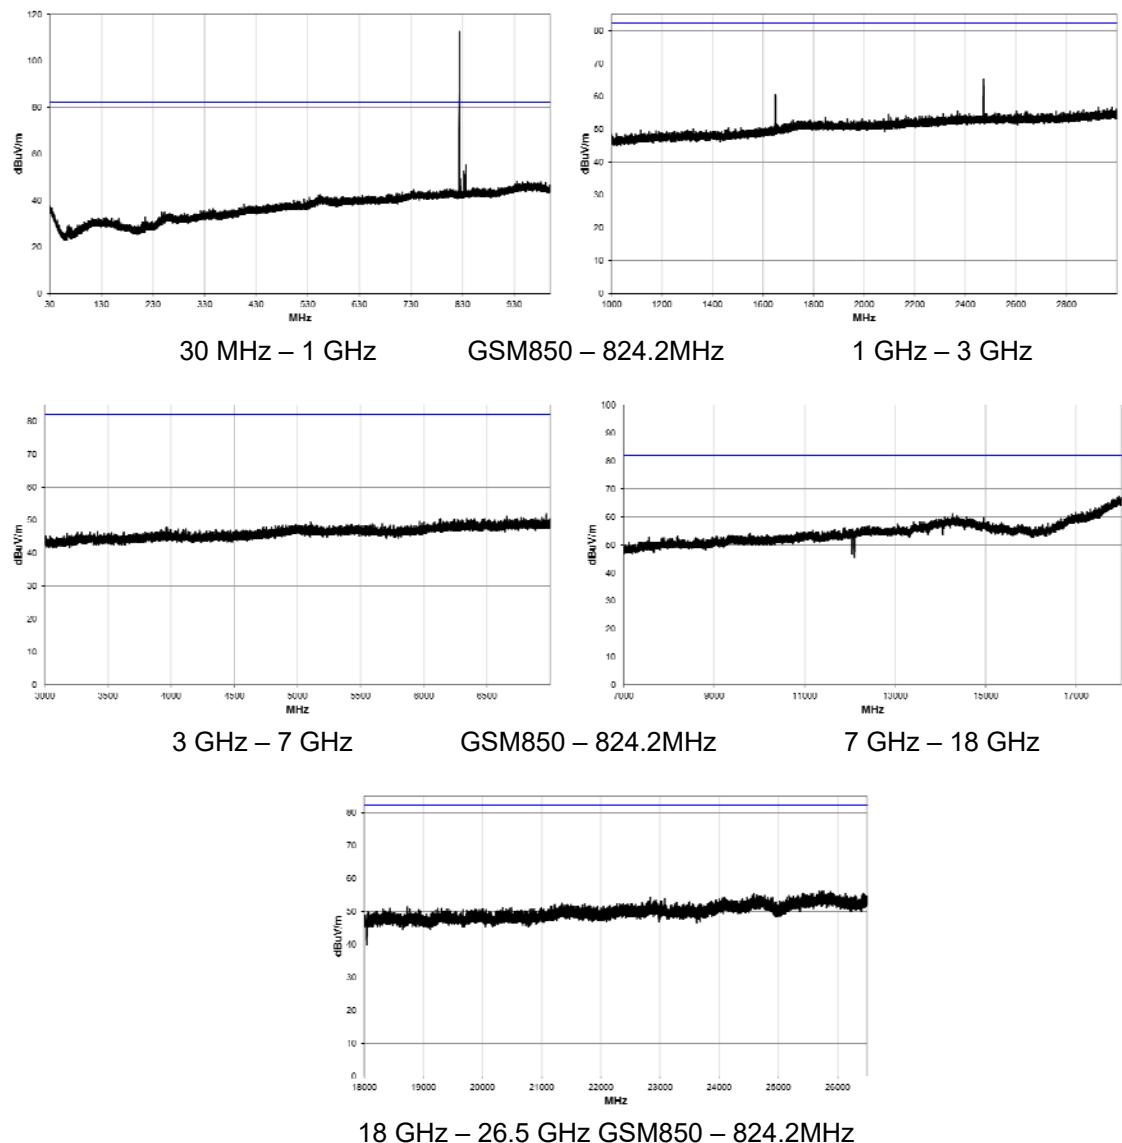


GSM 850 GPRS Low Frequency; 824.2 MHz CH128 Band 5					
<i>Emission</i>	<i>Frequency (MHz)</i>	<i>Emission level (dBm)</i>	<i>Limit (dBm)</i>	<i>Margin (dB)</i>	<i>Result</i>
1	2472.625	-22.0	-13.0	-9.0	PASS
2	1648.500	-30.1	-13.0	-17.1	PASS
3	2472.792	-33.7	-13.0	-20.7	PASS

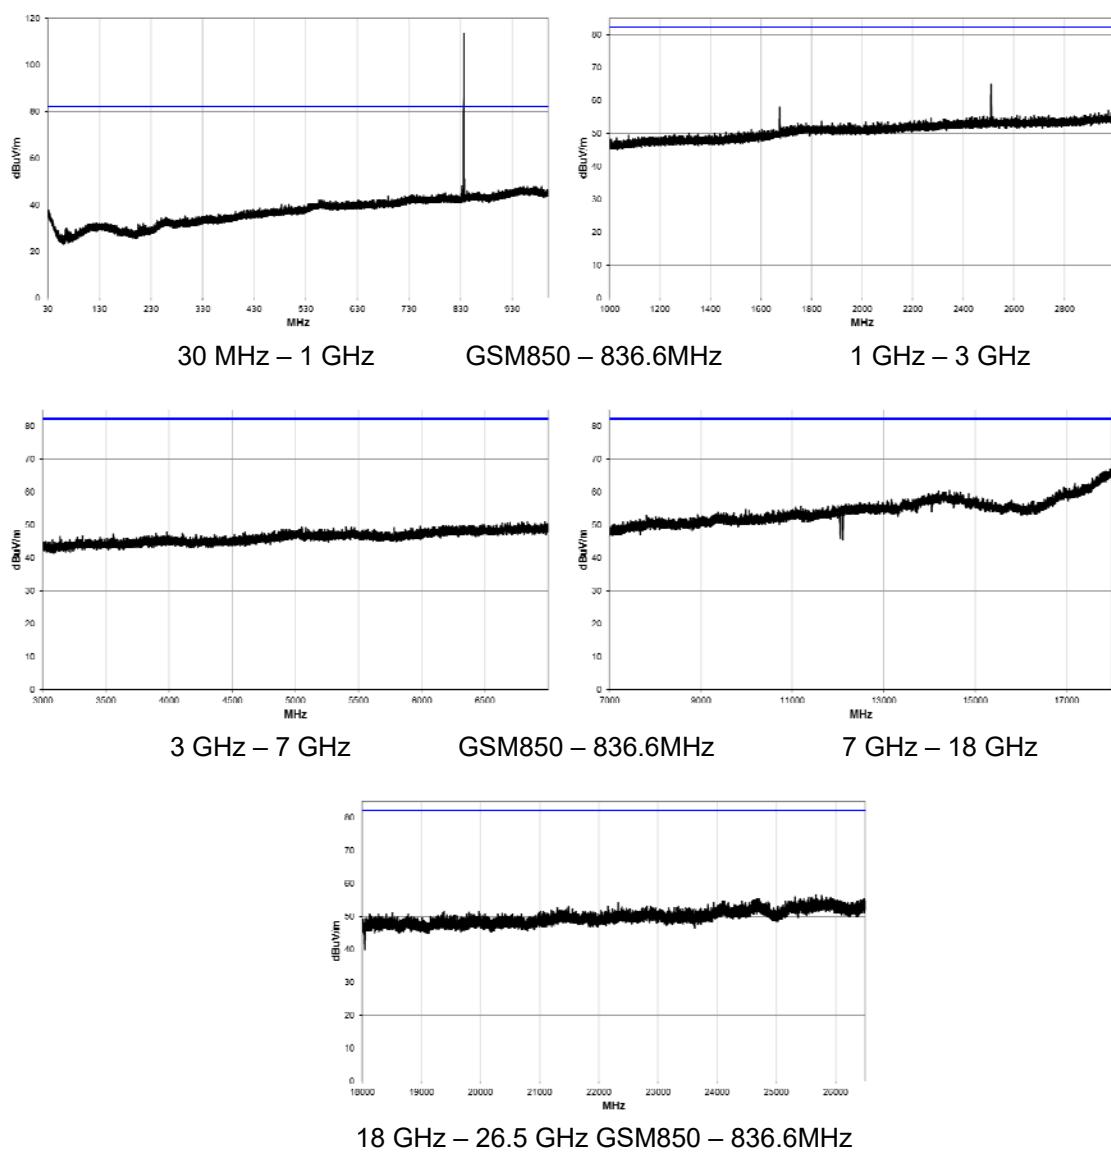


GSM 850 GPRS Middle Frequency; 836.6 MHz CH190 Band 5					
<i>Emission</i>	<i>Frequency (MHz)</i>	<i>Emission level (dBm)</i>	<i>Limit (dBm)</i>	<i>Margin (dB)</i>	<i>Result</i>
1	2509.875	-24.1	-13.0	-11.1	PASS
2	1673.417	-33.6	-13.0	-20.6	PASS

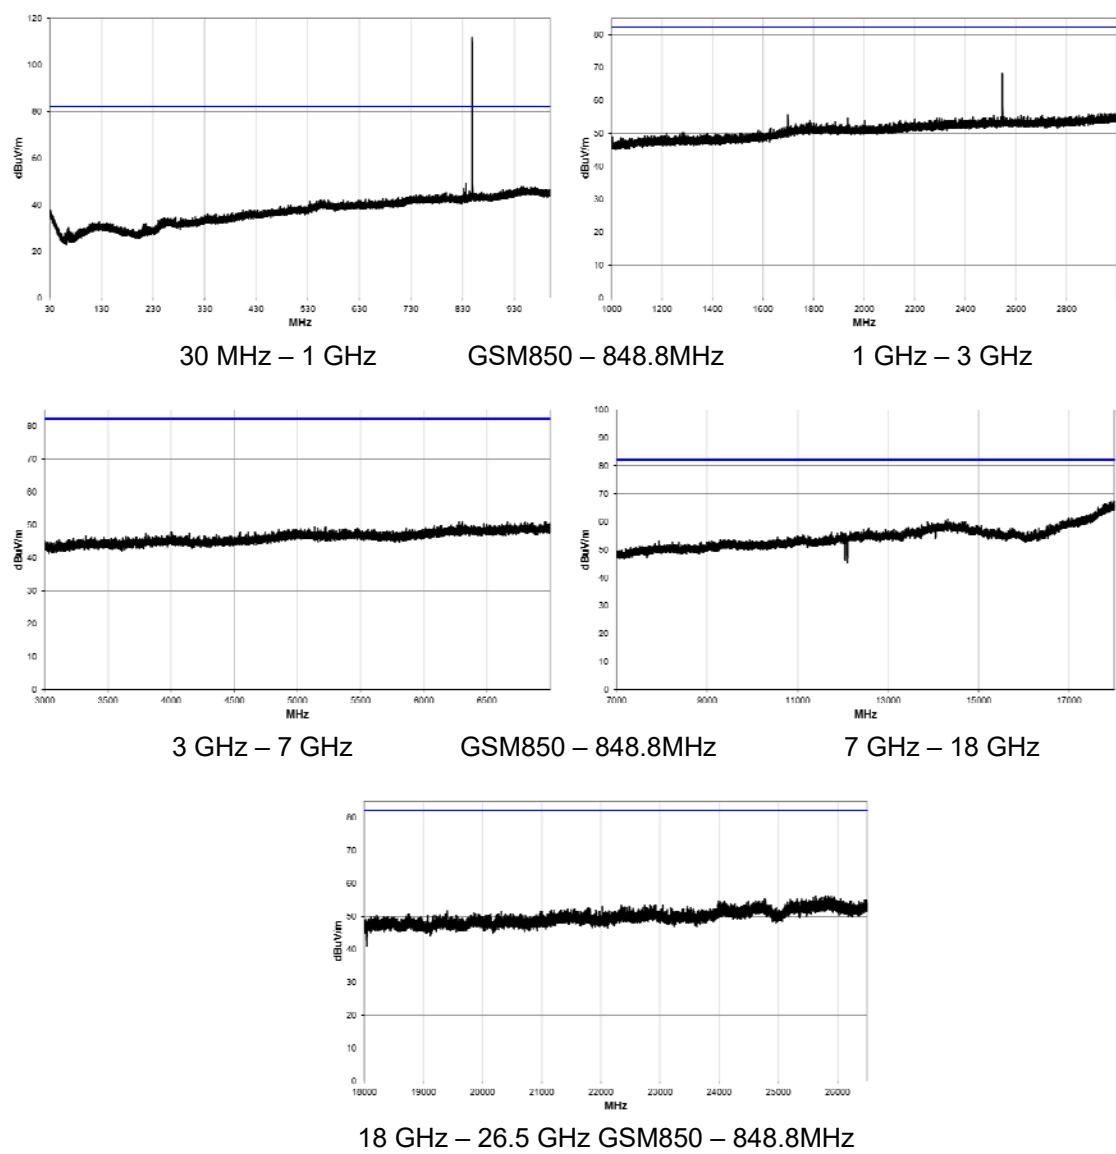




GSM 850 GPRS Top Frequency; 848.8 MHz CH251 Band 5					
Emission	Frequency (MHz)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Result
1	2546.625	-22.7	-13.0	-9.7	PASS
2	1697.625	-35.8	-13.0	-22.8	PASS

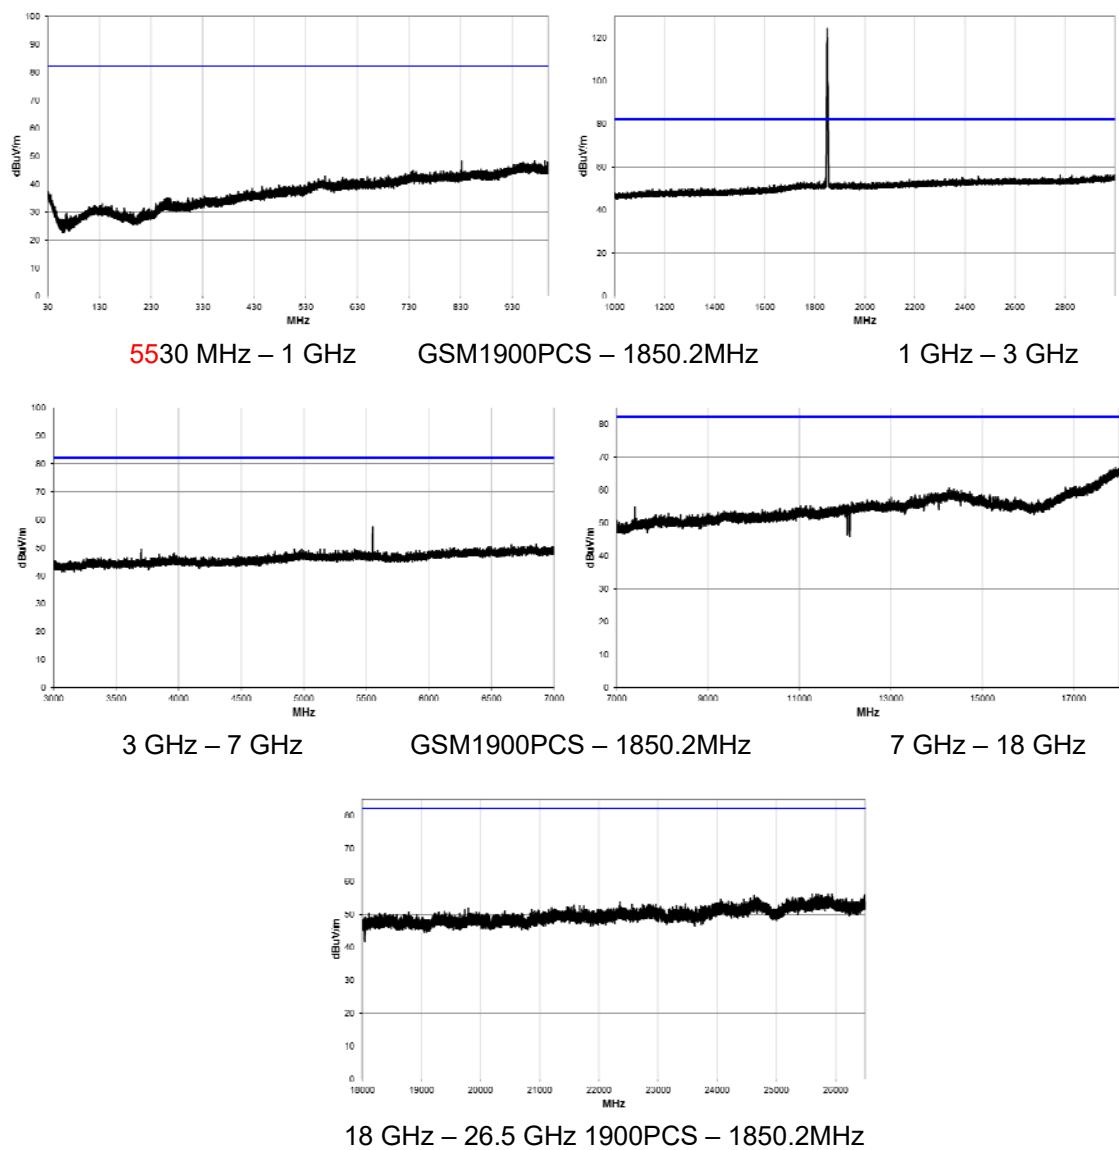

GSM 1900PCS GPRS Low Frequency; 1850.2 MHz CH512 Band 2					
<i>Emission</i>	<i>Frequency (MHz)</i>	<i>Emission level (dBm)</i>	<i>Limit (dBm)</i>	<i>Margin (dB)</i>	<i>Result</i>
1	5550.833	-35.6	-13.0	-22.6	PASS
2	7400.750	-37.9	-13.0	-24.9	PASS

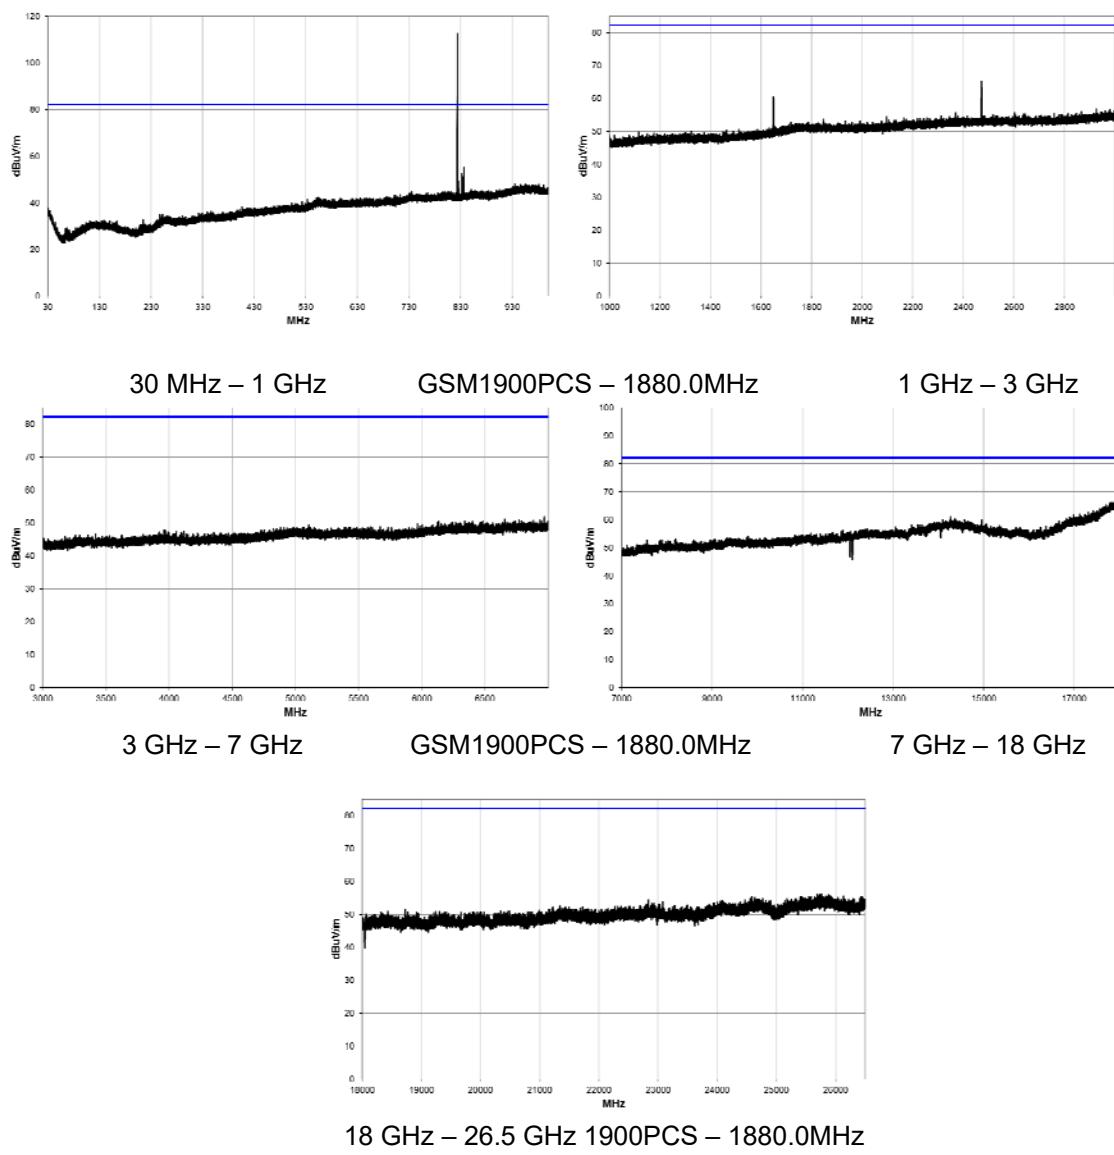


GSM 1900PCS GPRS Middle Frequency; 1880.0 MHz CH661 Band 2					
Emission	Frequency (MHz)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Result
1	5640.208	-33.4	-13.0	-20.4	PASS

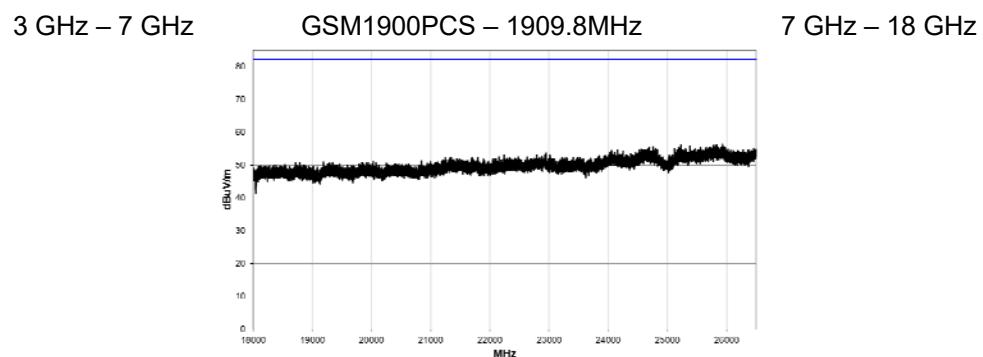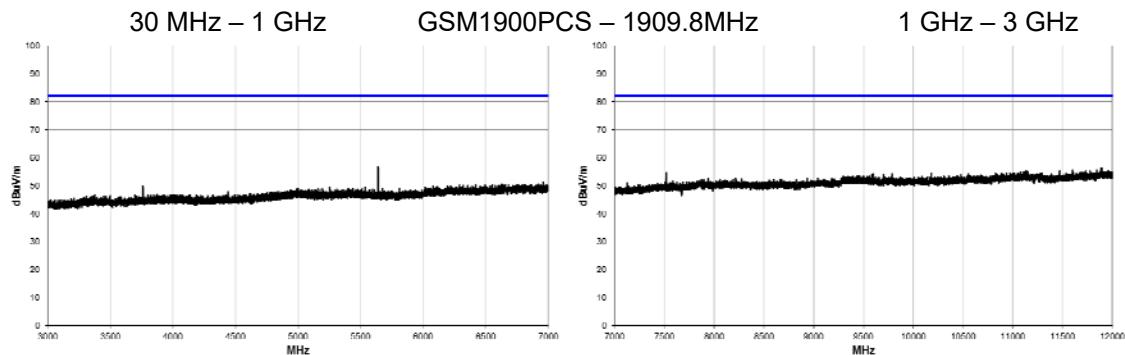
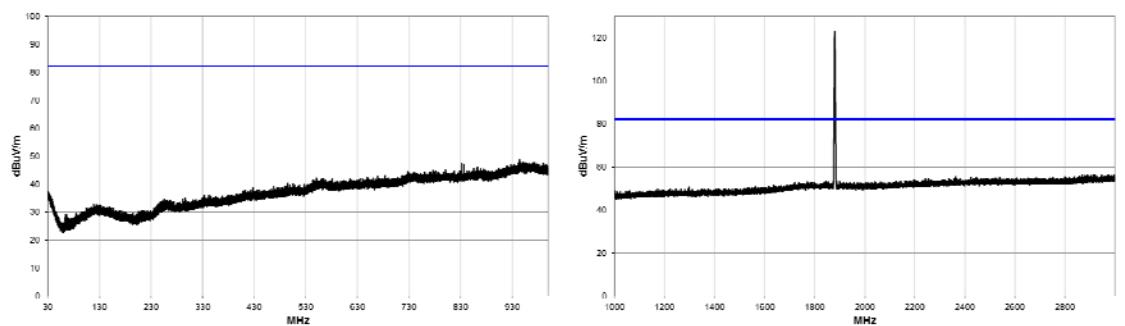


18 GHz – 26.5 GHz 1900PCS – 1909.8MHz




GSM 1900PCS GPRS Top Frequency; 1909.8 MHz CH810 Band 2					
<i>Emission</i>	<i>Frequency (MHz)</i>	<i>Emission level (dBm)</i>	<i>Limit (dBm)</i>	<i>Margin (dB)</i>	<i>Result</i>
1	5729.375	-28.7	-13.0	-15.7	PASS

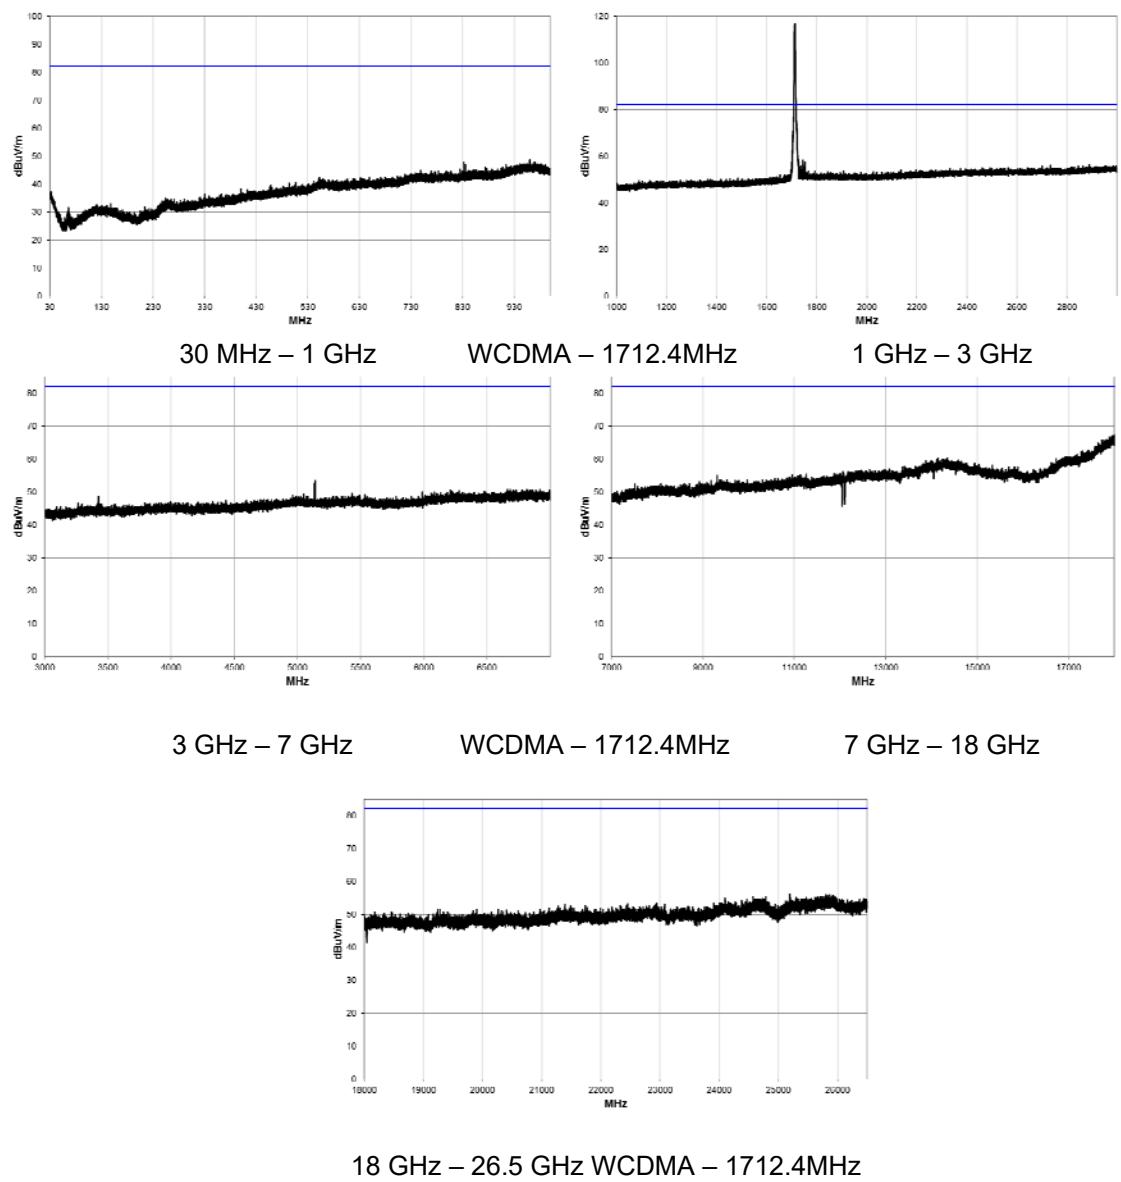


WCDMA Low Frequency; 1712.4 MHz CH1312 Band 4					
<i>Emission</i>	<i>Frequency (MHz)</i>	<i>Emission level (dBm)</i>	<i>Limit (dBm)</i>	<i>Margin (dB)</i>	<i>Result</i>
1	5140.250	-40.6	-13.0	-27.6	PASS

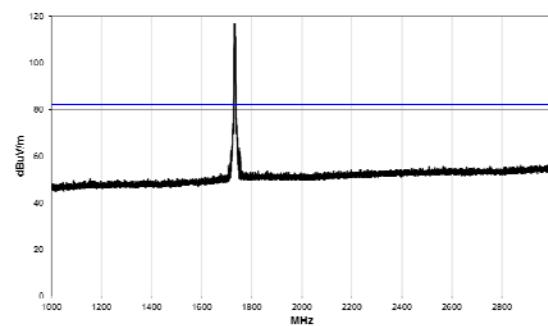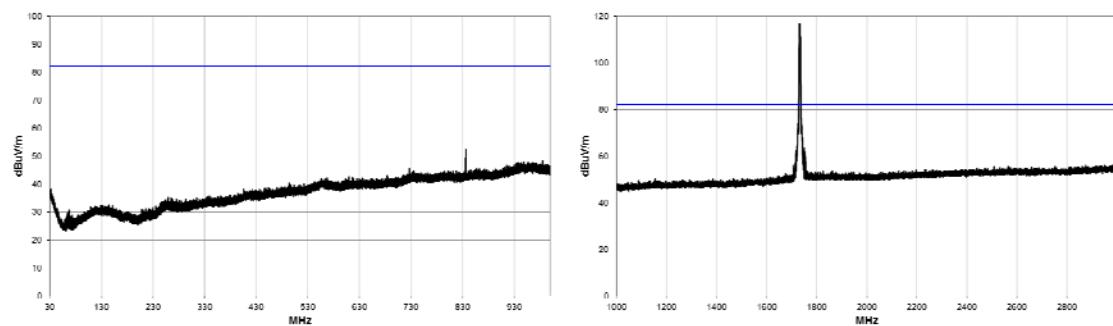

1 GHz – 3 GHz

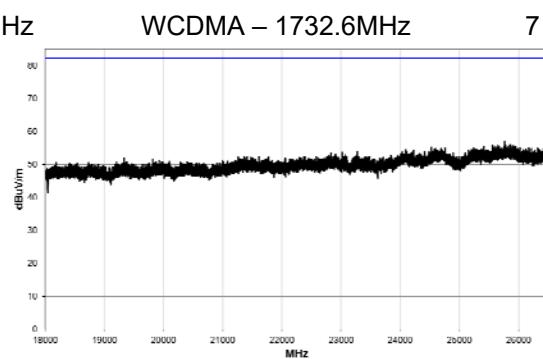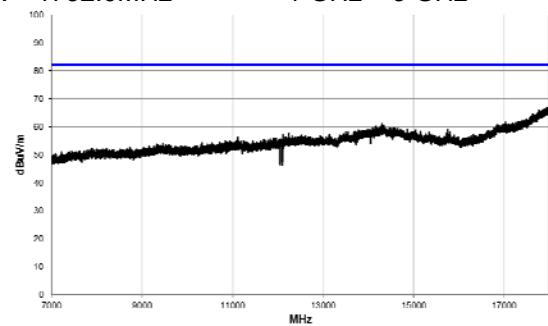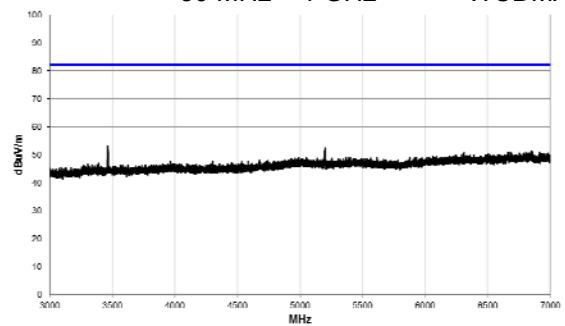**WCDMA Middle Frequency; 1732.6 MHz CH1413 Band 4**


<i>Emission</i>	<i>Frequency (MHz)</i>	<i>Emission level (dBm)</i>	<i>Limit (dBm)</i>	<i>Margin (dB)</i>	<i>Result</i>
1	3466.958	-38.4	-13.0	-25.4	PASS

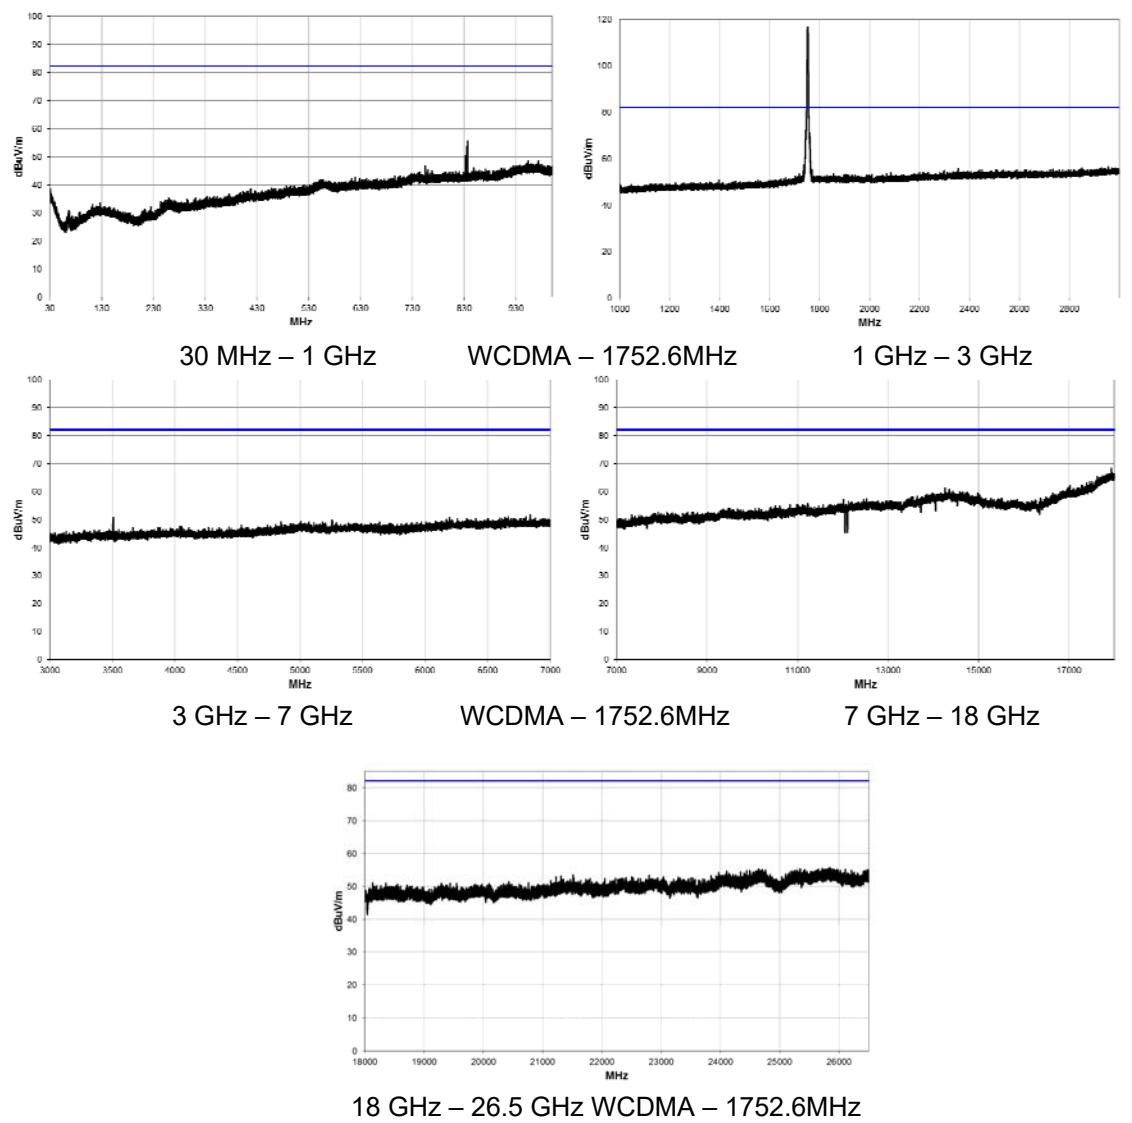


WCDMA Top Frequency; 1752.6 MHz CH1513 Band 4

Emission	Frequency (MHz)	Emission level (dBm)	Limit (dBm)	Margin (dB)	Result
1	3507.583	-41.1	-13.0	-28.1	PASS
2	17929.50	-26.9	-13.0	-13.9	PASS

Bottom Channel LTE Band VII

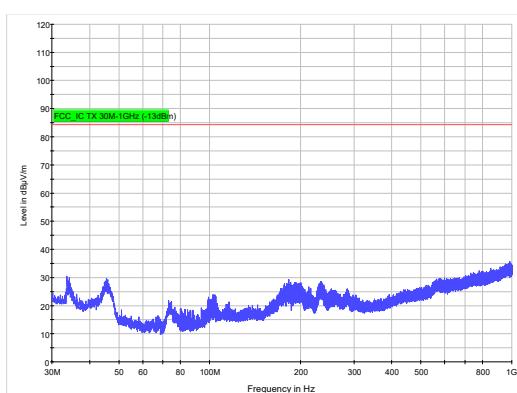


30 MHz to 1 GHz

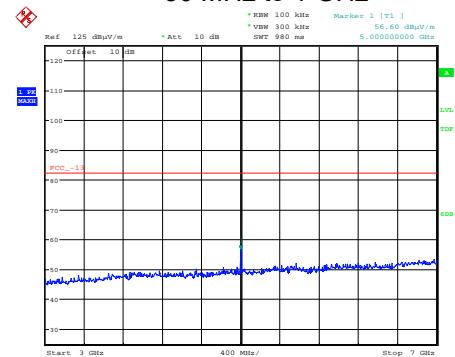


Date: 14.MAR.2019 16:11:49

3 GHz to 7 GHz

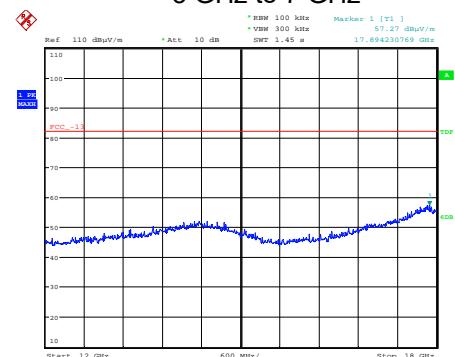


Date: 14.MAR.2019 14:21:20

12 GHz to 18 GHz

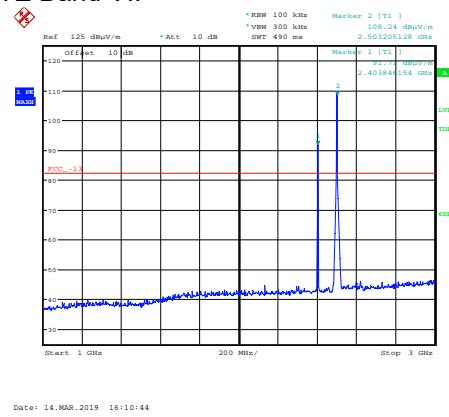


1 GHz to 3 GHz

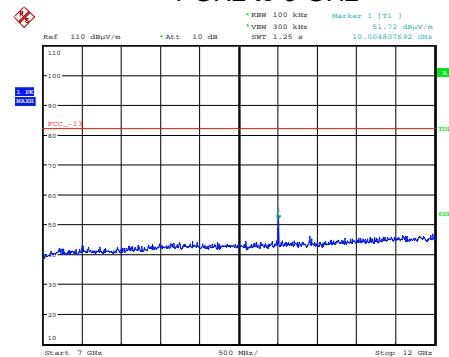

Date: 14.MAR.2019 14:22:31



7 GHz to 12 GHz

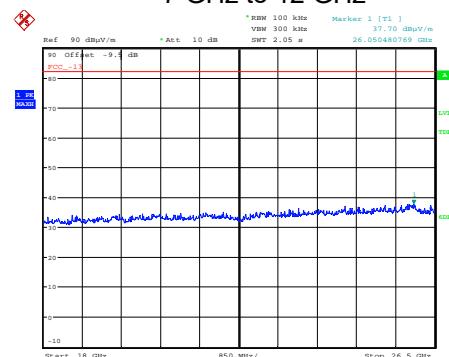



Date: 15.MAR.2019 08:02:31

18 GHz to 26.5 GHz

Top Channel LTE Band VII

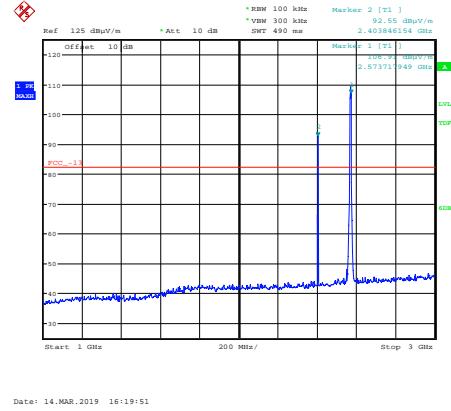
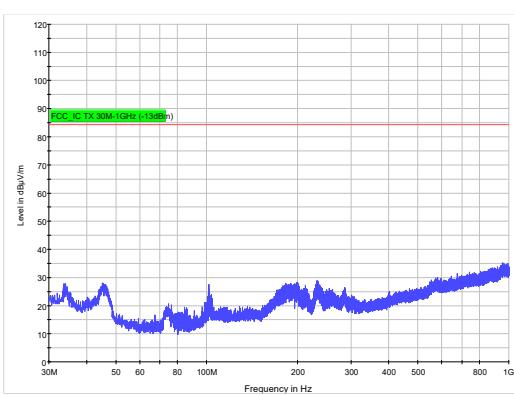


30 MHz to 1 GHz

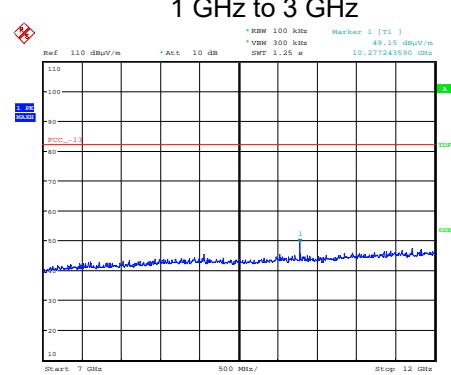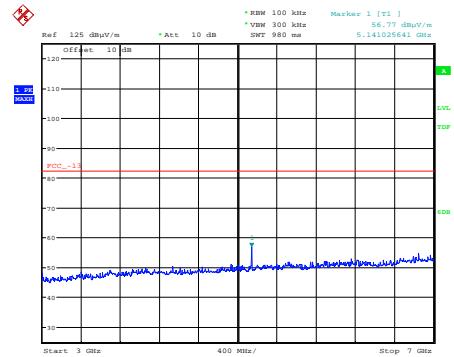

Date: 14.MAR.2019 16:18:26

3 GHz to 7 GHz

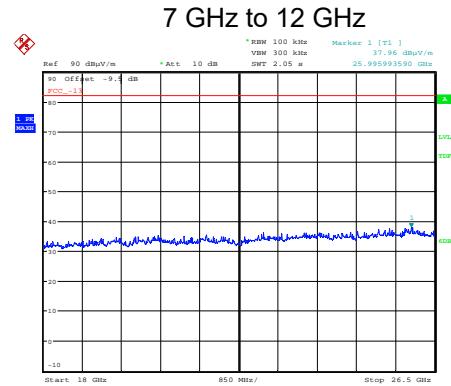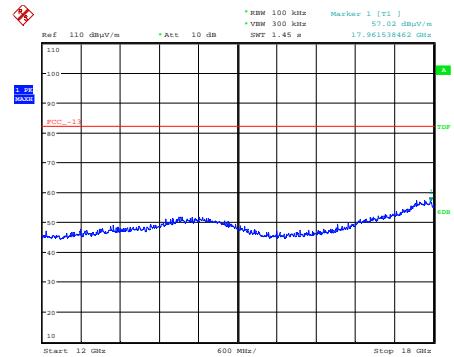



Date: 14.MAR.2019 14:14:23

12 GHz to 18 GHz


Date: 15.MAR.2019 08:03:32

18 GHz to 26.5 GHz


Bottom Channel LTE Band VII

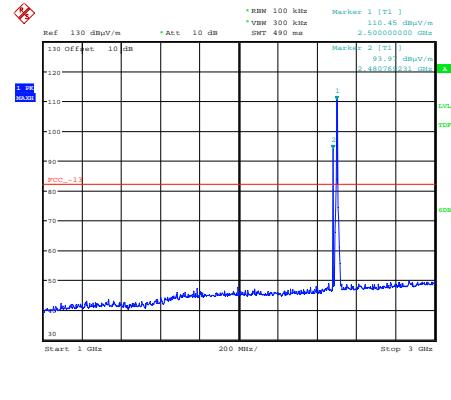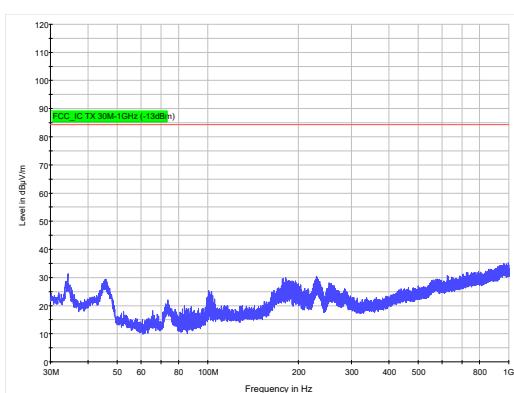


30 MHz to 1 GHz

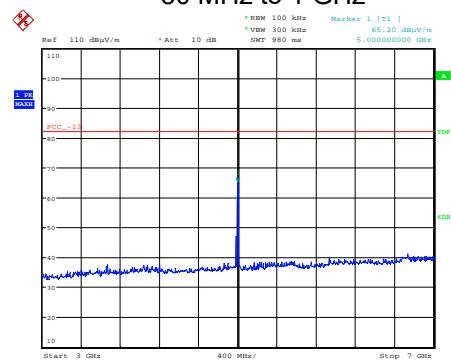


1 GHz to 3 GHz

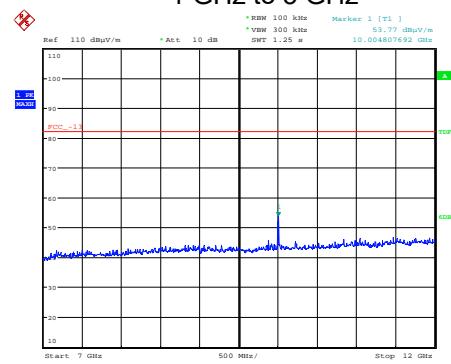

3 GHz to 7 GHz

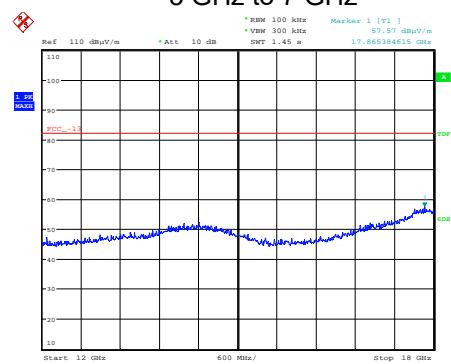

7 GHz to 12 GHz

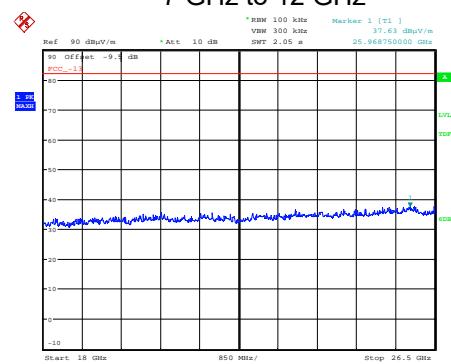



12 GHz to 18 GHz

Date: 14.MAR.2019 12:30:06


18 GHz to 26.5 GHz

Date: 14.MAR.2019 12:19:01


Top Channel LTE Band VII

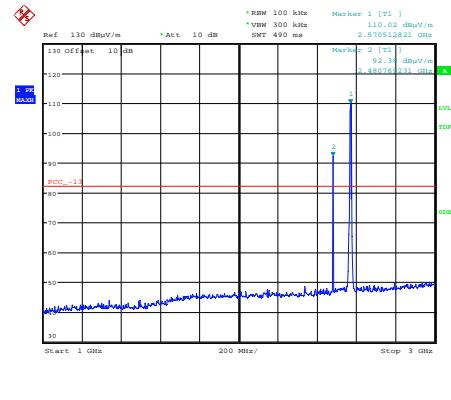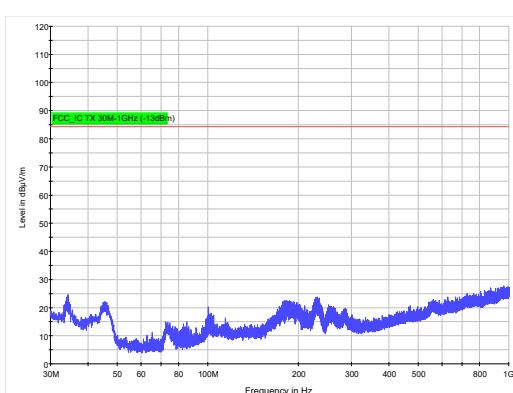


30 MHz to 1 GHz

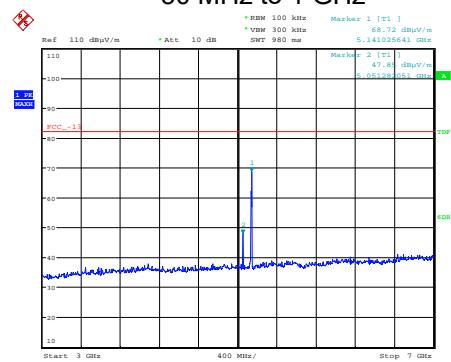


1 GHz to 3 GHz

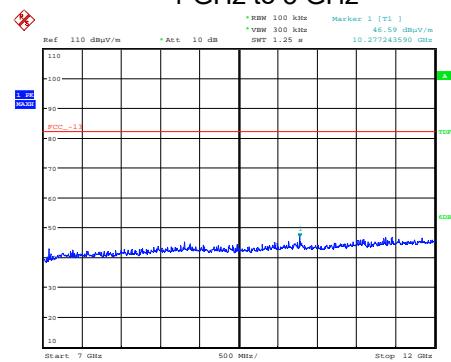

3 GHz to 7 GHz

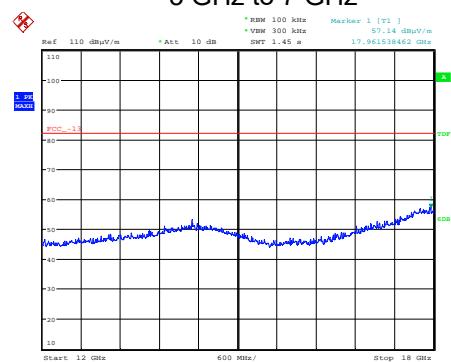

7 GHz to 12 GHz

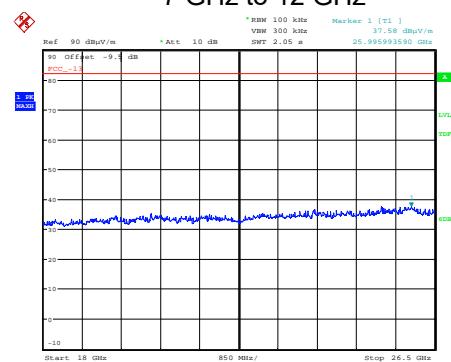

12 GHz to 18 GHz



Date: 14.MAR.2019 12:32:32

Date: 14.MAR.2019 12:20:32


18 GHz to 26.5 GHz

Date: 15.MAR.2019 07:27:15


Bottom Channel LTE Band XII

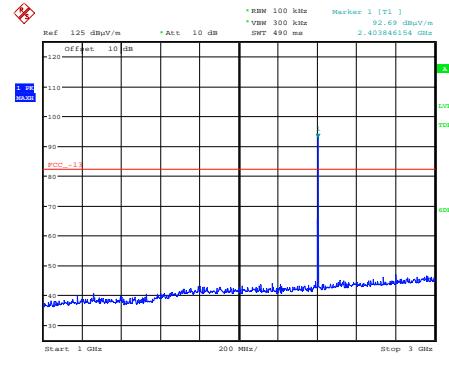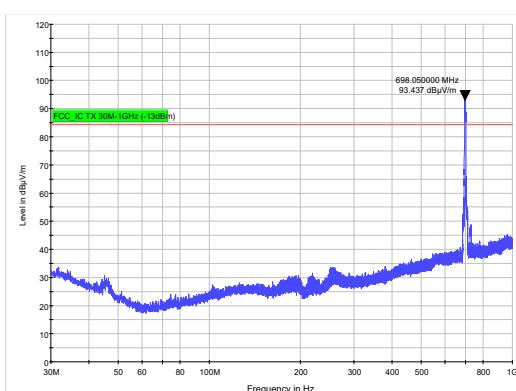

30 MHz to 1 GHz

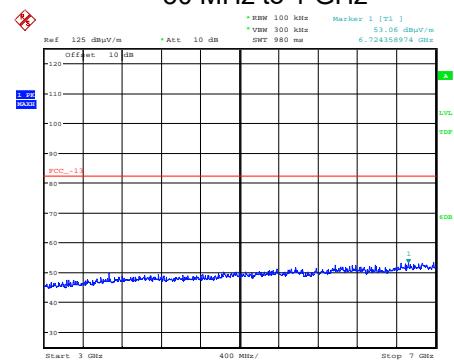


1 GHz to 3 GHz

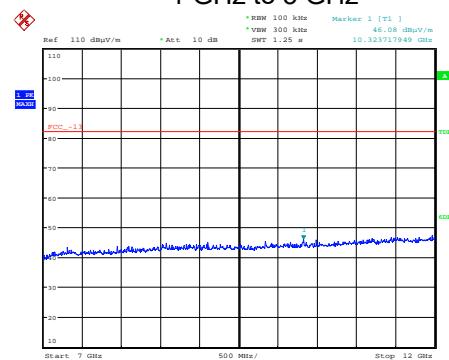


Date: 14.MAR.2019 16:29:52

3 GHz to 7 GHz

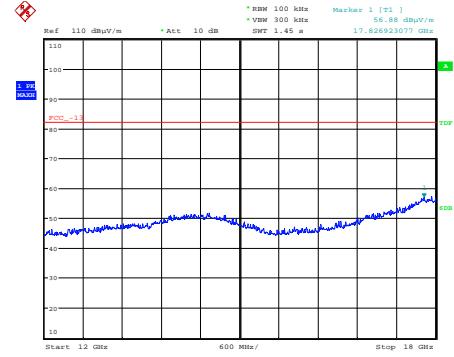

7 GHz to 12 GHz

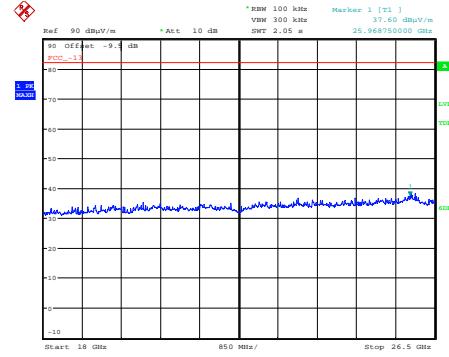



Date: 14.MAR.2019 14:00:05

12 GHz to 18 GHz


Date: 15.MAR.2019 08:07:12

18 GHz to 26.5 GHz


Top Channel LTE Band XII

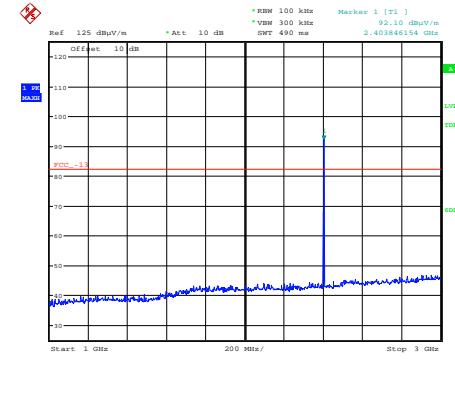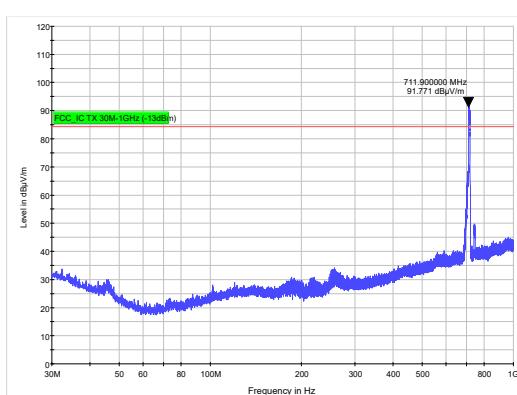


30 MHz to 1 GHz

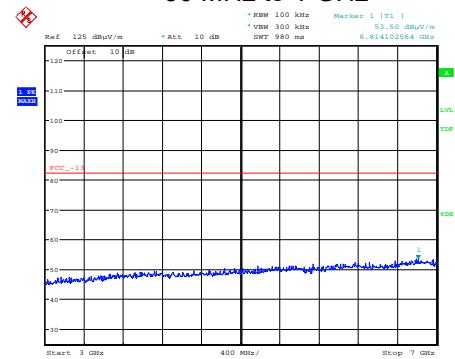


1 GHz to 3 GHz

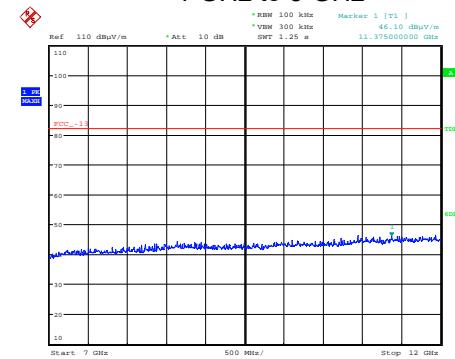

3 GHz to 7 GHz

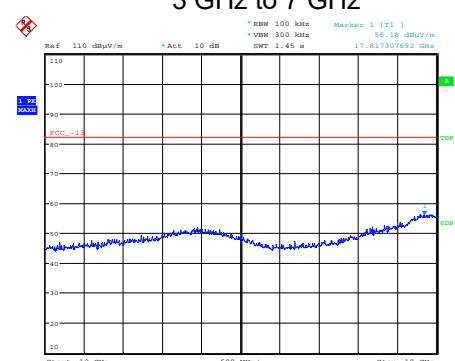

7 GHz to 12 GHz

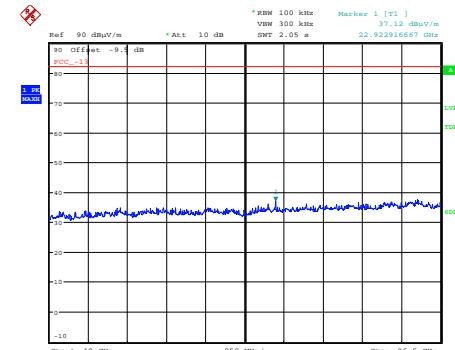

12 GHz to 18 GHz



Date: 14.MAR.2019 14:09:07

Date: 14.MAR.2019 14:10:02


18 GHz to 26.5 GHz

Date: 15.MAR.2019 08:20:52


Bottom Channel LTE Band XII

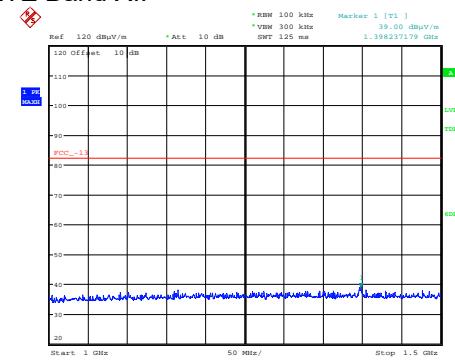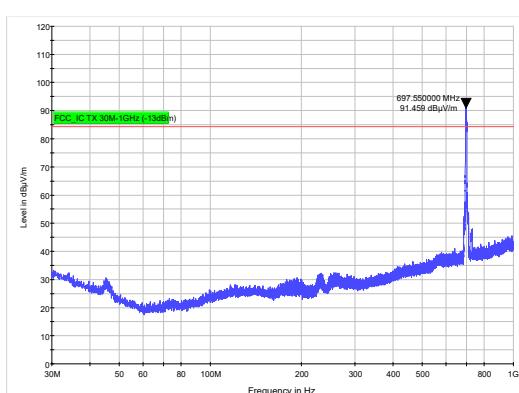


30 MHz to 1 GHz

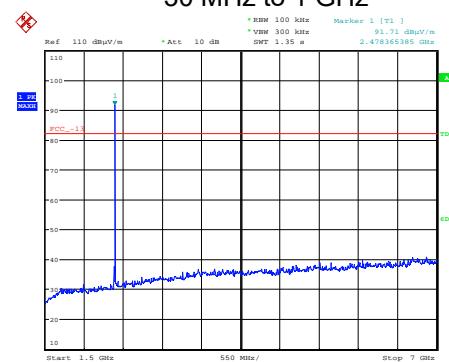


1 GHz to 1.5 GHz

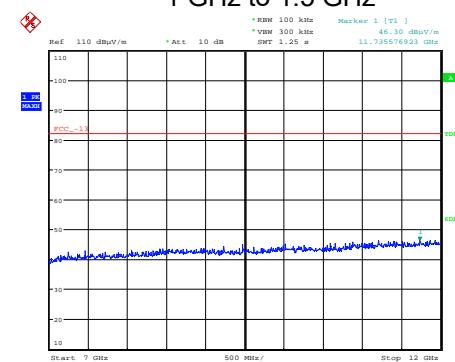

1.5 GHz to 7 GHz

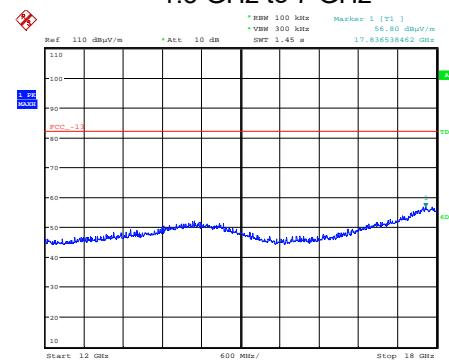

7 GHz to 12 GHz

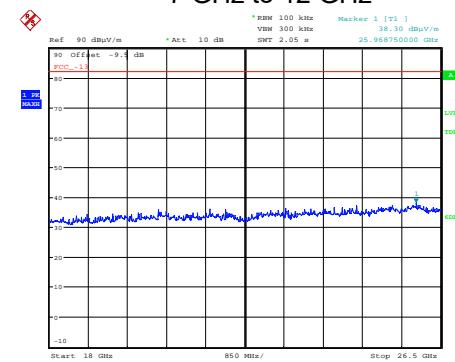



12 GHz to 18 GHz

Date: 14.MAR.2019 13:31:28


18 GHz to 26.5 GHz

Date: 14.MAR.2019 13:35:16


Top Channel LTE Band XII

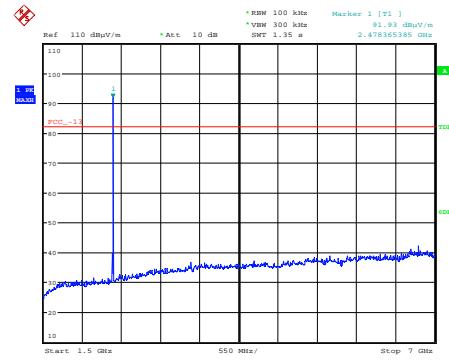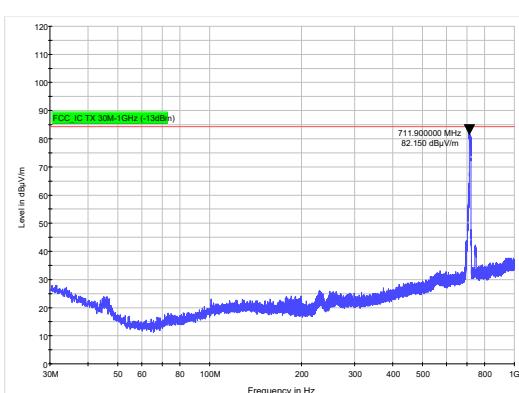


30 MHz to 1 GHz

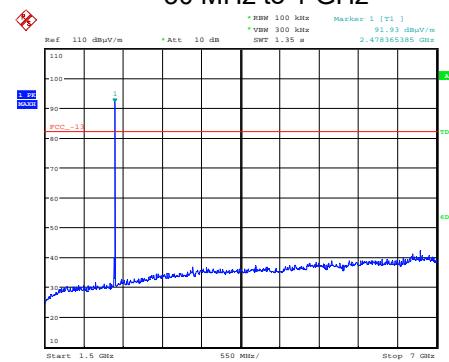


1 GHz to 1.5 GHz

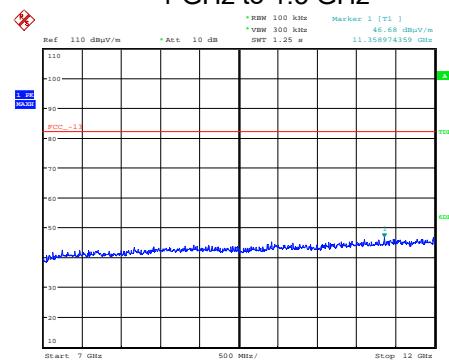

1.5 GHz to 7 GHz

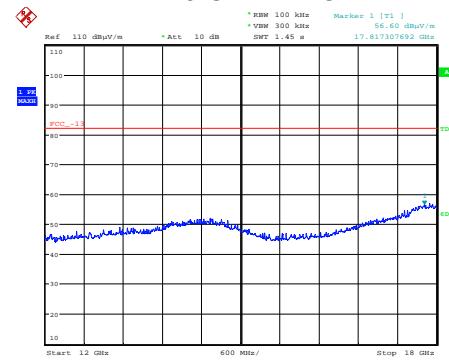

7 GHz to 12 GHz

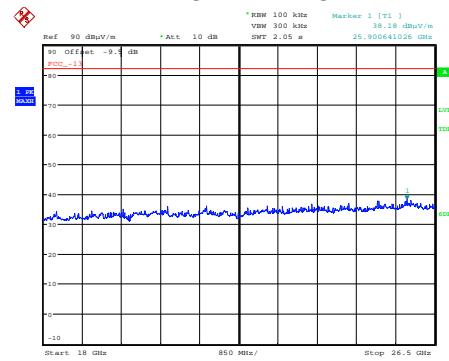

12 GHz to 18 GHz

Date: 14.MAR.2019 13:38:28

18 GHz to 26.5 GHz

Date: 15.MAR.2019 07:31:30

11 RF power output (mean output power)

11.1 Definition

The average power supplied to the antenna transmission line by a transmitter during an interval of time sufficiently long compared with the lowest frequency encountered in the modulation taken under normal operating conditions.

11.2 Test Parameters

Test Location:	Element Skelmersdale
Test Chamber:	Radio Laboratory
Test Standard and Clause:	KDB 935210 D05 v01, clause 3.5 KDB 971168, clause 5.2
Deviations From Standard:	None
Measurement Detector	Average; Burst Power

Environmental Conditions (Normal Environment)

Temperature: xx°C	+15 °C to +35 °C (as declared)
Humidity: xx%RH	20%RH to 75%RH (as declared)
Supply: xx V ac/dc	230Vac +/-10% (as declared)

11.3 Test Limits

FCC 47CFR22

22.913(a) *Maximum ERP*. In general, the effective radiated power (ERP) of base transmitters and cellular repeaters must not exceed 500 Watts. However, for those systems operating in areas more than 72 km (45 miles) from international borders that:

- (1) Are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census; or,
- (2) Extend coverage on a secondary basis into cellular unserved areas, as those areas are defined in §22.949,

the ERP of base transmitters and cellular repeaters of such systems must not exceed 1000 Watts. The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47CFR24

24.232(a)

- (1) Base stations with an emission bandwidth of 1 MHz or less are limited to 1640 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.
- (2) Base stations with an emission bandwidth greater than 1 MHz are limited to 1640 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT, except as described in paragraph (b) below.

24.232(b)

- (1) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth of 1 MHz or less are limited to 3280 watts equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.
- (2) Base stations that are located in counties with population densities of 100 persons or fewer per square mile, based upon the most recently available population statistics from the Bureau of the Census, with an emission bandwidth greater than 1 MHz are limited to 3280 watts/MHz equivalent isotropically radiated power (EIRP) with an antenna height up to 300 meters HAAT.

24.232(c) Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

FCC 47CFR27

27.50(a) The following power limits and related requirements apply to stations transmitting in the 2305–2320 MHz band or the 2345–2360 MHz band.

(1) *Base and fixed stations.*

(i) For base and fixed stations transmitting in the 2305–2315 MHz band or the 2350–2360 MHz band:

(A) The average equivalent isotropically radiated power (EIRP) must not exceed 2,000 watts within any 5 megahertz of authorized bandwidth and must not exceed 400 watts within any 1 megahertz of authorized bandwidth.

(ii) For base and fixed stations transmitting in the 2315–2320 MHz band or the 2345–2350 MHz band, the peak EIRP must not exceed 2,000 watts.

27.50(b) The following power and antenna height limits apply to transmitters operating in the 746–758 MHz, 775–788 MHz and 805–806 MHz bands:

(1) Fixed and base stations transmitting a signal in the 757–758 and 775–776 MHz bands must not exceed an effective radiated power (ERP) of 1000 watts and an antenna height of 305 m height above average terrain (HAAT), except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts ERP in accordance with Table 1 of this section.

(2) Fixed and base stations transmitting a signal in the 746–757 MHz and 776–787 MHz bands with an emission bandwidth of 1 MHz or less must not exceed an ERP of 1000 watts and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts ERP in accordance with Table 1 of this section.

(3) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal in the 746–757 MHz and 776–787 MHz bands with an emission bandwidth of 1 MHz or less must not exceed an ERP of 2000 watts and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 2000 watts ERP in accordance with Table 2 of this section.

(4) Fixed and base stations transmitting a signal in the 746–757 MHz and 776–787 MHz bands with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP in accordance with Table 3 of this section.

(5) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal in the 746–757 MHz and 776–787 MHz bands with an emission bandwidth greater than 1 MHz must not exceed an ERP of 2000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 2000 watts/MHz ERP in accordance with Table 4 of this section.

(9) Control stations and mobile stations transmitting in the 746–757 MHz, 776–788 MHz, and 805–806 MHz bands and fixed stations transmitting in the 787–788 MHz and 805–806 MHz bands are limited to 30 watts ERP.

27.50(c) The following power and antenna height requirements apply to stations transmitting in the 698–746 MHz band

(1) Fixed and base stations transmitting a signal with an emission bandwidth of 1 MHz or less must not exceed an effective radiated power (ERP) of 1000 watts and an antenna height of 305 m height above average terrain (HAAT), except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts ERP in accordance with Table 1 of this section;

(2) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal with an emission bandwidth of 1 MHz or less must not exceed an ERP of 2000 watts and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 2000 watts ERP in accordance with Table 2 of this section;

(3) Fixed and base stations transmitting a signal with an emission bandwidth greater than 1 MHz must not exceed an ERP of 1000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 1000 watts/MHz ERP in accordance with Table 3 of this section;

(4) Fixed and base stations located in a county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, and transmitting a signal with an emission bandwidth greater than 1 MHz must not exceed an ERP of 2000 watts/MHz and an antenna height of 305 m HAAT, except that antenna heights greater than 305 m HAAT are permitted if power levels are reduced below 2000 watts/MHz ERP in accordance with Table 4 of this section;

(7) A licensee authorized to operate in the 710–716 or 740–746 MHz bands may operate a fixed or base station at an ERP up to a total of 50 kW within its authorized, 6 megahertz spectrum block if the licensee complies with the provisions of §27.55(b). The antenna height for such stations is limited only to the extent required to satisfy the requirements of § 27.55(b).

(9) Control and mobile stations are limited to 30 watts ERP;

(12) A licensee authorized to operate in the 716–722 or 722–728 MHz bands may operate a fixed or base station at an ERP up to a total of 50 kW within its authorized, 6 megahertz spectrum block if the licensee complies with the provisions of §27.55(b), obtains written concurrences from all affected licensees in the 698–746 MHz bands within 120 km of the proposed high power site, and files a copy of each written concurrences with the Wireless Telecommunications Bureau on FCC Form 601. The antenna height for such stations is limited only to the extent required to satisfy the requirements of § 27.55(b).

27.50(d) The following power and antenna height requirements apply to stations transmitting in the 1695–1710 MHz, 1710–1755 MHz, 1755–1780 MHz, 1915–1920 MHz, 1995–2000 MHz, 2000–2020 MHz, 2110–2155 MHz, 2155–2180 MHz and 2180–2200 MHz bands:

(1) The power of each fixed or base station transmitting in the 1995–2000 MHz, 2110–2155 MHz, 2155–2180 MHz or 2180–2200 MHz band and located in any county with population density of 100 or fewer persons per square mile, based upon the most recently available population statistics from the Bureau of the Census, is limited to:

- (i) An equivalent isotropically radiated power (EIRP) of 3280 watts when transmitting with an emission bandwidth of 1 MHz or less;
- (ii) An EIRP of 3280 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.

(2) The power of each fixed or base station transmitting in the 1995–2000 MHz, the 2110–2155 MHz 2155–2180 MHz band, or 2180–2200 MHz band and situated in any geographic location other than that described in paragraph (d)(1) of this section is limited to:

- (i) An equivalent isotropically radiated power (EIRP) of 1640 watts when transmitting with an emission bandwidth of 1 MHz or less;
- (ii) An EIRP of 1640 watts/MHz when transmitting with an emission bandwidth greater than 1 MHz.


(4) Fixed, mobile, and portable (handheld) stations operating in the 1710–1755 MHz band and mobile and portable stations operating in the 1695–1710 MHz and 1755–1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710–1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(9) Fixed, mobile and portable (handheld) stations operating in the 1915–1920 MHz band are limited to 300 milliwatts EIRP.

11.4 Test Method

The EUT was setup as per Figure iv, the CMW500 was used to measure the output of the antenna port and all path losses taken account of. The results were summed as in the tables below.

Figure i Test Setup

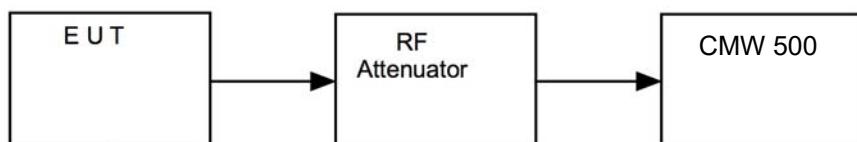

11.5 Test Equipment

Equipment Description	Manufacturer	Equipment Type	Element No	Last Cal Calibration	Calibration Period	Due For Calibration
Wideband Radio Communications Tested	Rohde & Schwarz	CMW500	Note 1	2019/06/25	12	2020/06/25

Note 1 : Hired test equipment serial number 119871

11.6 Test Results

Band	Technology	Modulation	Operation Bandwidth	Average Power (dBm)
Band 5	GSM850	GMSK	200 kHz	33.0
Band 2	1900PCS	GMKS	200 kHz	27.5
Band 5	WCDMA V	WCDMA	5 MHz	23.5
Band 2	WCDMA II	WCDMA	5 MHz	21.3
Band 4	WCDMA IV	WCDMA	5MHz	21.3
Band 2	LTE	QPSK	15 MHz	19.4
			20 MHz	18.9
Band 4	LTE	QPSK	15 MHz	18.0
			20 MHz	19.8
Band 5	LTE	QPSK	1.4 MHz	21.5
			10 MHz	21.3
Band 7	LTE	QPSK	20 MHz	21.7
Band 12	LTE	QPSK	1.4 MHz	21.4
			10 MHz	20.2

GSM 850 Operation power reduction to 27 dBm				
Band	Operating Frequency	Modulation	Operation Bandwidth	Average Power (dBm)
Band 5	824.2	GMSK	200 kHz	26.6
Band 5	836.6	GMSK	200 kHz	26.7
Band 5	848.8	GMSK	200 kHz	27.1

12 Measurement Uncertainty

Calculated Measurement Uncertainties

All statements of uncertainty are expanded standard uncertainty using a coverage factor of 1.96 to give a 95 % confidence:

[1] Radiated spurious emissions

Uncertainty in test result (30 MHz to 1 GHz) = **4.6 dB**
Uncertainty in test result (1 GHz to 18 GHz) = **4.7 dB**

[2] Carrier Power

Uncertainty in test result (Power Meter) = **1.08dB**
Uncertainty in test result (Spectrum Analyser) = **2.48dB**