



**InterLab®**

## Cinterion Wireless Module PXS8

**Report Reference:** MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

**Date:** June 27, 2012

**Test Laboratory:**

7Layers AG  
Borsigstr. 11  
40880 Ratingen  
Germany

Note:

The following test results relate only to the devices specified in this document. This report shall not be reproduced in parts without the written approval of the test laboratory.

7Layers AG  
Borsigstrasse 11  
40880 Ratingen, Germany  
Phone: +49 (0) 2102 749 0  
Fax: +49 (0) 2102 749 350  
[www.7Layers.com](http://www.7Layers.com)

Aufsichtsratsvorsitzender •  
Chairman of the Supervisory Board:  
Ralf Mertens  
Vorstand • Board:  
Dr. H.-J. Meckelburg



Registergericht • registered in:  
Düsseldorf, HRB 44096  
UST-IdNr • VAT No.:  
DE 203159652  
TAX No. 147/5869/0385



---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

## 1 Administrative Data

## 1.1 Project Data

*Project Responsible:* Mr. Pascal Jordam  
*Date Of Test Report:* 2012/06/27  
*Date of first test:* 2012/05/11  
*Date of last test:* 2012/05/18

## 1.2 Applicant Data

*Company Name:* Cinterion Wireless Modules GmbH

Street: Siemensdamm 50  
City: 13629 Berlin  
Country: Germany

*Contact Person:* Mr. Thorsten Liebich

*Function:* Manager Approval  
*Department:* Approvals & Standardization  
*Phone:* +49 (30) 31102-8241  
*Mobile:* +49 (160) 7074027  
*E-Mail:* thorsten.liebig@cinterion.com

### 1.3 Test Laboratory Data

The following list shows all places and laboratories involved for test result generation:

## 7 layers DE

*Company Name :* 7 layers AG  
*Street :* Borsigstrasse 11  
*City :* 40880 Ratingen  
*Country :* Germany  
*Contact Person :* Mr. Michael Albert  
*Phone :* +49 2102 749 201  
*Fax :* +49 2102 749 444  
*E Mail :* michael.albert@7Layers.de

## Laboratory Details

Lab ID	Identification	Responsible	Accreditation Info
Lab 1	Conducted Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkkS-Registration no. D-PL-12140-01-01
Lab 2	Radiated Emissions	Mr. Robert Machulec Mr. Andreas Petz	DAkkS-Registration no. D-PL-12140-01-01



---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

#### **1.4    Signature of the Testing Responsible**

-----  
Marco Kullik  
responsible for tests performed in: Lab 1, Lab 2

#### **1.5    Signature of the Accreditation Responsible**

-----  
Accreditation scope responsible person  
responsible for Lab 1, Lab 2



---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

## 2 Test Object Data

### 2.1 General OUT Description

The following section lists all OUTs (Object's Under Test) involved during testing.

#### OUT: PXS8

<i>Type / Model / Family:</i>	Cinterion Wireless Module PXS8
<i>Product Category:</i>	Module
<b>Manufacturer:</b>	
<i>Company Name:</i>	Cinterion Wireless Modules GmbH
<i>Street:</i>	Siemensdamm 50
<i>City:</i>	13629 Berlin
<i>Country:</i>	Germany
<i>Contact Person:</i>	Mr. Thorsten Liebig
<i>Function:</i>	Manager Approval
<i>Department:</i>	Approvals & Standardization
<i>Phone:</i>	+49 (30) 31102-8241
<i>Mobile:</i>	+49 (160) 7074027
<i>E-Mail:</i>	thorsten.liebig@cinterion.com

#### Parameter List:

Parameter name	Value
<b>Parameter for Scope FCC_v2:</b>	
Antenna gain 1900 band	not specified (dBi)
Antenna gain 850 band	not specified (dBi)
DC Power Supply	4.2 (V)
highest channel	251 (848.8MHz) for GSM850, 810 (1909.8MHz) for GSM1900, 4233 (846.6MHz) for FDD5, 9538 (1907.6MHz) for FDD2, 1013 (824.7MHz) for BC0, 1175 (1908.75MHz) for BC1
lowest channel	128 (824.2MHz) for GSM850, 512 (1850.2MHz) for GSM1900, 4132 (826.4MHz) for FDD5, 262 (1852.4MHz) for FDD2, 384 (836.5MHz) for BC0, 25 (1851.25MHz) for BC1
mid channel	190 (836.6MHz) for GSM850, 661 (1880.0MHz) for GSM1900, 4183 (836.6MHz) for FDD5, 9400 (1880MHz) for FDD2, 777 (848.3MHz) for BC0, 600 (1880.0MHz) for BC1



---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

## 2.2 Detailed Description of OUT Samples

### Sample : b01

<i>OUT Identifier</i>	PXS8		
<i>Sample Description</i>	Sample #02		
<i>Serial No.</i>	S30960-S2600-A100-1		
<i>HW Status</i>	B2		
<i>SW Status</i>	Rev. 00.100		
<i>Date of Receipt</i>	2012/03/02		
<i>Low Voltage</i>	3.3 V	<i>Low Temp.</i>	-10 °C
<i>High Voltage</i>	4.2 V	<i>High Temp.</i>	+55 °C
<i>Nominal Voltage</i>	4.2 V	<i>Normal Temp.</i>	+23 °C



---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

## 2.3 OUT Features

### Features for OUT: PXS8

Designation	Description	Allowed Values	Supported Value(s)
<b>Features for scope: FCC_v2</b>			
AC	The OUT is powered by or connected to AC Mains		
CDMA2000 _800	EUT supports CDMA2000 in band 824.7MHz - 848.3MHz (BC0)		
CDMA2000 _1900	EUT supports CDMA2000 in band 1851.25MHz - 1908.75MHz (BC1)		
CDMA2000 _EV-DO_800	EUT supports CDMA2000 EV-DO in band 824.7MHz - 848.3MHz (BC0)		
CDMA2000 _EV-DO_1900	EUT supports CDMA2000 EV-DO in band 1851.25MHz - 1908.75MHz (BC1)		
DC	The OUT is powered by or connected to DC Mains		
EDGE850	EUT supports EDGE in the band 824 MHz - 849 MHz		
EDGE1900	EUT supports EDGE in the band 1850 MHz - 1910 MHz		
FDD2	EUT supports UMTS FDD2 in the band 1850 MHz - 1910 MHz		
FDD5	EUT supports UMTS FDD5 in the band 824 MHz - 849 MHz		
GSM850	EUT supports GSM850 band 824MHz - 849MHz		
HSDPA-FDD2	EUT supports UMTS FDD2 HSDPA in the band 1850 MHz - 1910 MHz		
HSDPA-FDD5	EUT supports UMTS FDD5 HSDPA in the band 824 MHz - 849 MHz		
HSUPA-FDD2	EUT supports UMTS FDD2 HSUPA in the band 1850 MHz - 1910 MHz		
HSUPA-FDD5	EUT supports UMTS FDD5 HSUPA in the band 824 MHz - 849 MHz		
PantC	permanent fixed antenna connector, which may be built-in, designed as an indispensable part of the equipment		
PCS1900	EUT supports PCS1900 band 1850MHz - 1910MHz		



---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

## 2.4 Auxiliary Equipment

<i>AE No.</i>	<i>Type Designation</i>	<i>Serial No.</i>	<i>HW Status</i>	<i>SW Status</i>	<i>Description</i>
AE 02	-	-	-	-	Flex cable
AE Ant1	-	-	-	-	GSM/UMTS antenna
AE 03	-	-	-	-	Shielded housing
AE Ant2	-	-	-	-	UMTS antenna
AE Ant3	ANN-MS-0-005 M827B	601657	-	-	GPS antenna
AE 06	Cherry RS 6000	G 0000273 2P28	-	-	Keyboard
AE 01	DSB75_B1.1_0152	-	-	-	Evaluation board
AE 08	LG Flatron L1740BQ	509WANF1W607	-	-	TFT display
AE 07	Logitech RX250	-	-	-	Optical mouse
AE 09	PS-2403D	-	-	-	AC/DC external power supply
AE 05	Toshiba PA3378E-3AC3	G71C0006R310	-	-	AC/DC Laptop Adapter
AE 04	Toshiba Tecra M9	87060248H	-	-	Laptop

## 2.5 Operating Mode(s)

<i>Ref.-No.</i>	<i>Description</i>
01	GSM 1900 TCH 661, GPS data over USB to Laptop
02	GPS data over USB to Laptop

## 2.6 Setups used for Testing

For each setup a relation is given to determine if and which samples and auxiliary equipment is used. The left side list all OUT samples and the right side lists all auxiliary equipment for the given setup. Every auxiliary equipment, connected to AC mains, was powered by 120 V, 60 Hz.

<i>Setup No.</i>	<i>List of OUT samples</i>	<i>List of auxiliary equipment</i>	
<i>Sample No.</i>	<i>Sample Description</i>	<i>AE No.</i>	<i>AE Description</i>
<b>B01_ACDC (Computer peripheral setup #02 (with AC/DC power supply))</b>			
Sample: b01	Sample #02	AE 02	Flex cable
		AE Ant1	GSM/UMTS antenna
		AE 03	Shielded housing
		AE Ant2	UMTS antenna
		AE Ant3	GPS antenna
		AE 06	Keyboard
		AE 01	Evaluation board
		AE 08	TFT display
		AE 07	Optical mouse
		AE 09	AC/DC external power supply
		AE 05	AC/DC Laptop Adapter
		AE 04	Laptop
<b>B01_comp_per (Computer peripheral setup #01)</b>			
Sample: b01	Sample #02	AE 02	Flex cable
		AE Ant1	GSM/UMTS antenna
		AE 03	Shielded housing
		AE Ant2	UMTS antenna
		AE Ant3	GPS antenna
		AE 06	Keyboard
		AE 01	Evaluation board
		AE 08	TFT display
		AE 07	Optical mouse
		AE 05	AC/DC Laptop Adapter
		AE 04	Laptop



---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

### 3 Results

#### 3.1 General

<b>Documentation of tested devices:</b>	Available at the test laboratory.
<b>Interpretation of the test results:</b>	The results of the inspection are described on the following pages, where 'Conformity' or 'Passed' means that the certification criteria were verified and that the tested device is conform to the applied standard.
	In cases where 'Declaration' is printed, the required documents are available in the manufacturers product documentation.
	In cases where 'not applicable' is printed, the test case requirements are not relevant to the specific equipment implementation.

#### 3.2 List of the Applicable Body

(Body for Scope: FCC\_v2)

<i>Designation</i>	<i>Description</i>
FCC47CFRChIPART15bRADIO FREQUENCY DEVICES	Part 15, Subpart B - Unintentional Radiators

#### 3.3 List of Test Specification

<i>Test Specification:</i>	<b>FCC part 2 and 15</b>
<i>Version</i>	10-1-11 Edition
<i>Title:</i>	PART 2 - GENERAL RULES AND REGULATIONS PART 15 - RADIO FREQUENCY DEVICES



---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

### 3.4 Summary

<i>Test Case Identifier / Name</i>	<i>Test (condition)</i>	<i>Result</i>	<i>Date of Test</i>	<i>Lab Ref.</i>	<i>Setup</i>
<b>15b.1 Conducted Emissions (AC Power Line) §15.107</b>					
15b.1; Mode = transmit		Passed operating mode: 02	2012/05/18	Lab 1	B01_comp_per
		Passed operating mode: 02	2012/05/18	Lab 1	B01_ACDC
<b>15b.2 Spurious Radiated Emissions §15.109</b>					
15b.2; Mode = transmit		Passed operating mode: 01	2012/05/11	Lab 2	B01_comp_per



---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

### 3.5 Detailed Results

#### 3.5.1 15b.1 Conducted Emissions (AC Power Line) §15.107

##### Test1: 15b.1; Mode = transmit

*Result:* Passed

*Setup No.:* B01\_ACDC

*Date of Test:* 2012/05/18 14:40

*Body:* FCC47CFRChIPART15bRADIO FREQUENCY DEVICES


*Test Specification:* FCC part 2 and 15

**Detailed Results:**
**AC MAINS CONDUCTED**

EUT: PXS8 (CZ900B01)  
 Manufacturer: Cinterion  
 Operating Condition: sending GPS data via USB to Control Laptop (normal setup)  
 Test Site: 7 layers Ratingen  
 Operator: GIZ/KUL  
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207  
 Comment:  
 Start of Test: 18.05.2012 / 15:44:21

**SCAN TABLE: "FCC Voltage"**

Short Description:			FCC Voltage			
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

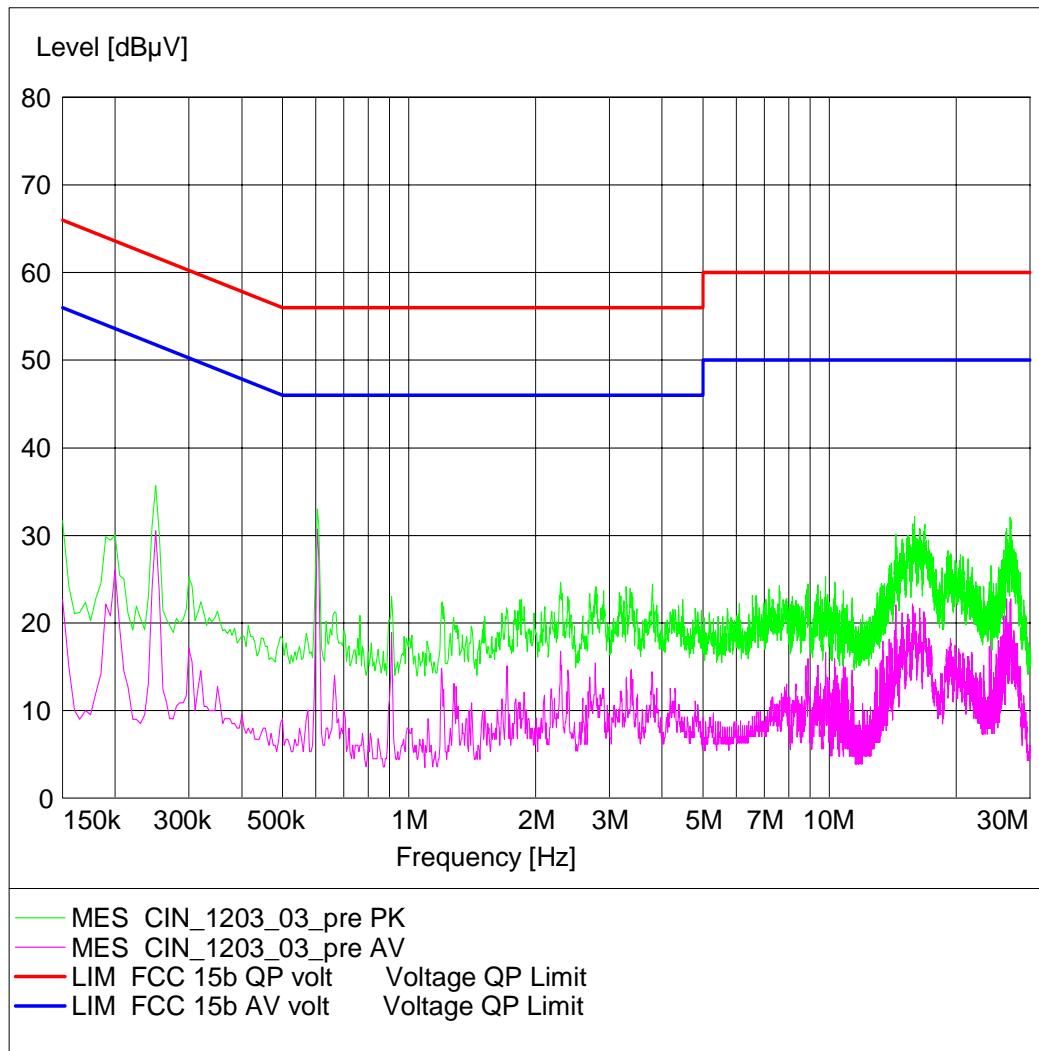



---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

**Test1: 15b.1; Mode = transmit**

*Result:* Passed

*Setup No.:* B01\_comp\_per

*Date of Test:* 2012/05/18 14:42

*Body:* FCC47CFRCHIPART15bRADIO FREQUENCY DEVICES


*Test Specification:* FCC part 2 and 15

**Detailed Results:**
**AC MAINS CONDUCTED**

EUT: PXS8 (CZ900b01)  
 Manufacturer: Cinterion  
 Operating Condition: sending GPS data via USB to Control Laptop (computer peripheral)  
 Test Site: 7 layers Ratingen  
 Operator: Giz  
 Test Specification: ANSI C63.4; FCC 15.107 / 15.207  
 Comment: requesting GPS data via USB to control Laptop (QXDM)  
 Start of Test: 18.05.2012 / 15:21:17

**SCAN TABLE: "FCC Voltage"**

Short Description:			FCC Voltage			
Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
150.0 kHz	30.0 MHz	5.0 kHz	MaxPeak	20.0 ms	9 kHz	ESH3-Z5
			Average			

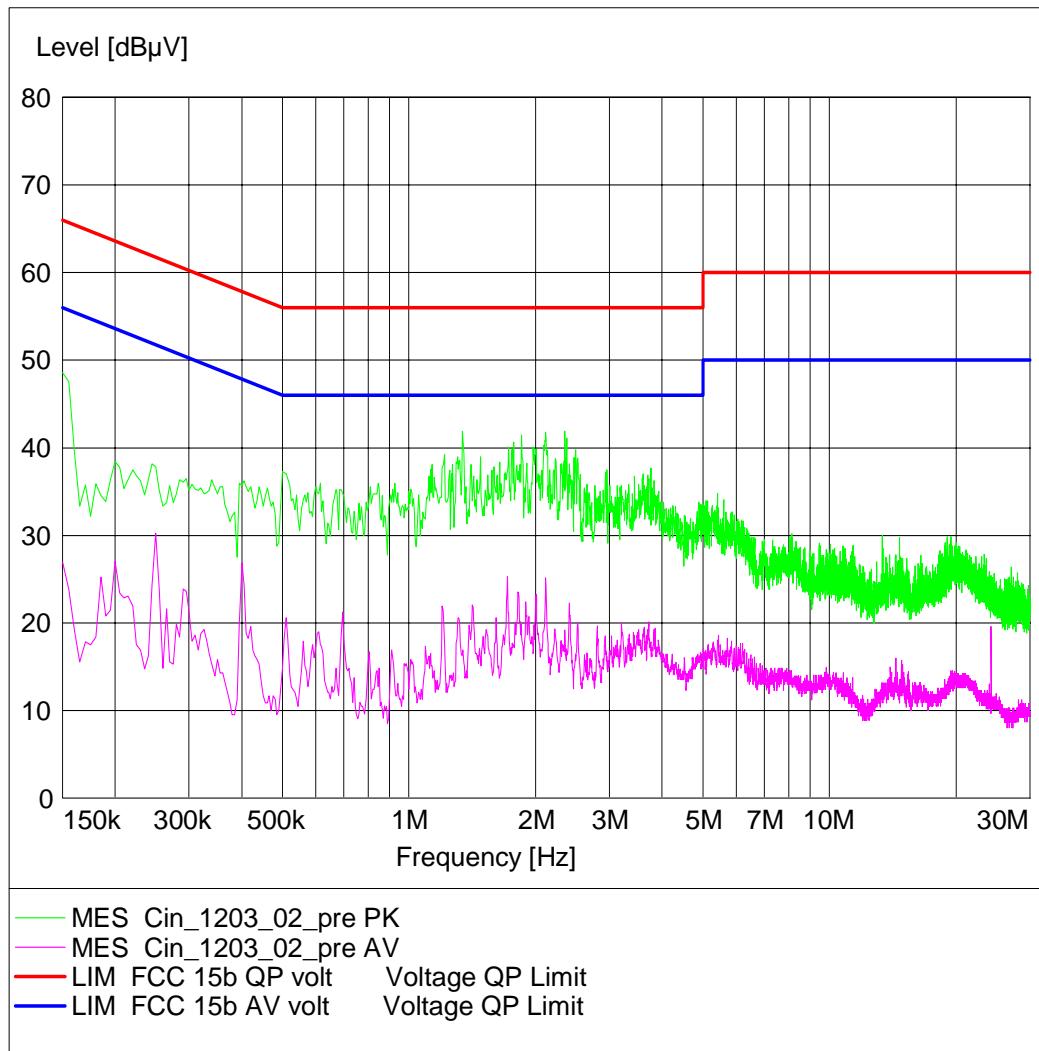



---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

### **3.5.2 15b.2 Spurious Radiated Emissions §15.109**

#### **Test: 15b.2; Mode = transmit**

*Result:* Passed

*Setup No.:* B01\_comp\_per

*Date of Test:* 2012/05/11 10:12

*Body:* FCC47CFRChIPART15bRADIO FREQUENCY DEVICES


*Test Specification:* FCC part 2 and 15

**Detailed Results:**
**EMI RADIATED TEST**

EUT: PXS8 (CZ900b01)  
 Manufacturer: Cinterion  
 Operating Condition: GSM 1900 TCH 661, GPS data over USB to Laptop  
 Test Site: 7 layers, Ratingen  
 Operator: Gal  
 Test Specification: FCC part 15 b  
 Comment: Horizontal EUT position  
 Start of Test: 11.05.2012 / 13:53:46

**SCAN TABLE: "FCC part 15 b"**

Start Frequency	Stop Frequency	Step Width	Detector	Meas.	IF Time	Transducer
30.0 MHz	1.0 GHz	60.0 kHz	MaxPeak	1.0 ms	120 kHz	HL562

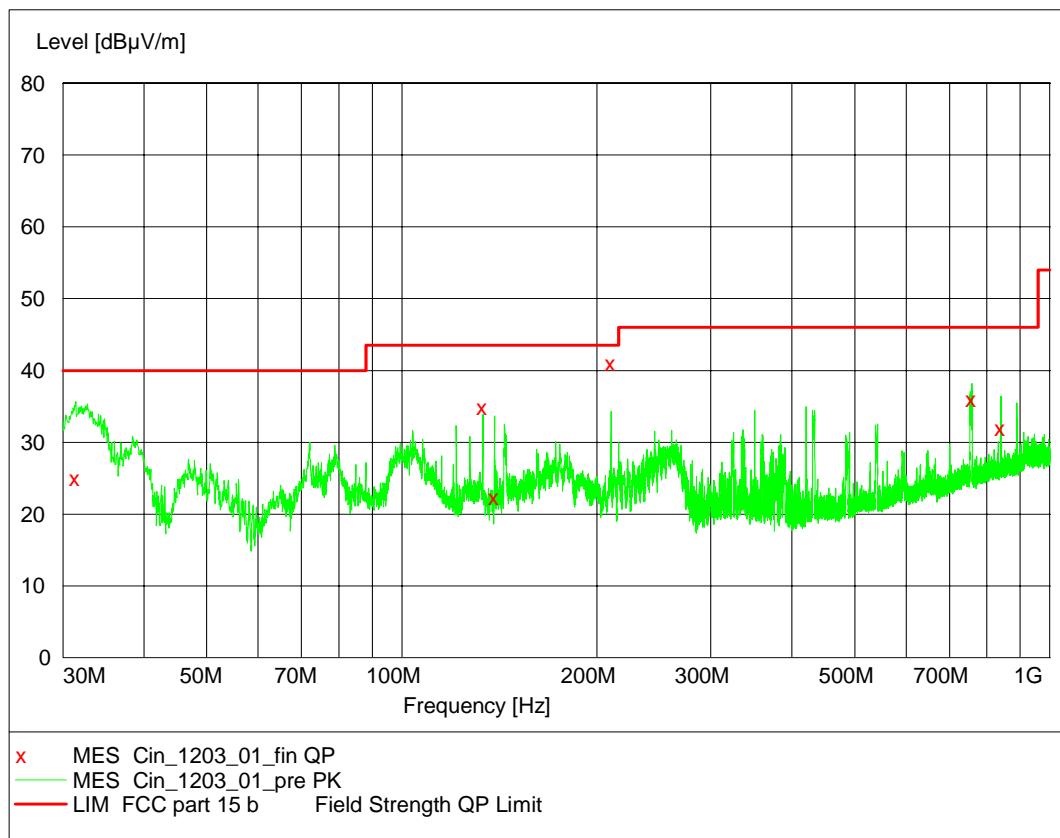
**MEASUREMENT RESULT: "Cin\_1203\_01\_fin QP"**

11.05.2012 14:46							
Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Height cm	Azimuth deg	Polarisation
31.380000	25.00	19.8	40.0	15.0	100.0	202.00	VERTICAL
133.440000	34.90	9.8	43.5	8.6	325.0	202.00	HORIZONTAL
139.020000	22.30	9.5	43.5	21.2	325.0	248.00	HORIZONTAL
210.360000	41.00	9.3	43.5	2.5	150.0	22.00	HORIZONTAL
758.940000	36.00	22.1	46.0	10.0	105.0	202.00	VERTICAL
841.500000	31.90	22.9	46.0	14.1	107.0	158.00	VERTICAL

## 4 Test Equipment Details

### 4.1 List of Used Test Equipment

The calibration, hardware and software states are shown for the testing period.

#### Test Equipment Anechoic Chamber

<i>Lab ID:</i>	<b>Lab 2</b>
<i>Manufacturer:</i>	Frankonia
<i>Description:</i>	Anechoic Chamber for radiated testing
<i>Type:</i>	10.58x6.38x6.00 m <sup>3</sup>

#### Single Devices for Anechoic Chamber

Single Device Name	Type	Serial Number	Manufacturer
Air compressor	none	-	Atlas Copco
Anechoic Chamber	10.58 x 6.38 x 6.00 m <sup>3</sup> <i>Calibration Details</i>	none	Frankonia <i>Last Execution</i> <i>Next Exec.</i>
	FCC listing 96716 3m Part15/18	2011/01/11	2014/01/10
	IC listing 3699A-1 3m	2011/02/07	2014/02/06
Controller Maturo	MCU	961208	Maturo GmbH
EMC camera	CE-CAM/1	-	CE-SYS
EMC camera Nr.2	CCD-400E	0005033	Mitsubishi
Filter ISDN	B84312-C110-E1		Siemens&Matsushita
Filter Universal 1A	BB4312-C30-H3	-	Siemens&Matsushita

#### Test Equipment Auxiliary Equipment for Conducted emissions

<i>Lab ID:</i>	<b>Lab 1</b>
<i>Manufacturer:</i>	Rohde & Schwarz GmbH & Co.KG
<i>Description:</i>	EMI Conducted Auxiliary Equipment

#### Single Devices for Auxiliary Equipment for Conducted emissions

Single Device Name	Type	Serial Number	Manufacturer
Cable "LISN to ESI"	RG214 <i>Calibration Details</i>	W18.03+W48.03	Huber&Suhner <i>Last Execution</i> <i>Next Exec.</i>
	Path Calibration		2011/11/11 2012/11/10
Two-Line V-Network	ESH 3-Z5	828304/029	Rohde & Schwarz GmbH & Co. KG
Two-Line V-Network	ESH 3-Z5 <i>Calibration Details</i>	829996/002	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> <i>Next Exec.</i>
	DKD calibration		2011/01/20 2013/01/19

**Test Equipment Auxiliary Equipment for Radiated emissions**

**Lab ID:** Lab 2  
**Description:** Equipment for emission measurements  
**Serial Number:** see single devices

**Single Devices for Auxiliary Equipment for Radiated emissions**

Single Device Name	Type	Serial Number	Manufacturer
Antenna mast	AS 620 P	620/37	HD GmbH
Biconical dipole	VUBA 9117 <i>Calibration Details</i>	9117-108	Schwarzbeck <i>Last Execution</i> Next Exec.
	Standard Calibration		2008/10/27 2013/10/26
	Standard Calibration		2012/01/18 2015/01/17
Broadband Amplifier 18MHz-26GHz	JS4-18002600-32-5P <i>Calibration Details</i>	849785	Miteq <i>Last Execution</i> Next Exec.
	Path Calibration		2011/11/15 2012/05/14
Broadband Amplifier 1GHz-4GHz	AFS4-01000400-1Q-10P-4 <i>Calibration Details</i>	-	Miteq <i>Last Execution</i> Next Exec.
	Path Calibration		2011/11/15 2012/05/14
Broadband Amplifier 30MHz-18GHz	JS4-00101800-35-5P <i>Calibration Details</i>	896037	Miteq <i>Last Execution</i> Next Exec.
	Path Calibration		2011/11/15 2012/05/14
Cable "ESI to EMI Antenna"	EcoFlex10 <i>Calibration Details</i>	W18.01- 2+W38.01-2	Kabel Kusch <i>Last Execution</i> Next Exec.
	Path Calibration		2011/11/15 2012/05/14
Cable "ESI to Horn Antenna"	UFB311A+UFB293C <i>Calibration Details</i>	W18.02- 2+W38.02-2	Rosenberger Micro-Coax <i>Last Execution</i> Next Exec.
	Path Calibration		2011/11/15 2012/05/14
Double-ridged horn	HF 906 <i>Calibration Details</i>	357357/001	Rohde & Schwarz GmbH & Co. KG <i>Last Execution</i> Next Exec.
	Standard Calibration		2012/05/18 2015/05/17
Double-ridged horn	HF 906	357357/002	Rohde & Schwarz GmbH & Co. KG
High Pass Filter	4HC1600/12750-1.5-KK <i>Calibration Details</i>	9942011	Trilithic <i>Last Execution</i> Next Exec.
	Path Calibration		2011/11/15 2012/05/14
High Pass Filter	5HC2700/12750-1.5-KK <i>Calibration Details</i>	9942012	Trilithic <i>Last Execution</i> Next Exec.
	Path Calibration		2011/11/15 2012/05/14
High Pass Filter	5HC3500/12750-1.2-KK <i>Calibration Details</i>	200035008	Trilithic <i>Last Execution</i> Next Exec.
	Path Calibration		2011/11/15 2012/05/14
High Pass Filter	WHKX 7.0/18G-8SS <i>Calibration Details</i>	09	Wainwright <i>Last Execution</i> Next Exec.
	Path Calibration		2011/11/15 2012/05/14
Log.-per. Antenna	HL 562 Ultralog	830547/003	Rohde & Schwarz GmbH & Co. KG



Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

### Single Devices for Auxiliary Equipment for Radiated emissions (continued)

Single Device Name	Type	Serial Number	Manufacturer
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard Calibration			2009/05/27   2012/05/26
Loop Antenna	HFH2-Z2	829324/006	Rohde & Schwarz GmbH & Co. KG
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Standard calibration			2011/10/27   2014/10/26
Pyramidal Horn Antenna 26,5 GHz	3160-09	00083069	EMCO Elektronik GmbH
Pyramidal Horn Antenna 40 GHz	3160-10	00086675	EMCO Elektronik GmbH
Tilt device Maturo (Rohacell)	Antrieb TD1.5-10kg	TD1.5-10kg/024/379070 9	Maturo GmbH

### Test Equipment Auxiliary Test Equipment

**Lab ID:** Lab 2  
**Manufacturer:** see single devices  
**Description:** Single Devices for various Test Equipment  
**Type:** various  
**Serial Number:** none

### Single Devices for Auxiliary Test Equipment

Single Device Name	Type	Serial Number	Manufacturer
Broadband Power Divider N (Aux)	1506A / 93459	LM390	Weinschel Associates
Broadband Power Divider SMA	WA1515	A855	Weinschel Associates
Digital Multimeter 03 (Multimeter)	Fluke 177	86670383	Fluke Europe B.V.
<i>Calibration Details</i>			<i>Last Execution</i> <i>Next Exec.</i>
Customized calibration			2011/10/19   2013/10/18
Fibre optic link Satellite (Aux)	FO RS232 Link	181-018	Pontis
Fibre optic link Transceiver (Aux)	FO RS232 Link	182-018	Pontis
Isolating Transformer	LTS 604	1888	Thalheimer Transformatorenwerke GmbH
Notch Filter Ultra Stable (Aux)	WRCA800/960-6EEK	24	Wainwright
Vector Signal Generator	SMIQ 03B	832492/061	Rohde & Schwarz GmbH & Co.KG

### Test Equipment Digital Signalling Devices

**Lab ID:** **Lab 1, Lab 2**

**Description:** Signalling equipment for various wireless technologies.

### Single Devices for Digital Signalling Devices

Single Device Name	Type	Serial Number	Manufacturer
Bluetooth Signalling Unit CBT	CBT	100589	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/11/24 2014/11/23
CMW500	CMW500	107500	Rohde & Schwarz GmbH & Co.KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Initial factory calibration		2012/01/26 2014/01/25
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Firmware: V.2.01.25		2012/04/20
	Tools: V 7.53.3.362		
	License Proxy: V 6.10.9.14		
	Rel-7:		
	KC42x ver. 11.36.0.1		
	Rel-8:		
	KC501: 1.04.5.24, 1.04.8.31, 1.05.1.34, 1.05.5.39, 1.06.5.44, 1.06.7.47, 1.07.0.49, 1.07.2.51		
	KC503: 1.04.8.4, 1.05.1.6, 1.05.5.10, 1.05.6.12, 1.06.7.15, 1.07.0.17, 1.07.2.18		
	KC507: 1.05.0.3, 1.06.0.7, 1.06.5.11, 1.07.0.13		
	KC508: 1.05.0.2, 1.06.0.6, 1.06.5.11, 1.07.0.13		
	KC551: 1.04.1.4, 1.04.8.7, 1.04.9.8, 1.05.5.9, 1.06.5.11, 1.06.7.13, 1.07.0.15, 1.07.2.17		
	KC553: 1.04.8.4, 1.04.9.6, 1.05.5.7, 1.06.5.9, 1.06.7.11, 1.07.0.13, 1.07.2.14		
	InterLab® LSIM Test Solution 1.6.7.4		
	InterLab® LSAT Test Solution 1.6.7.4		
	---		
Universal Radio Communication Tester	CMU 200	102366	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/05/26 2013/05/25
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Hardware:		2007/07/16
	B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B56V14, B68 3v04, PCMCIA, U65V04		
	Software:		
	K21 4v21, K22 4v21, K23 4v21, K24 4v21, K42 4v21, K43 4v21, K53 4v21, K56 4v22, K57 4v22, K58 4v22, K59 4v22, K61 4v22, K62 4v22, K63 4v22, K64 4v22, K65 4v22, K66 4v22, K67 4v22, K68 4v22, K69 4v22		
	Firmware:		
	µP1 8v50 02.05.06		
	---		
Universal Radio Communication Tester	CMU 200	837983/052	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard calibration		2011/12/07 2014/12/06
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>



Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

### Single Devices for Digital Signalling Devices (continued)

Single Device Name	Type	Serial Number	Manufacturer
HW options:			2007/01/02
B11, B21V14, B21-2, B41, B52V14, B52-2, B53-2, B54V14, B56V14, B68 3v04, B95, PCMCIA, U65V02			
SW options:			
K21 4v11, K22 4v11, K23 4v11, K24 4v11, K27 4v10, K28 4v10, K42 4v11, K43 4v11, K53 4v10, K65 4v10, K66 4v10, K68 4v10,			
Firmware:			
μP1 8v40 01.12.05			
---			
SW:			2008/11/03
K62, K69			

### Test Equipment Emission measurement devices

<b>Lab ID:</b>	<b>Lab 1, Lab 2</b>
<b>Description:</b>	Equipment for emission measurements
<b>Serial Number:</b>	see single devices

### Single Devices for Emission measurement devices

Single Device Name	Type	Serial Number	Manufacturer
Personal Computer	Dell	30304832059	Dell
Power Meter	NRVD	828110/016	Rohde & Schwarz GmbH & Co.KG
Sensor Head A	NRV-Z1	827753/005	Rohde & Schwarz GmbH & Co.KG
Signal Generator	SMR 20	846834/008	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	standard calibration		2011/05/12 2014/05/11
Spectrum Analyzer	ESIB 26	830482/004	Rohde & Schwarz GmbH & Co. KG
	<i>Calibration Details</i>		<i>Last Execution</i> <i>Next Exec.</i>
	Standard Calibration		2011/12/05 2013/12/04
	<i>HW/SW Status</i>		<i>Date of Start</i> <i>Date of End</i>
	Firmware-Update 4.34.4 from 3.45 during calibration		2009/12/03

### Test Equipment Shielded Room 02

<b>Lab ID:</b>	<b>Lab 1</b>
<b>Manufacturer:</b>	Frankonia
<b>Description:</b>	Shielded Room for conducted testing
<b>Type:</b>	12 qm
<b>Serial Number:</b>	none

## 4.2 Laboratory Environmental Conditions

Laboratory	Date	Temperature	Humidity	Air Pressure
Lab 1	2012/05/18	26 °C	34 %	1002 hPa
Lab 2	2012/05/11			



---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

**5        Annex**

**5.1      Additional Information for Report**



---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1

acc. Title 47 CFR chapter I part 15 subpart B

Test Description

---

---

---

Conducted emissions (AC power line)

---

Standard    FCC Part 15 Subpart B

The test was performed according to: ANSI C 63.4, 2009

Test Description

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2009.

The Equipment Under Test (EUT) was setup in a shielded room to perform the conducted emissions measurements in a typical installation configuration. The EUT was powered from  $50\mu\text{H} \parallel 50 \text{ Ohm Line Impedance Stabilization Network (LISN)}$  which meets the requirements of ANSI C63.4-2009, Annex B, in the frequency range of the measurements. The LISN's unused connections were terminated with 50 Ohm loads.

The measurement procedure consists of two steps. It is implemented into the EMI test software ES-K1 from R&S.

Step 1: Preliminary scan

Intention of this step is, to determine the conducted EMI-profile of the EUT.

EMI receiver settings:

- Detector: Peak - Maxhold
- Frequency range: 150 kHz – 30 MHz
- Frequency steps: 5 kHz
- IF-Bandwidth: 9 kHz
- Measuring time / Frequency step: 20 ms
- Measurement on phase + neutral lines of the power cords

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

Step 2: Final measurement

Intention of this step is, to determine the highest emissions with the settings defined in the test specification for the frequencies identified in step 1.

EMI receiver settings:

- Detector: Quasi-Peak
- IF - Bandwidth: 9 kHz
- Measuring time: 1 s / frequency

At each frequency determined in step 1, four measurements are performed in the following combinations:

- 1) Neutral lead - reference ground (PE grounded)
- 2) Phase lead - reference ground (PE grounded)
- 3) Neutral lead - reference ground (PE floating)
- 4) Phase lead - reference ground (PE floating)

The highest value is reported.

Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.107, Class B Limit

Frequency Range (MHz)	QP Limit (dB $\mu$ V)	AV Limit (dB $\mu$ V)
0.15 – 0.5	66 to 56	56 to 46
0.5 – 5	56	46
5 – 30	60	50



## FCC Part 15, Subpart B, §15.107, Class A Limit

Frequency Range (MHz)	QP Limit (dB $\mu$ V)	AV Limit (dB $\mu$ V)
0.15 - 0.5	79	66
0.5 - 30	73	60

Used conversion factor: Limit (dB $\mu$ V) = 20 log (Limit ( $\mu$ V)/1 $\mu$ V).

## NOTES:

A missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

The chosen operating mode is selected as representative mode to generate "worst-case" conditions, i.e. high power consumption.

---

**Spurious radiated emissions**

---

**Standard      FCC Part 15, Subpart B**

The test was performed according to: ANSI C 63.4, 2009

**Test Description****Measurement below 1 GHz:**

The test set-up was made in accordance to the general provisions of ANSI C 63.4-2009.

The Equipment Under Test (EUT) was set up on a non-conductive table 1.0 x 2.0 m in the semi-anechoic chamber. The influence of the EUT support table that is used between 30–1000 MHz was evaluated.

The test was performed at the distance of 3 m between the EUT and the receiving antenna. The measurement procedure is implemented into the EMI test software ES-K1 from R&S. The radiated emissions measurements were made in a typical installation configuration. Exploratory tests are performed at 3 orthogonal axes to determine the worst-case orientation of a body-worn or handheld EUT. The final test on all kind of EUTs is performed at 2 axes. A pre-check is also performed while the EUT is powered from both AC and DC (battery) power in order to find the worst-case operating condition.

**Step 1: Preliminary scan (test to identify the highest amplitudes relative to the limit)**

Intention of this step is, to determine the radiated EMI-profile of the EUT.

**Settings for step 1:**

- Detector: Peak-Maxhold
- Frequency range: 30 – 1000 MHz
- Frequency steps: 60 kHz
- IF-Bandwidth: 120 kHz
- Measuring time / Frequency step: 100  $\mu$ s
- Turntable angle range: -180° to +180°
- Turntable step size: 90°
- Height variation range: 1 – 3 m
- Height variation step size: 2 m
- Polarisation: Horizontal + Vertical

On basis of this preliminary scan the highest amplitudes and the corresponding frequencies relative to the limit are identified. Emissions above the limit and emissions which are in the 10 dB range below the limit are considered.

**Step 2:**

A further measurement will be performed on the frequencies determined in step 1. Intention of this step is, to find out the approximate turntable angle and antenna height for each frequency.

**Settings for step 2:**

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100 ms
- Turntable angle range: -180° to +180°



- Turntable step size: 45°
- Height variation range: 1 – 4 m
- Height variation step size: 0.5 m
- Polarisation: horizontal + vertical

After this step the EMI test system has determined the following values for each frequency (of step 1):

- Frequency
- Azimuth value (of turntable)
- Antenna height

The last two values have now the following accuracy:

- Azimuth value (of turntable): 45°
- Antenna height: 0.5 m

#### Step 3: final measurement

In this step the accuracy of the turntable azimuth and antenna height will be improved. This is necessary to find out the maximum value of every frequency.

For each frequency, which was determined the turntable azimuth and antenna height will be adjusted. The turntable azimuth will be slowly varied by +/- 22.5° around this value. During this action the value of emission is continuously measured. The turntable azimuth at the highest emission will be recorded and adjusted. In this position the antenna height is also slowly varied by +/- 25 cm around the antenna height determined. During this action the value of emission is also continuously measured. The antenna height of the highest emission will also be recorded and adjusted.

- Detector: Peak – Maxhold
- Measured frequencies: in step 1 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 100ms
- Turntable angle range: -22.5° to +22.5° around the determined value
- Height variation range: -0.25 m to +0.25 m around the determined value

#### Step 4: Final measurement (with QP detector)

With the settings determined in step 3, the final measurement will be performed:

EMI receiver settings for step 4:

- Detector: Quasi-Peak(< 1GHz)
- Measured frequencies: in step 3 determined frequencies
- IF – Bandwidth: 120 kHz
- Measuring time: 1 s

#### Measurement above 1 GHz:

The following modifications apply to the measurement procedure for the frequency range above 1 GHz: The measurement distance was reduced to 1 m. The results were extrapolated by the extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements, inverse-linear-distance-squared for the power density measurements). Due to the fact that in this frequency range a double ridged wave guided horn antenna (up to 18 GHz) and a horn antenna (18–25 GHz) are used, the steps 2-4 as described before, are omitted. Step 1 was performed at one height of the receiving antenna only.

Detector: Peak, Average (simultaneously)

RBW = VBW = 1 MHz; above 7 GHz 100 kHz

#### Test Requirements / Limits

If not stated within the measurement plot and/or test result, class B limits are applied.

FCC Part 15, Subpart B, §15.109, Radiated Emission Limits

Frequency Range (MHz): Class B Limit (dB $\mu$ V/m)

Frequency Range (MHz)	Class B Limit (dB $\mu$ V/m)
30 – 88	40.0
88 – 216	43.5
216 – 960	46.0
above 960	54.0

Frequency Range (MHz) Class A Limit (dB $\mu$ V/m) / @ 3m !

30 - 88	49.5
88 - 216	54.0
216 - 960	56.9
above 960	60.0




---

Reference: MDE\_CINTE\_1203\_FCC15a\_V1


acc. Title 47 CFR chapter I part 15 subpart B  
..., there is also a limit on the radio frequency emissions, as measured using instrumentation with a peak  
detector function, corresponding to 20 dB above the maximum permitted average limit....  
Used conversion factor: Limit (dB $\mu$ V/m) = 20 log (Limit ( $\mu$ V/m)/1 $\mu$ V/m)

NOTE: A missing result table in the corresponding test report section means, that no final measurement was performed because no relevant frequencies (peaks) were found in the preliminary scan.

## Setup Drawings

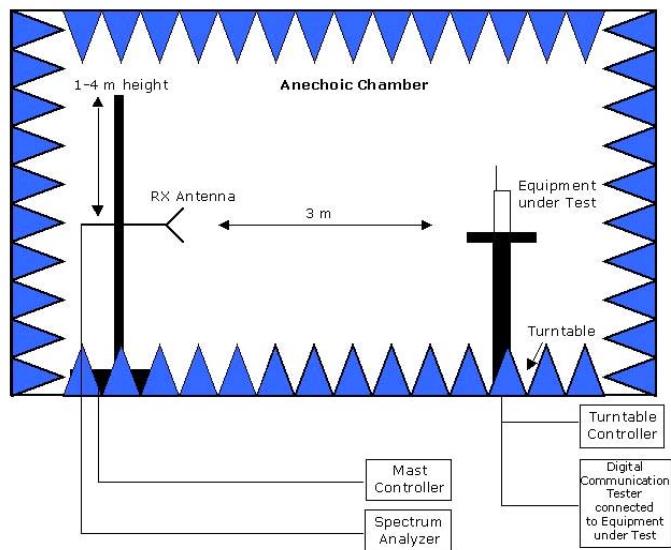

Setup in the Anechoic chamber. For measurements below 1 GHz the ground was replaced by a conducting ground plane.

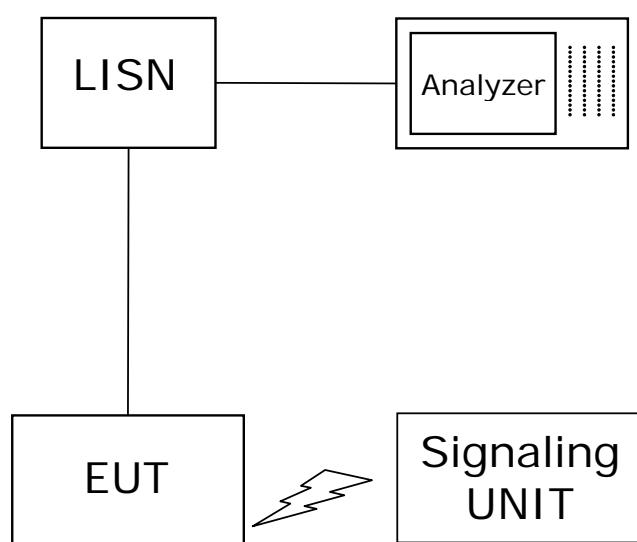

Setup in the shielded room for conducted measurements at AC mains port



## 6 Index

1	Administrative Data	2
1.1	Project Data	2
1.2	Applicant Data	2
1.3	Test Laboratory Data	2
1.4	Signature of the Testing Responsible	3
1.5	Signature of the Accreditation Responsible	3
2	Test Object Data	4
2.1	General OUT Description	4
2.2	Detailed Description of OUT Samples	5
2.3	OUT Features	6
2.4	Auxiliary Equipment	7
2.5	Operating Mode(s)	7
2.6	Setups used for Testing	8
3	Results	9
3.1	General	9
3.2	List of the Applicable Body	9
3.3	List of Test Specification	9
3.4	Summary	10
3.5	Detailed Results	11
3.5.1	15b.1 Conducted Emissions (AC Power Line) §15.107	11
3.5.2	15b.2 Spurious Radiated Emissions §15.109	15
4	Test Equipment Details	17
4.1	List of Used Test Equipment	17
4.2	Laboratory Environmental Conditions	21
5	Annex	22
5.1	Additional Information for Report	22
6	Index	28