

客户承认书

SPECIFICATION FOR APPROVAL

CUSTOMER/ 客户: 华 为

CUSTOMER P.N./客户物料号: _____

MODEL NO./ 产品型号: HKA01205020-2FAPPROVAL NO./ 承认编号: WI-F-20121183PREPARED DATE/拟定日期: 2012-11-28

CUSTOMER AUTHORIZED SIGNATURE/客户承认签核

--	--	--

Please return to us one copy of "SPECIFICATION FOR APPROVAL" with you approved signature. / 客户确认签字, 盖章后请回传一份承认书给我司.

ADD: Huntkey Park, Banxue Road, Bantian, Shenzhen,
Guangdong, P. R. China

TEL: 0755-89606666

P.C.: 518129

FAX: 0755-89606333

<http://www.huntkey.com>

拟 制:	审 核:	批 准:

E. C. LIST/变更履历表

[illegible]

Contents/目录

1. SCOPE/概述.....	4
2. Input Characteristics/输入特性.....	4
3. Output Characteristics/输出特性	4
4. Protection Requirements/保护要求	5
5. Environment Requirements/环境要求	6
6. Reliability Requirements/可靠性要求	6
7. EMI/EMS Standards/EMI/EMS 标准	6
8. Safety Standards/安规标准	7
9. Mach. Outline Drawing/外观图	8
10. Label Drawing/标贴图	9
11. Package Drawing/包装示意图	11

1. SCOPE/概述

The document details the electrical, mechanical and environmental specifications of a SMPS, the power supply provides 10.0 W continuous output power.

资料详细描述了一款 10.0 W(连续输出功率)开关电源的电气性,结构性及环境等要求.

The power supply shall meet the RoHS requirements.

此款电源符合 RoHS 要求.

Description/描述:

- ☒ SMPS Adapter(Wall mount)/插墙式适配器 ☐ SMPS Adapter(Desk-top)/桌面型适配器
☐ Open Frame/开放式结构 ☐ SMPS Unit (With Case)/带铁壳型
☐ Others/其他

2. Input Characteristics/输入特性

2.1. Input Voltage & Frequency/输入电压与频率

The range of input voltage is from 90Vac to 264Vac with a single phase.

输入电压范围: 从 90Vac 到 264Vac, 单相输入.

	Minimum/最小	Rating/额定值	Maximum/最大
Input Voltage/输入电压	90Vac	100Vac~240Vac	264Vac
Input Frequency/输入频率	47Hz	60Hz/50Hz	63Hz

2.2. Input AC Current/输入交流电流

0.5Amax. @ 90Vac input & Full load/在 90Vac 输入和满载条件下最大 0.5A

2.3. Inrush Current (cold start)/浪涌电流(冷启动)

70Amax. @ 264Vac input/在 264Vac 输入条件下最大 70A

2.4. Average Efficiency /平均效率

While input 115Vac and 230Vac, the average efficiency is more than 73.37%.The test point is at 25%, 50%, 75% and 100% of max load respectively.

在输入 115Vac 和 230Vac 条件下,平均效率不小于 73.37%。测试点分别是最大载的 25%,50%,75%和 100%。

2.5. No-Load Input Power Dissipation/输入空载功率损耗

While input 115Vac or 230Vac and the output is no load, the input power loss must be less than 0.30W.

在输入 115Vac/230Vac, 空载功耗小于 0.30W.

3. Output Characteristics/输出特性

3.1. Static Output Characteristics <Vo & R+N>/静态输出特性<输出&纹波+噪音>

Output	Rated Load/额定负载		Peak	Output Range	R+N	Remark
Rating	Min. Load	Max. Load	Load	输出电压范围	纹波与噪声	备注
+5.0V	0A	2.0A	/	4.8V ~ 5.3V	100mVp-p	

Ripple & Noise: Tested by a oscilloscope using 20MHz bandwidth and the output is paralleled a 0.1uF ceramic capacitor and a 10uF electrolysis capacitor. (Under the input Voltage 100~240Vac)

纹波与噪声: 量测时示波器选用 20MHz 带宽限制,输出端要并联一颗 0.1uF 的陶瓷电容和一颗 10uF 的电解电容(输入电压 100~240Vac)

3.2. Line/ Load Regulation/线性/负载调整率

Output	Load Condition/负载条件		Line Regulation	Load Regulation	Remark
Rating	Min. Load	Max. Load	线性调整率	负载调整率	备注
+5.0V	0A	2.0A	± 3%	± 5%	

3.3. Turn - on Delay Time/开机延迟时间

3S max. @ 90Vac input & Full load/在 90Vac 输入和满载条件下最大 3S

3.4. Hold-up Time/关机维持时间

10mS min. @ Full load & 115Vac/60Hz input turn off at worst case

在 115Vac/60Hz 输入, 满载同时最差情况下关机, 最小 10mS

20mS min. @ Full load & 230Vac/50Hz input turn off at worst case

在 230Vac/50Hz 输入, 满载同时最差情况下关机, 最小 20mS

3.5. Rise Time/上升时间

30mS max. @ Full load/在满载条件下最大 30mS

3.6. Fall Time/下降时间

20mS max. @ Full load/在满载条件下最大 20mS

3.7. Output Overshoot / Undershoot/输出过冲/欠冲

5% max. When the power on or off/当电源开, 关机时最大 5%

3.8. Output Load Transient Response/输出负载瞬态响应

Output voltage is within 4.0-6.0V while the load step is from 10% to 90% of max load, R/S: 0.5A/uS, frequency: 100Hz and 5mS duration at 90% of max load.

输出电压在 4.0-6.0V 之间, 负载变化: 从最大载的 10%到 90%, 斜率: 0.5A/uS, 频率: 100Hz, 90%负载持续时间为 5mS.

4. Protection Requirements/保护要求

4.1. Over Current Protection/过流保护

OCP Point Limited: 2.1A~4A/保护点限制: 2.1A~4A

The output shall hiccup when the over current applied to the output, and shall be self-recovery when the fault condition is removed

当过电流时, 输出将进入打嗝模式, 当过流情况解除后, 产品将会自动恢复正常

4.2. Short Circuit Protection/短路保护

The input power shall decrease when the output is short to GND; the power supply shall not damage, and shall be self-recovery when the fault condition is removed

当输出对地短路时, 产品输入功率降低且不会损伤, 当短路情况解除后, 产品将会自动恢复正常

4.3. Over Voltage Protection/过压保护

The power supply shall be protected when the output is over voltage, and the power supply shall not be damaged

当输出过压时, 产品保护且不会损伤

5. Environment Requirements/环境要求

5.1. Operating Temperature and Relative Humidity/操作温度和湿度要求

-5℃ to +45℃

10%RH to 90%RH

5.2. Storage Temperature and Relative Humidity/存储温度和湿度要求

-20℃ to +80℃

5%RH to 95%RH (non-condensing) @ Sea level shall below 10,000 feet

在海拔低于 10,000 英尺的条件下, 低温存储下限为-20℃ (无结冰环境); 高温存储上限为

+80℃, 相对湿度为 5%RH to 95%RH。

6. Reliability Requirements/可靠性要求

6.1. Vibration/振动

10 to 300Hz sweep at a constant acceleration of 1.0G (Breadth: 3.5mm) for 1Hour for each of the perpendicular axes X, Y, Z

扫描频率: 10 to 300Hz, 加速度: 1.0G(位移: 3.5mm), X, Y, Z 三垂直坐标轴向各振动 1 小时

6.2. Drop in/跌落

6 Surfaces each once. Drop on the marble plane, Height: 80cm,

6 面各 1 次, 跌落到大理石地面上, 高度: 80 厘米

6.3. MTBF Qualification/平均间隔故障时间估算

The MTBF shall be at least 50,000hours at 25℃, Full load and normal input condition

平均间隔故障时间: 至少 50,000 小时, 25℃ 环境及额定输入与满载条件下

6.4. The lifetime electrolyte capacitor/电解电容寿命

The lifetime of electrolyte capacitor shall be at least 26280hours at 30℃, of full load and 110V/220Vac input condition

电解电容寿命至少 26280 小时, 30℃ 环境及 110V/220Vac 输入与满载条件下

7. EMI/EMS Standards/EMI/EMS 标准

7.1. EMI Standards/EMI 标准

EN 55022:1998, +A1:2000 +A2:2003, Class B

CISPR 22:2003, Class B

AS/NZS CISPR 22: 2004, Class B

7.2. EMS Standards/EMS 标准

EN 61000-3-2	Harmonic current emissions
EN 61000-3-3	Voltage fluctuations & flicker
EN 61000-4-2	Electrostatic Discharge(ESD): 8kV air discharge, 6kV contact discharge
EN 61000-4-3	Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4	Electrical Fast Transient/Burst-EFT
EN 61000-4-5	Surge Immunity Test: Differential mode ± 2.5 kV, Common mode ± 4 kV
EN 61000-4-6	Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8	Power Frequency Magnetic Field Test

EN 61000-4-11	Voltage Dips
---------------	--------------

8. Safety Standards/安规标准

8.1. Dielectric Strength(Hi-pot)/介电耐压强度(高压)

Primary to Secondary: 3000Vac / 3.5mA / 60 seconds (3 seconds for production)
Or 4242Vdc / 3.5mA / 60 seconds (3 seconds for production)

初级对次级: 3000Vac / 3.5mA / 60 秒(生产时高压测试时间: 3 秒)

或 4242Vdc / 3.5mA / 60 秒(生产时高压测试时间: 3 秒)

8.2. Leakage Current/漏电流

0.25mAmax. at 264Vac / 50Hz input/在输入 264Vac/50Hz 的条件下最大 0.25mA

8.3. Insulation Resistance/绝缘阻抗


100MΩ min. @ primary to secondary add a 500Vdc test voltage

在初级与次级间加 500Vdc 进行测试,最小 100MΩ

8.4. Regulatory Standards/安规标准

Type	Country	Standard	Type	Country	Standard
☒ UL/CUL	USA	UL60950-1	☐ PSB	Singapore	IEC60950-1
☐ TUV	Europe	EN60950-1	☐ PSE	Japan	J60950
☐ CCC	China	GB4943	☐ NOM	Mexico	NOM-001
☐ CE	Europe	EN60950-1	☐ GOST	Russia	MEK60950

9. Mach. Outline Drawing/外观图

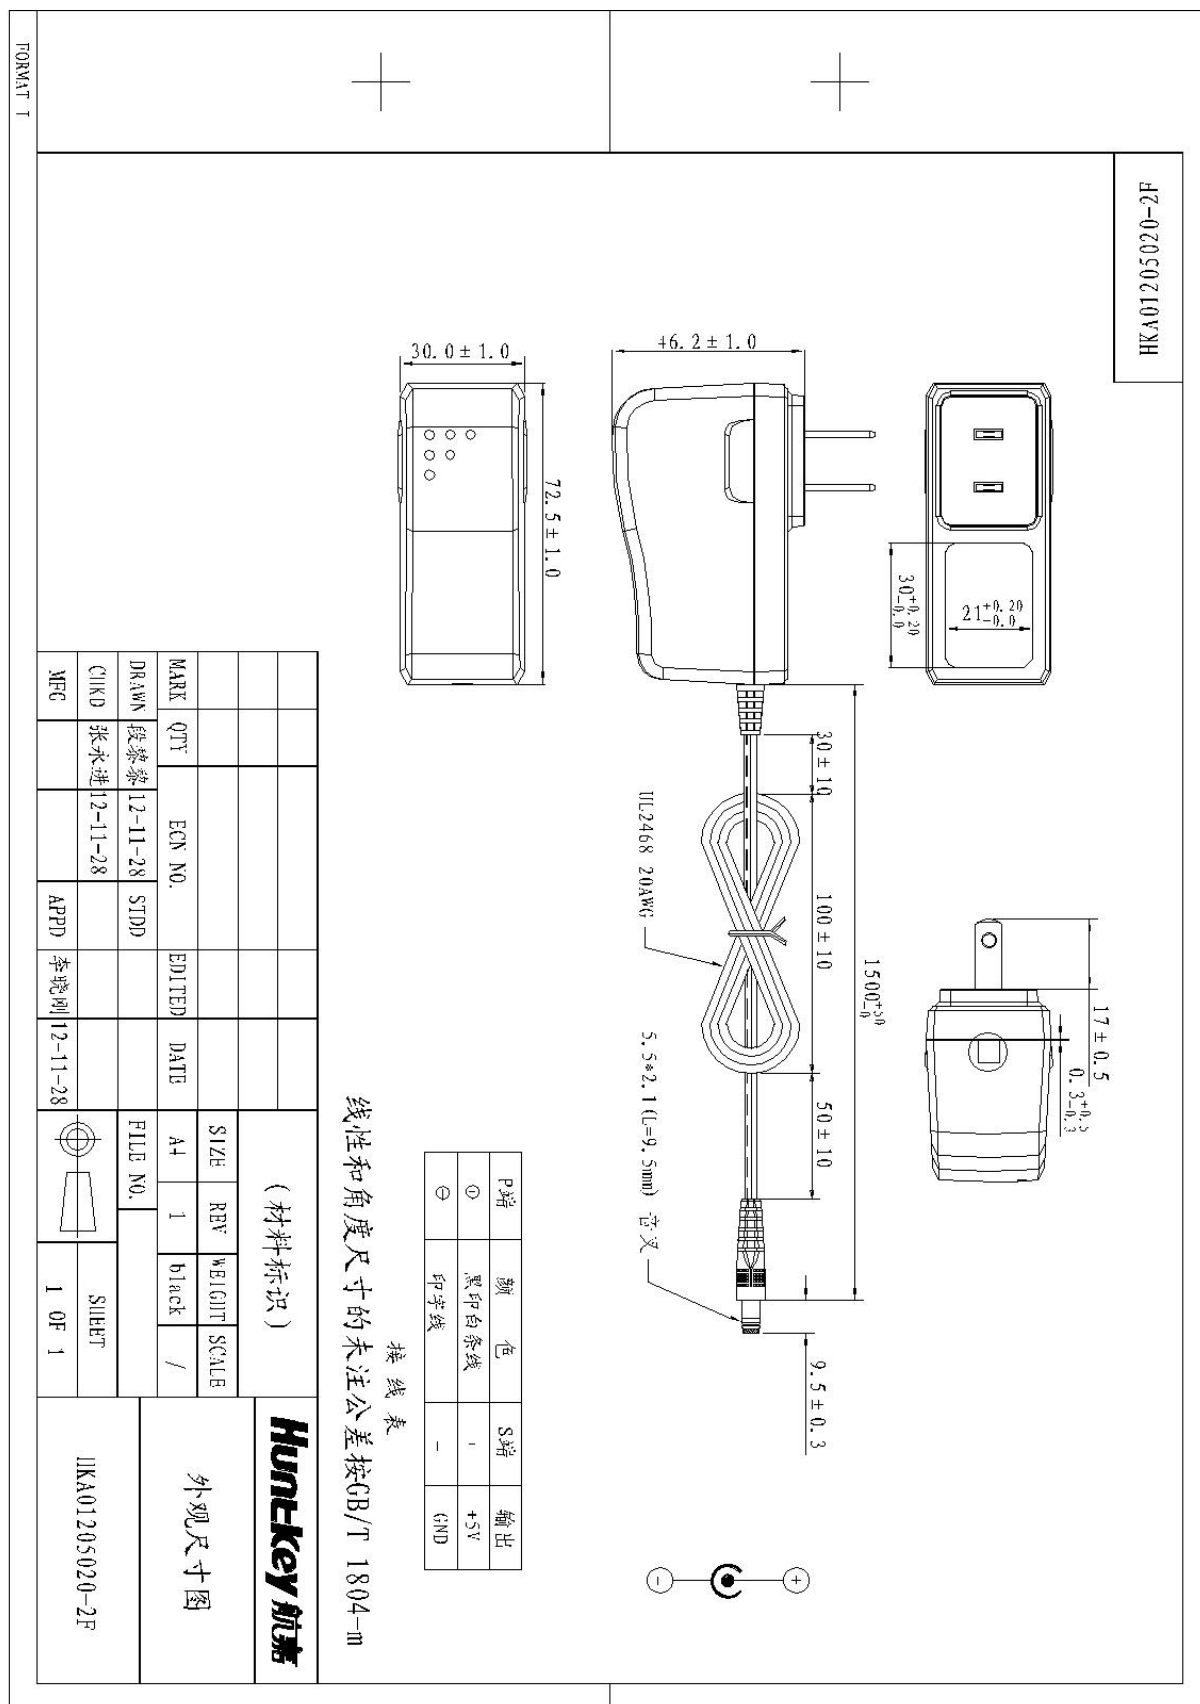

10. Label Drawing/标贴图

技术要求:

- 1、材料: 50#哑白PET, 表面过耐擦拭PET哑膜, 标贴供应商UL卡上有Polycarbonate (PC) 和 Acrylonitrile butadiene styrene (ABS) 材料的型号, 满足UL CCN号PGDQ2/8或者PGJ12/8。
- 2、黑底白字, 字迹清晰。
- 3、耐高温80度。
- 4、切边挺直, 无毛刺, 颜色字体以封样为准。

S/N:12112000001

年 月 日 序列号(000001-999999)

说明:

1. 11为年份最后两位, 11代表2011年, 12代表2012年, 依此类推;
02对应月份, 1-12月分别用01-12表示。
2. 3表示B, 1=1, 2=2, 3=3, 4=4, 5=5, 6=6, 7=7, 8=8, 9=9, A=10, B=11, C=12, D=13, E=14, F=15, G=16, H=17, J=18, K=19, L=20, M=21, N=22, P=23, R=24, S=25, T=26, V=27, W=28, X=29, Y=30, Z=31。
3. 序列号, 依生产顺序编码, 日期变, 流水号从头开始。

Huntkey 航嘉		MATERIAL	大标贴	MATERIAL	50#哑白PET+ 耐擦拭PET哑膜
SHEET	1 OF 1	MATERIAL No.		FILE NAME	HKAO1205020-2F
UNIT	mm	SCALE	DATE	2012.10.24	REV
DESIGNED	CHECKED	CHECKED	APPROVED	FILE No.	
苗振源	江国权	秦文刚	李晓刚		

11. Package Drawing/包装示意图

