

FCC TEST REPORT

for

Wireless Ethernet Adapter

MODEL: EchoLife WS311

Test Report Number:
SZ100120B01-RP

Issued for

Huawei Technologies Co., Ltd.

**Administration Building, Huawei Base, Bantian, Longgang
District, Shenzhen 518129 P.R.C.**

Issued by:

COMPLIANCE CERTIFICATION SERVICES (SHENZHEN) INC.

**No10-1, Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town,
Baoan District, Shenzhen China**

TEL: 86-755-28055000

FAX: 86-755-28055221

Issued Date: February 05, 2010



Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document. The client should not use it to claim product endorsement by TAF, A2LA, NVLAP, NIST or any government agencies. The test results in the report only apply to the tested sample.



Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	February 05, 2010	Initial Issue	ALL	Clinton Kao



TABLE OF CONTENTS

1 TEST CERTIFICATION	4
2 TEST RESULT SUMMARY	5
3 EUT DESCRIPTION.....	6
4 TEST METHODOLOGY.....	7
4.1. DESCRIPTION OF TEST MODES	7
5 SETUP OF EQUIPMENT UNDER TEST	8
5.1. DESCRIPTION OF SUPPORT UNITS.....	8
5.2. CONFIGURATION OF SYSTEM UNDER TEST	8
6 FACILITIES AND ACCREDITATIONS	9
6.1. FACILITIES	9
6.2. ACCREDITATIONS	9
6.3. MEASUREMENT UNCERTAINTY.....	9
7 FCC PART 15.247 REQUIREMENTS	10
7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT	10
7.2. SPURIOUS EMISSIONS MEASUREMENT.....	15
7.3. 6dB BANDWIDTH MEASUREMENT	46
7.4. PEAK OUTPUT POWER	54
7.5. BAND EDGES MEASUREMENT:.....	62
7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT.....	84



1 TEST CERTIFICATION

Product: Wireless Ethernet Adapter**Model:** EchoLife WS311**Brand:** HUAWEI**Tested:** January 20-February 05, 2010**Applicant:** Huawei Technologies Co., Ltd.Administration Building, Huawei Base, Bantian, Longgang District, Shenzhen 518129
P.R.C.**Manufacturer:** Huawei Technologies Co., Ltd.Administration Building, Huawei Base, Bantian, Longgang District, Shenzhen 518129
P.R.C.

APPLICABLE STANDARDS

Standard	Test Type	Standard	Test Type
15.207(a)	Power Line Conducted Emissions	15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions
15.247(a)(2)	6dB Bandwidth Measurement	15.247(b)(3) 15.247(b)(4)	Peak Power Measurement
15.247(d)	Band Edges Measurement	15.247(e)	Peak Power Spectral Density

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in **ANSI C63.4: 2003** and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:

Clinton Kao
Manager
Compliance Certification Service Inc.**Reviewed by:**

Vincent Yao
Assistant manager
Compliance Certification Service Inc.



2 TEST RESULT SUMMARY

APPLICABLE STANDARDS			
Standard	Test Type	Result	Remark
15.247(a)(2)	6dB Bandwidth Measurement	Pass	Meet the requirement of limit.
15.247(b)(3) 15.247(b)(4)	Peak Power Measurement	Pass	Meet the requirement of limit.
15.247(d)	Band Edges Measurement	Pass	Meet the requirement of limit.
15.247(e)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.247(d) 15.209(a)	● Spurious Emissions ● Conducted Measurement ● Radiated Emissions	Pass	Meet the requirement of limit.
15.207(a)	Power line Conducted Emissions	Pass	Meet the requirement of limit.

Note: 1. The statements of test result on the above are decided by the request of test standard only; the measurement uncertainties are not factored into this compliance determination.
2. The information of measurement uncertainty is available upon the customer's request.



3 EUT DESCRIPTION

Product	Wireless Ethernet Adapter
Trade Name	HUAWEI
Model Number	EchoLife WS311
Model Discrepancy	N/A
Serial Number	SZ100120B01-RP
Power Supply	DC5V Powered by the adapter
Adapter Manufacturer / Model No.	(1)Adapter 1: UE/UE05L1-050100SPAU AC input: AC100-240V, 50/60Hz,0.2A Max DC output: DC5.0V, 1.0A DC output cable: Un-shielded, 1.55m (2)Adapter 2: FRECOM/FPS005USA-050100 AC input: AC100-240V, 50/60Hz,300mA Max DC output: DC5V, 1A DC output cable: Un-shielded, 1.55m
Frequency Range	IEEE 802.11b/g: 2412 ~ 2462 MHz IEEE 802.11n HT20 : 2412 ~ 2462 MHz IEEE 802.11n HT40 : 2422MHz~ 2452MHz
Transmit Power	IEEE 802.11b mode: 15.62dBm IEEE 802.11g mode: 14.89 dBm IEEE 802.11n HT20 MHz mode: 13.91 dBm IEEE 802.11n HT40 MHz mode: 13.14 dBm
Modulation Technique	IEEE 802.11b mode: DSSS(CCK,QPSK, BPSK) IEEE 802.11g mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT20 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM) IEEE 802.11n HT40 MHz mode: OFDM (BPSK/QPSK/16QAM/64QAM)
Transmit Data Rate	802.11b: 11Mbps(CCK) with fall back rates of 5.5/2/1Mbps 802.11g: 54Mbps with fall back rates of 48/36/24/18/12/11/6Mbps IEEE 802.11n HT20: 135.0Mbps with fall back rates of 121.5/108.0/81.0/65.0/58.5/54.0/52.0/40.5/39.0/27.0/26.0/19.5/13.5/13.0/6.5 Mbps IEEE 802.11n HT40: 135.0Mbps with fall back rates of 121.5/108.0/81.0/65.0/58.5/54.0/52.0/40.5/39.0/27.0/26.0/19.5/13.5 Mbps
Number of Channels	IEEE 802.11b mode: 11 Channels IEEE 802.11g mode: 11 Channels IEEE 802.11n HT20 MHz mode: 11 Channels IEEE 802.11n HT40 MHz mode: 7 Channels
Antenna Specification	Printed Antenna with 1.50dBi gain (Max)

Note: 1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.

2. This submittal(s) (test report) is intended for FCC ID: **QIS-WS311** filing to comply with Section 15.207, 15.209 and 15.247 of the FCC Part 15, Subpart C Rules.



4 TEST METHODOLOGY

4.1. DESCRIPTION OF TEST MODES

The EUT has been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

After verification, all tests were carried out with the worst case test modes as shown below except radiated spurious emission below 1GHz, which worst case was in normal link mode only, and power line conducted emission below 30MHz, which worst case was in normal link mode .

IEEE802.11b mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing with the Adapter 2 (FRECOM/FPS005USA-050100).

IEEE802.11g mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing with the Adapter 2 (FRECOM/FPS005USA-050100).

IEEE 802.11n HT20 MHz mode: Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing with the Adapter 2 (FRECOM/FPS005USA-050100).

IEEE 802.11n HT40 MHz mode: Channel Low (2422MHz), Channel Mid (2437MHz) and Channel High (2452MHz) with 13.5Mbps data rate were chosen for full testing with the Adapter 2 (FRECOM/FPS005USA-050100).



5 SETUP OF EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

No.	Equipment	Model No.	Serial No.	FCC ID	Trade Name	Data Cable	Power Cord
1	Notebook	Studio 1435	5315448686549	N/A	DELL	N/A	Unshielded 1.75m

Note:

- 1) All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2) Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. CONFIGURATION OF SYSTEM UNDER TEST

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6 FACILITIES AND ACCREDITATIONS

6.1. FACILITIES

All measurement facilities used to collect the measurement data are located at
☒ **No10-1, Mingkeda Logistics Park, No.18 Huanguan South RD. Guan lan Town, Baoan District, Shenzhen China**

The sites are constructed in conformance with the requirements of ANSI C63.4, ANSI C63.7 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. ACCREDITATIONS

Our laboratories are accredited and approved by the following accreditation body according to ISO/IEC 17025.

USA	A2LA
Taiwan	TAF

The measuring facility of laboratories has been authorized or registered by the following approval agencies.

USA	FCC
Japan	VCCI
Canada	INDUSTRY CANADA
Taiwan	BSMI
Norway	Nemko

Copies of granted accreditation certificates are available for downloading from our web site, <http://www.ccsrf.com>

6.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz~30MHz	+/- 3.18dB
Radiated emissions	30MHz ~ 200MHz	+/- 3.79dB
	200MHz ~1000MHz	+/- 3.62dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

The measured result is above (below) the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance (non-compliance) is more probable than non-compliance) with the specification limit.



7 FCC PART 15.247 REQUIREMENTS

7.1. POWER LINE CONDUCTED EMISSIONS MEASUREMENT

7.1.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

NOTE:

- (1) The lower limit shall apply at the transition frequencies.
- (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

7.1.2. TEST INSTRUMENTS

Conducted Emission Test Site					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL. DUE
ESCI EMI TEST RECEIVE.ESCI	ROHDE&SCHWARZ	1166.5950 03	100145	03/20/2009	03/20/2010
LISN	FCC	FCC-LISN-50-50-2- M	01068	03/01/2009	03/01/2010
LISN	EMCO	3825/2	8901-1459	03/01/2009	03/01/2010
CDN	FCC	FCC-TILISN-T4	20182	03/01/2009	03/01/2010
CDN	FCC	FCC-TLISN-T8-02	20183	03/01/2009	03/01/2010
CDN	FCC	FCC-TLISN-T4-02	20382	03/01/2009	03/01/2010
CDN	FCC	FCC-TLISN-T4-02	20383	03/01/2009	03/01/2010
CDN	FCC	FCC-801-T8-RJ45	04030	03/01/2009	03/01/2010
Current Probe	STODDART AIRCRAFT	91550-1	345-73	03/01/2009	03/01/2010

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


2. N.C.R = No Calibration Request.



7.1.3. TEST PROCEDURES (please refer to measurement standard)

- The EUT and Support equipment, if needed, was placed on a non-conducted table, which is 0.8m above the ground plane and 0.4m away from the conducted wall.
- The test equipment EUT installed received AC main power, through a Line Impedance Stabilization Network (LISN), which supplied power source and was grounded to the ground plane. All support equipment power received from a second LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- The EUT test program was started. Emissions were measured on each current carrying line of the EUT using an EMI Test Receiver connected to the LISN powering the EUT.
- The frequency range from 150 kHz to 30 MHz was searched. The test data of the worst-case condition(s) was recorded. Emission levels under limit 20dB were not recorded.

7.1.4. TEST SETUP

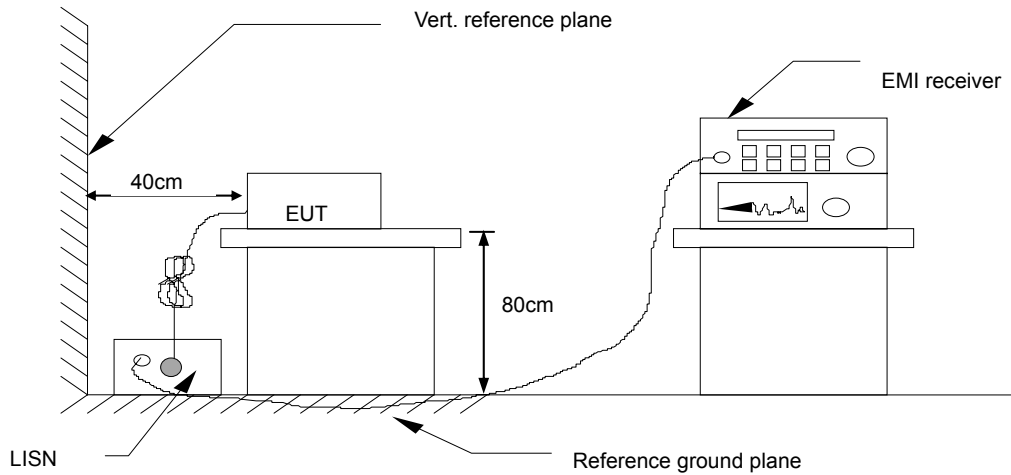

- For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.5. Data Sample:

FREQ MHz	PEAK RAW dBuV	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	Note
x.xx	50.27	49.16	48.17	65.47	55.47	-16.31	-7.30	L

Freq. = Emission frequency in MHz
 RAW dBuV = Uncorrected Analyzer/Received Reading +INSERTION LOSS of LISN+CABLE LOSS+pulse limiter loss
 Q.P. Limit dBuV = Limit stated in standard
 AVG Limit dBuV = Limit stated in standard
 Q.P. Margin dB = Q.P. RAW (dBuV) –Q.P. Limit (dBuV)
 AVG Margin dB = AVG RAW (dBuV) –AVG Limit (dBuV)
 Note = Current carrying line of reading
 Q.P.: =Quasi-Peak

**7.1.6. TEST RESULTS**

Model No.	EchoLife WS311	Test Mode	Normal Link
Environmental Conditions	25deg.C,60% RH, 990 hPa	RBW,VBW	9 kHz
Tested by:	Tom Gan	Power supply	Adapter 1 (UE/UE05L1-050100SPAU)

FREQ MHz	PEAK RAW dBuV	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.172	58.35	50.52	35.46	65.36	55.36	-14.84	-19.90	L1
0.242	53.99	45.75	27.44	63.35	53.35	-17.60	-25.91	L1
0.287	55.89	46.68	28.62	62.08	52.08	-15.40	-23.46	L1
0.431	50.91	40.12	22.54	57.95	47.95	-17.83	-25.41	L1
0.587	47.40	36.74	23.21	56.00	46.00	-19.26	-22.79	L1
18.248	43.93	---	---	60.00	50.00	---	-6.07	L1
0.168	58.98	49.62	40.51	65.47	55.47	-15.85	-14.96	L2
0.283	54.63	46.83	30.89	62.19	52.19	-15.36	-21.30	L2
0.357	52.86	42.98	29.10	60.07	50.07	-17.09	-20.97	L2
0.424	51.86	41.33	26.92	58.16	48.16	-16.83	-21.24	L2
0.628	47.16	41.92	27.23	56.00	46.00	-14.08	-18.77	L2
18.088	42.86	---	---	60.00	50.00	---	-7.14	L2

NOTE: 1. The measuring frequencies range between 0.15 MHz and 30 MHz.

2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.

3. "---" denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.

4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of test Receiver between 0.15MHz and 30MHz was 9kHz.

5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line).



Model No.	EchoLife WS311	Test Mode	Normal Link
Environmental Conditions	25deg.C,60% RH, 990 hPa	RBW,VBW	9 kHz
Tested by:	Tom Gan	Power supply	Adapter 2 (FRECOM/FPS005USA-050100)

FREQ MHz	PEAK RAW dBuV	Q.P. RAW dBuV	AVG RAW dBuV	Q.P. Limit dBuV	AVG Limit dBuV	Q.P. Margin dB	AVG Margin dB	NOTE
0.390	56.51	51.20	43.44	59.11	49.11	-7.91	-5.67	L1
0.780	58.20	46.32	29.45	56.00	46.00	-9.68	-16.55	L1
1.303	55.84	43.86	27.19	56.00	46.00	-12.14	-18.81	L1
1.822	60.29	50.31	30.94	56.00	46.00	-5.69	-15.06	L1
2.745	55.75	42.42	29.66	56.00	46.00	-13.58	-16.34	L1
5.006	58.84	53.65	39.56	60.00	50.00	-6.35	-10.44	L1
0.394	53.10	46.71	37.72	59.01	49.01	-12.30	-11.29	L2
0.850	55.48	40.70	27.02	56.00	46.00	-15.30	-18.98	L2
1.410	53.11	36.35	20.90	56.00	46.00	-19.65	-25.10	L2
1.974	51.47	37.20	23.15	56.00	46.00	-18.80	-22.85	L2
4.260	51.66	43.85	26.32	56.00	46.00	-12.15	-19.68	L2
7.090	50.18	42.89	27.03	60.00	50.00	-17.11	-22.97	L2

NOTE: 1. The measuring frequencies range between 0.15 MHz and 30 MHz.

2. The emissions measured in the frequency range between 0.15 MHz and 30MHz were made with an instrument using Quasi-peak detector and Average detector.

3. "---" denotes the emission level was or more than 2dB below the Average limit, and no re-check was made.

4. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10KHz. The IF bandwidth of test Receiver between 0.15MHz and 30MHz was 9kHz.

5. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)



7.2. SPURIOUS EMISSIONS MEASUREMENT

7.2.1. LIMITS OF CONDUCTED EMISSIONS MEASUREMENT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.2.2. TEST INSTRUMENTS

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2010

7.2.3. TEST PROCEDURE (please refer to measurement standard)

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site. The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 100 kHz.

Measurements are made over the 30MHz to 26GHz range with the transmitter set to the lowest, middle, and highest channels.



7.2.4. TEST RESULTS


Test Plot

(IEEE 802.11b mode)

CH Low (30MHz ~2.9GHz)

Agilent 15:44:33 4 Feb 2010


R T

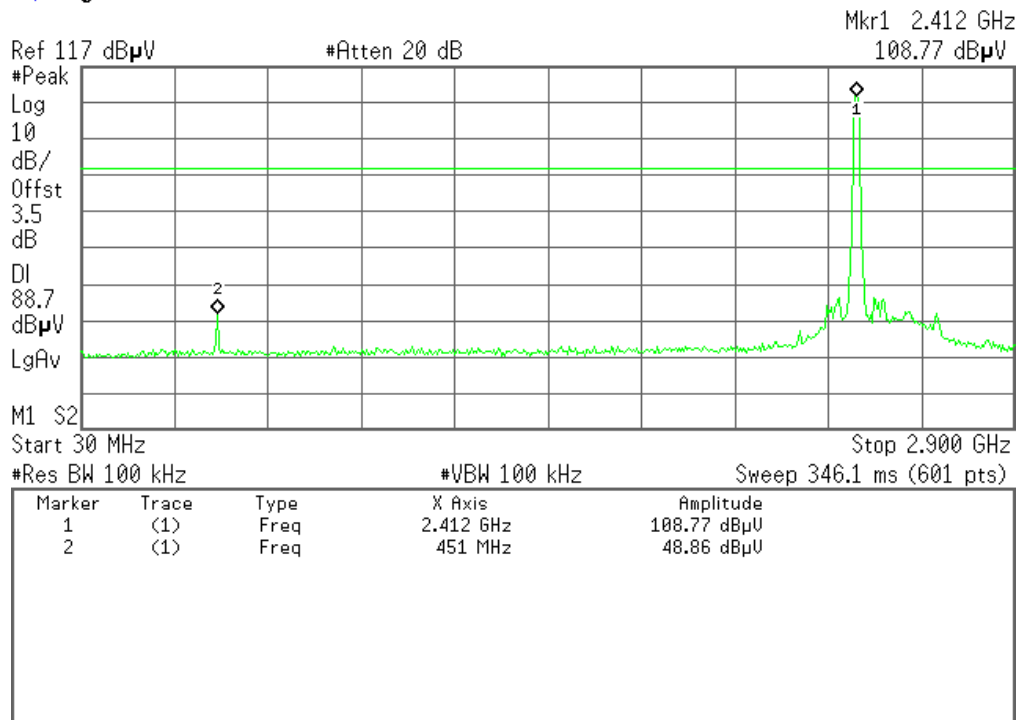

(2.9MHz ~26.5GHz)

Agilent 15:45:45 4 Feb 2010

R T

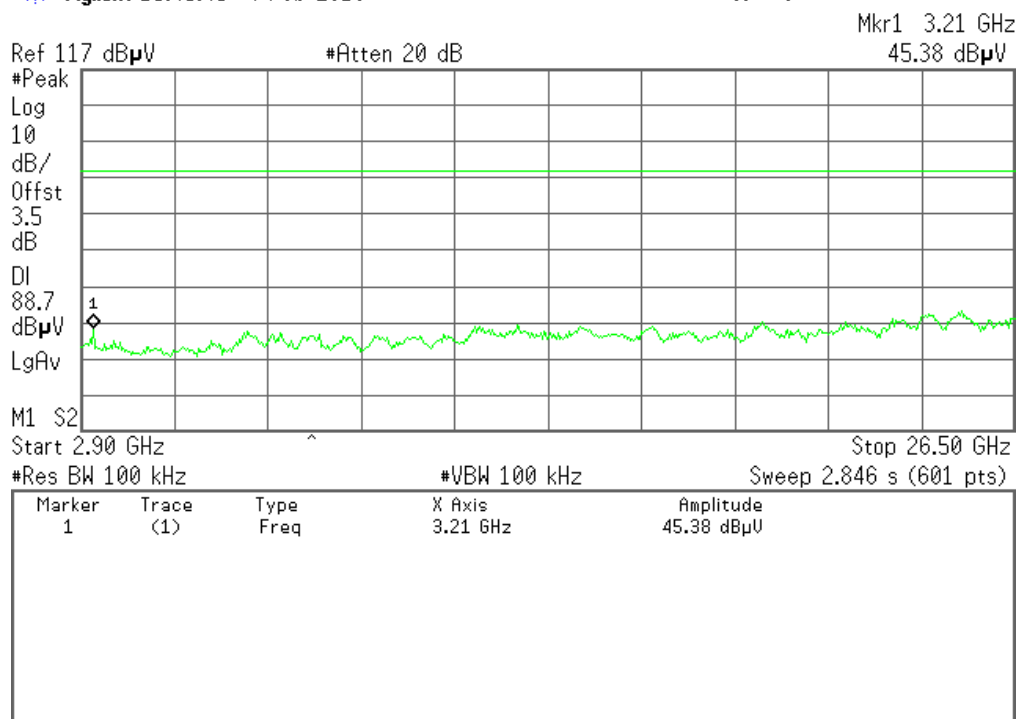




CH Mid(30MHz ~ 2.9GHz)

Agilent 15:42:10 4 Feb 2010


R T

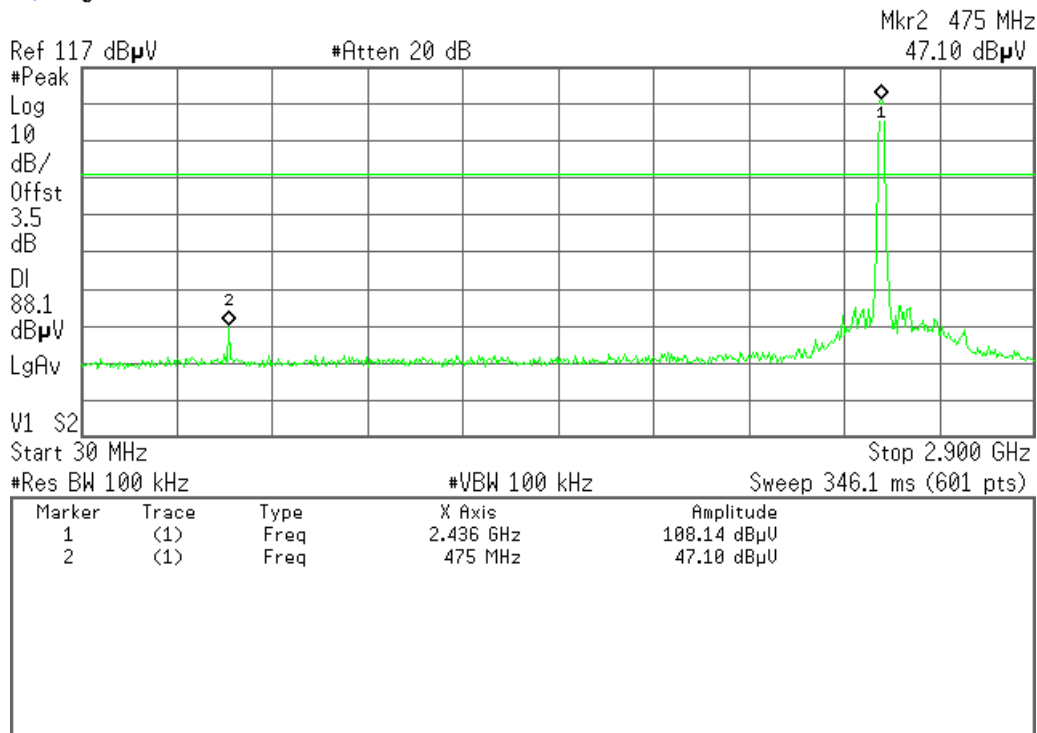

2.9GHz ~ 26.5GHz

Agilent 15:42:57 4 Feb 2010


R T

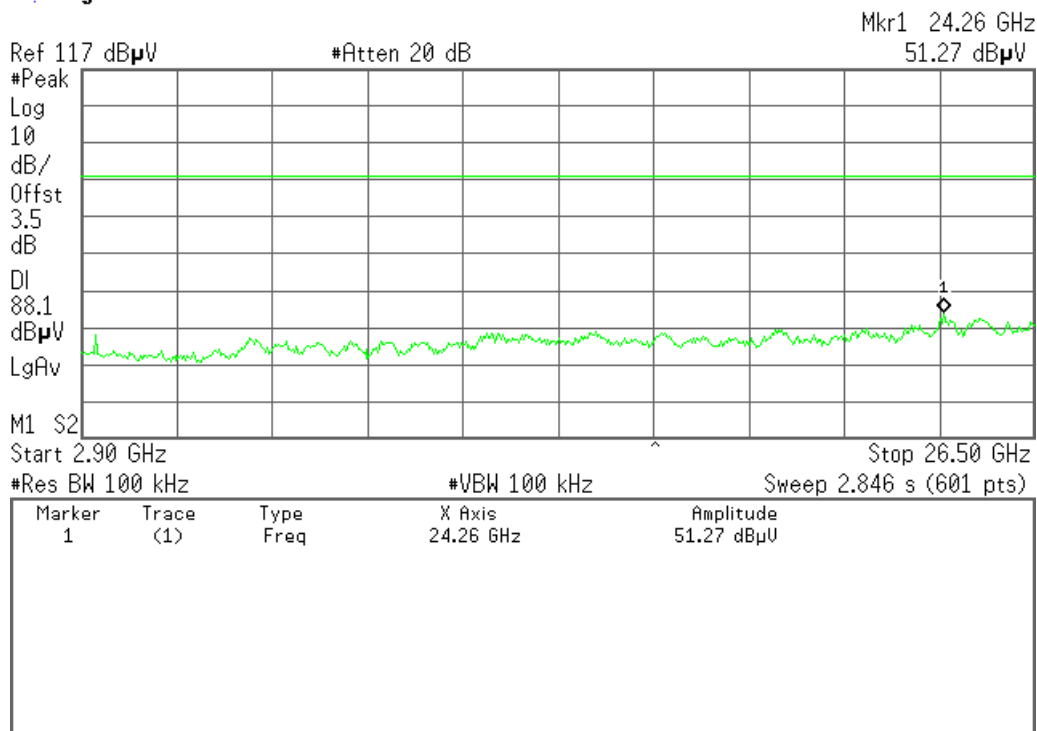

CH High (30MHz ~ 2.9GHz)

Agilent 15:39:48 4 Feb 2010


R T

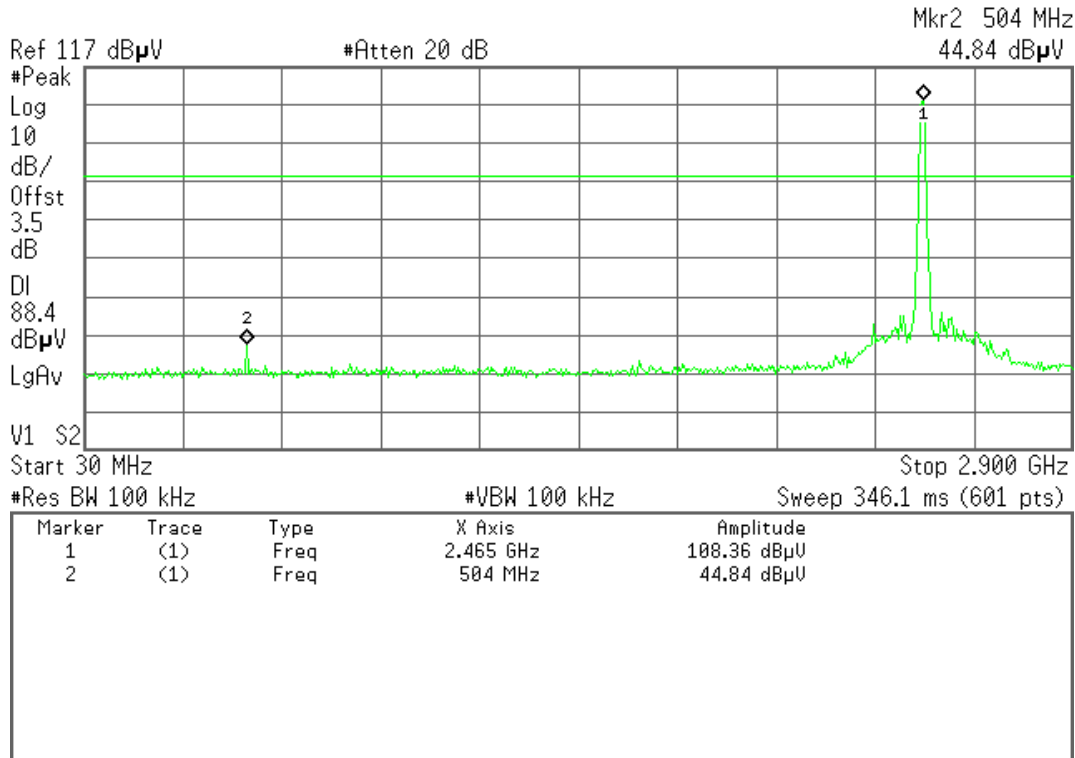

2.9GHz ~ 26.5GHz

Agilent 15:40:29 4 Feb 2010

R T

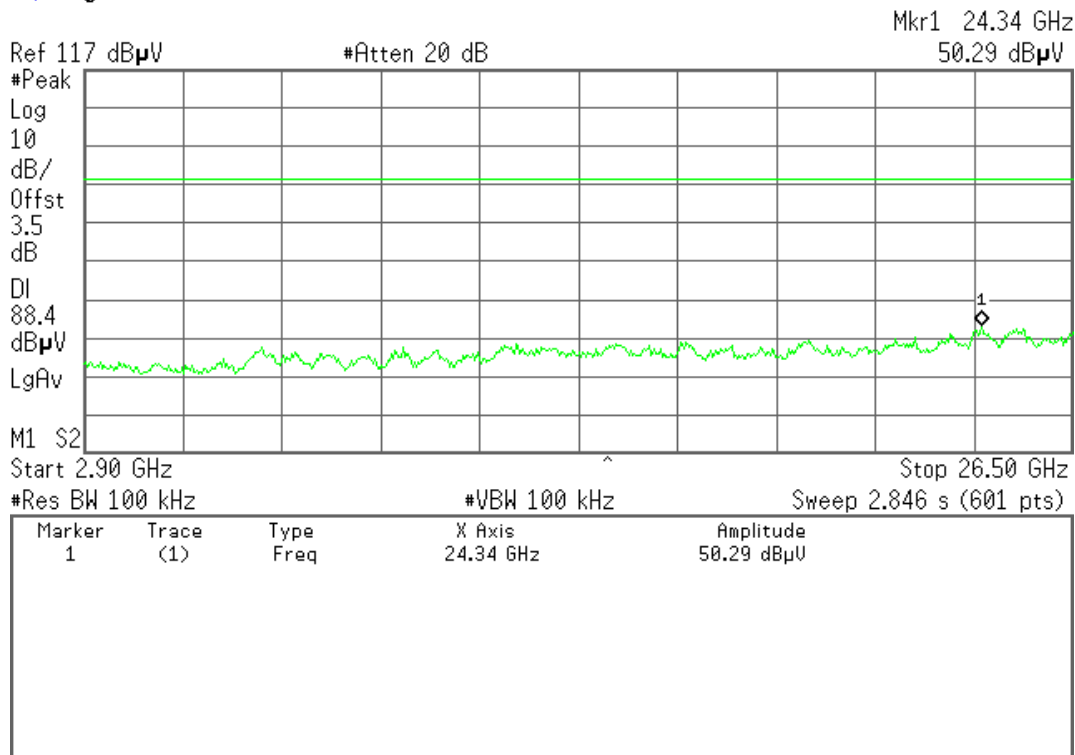




(IEEE 802.11g mode)

CH Low (30MHz ~2.9GHz)

Agilent 15:23:10 4 Feb 2010


R T

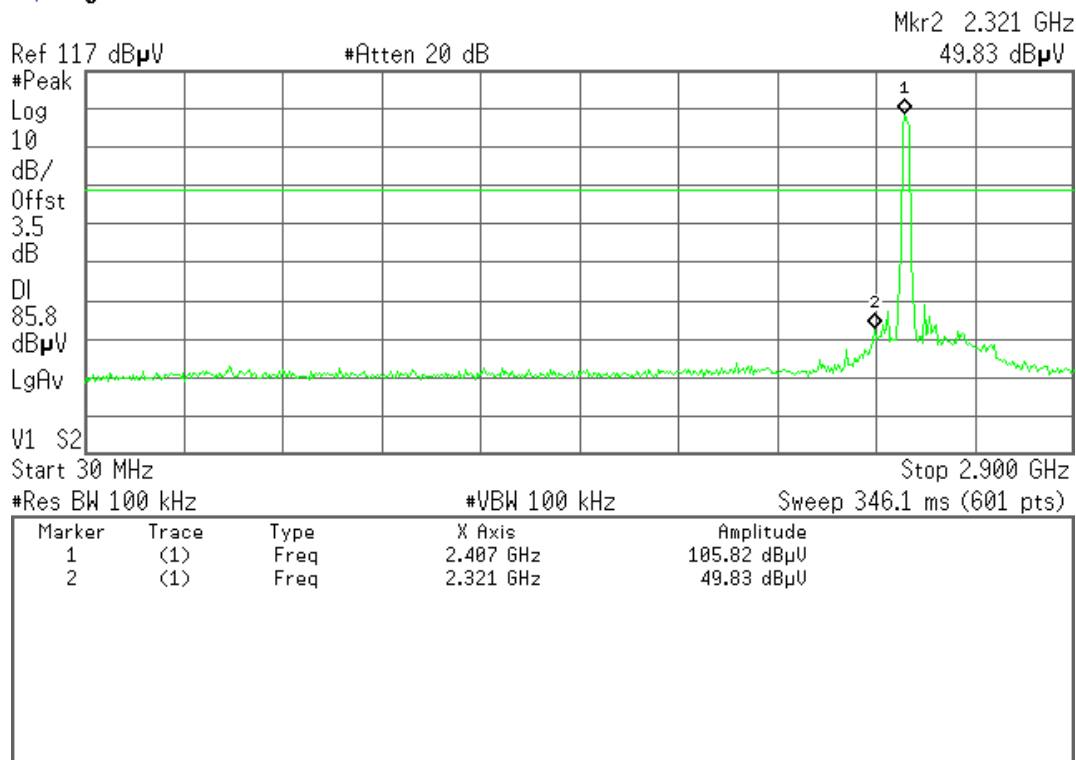

(2.9MHz ~26.5GHz)

Agilent 15:25:42 4 Feb 2010

R T

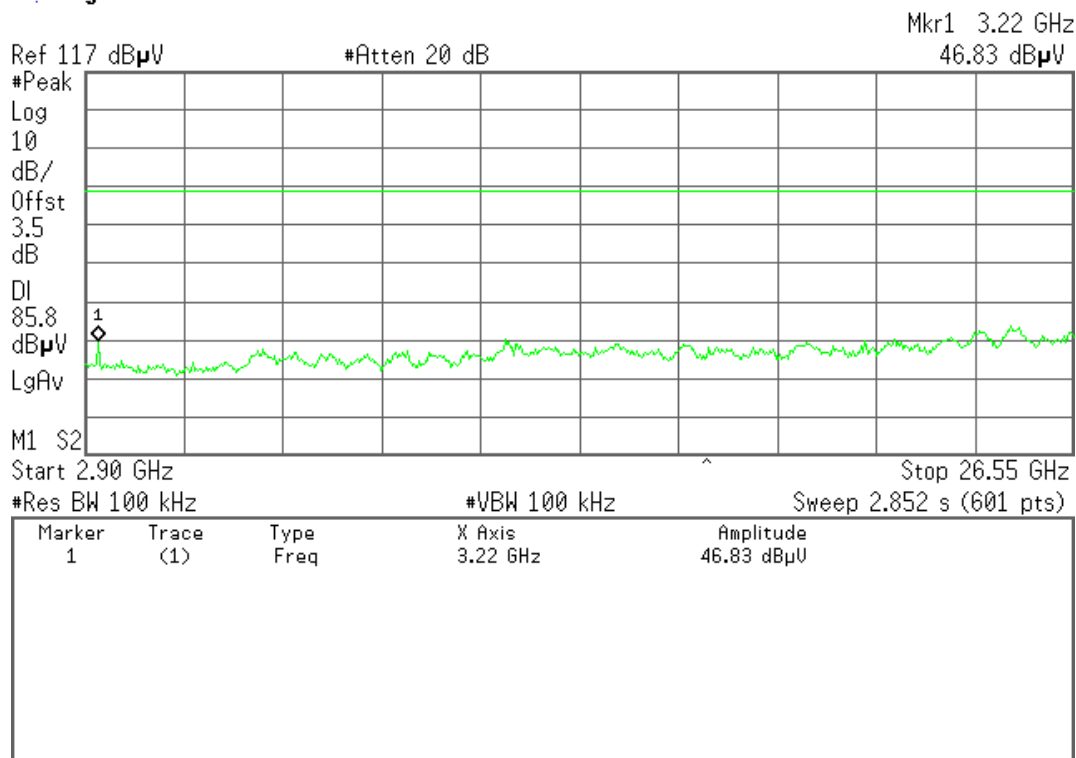




CH Mid(30MHz ~ 2.9GHz)

Agilent 15:19:54 4 Feb 2010


R T

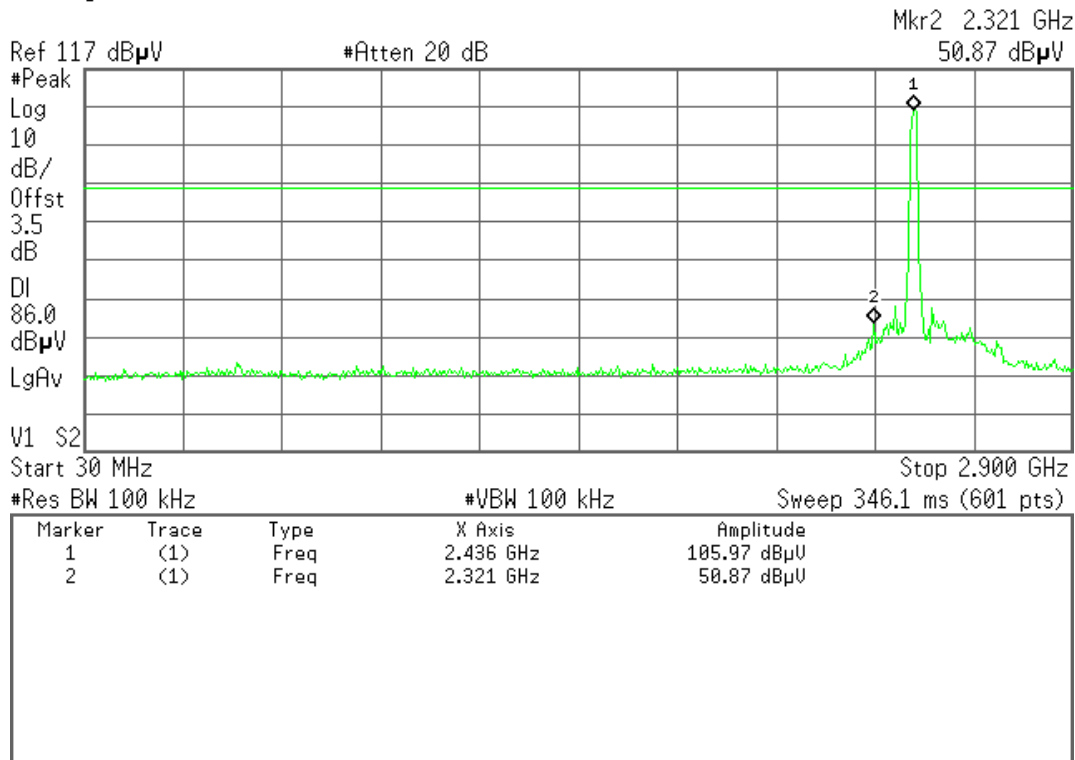

2.9GHz ~ 26.5GHz

Agilent 15:21:01 4 Feb 2010

R T

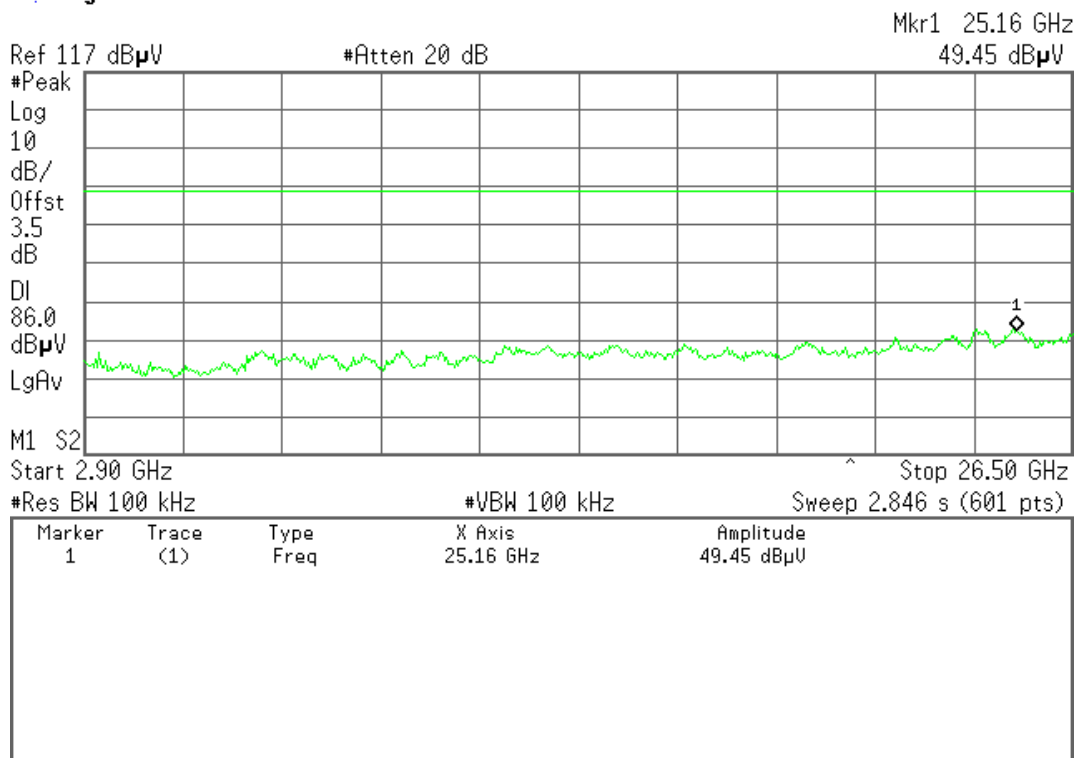




CH High (30MHz ~ 2.9GHz)

* Agilent 15:15:33 4 Feb 2010


R T

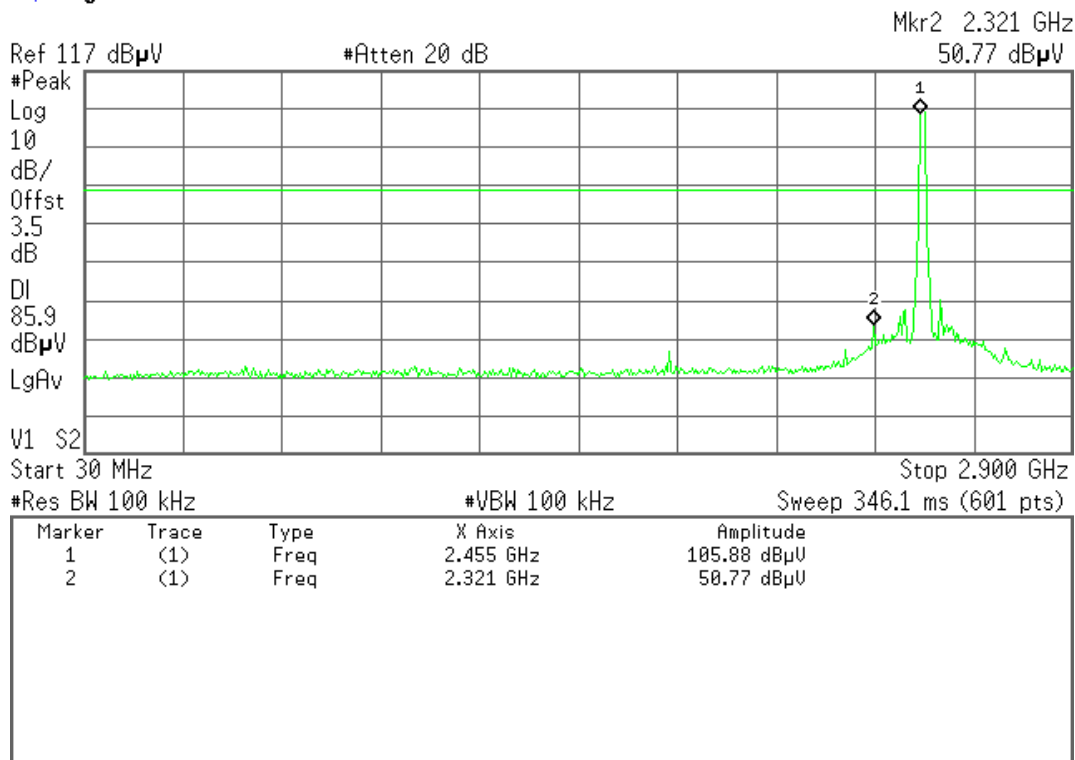

2.9GHz ~ 26.5GHz

* Agilent 15:16:54 4 Feb 2010

R T

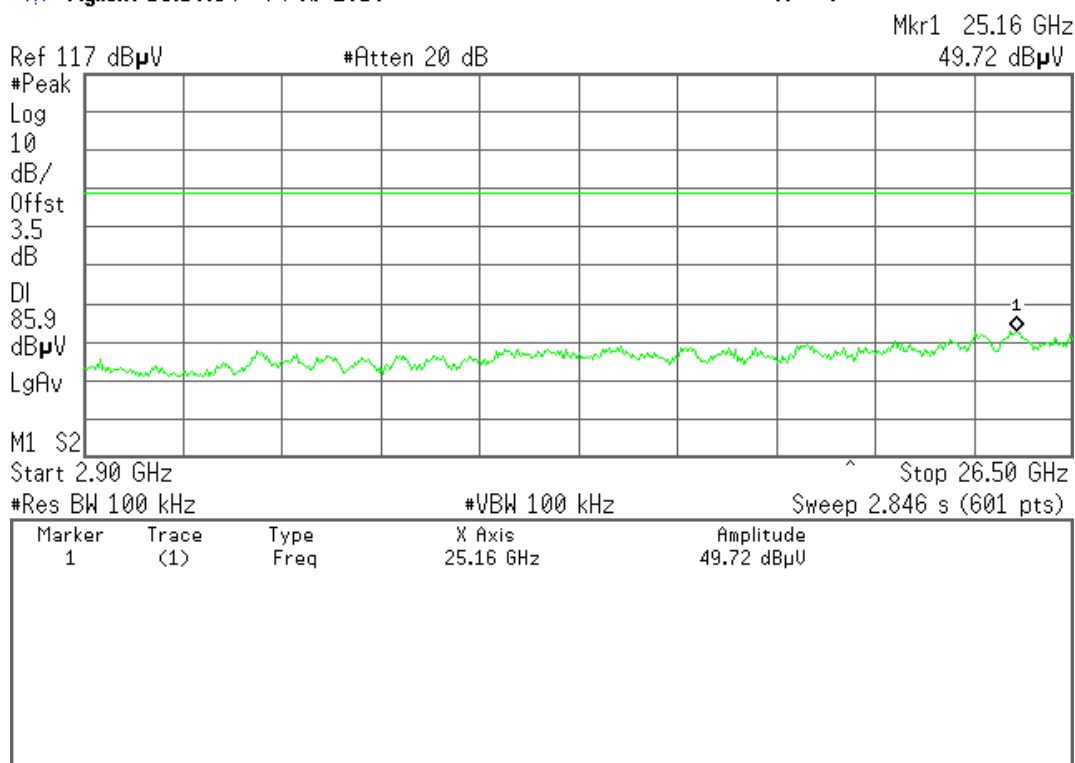




(IEEE 802.11n HT20 MHz mode)
CH Low (30MHz ~2.9GHz)

* Agilent 15:28:38 4 Feb 2010


R T

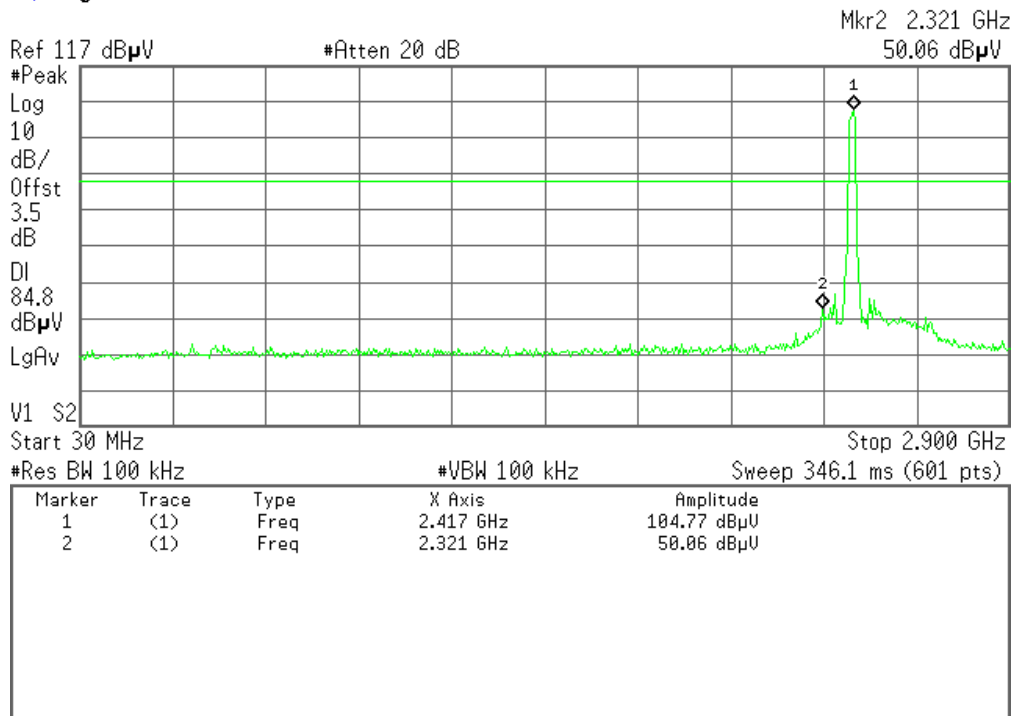

(2.9MHz ~26.5GHz)

* Agilent 15:30:10 4 Feb 2010

R T

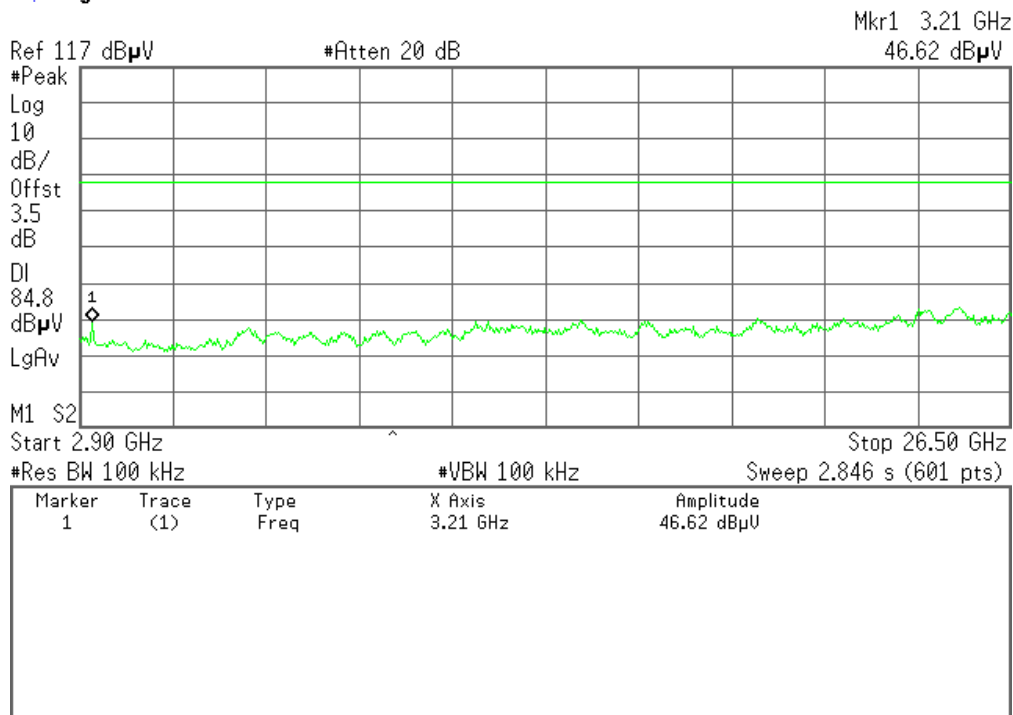




CH Mid(30MHz ~ 2.9GHz)

* Agilent 15:33:56 4 Feb 2010


R T

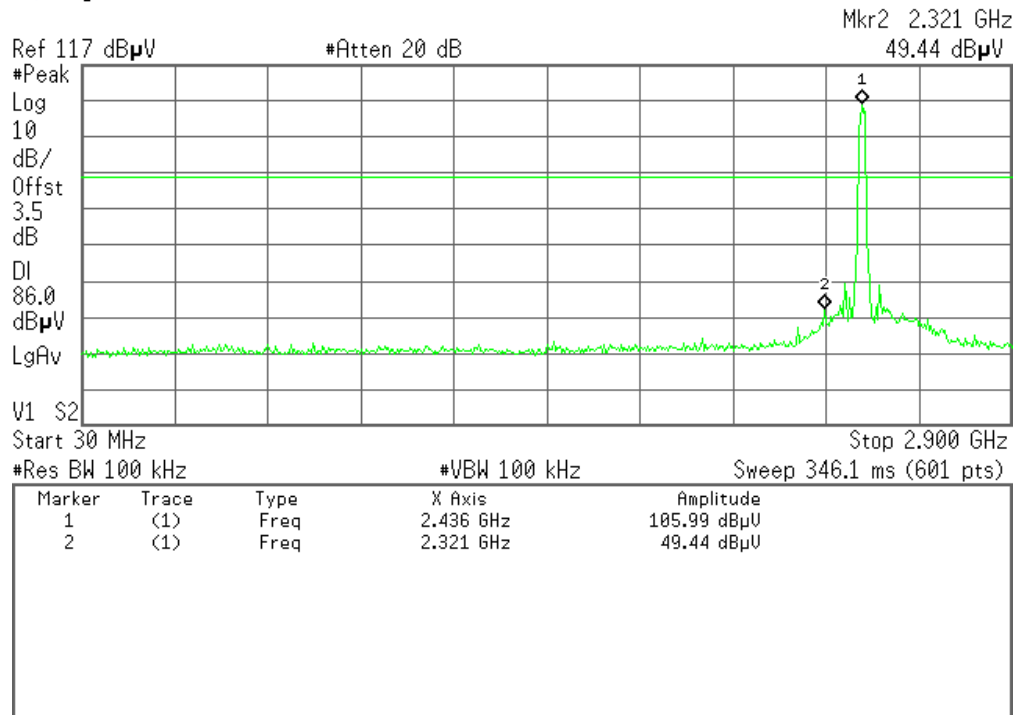

2.9GHz ~ 26.5GHz

* Agilent 15:34:44 4 Feb 2010

R T

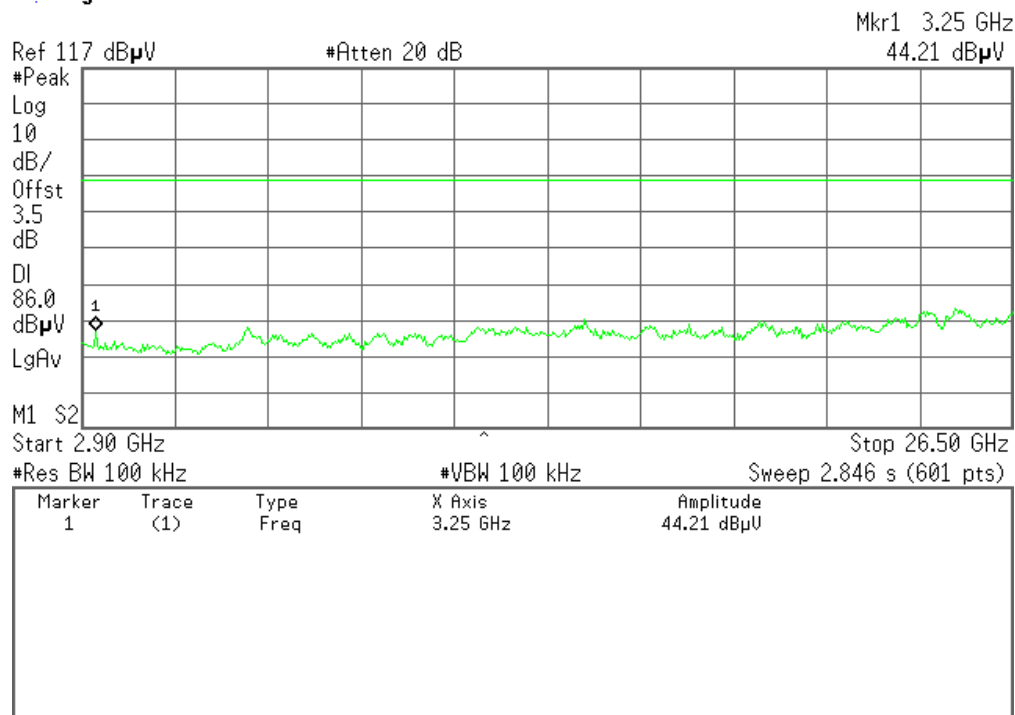




CH High (30MHz ~ 2.9GHz)

Agilent 15:37:08 4 Feb 2010


R T

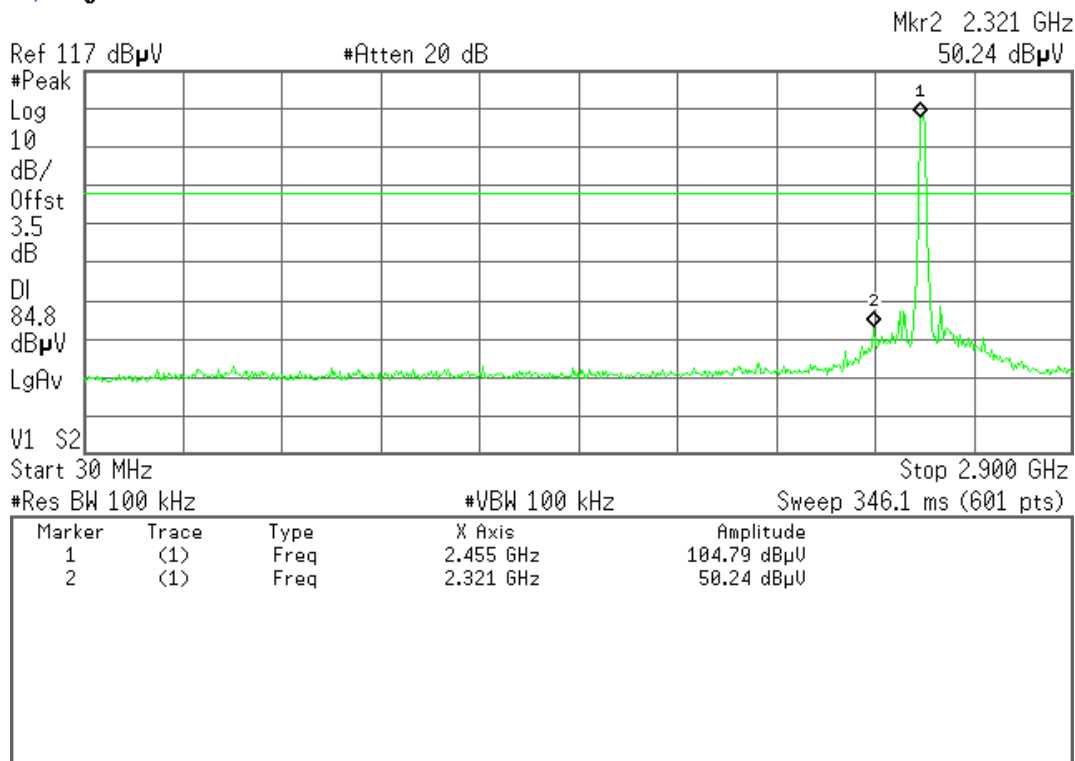

2.9GHz ~ 26.5GHz

Agilent 15:37:54 4 Feb 2010

R T

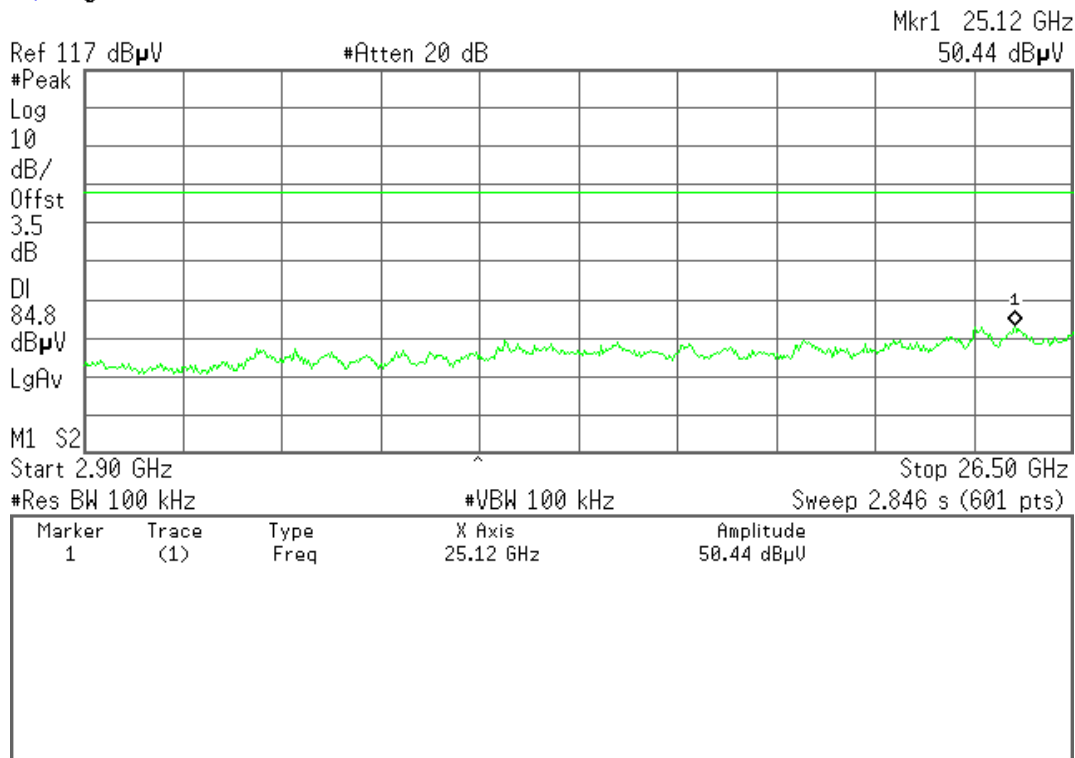




(IEEE 802.11n HT40 MHz mode)

CH Low (30MHz ~2.9GHz)

* Agilent 15:07:19 4 Feb 2010


R T

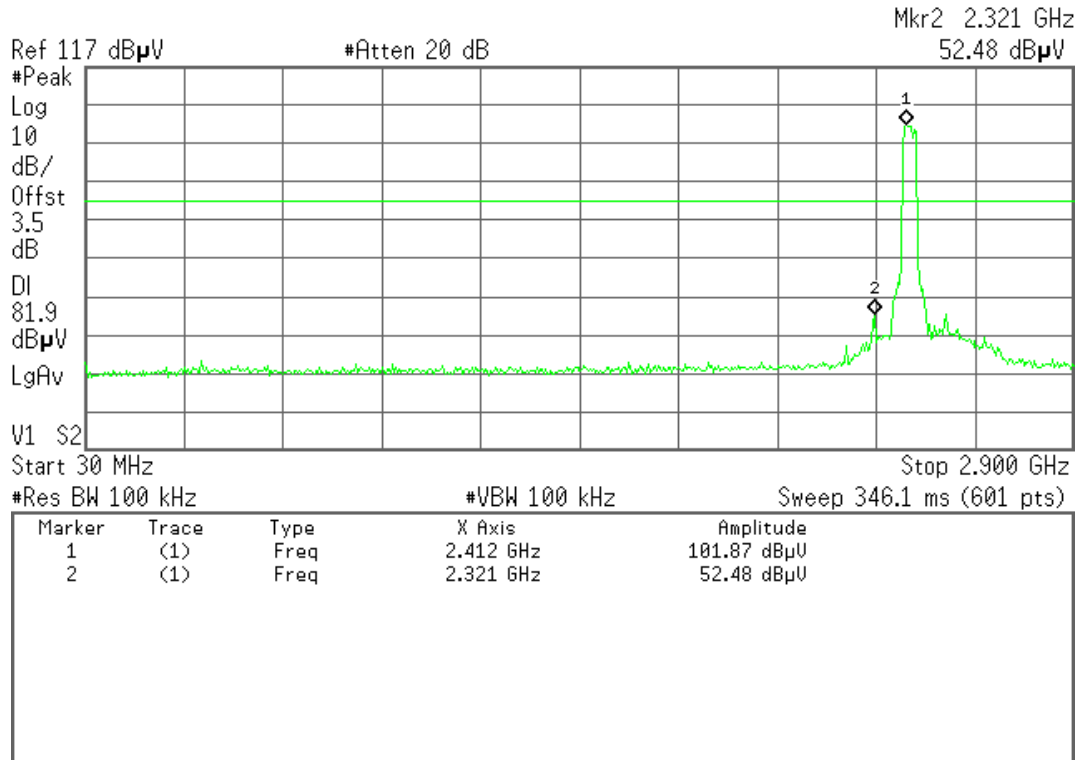

(2.9MHz ~26.5GHz)

* Agilent 15:08:38 4 Feb 2010

R T

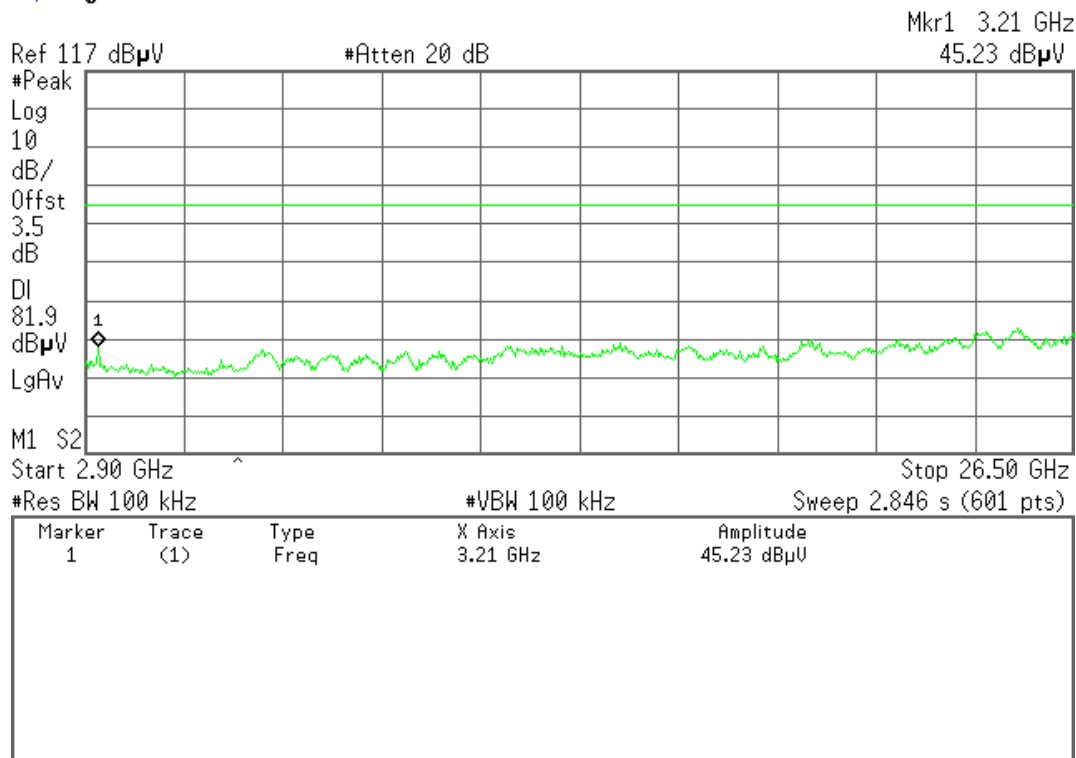




CH Mid(30MHz ~ 2.9GHz)

Agilent 15:04:16 4 Feb 2010


R T

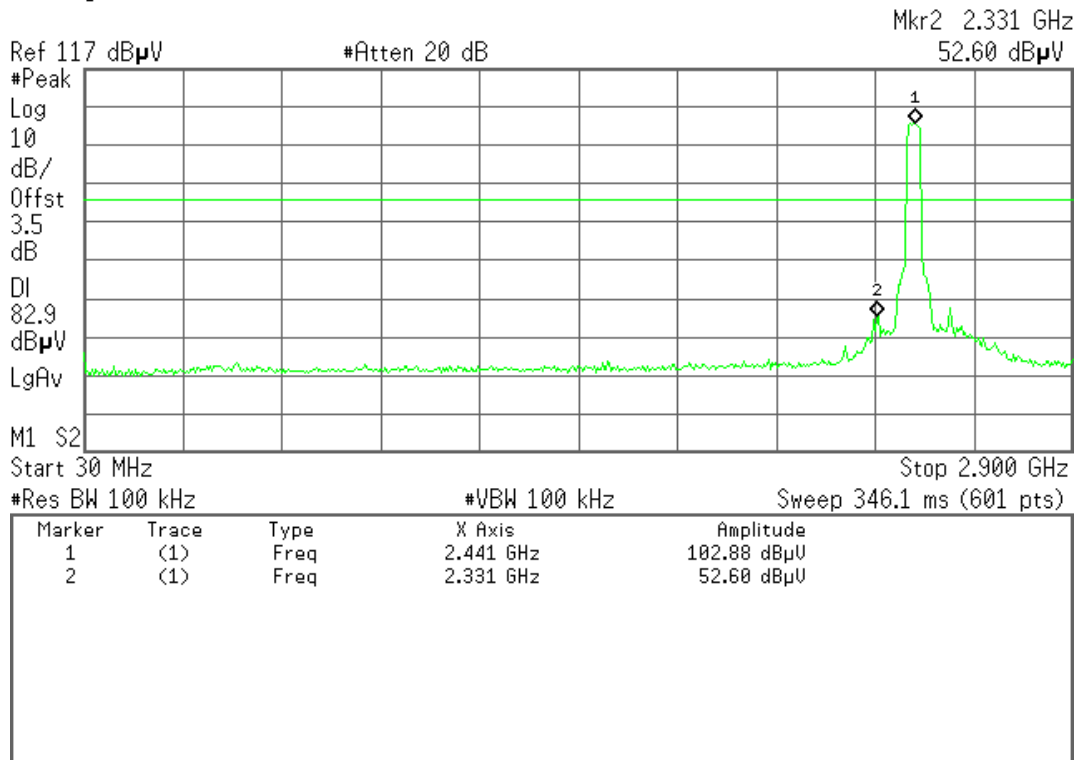

2.9GHz ~ 26.5GHz

Agilent 15:05:57 4 Feb 2010

R T

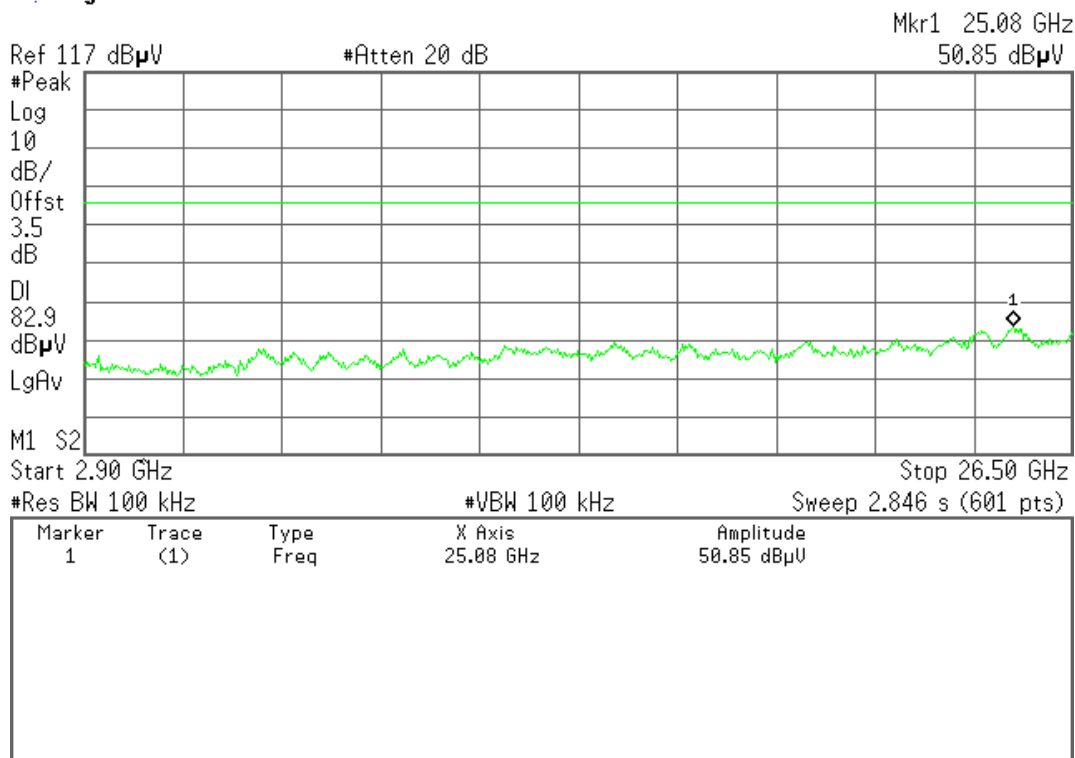




CH High (30MHz ~ 2.9GHz)

Agilent 15:10:32 4 Feb 2010


R T

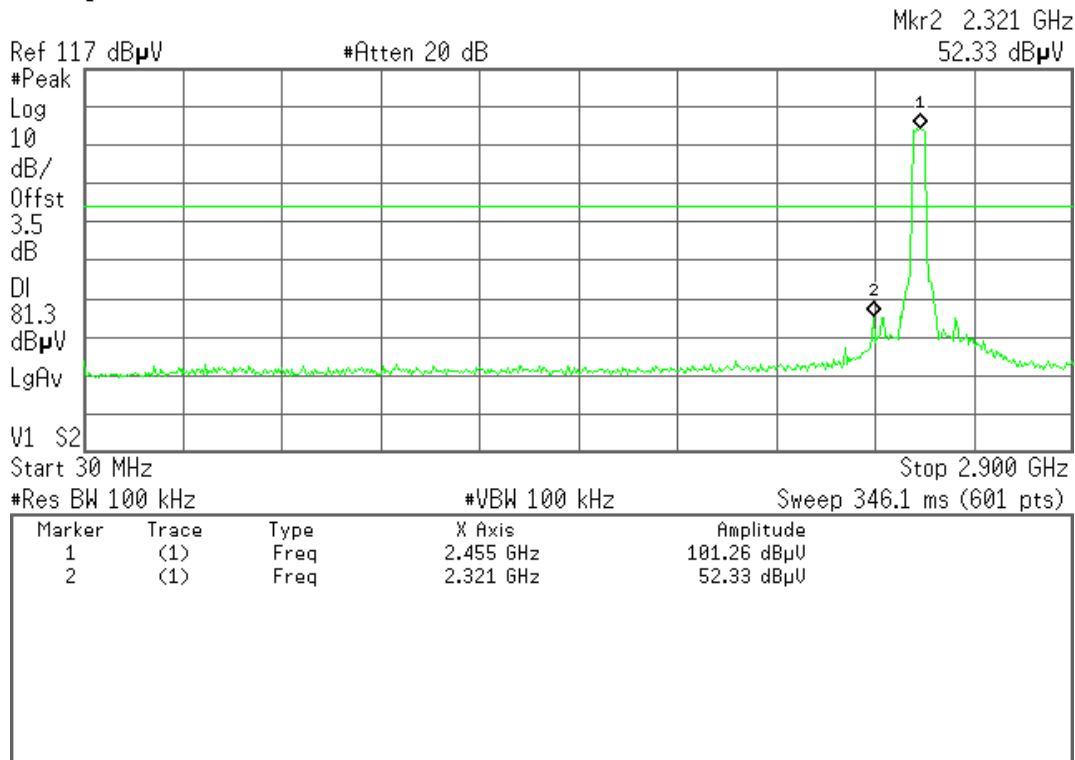

2.9GHz ~ 26.5GHz

Agilent 15:11:21 4 Feb 2010

R T

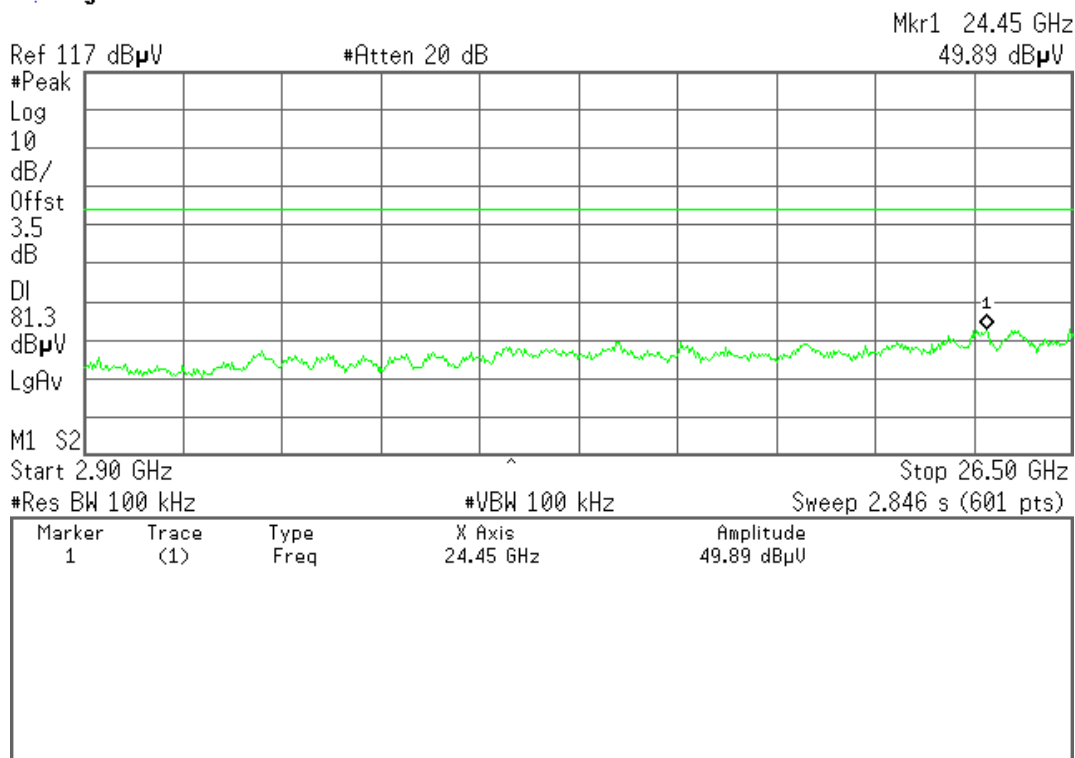

**7.2.5. RADIATED EMISSIONS****7.2.5.1. LIMITS OF RADIATED EMISSIONS MEASUREMENT**

1. According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500	3

Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

2. In the emission table above, the tighter limit applies at the band edges.

Frequency (MHz)	Field Strength (μV/m at 3-meter)	Field Strength (dBμV/m at 3-meter)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

NOTE: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

**7.2.5.2. TEST INSTRUMENTS**

966 RF CHAMBER (2)					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	Calibration Due
ESCI EMI TEST RECEIVE.ESCI	ROHDE&SCHWARZ	1166.5950 03	100783	03/20/2009	03/20/2010
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2009	03/01/2010
Low Noise Amplifier	MITEQ	AM-1604-3000	1123808	02/06/2009	02/06/2010
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
High Noise Amplifier	Agilent	8449B	3008A01838	05/29/2009	05/29/2010
Site NSA	C&C	N/A	N/A	N.C.R	N.C.R
BILOG ANTENNA	SCHAFFNER	CBL6143	5082	06/08/2009	06/09/2010
Horn Antenna	Schwarzbeck	BBHA9120D	1201	03/19/2009	03/19/2010
Signal Generator	Anritsu	MG3694A	#050125	03/01/2009	03/01/2010
Loop Antenna	ARA	PLA-1030/B	1029	02/24/2009	02/24/2010
SHF-EHF Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170171	02/24/2009	02/24/2010


NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The FCC Site Registration number is 101879.
3. N.C.R = No Calibration Required.

7.2.5.3. TEST PROCEDURE (please refer to measurement standard)


1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:
Below 1GHz:
RBW=100kHz / VBW=300kHz / Sweep=AUTO
Above 1GHz:
(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
7. Repeat above procedures until the measurements for all frequencies are complete.

7.2.5.4. TEST SETUP


Below 30MHz

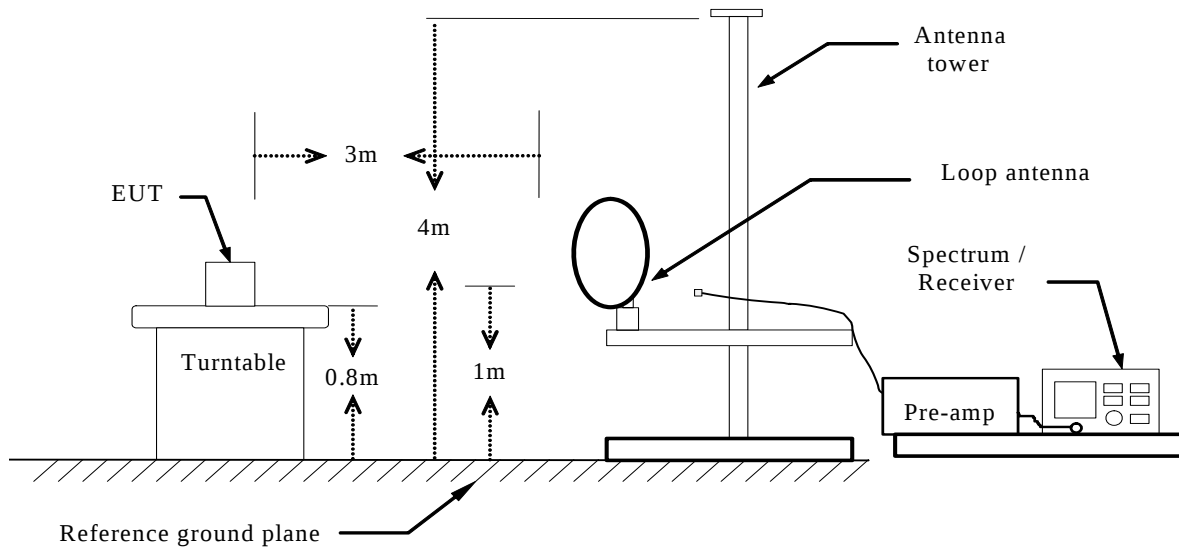

Below 1 GHz

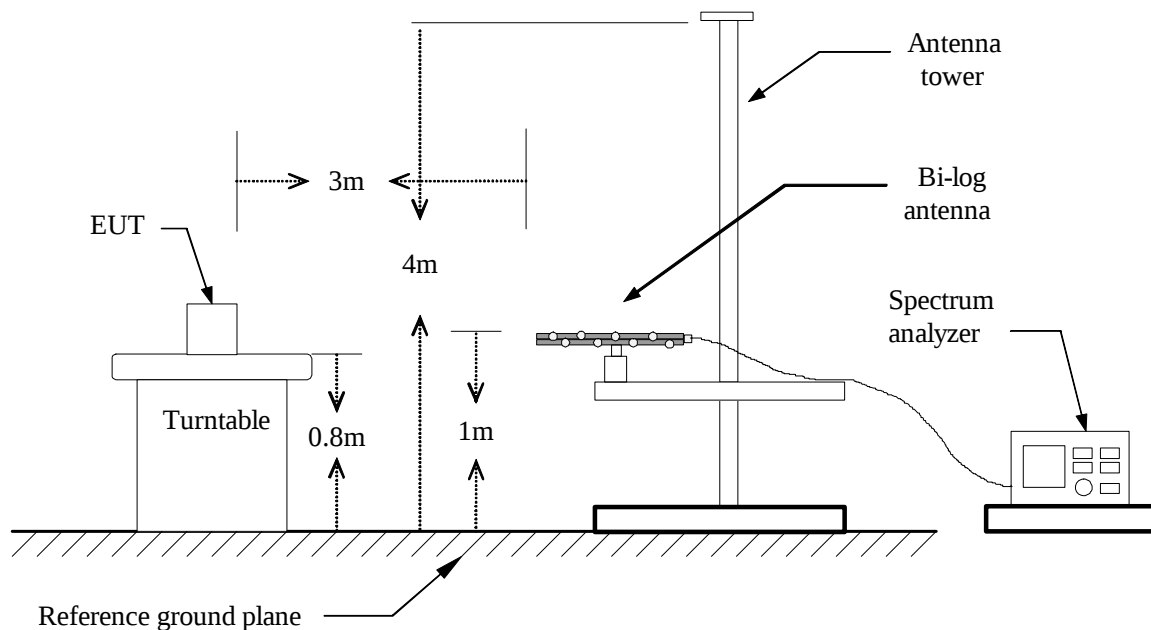

Above 1 GHz

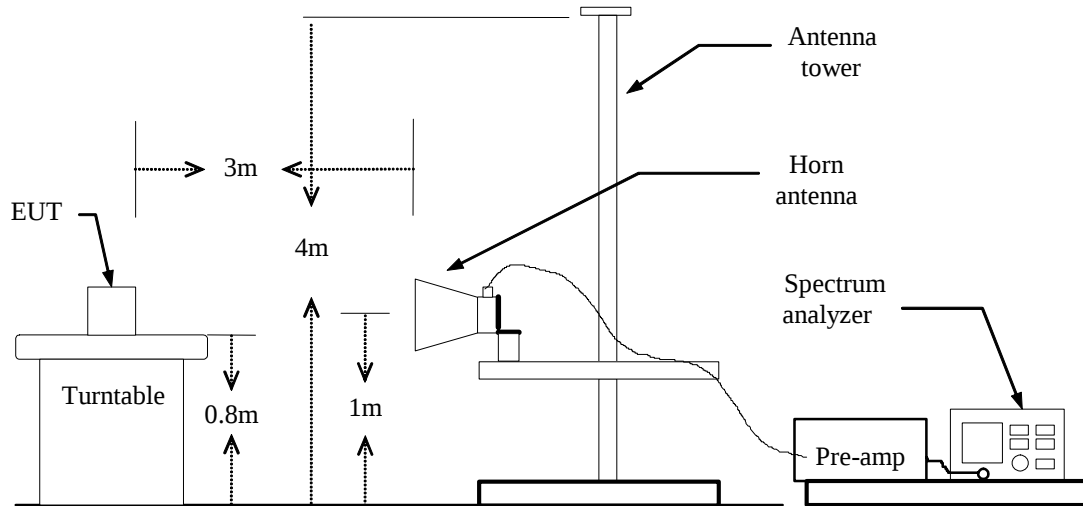

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.2.5.5. Data Sample:

Below 1 GHz

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Remark) (dBuV)	Correction Factor (dB/m)	Result (Remark) (dBuV/m)	Limit (Peak) (dBuV/m)	Margin (dB)	Remark
xxx	V	12.12	10.21	22.33	40.00	-17.67	Peak

Above 1 GHz

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
xxx	V	65.45	63.00	-11.12	54.33	51.88	74.00	54.00	-2.12	AVG

Frequency (MHz)	= Emission frequency in MHz
Ant.Pol. (H/V)	= Antenna polarization
Reading (dBuV)	= Uncorrected Analyzer / Receiver reading
Correction Factor (dB/m)	= Antenna factor + Cable loss – Amplifier gain
Result (dBuV/m)	= Reading (dBuV) + Correction Factor (dB/m)
Limit (dBuV/m)	= Limit stated in standard
Margin (dB)	= Remark Result (dBuV/m) – Limit (dBuV/m)
Peak	= Peak Reading
QP	= Quasi-peak Reading
AVG	= Average Reading

**7.2.5.6. TEST RESULTS****Below 1 GHz**

Operation Mode: Normal Link
(Adapter 1:
UE/UE05L1-050100SPAU) **Test Date:** February 04, 2010

Temperature: 26°C **Tested by:** Tom Gan

Humidity: 65 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
35.400	V	Peak	42.87	-15.82	27.05	40.00	-12.95
143.850	V	Peak	40.67	-19.22	21.45	43.50	-22.05
194.250	V	Peak	41.38	-17.67	23.71	43.50	-19.79
480.833	V	Peak	37.79	-9.62	28.17	46.00	-17.83
769.000	V	Peak	31.84	-4.10	27.74	46.00	-18.26
793.500	V	Peak	31.04	-3.23	27.81	46.00	-18.19
34.500	H	Peak	45.92	-15.22	30.70	40.00	-9.30
60.150	H	Peak	43.51	-19.60	23.91	40.00	-16.09
237.000	H	Peak	31.46	-16.73	14.73	46.00	-31.27
505.333	H	Peak	33.80	-9.18	24.62	46.00	-21.38
646.500	H	Peak	32.33	-5.29	27.04	46.00	-18.96
930.000	H	Peak	31.62	-2.09	29.53	46.00	-16.47

****Note:** No emission found between lowest internal used/generated frequency to 30 MHz.

REMARKS:

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m).



Operation Mode: Normal Link
(Adapter 2:
FRECOM/FPS005USA-050100)

Test Date: February 04, 2010

Temperature: 26°C

Tested by: Tom Gan

Humidity: 65 % RH

Polarity: Ver. / Hor.

Freq. (MHz)	Ant.Pol. H/V	Detector Mode (PK/QP)	Reading (dBuV)	Factor (dB)	Actual FS (dBuV/m)	Limit 3m (dBuV/m)	Safe Margin (dB)
34.050	V	Peak	43.16	-14.93	28.23	40.00	-11.77
70.950	V	Peak	53.76	-20.04	33.72	40.00	-6.28
78.150	V	Peak	54.45	-19.99	34.46	40.00	-5.54
146.550	V	Peak	51.78	-19.18	32.60	43.50	-10.90
219.900	V	Peak	51.99	-17.28	34.71	46.00	-11.29
251.400	V	Peak	46.61	-16.41	30.20	46.00	-15.80
34.050	H	Peak	51.42	-14.93	36.49	40.00	-3.51
70.050	H	Peak	54.35	-20.00	34.35	40.00	-5.65
97.950	H	Peak	49.33	-20.33	29.00	43.50	-14.50
115.050	H	Peak	49.77	-19.76	30.01	43.50	-13.49
143.850	H	Peak	49.68	-19.22	30.46	43.50	-13.04
207.300	H	Peak	48.98	-17.31	31.67	43.50	-11.83

****Note:** No emission found between lowest internal used/generated frequency to 30 MHz.

REMARKS:

1. Measuring frequencies from 9kHz to the 1GHz.
2. Radiated emissions measured in frequency range from 9kHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Remark result (dBuV/m) – Quasi-peak limit (dBuV/m)

**Above 1 GHz****Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** February 04, 2010**Temperature:** 26°C**Tested by:** Tom Gan**Humidity:** 65% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant. Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1233.333	V	57.85	---	-10.89	46.96	---	74.00	54.00	-7.04	Peak
1906.666	V	55.98	---	-6.20	49.78	---	74.00	54.00	-4.22	Peak
2133.333	V	51.16	---	-4.93	46.23	---	74.00	54.00	-7.77	Peak
4833.333	V	45.82	---	2.69	48.51	---	74.00	54.00	-5.49	Peak
N/A										
1233.333	H	55.73	---	-10.89	44.84	---	74.00	54.00	-9.16	Peak
1846.666	H	52.32	---	-6.67	45.65	---	74.00	54.00	-8.35	Peak
1910.000	H	52.37	---	-6.17	46.20	---	74.00	54.00	-7.80	Peak
4825.000	H	46.07	---	2.68	48.75	---	74.00	54.00	-5.25	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH Mid**Test Date:** February 04, 2010**Temperature:** 26°C**Tested by:** Tom Gan**Humidity:** 65% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1233.333	V	57.08	---	-10.89	46.19	---	74.00	54.00	-7.81	Peak
1813.333	V	54.93	---	-6.94	47.99	---	74.00	54.00	-6.01	Peak
1920.000	V	53.91	---	-6.09	47.82	---	74.00	54.00	-6.18	Peak
4875.000	V	51.15	48.57	2.77	53.92	51.34	74.00	54.00	-2.66	AVG.
N/A										
1280.000	H	52.29	---	-10.63	41.66	---	74.00	54.00	-12.34	Peak
1330.000	H	52.56	---	-10.36	42.20	---	74.00	54.00	-11.80	Peak
1910.000	H	51.46	---	-6.17	45.29	---	74.00	54.00	-8.71	Peak
4875.000	H	48.26	---	2.77	51.03	---	74.00	54.00	-2.97	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11b / CH High**Test Date:** February 04, 2010**Temperature:** 26°C**Tested by:** Tom Gan**Humidity:** 65% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1813.333	V	56.04	---	-6.94	49.10	---	74.00	54.00	-4.90	Peak
1920.000	V	54.01	---	-6.09	47.92	---	74.00	54.00	-6.08	Peak
2133.333	V	53.63	---	-4.93	48.70	---	74.00	54.00	-5.30	Peak
4925.000	V	46.47	---	2.85	49.32	---	74.00	54.00	-4.68	Peak
N/A										
1573.333	H	51.21	---	-8.84	42.37	---	74.00	54.00	-11.63	Peak
1910.000	H	51.00	---	-6.17	44.83	---	74.00	54.00	-9.17	Peak
2310.000	H	49.99	---	-4.23	45.76	---	74.00	54.00	-8.24	Peak
4925.000	H	44.92	---	2.85	47.77	---	74.00	54.00	-6.23	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Low**Test Date:** February 04, 2010**Temperature:** 26°C**Tested by:** Tom Gan**Humidity:** 65 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.666	V	57.93	---	-11.80	46.13	---	74.00	54.00	-7.87	Peak
1813.333	V	54.16	---	-6.94	47.22	---	74.00	54.00	-6.78	Peak
2133.333	V	52.26	---	-4.93	47.33	---	74.00	54.00	-6.67	Peak
4825.000	V	47.12	---	2.68	49.80	---	74.00	54.00	-4.20	Peak
N/A										
1333.333	H	53.44	---	-10.34	43.10	---	74.00	54.00	-10.90	Peak
1573.333	H	50.88	---	-8.84	42.04	---	74.00	54.00	-11.96	Peak
1906.666	H	50.50	---	-6.20	44.30	---	74.00	54.00	-9.70	Peak
4825.000	H	45.67	---	2.68	48.35	---	74.00	54.00	-5.65	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH Mid**Test Date:** February 04, 2010**Temperature:** 26°C**Tested by:** Tom Gan**Humidity:** 65 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1813.333	V	54.61	---	-6.94	47.67	---	74.00	54.00	-6.33	Peak
1910.000	V	53.72	---	-6.17	47.55	---	74.00	54.00	-6.45	Peak
2250.000	V	54.08	---	-4.47	49.61	---	74.00	54.00	-4.39	Peak
4875.000	V	50.68	48.18	2.77	53.45	50.95	74.00	54.00	-3.05	AVG.
N/A										
1333.333	H	52.33	---	-10.34	41.99	---	74.00	54.00	-12.01	Peak
1573.333	H	51.24	---	-8.84	42.40	---	74.00	54.00	-11.60	Peak
1910.000	H	50.87	---	-6.17	44.70	---	74.00	54.00	-9.30	Peak
4875.000	H	48.60	---	2.77	51.37	---	74.00	54.00	-2.63	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11g / CH High**Test Date:** February 04, 2010**Temperature:** 26°C**Tested by:** Tom Gan**Humidity:** 65 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.666	V	57.61	---	-11.80	45.81	---	74.00	54.00	-8.19	Peak
1916.666	V	53.33	---	-6.12	47.21	---	74.00	54.00	-6.79	Peak
2250.000	V	53.74	---	-4.47	49.27	---	74.00	54.00	-4.73	Peak
4933.333	V	47.53	---	2.87	50.40	---	74.00	54.00	-3.60	Peak
N/A										
1333.333	H	53.13	---	-10.34	42.79	---	74.00	54.00	-11.21	Peak
1496.666	H	51.71	---	-9.44	42.27	---	74.00	54.00	-11.73	Peak
1956.666	H	48.67	---	-5.80	42.87	---	74.00	54.00	-11.13	Peak
4925.000	H	44.88	---	2.85	47.73	---	74.00	54.00	-6.27	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT20 MHz / CH Low **Test Date:** February 04, 2010**Temperature:** 26°C**Tested by:** Tom Gan**Humidity:** 65% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.666	V	57.58	---	-11.80	45.78	---	74.00	54.00	-8.22	Peak
1493.333	V	54.60	---	-9.46	45.14	---	74.00	54.00	-8.86	Peak
1910.000	V	53.83	---	-6.17	47.66	---	74.00	54.00	-6.34	Peak
4825.000	V	47.54	---	2.68	50.22	---	74.00	54.00	-3.78	Peak
N/A										
1333.333	H	53.29	---	-10.34	42.95	---	74.00	54.00	-11.05	Peak
1573.333	H	50.60	---	-8.84	41.76	---	74.00	54.00	-12.24	Peak
1910.000	H	50.58	---	-6.17	44.41	---	74.00	54.00	-9.59	Peak
4825.000	H	46.12	---	2.68	48.80	---	74.00	54.00	-5.20	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT20 MHz / CH Mid **Test Date:** February 04, 2010
Temperature: 26°C **Tested by:** Tom Gan
Humidity: 65% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.666	V	57.33	---	-11.80	45.53	---	74.00	54.00	-8.47	Peak
1910.000	V	54.80	---	-6.17	48.63	---	74.00	54.00	-5.37	Peak
2133.333	V	53.60	---	-4.93	48.67	---	74.00	54.00	-5.33	Peak
4875.000	V	45.94	---	2.77	48.71	---	74.00	54.00	-5.29	Peak
N/A										
1240.000	H	51.54	---	-10.85	40.69	---	74.00	54.00	-13.31	Peak
1333.333	H	53.16	---	-10.34	42.82	---	74.00	54.00	-11.18	Peak
1573.333	H	51.38	---	-8.84	42.54	---	74.00	54.00	-11.46	Peak
4875.000	H	47.78	---	2.77	50.55	---	74.00	54.00	-3.45	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT20 MHz / CH High **Test Date:** February 04, 2010
Temperature: 26°C **Tested by:** Tom Gan
Humidity: 65% RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1333.333	V	52.98	---	-10.34	42.64	---	74.00	54.00	-11.36	Peak
1676.666	V	50.57	---	-8.02	42.55	---	74.00	54.00	-11.45	Peak
1910.000	V	50.55	---	-6.17	44.38	---	74.00	54.00	-9.62	Peak
4933.333	V	47.06	---	2.87	49.93	---	74.00	54.00	-4.07	Peak
N/A										
1280.000	H	52.46	---	-10.63	41.83	---	74.00	54.00	-12.17	Peak
1330.000	H	43.08	---	-10.36	32.72	---	74.00	54.00	-21.28	Peak
1910.000	H	50.67	---	-6.17	44.50	---	74.00	54.00	-9.50	Peak
4925.000	H	45.72	---	2.85	48.57	---	74.00	54.00	-5.43	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT40 MHz / CH Low **Test Date:** February 04, 2010
Temperature: 26°C **Tested by:** Tom Gan
Humidity: 65 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.666	V	57.14	---	-11.80	45.34	---	74.00	54.00	-8.66	Peak
1813.333	V	54.20	---	-6.94	47.26	---	74.00	54.00	-6.74	Peak
1910.000	V	54.44	---	-6.17	48.27	---	74.00	54.00	-5.73	Peak
4841.666	V	51.17	48.78	2.71	53.88	51.49	74.00	54.00	-2.51	AVG.
N/A										
1333.333	H	53.08	---	-10.34	42.74	---	74.00	54.00	-11.26	Peak
1916.666	H	49.62	---	-6.12	43.50	---	74.00	54.00	-10.50	Peak
2316.666	H	50.67	---	-4.21	46.46	---	74.00	54.00	-7.54	Peak
4841.666	H	50.64	48.55	2.71	53.35	51.26	74.00	54.00	-2.74	AVG.
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).

**Operation Mode:** TX / IEEE 802.11n HT40 MHz / CH Mid**Test Date:** February 04, 2010**Temperature:** 26°C**Tested by:** Tom Gan**Humidity:** 65 % RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.666	V	57.19	---	-11.80	45.39	---	74.00	54.00	-8.61	Peak
1813.333	V	53.71	---	-6.94	46.77	---	74.00	54.00	-7.23	Peak
1910.000	V	54.98	---	-6.17	48.81	---	74.00	54.00	-5.19	Peak
4875.000	V	47.59	---	2.77	50.36	---	74.00	54.00	-3.64	Peak
N/A										
1330.000	H	53.03	---	-10.36	42.67	---	74.00	54.00	-11.33	Peak
1576.666	H	51.09	---	-8.81	42.28	---	74.00	54.00	-11.72	Peak
1910.000	H	51.11	---	-6.17	44.94	---	74.00	54.00	-9.06	Peak
4875.000	H	47.60	---	2.77	50.37	---	74.00	54.00	-3.63	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Operation Mode: TX / IEEE 802.11n HT40 MHz / CH High **Test Date:** February 04, 2010
Temperature: 26°C **Tested by:** Tom Gan
Humidity: 65 % RH **Polarity:** Ver. / Hor.

Frequency (MHz)	Ant.Pol. (H/V)	Reading (Peak) (dBuV)	Reading (Average) (dBuV)	Correction Factor (dB/m)	Result (Peak) (dBuV/m)	Result (Average) (dBuV/m)	Limit (Peak) (dBuV/m)	Limit (Average) (dBuV/m)	Margin (dB)	Remark
1066.666	V	57.21	---	-11.80	45.41	---	74.00	54.00	-8.59	Peak
1920.000	V	53.25	---	-6.09	47.16	---	74.00	54.00	-6.84	Peak
2250.000	V	53.28	---	-4.47	48.81	---	74.00	54.00	-5.19	Peak
4883.333	V	48.72	---	2.78	51.50	---	74.00	54.00	-2.50	Peak
N/A										
1333.333	H	52.22	---	-10.34	41.88	---	74.00	54.00	-12.12	Peak
1573.333	H	51.98	---	-8.84	43.14	---	74.00	54.00	-10.86	Peak
1800.000	H	49.63	---	-7.04	42.59	---	74.00	54.00	-11.41	Peak
4908.333	H	47.58	---	2.82	50.40	---	74.00	54.00	-3.60	Peak
N/A										

REMARKS:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit or as required by the applicant.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



7.3. 6dB BANDWIDTH MEASUREMENT

7.3.1. LIMITS

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.


7.3.2. TEST INSTRUMENTS

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2010

7.3.3. TEST PROCEDURES (please refer to measurement standard)

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Span = 25MHz, Sweep = auto.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

7.3.4. TEST SETUP



**7.3.5. TEST RESULTS***No non-compliance noted***Test Data****Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	12130	>500	PASS
Mid	2437	12131		PASS
High	2462	12144		PASS

Test Data**Test mode: IEEE 802.11g**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	16334	>500	PASS
Mid	2437	15880		PASS
High	2462	15856		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2412	16769	>500	PASS
Mid	2437	16775		PASS
High	2462	16125		PASS

Test Data**Test mode: IEEE 802.11n HT40 MHz**

Channel	Frequency (MHz)	Bandwidth (kHz)	Limit (kHz)	Test Result
Low	2422	35315	>500	PASS
Mid	2437	35415		PASS
High	2452	42637		PASS



Test Plot


(IEEE 802.11b mode)

6dB Bandwidth (CH Low)

Agilent 14:52:07 4 Feb 2010

R T

Mkr1 2.413 00 GHz
2.20 dBm

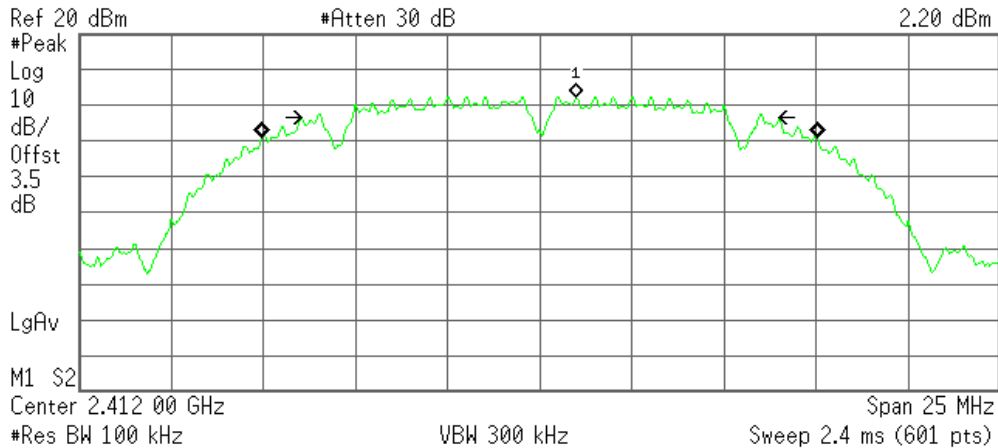

Occupied Bandwidth
15.0662 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error -1.612 kHz
x dB Bandwidth 12.130 MHz

6dB Bandwidth (CH Mid)

Agilent 14:51:29 4 Feb 2010

R T

Mkr1 2.438 00 GHz
2.16 dBm

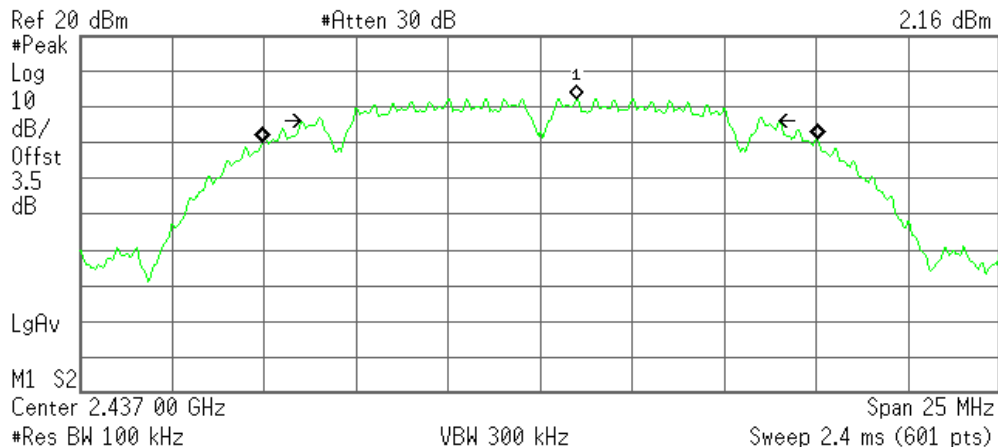

Occupied Bandwidth
15.0779 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 3.388 kHz
x dB Bandwidth 12.131 MHz




6dB Bandwidth (CH High)

Agilent 14:49:49 4 Feb 2010

R T

Mkr1 2.462 00 GHz
-6.82 dBm

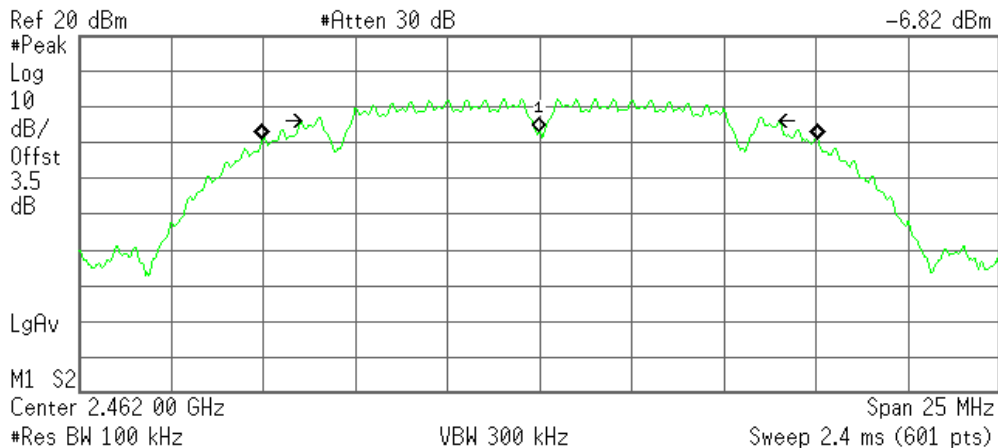

Occupied Bandwidth
15.0760 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 16.464 kHz
x dB Bandwidth 12.144 MHz


(IEEE 802.11g mode)

6dB Bandwidth (CH Low)

Agilent 14:53:09 4 Feb 2010

R T

Mkr1 2.414 50 GHz
0.28 dBm

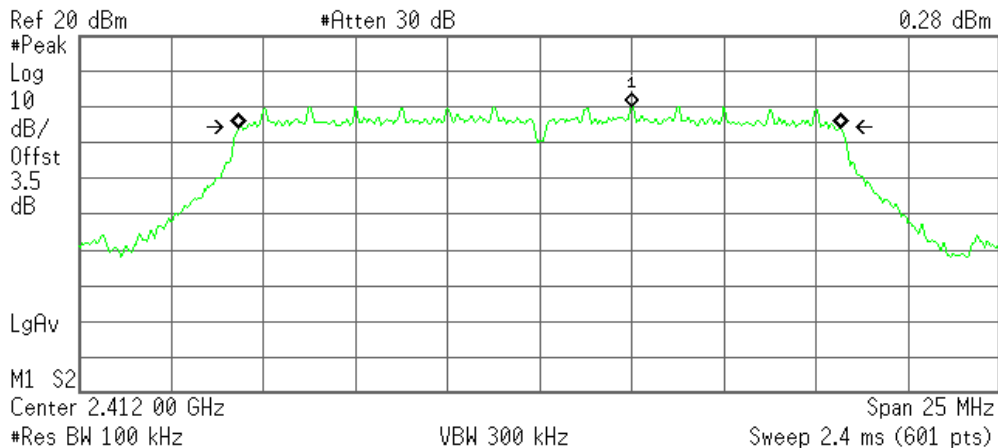

Occupied Bandwidth
16.3464 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 6.099 kHz
x dB Bandwidth 16.334 MHz




6dB Bandwidth (CH Mid)

Agilent 14:53:28 4 Feb 2010

R T

Mkr1 2.439 50 GHz
-0.26 dBm

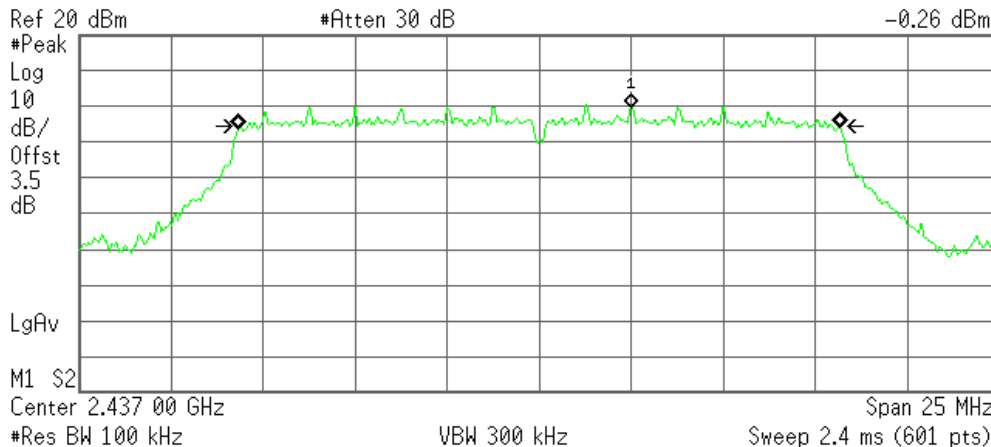

Occupied Bandwidth
16.3434 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 8.733 kHz
x dB Bandwidth 15.880 MHz

6dB Bandwidth (CH High)

Agilent 14:54:02 4 Feb 2010

R T

Mkr1 2.464 50 GHz
0.04 dBm

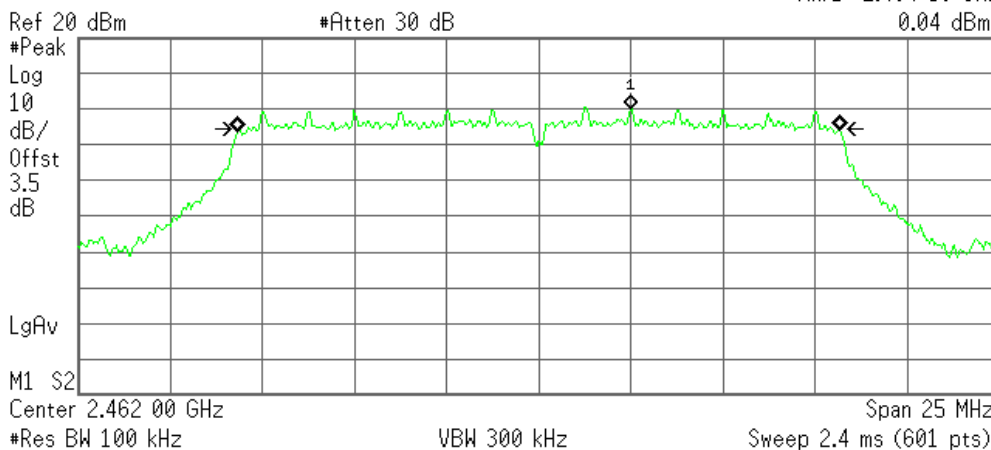

Occupied Bandwidth
16.3387 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 9.739 kHz
x dB Bandwidth 15.856 MHz




(IEEE 802.11n HT20 MHz mode)

6dB Bandwidth (CH Low)

Agilent 14:57:54 4 Feb 2010

R T

Mkr1 2.407 00 GHz
-0.73 dBm

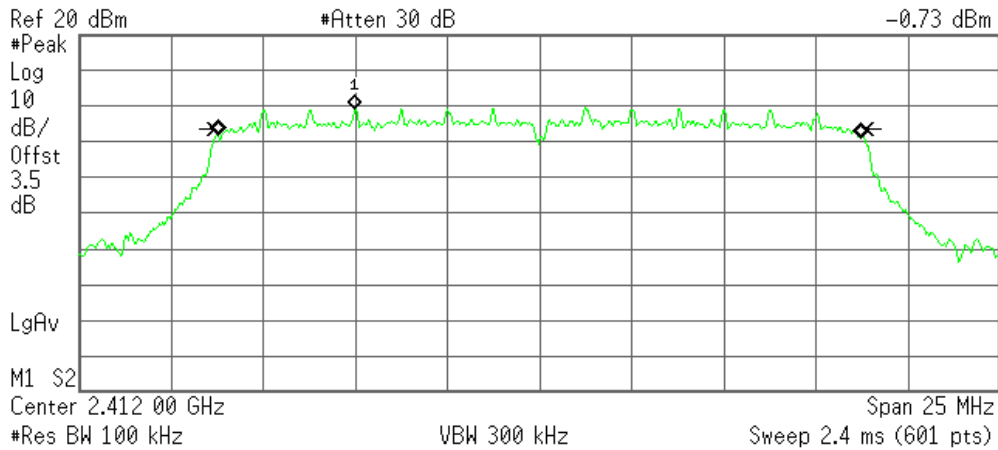

Occupied Bandwidth
17.4151 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 2.827 kHz
x dB Bandwidth 16.769 MHz

6dB Bandwidth (CH Mid)

Agilent 14:57:20 4 Feb 2010

R T

Mkr1 2.438 29 GHz
-0.70 dBm

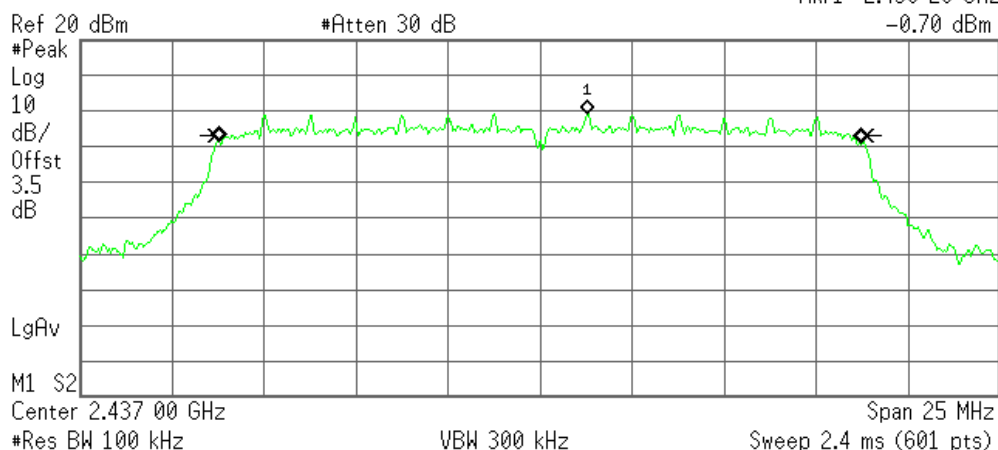

Occupied Bandwidth
17.4189 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 6.587 kHz
x dB Bandwidth 16.775 MHz




6dB Bandwidth (CH High)

Agilent 14:56:53 4 Feb 2010

R T

Mkr1 2.463 29 GHz
-0.34 dBm

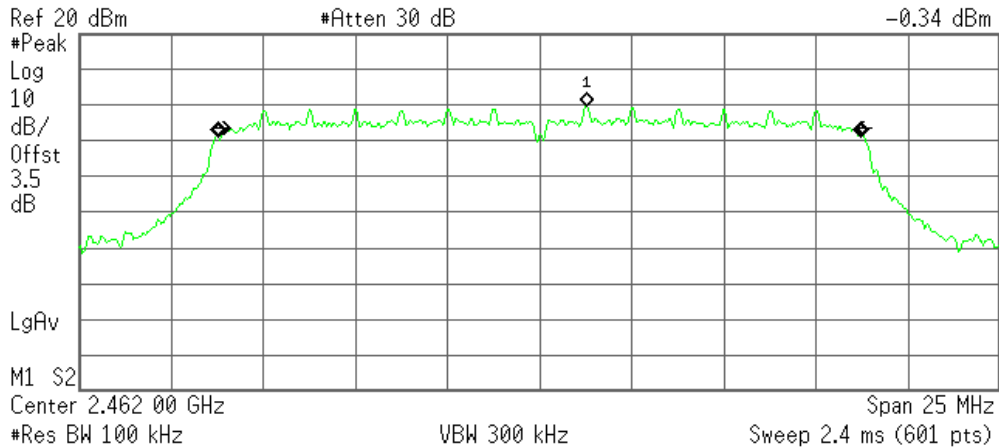

Occupied Bandwidth
17.4050 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error 10.501 kHz
x dB Bandwidth 16.125 MHz


(IEEE 802.11n HT40 MHz mode)

6dB Bandwidth (CH Low)

Agilent 14:59:18 4 Feb 2010

R T

Mkr1 2.427 00 GHz
-4.55 dBm

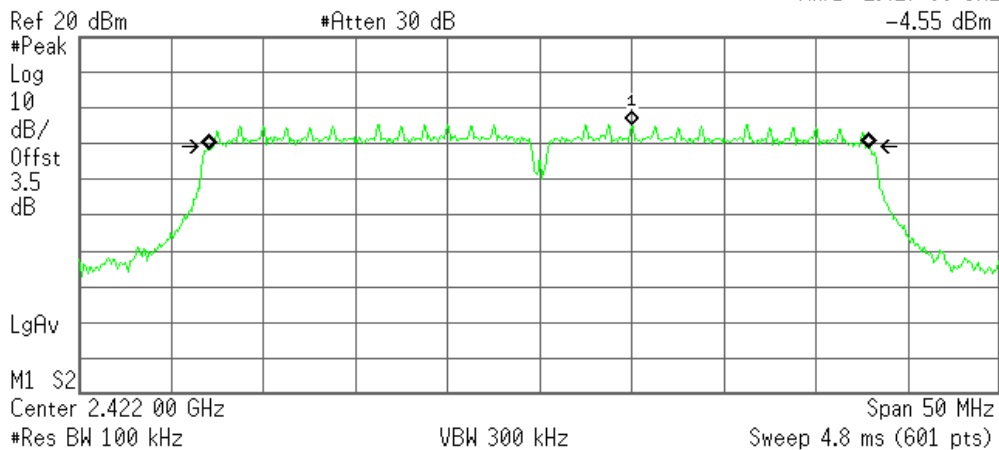

Occupied Bandwidth
35.7383 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -12.433 kHz
x dB Bandwidth 35.315 MHz




6dB Bandwidth (CH Mid)

Agilent 15:00:30 4 Feb 2010

R T

Mkr1 2.442 00 GHz
-3.57 dBm

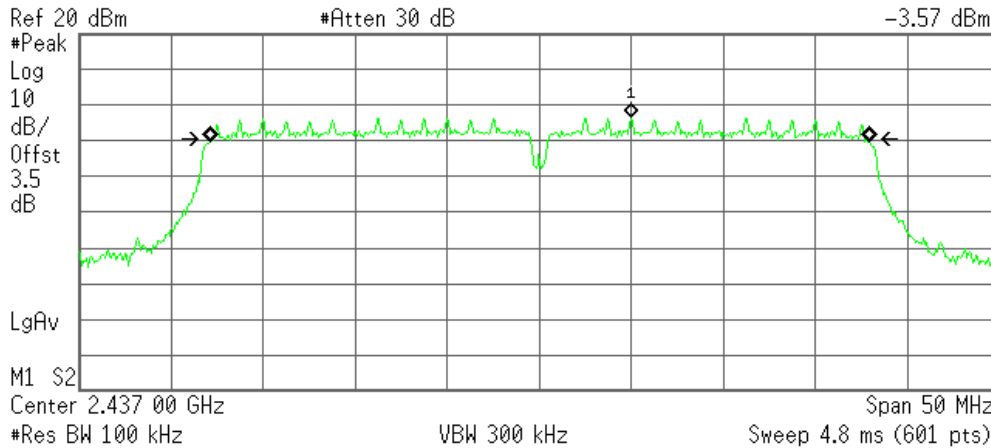

Occupied Bandwidth
35.7473 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB


Transmit Freq Error 2.244 kHz
x dB Bandwidth 35.415 MHz

6dB Bandwidth (CH High)

Agilent 14:59:52 4 Feb 2010

R T

Mkr1 2.457 00 GHz
-4.81 dBm

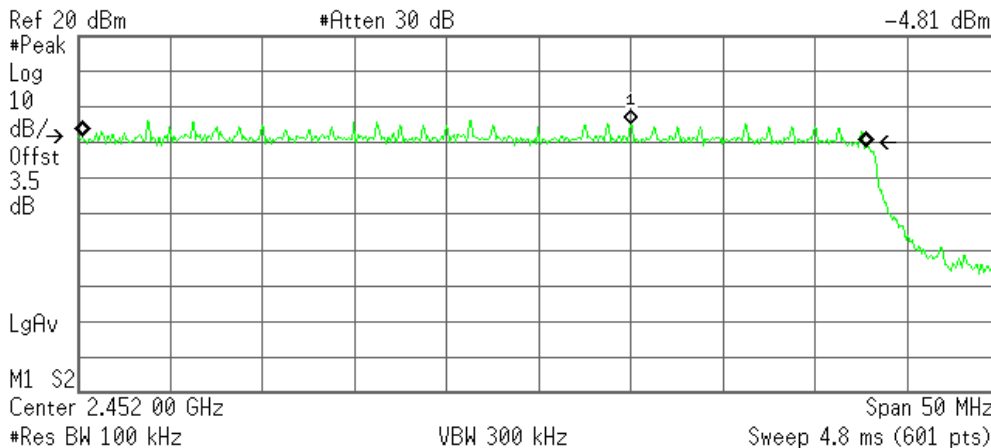

Occupied Bandwidth
42.5564 MHz

Occ BW % Pwr 99.00 %
x dB -6.00 dB

Transmit Freq Error -3.497 MHz
x dB Bandwidth 42.637 MHz



7.4. PEAK OUTPUT POWER

7.4.1. LIMITS

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


7.4.2. TEST INSTRUMENTS

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2010

7.4.3. TEST PROCEDURES (please refer to measurement standard)

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz.
3. Set VBW $\geq$ 3 MHz.
4. Use sample detector mode if bin width (i.e., span/number of points in spectrum display) < 0.5 RBW. Otherwise use peak detector mode.
5. Use a video trigger with the trigger level set to enable triggering only on full power pulses. Transmitter must operate at full control power for entire sweep of every sweep. If the device transmits continuously, with no off intervals or reduced power intervals, the trigger may be set to "free run".
6. Trace average 100 traces in power averaging mode.
7. Compute power by integrating the spectrum across the 26 dB EBW of the signal. The integration can be performed using the spectrum analyzer's band power measurement function with band limits set equal to the EBW band edges or by summing power levels in each 1 MHz band in linear power terms. The 1 MHz band power levels to be summed can be obtained by averaging, in linear power terms, power levels in each frequency bin across the 1 MHz.

7.4.4. TEST SETUP



**7.4.5. TEST RESULTS***No non-compliance noted***Test Data****Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	15.62	0.03648	1	PASS
Mid	2437	15.13	0.03258		PASS
High	2462	15.14	0.03266		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	14.89	0.03083	1	PASS
Mid	2437	14.54	0.02844		PASS
High	2462	14.44	0.02780		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	13.91	0.02460	1	PASS
Mid	2437	13.78	0.02388		PASS
High	2462	13.58	0.02280		PASS

Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2412	12.08	0.01614	1	PASS
Mid	2437	13.14	0.02061		PASS
High	2462	12.10	0.01622		PASS




Test Plot

(IEEE 802.11b mode)

Peak power (CH Low)

Agilent 13:57:46 4 Feb 2010

R T

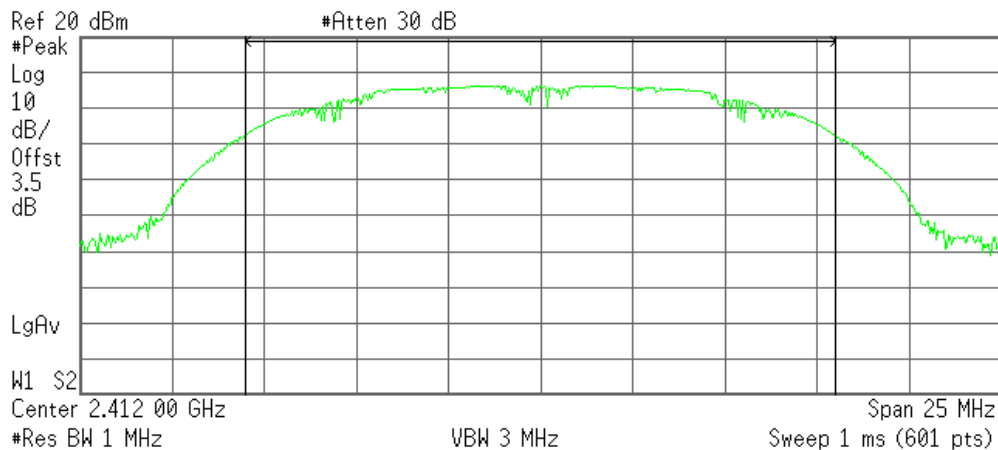

Channel Power

15.62 dBm /16.0000 MHz


Power Spectral Density

-56.42 dBm/Hz

Peak power (CH Mid)

Agilent 14:00:29 4 Feb 2010

R T

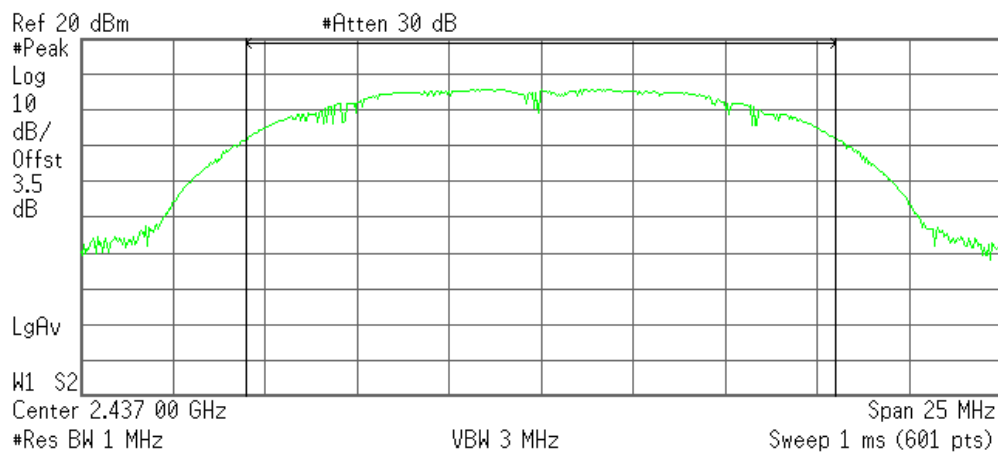

Channel Power

15.13 dBm /16.0000 MHz

Power Spectral Density


-56.91 dBm/Hz



Peak power (CH High)

* Agilent 14:06:10 4 Feb 2010

R T

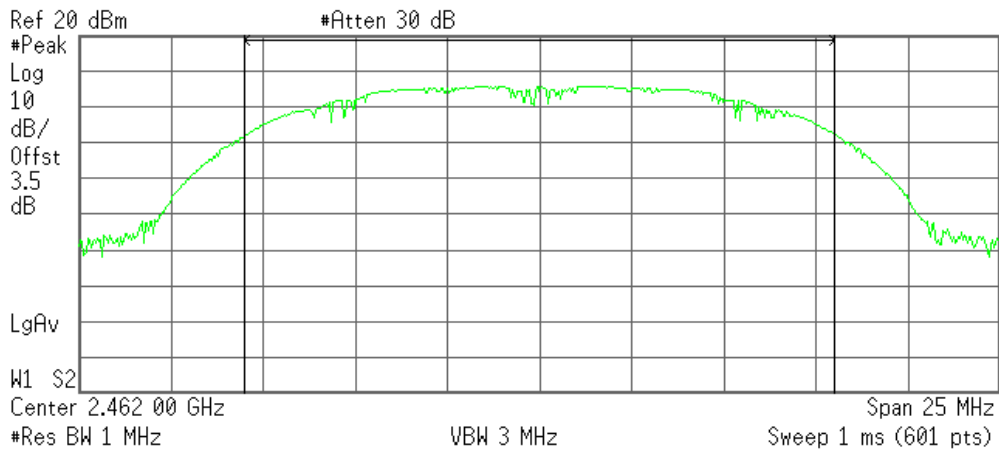

Channel Power

15.14 dBm /16.0000 MHz

Power Spectral Density


-56.90 dBm/Hz

(IEEE 802.11g mode)

Peak power (CH Low)

* Agilent 14:09:50 4 Feb 2010

R T

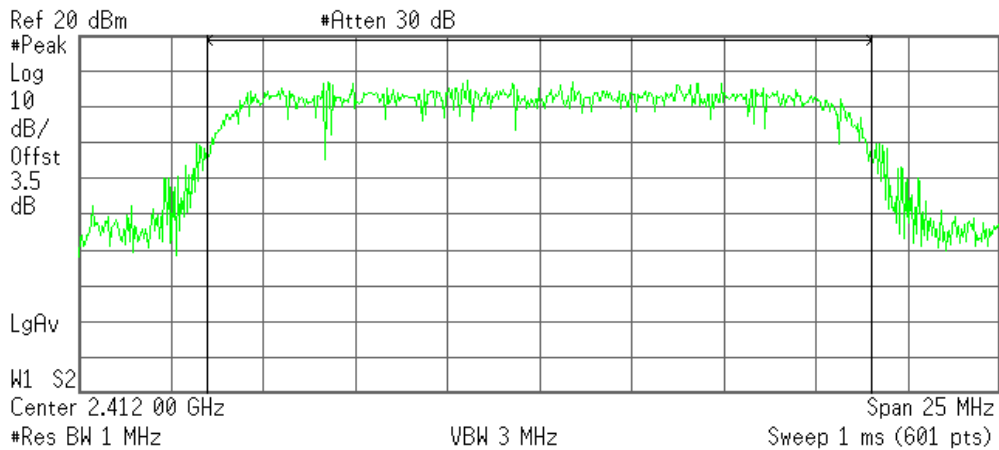

Channel Power

14.89 dBm /18.0000 MHz

Power Spectral Density


-57.66 dBm/Hz



Peak power (CH Mid)

* Agilent 14:08:51 4 Feb 2010

R T

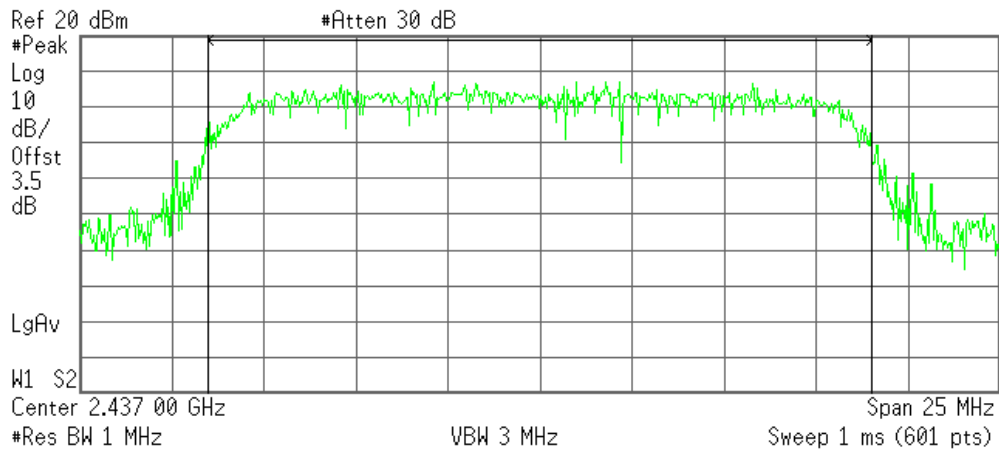

Channel Power

14.54 dBm /18.0000 MHz


Power Spectral Density

-58.01 dBm/Hz

Peak power (CH High)

* Agilent 14:07:56 4 Feb 2010

R T

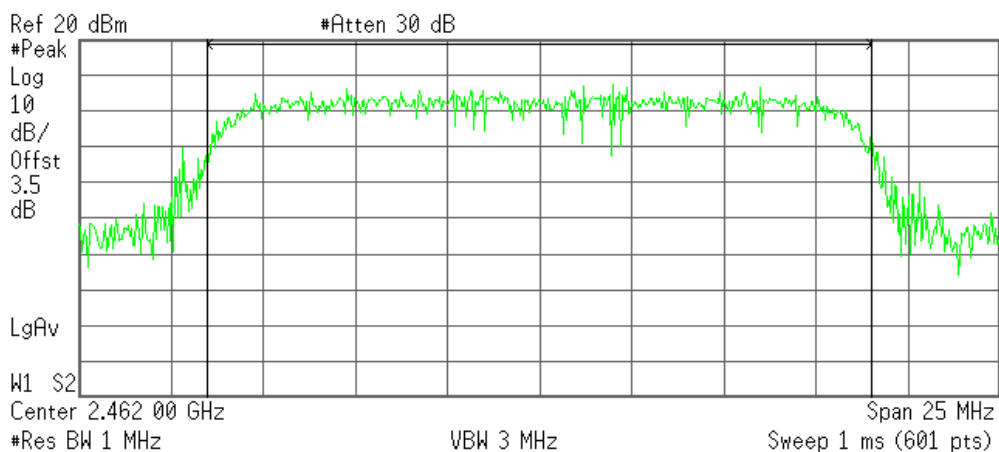

Channel Power

14.44 dBm /18.0000 MHz

Power Spectral Density

-58.12 dBm/Hz




(IEEE 802.11n HT20 MHz mode)

Peak power (CH Low)

Agilent 14:16:28 4 Feb 2010

R T

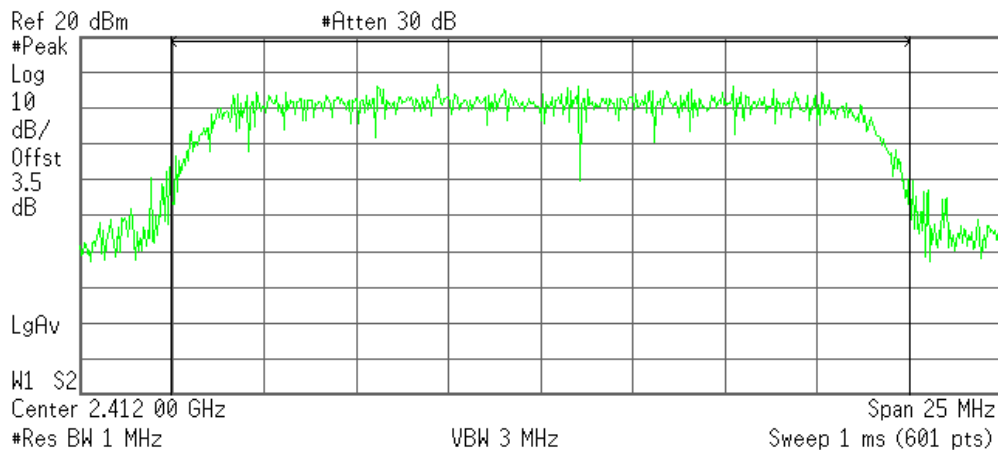

Channel Power

13.91 dBm /20.0000 MHz


Power Spectral Density

-59.10 dBm/Hz

Peak power (CH Mid)

Agilent 14:14:49 4 Feb 2010

R T

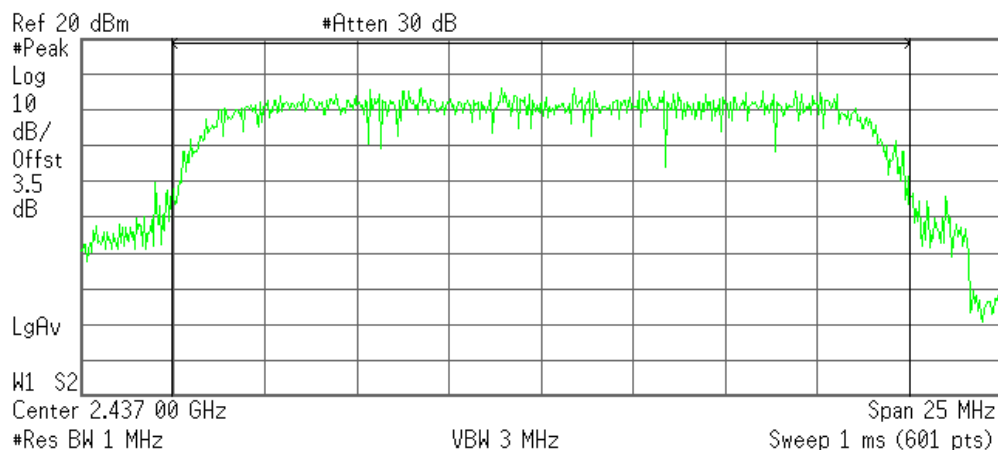

Channel Power

13.78 dBm /20.0000 MHz

Power Spectral Density


-59.23 dBm/Hz



Peak power (CH High)

* Agilent 14:18:44 4 Feb 2010

R T

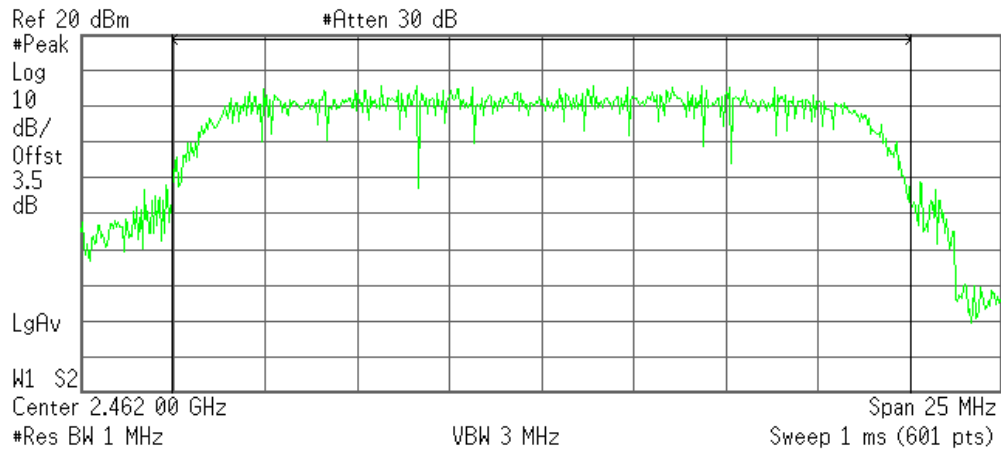

Channel Power

13.58 dBm /20.0000 MHz

Power Spectral Density


-59.43 dBm/Hz

(IEEE 802.11n HT40 MHz mode)

Peak power (CH Low)

* Agilent 14:22:48 4 Feb 2010

R T

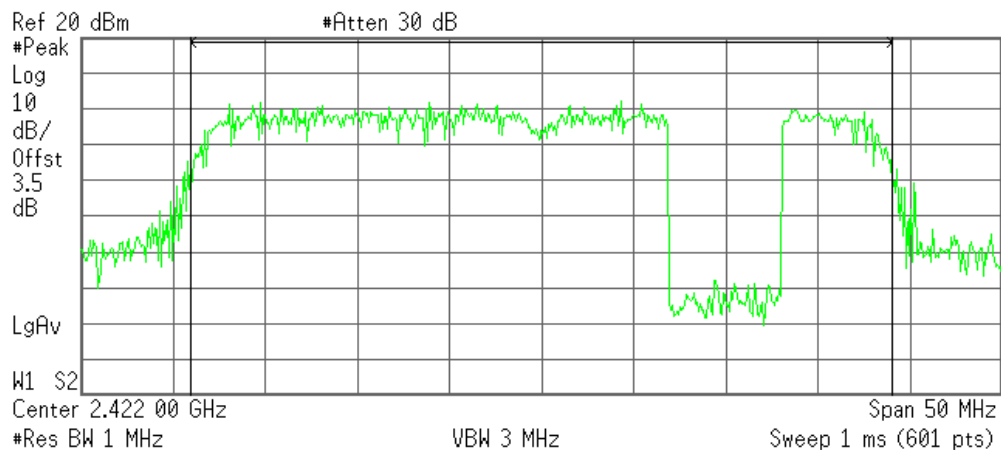

Channel Power

12.08 dBm /38.0000 MHz

Power Spectral Density


-63.72 dBm/Hz



Peak power (CH Mid)

Agilent 14:24:17 4 Feb 2010

R T

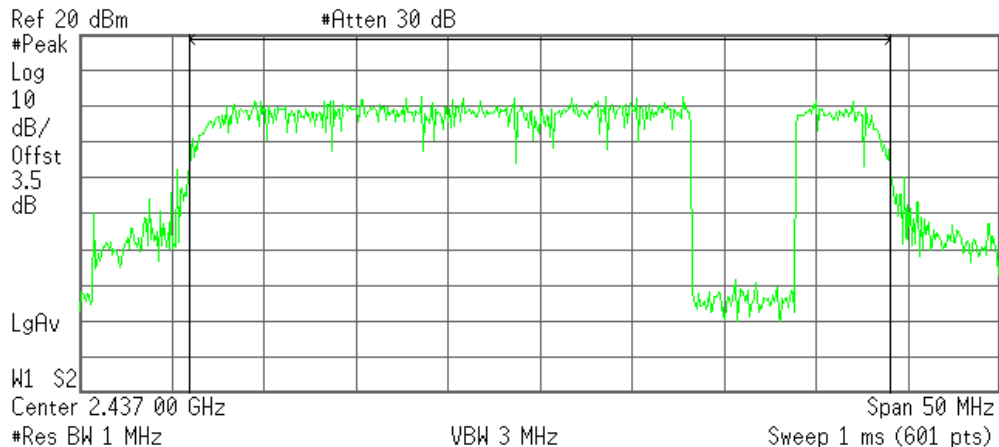

Channel Power

13.14 dBm /38.0000 MHz


Power Spectral Density

-62.66 dBm/Hz

Peak power (CH High)

Agilent 14:26:42 4 Feb 2010

R T

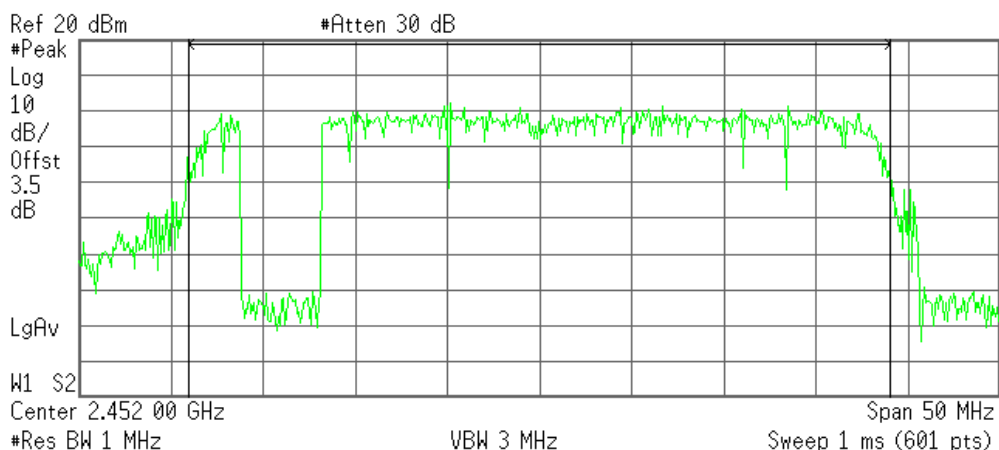

Channel Power

12.10 dBm /38.0000 MHz

Power Spectral Density

-63.70 dBm/Hz

**7.5. BAND EDGES MEASUREMENT:****7.5.1. LIMITS**

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

7.5.2. TEST INSTRUMENTS

966 RF CHAMBER (2)					
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	Calibration Due
ESCI EMI TEST RECEIVE.ESCI	ROHDE&SCHWARZ	1166.5950 03	100783	03/20/2009	03/20/2010
Spectrum Analyzer	Agilent	E4446A	US44300399	03/01/2009	03/01/2010
Low Noise Amplifier	MITEQ	AM-1604-3000	1123808	02/06/2009	02/06/2010
Turn Table	EMCO	2081-1.21	N/A	N.C.R	N.C.R
Controller	CT	N/A	N/A	N.C.R	N.C.R
High Noise Amplifier	Agilent	8449B	3008A01838	05/29/2009	05/29/2010
Site NSA	C&C	N/A	N/A	N.C.R	N.C.R
BILOG ANTENNA	SCHAFFNER	CBL6143	5082	06/08/2009	06/09/2010
Horn Antenna	SCHAFFNER	BBHA9120D	1201	03/19/2009	03/19/2010
Signal Generator	Anritsu	MG3694A	#050125	03/01/2009	03/01/2010

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


2. The FCC Site Registration number is 101879.

4. N.C.R = No Calibration Required.

7.5.3. TEST PROCEDURES (please refer to measurement standard)

1. The EUT is placed on a turntable, which is 0.8m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are

7.5.4. TEST SETUP

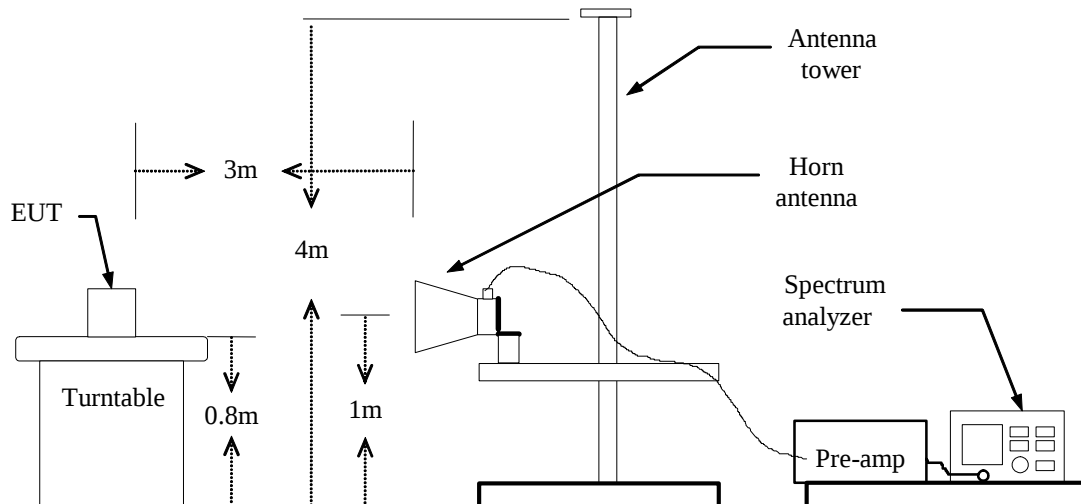

**7.5.5. TEST RESULTS****IEEE 802.11b mode / CH Low**

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2390.00	V	57.53	45.65	-3.92	53.61	41.73	74	54	-20.39	-12.27
N/A										
2390.00	H	60.24	51.50	-3.92	56.32	47.58	74	54	-17.68	-6.42
N/A										

IEEE 802.11b mode / CH High

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2483.50	V	52.31	41.41	-3.82	48.49	37.59	74	54	-25.51	-16.41
N/A										
2483.50	H	59.44	51.00	-3.82	55.62	47.18	74	54	-18.38	-6.82
N/A										

**IEEE 802.11g mode / CH Low**

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2390.00	V	59.17	42.61	-3.92	55.25	38.69	74	54	-18.75	-15.31
N/A										
2390.00	H	68.39	49.36	-3.92	64.47	45.44	74	54	-9.53	-8.56
N/A										

IEEE 802.11g mode / CH High

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2483.50	V	55.50	40.60	-3.82	51.68	36.78	74	54	-22.32	-17.22
N/A										
2483.50	H	69.33	48.93	-3.82	65.51	45.11	74	54	-8.49	-8.89
N/A										

**IEEE 802.11n HT20 MHz mode / CH Low**

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2390.00	V	59.87	42.74	-3.92	55.95	38.82	74	54	-18.05	-15.18
N/A										
2390.00	H	68.43	49.68	-3.92	64.51	45.76	74	54	-9.49	-8.24
N/A										

IEEE 802.11n HT20 MHz mode / CH High

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2483.50	V	55.96	39.62	-3.82	52.14	35.80	74	54	-21.86	-18.20
N/A										
2483.50	H	69.48	49.35	-3.82	65.66	45.53	74	54	-8.34	-8.47
N/A										

**IEEE 802.11n HT40 MHz mode / CH Low**

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2390.00	V	59.92	45.66	-3.92	56.00	41.74	74	54	-18.00	-12.26
N/A										
2390.00	H	68.90	52.71	-3.92	64.98	48.79	74	54	-9.02	-5.21
N/A										

IEEE 802.11n HT40 MHz mode / CH High

Freq. (MHz)	Ant. Pol H/V	Peak Reading (dBuV)	AV Reading (dBuV)	Ant. / CL CF (dB)	Actual Fs		Peak Limit (dBuV/m)	AV Limit (dBuV/m)	Peak Margin (dB)	AV Margin (dB)
					Peak (dBuV/m)	AV (dBuV/m)				
2483.50	V	58.98	40.17	-3.82	55.16	36.35	74	54	-18.84	-17.65
N/A										
2483.50	H	69.14	52.14	-3.82	65.32	48.32	74	54	-8.68	-5.68
N/A										



Test Plot (IEEE 802.11b mode)


Band Edges (CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 17:10:04 4 Feb 2010

R T

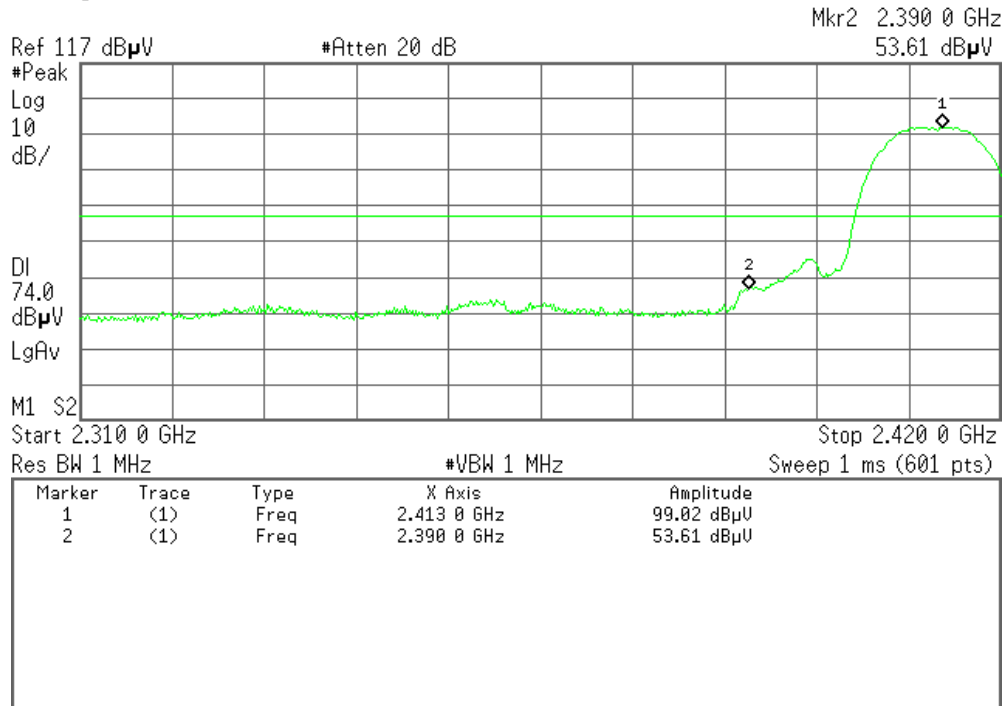


Detector mode: Average

Polarity: Vertical

Agilent 17:11:14 4 Feb 2010

R T

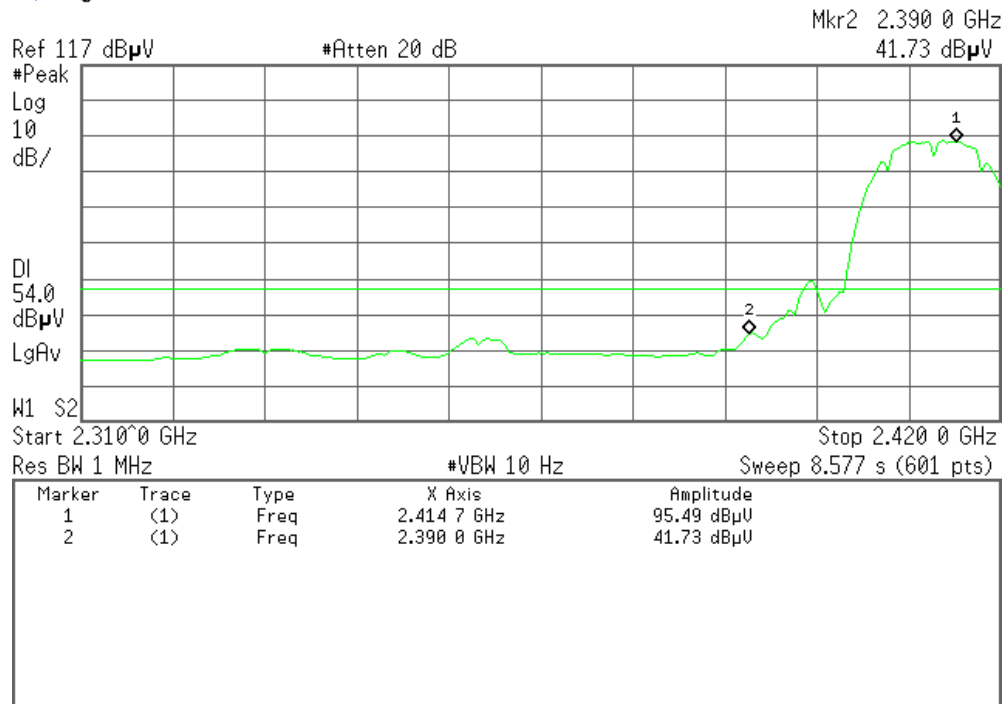




Detector mode: Peak

Polarity: Horizontal

Agilent 17:35:26 4 Feb 2010

R T

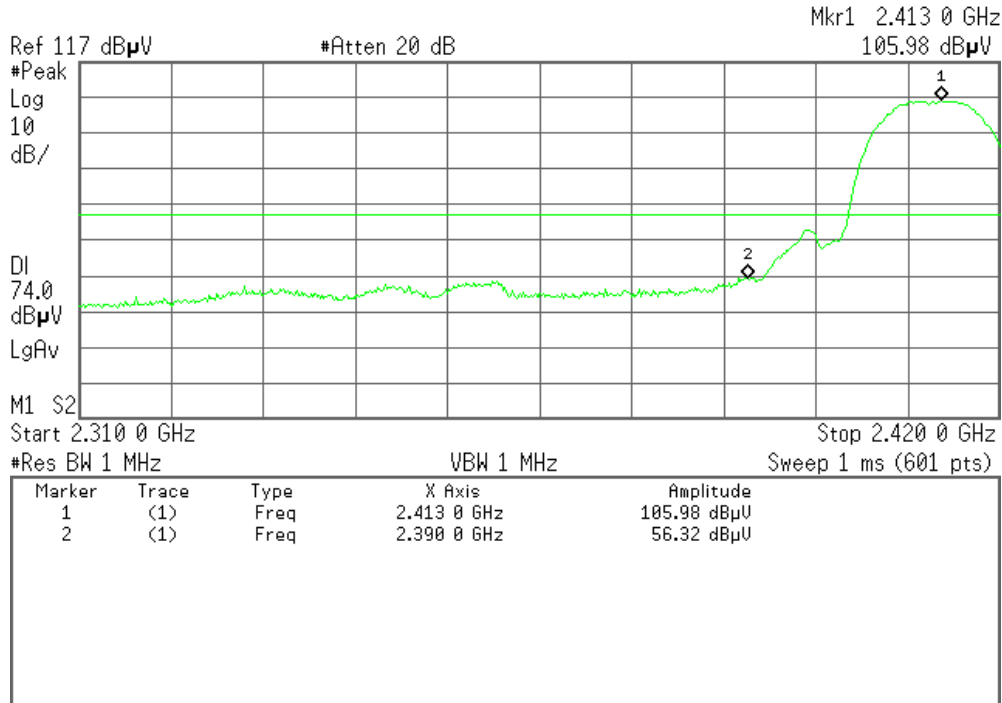


Detector mode: Average

Polarity: Horizontal

Agilent 17:36:35 4 Feb 2010

R T

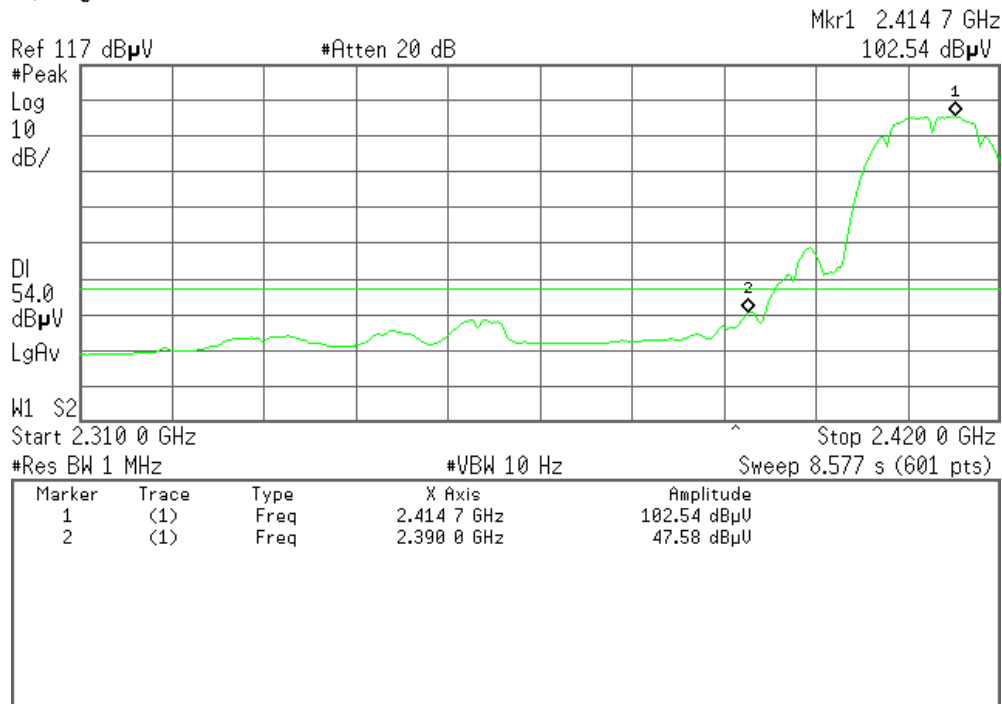



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 17:20:03 4 Feb 2010

R T

Mkr2 2.483 50 GHz
48.49 dBμV

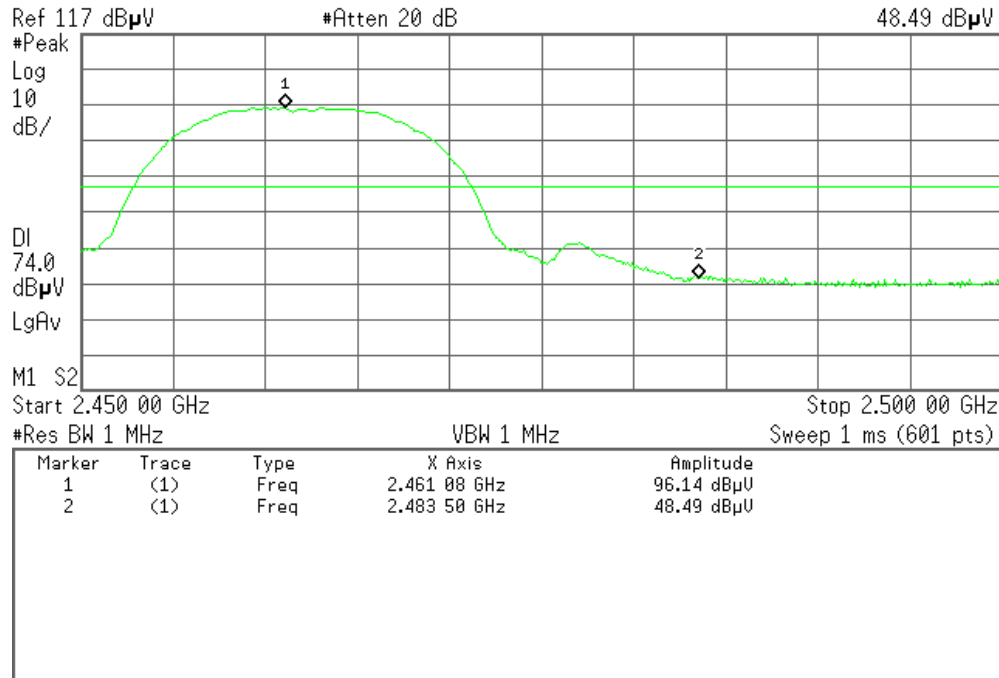


Detector mode: Average

Polarity: Vertical

Agilent 17:21:36 4 Feb 2010

R T

Mkr2 2.483 50 GHz
37.59 dBμV

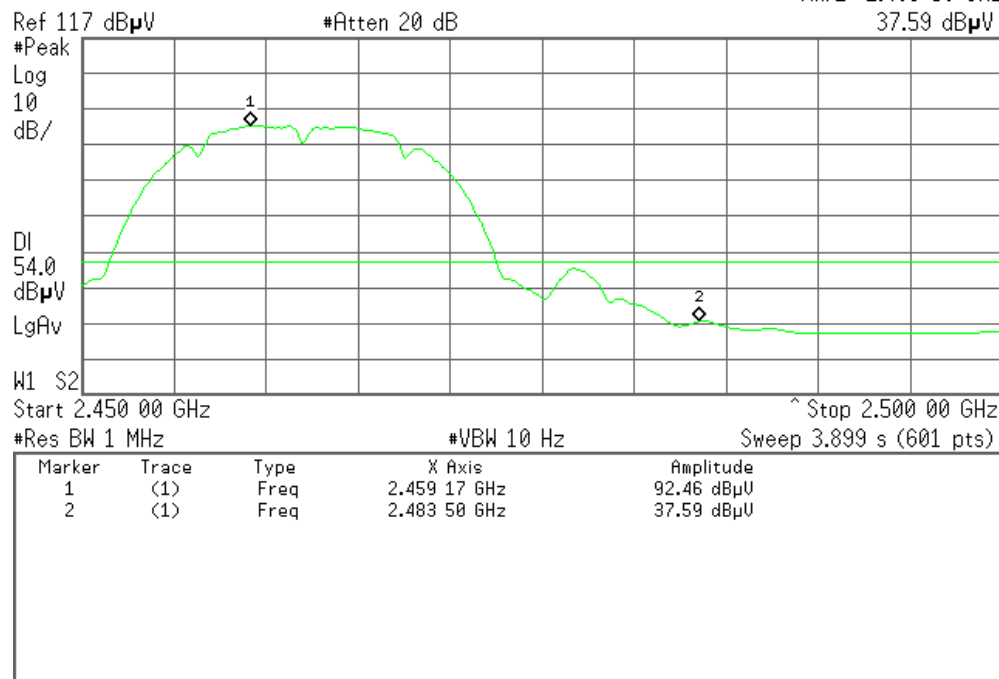




Detector mode: Peak

Polarity: Horizontal

Agilent 17:26:46 4 Feb 2010

R T

Mkr2 2.483 50 GHz
55.62 dB μ V

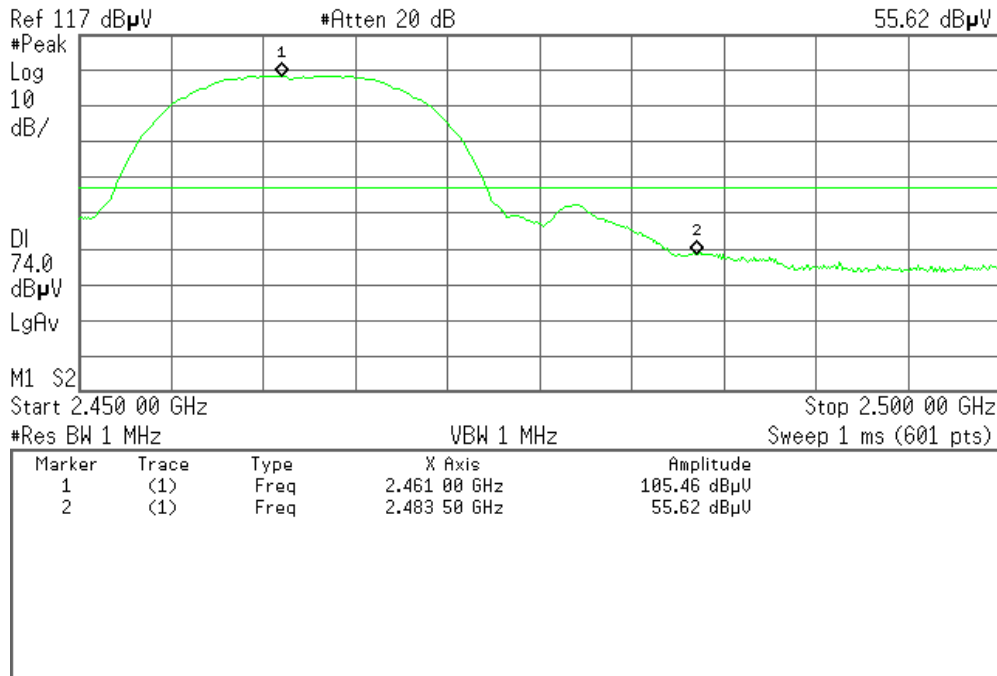


Detector mode: Average

Polarity: Horizontal

Agilent 17:28:57 4 Feb 2010

R T

Mkr1 2.464 58 GHz
102.06 dB μ V

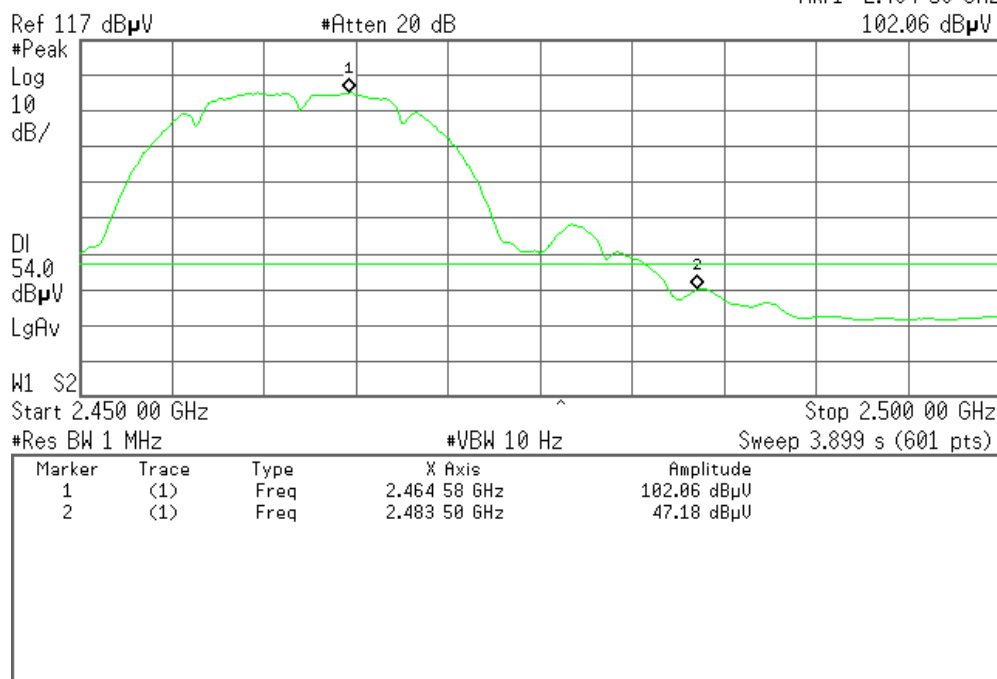



(IEEE 802.11g mode)


Band Edges (CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 18:04:50 4 Feb 2010

R T

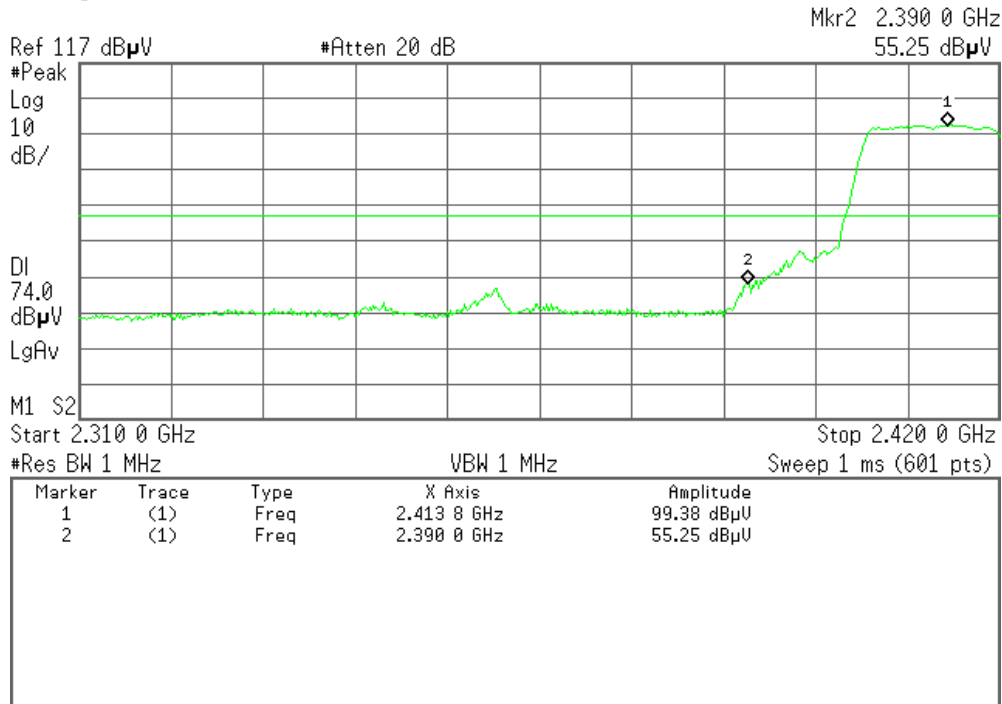


Detector mode: Average

Polarity: Vertical

Agilent 18:06:32 4 Feb 2010

R T

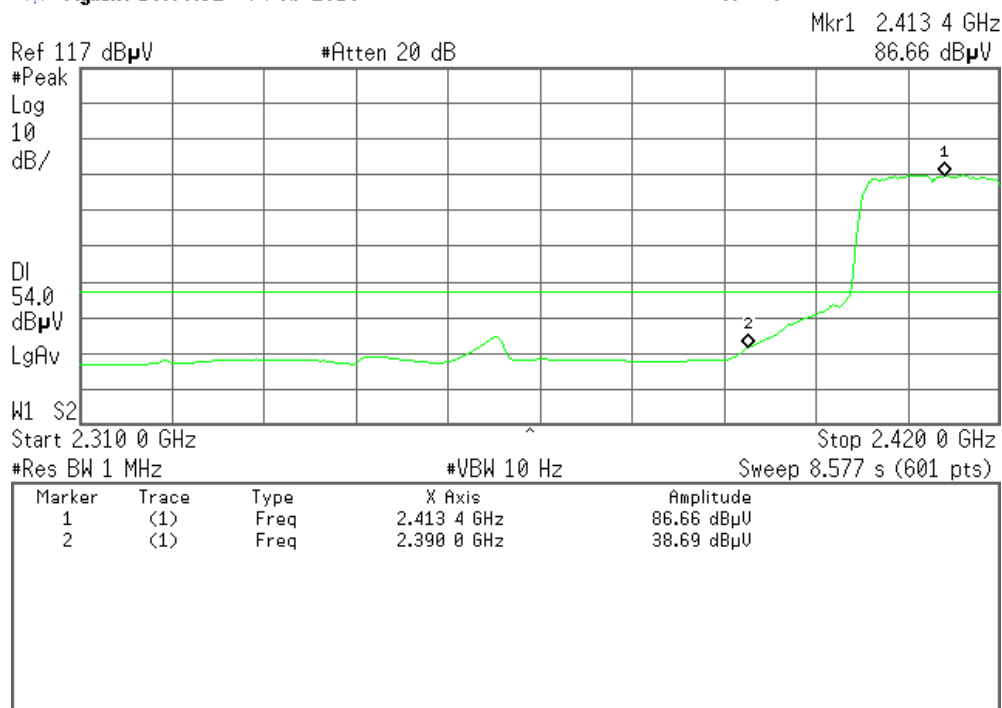




Detector mode: Peak

Polarity: Horizontal

Agilent 17:44:26 4 Feb 2010

R T

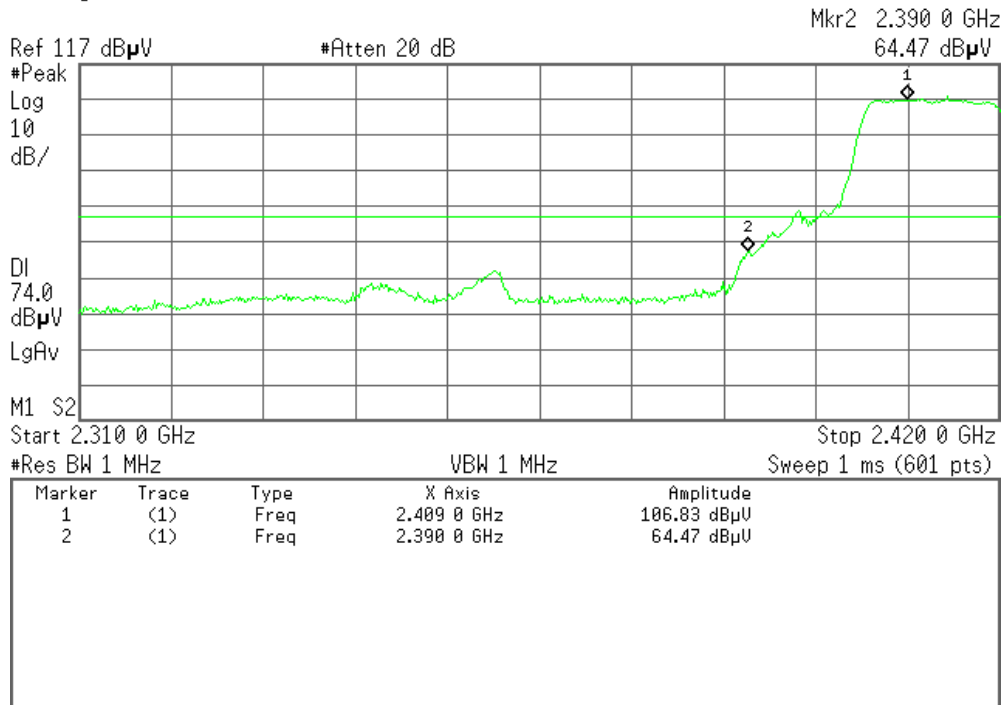


Detector mode: Average

Polarity: Horizontal

Agilent 17:45:34 4 Feb 2010

R T

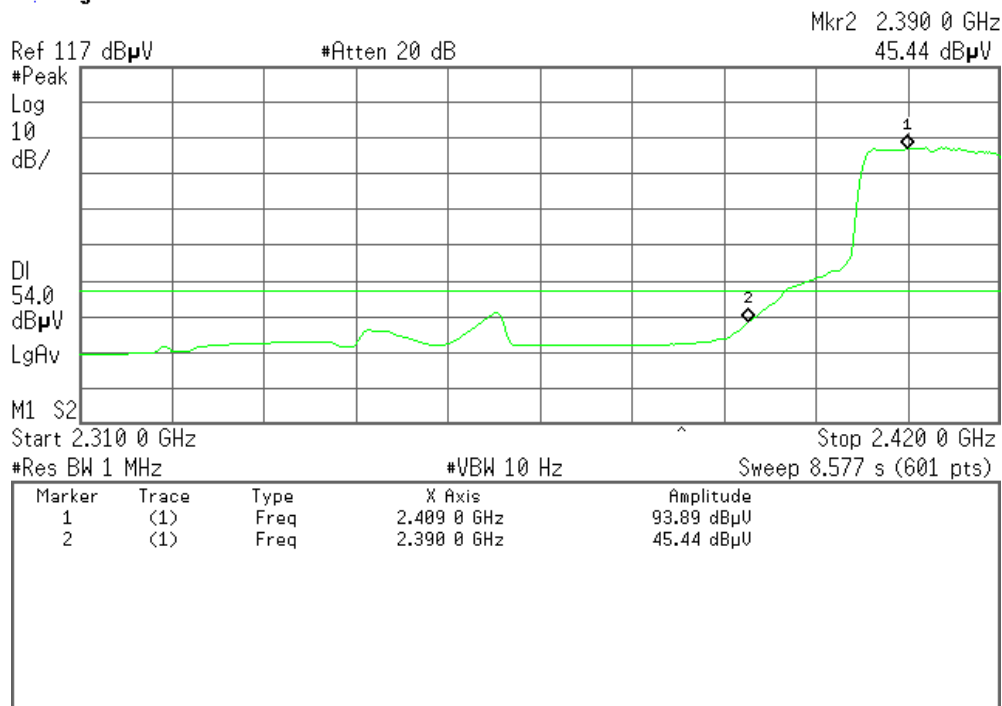



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 17:56:16 4 Feb 2010

R T

Mkr1 2.463 42 GHz
96.33 dBμV

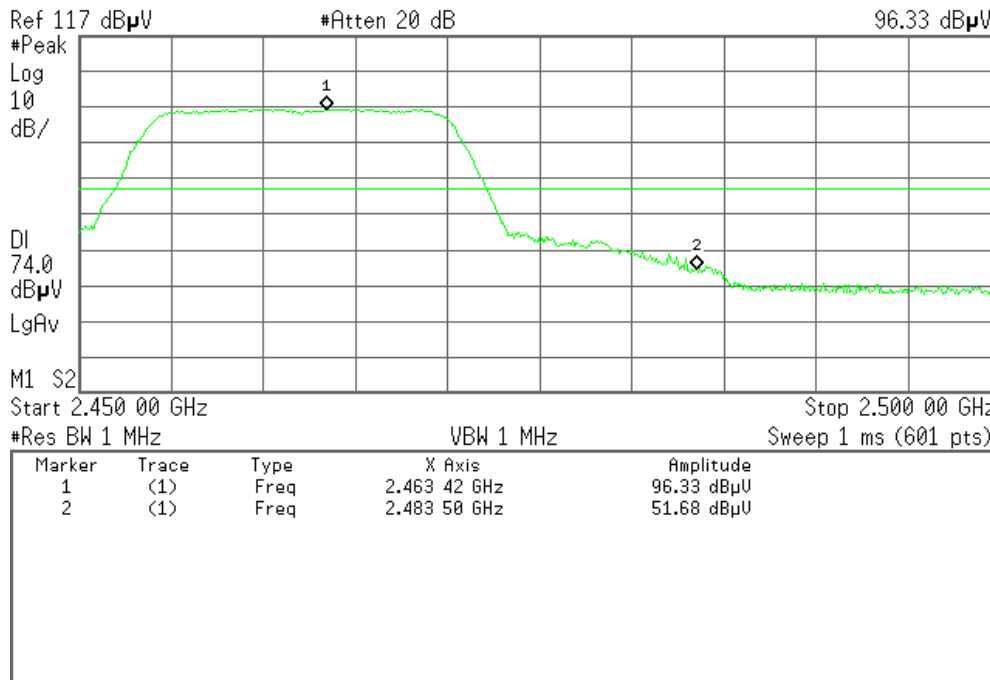


Detector mode: Average

Polarity: Vertical

Agilent 17:57:20 4 Feb 2010

R T

Mkr1 2.464 17 GHz
84.27 dBμV

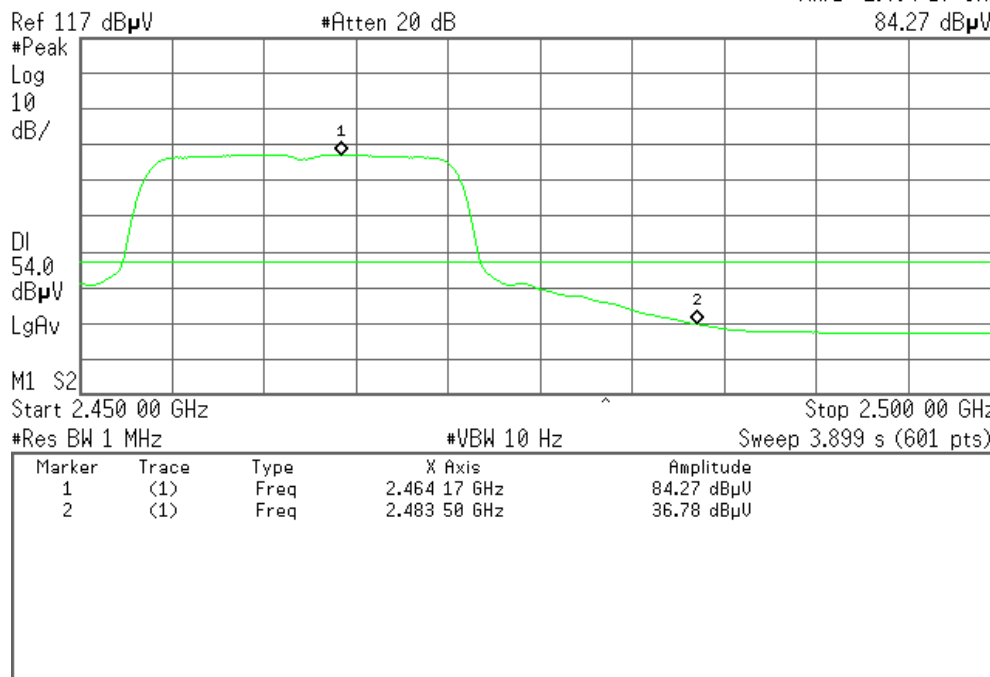




Detector mode: Peak

Polarity: Horizontal

Agilent 17:49:48 4 Feb 2010

R T

Mkr1 2.458 42 GHz
106.71 dB μ V

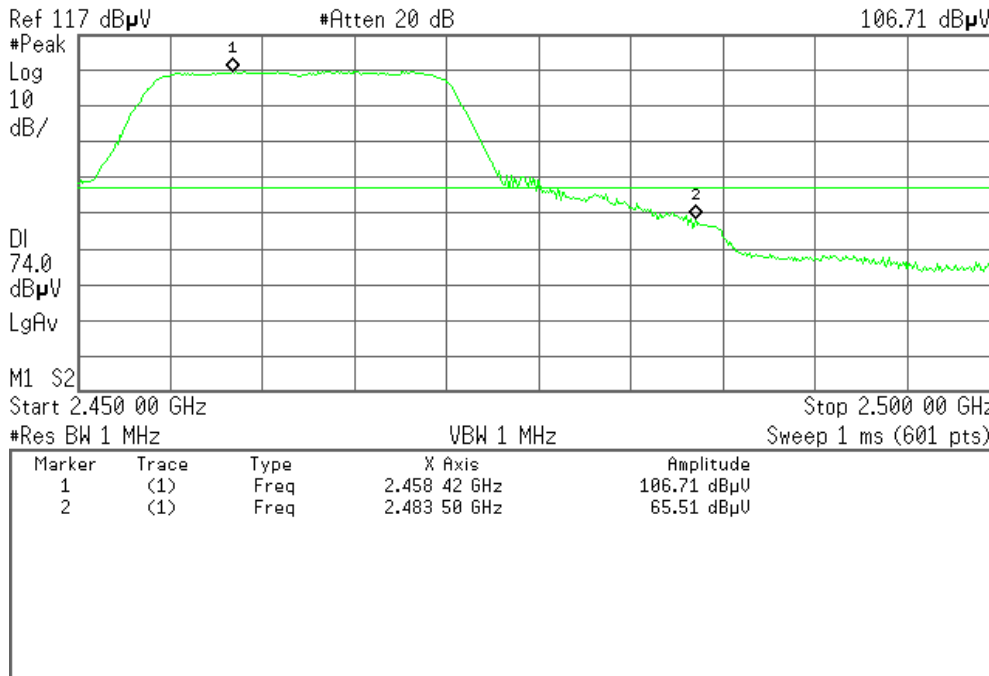


Detector mode: Average

Polarity: Horizontal

Agilent 17:51:04 4 Feb 2010

R T

Mkr1 2.460 00 GHz
93.29 dB μ V

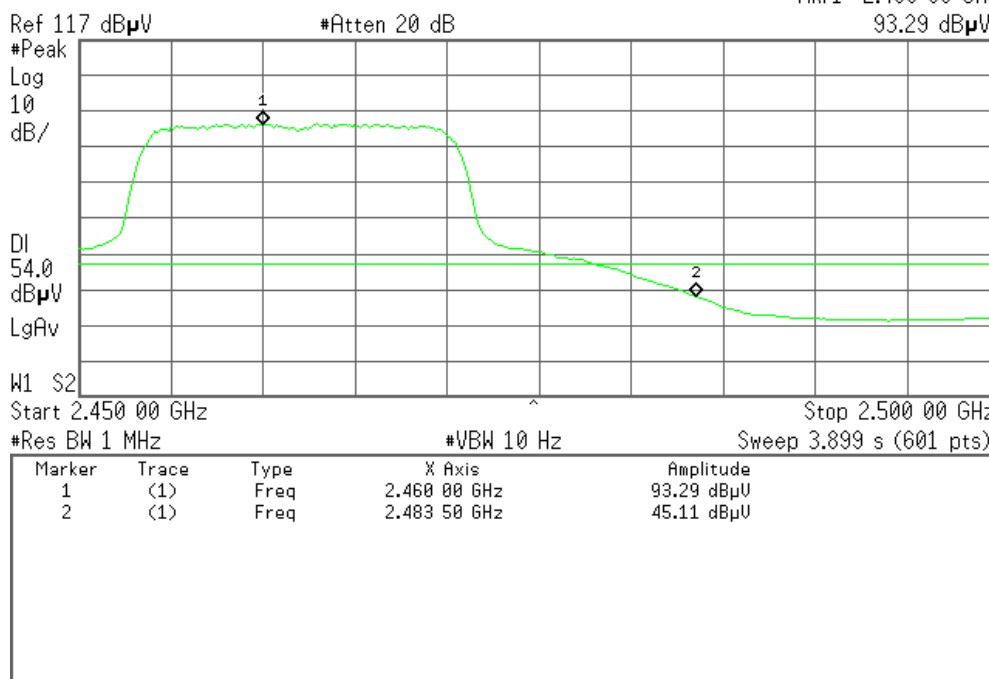



(IEEE 802.11n HT20 MHz mode)


Band Edges (CH Low)

Detector mode: Peak

Polarity: Vertical

Agilent 18:12:10 4 Feb 2010

R T

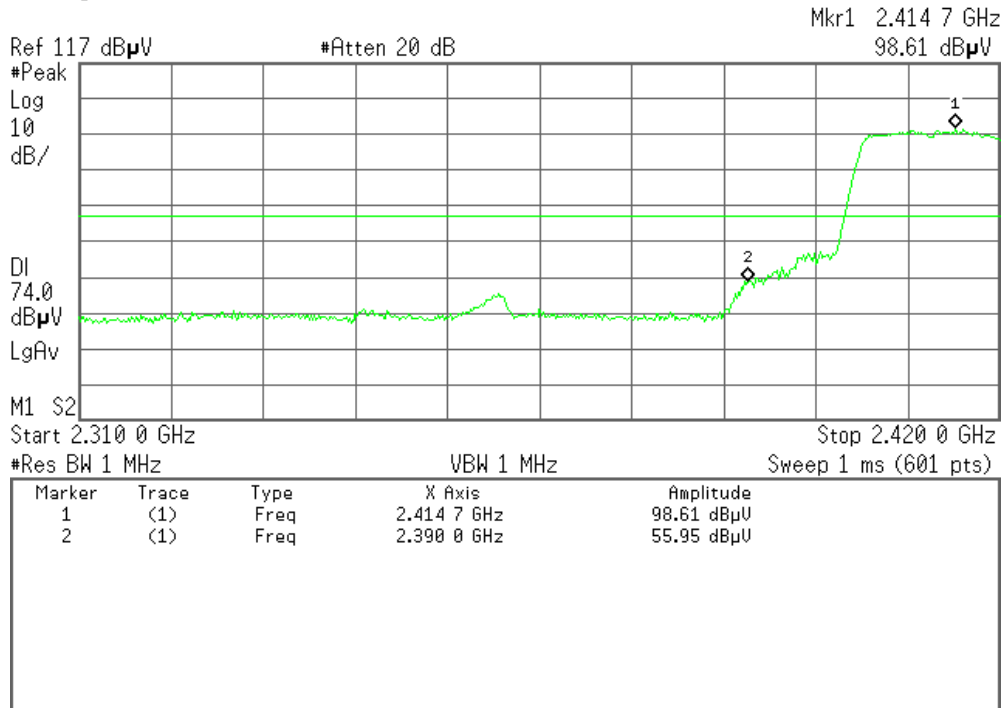


Detector mode: Average

Polarity: Vertical

Agilent 18:13:11 4 Feb 2010

R T

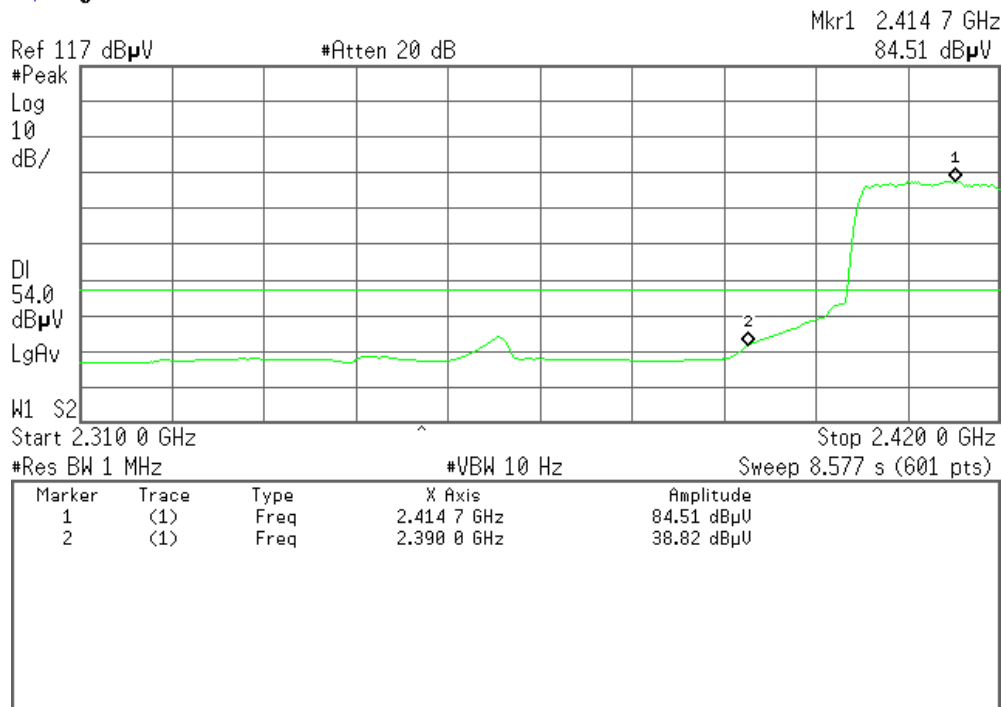




Detector mode: Peak

Polarity: Horizontal

Agilent 18:18:07 4 Feb 2010

R T

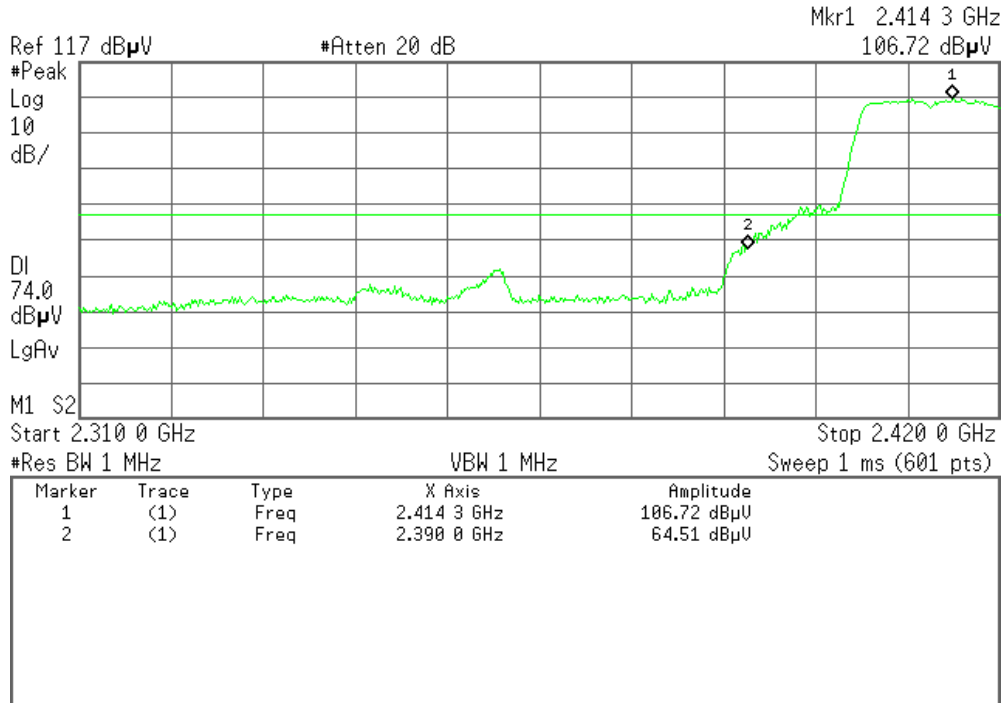


Detector mode: Average

Polarity: Horizontal

Agilent 18:18:56 4 Feb 2010

R T

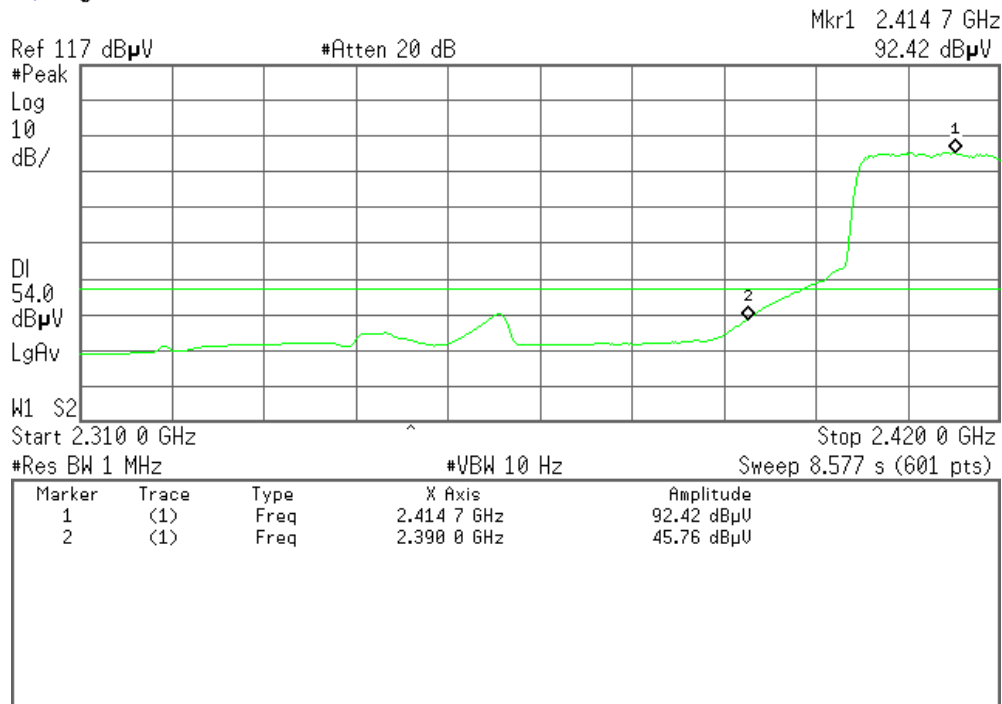



Band Edges (CH High)


Detector mode: Peak

Polarity: Vertical

Agilent 18:31:15 4 Feb 2010

R T

Mkr2 2.483 50 GHz
52.14 dBμV

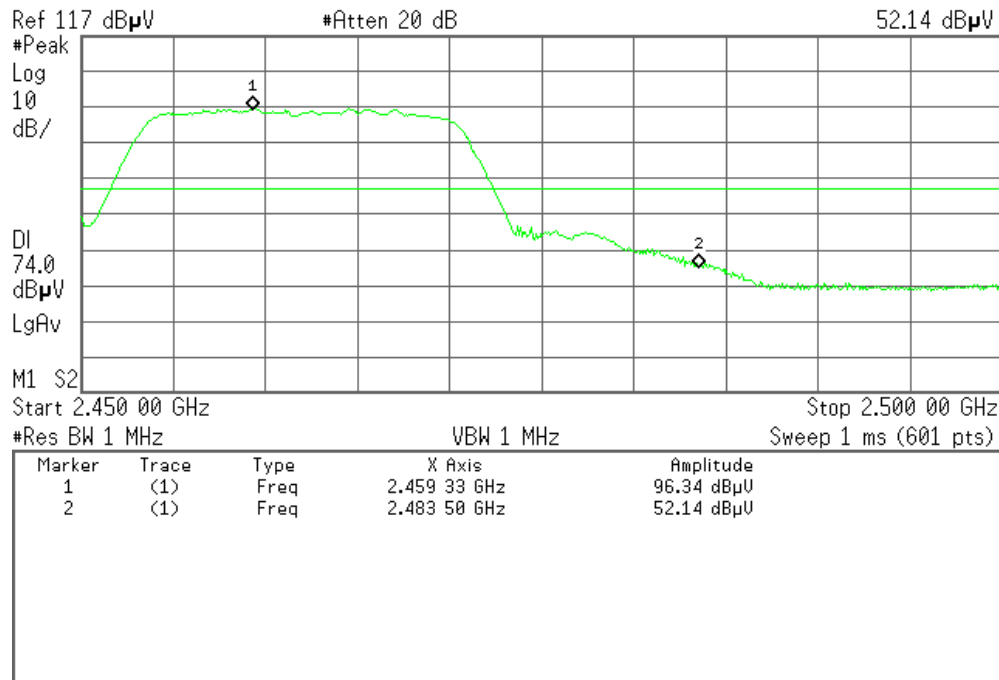


Detector mode: Average

Polarity: Vertical

Agilent 18:32:31 4 Feb 2010

R T

Mkr1 2.459 67 GHz
82.53 dBμV

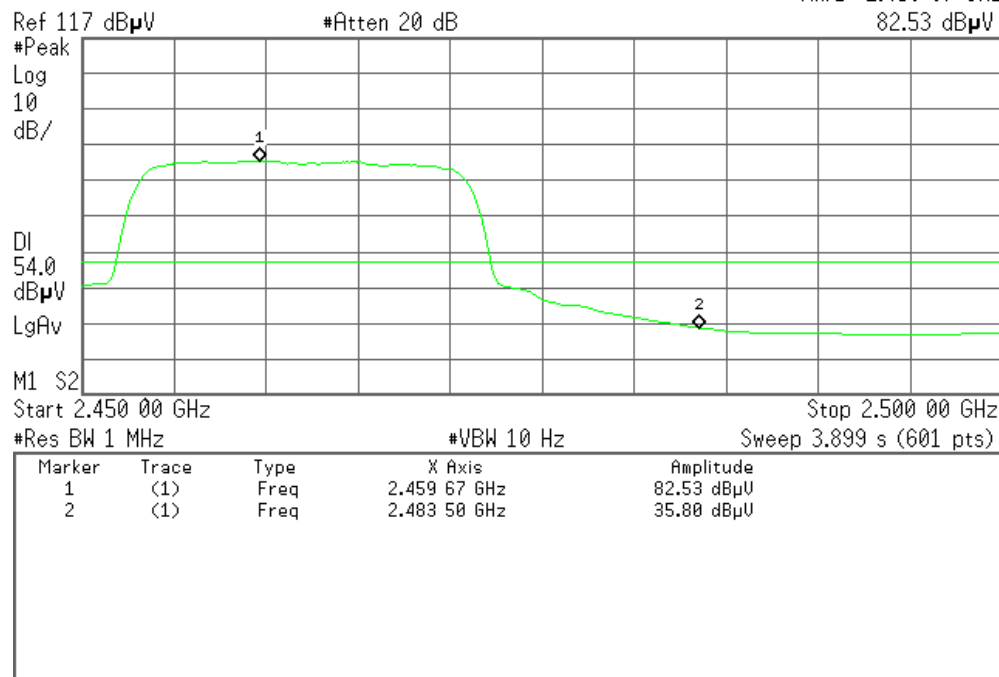




Detector mode: Peak

Polarity: Horizontal

Agilent 18:23:34 4 Feb 2010

R T

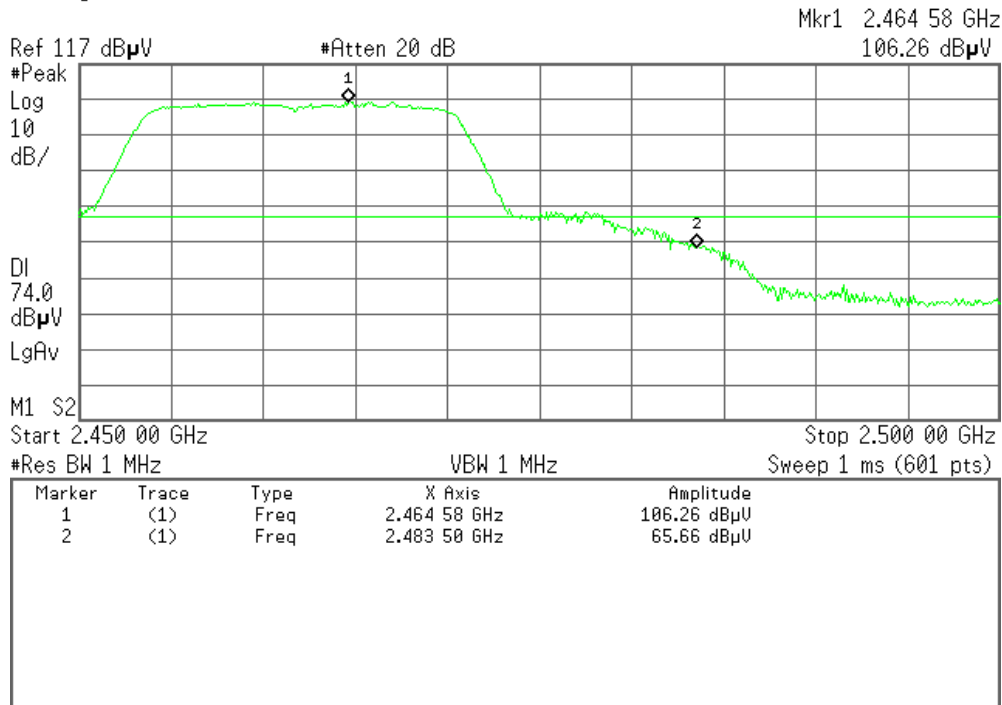


Detector mode: Average

Polarity: Horizontal

Agilent 18:25:45 4 Feb 2010

R T

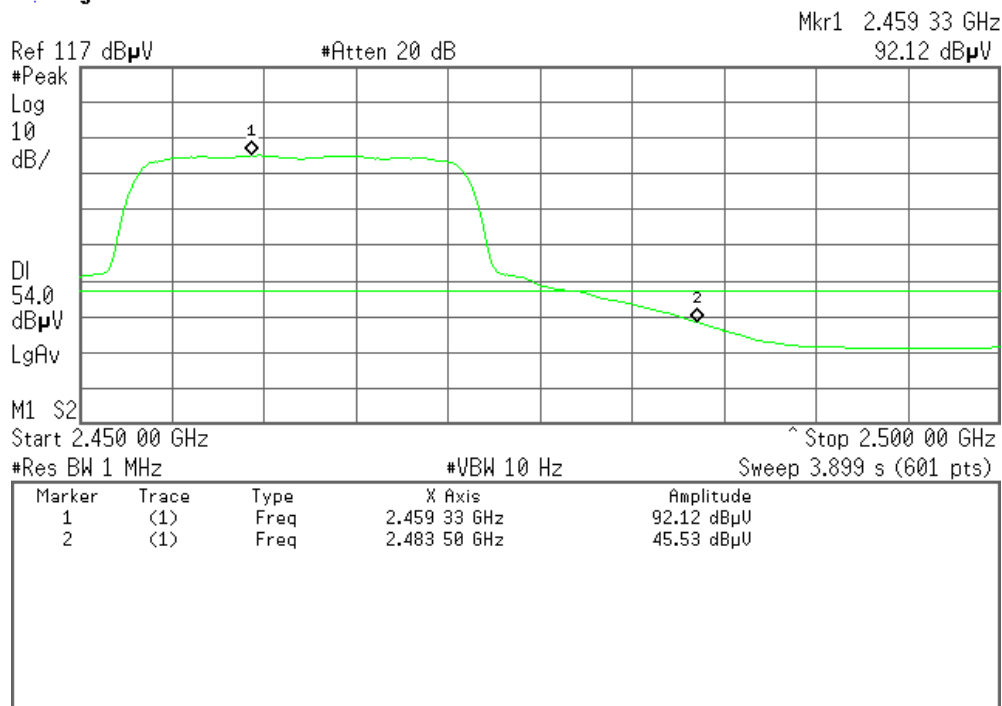



(IEEE 802.11n HT40 MHz mode)

Band Edges (CH Low)


Detector mode: Peak

Polarity: Vertical

Agilent 18:45:37 4 Feb 2010

R T

Mkr1 2.414 9 GHz
95.16 dBμV

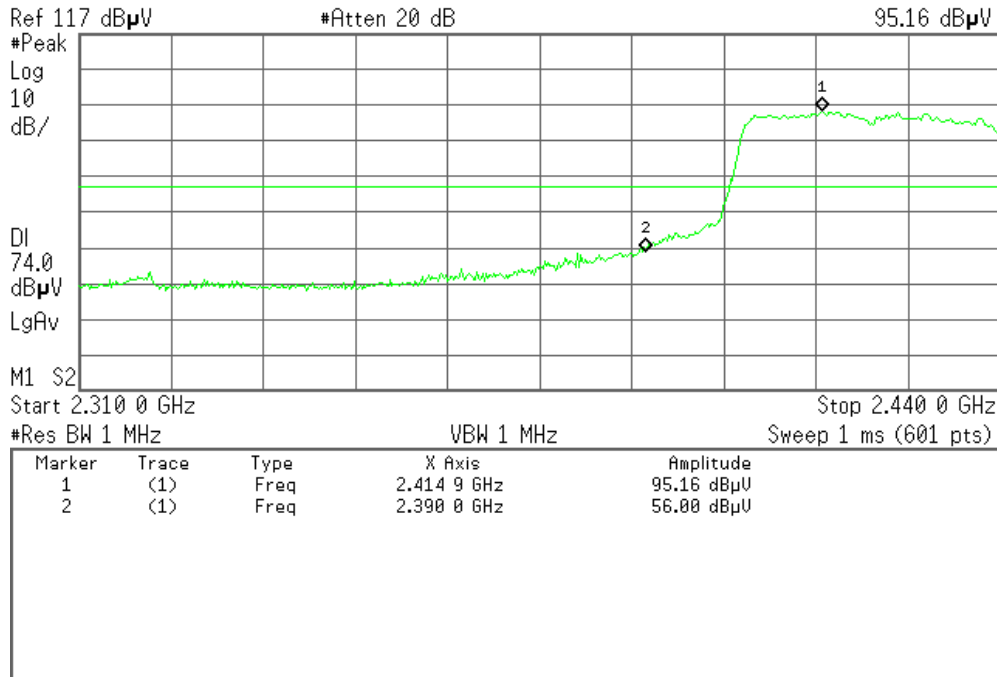


Detector mode: Average

Polarity: Vertical

Agilent 18:43:24 4 Feb 2010

R T

Mkr2 2.390 0 GHz
41.74 dBμV

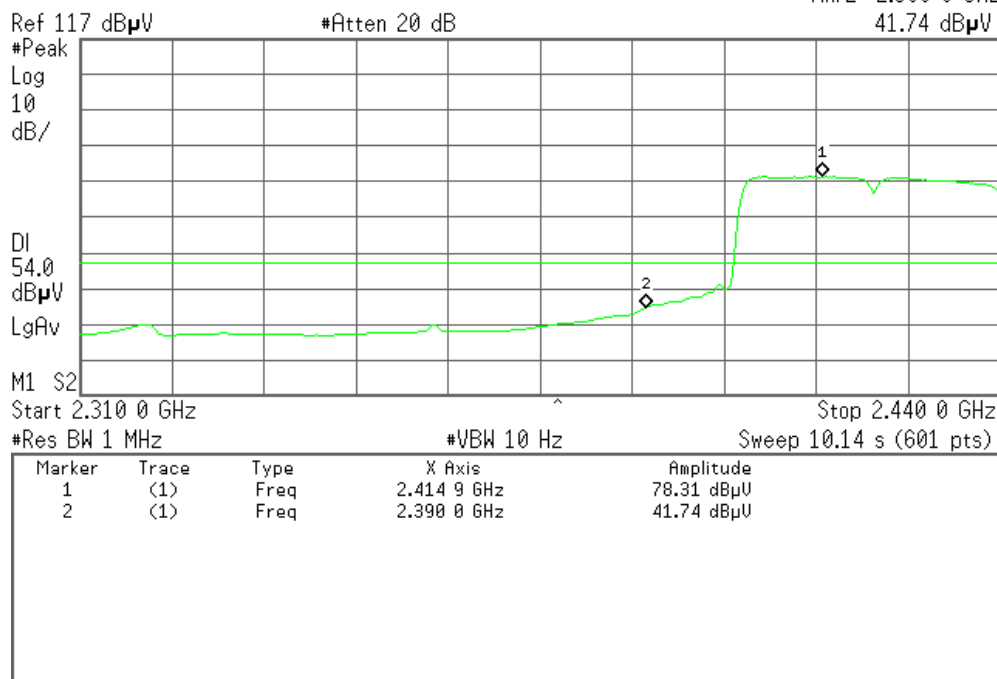




Detector mode: Peak

Polarity: Horizontal

Agilent 18:51:47 4 Feb 2010

R T

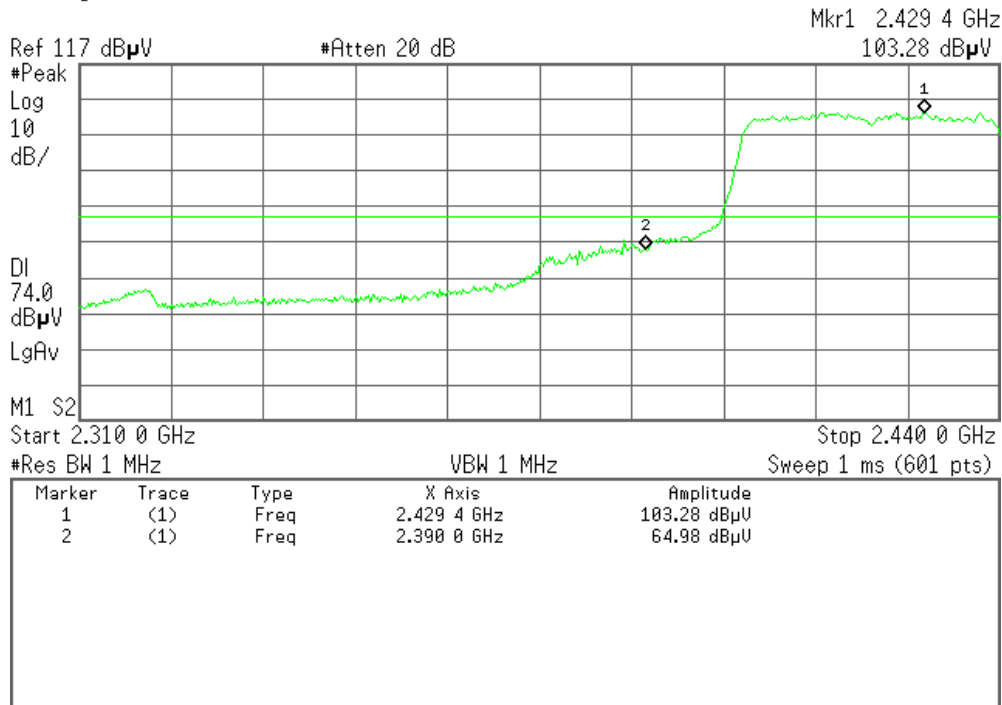


Detector mode: Average

Polarity: Horizontal

Agilent 18:56:47 4 Feb 2010

R T

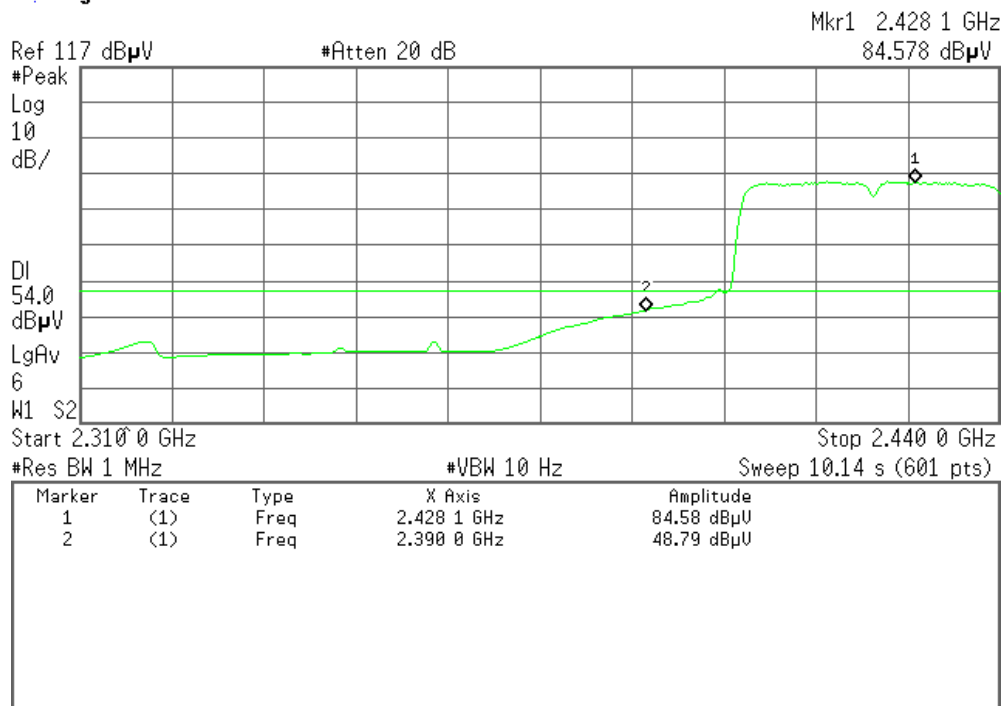



Band Edges (CH High)

Detector mode: Peak

Polarity: Vertical

Agilent 19:16:28 4 Feb 2010

R T

Mkr1 2.444 90 GHz
93.178 dBμV

Ref 117 dBμV

#Atten 20 dB

#Peak

Log

10

dB/

DI

74.0

dBμV

LgAv

100

M1 S2

Start 2.440 00 GHz

VBW 1 MHz

Stop 2.500 00 GHz
Sweep 1 ms (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.444 90 GHz	93.18 dBμV
2	(1)	Freq	2.483 50 GHz	55.16 dBμV

Detector mode: Average

Polarity: Vertical

Agilent 19:18:09 4 Feb 2010

R T

Mkr1 2.441 20 GHz
73.153 dBμV

Ref 117 dBμV

#Atten 20 dB

#Peak

Log

10

dB/

DI

54.0

dBμV

LgAv

17

M1 S2

Start 2.440 00 GHz

#VBW 10 Hz

Stop 2.500 00 GHz
Sweep 4.678 s (601 pts)

Marker	Trace	Type	X Axis	Amplitude
1	(1)	Freq	2.441 20 GHz	73.15 dBμV
2	(1)	Freq	2.483 50 GHz	36.35 dBμV




Detector mode: Peak

Polarity: Horizontal

Agilent 19:06:16 4 Feb 2010

R T

Mkr1 2.459 50 GHz
102.894 dBμV

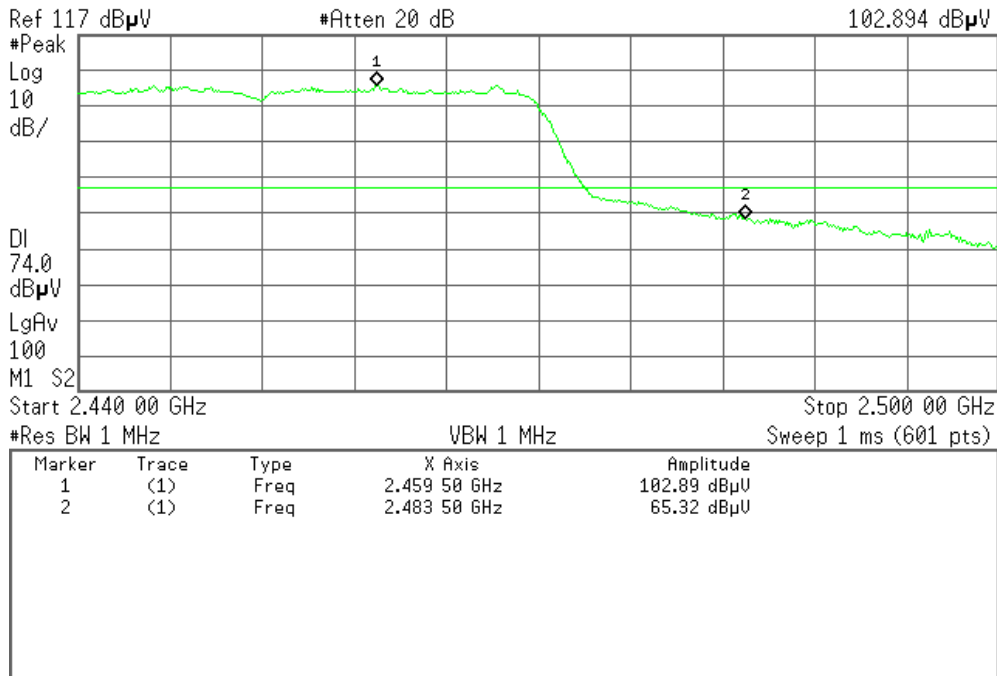


Detector mode: Average

Polarity: Horizontal

Agilent 19:08:29 4 Feb 2010

R T

Mkr1 2.456 90 GHz
85.025 dBμV

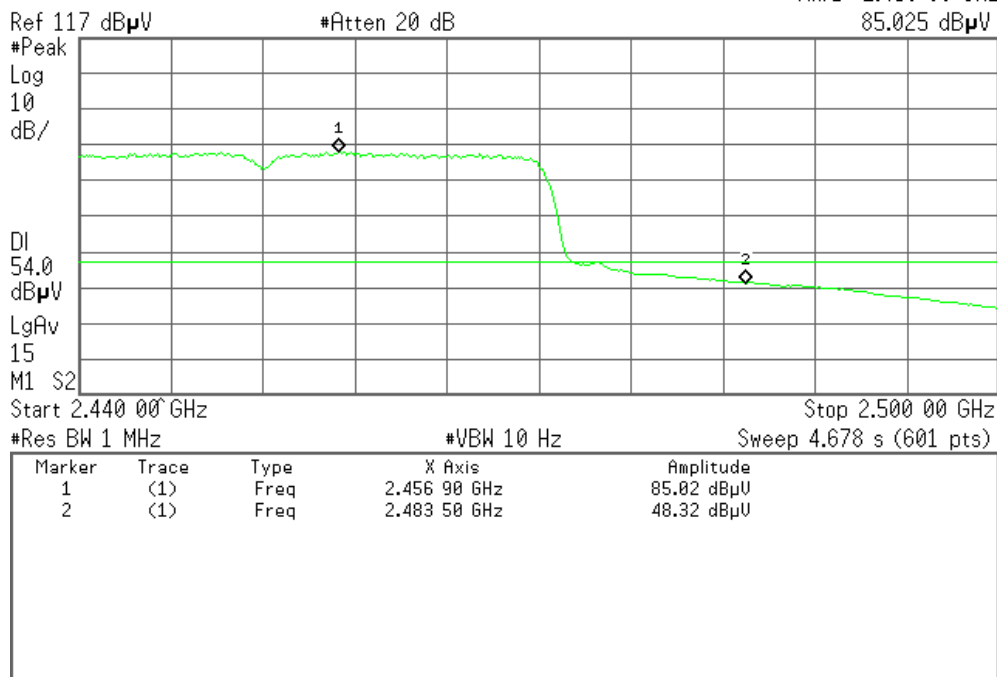



7.6. PEAK POWER SPECTRAL DENSITY MEASUREMENT

7.6.1. LIMITS

According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.


7.6.2. TEST INSTRUMENTS

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US44300399	02/24/2010

7.6.3. TEST PROCEDURES (please refer to measurement standard)

1. Place the EUT on the table and set it in transmitting mode.
Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 500kHz, Sweep=100s
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

7.6.4. TEST SETUP



**7.6.5. TEST RESULTS***No non-compliance noted***Test Data****Test mode: IEEE 802.11b**

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-19.11	8.00	PASS
Mid	2437	-19.37		PASS
High	2462	-19.36		PASS

Test mode: IEEE 802.11g

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-19.74	8.00	PASS
Mid	2437	-19.76		PASS
High	2462	-20.01		PASS

Test mode: IEEE 802.11n HT20 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-18.50	8.00	PASS
Mid	2437	-18.85		PASS
High	2462	-18.97		PASS

Test mode: IEEE 802.11n HT40 MHz

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Test Result
Low	2412	-20.84	8.00	PASS
Mid	2437	-19.56		PASS
High	2462	-20.97		PASS



Test Plot (IEEE 802.11b mode)


PPSD (CH Low)

✱ Agilent 15:59:36 4 Feb 2010

R T

Mkr1 2.412 009 2 GHz

-19.11 dBm

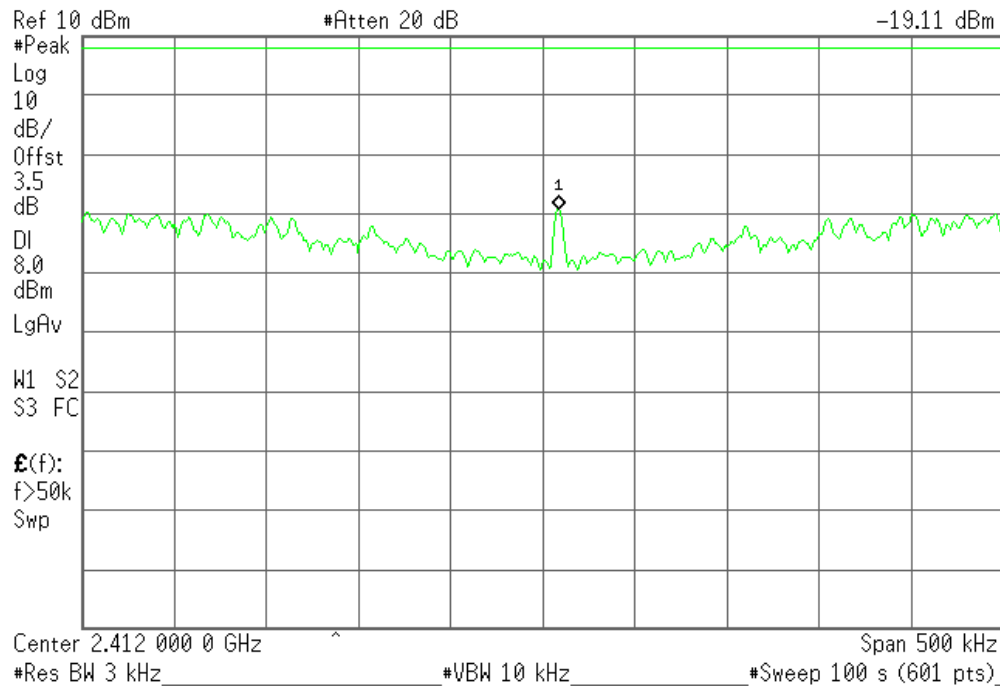


PPSD (CH Mid)

✱ Agilent 16:03:38 4 Feb 2010

R T

Mkr1 2.437 009 2 GHz

-19.37 dBm

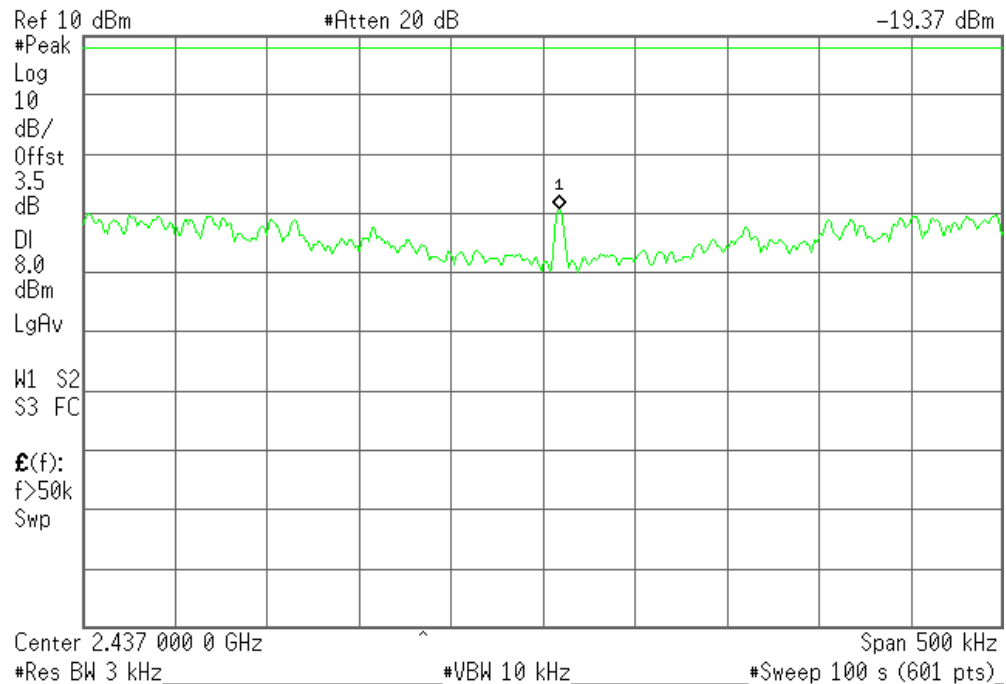




PPSD (CH High)

Agilent 16:06:40 4 Feb 2010

R T

Mkr1 2.462 009 2 GHz
-19.36 dBm

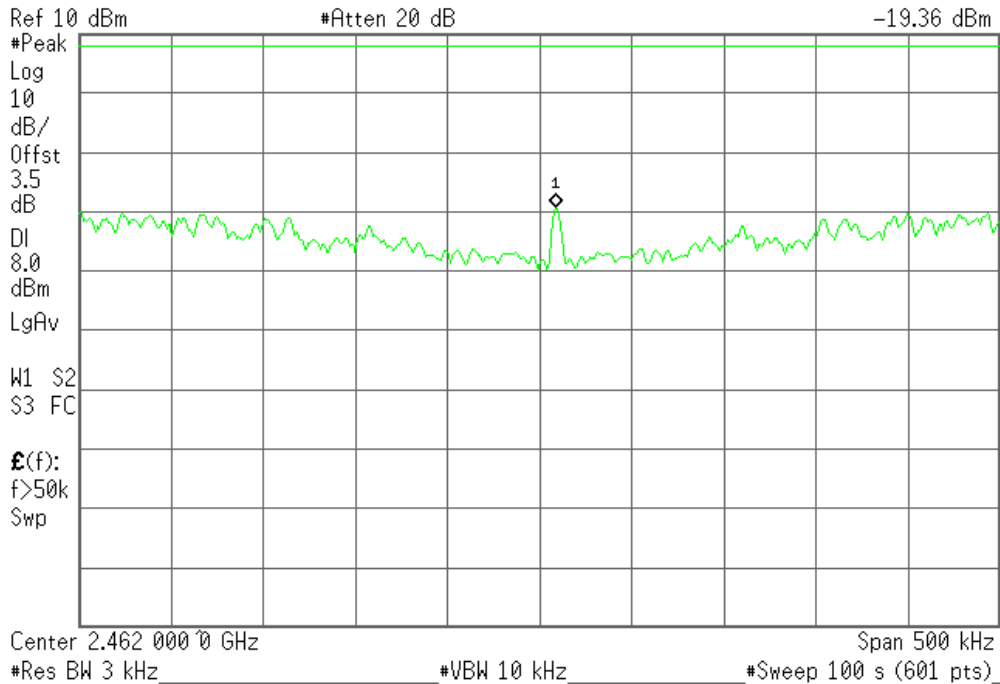


(IEEE 802.11g mode)

PPSD (CH Low)

Agilent 16:20:47 4 Feb 2010

R T

Mkr1 2.412 010 1 GHz
-19.74 dBm

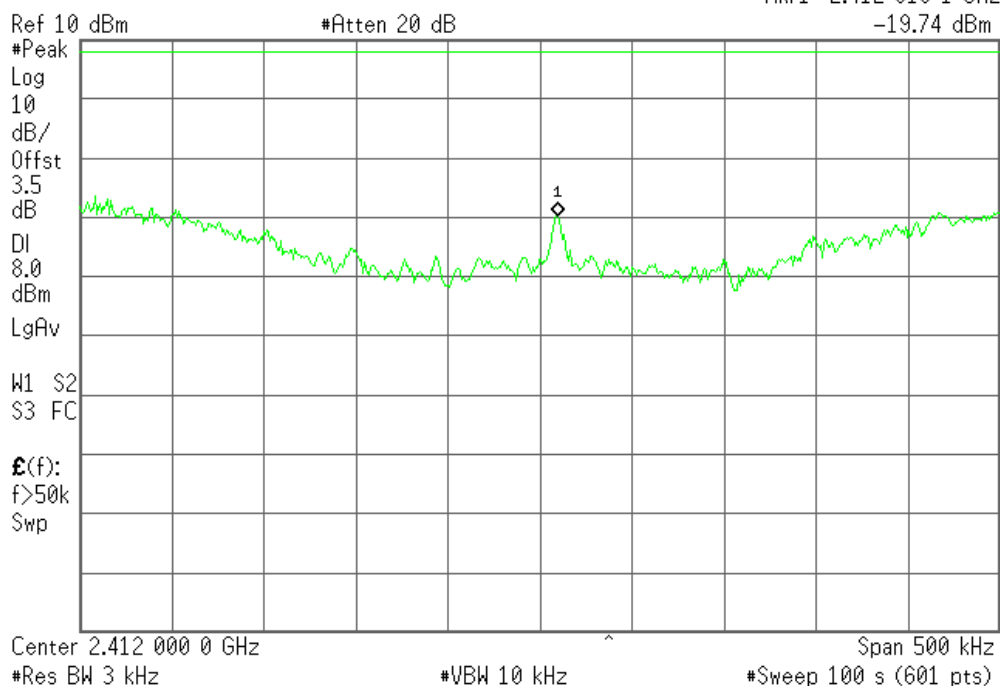




PPSD (CH Mid)

Agilent 16:12:18 4 Feb 2010

R T

Mkr1 2.437 010 1 GHz
-19.76 dBm

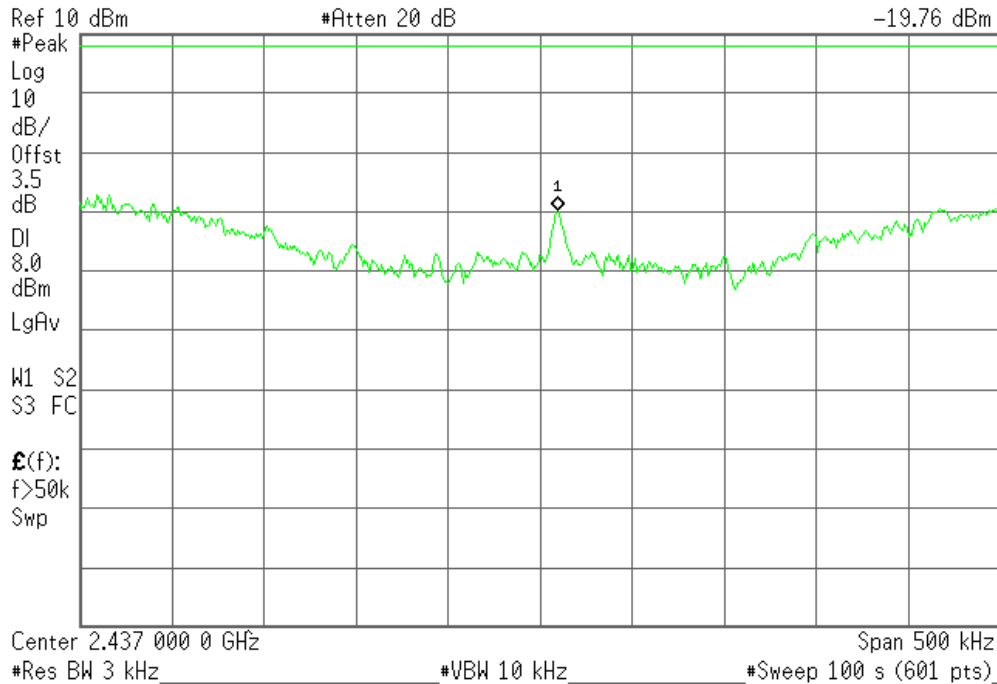


PPSD (CH High)

Agilent 16:09:24 4 Feb 2010

R T

Mkr1 2.462 010 1 GHz
-20.01 dBm

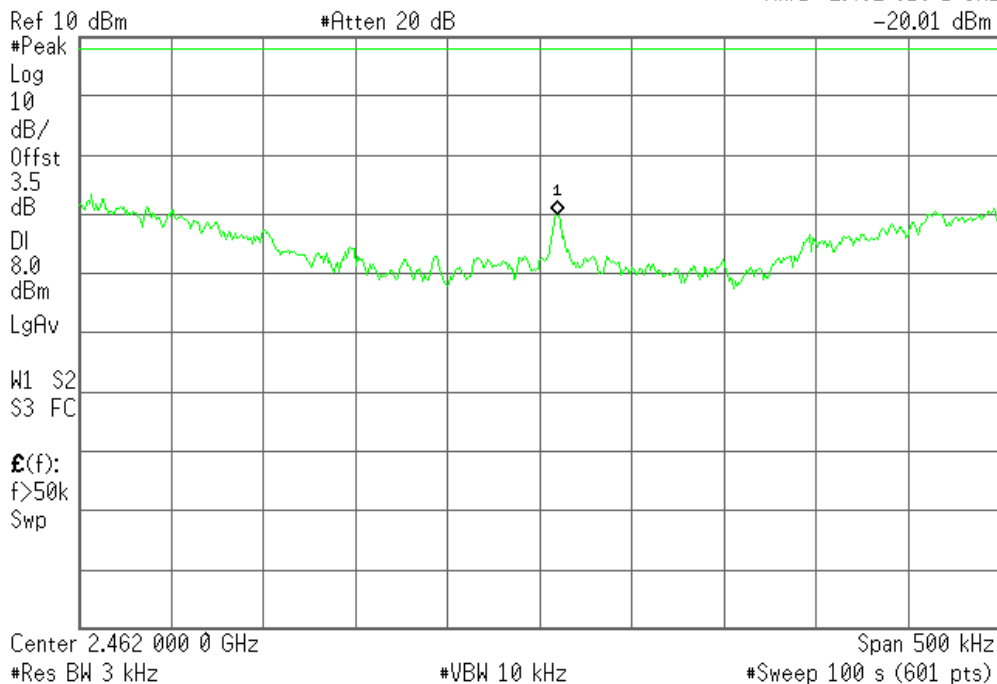




(IEEE 802.11n HT20 MHz mode)

PPSD (CH Low)

* Agilent 16:23:33 4 Feb 2010

R T

Mkr1 2.412 010 1 GHz
-18.50 dBm

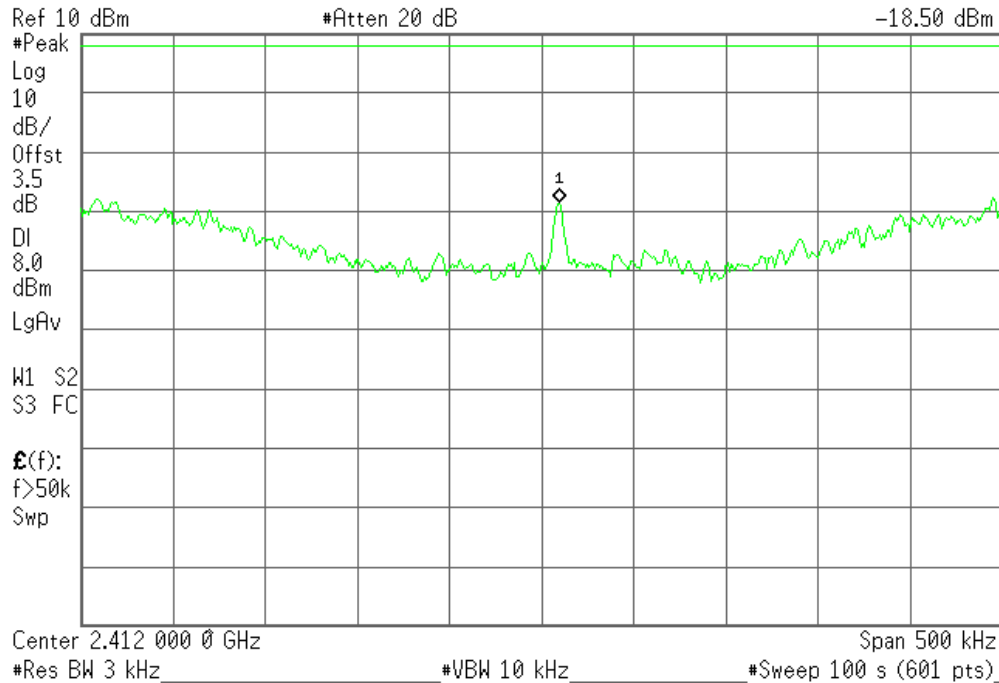


PPSD (CH Mid)

* Agilent 16:26:22 4 Feb 2010

R T

Mkr1 2.437 010 1 GHz
-18.85 dBm

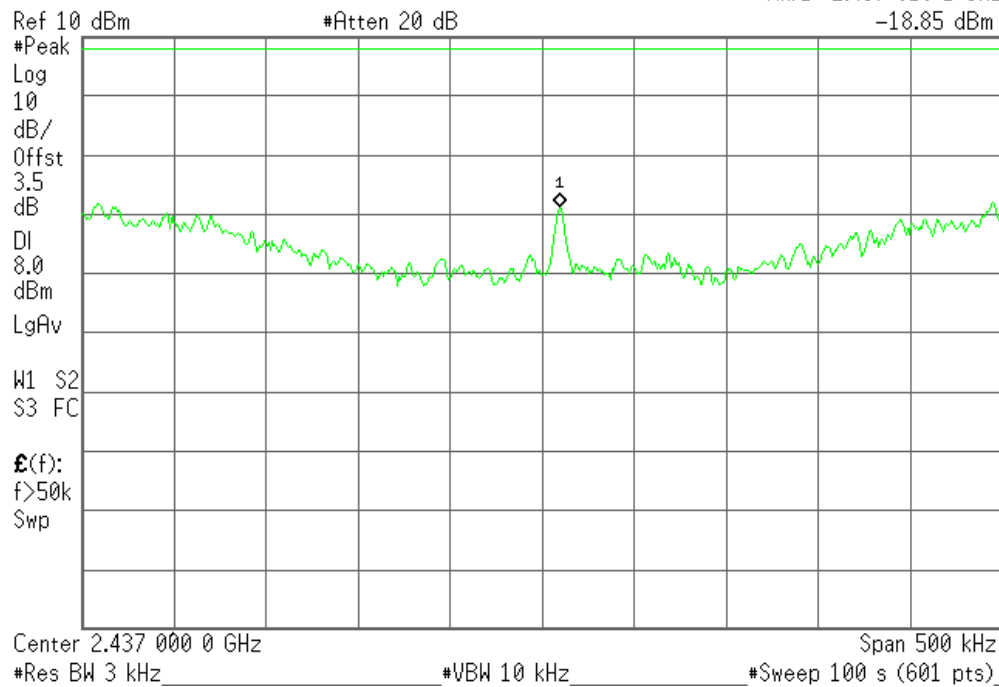




PPSD (CH High)

* Agilent 16:29:14 4 Feb 2010

R T

Mkr1 2.462 010 9 GHz
-18.97 dBm

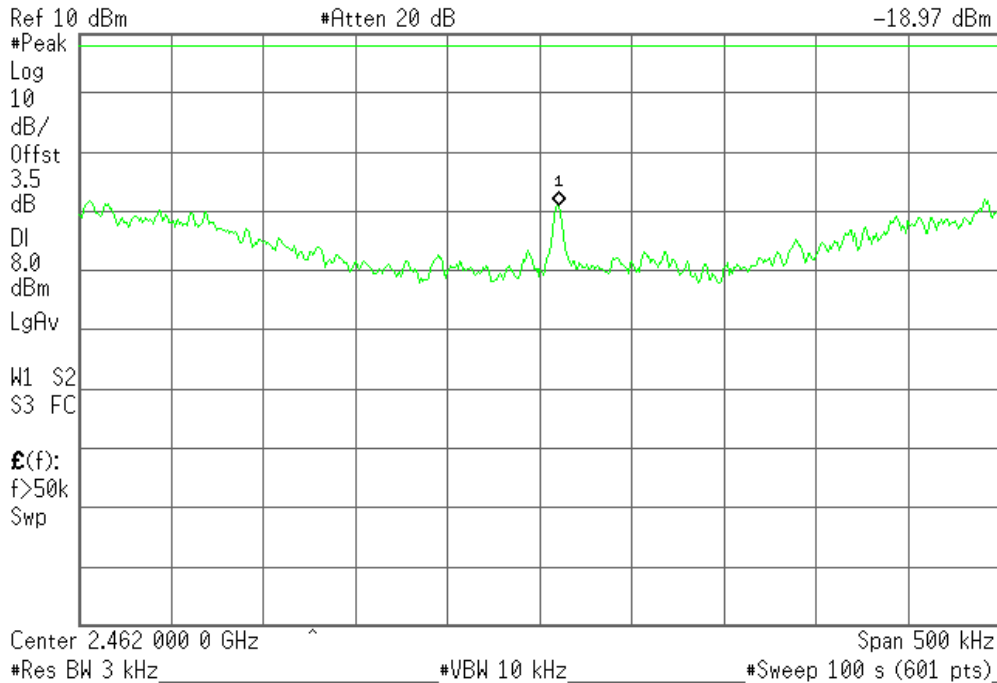


(IEEE 802.11n HT40 MHz mode)

PPSD (CH Low)

* Agilent 16:36:02 4 Feb 2010

R T

Mkr1 2.422 010 1 GHz
-20.84 dBm

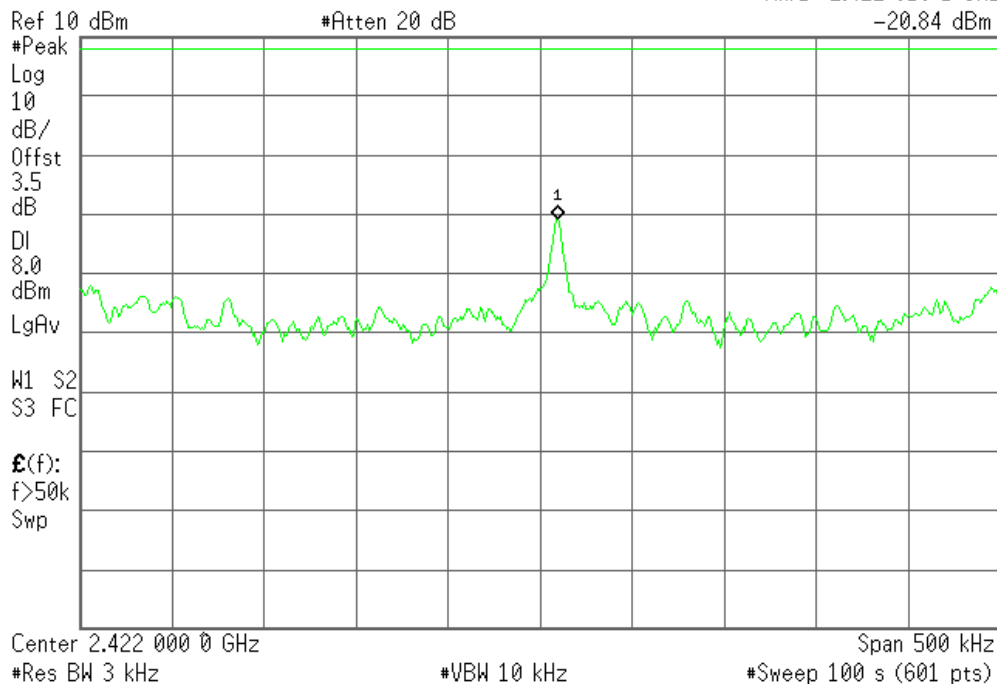




PPSD (CH Mid)

Agilent 16:32:20 4 Feb 2010

R T

Mkr1 2.437 010 1 GHz
-19.56 dBm

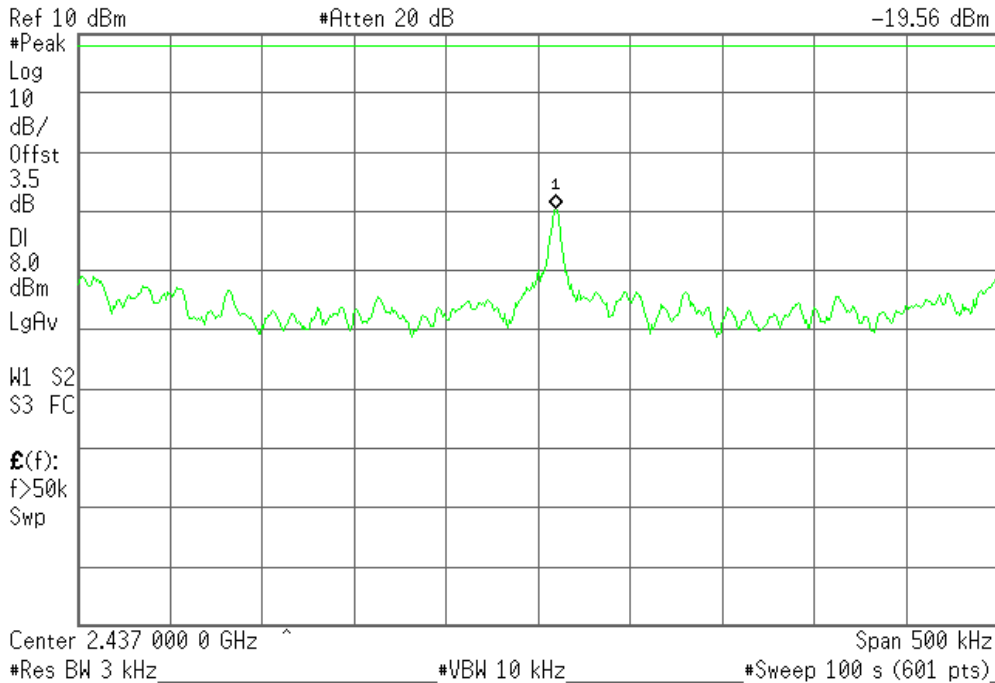

PPSD (CH High)

Agilent 16:38:29 4 Feb 2010

R T

Mkr1 2.452 010 1 GHz
-20.97 dBm

