



## SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan  
District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053  
Fax: +86 (0) 755 2671 0594  
Email: ee.shenzhen@sgs.com

Report No.: SZEM170100023101  
Page: 1 of 33

# FCC REPORT

**Application No:** SZEM1701000231RG  
**Applicant:** Huawei Technologies Co.,Ltd.  
**Manufacturer:** Huawei Technologies Co.,Ltd.  
**Product Name:** LTE USB Stick  
**Model No.(EUT):** 604HW  
**Trade Mark:** HUAWEI  
**FCC ID:** QIS604HW  
**Standards:** 47 CFR Part 2(2015)  
47 CFR Part 22 subpart H(2015)  
47 CFR Part 24 subpart E(2015)  
47 CFR Part 27 subpart C(2015)  
**Test Method:** FCC KDB 971168 D01 Power Meas License Digital Systems v02r02  
**Date of Receipt:** 2017-01-11  
**Date of Test:** 2017-01-11 to 2017-01-22  
**Date of Issue:** 2017-01-22

|                     |               |
|---------------------|---------------|
| <b>Test Result:</b> | <b>PASS *</b> |
|---------------------|---------------|

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

Authorized Signature:

Derek Yang  
Wireless Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## 2 Version

| Revision Record |         |            |          |          |
|-----------------|---------|------------|----------|----------|
| Version         | Chapter | Date       | Modifier | Remark   |
| 01              |         | 2017-01-22 |          | Original |
|                 |         |            |          |          |
|                 |         |            |          |          |

|                          |  |                                                                                                                        |  |            |
|--------------------------|--|------------------------------------------------------------------------------------------------------------------------|--|------------|
| Authorized for issue by: |  |                                                                                                                        |  |            |
| Tested By                |  | <br><hr/> (Mike Hu) /Project Engineer |  | 2017-01-22 |
|                          |  |                                                                                                                        |  | Date       |
| Checked By               |  | <br><hr/> (Jim Huang) /Reviewer     |  | 2017-01-22 |
|                          |  |                                                                                                                        |  | Date       |



### 3 Test Summary

| Test Item                                        | FCC Rule No.                                         | Requirements                                                                                                | Test Result             | Verdict |
|--------------------------------------------------|------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|-------------------------|---------|
| Effective (Isotropic) Radiated Power Output Data | §2.1046,<br>§22.913,<br>§24.232<br>§27.50<br>§90.635 | FCC: ERP $\leq$ 7 W.<br>ERP $\leq$ 100W<br>EIRP $\leq$ 2 W.                                                 | Section 1 of Appendix B | PASS    |
| Peak-Average Ratio                               | §24.232<br>§27.50                                    | $\leq$ 13dB                                                                                                 | Section 2 of Appendix B | PASS    |
| Modulation Characteristics                       | §2.1047                                              | Digital modulation                                                                                          | Section 3 of Appendix B | PASS    |
| Bandwidth                                        | §2.1049(h),<br>§22.917,<br>§24.238<br>§27.53         | OBW: No limit<br>EBW: No limit                                                                              | Section 4 of Appendix B | PASS    |
| Band Edge Compliance                             | §2.1051,<br>§22.917,<br>§24.238<br>§27.53<br>§90.691 | $\leq$ -13dBm/1%*EBW, in 1 MHz bands immediately outside and adjacent to the frequency block.               | Section 5 of Appendix B | PASS    |
| Spurious emissions at antenna terminals          | §2.1051,<br>§22.917,<br>§24.238<br>§27.53<br>§90.691 | FCC: $\leq$ -13dBm/100 kHz, from 9 kHz to 10th harmonics but outside authorized operating frequency ranges. | Section 6 of Appendix B | PASS    |
| Field strength of spurious radiation             | §2.1051,<br>§22.917,<br>§24.238<br>§27.53<br>§90.691 | FCC: $\leq$ -13dBm/100 kHz,                                                                                 | Section 7 of Appendix B | PASS    |
| Frequency stability                              | §2.1055,<br>§22.355,<br>§24.235<br>§27.54<br>§90.213 | $\leq \pm 2.5$ ppm.                                                                                         | Section 8 of Appendix B | PASS    |



## 4 Content

|                                                               | Page |
|---------------------------------------------------------------|------|
| 1 COVER PAGE.....                                             | 1    |
| 2 VERSION.....                                                | 2    |
| 3 TEST SUMMARY.....                                           | 3    |
| 4 CONTENT .....                                               | 4    |
| 5 GENERAL INFORMATION .....                                   | 6    |
| 5.1 CLIENT INFORMATION .....                                  | 6    |
| 5.2 GENERAL DESCRIPTION OF EUT .....                          | 6    |
| 5.3 TEST MODE.....                                            | 6    |
| 5.4 TEST ENVIRONMENT .....                                    | 7    |
| 5.5 TEST FREQUENCY.....                                       | 8    |
| 5.6 TEST LOCATION .....                                       | 15   |
| 5.7 TEST FACILITY.....                                        | 15   |
| 5.8 DEVIATION FROM STANDARDS.....                             | 15   |
| 5.9 ABNORMALITIES FROM STANDARD CONDITIONS.....               | 15   |
| 5.10 OTHER INFORMATION REQUESTED BY THE CUSTOMER .....        | 16   |
| 5.11 TECHNICAL SPECIFICATION .....                            | 16   |
| 6 DESCRIPTION OF TESTS.....                                   | 18   |
| 6.1 CONDUCTED OUTPUT POWER.....                               | 18   |
| 6.2 EFFECTIVE (ISOTROPIC) RADIATED POWER OF TRANSMITTER ..... | 18   |
| 6.3 OCCUPIED BANDWIDTH.....                                   | 19   |
| 6.4 BAND EDGE AT ANTENNA TERMINALS.....                       | 20   |
| 6.5 SPURIOUS AND HARMONIC EMISSIONS AT ANTENNA TERMINAL.....  | 20   |
| 6.6 PEAK-AVERAGE RATIO .....                                  | 21   |
| 6.7 FIELD STRENGTH OF SPURIOUS RADIATION .....                | 21   |
| 6.8 FREQUENCY STABILITY / TEMPERATURE VARIATION .....         | 22   |
| 6.9 TEST SETUPS.....                                          | 24   |
| 6.9.1 Test Setup 1 .....                                      | 24   |
| 6.9.2 Test Setup 2 .....                                      | 25   |
| 6.9.3 Test Setup 3 .....                                      | 26   |



**SGS-CSTC Standards Technical Services Co., Ltd.  
Shenzhen Branch**

Report No.: SZEM170100023101

Page: 5 of 33

|       |                                               |    |
|-------|-----------------------------------------------|----|
| 6.9.4 | Test Setup 4 .....                            | 27 |
| 6.10  | TEST CONDITIONS.....                          | 28 |
| 7     | MAIN TEST INSTRUMENTS.....                    | 30 |
| 8     | MEASUREMENT UNCERTAINTY .....                 | 32 |
| 9     | PHOTOGRAPHS - EUT CONSTRUCTIONAL DETAILS..... | 33 |



## 5 General Information

### 5.1 Client Information

|                          |                                                                                                                             |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Applicant:               | Huawei Technologies Co.,Ltd.                                                                                                |
| Address of Applicant:    | Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C |
| Manufacturer:            | Huawei Technologies Co.,Ltd.                                                                                                |
| Address of Manufacturer: | Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C |

### 5.2 General Description of EUT

|               |                                                                                                                                                              |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name: | LTE USB Stick                                                                                                                                                |
| Model No.:    | 604HW                                                                                                                                                        |
| Trade Mark:   | HUAWEI                                                                                                                                                       |
| Sample Type:  | Portable production                                                                                                                                          |
| Antenna Type: | Loop Antenna                                                                                                                                                 |
| Antenna Gain: | LTE Band 2: 2.0dBi, LTE Band 4: 2.9dBi ; LTE Band 12: -1.6dBi ;<br>LTE Band 17: -1.6dBi ; LTE Band 25: 2.0dBi ; LTE Band 26: 1.6dBi ;<br>LTE Band 41: 4.6dBi |

### 5.3 Test Mode

| Test Mode | Test Modes Description       |
|-----------|------------------------------|
| LTE/TM1   | LTE system, QPSK modulation  |
| LTE/TM2   | LTE system, 16QAM modulation |
| LTE/TM3   | LTE system, 64QAM modulation |

NOTE: The test mode(s) are selected according to relevant radio technology specifications.



## 5.4 Test Environment

| Environment Parameter | Selected Values During Tests |       |
|-----------------------|------------------------------|-------|
| Relative Humidity     | 52%                          |       |
| Atmospheric Pressure: | 1015Pa                       |       |
| Temperature           | TN                           | 25 °C |
| Voltage :             | VL                           | 4.75V |
|                       | VN                           | 5.0V  |
|                       | VH                           | 5.25V |

NOTE: VL= lower extreme test voltage  
VN= nominal voltage  
VH= upper extreme test voltage  
TN= normal temperature



## 5.5 Test Frequency

| Test Mode            | TX / RX | RF Channel    |               |               |
|----------------------|---------|---------------|---------------|---------------|
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 2<br>1.4MHz | TX      | Channel 18607 | Channel 18900 | Channel 19193 |
|                      |         | 1850.7 MHz    | 1880 MHz      | 1909.3 MHz    |
|                      | RX      | Channel 607   | Channel 900   | Channel 1193  |
|                      |         | 1930.7 MHz    | 1960 MHz      | 1989.3 MHz    |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 2<br>3MHz   | TX      | Channel 18615 | Channel 18900 | Channel 19185 |
|                      |         | 1851.5 MHz    | 1880 MHz      | 1908.5 MHz    |
|                      | RX      | Channel 615   | Channel 900   | Channel 1185  |
|                      |         | 1931.5 MHz    | 1960 MHz      | 1988.5 MHz    |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 2<br>5MHz   | TX      | Channel 18625 | Channel 18900 | Channel 19175 |
|                      |         | 1852.5 MHz    | 1880 MHz      | 1907.5 MHz    |
|                      | RX      | Channel 625   | Channel 900   | Channel 1175  |
|                      |         | 1932.5 MHz    | 1960 MHz      | 1987.5 MHz    |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 2<br>10MHz  | TX      | Channel 18650 | Channel 18900 | Channel 19150 |
|                      |         | 1855 MHz      | 1880 MHz      | 1905 MHz      |
|                      | RX      | Channel 650   | Channel 900   | Channel 1150  |
|                      |         | 1935 MHz      | 1960 MHz      | 1985 MHz      |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 2<br>15MHz  | TX      | Channel 18675 | Channel 18900 | Channel 19125 |
|                      |         | 1857.5 MHz    | 1880 MHz      | 1902.5 MHz    |
|                      | RX      | Channel 675   | Channel 900   | Channel 1125  |
|                      |         | 1937.5 MHz    | 1960 MHz      | 1982.5 MHz    |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 2<br>20MHz  | TX      | Channel 18700 | Channel 18900 | Channel 19100 |
|                      |         | 1860 MHz      | 1880 MHz      | 1900 MHz      |
|                      | RX      | Channel 700   | Channel 900   | Channel 1100  |
|                      |         | 1940 MHz      | 1960 MHz      | 1980 MHz      |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170100023101

Page: 9 of 33

| Test Mode            | TX / RX | RF Channel    |               |               |
|----------------------|---------|---------------|---------------|---------------|
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 4<br>1.4MHz | TX      | Channel 19957 | Channel 20175 | Channel 20393 |
|                      |         | 1710.7 MHz    | 1732.5 MHz    | 1754.3 MHz    |
|                      | RX      | Channel 1957  | Channel 2175  | Channel 2393  |
|                      |         | 2110.7 MHz    | 2132.5 MHz    | 2154.3 MHz    |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 4<br>3MHz   | TX      | Channel 19965 | Channel 20175 | Channel 20385 |
|                      |         | 1711.5 MHz    | 1732.5 MHz    | 1753.5 MHz    |
|                      | RX      | Channel 1965  | Channel 2175  | Channel 2385  |
|                      |         | 2111.5 MHz    | 2132.5 MHz    | 2153.5 MHz    |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 4<br>5MHz   | TX      | Channel 19975 | Channel 20175 | Channel 20375 |
|                      |         | 1712.5 MHz    | 1732.5 MHz    | 1752.5 MHz    |
|                      | RX      | Channel 1975  | Channel 2175  | Channel 2375  |
|                      |         | 2112.5 MHz    | 2132.5 MHz    | 2152.5 MHz    |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 4<br>10MHz  | TX      | Channel 20000 | Channel 20175 | Channel 20350 |
|                      |         | 1715 MHz      | 1732.5 MHz    | 1750 MHz      |
|                      | RX      | Channel 2000  | Channel 2175  | Channel 2350  |
|                      |         | 2115 MHz      | 2132.5 MHz    | 2150 MHz      |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 4<br>15MHz  | TX      | Channel 20025 | Channel 20175 | Channel 20325 |
|                      |         | 1717.5 MHz    | 1732.5 MHz    | 1747.5 MHz    |
|                      | RX      | Channel 2025  | Channel 2175  | Channel 2325  |
|                      |         | 2117.5 MHz    | 2132.5 MHz    | 2147.5 MHz    |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 4<br>20MHz  | TX      | Channel 20050 | Channel 20175 | Channel 20300 |
|                      |         | 1720 MHz      | 1732.5 MHz    | 1745 MHz      |
|                      | RX      | Channel 2050  | Channel 2175  | Channel 2300  |
|                      |         | 2120 MHz      | 2132.5 MHz    | 2145 MHz      |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170100023101

Page: 10 of 33

| Test Mode            | TX / RX | RF Channel    |               |               |
|----------------------|---------|---------------|---------------|---------------|
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND12<br>1.4MHz | TX      | Channel 23017 | Channel 23095 | Channel 23173 |
|                      |         | 699.7 MHz     | 707.5 MHz     | 715.3 MHz     |
|                      | RX      | Channel 5017  | Channel 5095  | Channel 5173  |
|                      |         | 729.7 MHz     | 737.5 MHz     | 745.3 MHz     |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 12<br>3MHz  | TX      | Channel 23025 | Channel 23095 | Channel 23165 |
|                      |         | 700.5 MHz     | 707.5 MHz     | 714.5 MHz     |
|                      | RX      | Channel 5025  | Channel 5095  | Channel 5165  |
|                      |         | 730.5 MHz     | 737.5 MHz     | 744.5 MHz     |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 12<br>5MHz  | TX      | Channel 23035 | Channel 23095 | Channel 23155 |
|                      |         | 701.5 MHz     | 707.5 MHz     | 713.5 MHz     |
|                      | RX      | Channel 5035  | Channel 5095  | Channel 5155  |
|                      |         | 731.5 MHz     | 737.5 MHz     | 743.5 MHz     |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 12<br>10MHz | TX      | Channel 23060 | Channel 23095 | Channel 23130 |
|                      |         | 704 MHz       | 707.5 MHz     | 711 MHz       |
|                      | RX      | Channel 5060  | Channel 5095  | Channel 5130  |
|                      |         | 734 MHz       | 737.5 MHz     | 741 MHz       |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 17<br>5MHz  | TX      | Channel 23755 | Channel 23790 | Channel 23825 |
|                      |         | 706.5 MHz     | 710 MHz       | 713.5 MHz     |
|                      | RX      | Channel 5755  | Channel 5790  | Channel 5825  |
|                      |         | 736.5 MHz     | 740 MHz       | 743.5 MHz     |
| Test Mode            | TX / RX | RF Channel    |               |               |
|                      |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 17<br>10MHz | TX      | Channel 23780 | Channel 23790 | Channel 23800 |
|                      |         | 709 MHz       | 710 MHz       | 711 MHz       |
|                      | RX      | Channel 5780  | Channel 5790  | Channel 5800  |
|                      |         | 739 MHz       | 740 MHz       | 741 MHz       |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170100023101

Page: 11 of 33

| Test Mode             | TX / RX | RF Channel    |               |               |
|-----------------------|---------|---------------|---------------|---------------|
|                       |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 25<br>1.4MHz | TX      | Channel 26047 | Channel 26365 | Channel 26683 |
|                       |         | 1850.7 MHz    | 1882.5 MHz    | 1914.3 MHz    |
|                       | RX      | Channel 8047  | Channel 8365  | Channel 8683  |
|                       |         | 1930.7 MHz    | 1962.5 MHz    | 1994.3 MHz    |
| Test Mode             | TX / RX | RF Channel    |               |               |
|                       |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 25<br>3MHz   | TX      | Channel 26055 | Channel 26365 | Channel 26675 |
|                       |         | 1851.5 MHz    | 1882.5 MHz    | 1913.5 MHz    |
|                       | RX      | Channel 8055  | Channel 8365  | Channel 8675  |
|                       |         | 1931.5 MHz    | 1962.5 MHz    | 1993.5 MHz    |
| Test Mode             | TX / RX | RF Channel    |               |               |
|                       |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 25<br>5MHz   | TX      | Channel 26065 | Channel 26365 | Channel 26665 |
|                       |         | 1852.5 MHz    | 1882.5 MHz    | 1912.5 MHz    |
|                       | RX      | Channel 8065  | Channel 8365  | Channel 8665  |
|                       |         | 1932.5 MHz    | 1962.5 MHz    | 1992.5 MHz    |
| Test Mode             | TX / RX | RF Channel    |               |               |
|                       |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 25<br>10MHz  | TX      | Channel 26090 | Channel 26365 | Channel 26640 |
|                       |         | 1855 MHz      | 1882.5 MHz    | 1910 MHz      |
|                       | RX      | Channel 8090  | Channel 8365  | Channel 8640  |
|                       |         | 1935 MHz      | 1962.5 MHz    | 1990 MHz      |
| Test Mode             | TX / RX | RF Channel    |               |               |
|                       |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 25<br>15MHz  | TX      | Channel 26115 | Channel 26365 | Channel 26615 |
|                       |         | 1857.5 MHz    | 1882.5 MHz    | 1907.5 MHz    |
|                       | RX      | Channel 8115  | Channel 8365  | Channel 8615  |
|                       |         | 1937.5 MHz    | 1962.5 MHz    | 1987.5 MHz    |
| Test Mode             | TX / RX | RF Channel    |               |               |
|                       |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 25<br>20MHz  | TX      | Channel 26140 | Channel 26365 | Channel 26590 |
|                       |         | 1860 MHz      | 1882.5 MHz    | 1905 MHz      |
|                       | RX      | Channel 8140  | Channel 8365  | Channel 8590  |
|                       |         | 1940 MHz      | 1962.5 MHz    | 1985 MHz      |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170100023101

Page: 12 of 33

| Test Mode                      | TX / RX | RF Channel    |               |               |
|--------------------------------|---------|---------------|---------------|---------------|
|                                |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND26<br>(814-824) 1.4MHz | TX      | Channel 26697 | Channel 26740 | Channel 26783 |
|                                |         | 814.7 MHz     | 819 MHz       | 823.3 MHz     |
|                                | RX      | Channel 8697  | Channel 8740  | Channel 8783  |
|                                |         | 859.7 MHz     | 864MHz        | 868.3 MHz     |
| Test Mode                      | TX / RX | RF Channel    |               |               |
|                                |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND26<br>(814-824) 3MHz   | TX      | Channel 26705 | Channel 26740 | Channel 26775 |
|                                |         | 815.5 MHz     | 819 MHz       | 822.5 MHz     |
|                                | RX      | Channel 8705  | Channel 8740  | Channel 8775  |
|                                |         | 860.5 MHz     | 864MHz        | 867.5 MHz     |
| Test Mode                      | TX / RX | RF Channel    |               |               |
|                                |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND26<br>(814-824) 5MHz   | TX      | Channel 26715 | Channel 26740 | Channel 26765 |
|                                |         | 816.5 MHz     | 819 MHz       | 821.5 MHz     |
|                                | RX      | Channel 8715  | Channel 8740  | Channel 8755  |
|                                |         | 861.5 MHz     | 864MHz        | 866.5 MHz     |
| Test Mode                      | TX / RX | RF Channel    |               |               |
|                                |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND26<br>(814-824) 10MHz  | TX      | Channel 26740 | Channel 26740 | Channel 26740 |
|                                |         | 819 MHz       | 819 MHz       | 819 MHz       |
|                                | RX      | Channel 8740  | Channel 8740  | Channel 8740  |
|                                |         | 864MHz        | 864MHz        | 864MHz        |
| Test Mode                      | TX / RX | RF Channel    |               |               |
|                                |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND26<br>(824-849) 1.4MHz | TX      | Channel 26797 | Channel 26915 | Channel 27033 |
|                                |         | 824.7 MHz     | 836.5 MHz     | 848.3 MHz     |
|                                | RX      | Channel 8697  | Channel 8915  | Channel 9033  |
|                                |         | 859.7 MHz     | 881.5 MHz     | 893.3 MHz     |
| Test Mode                      | TX / RX | RF Channel    |               |               |
|                                |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND26<br>(824-849) 3MHz   | TX      | Channel 26805 | Channel 26915 | Channel 27025 |
|                                |         | 825.5 MHz     | 836.5 MHz     | 847.5 MHz     |
|                                | RX      | Channel 8805  | Channel 8915  | Channel 9025  |
|                                |         | 860.5 MHz     | 881.5 MHz     | 892.5 MHz     |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170100023101

Page: 13 of 33

| Test Mode                     | TX / RX | RF Channel    |               |               |
|-------------------------------|---------|---------------|---------------|---------------|
|                               |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND26<br>(824-849) 5MHz  | TX      | Channel 26815 | Channel 26915 | Channel 27015 |
|                               |         | 826.5 MHz     | 836.5 MHz     | 846.5 MHz     |
|                               | RX      | Channel 8815  | Channel 8915  | Channel 9015  |
|                               |         | 871.5 MHz     | 881.5 MHz     | 891.5 MHz     |
| Test Mode                     | TX / RX | RF Channel    |               |               |
|                               |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND26<br>(824-849) 10MHz | TX      | Channel 26840 | Channel 26915 | Channel 26990 |
|                               |         | 829 MHz       | 836.5 MHz     | 844 MHz       |
|                               | RX      | Channel 8840  | Channel 8915  | Channel 8990  |
|                               |         | 874 MHz       | 881.5 MHz     | 889 MHz       |
| Test Mode                     | TX / RX | RF Channel    |               |               |
|                               |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND26<br>(824-849) 15MHz | TX      | Channel 26865 | Channel 26915 | Channel 26965 |
|                               |         | 831.5 MHz     | 836.5 MHz     | 841.5 MHz     |
|                               | RX      | Channel 8865  | Channel 8915  | Channel 8965  |
|                               |         | 876.5 MHz     | 881.5 MHz     | 886.5 MHz     |
| Test Mode                     | TX / RX | RF Channel    |               |               |
|                               |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 41<br>5MHz           | TX      | Channel 39675 | Channel40620  | Channel 41565 |
|                               |         | 2498.5 MHz    | 2593 MHz      | 2687.5 MHz    |
|                               | RX      | Channel 39675 | Channel40620  | Channel 41565 |
|                               |         | 2498.5 MHz    | 2593 MHz      | 2687.5 MHz    |
| Test Mode                     | TX / RX | RF Channel    |               |               |
|                               |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 41<br>10MHz          | TX      | Channel 39700 | Channel40620  | Channel 41540 |
|                               |         | 2501 MHz      | 2593 MHz      | 2685 MHz      |
|                               | RX      | Channel 39700 | Channel40620  | Channel 41540 |
|                               |         | 2501 MHz      | 2593 MHz      | 2685 MHz      |
| Test Mode                     | TX / RX | RF Channel    |               |               |
|                               |         | Low (L)       | Middle (M)    | High (H)      |
| LTE BAND 41<br>15MHz          | TX      | Channel 39725 | Channel40620  | Channel 41515 |
|                               |         | 2503.5 MHz    | 2593 MHz      | 2682.5 MHz    |
|                               | RX      | Channel 39725 | Channel40620  | Channel 41515 |
|                               |         | 2503.5 MHz    | 2593 MHz      | 2682.5 MHz    |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170100023101

Page: 14 of 33

| Test Mode            | TX / RX | RF Channel    |              |               |
|----------------------|---------|---------------|--------------|---------------|
|                      |         | Low (L)       | Middle (M)   | High (H)      |
| LTE BAND 41<br>20MHz | TX      | Channel 39750 | Channel40620 | Channel 41490 |
|                      |         | 2506 MHz      | 2593 MHz     | 2680 MHz      |
|                      | RX      | Channel 39750 | Channel40620 | Channel 41490 |
|                      |         | 2506 MHz      | 2593 MHz     | 2680 MHz      |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## 5.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.  
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

## 5.7 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

## 5.8 Deviation from Standards

None.

## 5.9 Abnormalities from Standard Conditions

None.



## 5.10 Other Information Requested by the Customer

None.

## 5.11 Technical Specification

| Characteristics             | Description                                                                                                                                                |                                                                                   |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|                             | <input checked="" type="checkbox"/> LTE                                                                                                                    |                                                                                   |
|                             | LTE band 2                                                                                                                                                 | Transmission (TX): 1850 to 1910 MHz                                               |
|                             |                                                                                                                                                            | Receiving (RX): 1930 to 1990 MHz                                                  |
|                             | LTE band 4                                                                                                                                                 | Transmission (TX): 1710 to 1755 MHz                                               |
|                             |                                                                                                                                                            | Receiving (RX): 2110 to 2155 MHz                                                  |
|                             | LTE band 12                                                                                                                                                | Transmission (TX): 699 to 716 MHz                                                 |
|                             |                                                                                                                                                            | Receiving (RX): 729 to 746 MHz                                                    |
|                             | LTE band 17                                                                                                                                                | Transmission (TX): 704 to 716 MHz                                                 |
|                             |                                                                                                                                                            | Receiving (RX): 734 to 746 MHz                                                    |
|                             | LTE band 25                                                                                                                                                | Transmission (TX): 1850 to 1915 MHz                                               |
|                             |                                                                                                                                                            | Receiving (RX): 1930 to 1995 MHz                                                  |
|                             | LTE band 26(814-824)                                                                                                                                       | Transmission (TX): 814 to 824 MHz                                                 |
|                             |                                                                                                                                                            | Receiving (RX): 859 to 869 MHz                                                    |
|                             | LTE band 26(824-849)                                                                                                                                       | Transmission (TX): 824 to 849 MHz                                                 |
|                             |                                                                                                                                                            | Receiving (RX): 869 to 894 MHz                                                    |
|                             | LTE band 41                                                                                                                                                | Transmission (TX): 2496 to 2690 MHz                                               |
|                             |                                                                                                                                                            | Receiving (RX): 2496 to 2690 MHz                                                  |
| Target TX Output Power      | LTE band 2: 18dBm<br>LTE band 4: 19.5dBm<br>LTE band 12: 23.5dBm<br>LTE band 17: 23.5dBm<br>LTE band 25: 18dBm<br>LTE band 26: 22dBm<br>LTE band 41: 18dBm |                                                                                   |
| Supported Channel Bandwidth | LTE system                                                                                                                                                 | <input checked="" type="checkbox"/> 1.4 MHz; 3 MHz; 5 MHz; 10 MHz; 15 MHz; 20 MHz |



# SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch

Report No.: SZEM170100023101

Page: 17 of 33

| Characteristics | Description         |                                                                                                                                                                      |
|-----------------|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                 | LTE band2           | 1M10G7D;1M09W7D; 1M10W7D<br>2M69G7D;2M69W7D; 2M69W7D<br>4M49G7D;4M49W7D; 4M49W7D<br>8M93G7D;8M95W7D; 8M93W7D<br>13M5G7D;13M5W7D; 13M5W7D<br>17M9G7D;18M0W7D; 17M9W7D |
|                 | LTE band4           | 1M10G7D;1M09W7D; 1M10W7D<br>2M69G7D;2M69W7D; 2M69W7D<br>4M49G7D;4M49W7D; 4M48W7D<br>8M93G7D;8M95W7D; 8M95W7D<br>13M5G7D;13M5W7D; 13M5W7D<br>17M9G7D;17M9W7D; 17M9W7D |
|                 | LTE band12          | 1M10G7D;1M09W7D; 1M10W7D<br>2M69G7D;2M69W7D; 2M69W7D<br>4M49G7D;4M49W7D; 4M48W7D<br>8M95G7D;8M93W7D; 8M95W7D                                                         |
|                 | LTE band17          | 4M49G7D;4M48W7D; 4M48W7D<br>8M95G7D;8M95W7D; 8M95W7D                                                                                                                 |
|                 | LTE band25          | 1M10G7D;1M09W7D; 1M10W7D<br>2M69G7D;2M69W7D; 2M69W7D<br>4M49G7D;4M49W7D; 4M48W7D<br>8M95G7D;8M95W7D; 8M95W7D<br>13M5G7D;13M5W7D; 13M5W7D<br>17M9G7D;17M9W7D; 17M9W7D |
|                 | LTE band26(814-824) | 1M10G7D;1M10W7D; 1M10W7D<br>2M69G7D;2M69W7D; 2M69W7D<br>4M49G7D;4M49W7D; 4M48W7D<br>8M95G7D;8M93W7D; 8M93W7D                                                         |
|                 | LTE band26(824-849) | 1M10G7D;1M09W7D; 1M10W7D<br>2M69G7D;2M69W7D; 2M69W7D<br>4M49G7D;4M50W7D; 4M48W7D<br>8M95G7D;8M95W7D;8M93W7D<br>13M5G7D;13M5W7D; 13M5W7D                              |
|                 | LTE band41          | 4M48G7D;4M48W7D; 4M48W7D<br>8M95G7D;8M93W7D; 8M95W7D<br>13M5G7D;13M5W7D; 13M5W7D<br>17M9G7D;17M9W7D; 17M9W7D                                                         |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## **6 Description of Tests**

### **6.1 Conducted Output Power**

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

The transmitter output was connected to a calibrated coaxial cable, attenuator and power meter, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The power output at the transmitter antenna port was determined by adding the value of the cable insertion loss to the power reading. The tests were performed at three frequencies (low channel, middle channel and high channel) and on the highest power levels, which can be setup on the transmitters.

**Note: Reference test setup 1**

### **6.2 Effective (Isotropic) Radiated Power of Transmitter**

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

#### **Below 1GHz test procedure as below:**

- 1). The EUT was powered ON and placed on a 0.8m high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.
- 8). Calculate power in dBm by the following formula:



$$\text{ERP (dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

Where:

Pg is the generator output power into the substitution antenna.

**Above 1GHz test procedure as below:**

- 1). Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber
- 2). Calculate power in dBm by the following formula:  
$$\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$
$$\text{EIRP} = \text{ERP} + 2.15\text{dB}$$

Where:

Pg is the generator output power into the substitution antenna.
- 3). Test the EUT in the lowest channel, the middle channel the Highest channel
- 4). The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.
- 5). Repeat above procedures until all frequencies measured was complete.

**Note: Reference test setup 2**

## **6.3 Occupied Bandwidth**

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured. The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel, middle channel and high channel). The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1 percent of the selected span as is possible without being below 1 percent. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used since a peak or, peak hold, may produce a wider bandwidth than actual. The trace data points are recovered and are directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 percent of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



**Note: Reference test setup 1**

## **6.4 Band Edge at Antenna Terminals**

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyser, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of 100kHz or 1% of the emission bandwidth of the fundamental emission of the transmitter may be employed. The EUT emission bandwidth is measured as the width of the signal between two points, outside of which all emission are attenuated at least 26dB below the transmitter power. The video bandwidth of the spectrum analyzer was set at thrice the resolution bandwidth. Detector Mode was set to peak or peak hold power.

**Note: Reference test setup 1**

## **6.5 Spurious And Harmonic Emissions at Antenna Terminal**

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

The transmitter output was connected to a calibrated coaxial cable, attenuator and Spectrum analyzer, the other end of which was connected to a Base Station Simulator. The Base Station Simulator was set to force the EUT to its maximum power setting. The tests were performed at three frequencies (low channel and high channel). The level of the carrier and the various conducted spurious and harmonic frequencies is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10th harmonic. On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB. Compliance with these provisions is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emission are attenuated at least 26 dB below the transmitter power.

**Note: Reference test setup 1**

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## **6.6 Peak-Average Ratio**

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

A peak to average ratio measurement is performed at the conducted port of the EUT. For WCDMA signals, the spectrum analyzers Complementary Cumulative Distribution Function (CCDF) measurement profile is used to determine the largest deviation between the average and the peak power of the EUT in a given bandwidth. The CCDF curve shows how much time the peak waveform spends at or above a given average power level. The percent of time the signal spends at or above the level defines the probability for that particular power level. For GSM signals, an average and a peak trace are used on a spectrum analyzer to determine the largest deviation between the average and the peak power of the EUT in a bandwidth greater than the emission bandwidth. The traces are generated with the spectrum analyzer set to zero span mode.

**Note: Reference test setup 1**

## **6.7 Field Strength of Spurious Radiation**

Measurement Procedure: FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

**Below 1GHz test procedure as below:**

- 1). The EUT was powered ON and placed on a 80cm high table in the chamber. The antenna of the transmitter was extended to its maximum length.
- 2). The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 3). Steps 1) and 2) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 4). The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 5). A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 2) is obtained for this set of conditions.
- 6). The output power into the substitution antenna was then measured.
- 7). Steps 5) and 6) were repeated with both antennas polarized.

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



8) Calculate power in dBm by the following formula:

$$\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

Where:

Pd is the dipole equivalent power, Pg is the generator output into the substitution antenna, and the antenna gain is the gain of the substitute antenna used relative to either a half-wave dipole (dBd) or an isotropic source (dBi). The substitute level is equal to Pg [dBm] – cable loss [dB]. The calculated Pd levels are then compared to the absolute spurious emission limit of -13dBm which is equivalent to the required minimum attenuation of  $43 + 10\log_{10}(\text{Power [Watts]})$ .

**Above 1GHz test procedure as below:**

1) Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber

2) Calculate power in dBm by the following formula:

$$\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

$$\text{EIRP} = \text{ERP} + 2.15\text{dB}$$

Where:

Pg is the generator output power into the substitution antenna.

3. Test the EUT in the lowest channel, the middle channel the Highest channel

4. The radiation measurements are performed in X, Y, Z axis positioning. And found the X axis positioning which it is worse case, Only the test worst case mode is recorded in the report.

5. Repeat above procedures until all frequencies measured was complete

**Note: Reference test setup 3**

## **6.8 Frequency Stability / Temperature Variation**

Measurement Procedure:

Frequency stability testing is performed in accordance with the guidelines of FCC KDB 971168 D01 Power Meas License Digital Systems v02r02

. The frequency stability of the transmitter is measured by:

a.) **Temperature:** The temperature is varied from -30°C to +50°C in 10°C increments using an environmental chamber.

b.) **Primary Supply Voltage:** The primary supply voltage is varied from 85% to 115% of the nominal value for non hand-carried battery and AC powered equipment. For hand-carried, battery-powered equipment, primary supply voltage is reduced to the battery operating end point which shall be specified by the manufacturer.

Specification – The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained



within  $\pm 0.00025\%$  ( $\pm 2.5$  ppm ) of the center frequency.


**Time Period and Procedure:**

1. The carrier frequency of the transmitter is measured at room temperature (20°C to provide a reference).
2. The equipment is turned on in a “standby” condition for fifteen minutes before applying power to the transmitter. Measurement of the carrier frequency of the transmitter is made within one minute after applying power to the transmitter.
3. Frequency measurements are made at 10°C intervals ranging from -30°C to +50°C. A period of at least one half-hour is provided to allow stabilization of the equipment at each temperature level.

**Note: Reference test setup 4**

## 6.9 Test Setups

### 6.9.1 Test Setup 1

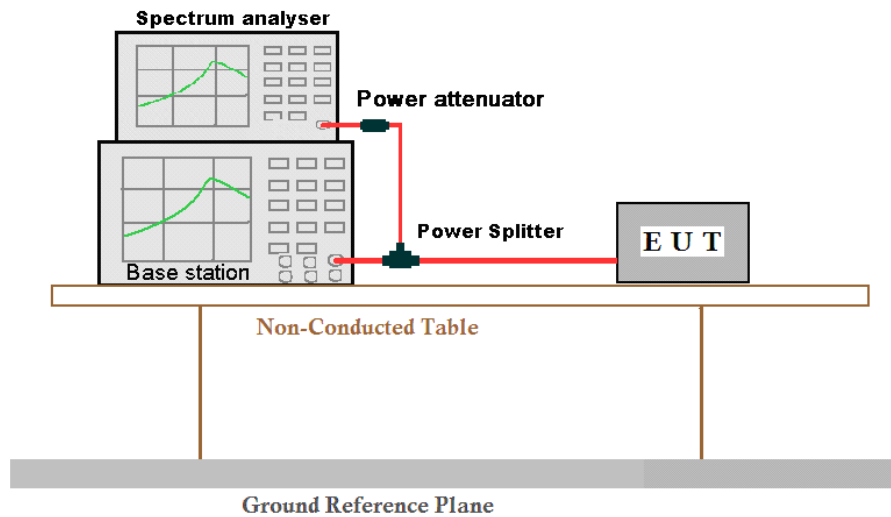

## 6.9.2 Test Setup 2

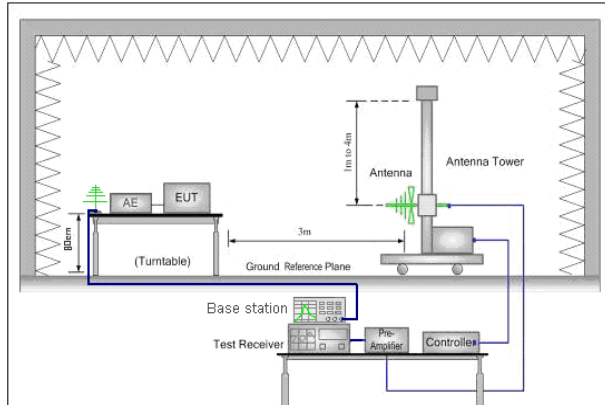


Figure 1. 30MHz to 1GHz

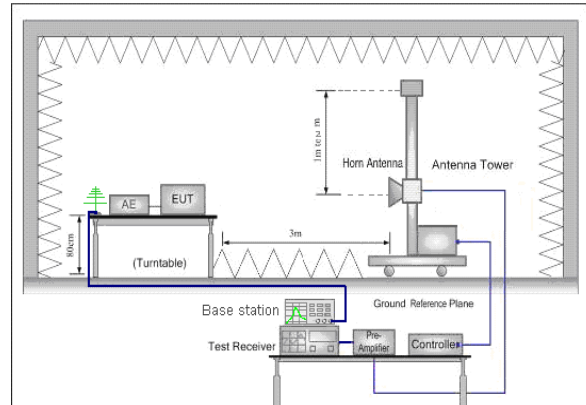


Figure 2. above 1GHz

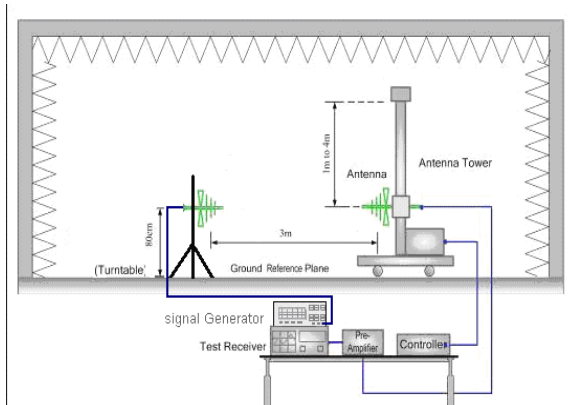


Figure 1. 30MHz to 1GHz

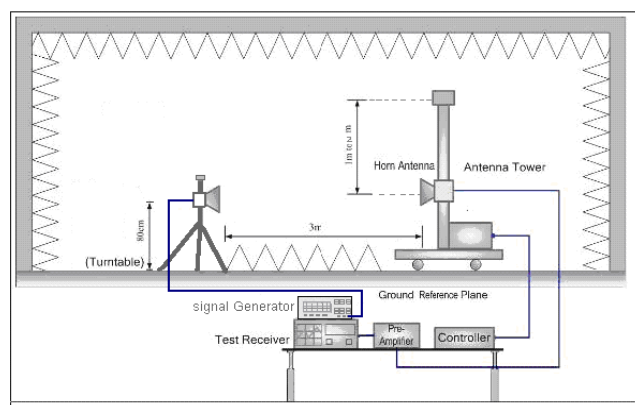


Figure 2. above 1GHz

### 6.9.3 Test Setup 3

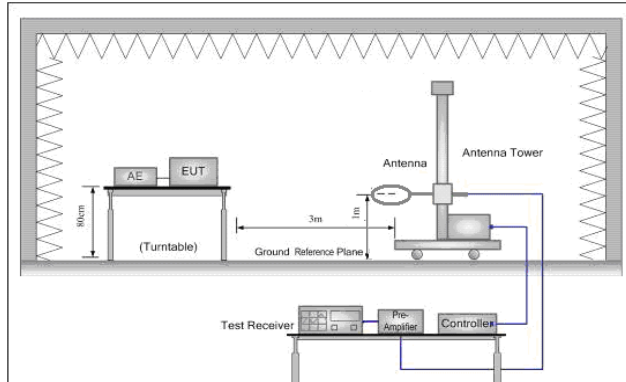


Figure 1. Below 30MHz

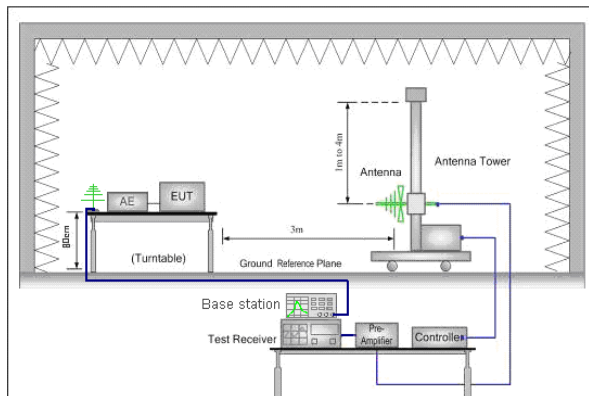


Figure 2. 30MHz to 1GHz

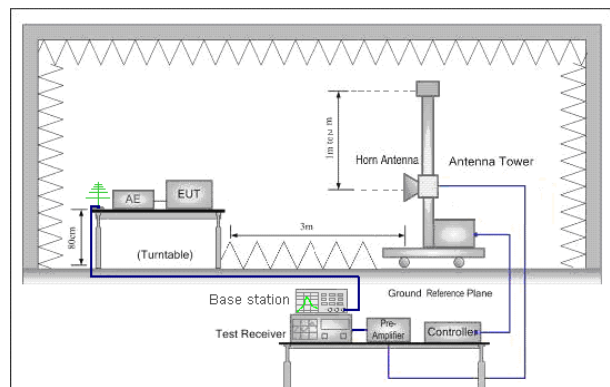


Figure 3. above 1GHz

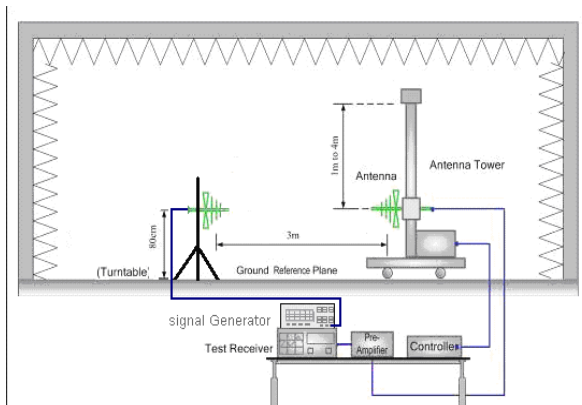


Figure 2. 30MHz to 1GHz


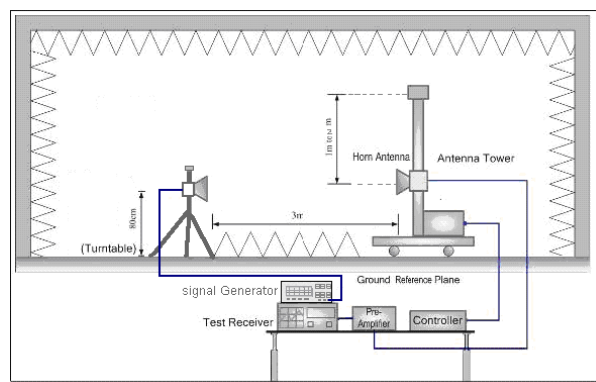


Figure 3. above 1GHz

#### 6.9.4 Test Setup 4



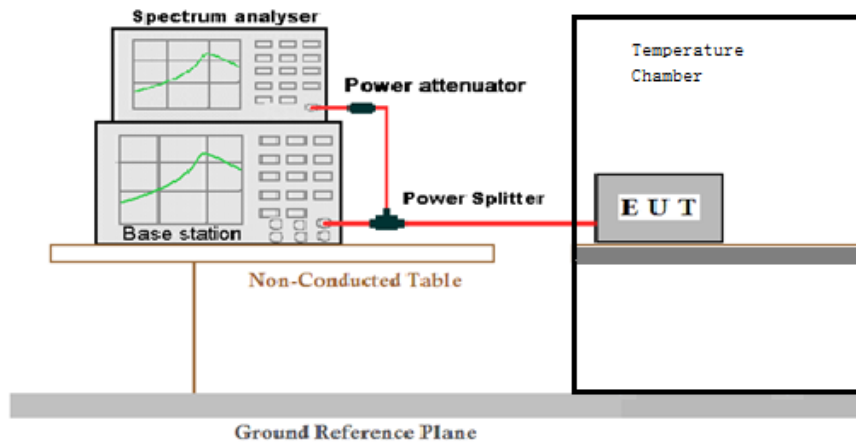

## 6.10 Test Conditions

| Test Case                           |                                               | Test Conditions  |                                                                  |
|-------------------------------------|-----------------------------------------------|------------------|------------------------------------------------------------------|
| Transmit Output Power Data          | Average Power, Total                          | Test Environment | Ambient Climate & Rated Voltage                                  |
|                                     |                                               | Test Setup       | Test Setup 1                                                     |
|                                     |                                               | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel ) |
|                                     |                                               | Test Mode        | LTE/TM1; LTE/TM2; LTE/TM3                                        |
|                                     | Average Power, Spectral Density (if required) | Test Environment | Ambient Climate & Rated Voltage                                  |
|                                     |                                               | Test Setup       | Test Setup 1                                                     |
|                                     |                                               | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel ) |
|                                     |                                               | Test Mode        | LTE/TM1; LTE/TM2; LTE/TM3                                        |
| Peak-to-Average Ratio (if required) |                                               | Test Environment | Ambient Climate & Rated Voltage                                  |
|                                     |                                               | Test Setup       | Test Setup 1                                                     |
|                                     |                                               | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel ) |
|                                     |                                               | Test Mode        | LTE/TM1; LTE/TM2; LTE/TM3                                        |
| Modulation Characteristics          |                                               | Test Environment | Ambient Climate & Rated Voltage                                  |
|                                     |                                               | Test Setup       | Test Setup 1                                                     |
|                                     |                                               | RF Channels (TX) | M<br>(M= middle channe )                                         |
|                                     |                                               | Test Mode        | LTE/TM1; LTE/TM2; LTE/TM3                                        |
| Bandwidth                           | Occupied Bandwidth                            | Test Environment | Ambient Climate & Rated Voltage                                  |
|                                     |                                               | Test Setup       | Test Setup 1                                                     |
|                                     |                                               | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel ) |
|                                     |                                               | Test Mode        | LTE/TM1; LTE/TM2; LTE/TM3                                        |
|                                     | Emission Bandwidth (if required)              | Test Environment | Ambient Climate & Rated Voltage                                  |
|                                     |                                               | Test Setup       | Test Setup 1                                                     |
|                                     |                                               | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel ) |
|                                     |                                               | Test Mode        | LTE/TM1; LTE/TM2; LTE/TM3                                        |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170100023101

Page: 29 of 33

|                                        |                  |                                                                                                                                               |
|----------------------------------------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Band Edges Compliance                  | Test Environment | Ambient Climate & Rated Voltage                                                                                                               |
|                                        | Test Setup       | Test Setup 1                                                                                                                                  |
|                                        | RF Channels (TX) | L, H<br>(L= low channel, H= high channel )                                                                                                    |
|                                        | Test Mode        | LTE/TM1; LTE/TM2; LTE/TM3                                                                                                                     |
| Spurious Emission at Antenna Terminals | Test Environment | Ambient Climate & Rated Voltage                                                                                                               |
|                                        | Test Setup       | Test Setup 1                                                                                                                                  |
|                                        | RF Channels (TX) | L,M, H<br>(L= low channel, M= middle channel, H= high channel )                                                                               |
|                                        | Test Mode        | LTE/TM1                                                                                                                                       |
| Field Strength of Spurious Radiation   | Test Environment | Ambient Climate & Rated Voltage                                                                                                               |
|                                        | Test Setup       | Test Setup 2                                                                                                                                  |
|                                        | Test Mode        | LTE/TM1; LTE/TM2; LTE/TM3NOTE: If applicable, the EUT conf. that has maximum power density (based on the equivalent power level) is selected. |
|                                        | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel )                                                                              |
| Frequency Stability                    | Test Env.        | (1) -30 °C to +50 °C with step 10 °C at Rated Voltage;<br>(2) VL, VN and VH of Rated Voltage at Ambient Climate.                              |
|                                        | Test Setup       | Test Setup 4                                                                                                                                  |
|                                        | RF Channels (TX) | L, M, H<br>(L= low channel, M= middle channel, H= high channel )                                                                              |
|                                        | Test Mode        | LTE/TM1; LTE/TM2; LTE/TM3                                                                                                                     |



## 7 Main Test Instruments

| RE in Chamber |                                      |                                    |           |               |                           |                              |
|---------------|--------------------------------------|------------------------------------|-----------|---------------|---------------------------|------------------------------|
| Item          | Test Equipment                       | Manufacturer                       | Model No. | Inventory No. | Cal. date<br>(yyyy-mm-dd) | Cal.Due date<br>(yyyy-mm-dd) |
| 1             | 3m Semi-Anechoic Chamber             | ETS-LINDGREN                       | N/A       | SEM001-01     | 2016-05-13                | 2017-05-13                   |
| 2             | EMI Test Receiver                    | Agilent Technologies               | N9038A    | SEM004-05     | 2017-09-16                | 2017-09-16                   |
| 3             | BiConiLog Antenna (26-3000MHz)       | ETS-LINDGREN                       | 3142C     | SEM003-02     | 2014-11-15                | 2017-11-15                   |
| 4             | Double-ridged horn (1-18GHz)         | ETS-LINDGREN                       | 3117      | SEM003-11     | 2015-10-17                | 2018-10-17                   |
| 5             | Horn Antenna (18-26GHz)              | ETS-LINDGREN                       | 3160      | SEM003-12     | 2014-11-24                | 2017-11-24                   |
| 6             | Pre-amplifier (0.1-1300MHz)          | Agilent Technologies               | 8447D     | SEM005-01     | 2016-04-25                | 2017-04-25                   |
| 7             | Pre-Amplifier (0.1-26.5GHz)          | Compliance Directions Systems Inc. | PAP-0126  | SEM004-10     | 2016-10-17                | 2017-10-17                   |
| 8             | Band filter                          | Amindeon                           | 82346     | SEM023-01     | N/A                       | N/A                          |
| 9             | Universal radio communication tester | Rohde & Schwarz                    | CMU200    | SEM010-01     | 2016-10-23                | 2017-10-23                   |
| 10            | Universal radio communication tester | Rohde & Schwarz                    | CMW500    | SEM010-03     | 2016-10-23                | 2017-10-23                   |
| 11            | DC Power Supply                      | Zhao Xin                           | RXN-305D  | SEM011-02     | 2016-10-09                | 2017-10-09                   |
| 12            | BiConiLog Antenna (30MHz-3GHz)       | Schwarzbeck                        | VULB9163  | SEM003-05     | 2015-10-17                | 2018-10-17                   |
| 13            | Horn Antenna (800MHz-18GHz)          | Rohde & Schwarz                    | HF907     | SEM003-06     | 2015-06-14                | 2018-06-14                   |



**SGS-CSTC Standards Technical Services Co., Ltd.**  
**Shenzhen Branch**

Report No.: SZEM170100023101

Page: 31 of 33

| RF connected test |                                            |                          |           |               |                           |                              |
|-------------------|--------------------------------------------|--------------------------|-----------|---------------|---------------------------|------------------------------|
| Item              | Test Equipment                             | Manufacturer             | Model No. | Inventory No. | Cal. date<br>(yyyy-mm-dd) | Cal.Due date<br>(yyyy-mm-dd) |
| 1                 | Humi/ Temp Indicator                       | MingGao                  | TH101B    | W006-09       | 2016-03-09                | 2017-03-09                   |
| 2                 | Spectrum Analyzer                          | Rohde & Schwarz          | FSP       | SEL0154       | 2016-09-17                | 2017-09-17                   |
| 3                 | MXA Signal Analyzer                        | Agilent                  | N9020A    | W025-01       | 2016-07-18                | 2017-07-18                   |
| 4                 | Barometer                                  | ChangChun                | DYM3      | SEL0088       | 2016-05-24                | 2017-05-24                   |
| 5                 | Dual Output Mobile Communication DC Source | Agilent Technologies Inc | 66319D    | W009-02       | 2016-07-23                | 2017-07-23                   |
| 6                 | Digital Multimeter                         | Fluke                    | 15B+      | W055-01       | 2016-03-09                | 2017-03-09                   |
| 7                 | Wireless Communications Test Set           | Rohde & Schwarz          | CMW500    | W005-03       | 2016-03-08                | 2017-03-08                   |
| 8                 | Universal Radio Communication Tester       | R&S                      | CMU200    | W005-01       | 2016-10-23                | 2017-10-23                   |

"This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at [www.sgs.com/terms\\_and\\_conditions.htm](http://www.sgs.com/terms_and_conditions.htm) and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at [www.sgs.com/terms\\_e-document.htm](http://www.sgs.com/terms_e-document.htm). Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



## 8 Measurement Uncertainty

For a 95% confidence level ( $k = 2$ ), the measurement expanded uncertainties for defined systems, in accordance with the recommendations of ISO 17025 as following:

| Test Item                            | Extended Uncertainty     | Data                                                                                                                                                        |
|--------------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Transmit Output Power Data           | Power [dBm]              | U = 0.37 dB                                                                                                                                                 |
| Bandwidth                            | Magnitude [%]            | U = 0.2%                                                                                                                                                    |
| Band Edge Compliance                 | Disturbance Power [dBm]  | U = 2.0 dB                                                                                                                                                  |
| Spurious Emissions, Conducted        | Disturbance Power [dBm]  | U = 2.0 dB                                                                                                                                                  |
| Field Strength of Spurious Radiation | ERP [dBm]                | For 3 m Chamber:<br>U = 4.5 dB (30 MHz to 1GHz)<br>U = 3.3 dB (above 1 GHz)<br>For 10 m Chamber:<br>U = 4.5 dB (30 MHz to 1GHz)<br>U = 3.2 dB (above 1 GHz) |
| Frequency Stability                  | Frequency Accuracy [ppm] | U = 0.24 ppm                                                                                                                                                |



## **9 Photographs - EUT Constructional Details**

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1701000231RG.

---

The End